

AD-474960

ASESB LIBRARY

474-9602

NWC

TECHNICAL PROGRESS REPORT 413

NOTS TP 3910

COPY 53

USADAC TECHNICAL LIBRARY



5 0712 01019401 6

## HIGH EXPLOSIVE EQUIVALENCY TESTS OF ROCKET MOTORS

by

F. H. Weals

C. H. Wilson

Systems Development Department

**ABSTRACT.** From November 1964 to 19 March 1965 seven solid propellant motor hazard tests and two high explosive calibration tests were conducted at the U. S. Naval Ordnance Test Station, China Lake, California. The primary purpose of the tests was to assess the blast yield of two classes of solid propellant material, when subjected to severe explosive shock, and to compare the propellant blast yields to those produced by a standard explosive. The following yields, in percent of TNT equivalency by weight, were determined from over-pressure and impulse data from a blast gage array: The highest yield of class 2 propellants tested alone approximated 40%; class 7 propellants tested alone produced well over 100%; and a combination of equal amounts of each class produced approximately 100%. The quantity and dispersion of fragments varied widely with the propellants used and with the test configuration.

Additional tests are planned using different motor configurations, different propellants, and varying explosive stimuli.

**U. S. NAVAL ORDNANCE TEST STATION****China Lake, California**

November 1965

ASESB LIBRARY

DDESB  
NOT  
+2

U. S. NAVAL ORDNANCE TEST STATION  
AN ACTIVITY OF THE BUREAU OF NAVAL WEAPONS

J. I. HARDY, CAPT., USN  
Commander

WM. B. McLEAN, PH. D.  
Technical Director

FOREWORD

This report documents results from the initial seven tests in a continuing series of experiments planned to investigate the blast yield of solid propellant motors. Blast yields from the seven motor tests are related to those produced by common explosives, TNT, and Composition B, to arrive at high explosive equivalency values for the propellants investigated.

The tests were conducted during the period November 1964 to March 1965 for the Armed Services Explosives Safety Board (ASESB). The primary funding was provided by the National Aeronautics and Space Administration (NASA) under Work Request W-11543B-Am. 1 and Local Project Number 965.

Supplemental funding was provided through the Dividing Wall program, which is supported by funds from the three Military Departments and from the Defense Atomic Support Agency (DASA). The Dividing Wall program is currently identified as Task Assignment RMMO-62061/216-1/F008-11-05 and Local Project No. 556.

Released by  
JAMES E. COLVARD, Head  
Project Engineering Division  
August 1965

Under authority of  
WM. B. McLEAN  
Technical Director

NOTS Technical Publication 3910  
Technical Progress Report 413

Published by. . . . . Systems Development Department  
Manuscript . . . . . 30/MS-751  
Collation . . . . . Cover, 25 leaves, DD Form 1473, abstract cards  
First printing . . . . . 135 numbered copies

THIS REPORT HAS BEEN DELIMITED  
AND CLEARED FOR PUBLIC RELEASE  
UNDER DOD DIRECTIVE 5200.20 AND  
NO RESTRICTIONS ARE IMPOSED UPON  
ITS USE AND DISCLOSURE.

DISTRIBUTION STATEMENT A

APPROVED FOR PUBLIC RELEASE;  
DISTRIBUTION UNLIMITED.

# **SECURITY**

---

# **MARKING**

**The classified or limited status of this report applies to each page, unless otherwise marked.**

**Separate page printouts MUST be marked accordingly.**

---

**THIS DOCUMENT CONTAINS INFORMATION AFFECTING THE NATIONAL DEFENSE OF THE UNITED STATES WITHIN THE MEANING OF THE ESPIONAGE LAWS, TITLE 18, U.S.C., SECTIONS 793 AND 794. THE TRANSMISSION OR THE REVELATION OF ITS CONTENTS IN ANY MANNER TO AN UNAUTHORIZED PERSON IS PROHIBITED BY LAW.**

**NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.**

## CONTENTS

|                                                                                                 |    |
|-------------------------------------------------------------------------------------------------|----|
| Introduction . . . . .                                                                          | 1  |
| Description of Tests . . . . .                                                                  | 1  |
| Motor Tests . . . . .                                                                           | 1  |
| Calibration Firings With High Explosive . . . . .                                               | 2  |
| Test Instrumentation . . . . .                                                                  | 4  |
| Test Results . . . . .                                                                          | 10 |
| Summary . . . . .                                                                               | 10 |
| Analysis of Blast Gage Data . . . . .                                                           | 19 |
| Comparison With Published Data . . . . .                                                        | 19 |
| Overpressure Comparison With High Explosive Calibration Firings . . . . .                       | 20 |
| Impulse Comparison With High Explosive Calibration Firings . . . . .                            | 21 |
| Limitations of Reference Data . . . . .                                                         | 23 |
| Explanation of Tables 1 Through 9 . . . . .                                                     | 23 |
| Analysis of Blast Yield Comparisons . . . . .                                                   | 33 |
| Comparison With TNT . . . . .                                                                   | 33 |
| Comparison With Composition B . . . . .                                                         | 33 |
| General Observations Concerning Derived Yields . . . . .                                        | 36 |
| Conclusions . . . . .                                                                           | 37 |
| Appendix: Armed Services Explosives Safety Board Solid Propellant Motor Hazards Tests . . . . . | 39 |

---

Figures:

|                                                                                                                                          |    |
|------------------------------------------------------------------------------------------------------------------------------------------|----|
| 1. Montage Showing Motors in Place for Tests 1 Through 7 . . . . .                                                                       | 3  |
| 2. Test Configurations Used in Calibration Firings A and B . . . . .                                                                     | 3  |
| 3. Overpressure Gage Layout for Motor Hazard Tests Using 1 or 2 Motors Per Test . . . . .                                                | 5  |
| 4. Fragment Distribution, Test No. 1 . . . . .                                                                                           | 7  |
| 5. Propellant Fragment Dispersion on Preselected Plots, Test No. 4 . . . . .                                                             | 8  |
| 6. Propellant Fragment Dispersion on Preselected Plots, Test No. 5 . . . . .                                                             | 9  |
| 7. Aerial View of Test No. 1 at Time of Explosion . . . . .                                                                              | 11 |
| 8. Aerial View of Test No. 1 Approximately 5 Seconds After the Explosion<br>Showing Burning Fragments of Propellant in the Air . . . . . | 12 |
| 9. Crater Formed by Test No. 1 . . . . .                                                                                                 | 13 |
| 10. Test Site After Test No. 1 . . . . .                                                                                                 | 13 |
| 11. Residue of Class 2 Propellant After Burning on Ground, Test No. 1 . . . . .                                                          | 14 |

|                                                                                                                                 |    |
|---------------------------------------------------------------------------------------------------------------------------------|----|
| 12. Crater Formed by Test No. 2 . . . . .                                                                                       | 15 |
| 13. Crack in Ground Surface Near Crater Formed by Test No. 2 . . . . .                                                          | 15 |
| 14. Side View of Crater Formed by Test No. 3 . . . . .                                                                          | 17 |
| 15. Top View of Crater Formed by Test No. 3 . . . . .                                                                           | 17 |
| 16. Overpressure Versus Scaled Distance Calibration Curves . . . . .                                                            | 20 |
| 17. Scaled Impulse Versus Scaled Distance . . . . .                                                                             | 22 |
| 18. Impulse Versus $W^{2/3}$ for R Values of 210, 340, 520, 880,<br>1,400, and 2,000 Feet (Calibration Tests A and B) . . . . . | 22 |
| 19. Impulse Versus $W^{2/3}$ for R Values of 80, 110, and 150<br>Feet (Calibration Tests A and B) . . . . .                     | 23 |

---

Tables:

|                                                                    |    |
|--------------------------------------------------------------------|----|
| 1. Test #1 (ES-4259) . . . . .                                     | 24 |
| 2. Test #2 (ES-4260) . . . . .                                     | 25 |
| 3. Test #3 (ES-4261-1) . . . . .                                   | 26 |
| 4. Test #4 (ES-4261-2) . . . . .                                   | 27 |
| 5. Test #5 (ES-5001) . . . . .                                     | 28 |
| 6. Test #6 (ES-5058) . . . . .                                     | 29 |
| 7. Test #7 (ES-5065) . . . . .                                     | 30 |
| 8. Calibration Test "A" (ES-4262) . . . . .                        | 31 |
| 9. Calibration Test "B" (ES-5064) . . . . .                        | 32 |
| 10. Summary of TNT Equivalent Yield . . . . .                      | 34 |
| 11. Summary in Terms of Composition "B" Equivalent Yield . . . . . | 35 |

ACKNOWLEDGMENT

Constructive comments in test planning and report preparation have been received from members of the staff of ASE5B. Will Filler of the Naval Ordnance Laboratory, White Oak, has provided valuable suggestions relating to the technical aspects of the report.

## INTRODUCTION

This report presents an interim summary of data presently available from a continuing series of solid propellant motor hazard tests. The tests are being conducted at the U. S. Naval Ordnance Test Station (NOTS), China Lake, California, under the auspices of the Armed Services Explosives Safety Board (ASESB), with funds provided primarily by the National Aeronautics and Space Administration (NASA). The motors tested were provided by the Bureau of Naval Weapons, Special Projects Office.

The seven motor tests and two calibration high-explosive tests described in this report were conducted from 5 November 1964 through 19 March 1965. The purpose of the tests was to assess the blast yield of two classes of solid propellant material, when subjected to severe explosive shock, and to compare the propellant blast yields to those produced by standard explosives.

## DESCRIPTION OF TESTS

### MOTOR TESTS

One class 2 motor was used in Test No. 1, and one class 7 motor was used in Test No. 2. A primary objective of the two tests was to determine the blast yield of large solid propellant motors when subjected to the severe stimulus of the detonation of a high explosive primer in intimate contact with the propellant grain. The priming explosive consisted of 96 lb of Composition C-4 placed in the grain perforation, with an electric detonator embedded in each end of the priming charge.

Two motors (one class 2 and one class 7) were used in each of the next three tests. Only the motor containing class 7 propellant was primed; the stimulus to the class 2 motor was provided by the explosion of the class 7 donor motor. Tests 3 and 4 were identical, with the motors placed side-by-side in a horizontal attitude; in Test 5, the class 7 motor was placed on top of the class 2 motor, with both motors in a vertical position.

The test setup for Test No. 6 was the same as for Tests 3 and 4, except that two class 2 motors (each primed with 96 lb of C-4) were used. The seventh test configuration was like that of Test 5; i.e., a class 7 motor was placed on top of the class 2 motor; however, the priming agent used in this test was a 100-lb spherical charge of cyclotol placed on top of the class 7 motor.

Figure 1 shows the test configurations used in each of the seven motor tests.

#### CALIBRATION FIRINGS WITH HIGH EXPLOSIVE

##### Calibration Test A

The common explosive, Composition B, was employed for this test. The Comp B was in cast form and contained in cubical metal cans. Each container and its contents weighed  $47\frac{1}{2}$  pounds. The cans were arranged in a configuration approximating that of two test motors, side-by-side, as in Tests 3 and 4. The explosive configuration measured 81 inches by 56 inches in plan form and was 36 inches high. Two cans were removed from the main group and stacked on top to make room for the two 40-lb booster charges that were inserted, one in either side of the stack. Each booster charge was equipped with two electric blasting caps, all four of which were fired simultaneously.

##### Calibration Test B

In this test, flaked TNT was placed in a braced wooden structure of octagonal cross section. The length-to-diameter ratio of the explosive charge approximated that of a single motor of the types employed in the motor tests. The main axis of the charge was horizontal, and the bottom of the charge was separated from the ground plane by the thickness of the container floor--about four inches. Priming was accomplished with 96 lb of C-4 contained in a 6x6-inch wooden box that extended from one end to the other at the main axis of the TNT package. The C-4 explosive was detonated by two electric detonators, one at each end of the priming charge. Because the flaked TNT was considerably less dense than were the propellants in the motors tested, and also because of the weight difference, the volume of the TNT charge was substantially greater than that of a single motor.

Test configurations used for the two calibration tests are shown in Fig. 2.

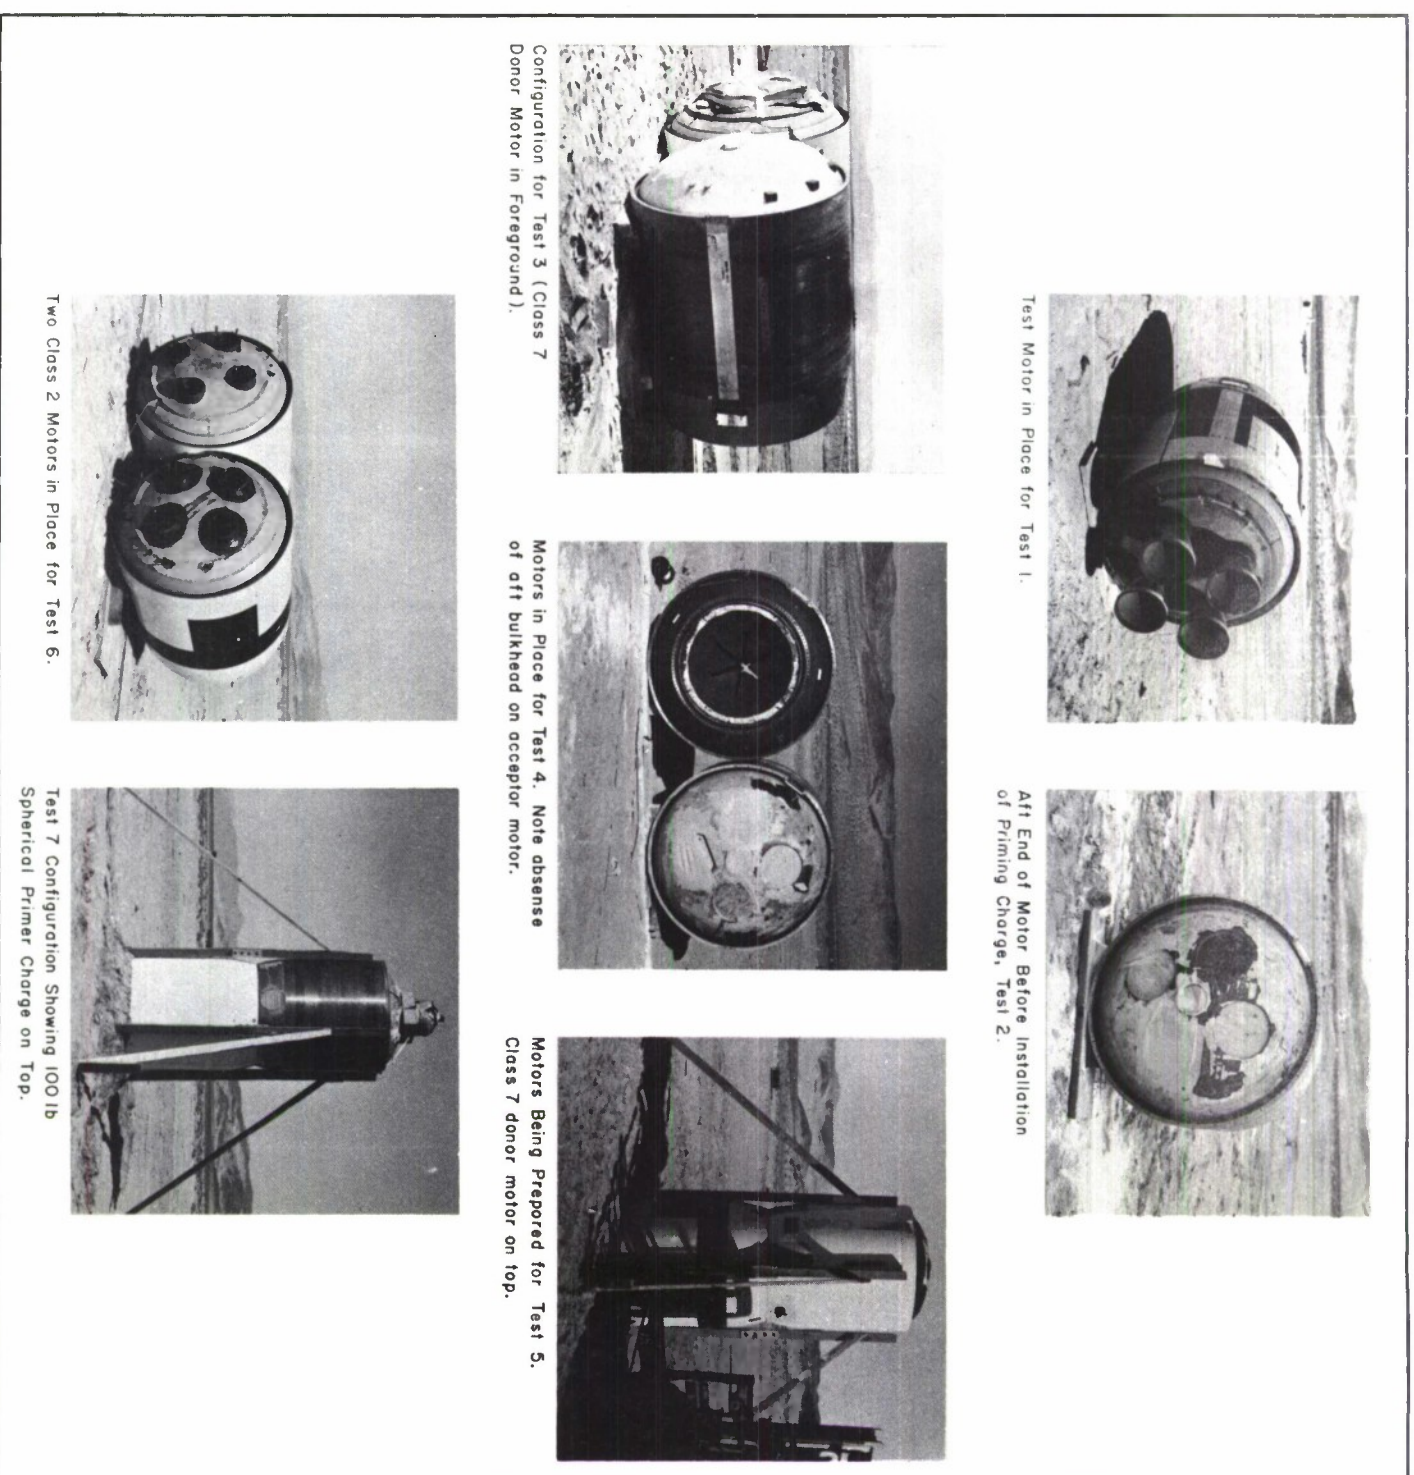


FIG. 1. Montage Showing Motors in Place for Tests 1 Through 7.

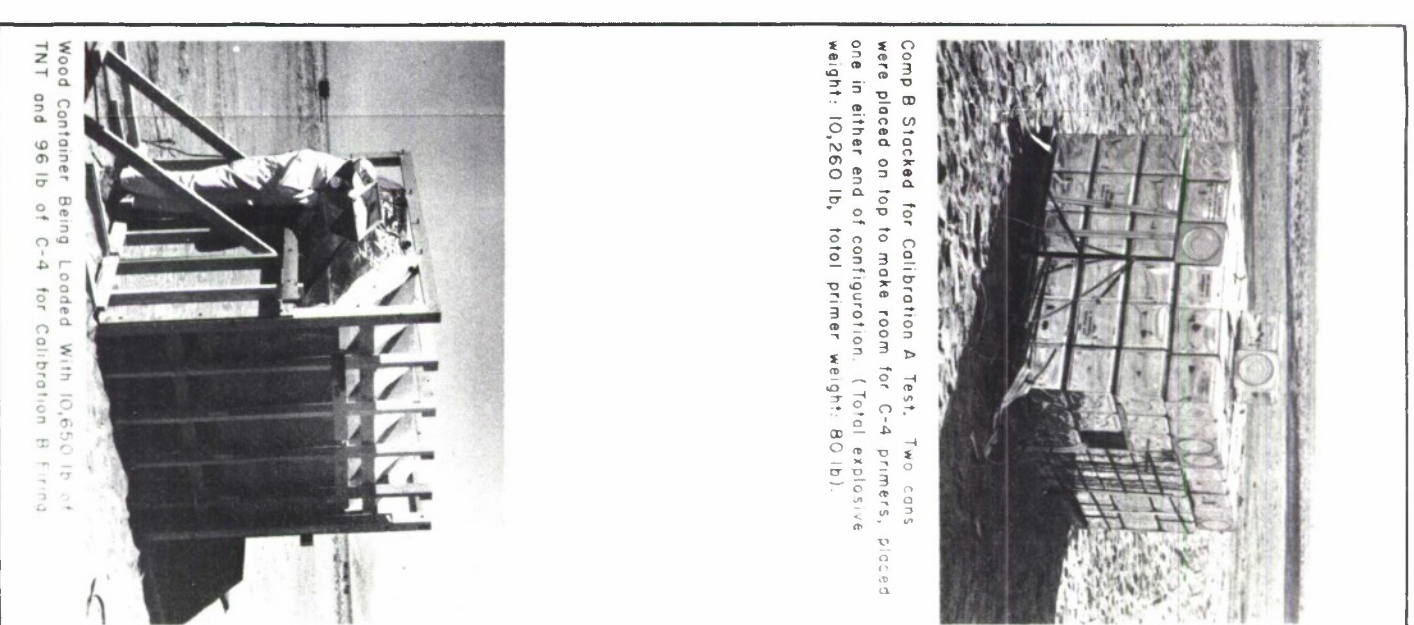


FIG. 2. Test Configurations Used in Calibration Firings A and B.

Test parameters for both the motor and calibration tests are summarized below:

| Motor test number | Number of motors tested | Class 2 motors                |           | Class 7 motors |           | Test date | NOTS Experiment Specification Number |
|-------------------|-------------------------|-------------------------------|-----------|----------------|-----------|-----------|--------------------------------------|
|                   |                         | Number                        | Prop. wt. | Number         | Prop. wt. |           |                                      |
| 1                 | 1                       | 1                             | 7,250     | 0              | 0         | 5 Nov 64  | 4259                                 |
| 2                 | 1                       | 0                             | 0         | 1              | 7,360     | 16 Nov 64 | 4260                                 |
| 3                 | 2                       | 1                             | 7,250     | 1              | 7,360     | 18 Nov 64 | 4261-1                               |
| 4                 | 2                       | 1                             | 7,250     | 1              | 7,360     | 20 Nov 64 | 4261-2                               |
| 5                 | 2                       | 1                             | 7,250     | 1              | 7,360     | 8 Jan 65  | 5001                                 |
| 6                 | 2                       | 2                             | 14,500    | 0              | 0         | 16 Mar 65 | 5058                                 |
| 7                 | 2                       | 1                             | 7,250     | 1              | 7,360     | 17 Mar 65 | 5065                                 |
| Calibration test  |                         | Explosives                    |           |                |           | Test date | NOTS ES number                       |
| A                 |                         | 10,260 lb Comp. B & 80 lb C-4 |           |                |           | 25 Nov 64 | 4262                                 |
| B                 |                         | 10,650 lb TNT & 96 lb C-4     |           |                |           | 19 Mar 65 | 5064                                 |

#### TEST INSTRUMENTATION

##### Blast Gages

Three different types of blast gages were used to measure overpressure-time history: Ballistics Research Laboratory (BRL) mechanical PHS gages, BRL mechanical PNS gages, and Kistler piezoelectric gages. The blast-measuring instruments were deployed on two radial lines at right angles to each other, as shown in the diagram in Fig. 3. Because of the differences in response times, the Kistler gages were placed relatively close in, PNS gages were located at mid-positions, and PHS gages were used in the more distant locations. The table below lists the gages and their positions; however, all gages were not used in all tests.

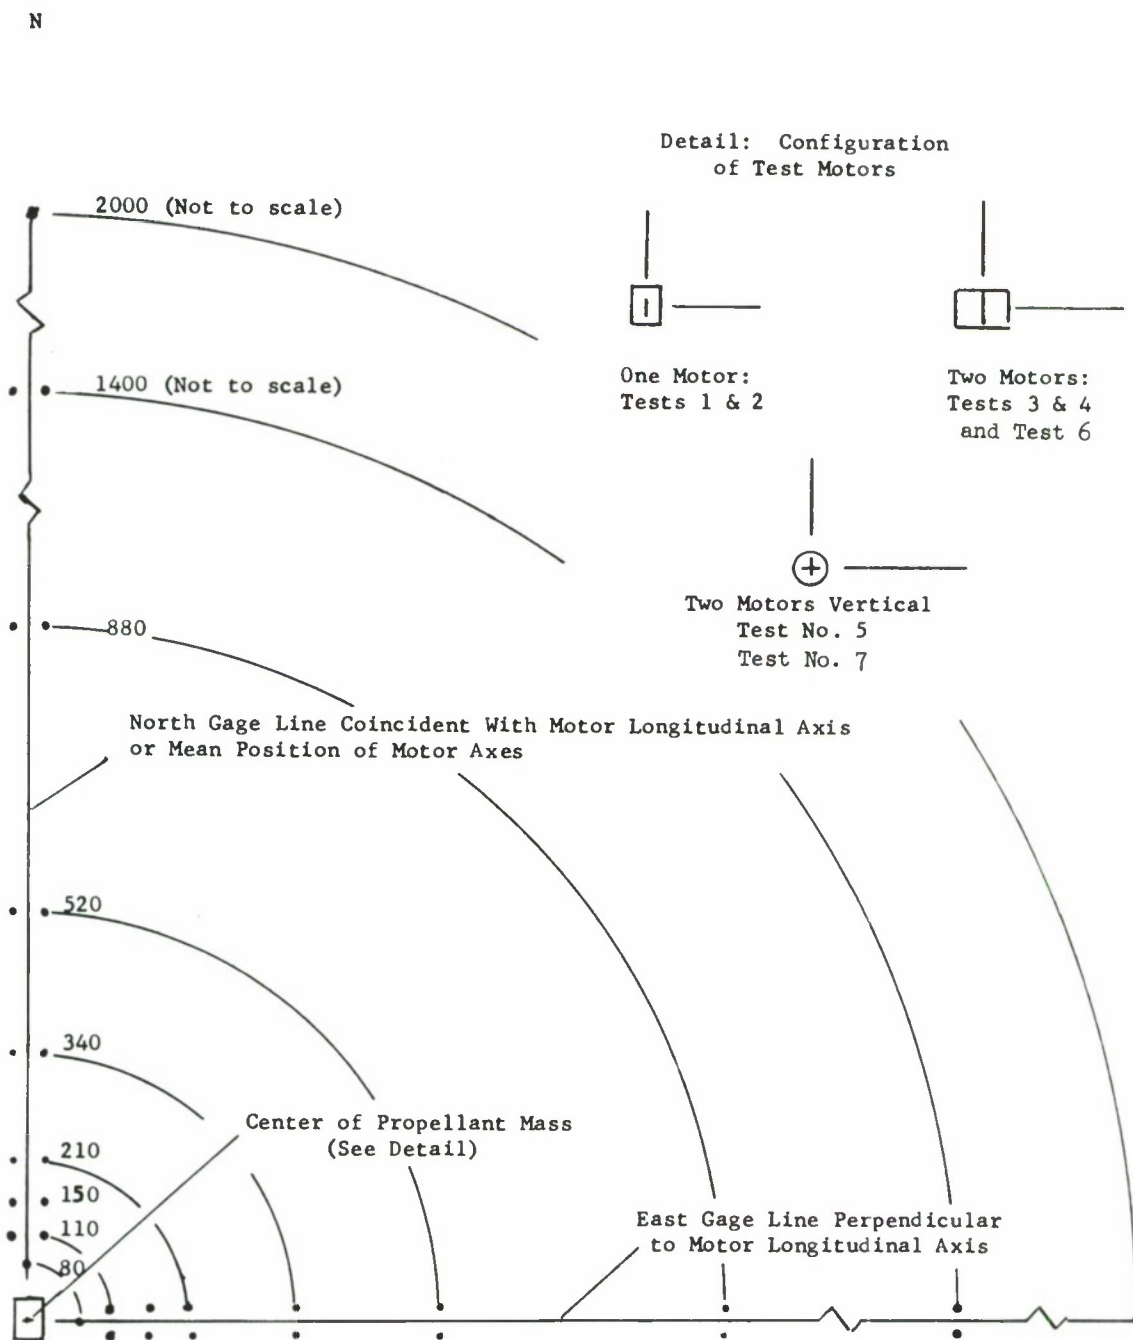


FIG. 3. Overpressure Gage Layout for Motor Hazard Tests Using 1 or 2 Motors Per Test.

| Nominal pressure region (psi) | R gage distance from center of mass (ft) | Gage type (1) and nominal pressure rating (2) for each gage line |        |           |        |
|-------------------------------|------------------------------------------|------------------------------------------------------------------|--------|-----------|--------|
|                               |                                          | Line North                                                       |        | Line East |        |
|                               |                                          | Gage A                                                           | Gage B | Gage C    | Gage D |
| 64                            | 80                                       | K                                                                | None   | K         | None   |
| 32                            | 110                                      | K                                                                | P-50   | K         | None   |
| 16                            | 150                                      | K                                                                | P-25   | K         | None   |
| 8                             | 210                                      | P-10                                                             | B-15   | P-10      | B-15   |
| 4                             | 340                                      | B-5                                                              | B-5    | P-5       | B-15   |
| 2                             | 520                                      | B-5                                                              | B-5    | B-5       | B-5    |
| 1                             | 880                                      | B-1                                                              | B-5    | P-2       | B-5    |
| 0.5                           | 1,400                                    | B-0.5                                                            | B-1    | B-0.5     | B-1    |
| 0.3                           | 2,000                                    | B-0.5                                                            | None   | B-0.5     | None   |

- NOTE: (1) B = Ballistics Research Lab, PHS type gage  
P = Ballistics Research Lab, PNS type gage  
K = Kistler piezoelectric gage
- (2) Ballistics Research Lab gages yield reliable data to double their nominal pressure rating.

### Optical Instrumentation

Both motion-picture and still cameras (ranging in size from 16mm to 4x5-inch and operating at various frame rates) were used to record fire-ball growth and fragment travel. The 4x5 cameras all used infrared film and long exposure times--from 15 to 20 seconds. The frame rates employed with the motion picture cameras ranged from 30 to 8000 frames per second. In general, photographic coverage was from two directions: one along a continuation of the test motor centerline and the other at right angles to the first.

### Fragment Search Procedures

Prior to the first test, the test site was divided into search areas as shown in Fig. 4, and as propellant fragments were collected, they were identified with the area in which they were found. After the first three tests, however, it became apparent that an attempt to recover all fragments from a large area was extremely time-consuming and expensive. Therefore, for the remaining tests, small plots, considered to be

representative of larger areas in the same sector at the same distance from ground zero, were selected and marked off (Figs. 5 and 6) for detailed fragment search. (For detailed description of plots, see page 16.)

The data shown in Figs. 4, 5, and 6 are further discussed under Test 1, 4, and 5 results, pages 10 and 16.

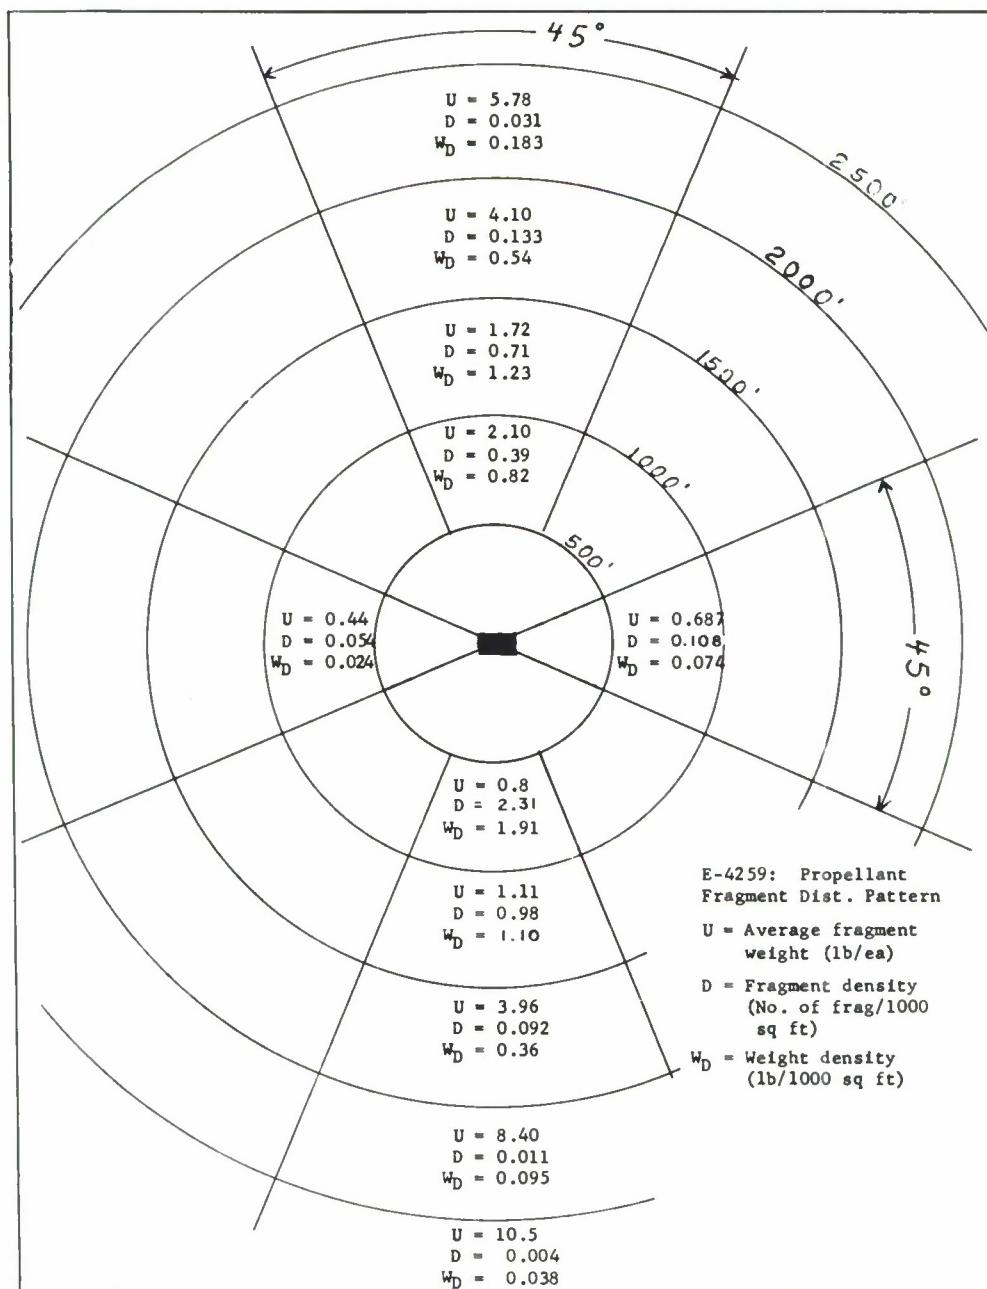


FIG. 4. Fragment Distribution, Test No. 1.



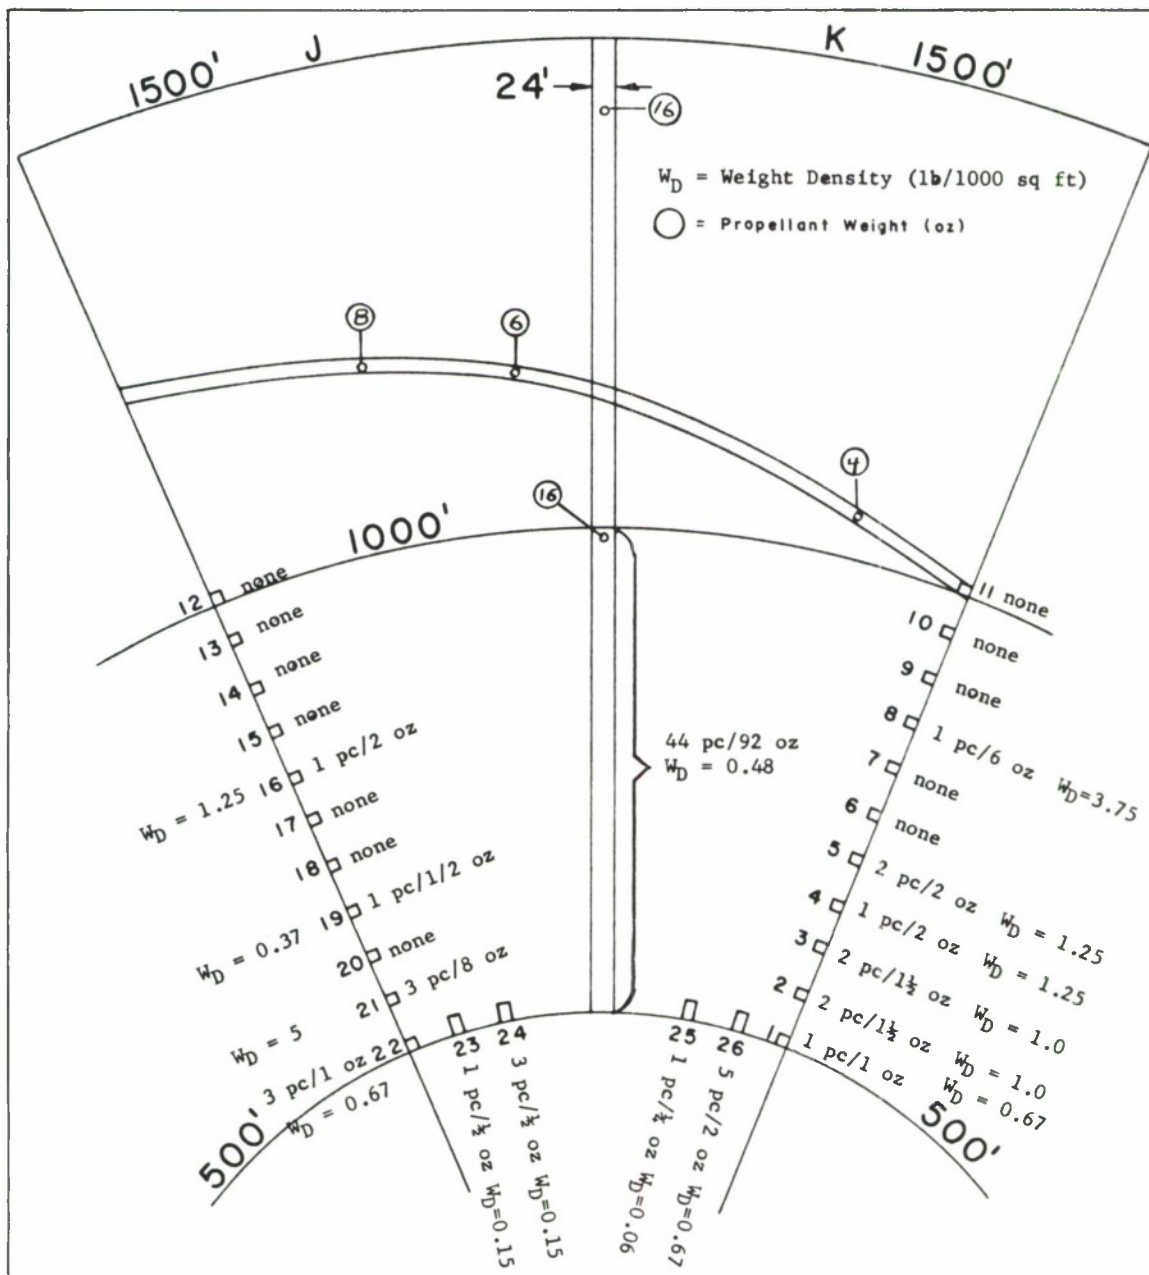


FIG. 6. Propellant Fragment Dispersion on Preselected Plots, Test No. 5.

## TEST RESULTS

## SUMMARY

The largest fragments were produced in the first test, in which one class 2 motor was primed and exploded. In all tests, a small number of fragments (possibly 10% of the total) were burning as they traveled through the air and continued to burn on the ground. In general, larger fragments traveled farther than smaller ones. In Tests 1, 3, and 4, in which the class 2 motors were placed on the ground in a horizontal position, most fragments were thrown out at right angles to the motor axis, while smaller and fewer fragments were thrown out at the ends--in the direction of the motor axis. Since very few inert fragments large enough to be a significant hazard were recovered from any of the tests, they were disregarded.

Summaries of conditions associated with each test are presented in the Appendix to this report.

Test No. 1

The single class 2 propellant motor, primed with 96 lb of C-4 for this test, exploded without much violence and produced a crater that measured 3 ft deep and 13 ft across. Fragments of motor propellant were thrown out to 3,000 ft on either side of the test motor and, to a lesser degree, into the two sectors at either end of the motor.

The area inside the 500-ft circle shown in Fig. 4 was saturated with numerous small fragments. Since this area was also subjected to severe blast pressure, these fragments were not considered as primary hazards and no attempt was made to plot the fragment densities in this region. Since primary concern was with the larger fragments, and with those that were thrown farthest, many small fragments (less than 1/2 pound) were ignored. As a result, the fragment density values shown in Fig. 4 are lower than the actual densities that were present--especially at close range, where the small fragments were most numerous.

It is reasonably certain that in the four 45-degree sectors searched, no large fragments at distances beyond 500 ft were overlooked, and distance values are considered accurate to  $\pm 50$  feet. Figures 7-11 are views of the test site taken during and after the explosion.



LHL 108915

FIG. 7. Aerial View of Test No. 1 at Time of Explosion.




LML 108916

FIG. 8. Aerial View of Test No. 1 Approximately 5 Seconds After the Explosion Showing Burning Fragments of Propellant in the Air.




LHL 099280

FIG. 9. Crater Formed by Test No. 1.

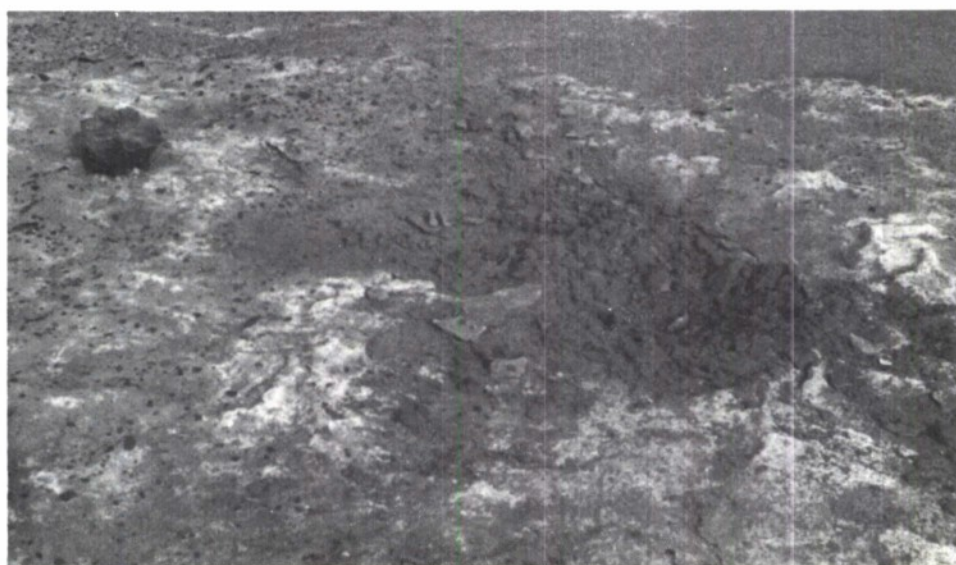

LHL 108913

FIG. 10. Test Site After Test No. 1. Unburned class 2 propellant is shown at upper left; impact position is shown at left center.

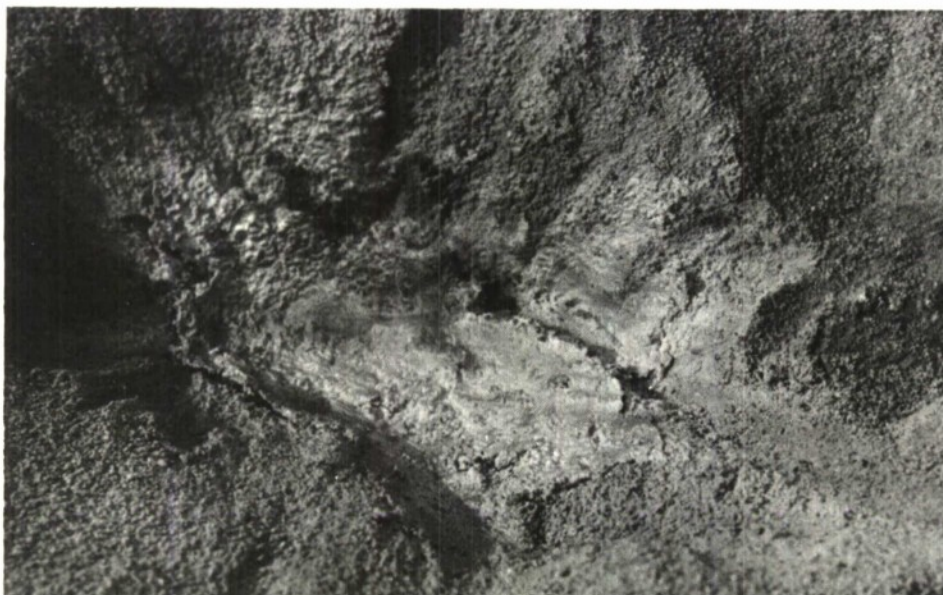


LHL 108914

FIG. 11. Residue of Class 2 Propellant  
After Burning on Ground, Test No. 1.

#### Test No. 2

The second test also involved only one motor--a class 7--which produced a sharp explosion, with attendant high pressure readings, and carved out a crater 7 ft deep and 36 ft across. Essentially, all of the propellant contributed to the explosive effects. No propellant fragments were found, and only a few firebrands can be seen in the test pictures. Figures 12 and 13 show the test site after the explosion.

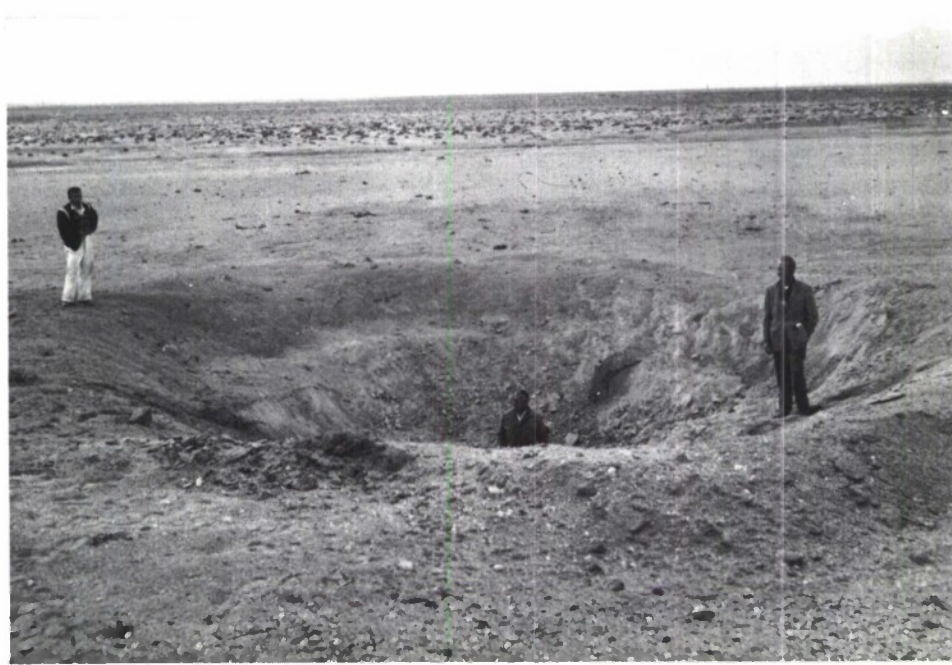

LHL 099678

FIG. 12. Crater Formed by Test No. 2.



LHL 099680

FIG. 13. Crack in Ground Surface  
Near Crater Formed by Test No. 2.

### Tests 3 and 4

These two test setups were identical, and the results were very similar. In each test, one class 7 motor and one class 2 motor were placed side-by-side on the ground. The class 7 (donor) motor, which was primed with 96 lb of C-4, exploded completely leaving no propellant fragments, while the class 2 (acceptor) motor produced both burning fragments and scraps of unburned propellant.

In each test, the fragments were smaller and less numerous than those observed in Test No. 1. Maximum fragment travel was only 1,650 feet. A 3-lb fragment was recovered at this distance after Test No. 3. None of the other fragments recovered after either test weighed over 3/4 pound. Each explosion produced a crater measuring about 10 ft deep and 52 ft across. Two views of the crater produced by Test No. 3 are shown in Figs. 14 and 15.

In Test No. 4, fragments were collected from small discrete plots (see Fig. 5). Each of the square plots encompassed 100 sq ft of area, while the rectangular plots contained 200 square feet. The cleared diagonal path was 12 ft wide, and the radial path on the centerline was 24 ft wide. In those areas where the fragments were larger and less numerous (beyond 1,000 ft), individual fragments were plotted. Fragment densities  $W_D$  (weight of recovered propellant per 1,000 sq ft of area) are listed for each individual plot and for several sections of the cleared paths.

The number of fragments recovered and the total weight of propellant recovered are also listed for each plot and for three sections of the cleared radial path.

This fragment collection scheme was used for the two  $22\frac{1}{2}$ -degree sectors on one side of the test motors only. Photographs taken during the two tests indicated that this region (i.e., on the open side of the class 2 motor) received the heaviest concentration of fragments.

### Test No. 5

The fifth test also involved two motors--one class 7 and one class 2. However, for this test, the motors were in a vertical position, one on top of the other. The top motor was the class 7, which was primed with 96 lb of Comp C-4. Test results were similar to those obtained in Tests 3 and 4, although fewer and smaller fragments were recovered, probably because of the difference in placement of the motors.

Once again, fragments were collected only from the discrete plots shown in Fig. 6. The test configuration favored a symmetrical fragment dispersal and, as expected, the collection plots produced fewer fragments



LHL 099443

FIG. 14. Side View of Crater Formed by Test No. 3.



LHL 099442

FIG. 15. Top View of Crater Formed by Test No. 3.

than were recorded for either of the two previous tests. In general, the fragments were not thrown quite so far. The largest fragment of unburned propellant recovered was one pound, and the maximum distance traveled was 1,500 ft from ground zero.

The motor placement also accounted for the crater configuration--which was much shallower, but had a larger diameter than those produced by Tests 3 and 4. The crater was saucer-shaped with a small conical hole at the center. The deepest point at the bottom of the cone was five feet; average depth, exclusive of the cone, was two feet; and the diameter was 60 feet.

#### Test No. 6

Two class 2 motors, each primed with 96 lb of C-4, were placed side-by-side for this test. Unburned propellant fragments ranging up to eight pounds were found, and maximum fragment throw was 2,300 feet. The fragment recovered at this distance weighed  $2\frac{1}{2}$  pounds. Average crater diameter was 20 feet, rim-to-rim.

#### Test No. 7

This test setup was identical to that for Test No. 5 except that the primer was a 100-lb spherical charge of cyclotol placed on top of the class 7 motor. Small fragments of propellant were thrown out to 1,500 ft, or more, in all directions. The average rim-to-rim crater diameter was 60 feet.

#### Calibration Test A

The 10,260 lb of Comp B used in this test was primed with 80 lb of C-4 and produced two distinct shockwaves. The explosion produced a crater that measured 9 ft deep and 52 ft across.

#### Calibration Test B

This test, in which 10,650 lb of TNT was placed in a wooden container and primed with a 96-lb charge of C-4, produced a large fireball and blackened the ground to a distance of 150 ft outward in all directions. The average crater diameter was 30 feet. Observers at 3,000 ft, and beyond, reported that the sound of the explosion was less 'sharp' than that produced by the Comp B calibration firing and the motor firings involving class 7 motors.

## ANALYSIS OF BLAST GAGE DATA

The analytical approaches used to compute high explosive equivalency weight for the motor tests are described below; tabulations of blast gage data and derived blast parameters are presented in Tables 1-9.

## COMPARISON WITH PUBLISHED DATA

BRL Memorandum Report No. 1518, Peak Overpressure Versus Scaled Distances for TNT Surface Bursts (April 1964), shows graphical and tabulated data covering results of overpressure measurement in connection with the surface firing of 20- and 100-ton hemispherical TNT charges. Using data from Report 1518 as a reference, yields for the seven motor tests were derived from peak pressure based on the following:

$$W = W_0 \frac{p_z}{p_0} \left( \frac{R}{\lambda_1} \right)^3 \quad (\text{see footnote})$$

where

$W$  = yield in lb of TNT

$W_0$  = 1 lb of TNT

$p_z$  = ambient air pressure

$p_0$  = standard sea level air pressure 1013 mb

$R$  = distance from center of charge to gage

$\lambda_1$  = scaled distance determined by the ratio:

$$\frac{\text{recorded overpressure}}{\text{ambient pressure}} \quad (\text{as tabulated in Report 1518})$$

In application, values of  $R/\lambda_1$  were computed for each gage distance for each test, using averaged values of overpressures from all gages at that distance. Values of  $R/\lambda_1$  are directly related to  $W^{1/3}$  and should, therefore, be of similar magnitude at each gage distance, if the function of overpressure-versus-scaled distance parallels that derived by

\* In making the computations, the ratio (ambient air pressure/standard sea level air pressure) was used in lieu of the more precise ratio  $\rho_z/\rho_0$  (ambient air density/air density at 1013 mb and 59°F) in order to conform to correction practices employed in BRL Report No. 1518.

BRL. Values of  $R/\lambda_1$  were averaged for all gage distances and again for all distances exclusive of those at 80, 110, and 150 feet. The latter average was determined because of the evident tendency of close-in gage recordings from the high explosive calibration firings and motor Tests 3, 5, and 7 to register markedly higher than BRL data.

#### OVERPRESSURE COMPARISON WITH HIGH EXPLOSIVE CALIBRATION FIRINGS

In a second approach to computing high explosive equivalency from peak overpressure data, curves of peak overpressure versus scaled distance were prepared from the gage results of each of the calibration firings (Fig. 16). These curves were then used with the motor test overpressure data to determine the TNT and Comp B equivalencies. Thus, the average peak overpressure for each gage distance was used to determine the corresponding scaled distance  $\lambda_2$  value, and this value was used to derive  $R/\lambda_2$  values (see Tables 1-7). The  $R/\lambda_2$  values were then averaged, and this value--which determines an average  $W^{1/3}$ --was cubed to arrive at the Comp B and TNT equivalencies (Tables 10 and 11). Because the atmospheric changes from test-to-test were small, no attempt was made to introduce an atmospheric correction.

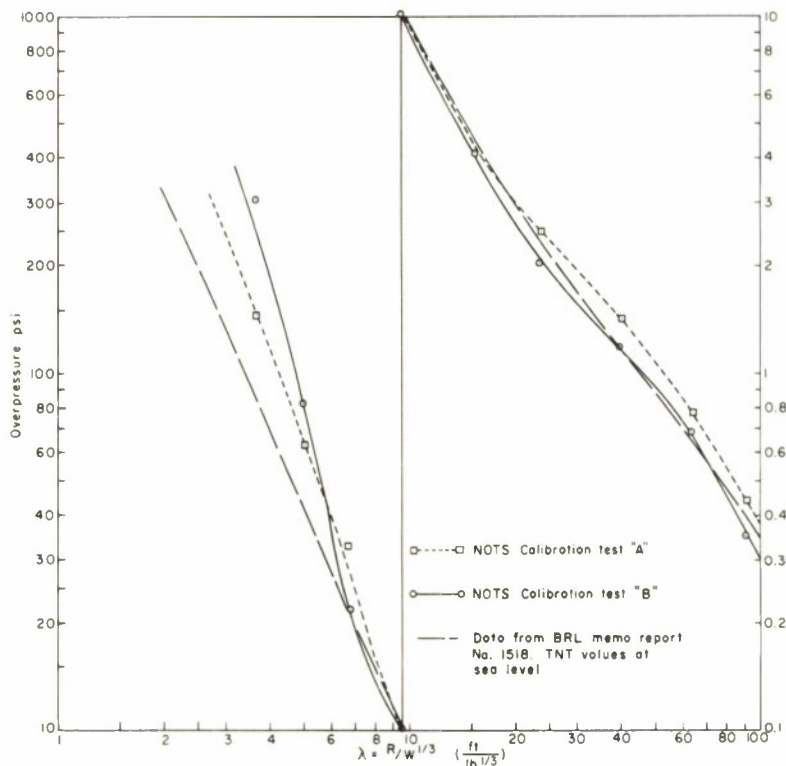


FIG. 16. Overpressure Versus Scaled Distance Calibration Curves.

Comparison of motor test data with the derived calibration curves presented difficulties similar to some of those experienced in comparing the data with the BRL curve, in that the calibration curves do not appear to parallel the function of overpressure-versus-scaled-distance for some tests (notably Tests 1, 2, and 4) as demonstrated by lower-than-average  $R/\lambda_2$  values at close-in gage stations for the motor tests. Additionally, there is some concern over the tendency for the blast records from the Calibration A firing to show double and well-separated peaks, particularly at intermediate and long ranges.

While it is not considered that the atypical separated peaks tend to diminish the peak pressure values below normal values (as discussed later in this report), it would be somewhat easier to place confidence in overpressure-time histories of more classical shape.

The Calibration B results agree reasonably well with data in BRL Report No. 1518 at intermediate and longer ranges, but the readings run higher than the BRL data at two close-in gage positions.

Although Calibration B data and the above described BRL data were alike in being derived from TNT explosions, there were differences in the following test parameters:

- a. The charge shapes and means of priming
- b. The physical condition and density of the TNT
- c. Gage arrays, and some differences in gage types
- d. Data reduction techniques
- e. Terrain
- f. Number of tests and variety of explosive weights involved

#### IMPULSE COMPARISON WITH HIGH EXPLOSIVE CALIBRATION FIRINGS

Scaled-impulse-versus-scaled-distance values were plotted for the two high explosive calibration firings (Fig. 17). Since these curves cannot be entered directly without first knowing the desired value  $W$ , a family of curves (Figs. 18 and 19) were derived relating impulse with  $W^{2/3}$  for each gage distance. (The relationship of impulse versus  $W^{2/3}$  approximates linearity for a specific gage distance.) The impulse versus  $W^{2/3}$  curves were then entered with averaged impulse values for each gage distance. The extracted  $W^{2/3}$  values were then averaged for all distances, and this average  $W^{2/3}$  was converted to  $W$ --or high explosive equivalency.

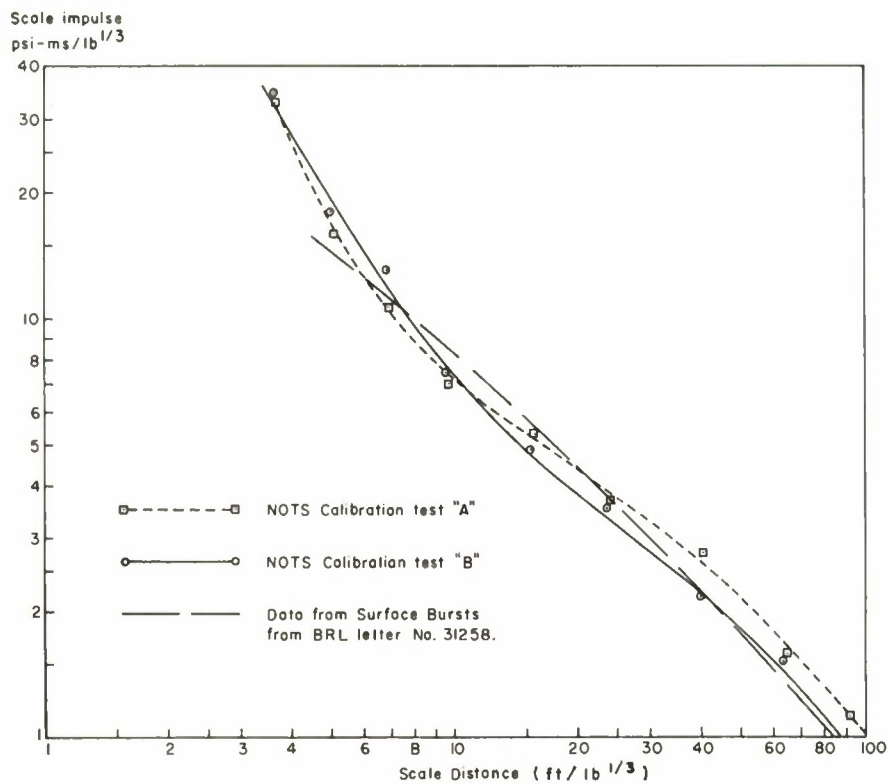


FIG. 17. Scaled Impulse Versus Scaled Distance.

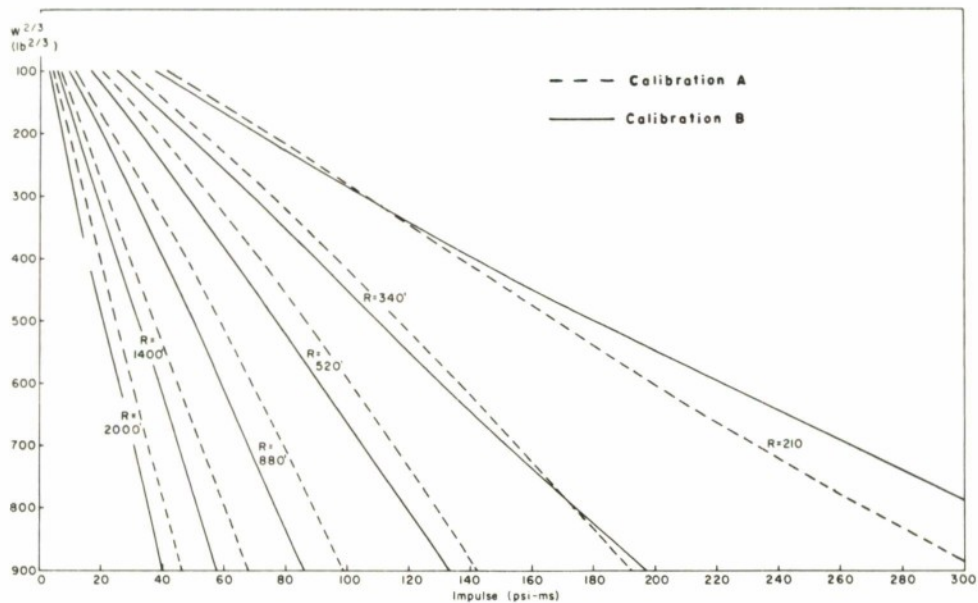

FIG. 18. Impulse Versus  $W^{2/3}$  for R Values of 210, 340, 520, 880, 1,400, and 2,000 Feet (Calibration Tests A and B).

TABLE 1. Test #1 (ES-4259)

| R<br>gage<br>distance<br>(ft)                                                       | Gage<br>position | Gage<br>type     |          | Peak<br>overpres.<br>N leg<br>(psi)                  | Peak<br>overpres.<br>E leg<br>(psi) | Avg.<br>peak<br>overpres.<br>(psi) | Avg.<br>peak<br>overpres.<br>amb. atmos. | $\lambda_1$<br>Scaled<br>distance<br>BRL 1518 | $R/\lambda_1$ | $\lambda_2$<br>Scaled<br>distance<br>overpres.<br>calib.<br>A | $R/\lambda_2$ | Impulse<br>N leg<br>(psi-ms) | Impulse<br>E leg<br>(psi-ms) | Avg.<br>impulse<br>(psi-ms) | $W^{2/3}$<br>from<br>impulse<br>calib.<br>A |
|-------------------------------------------------------------------------------------|------------------|------------------|----------|------------------------------------------------------|-------------------------------------|------------------------------------|------------------------------------------|-----------------------------------------------|---------------|---------------------------------------------------------------|---------------|------------------------------|------------------------------|-----------------------------|---------------------------------------------|
|                                                                                     |                  | N<br>leg         | E<br>leg |                                                      |                                     |                                    |                                          |                                               |               |                                                               |               |                              |                              |                             |                                             |
| 80                                                                                  | 1A               | K <sup>(1)</sup> | K        | 23.61                                                | 28.23                               | 25.92                              | 1.898                                    | 5.99                                          | 13.3          | 6.9                                                           | 11.6          | 168.86                       | 174.50                       | 171.68                      | 175                                         |
| 110                                                                                 | 2A               | P <sup>(2)</sup> | K        | 18.01                                                | 11.03                               | 13.41                              | 0.982                                    | 8.17                                          | 13.4          | 8.5                                                           | 12.9          | 93.42                        | 123.79                       | 107.69                      | 165                                         |
|                                                                                     | 2B               | K                | **       | 11.20                                                | **                                  |                                    |                                          |                                               |               |                                                               |               | 105.86                       | **                           |                             |                                             |
| 150                                                                                 | 3A               | P                | K        | 8.63                                                 | 5.71                                | 6.27                               | 0.459                                    | 12.14                                         | 12.3          | 12.4                                                          | 12.1          | 67.38                        | 79.37                        | 75.25                       | 150                                         |
|                                                                                     | 3B               | K                | **       | 4.47                                                 | **                                  |                                    |                                          |                                               |               |                                                               |               | 79.02                        | **                           |                             |                                             |
| 210                                                                                 | 4A               | P                | P        | *                                                    | 5.98                                | 4.47                               | 0.327                                    | 14.77                                         | 14.2          | 15.3                                                          | 14.7          | *                            | 74.10                        | 58.14                       | 145                                         |
|                                                                                     | 4B               | B <sup>(3)</sup> | B        | 3.26                                                 | 4.18                                |                                    |                                          |                                               |               |                                                               |               | 46.37                        | 53.96                        |                             |                                             |
| 340                                                                                 | 5A               | B                | P        | 2.63                                                 | *                                   | 2.39                               | 0.175                                    | 22.17                                         | 15.3          | 24.7                                                          | 13.7          | 24.13                        | *                            | 27.75                       | 95                                          |
|                                                                                     | 5B               | B                | B        | 1.81                                                 | 2.72                                |                                    |                                          |                                               |               |                                                               |               | 28.56                        | 30.55                        |                             |                                             |
| 520                                                                                 | 6A               | B                | B        | 1.13                                                 | 1.02                                | 1.10                               | 0.081                                    | 39.65                                         | 13.1          | 50.0                                                          | 10.4          | 20.37                        | 26.92                        | 22.32                       | 110                                         |
|                                                                                     | 6B               | B                | B        | 1.16                                                 | *                                   |                                    |                                          |                                               |               |                                                               |               | 19.68                        | *                            |                             |                                             |
| 880                                                                                 | 7A               | B                | P        | 0.58                                                 | 0.63                                | 0.58                               | 0.042                                    | 66.25                                         | 13.2          | 76.0                                                          | 11.6          | 11.44                        | 14.68                        | 13.63                       | 115                                         |
|                                                                                     | 7B               | **               | B        | **                                                   | 0.54                                |                                    |                                          |                                               |               |                                                               |               | **                           | 14.77                        |                             |                                             |
| 1400                                                                                | 8A               | B                | B        | 0.32                                                 | 0.32                                | 0.29                               | 0.021                                    | 106.6                                         | 13.1          | 115.0                                                         | 12.2          | 6.54                         | 7.47                         | 7.37                        | 100                                         |
|                                                                                     | 8B               | B                | B        | 0.24                                                 | 0.28                                |                                    |                                          |                                               |               |                                                               |               | 7.16                         | 8.29                         |                             |                                             |
| 2000                                                                                | 9A               | B                | B        | 0.14                                                 | 0.17                                | 0.16                               | 0.012                                    | 158.33                                        | 12.6          |                                                               |               | 3.94                         | 5.18                         | 4.56                        | 95                                          |
| Note (1) K = Kistler Gage<br>(2) P = BRL-PNS Type Gage<br>(3) B = BRL-PHS Type Gage |                  |                  |          | Average for all gage distances                       |                                     |                                    |                                          |                                               | 13.39         |                                                               | 12.4          |                              |                              |                             | 128                                         |
|                                                                                     |                  |                  |          | Average excluding distances<br>of 80', 110' and 150' |                                     |                                    |                                          |                                               | 13.58         |                                                               | 12.5          |                              |                              |                             | 110                                         |

\*\* No gage.  
\* Gage failure.

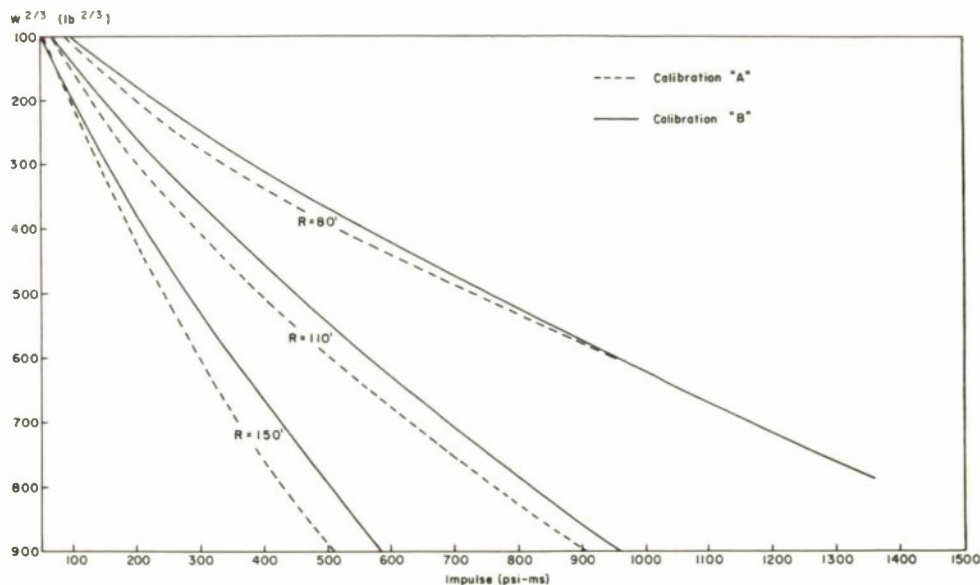


FIG. 19. Impulse Versus  $W^{2/3}$  for R Values of 80, 110, and 150 Feet (Calibration Tests A and B).

#### LIMITATIONS OF REFERENCE DATA

It should be noted that this is a progress report outlining initial results in a continuing series of tests. There are acknowledged limitations in the use of the BRL data as a standard for comparison, primarily because of differences in charge geometry. There are also acknowledged limitations in the use of the Calibration A and B firing data, for the obvious reason that each set of data is derived from a single test. It is probable that additional high explosive calibration firings will be conducted in the future, thus providing a firmer basis for comparison.

#### EXPLANATION OF TABLES 1 THROUGH 9

The purpose of the tables is to list blast gage records and to show the methods of computation used. Derived values of  $\lambda_1$  and  $R/\lambda_1$  are explained above. Derived values of  $\lambda_2$ ,  $R/\lambda_2$ , and  $W^{2/3}$  are based on Calibration A results; therefore, these values relate to Comp B. Identical procedures were used in relating the tests to Calibration B TNT test results; however, these computations are not shown.

TABLE 2. Test #2 (ES-4260)

| R<br>gage<br>distance<br>(ft)                                                       | Gage<br>position | Gage<br>type     |          | Peak<br>overpres.<br>N leg<br>(psi) | Peak<br>overpres.<br>E leg<br>(psi)                  | Avg.<br>peak<br>overpres.<br>(psi) | Avg.<br>peak<br>overpres.<br>amb. atmos. | $\lambda_1$<br>Scaled<br>distance<br>BRL 1518 | $R/\lambda_1$ | $\lambda_2$<br>Scaled<br>distance<br>overpres.<br>calib.<br>A | $R/\lambda_2$ | Impulse<br>N leg<br>(psi-ms) | Impulse<br>E leg<br>(psi-ms) | Avg.<br>impulse<br>(psi-ms) | $W^{2/3}$<br>from<br>impulse<br>calib.<br>A |
|-------------------------------------------------------------------------------------|------------------|------------------|----------|-------------------------------------|------------------------------------------------------|------------------------------------|------------------------------------------|-----------------------------------------------|---------------|---------------------------------------------------------------|---------------|------------------------------|------------------------------|-----------------------------|---------------------------------------------|
|                                                                                     |                  | N<br>leg         | E<br>leg |                                     |                                                      |                                    |                                          |                                               |               |                                                               |               |                              |                              |                             |                                             |
| 80                                                                                  | 1A               | K <sup>(1)</sup> | K        | 99.12                               | 127.53                                               | 113.32                             | 8.301                                    | 3.13                                          | 25.5          | 4.05                                                          | 19.7          | *                            | *                            | *                           | *                                           |
| 110                                                                                 | 2A               | P <sup>(2)</sup> | K        | 86.09                               | 51.06                                                | 60.54                              | 4.435                                    | 4.13                                          | 26.6          | 5.1                                                           | 21.6          | 425.61                       | *                            | 425.61                      | 533                                         |
|                                                                                     | 2B               | K                | **       | 44.48                               | **                                                   |                                    |                                          |                                               |               |                                                               |               | *                            | **                           |                             |                                             |
| 150                                                                                 | 3A               | P                | K        | 21.88                               | 18.67                                                | 18.56                              | 1.359                                    | 6.98                                          | 21.4          | 7.7                                                           | 19.5          | 271.74                       | *                            | 271.74                      | 560                                         |
|                                                                                     | 3B               | K                | **       | 15.13                               | **                                                   |                                    |                                          |                                               |               |                                                               |               | *                            | **                           |                             |                                             |
| 210                                                                                 | 4A               | P                | P        | 6.52                                | 9.42                                                 | 8.63                               | 0.632                                    | 10.20                                         | 20.6          | 10.5                                                          | 20.0          | 173.03                       | 165.62                       | 166.37                      | 465                                         |
|                                                                                     | 4B               | B <sup>(3)</sup> | B        | 6.99                                | 11.60                                                |                                    |                                          |                                               |               |                                                               |               | 167.93                       | 158.91                       |                             |                                             |
| 340                                                                                 | 5A               | B                | P        | 6.15                                | 4.85                                                 | 5.32                               | 0.389                                    | 13.45                                         | 25.3          | 13.6                                                          | 25.0          | 128.77                       | 129.84                       | 122.36                      | 530                                         |
|                                                                                     | 5B               | B                | B        | 4.92                                | 5.36                                                 |                                    |                                          |                                               |               |                                                               |               | 116.09                       | 114.75                       |                             |                                             |
| 520                                                                                 | 6A               | B                | B        | 2.26                                | 2.36                                                 | 2.34                               | 0.171                                    | 22.50                                         | 23.1          | 25.2                                                          | 20.6          | 59.59                        | 85.65                        | 70.78                       | 398                                         |
|                                                                                     | 6B               | B                | B        | 2.37                                | 2.37                                                 |                                    |                                          |                                               |               |                                                               |               | 62.51                        | 75.37                        |                             |                                             |
| 880                                                                                 | 7A               | B                | P        | 1.29                                | 1.62                                                 | 1.32                               | 0.096                                    | 34.70                                         | 25.4          | 43.0                                                          | 20.5          | 37.89                        | 46.86                        | 43.51                       | 365                                         |
|                                                                                     | 7B               | **               | B        | **                                  | 1.05                                                 |                                    |                                          |                                               |               |                                                               |               | **                           | 45.79                        |                             |                                             |
| 1400                                                                                | 8A               | B                | B        | 0.75                                | 0.70                                                 | 0.66                               | 0.048                                    | 59.16                                         | 23.7          | 71.0                                                          | 19.8          | 32.28                        | 27.11                        | 29.60                       | 404                                         |
|                                                                                     | 8B               | B                | B        | 0.64                                | 0.55                                                 |                                    |                                          |                                               |               |                                                               |               | 32.82                        | 26.20                        |                             |                                             |
| 2000                                                                                | 9A               | B                | B        | 0.46                                | 0.32                                                 | 0.39                               | 0.028                                    | 88.00                                         | 22.7          | 98.0                                                          | 20.7          | 20.69                        | 18.27                        | 19.48                       | 395                                         |
| Note (1) K = Kistler Gage<br>(2) P = BRL-PNS Type Gage<br>(3) B = BRL-PHS Type Gage |                  |                  |          |                                     | Average for all gage distances                       |                                    |                                          |                                               | 23.81         |                                                               | 20.8          |                              |                              |                             | 456                                         |
|                                                                                     |                  |                  |          |                                     | Average excluding distances of<br>80', 110' and 150' |                                    |                                          |                                               | 23.46         |                                                               | 21.1          |                              |                              |                             | 426                                         |

\* Gage failure.

\*\* No gage.

TABLE 3. Test #3 (ES-4261-1)

| R<br>gage<br>distance<br>(ft)                                                       | Gage<br>position | Gage<br>type     |          | Peak<br>overpres.<br>N leg<br>(psi) | Peak<br>overpres.<br>E leg<br>(psi)                   | Avg.<br>peak<br>overpres.<br>(psi) | Avg.<br>peak<br>overpres.<br>amb. atmos. | $\lambda_1$<br>Scaled<br>distance<br>BRL 1518 | $R/\lambda_1$ | $\lambda_2$<br>Scaled<br>distance<br>overpres.<br>calib.<br>A | $R/\lambda_2$ | Impulse<br>N leg<br>(psi-ms) | Impulse<br>E leg<br>(psi-ms) | Avg.<br>impulse<br>(psi-ms) | $w^{2/3}$<br>from<br>impulse<br>calib.<br>A |
|-------------------------------------------------------------------------------------|------------------|------------------|----------|-------------------------------------|-------------------------------------------------------|------------------------------------|------------------------------------------|-----------------------------------------------|---------------|---------------------------------------------------------------|---------------|------------------------------|------------------------------|-----------------------------|---------------------------------------------|
|                                                                                     |                  | N<br>leg         | E<br>leg |                                     |                                                       |                                    |                                          |                                               |               |                                                               |               |                              |                              |                             |                                             |
| 80                                                                                  | 1A               | K <sup>(1)</sup> | K        | 230.84                              | 188.53                                                | 209.68                             | 15.361                                   | 2.37                                          | 33.7          | 3.2                                                           | 25.0          | 982.66                       | 1302.97                      | 1142.81                     | 690                                         |
| 110                                                                                 | 2A               | P <sup>(2)</sup> | K        | 92.03                               | (42.98)                                               | 108.14                             | 7.922                                    | 3.24                                          | 33.9          | 4.1                                                           | 26.9          | 456.36                       | *                            | 519.65                      | 610                                         |
|                                                                                     | 2B               | K                | **       | 124.25                              | **                                                    |                                    |                                          |                                               |               |                                                               |               | 582.95                       | **                           |                             |                                             |
| 150                                                                                 | 3A               | P                | K        | 30.85                               | 34.23                                                 | 34.25                              | 2.509                                    | 5.31                                          | 28.2          | 6.4                                                           | 23.5          | 323.36                       | 246.53                       | 312.40                      | 625                                         |
|                                                                                     | 3B               | K                | **       | 37.69                               | **                                                    |                                    |                                          |                                               |               |                                                               |               | 367.32                       | **                           |                             |                                             |
| 210                                                                                 | 4A               | P                | P        | 10.74                               | 12.28                                                 | 13.14                              | 0.962                                    | 8.27                                          | 25.4          | 8.6                                                           | 24.4          | 239.30                       | 251.12                       | 237.17                      | 625                                         |
|                                                                                     | 4B               | B <sup>(3)</sup> | B        | 15.02                               | 14.52                                                 |                                    |                                          |                                               |               |                                                               |               | 233.31                       | 224.96                       |                             |                                             |
| 340                                                                                 | 5A               | B                | P        | 5.74                                | 6.72                                                  | 6.07                               | 0.444                                    | 12.35                                         | 27.5          | 12.5                                                          | 27.2          | 134.39                       | 171.53                       | 149.71                      | 673                                         |
|                                                                                     | 5B               | B                | B        | 5.08                                | 6.77                                                  |                                    |                                          |                                               |               |                                                               |               | (59.95)                      | 143.23                       |                             |                                             |
| 520                                                                                 | 6A               | B                | B        | *                                   | 2.93                                                  | 2.97                               | 0.217                                    | 19.20                                         | 27.0          | 20.5                                                          | 25.3          | *                            | *                            | 95.48                       | 588                                         |
|                                                                                     | 6B               | B                | B        | 2.76                                | 3.24                                                  |                                    |                                          |                                               |               |                                                               |               | 84.55                        | 106.42                       |                             |                                             |
| 880                                                                                 | 7A               | B                | P        | 1.56                                | 2.15                                                  | 1.66                               | 0.121                                    | 29.10                                         | 30.2          | 34.8                                                          | 25.3          | 62.63                        | 60.90                        | 63.87                       | 548                                         |
|                                                                                     | 7B               | **               | B        | **                                  | 1.27                                                  |                                    |                                          |                                               |               |                                                               |               | **                           | 68.10                        |                             |                                             |
| 1400                                                                                | 8A               | B                | B        | 0.87                                | 0.88                                                  | 0.81                               | 0.059                                    | 50.70                                         | 27.6          | 62.0                                                          | 22.6          | 41.09                        | 45.78                        | 44.45                       | 600                                         |
|                                                                                     | 8B               | B                | B        | 0.81                                | 0.70                                                  |                                    |                                          |                                               |               |                                                               |               | 56.40                        | 34.56                        |                             |                                             |
| 2000                                                                                | 9A               | B                | B        | 0.55                                | 0.43                                                  | 0.49                               | 0.036                                    | 73.75                                         | 27.1          | 85.0                                                          | 23.5          | 28.26                        | 26.50                        | 27.38                       | 550                                         |
| Note (1) K = Kistler Gage<br>(2) P = BRL-PNS Type Gage<br>(3) B = BRL-PHS Type Gage |                  |                  |          |                                     | Average for all gage distances                        |                                    |                                          |                                               | 29.0          |                                                               | 24.87         |                              |                              |                             | 612                                         |
|                                                                                     |                  |                  |          |                                     | Average excluding distances of<br>80', 110', and 150' |                                    |                                          |                                               | 27.4          |                                                               | 24.71         |                              |                              |                             | 597                                         |

( ) Measured value not used in computations.

\* Gage failure.

\*\* No gage.

TABLE 4. Test #4 (ES-4261-2)

| R<br>gage<br>distance<br>(ft)                                                       | Gage<br>position | Gage<br>type     |          | Peak<br>overpres.<br>N leg<br>(psi) | Peak<br>overpres.<br>E leg<br>(psi)                   | Avg.<br>peak<br>overpres.<br>(psi) | Avg.<br>peak<br>overpres.<br>amb. atmos. | $\lambda_1$<br>Scaled<br>distance<br>BRL 1518 | $R/\lambda_1$ | $\lambda_2$<br>Scaled<br>distance<br>overpres.<br>calib.<br>A | $R/\lambda_2$ | Impulse<br>N leg<br>(psi-ms) | Impulse<br>E leg<br>(psi-ms) | Avg.<br>impulse<br>(psi-ms) | $w^{2/3}$<br>from<br>impulse<br>calib.<br>A |
|-------------------------------------------------------------------------------------|------------------|------------------|----------|-------------------------------------|-------------------------------------------------------|------------------------------------|------------------------------------------|-----------------------------------------------|---------------|---------------------------------------------------------------|---------------|------------------------------|------------------------------|-----------------------------|---------------------------------------------|
|                                                                                     |                  | N<br>leg         | E<br>leg |                                     |                                                       |                                    |                                          |                                               |               |                                                               |               |                              |                              |                             |                                             |
| 80                                                                                  | 1A               | K <sup>(1)</sup> | K        | (109.35)                            | 145.20                                                | 145.20                             | 10.63                                    | 2.90                                          | 27.6          | 3.65                                                          | 21.9          | 794.62                       | 751.93                       | 773.27                      | 516                                         |
| 110                                                                                 | 2A               | P <sup>(2)</sup> | K        | *                                   | 80.77                                                 | 92.11                              | 6.75                                     | 3.43                                          | 32.1          | 4.38                                                          | 25.1          | *                            | 366.14                       | 412.10                      | 515                                         |
|                                                                                     | 2B               | K                | **       | 103.46                              | **                                                    |                                    |                                          |                                               |               |                                                               |               | 458.06                       | **                           |                             |                                             |
| 150                                                                                 | 3A               | P                | K        | 27.45                               | 29.64                                                 | 28.91                              | 2.12                                     | 5.72                                          | 26.2          | 6.75                                                          | 22.3          | 257.91                       | 183.90                       | 244.54                      | 510                                         |
|                                                                                     | 3B               | K                | **       | 29.66                               | **                                                    |                                    |                                          |                                               |               |                                                               |               | 291.81                       | **                           |                             |                                             |
| 210                                                                                 | 4A               | P                | P        | 10.26                               | 14.17                                                 | 11.68                              | 0.855                                    | 8.77                                          | 23.9          | 8.90                                                          | 23.6          | 209.41                       | 197.18                       | 202.65                      | 605                                         |
|                                                                                     | 4B               | B <sup>(3)</sup> | B        | 10.76                               | 11.55                                                 |                                    |                                          |                                               |               |                                                               |               | 201.52                       | 202.49                       |                             |                                             |
| 340                                                                                 | 5A               | B                | P        | 5.93                                | 6.25                                                  | 5.95                               | 0.436                                    | 12.5                                          | 27.2          | 12.8                                                          | 26.5          | 145.16                       | 153.81                       | 147.45                      | 660                                         |
|                                                                                     | 5B               | B                | B        | 5.68                                | *                                                     |                                    |                                          |                                               |               |                                                               |               | 143.38                       | *                            |                             |                                             |
| 520                                                                                 | 6A               | B                | B        | 2.75                                | 2.77                                                  | 2.64                               | 0.193                                    | 20.8                                          | 25.0          | 22.6                                                          | 23.0          | 86.06                        | 99.12                        | 87.10                       | 505                                         |
|                                                                                     | 6B               | B                | B        | 2.51                                | 2.56                                                  |                                    |                                          |                                               |               |                                                               |               | 96.38                        | 66.86                        |                             |                                             |
| 880                                                                                 | 7A               | B                | P        | 1.62                                | 2.08                                                  | 1.67                               | 0.122                                    | 28.9                                          | 30.4          | 34.8                                                          | 25.3          | 66.73                        | 66.30                        | 65.32                       | 560                                         |
|                                                                                     | 7B               | **               | B        | **                                  | 1.33                                                  |                                    |                                          |                                               |               |                                                               |               | **                           | 62.95                        |                             |                                             |
| 1400                                                                                | 8A               | B                | B        | 0.82                                | 0.94                                                  | 0.80                               | 0.0586                                   | 52.6                                          | 26.6          | 62.0                                                          | 22.6          | 35.67                        | 43.14                        | 38.27                       | 515                                         |
|                                                                                     | 8B               | B                | B        | 0.73                                | 0.74                                                  |                                    |                                          |                                               |               |                                                               |               | 37.28                        | 37.00                        |                             |                                             |
| 2000                                                                                | 9A               | B                | B        | 0.54                                | 0.43                                                  | 0.48                               | 0.0352                                   | 75.5                                          | 26.5          | 87.0                                                          | 23.0          | 25.72                        | 26.50                        | 26.11                       | 520                                         |
| Note (1) K = Kistler Gage<br>(2) P = BRL-PNS Type Gage<br>(3) B = BRL-PHS Type Gage |                  |                  |          |                                     | Average for all gage distances                        |                                    |                                          |                                               | 27.3          |                                                               | 23.7          |                              |                              |                             | 548                                         |
|                                                                                     |                  |                  |          |                                     | Average excluding distances of<br>80', 110', and 150' |                                    |                                          |                                               | 26.6          |                                                               | 24.0          |                              |                              |                             | 561                                         |

( ) Measured value not used in computations.

\* Gage failure.

\*\* No gage.

TABLE 5. Test #5 (ES-5001)

| R<br>gage<br>distance<br>(ft)                                                       | Gage<br>position | Gage<br>type     |          | Peak<br>overpres.<br>N leg<br>(psi) | Peak<br>overpres.<br>E leg<br>(psi)                   | Avg.<br>peak<br>overpres.<br>(psi) | Avg.<br>peak<br>overpres.<br>amb. atmos. | $\lambda_1$<br>Scaled<br>distance<br>BRL 1518 | $R/\lambda_1$ | $\lambda_2$<br>Scaled<br>distance<br>overpres.<br>calib.<br>A | $R/\lambda_2$ | Impulse<br>N leg<br>(psi-ms) | Impulse<br>E leg<br>(psi-ms) | Avg.<br>impulse<br>(psi-ms) | $w^{2/3}$<br>from<br>impulse<br>calib.<br>A |
|-------------------------------------------------------------------------------------|------------------|------------------|----------|-------------------------------------|-------------------------------------------------------|------------------------------------|------------------------------------------|-----------------------------------------------|---------------|---------------------------------------------------------------|---------------|------------------------------|------------------------------|-----------------------------|---------------------------------------------|
|                                                                                     |                  | N<br>leg         | E<br>leg |                                     |                                                       |                                    |                                          |                                               |               |                                                               |               |                              |                              |                             |                                             |
| 80                                                                                  | 1A               | K <sup>(1)</sup> | K        | *                                   | 252.40                                                | 252.40                             | 18.490                                   | 2.17                                          | 36.8          | 2.97                                                          | 26.9          | *                            | 738.94                       | 738.94                      | 492                                         |
| 110                                                                                 | 2A               | P <sup>(2)</sup> | K        | 76.60                               | 150.92                                                | 113.76                             | 8.334                                    | 3.12                                          | 35.3          | 4.05                                                          | 27.2          | 393.11                       | 556.80                       | 474.95                      | 575                                         |
|                                                                                     | 2B               | K                | **       | *                                   | **                                                    |                                    |                                          |                                               |               |                                                               |               | *                            | **                           |                             |                                             |
| 150                                                                                 | 3A               | P                | K        | 31.39                               | 55.01                                                 | 43.20                              | 3.164                                    | 4.79                                          | 31.3          | 5.80                                                          | 25.9          | 420.00                       | 244.00                       | 332.00                      | 660                                         |
|                                                                                     | 3B               | K                | **       | *                                   | **                                                    |                                    |                                          |                                               |               |                                                               |               | *                            | **                           |                             |                                             |
| 210                                                                                 | 4A               | P                | P        | *                                   | *                                                     |                                    |                                          |                                               |               |                                                               |               | *                            | *                            |                             |                                             |
|                                                                                     | 4B               | B <sup>(3)</sup> | B        | *                                   | 13.22                                                 | 13.22                              | 0.968                                    | 8.24                                          | 25.5          | 8.60                                                          | 24.5          | *                            | 219.74                       | 219.74                      | 662                                         |
| 340                                                                                 | 5A               | B                | P        | 6.19                                | 6.07                                                  | 5.91                               | 0.432                                    | 12.51                                         | 27.2          | 12.8                                                          | 26.6          | 158.65                       | 151.82                       | 147.4                       | 660                                         |
|                                                                                     | 5B               | B                | B        | 5.25                                | 6.13                                                  |                                    |                                          |                                               |               |                                                               |               | 141.59                       | 137.61                       |                             |                                             |
| 520                                                                                 | 6A               | B                | B        | *                                   | (0.71)                                                | 2.79                               | 0.204                                    | 19.92                                         | 26.1          | 21.6                                                          | 24.0          | *                            | (19.13)                      | 95.7                        | 564                                         |
|                                                                                     | 6B               | B                | B        | *                                   | 2.79                                                  |                                    |                                          |                                               |               |                                                               |               | *                            | 95.70                        |                             |                                             |
| 880                                                                                 | 7A               | B                | P        | 1.57                                | 1.61                                                  | 1.46                               | 0.106                                    | 32.07                                         | 27.4          | 39.0                                                          | 22.6          | 60.80                        | **                           | 57.7                        | 490                                         |
|                                                                                     | 7B               | **               | B        | **                                  | 1.22                                                  |                                    |                                          |                                               |               |                                                               |               | **                           | 54.69                        |                             |                                             |
| 1400                                                                                | 8A               | B                | B        | 0.86                                | 0.84                                                  | 0.76                               | 0.055                                    | 53.55                                         | 26.1          | 65.0                                                          | 21.6          | 40.80                        | 29.57                        | 35.1                        | 475                                         |
|                                                                                     | 8B               | B                | B        | 0.71                                | 0.66                                                  |                                    |                                          |                                               |               |                                                               |               | 37.76                        | 32.35                        |                             |                                             |
| 2000                                                                                | 9A               | B                | B        | *                                   | 0.39                                                  | 0.39                               | 0.028                                    | 88.00                                         | 22.7          | 98.0                                                          | 20.7          | *                            | 28.83                        | 28.8                        | 570                                         |
| Note (1) K = Kistler Gage<br>(2) P = BRL-PNS Type Gage<br>(3) B = BRL-PHS Type Gage |                  |                  |          |                                     | Average for all gage distances                        |                                    |                                          |                                               | 28.71         |                                                               | 24.44         |                              |                              |                             | 572                                         |
|                                                                                     |                  |                  |          |                                     | Average excluding distances of<br>80', 110', and 150' |                                    |                                          |                                               | 25.83         |                                                               | 23.33         |                              |                              |                             | 570                                         |

( ) Measured value not used in computations.

\* Gage failure.

\*\* No gage.

TABLE 6. Test #6 (ES-5058)

| R<br>gage<br>distance<br>(ft)                                                       | Gage<br>position | Gage<br>type     |          | Peak<br>overpres.<br>N leg<br>(psi) | Peak<br>overpres.<br>E leg<br>(psi)                   | Avg.<br>peak<br>overpres.<br>(psi) | Avg.<br>peak<br>overpres.<br>amb. atmos. | $\lambda_1$<br>Scaled<br>distance<br>BRL 1518 | $R/\lambda_1$ | $\lambda_2$<br>Scaled<br>distance<br>overpres.<br>calib.<br>A | $R/\lambda_2$ | Impulse<br>N leg<br>(psi-ms) | Impulse<br>E leg<br>(psi-ms) | Avg.<br>impulse<br>(psi-ms) | $w^{2/3}$<br>from<br>impulse<br>calib.<br>A |
|-------------------------------------------------------------------------------------|------------------|------------------|----------|-------------------------------------|-------------------------------------------------------|------------------------------------|------------------------------------------|-----------------------------------------------|---------------|---------------------------------------------------------------|---------------|------------------------------|------------------------------|-----------------------------|---------------------------------------------|
|                                                                                     |                  | N<br>leg         | E<br>leg |                                     |                                                       |                                    |                                          |                                               |               |                                                               |               |                              |                              |                             |                                             |
| 80                                                                                  | 1A               | K <sup>(1)</sup> | K        | *                                   | *                                                     |                                    |                                          |                                               |               |                                                               |               | *                            | *                            |                             |                                             |
| 110                                                                                 | 2A               | **               | **       | **                                  | **                                                    |                                    |                                          |                                               |               |                                                               |               | **                           | **                           |                             |                                             |
|                                                                                     | 2B               | *                | *        | *                                   | *                                                     |                                    |                                          |                                               |               |                                                               |               | *                            | *                            |                             |                                             |
| 150                                                                                 | 3A               | P <sup>(2)</sup> | P        | 14.55                               | *                                                     | 14.55                              | 1.075                                    | 7.82                                          | 19.2          | 8.30                                                          | 18.1          | 176.8                        | *                            | 177                         | 375                                         |
|                                                                                     | 3B               | **               | **       | **                                  | **                                                    |                                    |                                          |                                               |               |                                                               |               | **                           | **                           |                             |                                             |
| 210                                                                                 | 4A               | P                | P        | 8.48                                | *                                                     | 8.62                               | 0.633                                    | 10.19                                         | 20.6          | 10.5                                                          | 20.0          | 137.0                        | *                            | 129                         | 368                                         |
|                                                                                     | 4B               | B <sup>(3)</sup> | B        | 8.87                                | 8.50                                                  |                                    |                                          |                                               |               |                                                               |               | 120.37                       | *                            |                             |                                             |
| 340                                                                                 | 5A               | B                | P        | 3.88                                | (1.44)                                                | 3.27                               | 0.240                                    | 17.95                                         | 19.0          | 19.0                                                          | 17.9          | 70.20                        | (35.43)                      | 64                          | 250                                         |
|                                                                                     | 5B               | B                | B        | 2.90                                | 3.03                                                  |                                    |                                          |                                               |               |                                                               |               | 55.62                        | 66.27                        |                             |                                             |
| 520                                                                                 | 6A               | B                | B        | 1.74                                | 1.59                                                  | 1.74                               | 0.128                                    | 27.86                                         | 18.7          | 33.0                                                          | 15.8          | 41.01                        | 48.00                        | 45.6                        | 240                                         |
|                                                                                     | 6B               | B                | B        | 1.81                                | 1.82                                                  |                                    |                                          |                                               |               |                                                               |               | 43.26                        | 50.02                        |                             |                                             |
| 880                                                                                 | 7A               | B                | P        | 0.96                                | 0.82                                                  | 0.89                               | 0.0653                                   | 47.15                                         | 18.7          | 58.0                                                          | 15.2          | 30.11                        | 26.64                        | 28.9                        | 245                                         |
|                                                                                     | 7B               | **               | B        | **                                  | 0.90                                                  |                                    |                                          |                                               |               |                                                               |               | **                           | 29.77                        |                             |                                             |
| 1400                                                                                | 8A               | B                | B        | 0.62                                | 0.46                                                  | 0.52                               | 0.0382                                   | 71.14                                         | 19.6          | 82.0                                                          | 17.1          | *                            | 17.80                        | 17.0                        | 235                                         |
|                                                                                     | 8B               | B                | B        | 0.42                                | 0.59                                                  |                                    |                                          |                                               |               |                                                               |               | 16.10                        | *                            |                             |                                             |
| 2000                                                                                | 9A               | B                | B        | 0.24                                | 0.27                                                  | 0.25                               | 0.0183                                   | 120.6                                         | 16.6          | 125.0                                                         | 16.0          | 11.47                        | 12.66                        | 12.1                        | 245                                         |
| Note (1) K = Kistler Gage<br>(2) P = BRL-PNS Type Gage<br>(3) B = BRL-PHS Type Gage |                  |                  |          |                                     | Average for all gage distances                        |                                    |                                          |                                               | 18.9          |                                                               | 17.16         |                              |                              |                             | 280                                         |
|                                                                                     |                  |                  |          |                                     | Average excluding distances of<br>80', 110', and 150' |                                    |                                          |                                               | 18.9          |                                                               | 17.01         |                              |                              |                             | 264                                         |

( ) Measured value not used in computations.

\* Gage failure.

\*\* No gage.

TABLE 7. Test #7 (ES-5065)

| R<br>gage<br>distance<br>(ft)                                                       | Gage<br>position | Gage<br>type     |          | Peak<br>overpres.<br>N leg<br>(psi) | Peak<br>overpres.<br>E leg<br>(psi)                   | Avg.<br>peak<br>overpres.<br>(psi) | Avg.<br>peak<br>overpres.<br>amb. atmos. | $\lambda_1$<br>Scaled<br>distance<br>BRL 1518 | R/ $\lambda_1$ | $\lambda_2$<br>Scaled<br>distance<br>overpres.<br>calib.<br>A | R/ $\lambda_2$ | Impulse<br>N leg<br>(psi-ms) | Impulse<br>E leg<br>(psi-ms) | Avg.<br>impulse<br>(psi-ms) | $w^{2/3}$<br>from<br>impulse<br>calib.<br>A |
|-------------------------------------------------------------------------------------|------------------|------------------|----------|-------------------------------------|-------------------------------------------------------|------------------------------------|------------------------------------------|-----------------------------------------------|----------------|---------------------------------------------------------------|----------------|------------------------------|------------------------------|-----------------------------|---------------------------------------------|
|                                                                                     |                  | N<br>leg         | E<br>leg |                                     |                                                       |                                    |                                          |                                               |                |                                                               |                |                              |                              |                             |                                             |
| 80                                                                                  | 1A               | K <sup>(1)</sup> | K        | (*176.04)                           | 281.77                                                | 281.77                             | 20.8                                     | 2.05                                          | 39.0           | 2.85                                                          | 28.0           | (*432.61)                    | 840.33                       | 840                         | 552                                         |
| 110                                                                                 | 2A               | **               | **       | **                                  | **                                                    |                                    |                                          |                                               |                |                                                               |                | **                           | **                           |                             |                                             |
|                                                                                     | 2B               | K                | K        | 187.56                              | 95.37                                                 | 141.46                             | 10.4                                     | 2.83                                          | 38.9           | 3.70                                                          | 29.7           | 470.98                       | 438.02                       | 454                         | 555                                         |
| 150                                                                                 | 3A               | P <sup>(2)</sup> | P        | 31.23                               | *                                                     | 31.32                              | 2.31                                     | 5.49                                          | 27.3           | 6.60                                                          | 22.7           | 386.4                        | *                            | 386                         | 740                                         |
|                                                                                     | 3B               | **               | **       | **                                  | **                                                    |                                    |                                          |                                               |                |                                                               |                | **                           | **                           |                             |                                             |
| 210                                                                                 | 4A               | P                | P        | 11.61                               | *                                                     | 12.45                              | 0.919                                    | 8.47                                          | 24.8           | 8.75                                                          | 23.7           | 210.1                        | *                            | 209                         | 570                                         |
|                                                                                     | 4B               | B <sup>(3)</sup> | B        | 13.66                               | 12.08                                                 |                                    |                                          |                                               |                |                                                               |                | 207.13                       | *                            |                             |                                             |
| 340                                                                                 | 5A               | B                | P        | 5.88                                | 5.97                                                  | 5.68                               | 0.419                                    | 12.80                                         | 26.6           | 13.2                                                          | 25.8           | 144.82                       | (7.8)                        | 133                         | 583                                         |
|                                                                                     | 5B               | B                | B        | 4.66                                | 6.21                                                  |                                    |                                          |                                               |                |                                                               |                | 119.79                       | 135.83                       |                             |                                             |
| 520                                                                                 | 6A               | B                | B        | 2.78                                | 2.62                                                  | 2.69                               | 0.198                                    | 20.39                                         | 25.5           | 22.3                                                          | 23.3           | 90.70                        | 92.00                        | 91.6                        | 535                                         |
|                                                                                     | 6B               | B                | B        | *                                   | 2.68                                                  |                                    |                                          |                                               |                |                                                               |                | *                            | 92.12                        |                             |                                             |
| 880                                                                                 | 7A               | B                | P        | 1.59                                | 1.35                                                  | 1.41                               | 0.104                                    | 32.66                                         | 26.9           | 40.0                                                          | 22.0           | 64.77                        | 61.94                        | 58.8                        | 500                                         |
|                                                                                     | 7B               | **               | B        | **                                  | 1.28                                                  |                                    |                                          |                                               |                |                                                               |                | **                           | 50.71                        |                             |                                             |
| 1400                                                                                | 8A               | B                | **       | 0.87                                | **                                                    | 0.76                               | 0.0561                                   | 53.07                                         | 26.4           | 65.0                                                          | 21.6           | 37.49                        | **                           | 34.0                        | 460                                         |
|                                                                                     | 8B               | B                | B        | 0.71                                | 0.71                                                  |                                    |                                          |                                               |                |                                                               |                | 33.37                        | 31.15                        |                             |                                             |
| 2000                                                                                | 9A               |                  | B        | 0.46                                | 0.42                                                  | 0.44                               | 0.0325                                   | 79.84                                         | 25.1           | 91.0                                                          | 22.0           | 22.65                        | 22.76                        | 22.70                       | 455                                         |
| Note (1) K = Kistler Gage<br>(2) P = BRL-PNS Type Gage<br>(3) B = BRL-PHS Type Gage |                  |                  |          |                                     | Average for all gage distances                        |                                    |                                          |                                               | 29.0           |                                                               | 24.3           |                              |                              |                             | 561                                         |
|                                                                                     |                  |                  |          |                                     | Average excluding distances of<br>80', 110', and 150' |                                    |                                          |                                               | 25.9           |                                                               | 23.1           |                              |                              |                             | 517                                         |

( ) Measured value not used in computations.

\* Gage failure.

\*\* No gage.

TABLE 8. Calibration Test "A" (ES-4262)

| R<br>gage<br>distance<br>(ft)                                                       | Gage<br>position | Gage<br>type     |          | Peak<br>overpres.<br>N leg<br>(psi) | Peak<br>overpres.<br>E leg<br>(psi)                   | Avg.<br>peak<br>overpres.<br>(psi) | Avg.<br>peak<br>overpres.<br>amb. atmos. | $\lambda_1$<br>Scaled<br>distance<br>BRL 1518 | $R/\lambda_1$ | Impulse<br>N leg<br>(psi-ms) | Impulse<br>E leg<br>(psi-ms) | Avg.<br>impulse<br>(psi-ms) |
|-------------------------------------------------------------------------------------|------------------|------------------|----------|-------------------------------------|-------------------------------------------------------|------------------------------------|------------------------------------------|-----------------------------------------------|---------------|------------------------------|------------------------------|-----------------------------|
|                                                                                     |                  | N<br>leg         | E<br>leg |                                     |                                                       |                                    |                                          |                                               |               |                              |                              |                             |
| 80                                                                                  | 1A               | K <sup>(1)</sup> | K        | 131.73                              | 158.36                                                | 145.04                             | 10.63                                    | 2.95                                          | 27.1          | 773.16                       | 635.10                       | 704.13                      |
| 110                                                                                 | 2A               | P <sup>(2)</sup> | K        | 61.02                               | 64.21                                                 | 62.61                              | 4.59                                     | 4.06                                          | 27.1          | 326.16                       | 427.73                       | 347.19                      |
|                                                                                     | 2B               | K                | **       | (32.43)                             | **                                                    |                                    |                                          |                                               |               | 287.70                       | **                           |                             |
| 150                                                                                 | 3A               | P                | K        | 38.52                               | 34.57                                                 | 32.79                              | 2.40                                     | 5.32                                          | 28.2          | 343.83                       | 158.17                       | 229.68                      |
|                                                                                     | 3B               | K                | **       | 25.30                               | **                                                    |                                    |                                          |                                               |               | 187.05                       | **                           |                             |
| 210                                                                                 | 4A               | P                | P        | 9.30                                | 9.94                                                  | 10.06                              | 0.73                                     | 9.50                                          | 22.1          | 132.10                       | 195.82                       | 151.11                      |
|                                                                                     | 4B               | B <sup>(3)</sup> | B        | 10.95                               | *                                                     |                                    |                                          |                                               |               | 125.41                       | *                            |                             |
| 340                                                                                 | 5A               | B                | P        | 4.91                                | 4.36                                                  | 4.28                               | 0.313                                    | 15.1                                          | 22.5          | 94.18                        | 155.66                       | 115.14                      |
|                                                                                     | 5B               | B                | B        | 3.78                                | 4.09                                                  |                                    |                                          |                                               |               | 83.53                        | 127.19                       |                             |
| 520                                                                                 | 6A               | B                | B        | 2.30                                | 2.69                                                  | 2.50                               | 0.183                                    | 21.6                                          | 24.1          | 77.16                        | 93.09                        | 79.26                       |
|                                                                                     | 6B               | B                | B        | 2.11                                | 2.92                                                  |                                    |                                          |                                               |               | 54.84                        | 91.95                        |                             |
| 880                                                                                 | 7A               | B                | P        | 1.12                                | 1.69                                                  | 1.42                               | 0.104                                    | 32.6                                          | 26.9          | (17.47)                      | 63.98                        | 59.57                       |
|                                                                                     | 7B               | **               | B        | **                                  | 1.47                                                  |                                    |                                          |                                               |               | **                           | 55.17                        |                             |
| 1400                                                                                | 8A               | B                | B        | 0.69                                | 1.05                                                  | 0.78                               | 0.057                                    | 52.5                                          | 26.6          | 37.71                        | 30.21                        | 34.55                       |
|                                                                                     | 8B               | B                | B        | 0.57                                | 0.81                                                  |                                    |                                          |                                               |               | 35.88                        | 34.42                        |                             |
| 2000                                                                                | 9A               | B                | B        | 0.43                                | 0.45                                                  | 0.44                               | 0.032                                    | 81.0                                          | 24.7          | 25.12                        | 23.60                        | 24.36                       |
| Note (1) K = Kistler Gage<br>(2) P = BRL-PNS Type Gage<br>(3) B = BRL-PHS Type Gage |                  |                  |          |                                     | Average for all gage distances                        |                                    |                                          |                                               | 25.47         |                              |                              |                             |
|                                                                                     |                  |                  |          |                                     | Average excluding distances of<br>80', 110', and 150' |                                    |                                          |                                               | 24.48         |                              |                              |                             |

( ) Measured value not used in computations.

\*\* No gage.

\* Gage failure.

TABLE 9. Calibration Test "B" (ES-5064)

| R<br>gage<br>distance<br>(ft)                                                       | Gage<br>position | Gage<br>type     |          | Peak<br>overpres.<br>N leg<br>(psi) | Peak<br>overpres.<br>E leg<br>(psi)                   | Avg.<br>peak<br>overpres.<br>(psi) | Avg.<br>peak<br>overpres.<br>amb. atmos. | $\lambda_1$<br>Scaled<br>distance<br>BRL 1518 | $R/\lambda_1$ | $\lambda_2$<br>Scaled<br>distance<br>overpres.<br>calib.<br>A | $R/\lambda_2$ | Impulse<br>N leg<br>(psi-ms) | Impulse<br>E leg<br>(psi-ms) | Avg.<br>impulse<br>(psi-ms) | $w^{2/3}$<br>from<br>impulse<br>calib.<br>A |
|-------------------------------------------------------------------------------------|------------------|------------------|----------|-------------------------------------|-------------------------------------------------------|------------------------------------|------------------------------------------|-----------------------------------------------|---------------|---------------------------------------------------------------|---------------|------------------------------|------------------------------|-----------------------------|---------------------------------------------|
|                                                                                     |                  | N<br>leg         | E<br>leg |                                     |                                                       |                                    |                                          |                                               |               |                                                               |               |                              |                              |                             |                                             |
| 80                                                                                  | 1A               | K <sup>(1)</sup> | K        | *                                   | 308.25                                                | 308.25                             | 22.6                                     | 1.97                                          | 40.6          | 2.90                                                          | 27.5          | *                            | 764.43                       | 764                         | 517                                         |
| 110                                                                                 | 2A               | **               | **       | **                                  | **                                                    |                                    | 6.04                                     | 3.60                                          | 30.6          | 4.60                                                          | 23.9          | **                           | **                           |                             |                                             |
|                                                                                     | 2B               | K                | K        | *                                   | 82.35                                                 | 82.35                              |                                          |                                               |               |                                                               |               | *                            | 397.96                       | 398                         | 505                                         |
| 150                                                                                 | 3A               | P <sup>(2)</sup> | P        | *                                   | 21.84                                                 | 21.84                              | 1.61                                     | 6.47                                          | 23.2          | 7.25                                                          | 20.7          | *                            | 286.1                        | 286                         | 580                                         |
|                                                                                     | 3B               | **               | **       | **                                  | **                                                    |                                    |                                          |                                               |               |                                                               |               | **                           | **                           |                             |                                             |
| 210                                                                                 | 4A               | P                | P        | *                                   | *                                                     | 10.20                              | 0.748                                    | 9.37                                          | 22.4          | 9.60                                                          | 21.9          | *                            | *                            | 163                         | 485                                         |
|                                                                                     | 4B               | B <sup>(3)</sup> | B        | 9.95                                | 10.45                                                 |                                    |                                          |                                               |               |                                                               |               | 149.84                       | 176.82                       |                             |                                             |
| 340                                                                                 | 5A               | B                | P        | 4.85                                | 4.07                                                  | 4.18                               | 0.306                                    | 15.33                                         | 22.2          | 15.7                                                          | 21.6          | 100.84                       | 118.4                        | 106                         | 447                                         |
|                                                                                     | 5B               | B                | B        | 3.58                                | 4.24                                                  |                                    |                                          |                                               |               |                                                               |               | 86.53                        | 119.18                       |                             |                                             |
| 520                                                                                 | 6A               | B                | B        | 2.07                                | 1.99                                                  | 2.05                               | 0.151                                    | 24.67                                         | 21.0          | 28.3                                                          | 18.4          | 79.58                        | 68.43                        | 76.7                        | 435                                         |
|                                                                                     | 6B               | B                | B        | 2.10                                | 2.07                                                  |                                    |                                          |                                               |               |                                                               |               | 87.79                        | 70.88                        |                             |                                             |
| 880                                                                                 | 7A               | B                | P        | 1.34                                | 1.20                                                  | 1.20                               | 0.0880                                   | 37.18                                         | 23.6          | 46.2                                                          | 19.0          | 46.49                        | 48.4                         | 44.8                        | 375                                         |
|                                                                                     | 7B               | **               | B        | **                                  | 1.06                                                  |                                    |                                          |                                               |               |                                                               |               | **                           | 39.28                        |                             |                                             |
| 1400                                                                                | 8A               | B                | **       | 0.75                                | **                                                    | 0.68                               | 0.0499                                   | 58.07                                         | 24.1          | 70.0                                                          | 20.0          | 35.42                        | **                           | 33.2                        | 450                                         |
|                                                                                     | 8B               | B                | B        | 0.60                                | 0.70                                                  |                                    |                                          |                                               |               |                                                               |               | 31.05                        | *                            |                             |                                             |
| 2000                                                                                | 9A               | B                | B        | 0.40                                | 0.31                                                  | 0.35                               | 0.0257                                   | 94.74                                         | 21.1          | 105.0                                                         | 19.1          | 20.54                        | 19.12                        | 19.83                       | 400                                         |
| Note (1) K = Kistler Gage<br>(2) P = BRL-PNS Type Gage<br>(3) B = BRL-PHS Type Gage |                  |                  |          |                                     | Average for all gage distances                        |                                    |                                          |                                               | 25.3          |                                                               | 21.33         |                              |                              |                             | 466                                         |
|                                                                                     |                  |                  |          |                                     | Average excluding distances of<br>80', 110', and 150' |                                    |                                          |                                               | 22.4          |                                                               | 20.0          |                              |                              |                             | 432                                         |

\* Gage failure.

\*\* No gage.

## ANALYSIS OF BLAST YIELD COMPARISONS

## COMPARISON WITH TNT

In Table 10, which summarizes TNT equivalent yields for the tests conducted, six different yield values are identified for each motor test, representing three different approaches to yield determination. It is not considered that all columns of values are equally valid; e.g., the  $W_{T1}$  column is believed to exaggerate the yield for some tests. However, the multiple listing of values does serve to illustrate the variation that can result with different choices of gage distance ranges and calibration standards, and when different blast characteristics, such as impulse versus overpressure, are used in yield determination.

The multiplicity of values also illustrates the difficulty of making an arbitrary choice of a single value of TNT equivalency for any of the tests. Some comments on the differences are presented below:

1. The differences between  $W_{T3}$  and  $W_{T4}$  and those between  $W_{T5}$  and  $W_{T6}$  simply suggest that the blast decay patterns of the propellants tested do not parallel those of TNT as tested in the Calibration B firing.
2. The differences between  $W_{T1}$  and  $W_{T2}$  also suggest nonparallel decay patterns; however, they also include differences in charge geometry and differences in test techniques, including gage recording and interpretation of data at close-in positions. The agreement between  $W_{T2}$  and  $W_{T4}$  is good, which suggests that the above described differences diminish in significance when close-in gage records are disregarded.
3. Differences between  $W_{T3}$  and  $W_{T5}$  and between  $W_{T4}$  and  $W_{T6}$  are considered acceptable, since it is not anticipated that equivalent yields based on impulse would be the same as those based on overpressure.

## COMPARISON WITH COMPOSITION B

Table 11 summarizes Composition B equivalency yields for the tests conducted, based on overpressure and impulse comparisons of like values from the Calibration A Comp B firing.

As in Table 10, values are shown with all gages considered, and also with records of the three close-in positions omitted. Again, there are differences between values for an individual test in each of the four columns, but these are generally of less magnitude than the corresponding differences appearing in Table 10.

TABLE 10. Summary of TNT Equivalent Yield

| Test number | Yield from overpressure calibration BRL Report 1518 all gages | Yield from overpressure calibration BRL Report 1518 excluding gages at 80, 110 & 150' | Yield from overpressure Calib. "B" all gages | Yield from overpressure from Calib. "B" excluding gages at 80, 110 & 150' | Yield from impulse Calib. "B" all gages | Yield from impulse from Calib. "B" excluding gages at 80, 110 & 150' |
|-------------|---------------------------------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------------|---------------------------------------------------------------------------|-----------------------------------------|----------------------------------------------------------------------|
|             | W <sub>T1</sub>                                               | W <sub>T2</sub>                                                                       | W <sub>T3</sub>                              | W <sub>T4</sub>                                                           | W <sub>T5</sub>                         | W <sub>T6</sub>                                                      |
| 1           | 2,250                                                         | 2,360                                                                                 | 2,330                                        | 2,570                                                                     | 1,660                                   | 1,500                                                                |
| 2           | 12,700                                                        | 12,200                                                                                | 10,600                                       | 12,300                                                                    | 10,900                                  | 10,900                                                               |
| 3           | 22,900                                                        | 19,400                                                                                | 17,000                                       | 19,600                                                                    | 16,000                                  | 16,800                                                               |
| 4           | 18,400                                                        | 17,700                                                                                | 15,500                                       | 18,400                                                                    | 13,500                                  | 15,200                                                               |
| 5           | 22,200                                                        | 16,300                                                                                | 15,600                                       | 16,500                                                                    | 14,300                                  | 15,300                                                               |
| 6           | 6,350                                                         | 6,350                                                                                 | 6,530                                        | 6,530                                                                     | 5,200                                   | 5,330                                                                |
| 7           | 22,600                                                        | 16,100                                                                                | 15,500                                       | 16,000                                                                    | 13,700                                  | 13,800                                                               |
| Calib. A    | 15,400                                                        | 13,700                                                                                | 12,500                                       | 14,100                                                                    | 11,100                                  | 12,300                                                               |
| B           | 15,000                                                        | 10,400                                                                                | -----                                        | -----                                                                     | -----                                   | -----                                                                |

TABLE 11. Summary in Terms of Composition "B" Equivalent Yield

| Test<br>number | Yield from<br>overpressure<br>Calib. "A"<br>all gages | Yield from<br>overpressure<br>Calib. "A"<br>excluding gages<br>at 80, 110 & 150' | Yield from<br>impulse<br>Calib. "A"<br>all gages | Yield from<br>impulse<br>Calib. "A"<br>excluding gages<br>at 80, 110 & 150' |
|----------------|-------------------------------------------------------|----------------------------------------------------------------------------------|--------------------------------------------------|-----------------------------------------------------------------------------|
|                | $W_{C1}$                                              | $W_{C2}$                                                                         | $W_{C3}$                                         | $W_{C4}$                                                                    |
| 1              | 1,910                                                 | 1,950                                                                            | 1,520                                            | 1,160                                                                       |
| 2              | 9,000                                                 | 9,400                                                                            | 9,800                                            | 8,800                                                                       |
| 3              | 15,400                                                | 15,100                                                                           | 15,200                                           | 14,100                                                                      |
| 4              | 13,300                                                | 13,800                                                                           | 12,800                                           | 13,300                                                                      |
| 5              | 14,300                                                | 12,600                                                                           | 13,700                                           | 13,600                                                                      |
| 6              | 5,060                                                 | 4,920                                                                            | 4,690                                            | 4,290                                                                       |
| 7              | 14,300                                                | 12,300                                                                           | 13,300                                           | 11,800                                                                      |
| Calib.<br>"B"  | 9,700                                                 | 8,000                                                                            | 10,100                                           | 8,980                                                                       |

## GENERAL OBSERVATIONS CONCERNING DERIVED YIELDS

Comparison of Tables 10 and 11 suggests that the propellants tested are behaving more like Comp B than like TNT. A comparison of the yields derived in the high explosive calibration firings is also of interest.

For example, when Comp B is expressed in TNT equivalency, using overpressure and the full range of gages ( $W_{T3}$ ), the ratio value becomes (12,500 lb/10,340 lb) or 1.20, which compares to the commonly accepted value of 1.13. Using impulse and all gages ( $W_{T5}$ ), the ratio value becomes (11,100/10,340) or 1.07, which is quite close to the commonly accepted 1.06 value. However, when records of close-in gages are omitted, these values change from 1.20 to 1.36 (14,100/10,340) when using  $W_{T4}$ , and from 1.07 to 1.19 (12,300/10,340) when using  $W_{T6}$ .

It should be noted that these changes with gage distances in TNT-versus-Composition B relationships are reflected in cross comparison of propellant values in Columns  $W_{T3}$  through  $W_{T6}$  of Table 10 with corresponding columns of Table 11.

If columns  $W_{T3}$  and  $W_{T5}$  of Table 10 and the corresponding columns,  $W_{C1}$  and  $W_{C3}$ , of Table 11 are arbitrarily selected for derivation of percentage equivalencies, the following values are obtained.

| Test No. | TNT equiv. over-pressure | TNT equiv. impulse | Comp. "B" equiv. overpressure | Comp. "B" equiv. impulse | Test geometry* |
|----------|--------------------------|--------------------|-------------------------------|--------------------------|----------------|
| 1        | 32%                      | 23%                | 26%                           | 21%                      | ⊙2             |
| 2        | 144%                     | 148%               | 122%                          | 133%                     | ⊙7             |
| 3        | 116%                     | 109%               | 105%                          | 104%                     | ⊙7 ⊙2          |
| 4        | 106%                     | 92%                | 91%                           | 88%                      | ⊙7 ⊙2          |
| 5        | 107%                     | 98%                | 98%                           | 94%                      | ⊙7<br>2        |
| 6        | 45%                      | 36%                | 35%                           | 32%                      | ⊙2 ⊙2          |
| 7        | 106%                     | 94%                | 98%                           | 91%                      | ⊙7<br>2        |

\* The dot in the geometry configuration for each test shows the placement of the charge; the numbers 2 and 7 indicate the class of propellant.

In the above grouping, only two tests--3 and 4--were essentially identical; however, they did not produce identical results.

Tests 3, 4, 5, and 7 used identical motor combinations, but were different in motor attitude and method of priming. The results are similar despite the differences in test conditions.

Test 1 used only one class 2 motor, and test 6 used two class 2 motors involving twice as much propellant; however, there is a substantial increase in percentages between the two tests. This suggests that the added mass, or the distribution of mass and relative positioning of priming charge, influenced the increase.

If Tests 1, 2, 3, 4, and 6 are compared, and if it is assumed that the class 7 motor in Test 2 was producing near maximum yield, then it follows that the class 2 motors in Tests 3 and 4 were producing a higher yield than they were in Tests 1 or 6. Using TNT overpressure values ( $W_{T3}$ ) and averaging results of Tests 3 and 4, the following defines average yield of the class 2 motor in Tests 3 and 4:

$$Y (\text{class 2 yield}) = \frac{16,200 - 10,600}{7,250} = \frac{5,600}{7,250} = 0.77 \text{ or } 77\%$$

Using Comp B overpressure values ( $W_{C1}$ ), the following applies:

$$Y = \frac{14,350 - 9,000}{7,250} = 0.74 \text{ or } 74\%$$

This indicates that the large application of externally applied energy from the exploding class 7 motor produced greater yield in the class 2 motor than the yield produced in a similar motor by the explosion of 96 lb of C-4 placed in the grain perforation.

## CONCLUSIONS

The derived percentage values of high explosive equivalency are considered to represent a convenient expression of potential blast damage effects in terms of common explosives; however, it is acknowledged that there are differences in structure and rates of decay of blast waves produced by different explosives and propellants so that expressions of high explosive equivalency are limited to generalizations without specific identification of quantities, distances, and types of energy measured.

Additionally, it is emphasized that the measurements made and the analytical approaches used in this evaluation required the cubing of the derived  $W^{1/3}$  values to arrive at the W values shown in Tables 10 and 11. Thus, errors in measurement (and the possible real anomalies in the blast wave itself) are amplified in the expression of W.

With the above qualifications in mind, the tests show that, under strong stimulus, motors of the class 7 type tested are capable of producing blast yields that exceed those of some common explosives. Motors of the class 2 type tested are also capable of producing significant blast yields, the magnitude of which tends to vary with the strength of the stimulus and with propellant mass, or the distribution of mass and relative positioning of the priming charge.

Fragment type, size, quantity, and distribution were considered to be consistent with the explosive effects noted with each test. In general, the estimated total weight of unburned propellant fragments varied inversely with the blast effectiveness, as might be expected.

No attempt has been made to correlate blast yield with crater size for two main reasons: (1) the craters tended to assume different shapes according to the configuration and orientation of the propellant and explosive charges, and (2) the same site was used for all tests in order to maintain consistent gage position; therefore, there was progressive pulverization and change of soil structure with each explosion and subsequent re-leveling operation.

Appendix

ARMED SERVICES EXPLOSIVES SAFETY BOARD  
SOLID PROPELLANT MOTOR HAZARDS TESTS

Summaries of conditions associated with each test  
are shown on the following pages.

|                       |                                                                                                                                                  |                                   |                                |
|-----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|--------------------------------|
| Conducted by: US NOTS |                                                                                                                                                  | Test No. 1                        | E.S. No. E-4259                |
| Funds:                |                                                                                                                                                  | Date 5 Nov 1964                   | Test Site Victor "C"           |
| PRIMED MOTOR          | Number <u>1</u>                                                                                                                                  | Type _____                        | Serial No. _____               |
|                       | Propellant Class <u>2</u>                                                                                                                        | Propellant Weight <u>7250 lbs</u> | Motor Case Mat. <u>Steel</u>   |
|                       | Position relative to ground <u>In contact with: horizontal</u>                                                                                   |                                   |                                |
|                       | Position of main motor axis <u>Horizontal, head end NE</u>                                                                                       |                                   |                                |
|                       | Remarks (including motor deficiencies) <u>Four nozzles in aft bulkhead</u>                                                                       |                                   |                                |
| PRIMING SYSTEM        | Priming Explosive: Type <u>C-4</u> Amount <u>96 lbs</u> Position <u>Grain perforation</u>                                                        |                                   |                                |
|                       | Detonators: Type <u>Engine Sp.</u> Number <u>2</u> Position <u>One fore; one aft</u>                                                             |                                   |                                |
|                       | Remarks <u>Some of the explosive was packed into the cavity where the nozzle chambers join the grain perforation at the aft end of the motor</u> |                                   |                                |
| ACCEPTOR MOTORS       | Number <u>None</u>                                                                                                                               | Type _____                        | Serial No. _____               |
|                       | Propellant Class _____                                                                                                                           | Propellant Weight _____           | Motor Case Mat. _____          |
|                       | Position relative to primed motor _____                                                                                                          |                                   |                                |
|                       | Remarks (including motor deficiencies) _____                                                                                                     |                                   |                                |
| WEATHER               | Pressure mb <u>941.7</u>                                                                                                                         | Temperature °F <u>75</u>          | Density Slugs _____            |
|                       | Humidity <u>18%</u>                                                                                                                              | Wind Direction <u>095°</u>        | Wind Velocity, ft/sec <u>8</u> |

|                       |                                                                                           |                               |                                   |
|-----------------------|-------------------------------------------------------------------------------------------|-------------------------------|-----------------------------------|
| Conducted by: US NOTS |                                                                                           | Test No. 2                    | E.S. No. E-4260                   |
| Funds:                |                                                                                           | Date 16 Nov 1964              | Test Site Victor "C"              |
| PRIMED MOTOR          | Number <u>1</u>                                                                           | Type _____                    | Serial No. _____                  |
|                       | Propellant Class <u>7</u>                                                                 | Propellant Weight <u>7358</u> | Motor Case Mat. <u>Fiberglass</u> |
|                       | Position relative to ground <u>On ground: horizontal</u>                                  |                               |                                   |
|                       | Position of main motor axis <u>Horizontal; head end NE</u>                                |                               |                                   |
|                       | Remarks (including motor deficiencies) <u>There were no nozzles on this motor.</u>        |                               |                                   |
| PRIMING SYSTEM        | Priming Explosive: Type <u>C-4</u> Amount <u>96 lbs</u> Position <u>Grain perforation</u> |                               |                                   |
|                       | Detonators: Type <u>Electric</u> Number <u>2</u> Position <u>One fore; one aft</u>        |                               |                                   |
|                       | Remarks <u>Two electric blasting caps were fired simultaneously.</u>                      |                               |                                   |
| ACCEPTOR MOTORS       | Number <u>None</u>                                                                        | Type _____                    | Serial No. _____                  |
|                       | Propellant Class _____                                                                    | Propellant Weight _____       | Motor Case Mat. _____             |
|                       | Position relative to primed motor _____                                                   |                               |                                   |
|                       | Remarks (including motor deficiencies) _____                                              |                               |                                   |
| WEATHER               | Pressure mb <u>940.6</u>                                                                  | Temperature °F <u>47</u>      | Density Slugs _____               |
|                       | Humidity <u>40</u>                                                                        | Wind Direction <u>080°</u>    | Wind Velocity, ft/sec <u>10</u>   |

|                       |                                                                                                                         |  |                                    |  |                                   |                      |  |  |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------|--|------------------------------------|--|-----------------------------------|----------------------|--|--|
| Conducted by: US NOTS |                                                                                                                         |  | Test No. 3                         |  |                                   | E.S. No. 4261-1      |  |  |
| Funds:                |                                                                                                                         |  | Date 18 Nov 1964                   |  |                                   | Test Site Victor "C" |  |  |
| PRIMED MOTOR          | Number <u>1</u>                                                                                                         |  | Type _____                         |  | Serial No. _____                  |                      |  |  |
|                       | Propellant Class <u>7</u>                                                                                               |  | Propellant Weight <u>7358</u>      |  | Motor Case Mat. <u>Fiberglass</u> |                      |  |  |
|                       | Position relative to ground <u>On ground: horizontal</u>                                                                |  |                                    |  |                                   |                      |  |  |
|                       | Position of main motor axis <u>Horizontal; head end NE</u>                                                              |  |                                    |  |                                   |                      |  |  |
|                       | Remarks (including motor deficiencies) <u>Rear bulkhead but no nozzles in this motor.</u>                               |  |                                    |  |                                   |                      |  |  |
| PRIMING SYSTEM        | Priming Explosive: Type <u>C-4</u>                                                                                      |  | Amount <u>96 lbs</u>               |  | Position <u>Grain perforation</u> |                      |  |  |
|                       | Detonators: Type <u>Electric</u>                                                                                        |  | Number <u>2</u>                    |  | Position <u>One fore; one aft</u> |                      |  |  |
|                       | Remarks _____                                                                                                           |  |                                    |  |                                   |                      |  |  |
| ACCEPTOR MOTORS       | Number <u>1</u>                                                                                                         |  | Type _____                         |  | Serial No. _____                  |                      |  |  |
|                       | Propellant Class <u>2</u>                                                                                               |  | Propellant Weight <u>7250</u>      |  | Motor Case Mat. <u>Steel</u>      |                      |  |  |
|                       | Position relative to primed motor <u>Side by side: touching</u>                                                         |  |                                    |  |                                   |                      |  |  |
|                       | Remarks (including motor deficiencies) <u>Rear bulkhead complete with nozzle bosses (no nozzles) was on this motor.</u> |  |                                    |  |                                   |                      |  |  |
| WEATHER               | Pressure mb <u>935.7</u>                                                                                                |  | Temperature $^{\circ}$ F <u>54</u> |  | Density Slugs _____               |                      |  |  |
|                       | Humidity <u>12%</u>                                                                                                     |  | Wind Direction <u>S</u>            |  | Wind Velocity, ft/sec <u>7</u>    |                      |  |  |

|                       |                                                                                              |                               |                                   |
|-----------------------|----------------------------------------------------------------------------------------------|-------------------------------|-----------------------------------|
| Conducted by: US NOTS |                                                                                              | Test No. 4                    | E.S. No. 4261-2                   |
| Funds:                |                                                                                              | Date 20 Nov 1964              | Test Site "C"                     |
| PRIMED MOTOR          | Number <u>1</u>                                                                              | Type _____                    | Serial No. _____                  |
|                       | Propellant Class <u>7</u>                                                                    | Propellant Weight <u>7358</u> | Motor Case Mat. <u>Fiberglass</u> |
|                       | Position relative to ground <u>On ground: horizontal</u>                                     |                               |                                   |
|                       | Position of main motor axis <u>Horizontal; head end NE</u>                                   |                               |                                   |
|                       | Remarks (including motor deficiencies) <u>No nozzles on this motor.</u>                      |                               |                                   |
| PRIMING SYSTEM        | Priming Explosive: Type <u>C-4</u> Amount <u>96 lbs</u> Position <u>In grain perforation</u> |                               |                                   |
|                       | Detonators: Type <u>Electric</u> Number <u>2</u> Position <u>One fore; one aft</u>           |                               |                                   |
|                       | Remarks _____                                                                                |                               |                                   |
| ACCEPTOR MOTORS       | Number <u>1</u>                                                                              | Type _____                    | Serial No. _____                  |
|                       | Propellant Class <u>2</u>                                                                    | Propellant Weight <u>7250</u> | Motor Case Mat. <u>Steel</u>      |
|                       | Position relative to primed motor <u>Side by side: touching</u>                              |                               |                                   |
|                       | Remarks (including motor deficiencies) <u>No rear bulkhead in this motor.</u>                |                               |                                   |
| WEATHER               | Pressure mb <u>943.7</u>                                                                     | Temperature °F <u>55</u>      | Density Slugs _____               |
|                       | Humidity <u>22</u>                                                                           | Wind Direction <u>Calm</u>    | Wind Velocity, ft/sec <u>--</u>   |

|                       |                                                                                           |                               |                                   |
|-----------------------|-------------------------------------------------------------------------------------------|-------------------------------|-----------------------------------|
| Conducted by: US NOTS |                                                                                           | Test No. 5                    | E.S. No. 5001                     |
| Funds:                |                                                                                           | Date 8 Jan 1965               | Test Site Victor "C"              |
| PRIMED MOTOR          | Number <u>1</u>                                                                           | Type _____                    | Serial No. _____                  |
|                       | Propellant Class <u>7</u>                                                                 | Propellant Weight <u>7358</u> | Motor Case Mat. <u>Fiberglass</u> |
|                       | Position relative to ground <u>Above ground, resting on acceptor motor</u>                |                               |                                   |
|                       | Position of main motor axis <u>Vertical, head end down</u>                                |                               |                                   |
|                       | Remarks (including motor deficiencies) _____                                              |                               |                                   |
| PRIMING SYSTEM        | Priming Explosive: Type <u>C-4</u> Amount <u>96 lbs</u> Position <u>Grain perforation</u> |                               |                                   |
|                       | Detonators: Type <u>Electric</u> Number <u>2</u> Position <u>One fore; one aft</u>        |                               |                                   |
|                       | Remarks _____                                                                             |                               |                                   |
| ACCEPTOR MOTORS       | Number <u>1</u>                                                                           | Type _____                    | Serial No. _____                  |
|                       | Propellant Class <u>2</u>                                                                 | Propellant Weight <u>7250</u> | Motor Case Mat. <u>Steel</u>      |
|                       | Position relative to primed motor <u>On ground; vertical head end up</u>                  |                               |                                   |
|                       | Remarks (including motor deficiencies) _____                                              |                               |                                   |
| WEATHER               | Pressure mb <u>941.2</u>                                                                  | Temperature °F <u>45</u>      | Density Slugs _____               |
|                       | Humidity <u>30%</u>                                                                       | Wind Direction <u>100°</u>    | Wind Velocity, ft/sec <u>5</u>    |

|                       |                                                                                              |                                 |                                   |
|-----------------------|----------------------------------------------------------------------------------------------|---------------------------------|-----------------------------------|
| Conducted by: US NOTS |                                                                                              | Test No. 6                      | E.S. No. 5058                     |
| Funds:                |                                                                                              | Date 16 Mar 1965                | Test Site C                       |
| PRIMED MOTOR          | Number <u>2</u>                                                                              | Type _____                      | Serial No. _____                  |
|                       | Propellant Class <u>2</u>                                                                    | Propellant Weight <u>14,500</u> | Motor Case Mat. <u>Steel</u>      |
|                       | Position relative to ground <u>On ground - horizontal - side-by-side</u>                     |                                 |                                   |
|                       | Position of main motor axis <u>Horizontal - head ends NE</u>                                 |                                 |                                   |
|                       | Remarks (including motor deficiencies) <u>No nozzles on either motor.</u>                    |                                 |                                   |
| PRIMING SYSTEM        | Priming Explosive: Type <u>C-4</u> Amount <u>96#/motor</u> Position <u>Grain perforation</u> |                                 |                                   |
|                       | Detonators: Type <u>Electric</u> Number <u>2/motor</u> Position <u>One fore; one aft</u>     |                                 |                                   |
|                       | Remarks _____                                                                                |                                 |                                   |
| ACCEPTOR MOTORS       | Number _____                                                                                 | Type _____                      | Serial No. _____                  |
|                       | Propellant Class _____                                                                       | Propellant Weight _____         | Motor Case Mat. _____             |
|                       | Position relative to primed motor _____                                                      |                                 |                                   |
|                       | Remarks (including motor deficiencies) _____                                                 |                                 |                                   |
| WEATHER               | Pressure mb <u>937.1</u>                                                                     | Temperature °F <u>70.5</u>      | Density Slugs <u>0.00215</u>      |
|                       | Humidity <u>16%</u>                                                                          | Wind Direction <u>Calm</u>      | Wind Velocity, ft/sec <u>calm</u> |

|                       |                                                                                                |                                |                                   |
|-----------------------|------------------------------------------------------------------------------------------------|--------------------------------|-----------------------------------|
| Conducted by: US NOTS |                                                                                                | Test No. 7                     | E.S. No. 5065                     |
| Funds:                |                                                                                                | Date 17 Mar 1965               | Test Site C                       |
| PRIMED MOTOR          | Number <u>1</u>                                                                                | Type _____                     | Serial No. _____                  |
|                       | Propellant Class <u>7</u>                                                                      | Propellant Weight <u>7358</u>  | Motor Case Mat. <u>Fiberglass</u> |
|                       | Position relative to ground <u>On top of acceptor - 6' above ground</u>                        |                                |                                   |
|                       | Position of main motor axis <u>Vertical</u>                                                    |                                |                                   |
|                       | Remarks (including motor deficiencies) <u>There were no nozzles on this motor.</u>             |                                |                                   |
| PRIMING SYSTEM        | Priming Explosive: Type <u>Comp B</u> Amount <u>100#</u> Position <u>On top of donor motor</u> |                                |                                   |
|                       | Detonators: Type <u>Electric</u> Number <u>2</u> Position <u>On top of primer charge</u>       |                                |                                   |
|                       | Remarks _____                                                                                  |                                |                                   |
| ACCEPTOR MOTORS       | Number <u>1</u>                                                                                | Type _____                     | Serial No. _____                  |
|                       | Propellant Class <u>2</u>                                                                      | Propellant Weight <u>7250#</u> | Motor Case Mat. <u>Steel</u>      |
|                       | Position relative to primed motor <u>On ground directly under donor.</u>                       |                                |                                   |
|                       | Remarks (including motor deficiencies) _____                                                   |                                |                                   |
| WEATHER               | Pressure mb <u>935.9</u>                                                                       | Temperature °F <u>72.5</u>     | Density Slugs <u>0.00215</u>      |
|                       | Humidity <u>14%</u>                                                                            | Wind Direction <u>125°</u>     | Wind Velocity, ft/sec <u>10</u>   |

|                       |                                                                                                                 |                                 |                                    |
|-----------------------|-----------------------------------------------------------------------------------------------------------------|---------------------------------|------------------------------------|
| Conducted by: US NOTS |                                                                                                                 | Test No. Calibration-A          | E.S. No. 4262                      |
| Funds:                |                                                                                                                 | Date 25 Nov 1964                | Test Site Victor "C"               |
| PRIMED MOTOR          | Number <u>216 cans</u>                                                                                          | Type <u>Reclaimed Comp. B</u>   | Serial No. _____                   |
|                       | Propellant Class _____                                                                                          | Propellant Weight <u>10,260</u> | Motor Case Mat. _____              |
|                       | Position relative to ground <u>On pallets</u>                                                                   |                                 |                                    |
|                       | Position of main motor axis _____                                                                               |                                 |                                    |
|                       | Remarks (including motor deficiencies) <u>216 metal cans 9x9x9 in. Stack was 9 cans x 6 cans x 4 cans high.</u> |                                 |                                    |
| PRIMING SYSTEM        | Priming Explosive: Type <u>C-4</u>                                                                              | Amount <u>80 lbs</u>            | Position <u>Each side</u>          |
|                       | Detonators: Type <u>Electric</u>                                                                                | Number <u>4</u>                 | Position <u>2/each primer chg.</u> |
|                       | Remarks _____                                                                                                   |                                 |                                    |
| ACCEPTOR MOTORS       | Number _____                                                                                                    | Type _____                      | Serial No. _____                   |
|                       | Propellant Class _____                                                                                          | Propellant Weight _____         | Motor Case Mat. _____              |
|                       | Position relative to primed motor _____                                                                         |                                 |                                    |
|                       | Remarks (including motor deficiencies) _____                                                                    |                                 |                                    |
| WEATHER               | Pressure mb <u>933.1</u>                                                                                        | Temperature °F <u>64</u>        | Density Slugs _____                |
|                       | Humidity <u>18</u>                                                                                              | Wind Direction <u>E</u>         | Wind Velocity, ft/sec <u>3.5</u>   |

|                                                                                                                                                                                     |                                                                  |                            |                                  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|----------------------------|----------------------------------|
| Conducted by: US NOTS                                                                                                                                                               |                                                                  | Test No. Calibration B     | E.S. No. 5064                    |
| Funds:                                                                                                                                                                              |                                                                  | Date 19 Mar 1965           | Test Site C                      |
| PRIMED MOTOR                                                                                                                                                                        | Number <u>213 boxes</u>                                          |                            | Type <u>Flake TNT</u>            |
|                                                                                                                                                                                     | Serial No. _____                                                 |                            |                                  |
|                                                                                                                                                                                     | Propellant Class _____                                           |                            | Propellant Weight <u>10,650</u>  |
|                                                                                                                                                                                     | Motor Case Mat. _____                                            |                            |                                  |
|                                                                                                                                                                                     | Position relative to ground <u>Loose in one large wooden box</u> |                            |                                  |
| Position of main motor axis <u>Box oriented NEXSW</u>                                                                                                                               |                                                                  |                            |                                  |
| Remarks (including motor deficiencies) <u>10 boxes, containing 500#, were stacked on top of the loose TNT.</u>                                                                      |                                                                  |                            |                                  |
| PRIMING SYSTEM                                                                                                                                                                      | Priming Explosive: Type <u>C-4</u>                               |                            | Amount <u>96#</u>                |
|                                                                                                                                                                                     | Position <u>E of box</u>                                         |                            |                                  |
|                                                                                                                                                                                     | Detonators: Type <u>Electric</u>                                 |                            | Number <u>2</u>                  |
| Position <u>One fore; one aft</u>                                                                                                                                                   |                                                                  |                            |                                  |
| Remarks <u>The 96# of priming explosive were contained in a 6-in. x 6-in. wooden box which extended from one end to the other at the exact center of the main explosive charge.</u> |                                                                  |                            |                                  |
| ACCEPTOR MOTORS                                                                                                                                                                     | Number _____                                                     |                            | Type _____                       |
|                                                                                                                                                                                     | Serial No. _____                                                 |                            |                                  |
|                                                                                                                                                                                     | Propellant Class _____                                           |                            | Propellant Weight _____          |
|                                                                                                                                                                                     | Motor Case Mat. _____                                            |                            |                                  |
| Position relative to primed motor _____                                                                                                                                             |                                                                  |                            |                                  |
| Remarks (including motor deficiencies) _____                                                                                                                                        |                                                                  |                            |                                  |
| WEATHER                                                                                                                                                                             | Pressure mb <u>940.0</u>                                         |                            | Temperature °F <u>65</u>         |
|                                                                                                                                                                                     | Density Slugs _____                                              |                            |                                  |
| Humidity <u>13%</u>                                                                                                                                                                 |                                                                  | Wind Direction <u>150°</u> | Wind Velocity, ft/sec <u>3.4</u> |

Unclassified  
Security Classification

| DOCUMENT CONTROL DATA - R&D                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                             |                                                    |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|----------------------------------------------------|
| (Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                             |                                                    |
| 1. ORIGINATING ACTIVITY (Corporate author)<br><br>U. S. Naval Ordnance Test Station<br>China Lake, California 93555                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                             | 2a. REPORT SECURITY CLASSIFICATION<br>Unclassified |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                             | 2b. GROUP<br>--                                    |
| 3. REPORT TITLE<br><br>HIGH EXPLOSIVE EQUIVALENCY TESTS OF ROCKET MOTORS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                             |                                                    |
| 4. DESCRIPTIVE NOTES (Type of report and inclusive dates)<br>Progress report on solid propellant motor hazard tests; 5 November 1964 through 19 March 1965.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                             |                                                    |
| 5. AUTHOR(S) (Last name, first name, initial)<br><br>Weals, F. H.<br>Wilson, C. H.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                             |                                                    |
| 6. REPORT DATE<br>November 1965                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 7a. TOTAL NO. OF PAGES                                                                      | 7b. NO. OF REFS<br>--                              |
| 8a. CONTRACT OR GRANT NO.<br>Work Request W-11S43B-Am. 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 9a. ORIGINATOR'S REPORT NUMBER(S)<br>TPR 413<br>NOTS TP 3910                                |                                                    |
| b. PROJECT NO. Local Project Number 96S<br>TA RMMO-62061/216-1/F008-11-OS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                             |                                                    |
| c. Local Project Number 556                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 9b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report)<br>--           |                                                    |
| d.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                             |                                                    |
| 10. AVAILABILITY/LIMITATION NOTICES<br><br>All distribution of this report is controlled. Qualified DDC users shall request through The Armed Services Explosives Safety Board, DOD, Washington, D. C. 2031S.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                             |                                                    |
| 11. SUPPLEMENTARY NOTES<br>Ballistics Research Lab Memorandum Report 1S18,<br>dated April 1964, used as comparison reference.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 12. SPONSORING MILITARY ACTIVITY<br>ASESB<br>Department of Defense, Washington, D. C. 2031S |                                                    |
| 13. ABSTRACT<br><br>ABSTRACT. From November 1964 to 19 March 1965 seven solid propellant motor hazard tests and two high explosive calibration tests were conducted at the U. S. Naval Ordnance Test Station, China Lake, California. The primary purpose of the tests was to assess the blast yield of two classes of solid propellant material, when subjected to severe explosive shock, and to compare the propellant blast yields to those produced by a standard explosive. The following yields, in percent of TNT equivalency by weight, were determined from over-pressure and impulse data from a blast gage array: The highest yield of class 2 propellants tested alone approximated 40%; class 7 propellants tested alone produced well over 100%; and a combination of equal amounts of each class produced approximately 100%. The quantity and dispersion of fragments varied widely with the propellants used and with the test configuration.<br><br>Additional tests are planned using different motor configurations, different propellants, and varying explosive stimuli. |                                                                                             |                                                    |

DD FORM 1473

1 JAN 64

101-807-6800

Unclassified  
Security Classification

Unclassified

## Security Classification

| 14. KEY WORDS                                                     | LINK A |    | LINK B |    | LINK C |    |
|-------------------------------------------------------------------|--------|----|--------|----|--------|----|
|                                                                   | ROLE   | WT | ROLE   | WT | ROLE   | WT |
| Propellant hazard<br>Explosive equivalency<br>Rocket motor safety |        |    |        |    |        |    |

## INSTRUCTIONS

1. **ORIGINATING ACTIVITY:** Enter the name and address of the contractor, subcontractor, grantee, Department of Defense activity or other organization (*corporata author*) issuing the report.

2a. **REPORT SECURITY CLASSIFICATION:** Enter the overall security classification of the report. Indicate whether "Restricted Data" is included. Marking is to be in accordance with appropriate security regulations.

2b. **GROUP:** Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forces Industrial Manual. Enter the group number. Also, when applicable, show that optional markings have been used for Group 3 and Group 4 as authorized.

3. **REPORT TITLE:** Enter the complete report title in all capital letters. Titles in all cases should be unclassified. If a meaningful title cannot be selected without classification, show title classification in all capitals in parenthesis immediately following the title.

4. **DESCRIPTIVE NOTES:** If appropriate, enter the type of report, e.g., interim, progress, summary, annual, or final. Give the inclusive dates when a specific reporting period is covered.

5. **AUTHOR(S):** Enter the name(s) of author(s) as shown on or in the report. Enter last name, first name, middle initial. If military, show rank and branch of service. The name of the principal author is an absolute minimum requirement.

6. **REPORT DATE:** Enter the date of the report as day, month, year; or month, year. If more than one date appears on the report, use date of publication.

7a. **TOTAL NUMBER OF PAGES:** The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.

7b. **NUMBER OF REFERENCES:** Enter the total number of references cited in the report.

8a. **CONTRACT OR GRANT NUMBER:** If appropriate, enter the applicable number of the contract or grant under which the report was written.

8b, 8c, & 8d. **PROJECT NUMBER:** Enter the appropriate military department identification, such as project number, subproject number, system number, task number, etc.

9a. **ORIGINATOR'S REPORT NUMBER(S):** Enter the official report number by which the document will be identified and controlled by the originating activity. This number must be unique to this report.

9b. **OTHER REPORT NUMBER(S):** If the report has been assigned any other report numbers (*either by the originator or by the sponsor*), also enter this number(s).

10. **AVAILABILITY/LIMITATION NOTICES:** Enter any limitations on further dissemination of the report, other than those

imposed by security classification, using standard statements such as:

- (1) "Qualified requesters may obtain copies of this report from DDC."
- (2) "Foreign announcement and dissemination of this report by DDC is not authorized."
- (3) "U. S. Government agencies may obtain copies of this report directly from DDC. Other qualified DDC users shall request through \_\_\_\_\_."
- (4) "U. S. military agencies may obtain copies of this report directly from DDC. Other qualified users shall request through \_\_\_\_\_."
- (5) "All distribution of this report is controlled. Qualified DDC users shall request through \_\_\_\_\_."

If the report has been furnished to the Office of Technical Services, Department of Commerce, for sale to the public, indicate this fact and enter the price, if known.

11. **SUPPLEMENTARY NOTES:** Use for additional explanatory notes.

12. **SPONSORING MILITARY ACTIVITY:** Enter the name of the departmental project office or laboratory sponsoring (paying for) the research and development. Include address.

13. **ABSTRACT:** Enter an abstract giving a brief and factual summary of the document indicative of the report, even though it may also appear elsewhere in the body of the technical report. If additional space is required, a continuation sheet shall be attached.

It is highly desirable that the abstract of classified reports be unclassified. Each paragraph of the abstract shall end with an indication of the military security classification of the information in the paragraph, represented as (TS), (S), (C), or (U).

There is no limitation on the length of the abstract. However, the suggested length is from 150 to 225 words.

14. **KEY WORDS:** Key words are technically meaningful terms or short phrases that characterize a report and may be used as index entries for cataloging the report. Key words must be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location, may be used as key words but will be followed by an indication of technical context. The assignment of links, roles, and weights is optional.

Unclassified

Security Classification