

UNCLASSIFIED

AD NUMBER: AD0475026

LIMITATION CHANGES

TO:

Approved for public release; distribution is unlimited.

FROM:

Distribution authorized to U.S. Government agencies and their contractors; Export Controlled; 01 Sep 1965. Other requests shall be referred to Air Force Flight Dynamics Laboratory, Wright-Patterson AFB, OH.

AUTHORITY

AFFDL ltr dtd 24 Jan 1973

SECURITY

MARKING

The classified or limited status of this report applies to each page, unless otherwise marked.

Separate page printouts MUST be marked accordingly.

THIS DOCUMENT CONTAINS INFORMATION AFFECTING THE NATIONAL DEFENSE OF THE UNITED STATES WITHIN THE MEANING OF THE ESPIONAGE LAWS, TITLE 18, U.S.C., SECTIONS 793 AND 794. THE TRANSMISSION OR THE REVELATION OF ITS CONTENTS IN ANY MANNER TO AN UNAUTHORIZED PERSON IS PROHIBITED BY LAW.

NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

AFFDL-TR-65-111

475026

**STRESS ANALYSIS OF A FULLY INFLATED
RIBLESS GUIDE SURFACE PARACHUTE**

*HELMUT G. HEINRICH
LELAN R. JAMISON, JR.*

UNIVERSITY OF MINNESOTA

TECHNICAL REPORT AFFDL-TR-65-111

SEPTEMBER 1965



**AIR FORCE FLIGHT DYNAMICS LABORATORY
RESEARCH AND TECHNOLOGY DIVISION
AIR FORCE SYSTEMS COMMAND
WRIGHT-PATTERSON AIR FORCE BASE, OHIO**

NOTICES

When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Qualified users may obtain copies of this report from DDC. DDC release to CFSTI is not authorized. Foreign announcement and dissemination of this report is not authorized.

The distribution of this report is limited because it contains technology identifiable with items on the strategic embargo lists excluded from export or re-export under U.S. Export Control Act of 1949 (63 STAT 47), as amended (50 U.S.C. App. 2020-2031), as implemented by AFR 400-10.

Copies of this report should not be returned to the Research and Technology Division unless return is required by security considerations, contractual obligations, or notice on a specific document.

**STRESS ANALYSIS OF A FULLY INFLATED
RIBLESS GUIDE SURFACE PARACHUTE**

*HELMUT G. HEINRICH
LELAN H. JAMISON, JR.*

UNIVERSITY OF MINNESOTA

FOREWORD

This report was prepared by the Department of Aeronautics and Engineering Mechanics of the University of Minnesota in compliance with U. S. Air Force Contract No. AF 33(657)-11184, "Theoretical Deployable Aerodynamic Decelerator Investigations," Task 606503, "Parachute Aerodynamics and Structures," Project 6065, "Performance and Design of Deployable Aerodynamic Decelerators."

The work accomplished under this contract was sponsored jointly by U. S. Army Natick Laboratory, Department of the Army; Bureau of Aeronautics and Bureau of Ordnance, Department of the Navy; and Air Force Systems Command, Department of the Air Force and was directed by a Tri-Service Steering Committee concerned with Aerodynamic Retardation. The work was administered under the direction of the Recovery and Crew Station Branch, Air Force Flight Dynamics Laboratory, Research and Technology Division. Mr. Rudi J. Berndt and Mr. James H. DeWeese were the project engineers.

The authors express their gratitude to students of Aerospace Engineering of the University of Minnesota, who participated in the accomplishment of this study, in particular to Messrs. D. J. Monson, R. E. Rose, and V. J. Matthys.

The manuscript was released by the authors in August 1965 for publication as an RFD technical report.

This technical report was reviewed and is approved.

GEORGE A. SOLT, JR.
Chief, Recovery and Crew Station Branch
AF Flight Dynamics Laboratory

ABSTRACT

A stress analysis of a fully inflated ribless guide surface parachute is presented. The method is an extension of an earlier publication, which is applicable to the transient state of inflation. However, in view of the normal use of ribless guide surface parachutes, the transient phase is considered to be less important since for the so-called infinite mass cases, the maximum force is considered to occur when full inflation is reached.

In general, this analysis can be applied to most canopies having non-triangular gore patterns. A numerical calculation is made for a 12-gore ribless guide surface parachute over a range of pressure loadings, canopy sizes, and cloth types representing practical application.

TABLE OF CONTENTS

	PAGE
I. Introduction	1
II. The Canopy Geometry	1
III. The Stress Equation	8
IV. Numerical Example	10
V. References	21
VI. Bibliography	22

ILLUSTRATIONS

FIGURE		PAGE
1.	Top View of Inflated Ribless Guide Surface Canopy	2
2.	Profile View of an Inflated Ribless Guide Surface Canopy	3
3.	Orientation of a Gore Element	4
4.	Typical Gore Element for the Case $\alpha < 90^\circ$ Showing the Applied Forces	6
5.	Typical Gore Element for the Case $\alpha = 90^\circ$ Showing the Applied Forces	7
6.	Roof Panel Pattern for Ribless Guide Surface Parachute (Ref 3)	11
7.	Guide Surface Panel Pattern for Ribless Guide Surface Parachute (Ref 3)	12
8.	The Ribless Guide Surface Parachute in the Wind Tunnel ($D_c = 13''$; $N = 12$)	13
9.	Profile Shape of the Ribless Guide Surface Parachute	14
10.	End View of Inflated Guide Surface Panel for Ribless Guide Surface Parachute	15
11.	Pressure Coefficient versus Canopy Location for a Ribless Guide Surface Parachute (Ref 4)	17
12.	Strain versus Canopy Location for the Roof Panel ($N = 12$)	18
13.	Strain versus Canopy Location for the Guide Surface Panel ($N = 12$)	19

SYMBOLS

a	a length (see Fig 10)
b	a length (see Fig 10)
b ₀	a length (see Fig 2)
C _p	pressure coefficient
d ₀	a length (see Figs 4 and 5)
D	diameter
D _c	constructed diameter
D _v	vent diameter
E	cloth modulus of elasticity (lb/ft)
f ₁	circumferential stress (lb/ft; see Fig 3)
f ₂	meridional stress (lb/ft; see Fig 3)
N	number of gores
Plane Q	(illustrated in Fig 2)
ΔP	pressure differential across cloth (see Figs 4 and 5)
q	dynamic pressure $\cong \frac{1}{2}\rho V^2$
r _b	bulge radius (see Figs 4 and 5)
s	a length (see Fig 2)
x	a length (see Fig 9)
y	a length (see Fig 1)
y'	a length (see Fig 6)
z	a length (see Fig 9)
α	gore half angle (see Figs 4 and 5)
ε	strain
φ	an angle (see Fig 2)
⊕	suspension line angle (see Fig 2)

SYMBOLS (CONT.)

Superscripts

* quantities made dimensionless by D_c

Subscripts

c referred to cord line

g referred to gore centerline

o initial or unstretched condition

∞ free stream conditions

I. INTRODUCTION

A method for calculating the cloth stresses in a ribless guide surface parachute during steady state is presented. In general, the approach is similar to the one of Refs 1 and 2, which analyzes the stresses in a parachute constructed of triangular gores. In the following the method is extended to encompass the stresses in canopies with irregular gore patterns such as ribless guide surface parachutes.

The presented method is based upon the known gore centerline or the cord-line profile and the gore pattern of the canopy. With this information established, the span between the suspension lines and the bulge radius of the gore can be calculated. If the bulge radius is known, the stresses in the cloth merely depend upon the differential pressure.

For the steady state, or fully inflated condition, the characteristic profiles and the pressure distribution are well known, and therefore, it appears that the stress distribution for a ribless guide surface parachute can be determined quite accurately.

Furthermore, the period of inflation for guide surface parachutes under infinite mass conditions is usually very short, and the magnitude of pressure during inflation remains about the same. In addition, the bulge radii of the gores are probably largest when fully inflated. Therefore, in view of these two reasons, the stresses in the canopy cloth are probably highest when full inflation is first achieved, and the following analysis is carried out for this case.

II. THE CANOPY GEOMETRY

The orientation of the individual gore and the related geometric terms are shown in Figs 1 through 3. With the following simplifying assumptions, one can then establish the geometry and thus the stresses occurring in an elementary gore section.

1. The pressure distribution over the canopy varies in the meridional direction but is constant circumferentially.

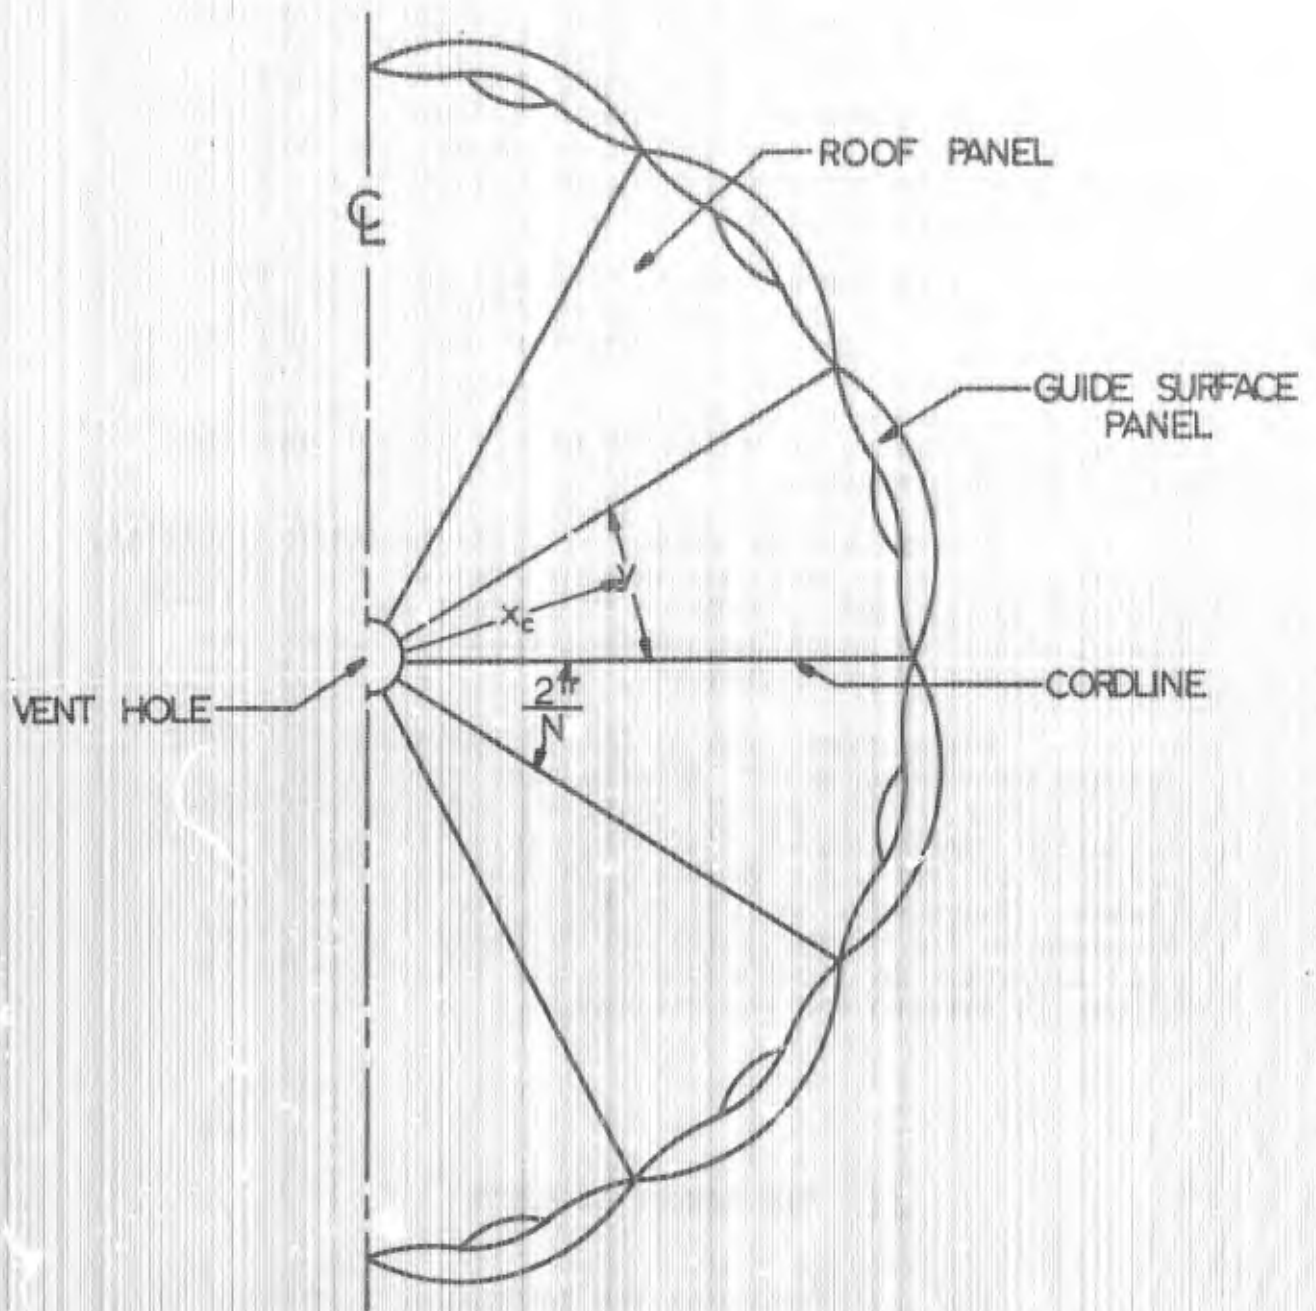


Fig 1 Top View of Inflated Ribless Guide Surface Canopy

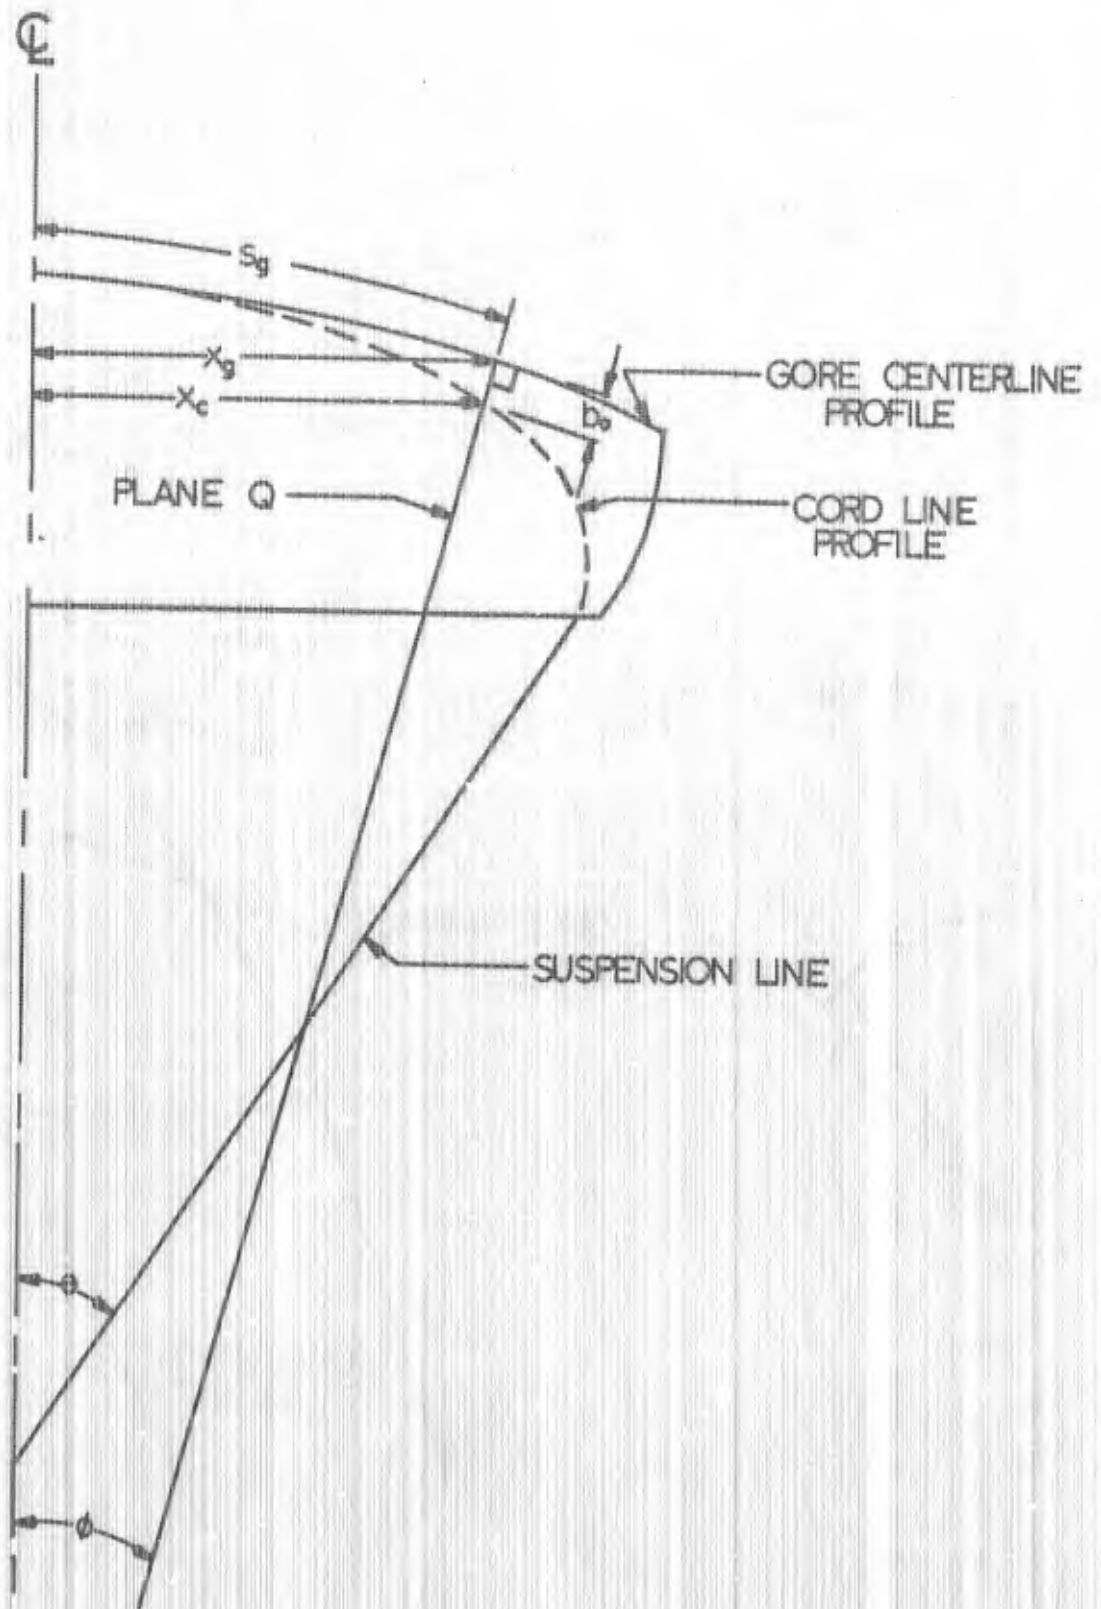


Fig 2 Profile View of an Inflated Ribless Guide Surface Canopy

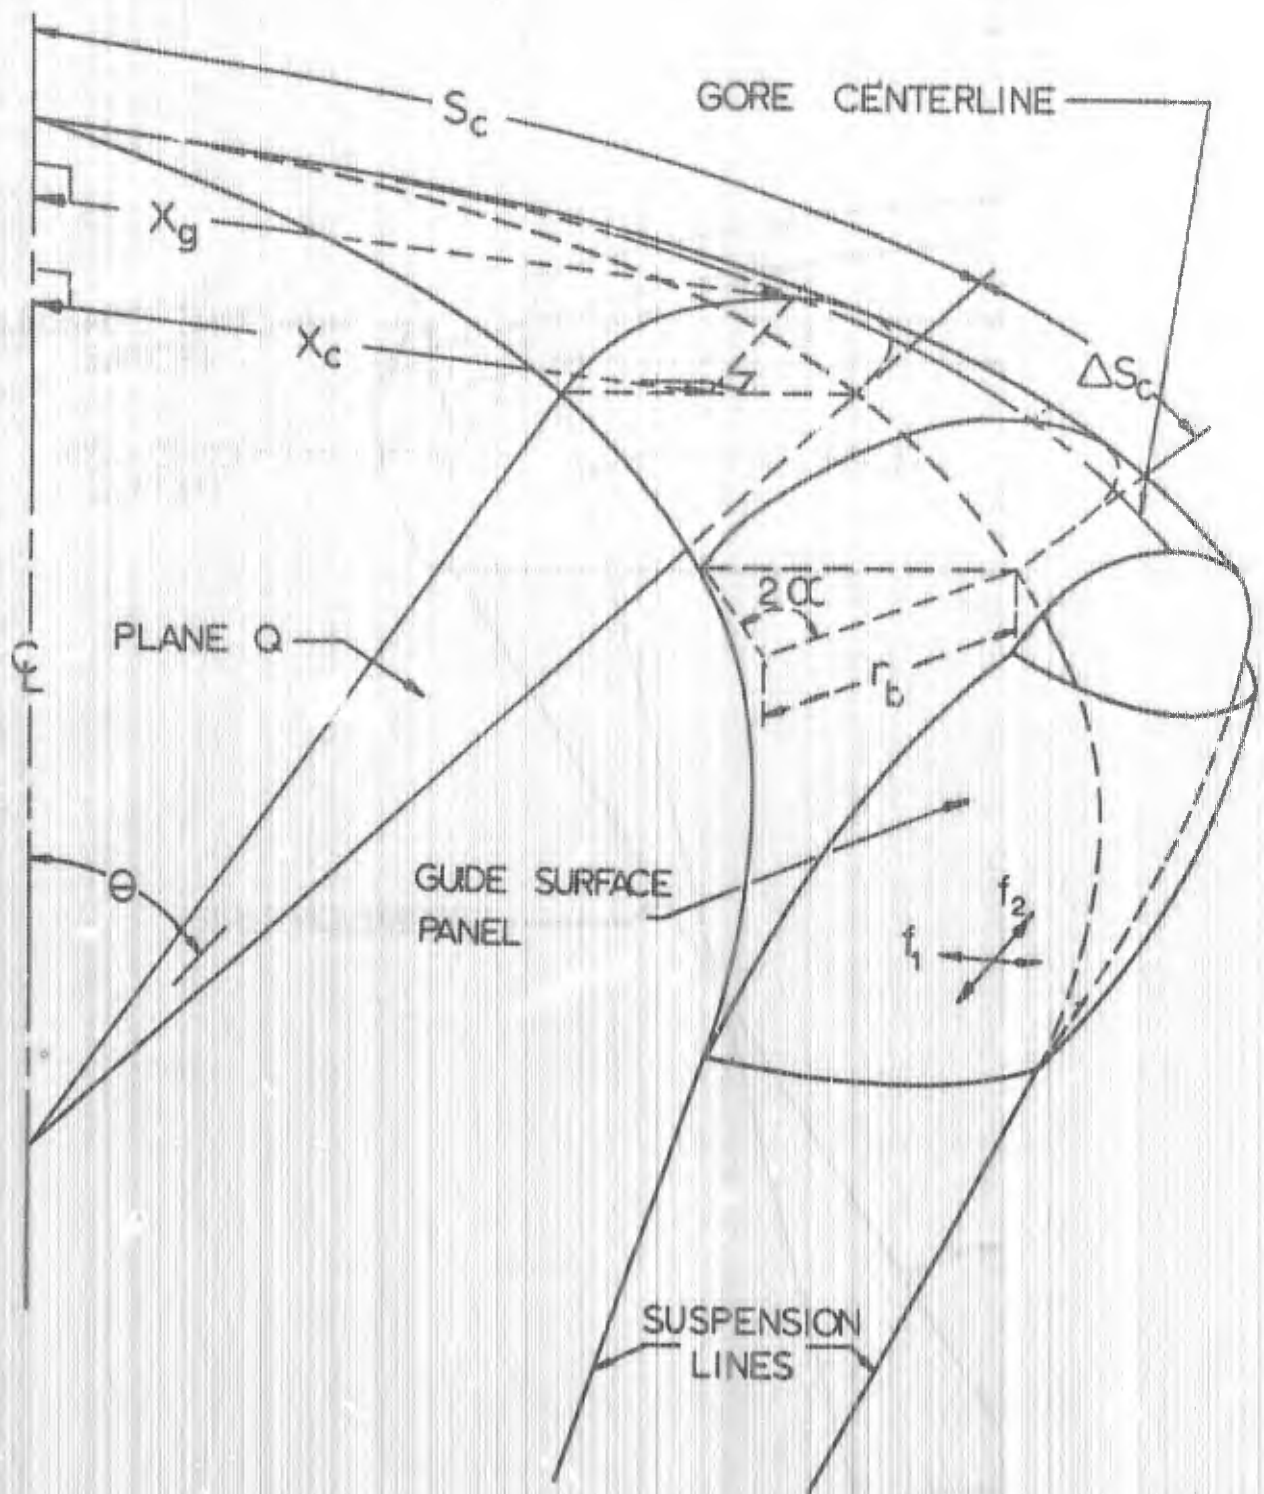


Fig. 3 Orientation of a Gore Element

2. The stresses, f_2 (Fig 3), occurring in the meridional direction are considered small compared with the resultant stress in the circumferential direction, f_1 .
3. The cross-sectional shape in a plane Q (Fig 2) of any gore element is a circular arc because of uniform pressure distribution over the element. This arc cannot exceed a semicircle. In case of excess cloth the cross section of the gore element becomes merely a semicircle with parallel extensions to the cord.
4. Determining the canopy geometry, the cloth and cords are first considered to be inextensible. However, once the basic geometry is established, this assumption is dropped and the elasticity of the cloth is introduced into the equations.

In view of these basic assumptions, Figs 4 and 5 show the geometry and the force loading of a typical gore element for the case of $\alpha < 90^\circ$ and $\alpha = 90^\circ$ respectively.

In the following treatment, it is assumed that the gore centerline profile is known, either from photographs or other methods. This profile, combined with the gore pattern, determines the cord-line profile. This is just one approach, for one could certainly use the same method if the cord profile were given.

It is convenient to calculate first the length b_o^* as shown in Fig 2 in terms of known quantities. Then the cord-line profile can be determined by measuring b_o^* inward from the gore centerline. Combining simple geometric relationships illustrated in Figs 1 through 3, as done in Refs 1 and 2, an expression for b_o^* for the two cases represented in Figs 4 and 5 can be derived,

$$b_o^* = \frac{\sqrt{6}}{4} \left[\frac{d_o^{*2}}{4} + \frac{1}{2} \tan \frac{\pi}{N} d_o^* x_c^* - \tan^2 \frac{\pi}{N} x_c^{*2} - 2 \tan^3 \frac{\pi}{N} \frac{x_c^{*3}}{d_o^*} \right]^{\frac{1}{2}} \quad (1)$$

and

$$b_o^* = \frac{d_o^*}{2} + \left(1 - \frac{\pi}{2}\right) \tan \frac{\pi}{N} x_c^* \quad (2)$$

Equations 1 and 2 are then to be used for the case $\alpha < 90^\circ$ and $\alpha = 90^\circ$, respectively.

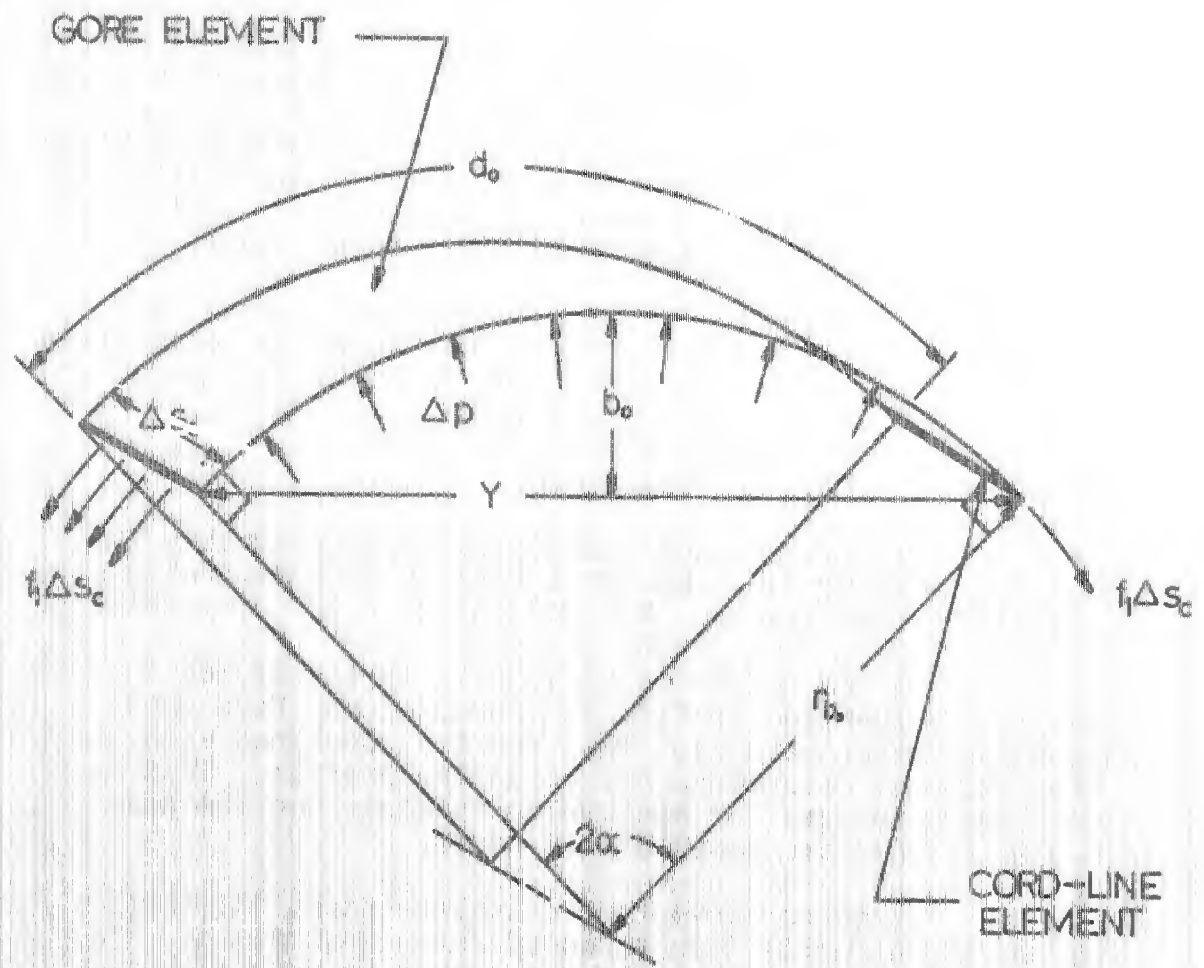


Fig 4 Typical Gore Element For the Case $\alpha < 90^\circ$ Showing the Applied Forces

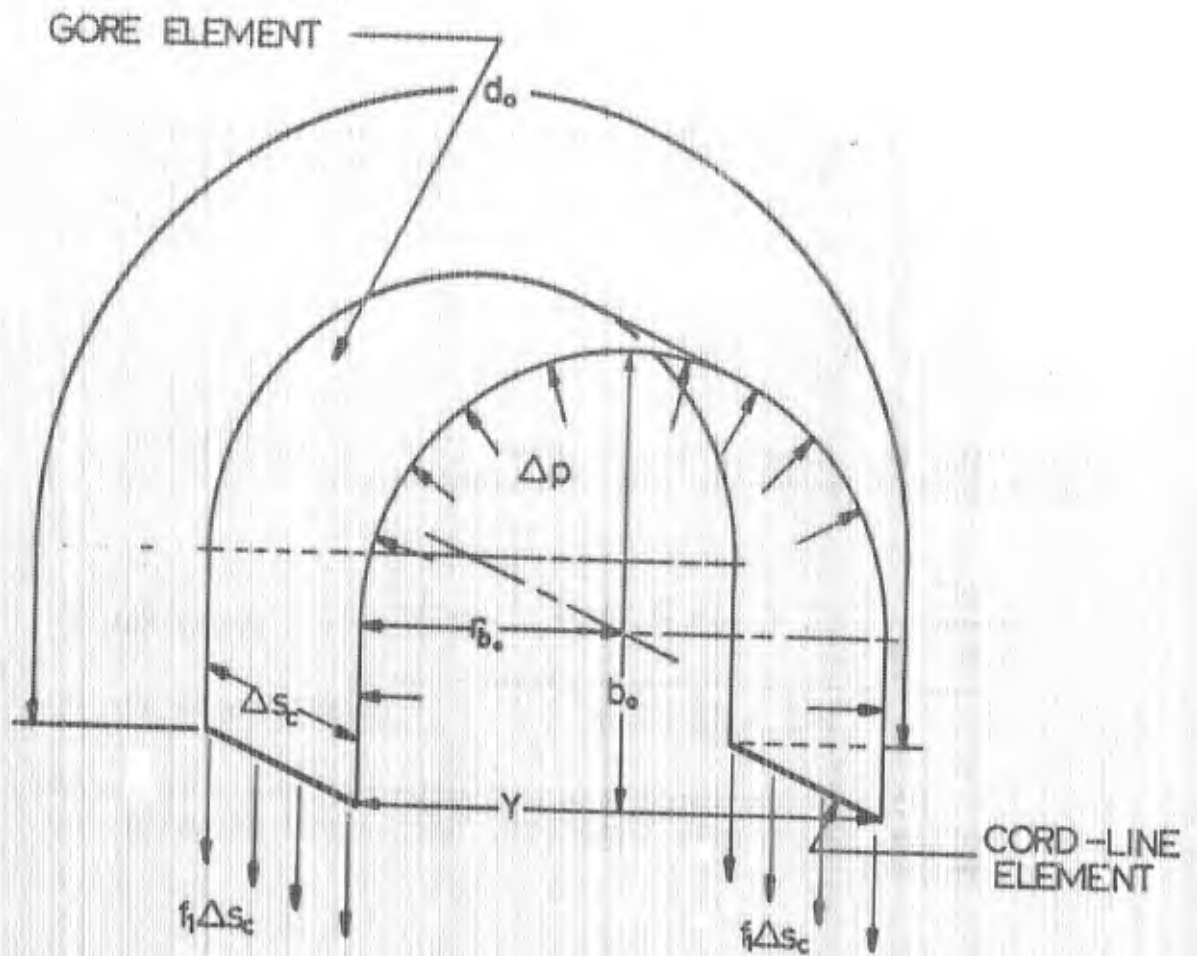


Fig 5 Typical Gore Element For the Case $\alpha=90^\circ$ Showing the Applied Forces

These two equations contain the unknown term x_c^* which in view of Fig 2 can be expressed as

$$x_c^* = x_g^* - h_0^* \sin \phi \quad (3)$$

In many cases where the gore planform angle $\frac{2\pi}{N}$ is small enough x_c^* can be replaced by x_g^* . However, if better accuracy is necessary an iteration process using Eqns 1, 2, and 3 can be applied until the appropriate equations have been satisfied.

Before the cord-line profile can be determined, one must determine if Eqn 1 or 2 should be used for b_0^* . For this purpose the following criteria shall be established. From Fig 5 it can be seen that the arc forms a complete semicircle if

$$d_0^* \geq \frac{\pi}{2} y^* \quad (4)$$

Expressing the inequality in terms of known quantities, the following criterion can be established:

$$\frac{2d_0^*}{\pi \tan \frac{\pi}{N}} \left[\frac{1 + \tan \frac{\pi}{N} \sin \phi (1 - \frac{\pi}{2})}{2x_g^* - d_0^* \sin \phi} \right] \begin{cases} < 1 \text{ apply Eqn 1} \\ \geq 1 \text{ apply Eqn 2} \end{cases} \quad (5)$$

With these equations and with a given gore center-line profile, and a gore planform, the canopy geometry can be determined.

III. THE STRESS EQUATION

The basic stress equation can be written (Refs 1 and 2) as:

$$f_1 = \Delta P r_b \quad (6)$$

If perfect elasticity is assumed and if the stress is constant over any gore element, then with the geometry from Chapter II, and the algebraic method shown in Ref 1, the equation for cloth stresses for $\alpha < 90^\circ$ is:

$$f_1^3 + \left[\frac{24E^3(d_o^* - y^*) - 3E\Delta P^2 d_o^{*3} D_c^2}{24E^2 d_o^* - \Delta P^2 d_o^{*3} D_c^2} \right] f_1^2 - \left[\frac{3E^2 \Delta P^2 d_o^{*3} D_c^2}{24E^2 d_o^* - \Delta P^2 d_o^{*3} D_c^2} \right] f_1 - \left[\frac{E^3 \Delta P^2 d_o^{*3} D_c^2}{24E^2 d_o^* - \Delta P^2 d_o^{*3} D_c^2} \right] = 0 \quad (7)$$

For the case where the gore forms an arc of a semicircle with parallel extensions as illustrated in Fig 5, the geometry and the stresses can be presented in simpler expressions and the stress equation merely becomes

$$f_1 = \frac{1}{2} \Delta P y^* D_c \quad (8)$$

In the stress equations, Eqns 7 and 8, the pressure differential term ΔP must be established. Generally the pressure distribution is determined experimentally and is given in the form of the pressure coefficient, C_p , which is defined as

$$C_p = \frac{P_{local} - P_\infty}{q_\infty} \quad (9)$$

Introducing Eqn 9 into Eqns 7 and 8 provides after algebraic manipulation:

$$\epsilon^3 + \left[\frac{24(1 - \frac{y^*}{d_o^*}) - 3C_p^2 (\frac{qD_c}{E})^2 d_o^{*2}}{24 - C_p^2 (\frac{qD_c}{E})^2 d_o^{*2}} \right] \epsilon^2 - \left[\frac{3C_p^2 (\frac{qD_c}{E})^2 d_o^*}{24 - C_p^2 (\frac{qD_c}{E})^2 d_o^{*2}} \right] \epsilon - \left[\frac{C_p^2 (\frac{qD_c}{E})^2 d_o^{*2}}{24 - C_p^2 (\frac{qD_c}{E})^2 d_o^{*2}} \right] = 0 \quad (10)$$

$$\epsilon = \frac{1}{2} C_p \left(\frac{qD_c}{E} \right) y^* \quad (11)$$

In these equations the strain, ϵ , has been introduced through

the equation

$$f_1 = \epsilon E . \quad (12)$$

With the established geometry and with the average elasticity of the cloth obtained from static stress-strain measurements, Eqns 10 and 11, together with the criterion established in Eqn 5, can be used to calculate the cloth stresses. A more detailed presentation of the steps that should be followed in this calculation is given in Refs 1 and 2.

IV. NUMERICAL EXAMPLE

In order to exemplify how the method in the preceding sections is applied, the stress distribution in a 12-gore ribless guide surface parachute is calculated. The specifications of this particular parachute are given below:

Number of gores, $N = 12$

Constructed diameter, $D_c = 1.08$ ft


Canopy material = 1.1 oz nylon, MIL-C-7020B

Vent diameter, $D_v/D_c = 0.10$.

The gore patterns and the associated dimensions for the roof panel and the guide surface panel are shown in Figs 6 and 7 (Ref 3). From wind tunnel experiments the inflated profile of the canopy was determined as shown in Fig 8. From Fig 8 the dimensionless gore centerline profile for the roof panel and the guide surface panel was found and is shown in Figs 9 and 10.

Using the equations developed in Chapter 2, the cord-line profile for the roof panel was determined and is shown in Fig 9.


The cord profile for the guide surface panel cannot be determined in the conventional manner. The span of the gore element for the guide surface panel can not be represented as the distance between adjacent cordlines. Rather, the span now becomes the distance between the seam joining the roof and guide surface panels. Thus, an end view of the guide surface panel is necessary to calculate the span. This view and the calculated cord line for the guide surface panel are shown in Figs 9 and 10.

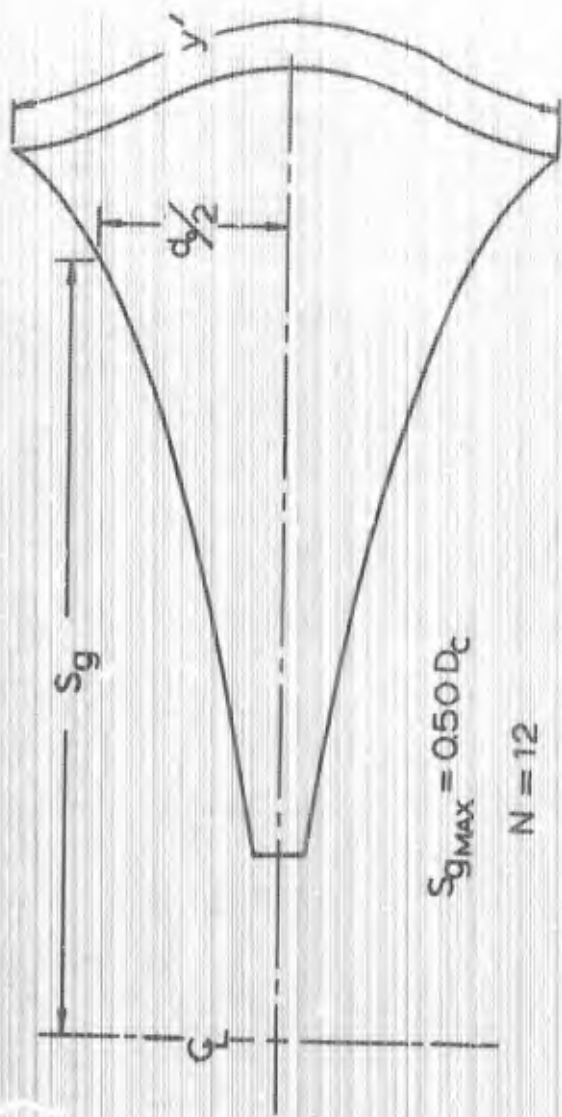

11

$S_g/S_{g_{MAX}}$	0.10	0.15	0.20	0.30	0.40	0.50	0.60	0.70	0.80	0.875	0.90	0.95	0.975	1.0
$d_c/S_{g_{MAX}}$	0.788	0.788	0.814	0.820	0.832	0.856	0.882	0.990	1.352	1.054	0.522	0.325	0.0	0.0

Fig. 6 Roof Panel Pattern for Ribless Guide Surface Parachute (Ref 3)

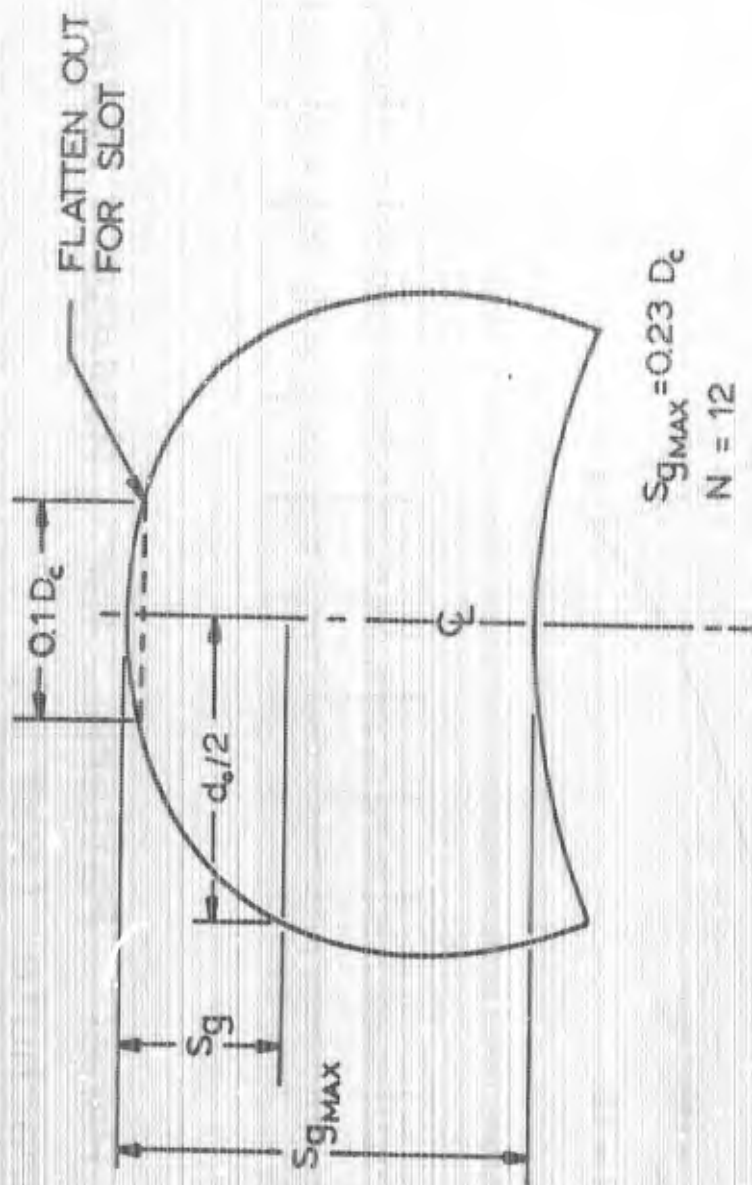

$S_g/S_{g_{MAX}}$	0.05	0.10	0.15	0.20	0.30	0.40	0.50	0.60	0.70	0.80	0.90	0.93	0.95	1.00
$d_0/S_{g_{MAX}}$	8.66	6.42	5.16	4.26	3.16	2.50	2.06	1.72	1.444	1.22	1.030	0.982	0.944	.860

Fig 7 Guide Surface Panel Pattern for Ribless Guide Surface Parachute (Ref 3)

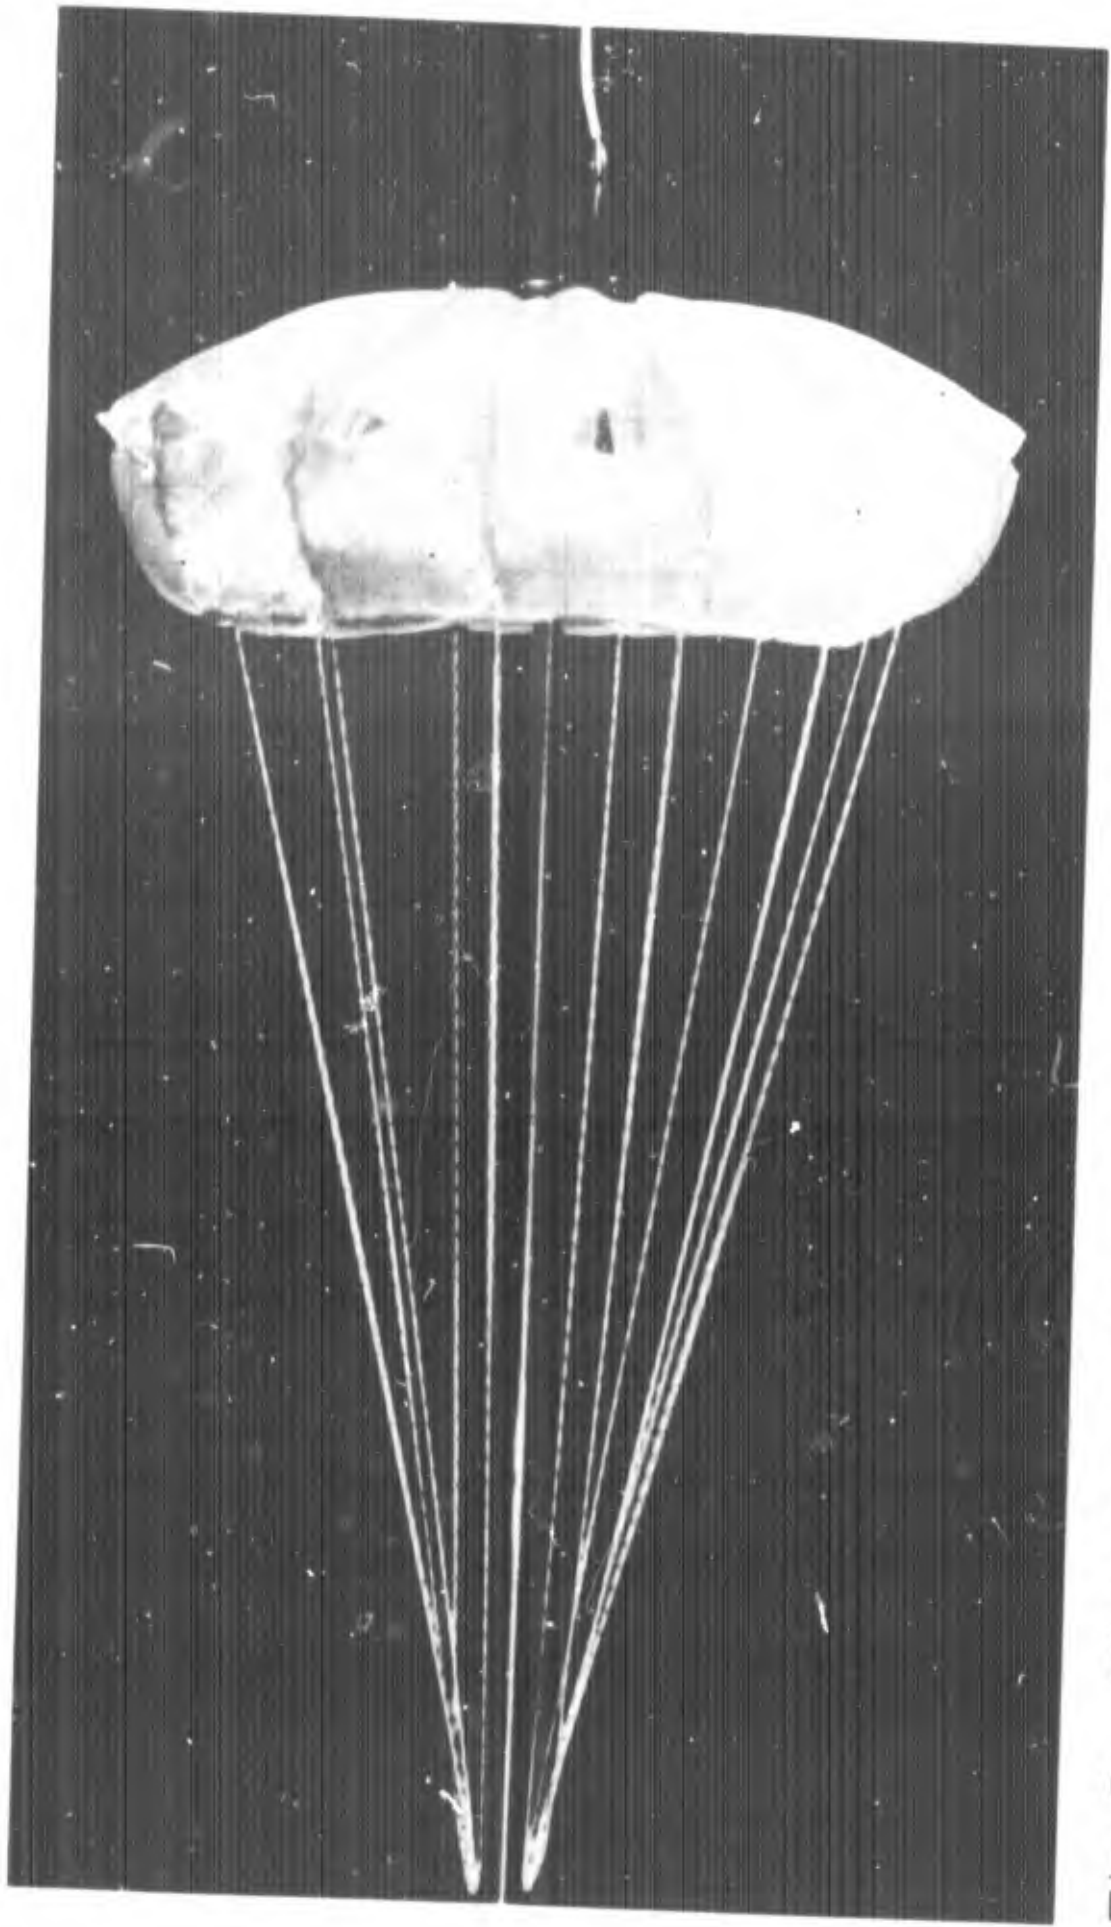


Fig. 8. Ribless Guide Surface Parachute in Wind Tunnel ($D_C = 13$ in., $N = 12$)

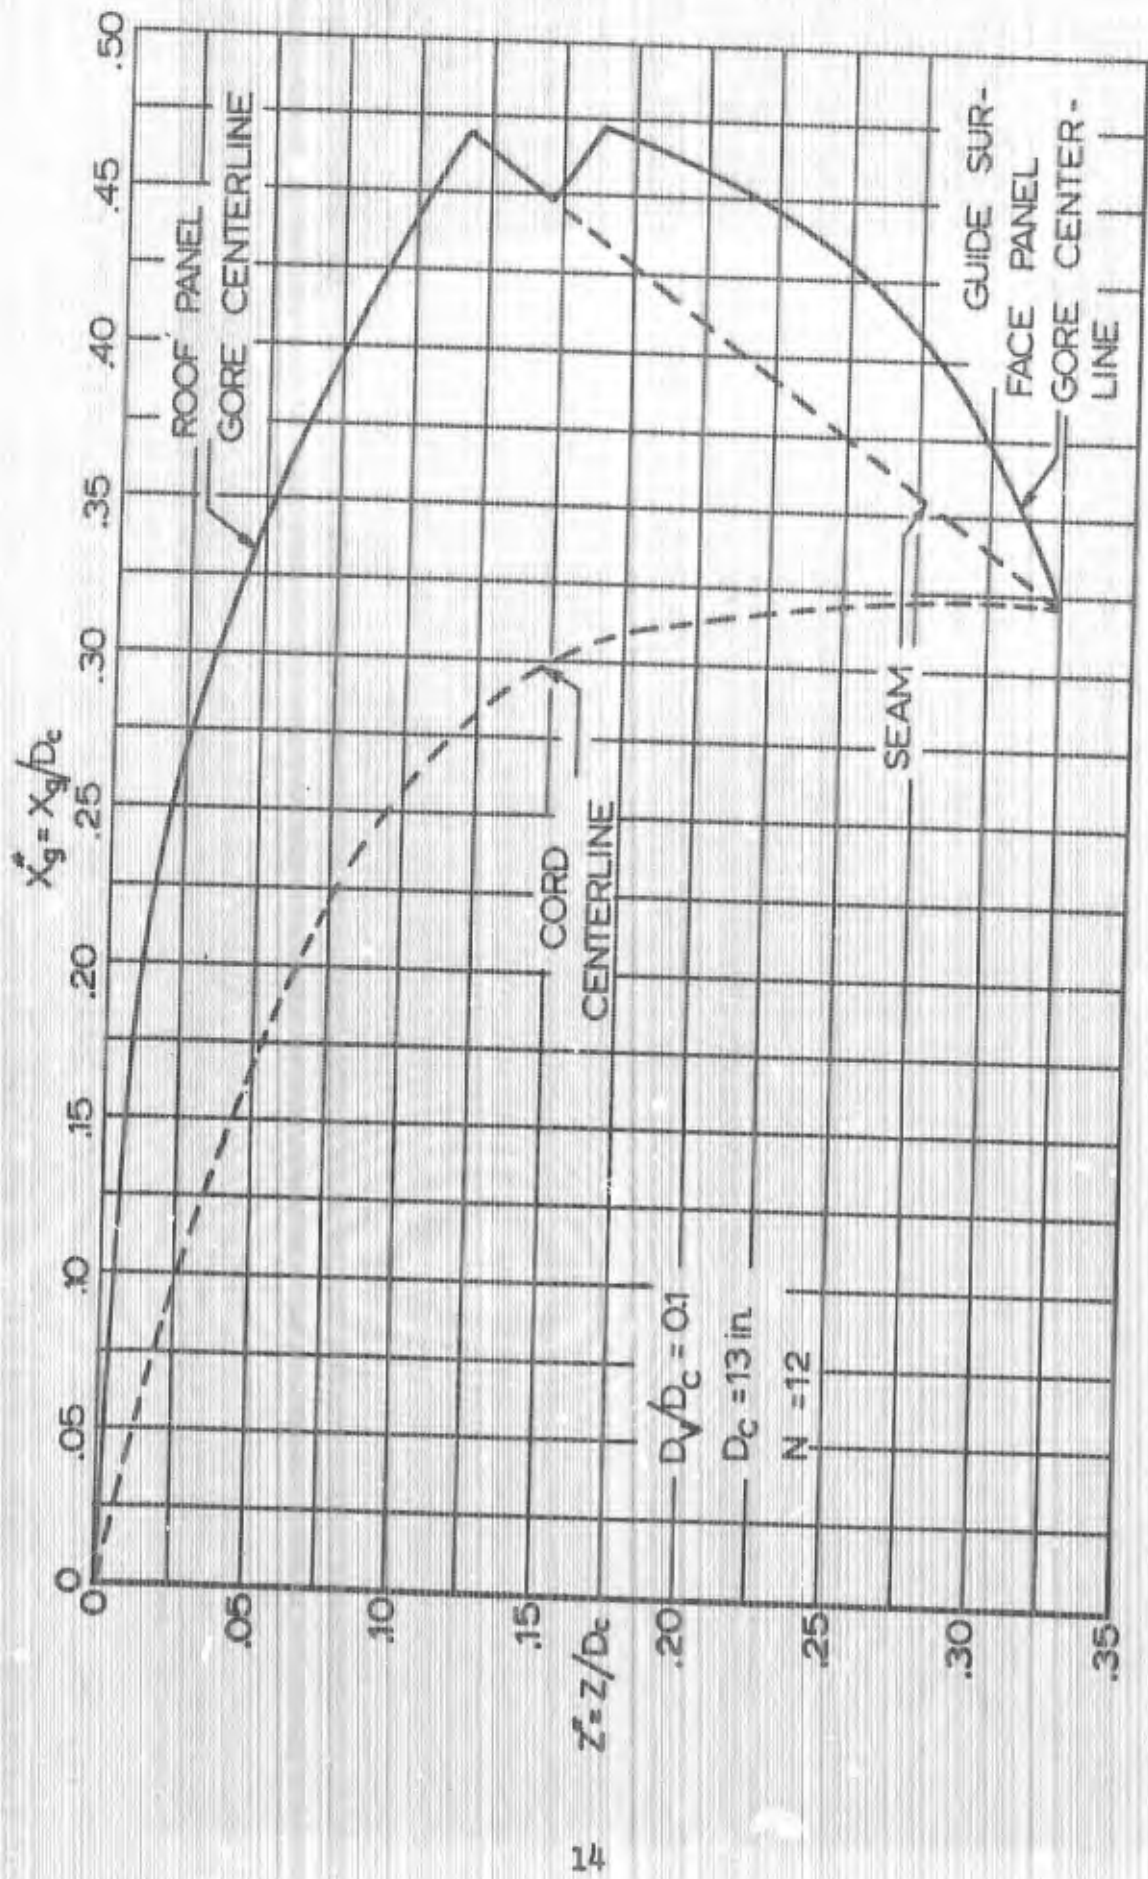


Fig 9 Profile Shape of the Ribless Guide Surface Parachute

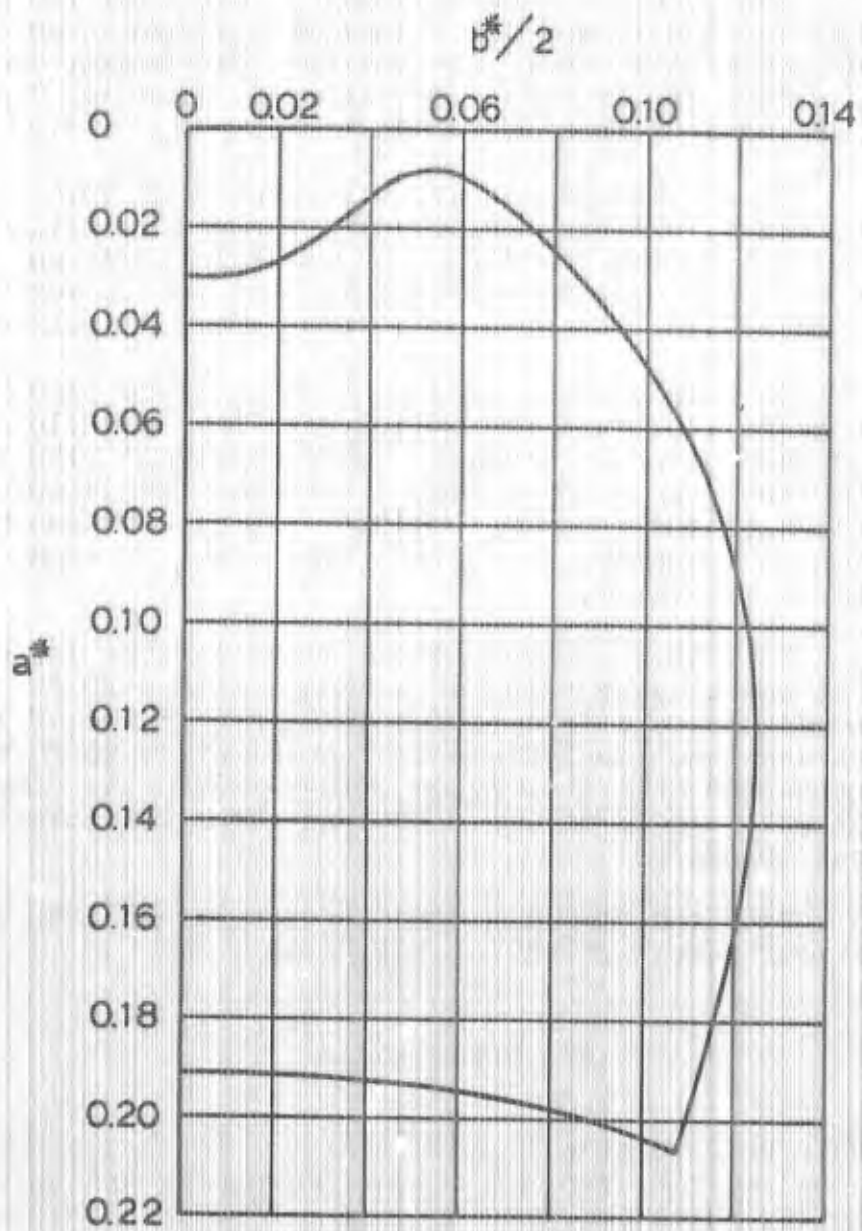


Fig 10 End View of Inflated Guide Surface Panel for Ribless Guide Surface Parachute

The pressure coefficient, C_p , over the canopy was measured, Ref 4, and the values were plotted versus the gore centerline length for the two gore panels in Fig 11. These values have been extracted from Ref 4 and were measured at a free stream Mach number $M_\infty = 0.61$.

In an attempt to make the results of this calculation applicable for various size parachutes built of different cloths and for different pressure loadings, values for the parameter qD_c/E ranging from 0.01 to 5.0 were selected. These values represent a wide range of application.

In applying the results of the stress calculation in this manner, it must be assumed that the dimensionless inflated shape and the pressure coefficient distribution over the canopy remains the same regardless of canopy material, size and pressure loading. In view of known experimental evidence, as a first approximation these assumptions are valid.

To better understand the dimensionless parameter qD_c/E , it can be seen that for a canopy with a 20 ft constructed diameter, a free stream dynamic pressure of 10 psf, which at sea level conditions is approximately 90 ft/sec and constructed of 1.1 oz nylon, MIL-C-7020B, the dimensionless parameter qD_c/E is 0.1. This is about the lowest practical boundary.

With the cord-line profile determined, the span for the roof panel was calculated from

$$y^* = 2x_c^* \tan \frac{\pi}{N} . \quad (13)$$

Since this relationship is not valid for the guide surface panel, the related span was determined photographically from Fig 10. With the geometry and pressure distribution established, Eqns 10 or 11, whichever is applicable, were applied to calculate the strain. The results of this calculation are shown in Figs 12 and 13 for the roof and guide surface panels, respectively.

With the assumption of perfect elasticity the stress is merely a multiple of the strain. Thus, the representation of the strain is characteristic of the stress as well.

With the strain calculated, it is now possible to review the strain magnitude and distribution for the two panels. In this manner several interesting observations are apparent. First, for both the roof and guide surface panels the strain increases as one approaches the skirt region. Second, the magnitude of the strain at the end

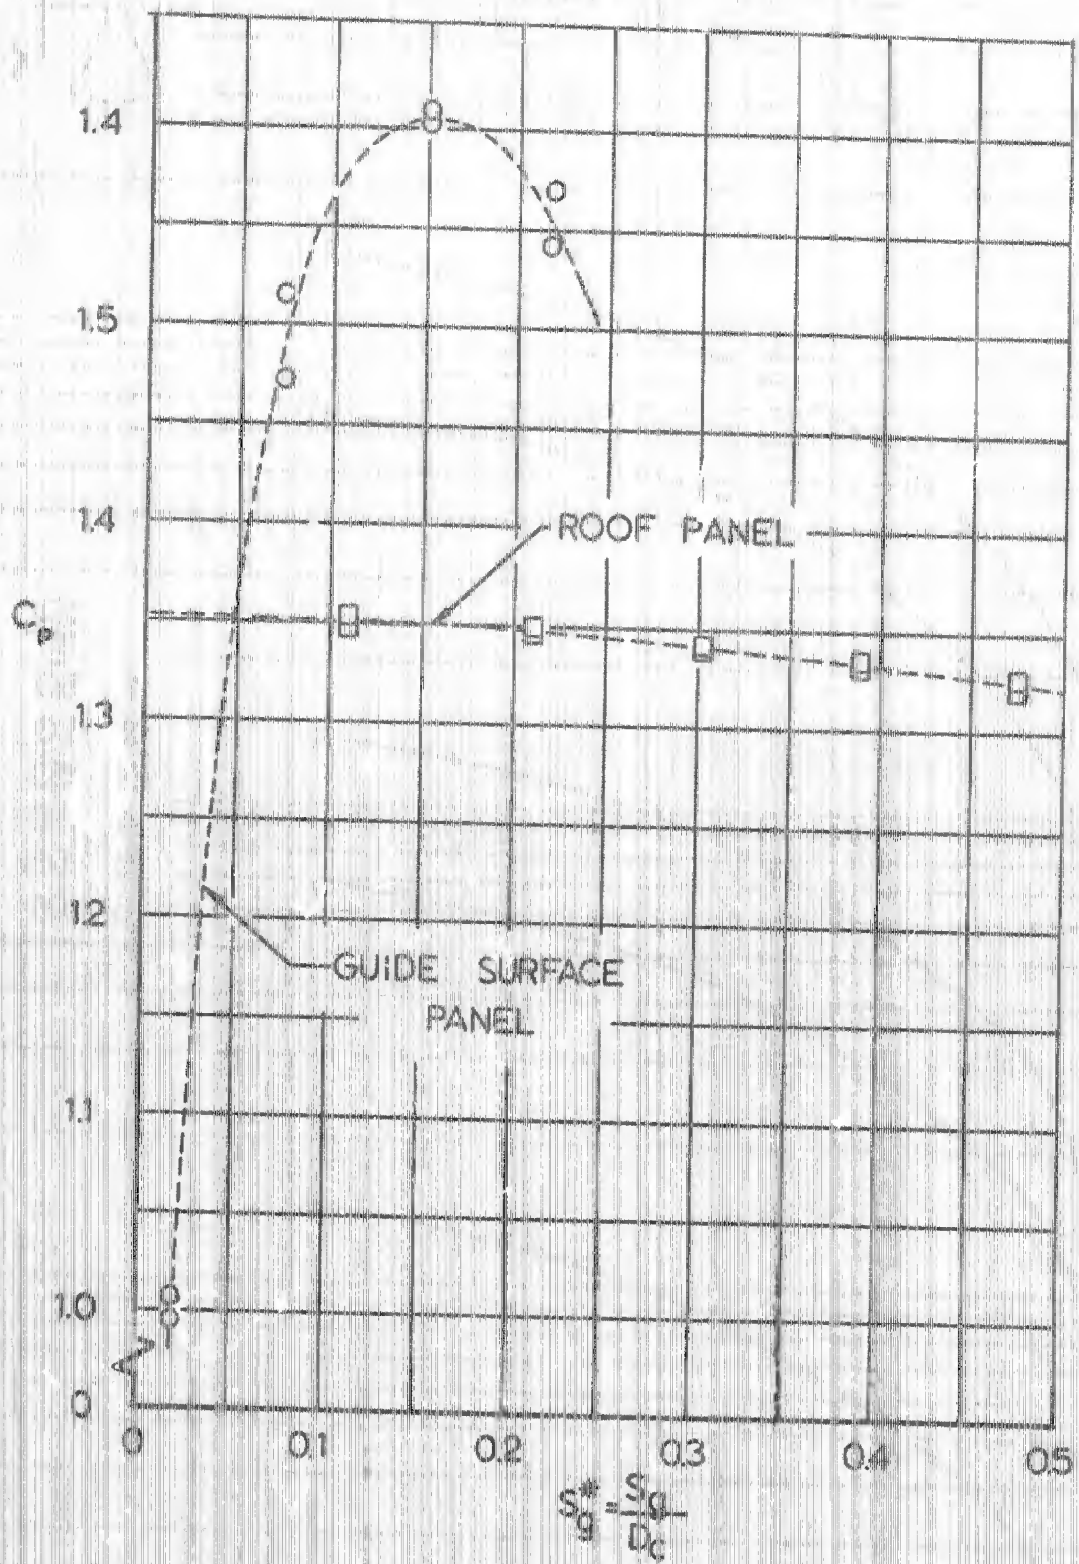


Fig 11 Pressure Coefficient vs. Canopy Location for a Ribless Guide Surface Parachute (Ref 4)

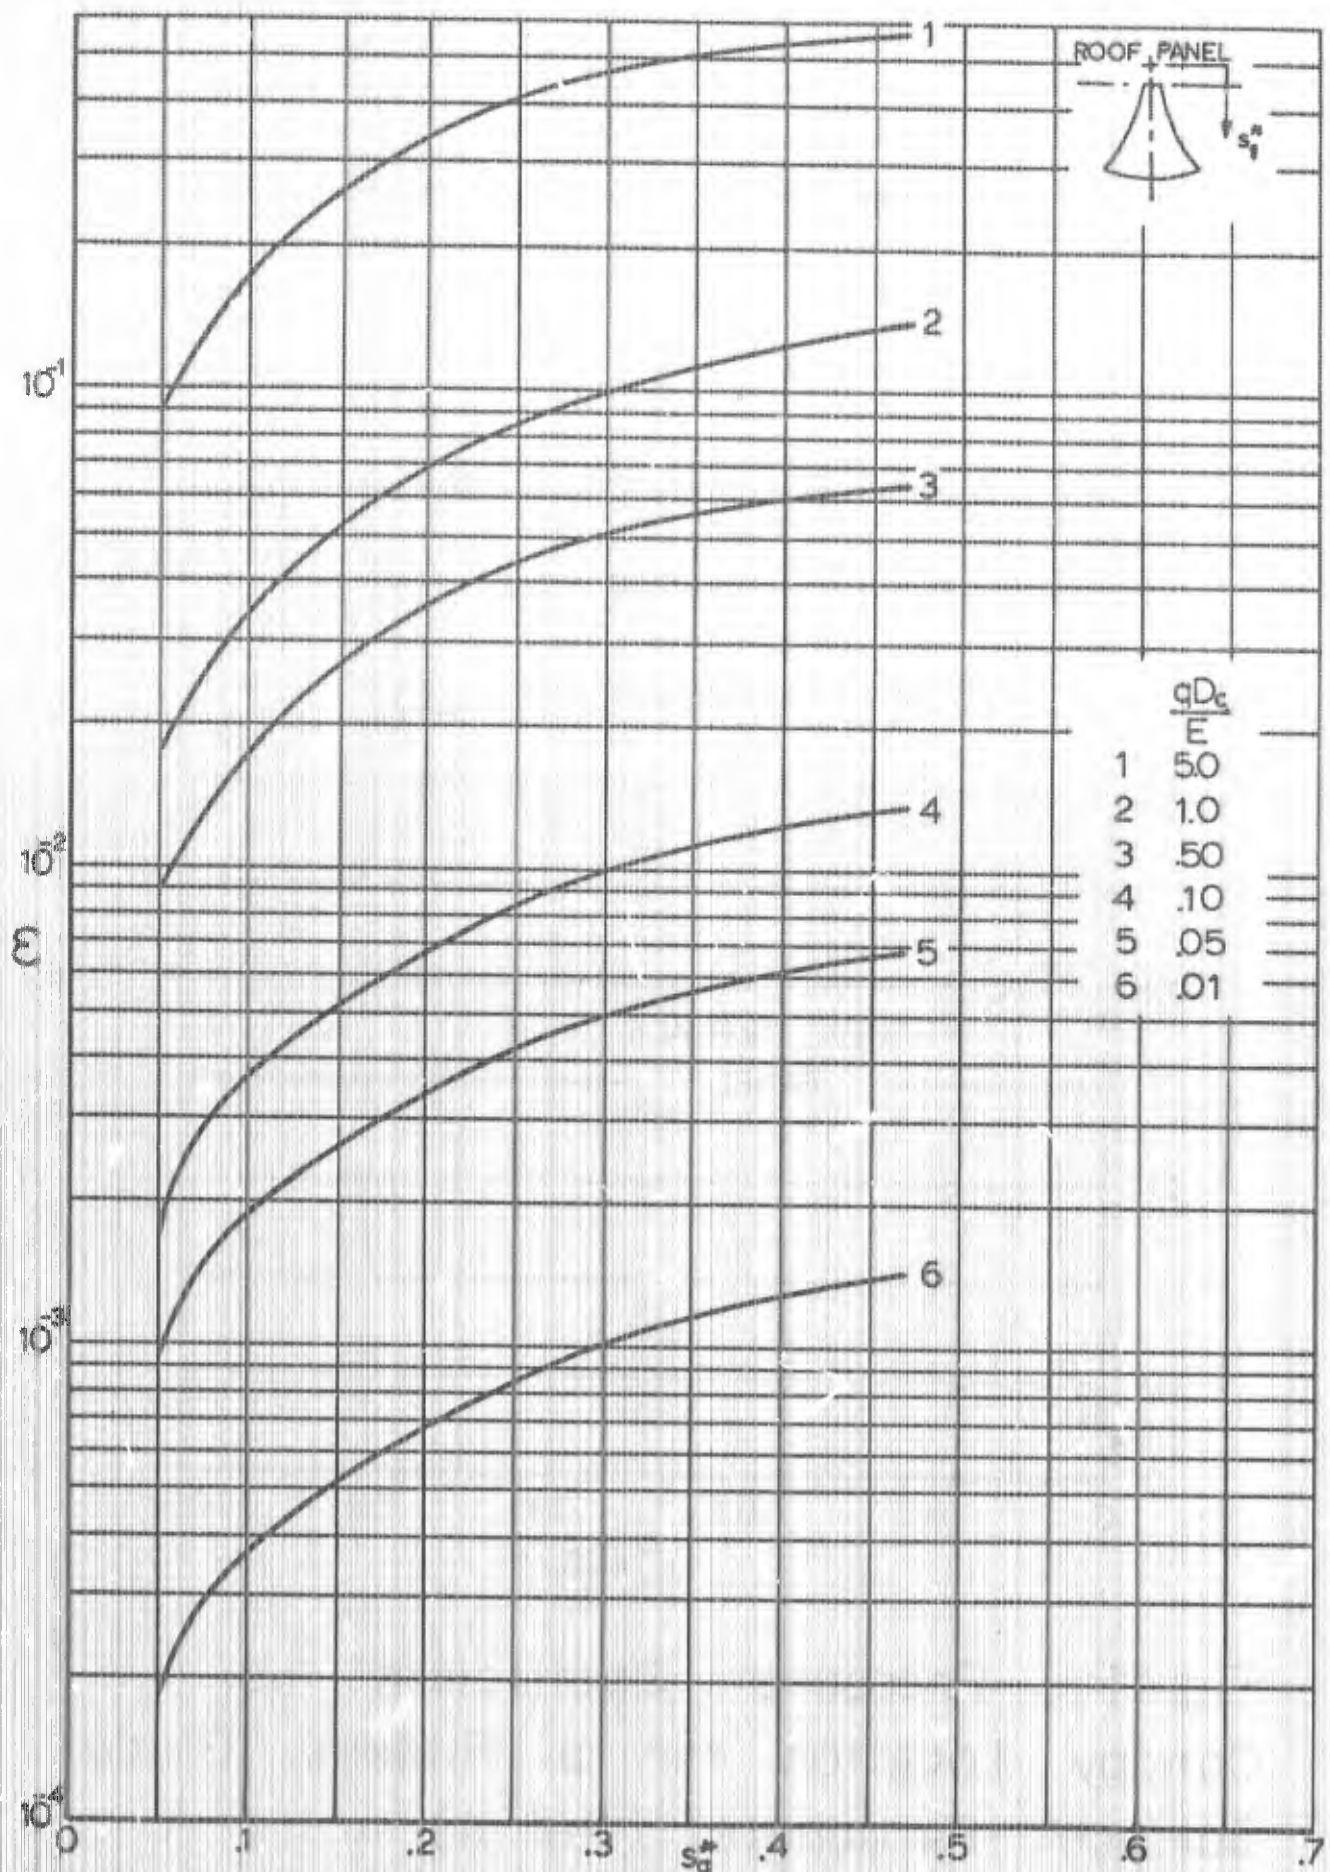


Fig 12 Strain Versus Canopy Location for the Roof Panel (N=12)

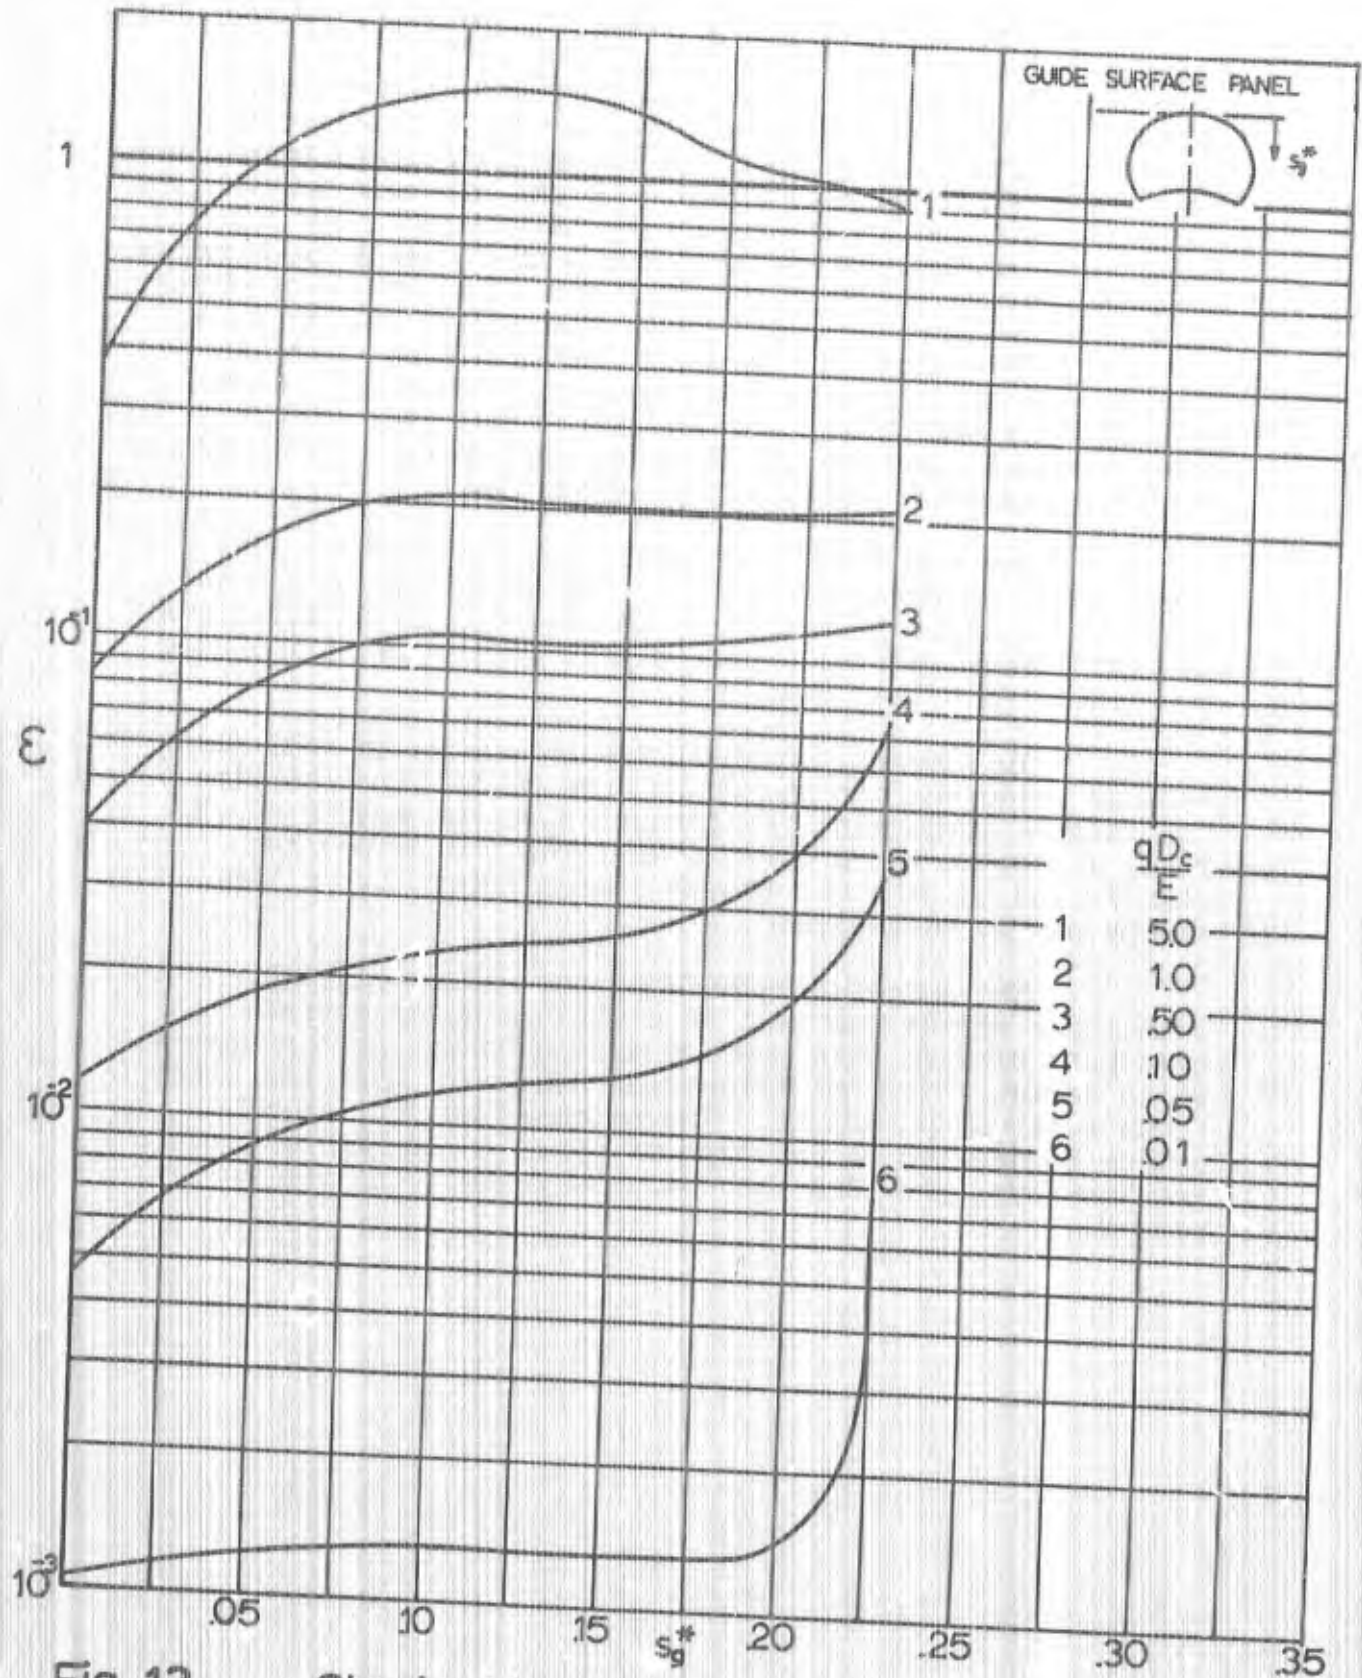


Fig 13 Strain Versus Canopy Location for the Guide Surface Panel (N=12)

and the beginning of the roof and guide surface panels, respectively, is approximately the same. This indicates a continuous strain distribution over the entire canopy. Third, for any given value of the dimensionless parameter qD_0/E , the strain is highest in the guide surface panel. Thus, as a first approximation only the stresses in the guide surface panel may need to be calculated. For if the strain in this region of the canopy is below failure, then the strain level in the roof panel is certainly within safety limitations. In addition, the strain in the guide surface panel should be correspondingly higher, for the roof gore pattern has been designed to produce at least a semicircle and in many regions it forms a semicircle with parallel extensions. This design concept was verified in the independent calculations shown above.

The guide surface panel does not achieve this condition of minimum stress, for its shape has been determined by aerodynamic reasons. In view of the calculations, the guide surface panels have at all locations an included gore angle much less than 90° .

In summary, to apply these results to a 12-gore ribless guide surface parachute, one need only determine the failure strain and the dimensionless parameter qD_0/E . Then, selecting the proper values from the respective Figs 12 and 13, the structural design integrity of the canopy can be established.

The proposed method has been illustrated by means of a stress analysis of a ribless guide surface parachute because this type of parachute has gore patterns which deviate from the triangular form more than any other known subsonic parachute. The proposed method can of course be applied to any type of gore, including the triangular form, provided the characteristic terms are inserted.

V. REFERENCES

1. H. G. Heinrich and L. R. Jamison, Jr. Parachute Stress Analysis During Inflation and at Steady State, Presented at the AIAA Entry Technology Conference, Williamsburg, Virginia, USA, October 12-14, 1964.
2. H. G. Heinrich and L. R. Jamison, Jr. Stress Analysis of a Parachute During Inflation and at Steady State, FDL-TDR-64-125, Research and Technology Division, Wright-Patterson Air Force Base, Ohio, August, 1964.
3. Performance of and Design Criteria for Deployable Aerodynamic Decelerators, ASD-TR-61-579, Research and Technology Division, Wright-Patterson Air Force Base, Ohio, December, 1963.
4. H. G. Heinrich, J. G. Ballinger, and P. E. Ryan. Pressure Distribution in Transonic Flow of Ribbon and Guide Surface Parachute Models, Prepared for Sandia Corporation, Albuquerque, New Mexico, June 30, 1958.

VI. BIBLIOGRAPHY

1. Beck, E.: The Parachute Considered as a Flexible Shell of Rotation, USAF Translation No. F-TS-3630-Re-ER-281 of German Report, ATI 32297, November, 1942.
2. Duncan, W. J., Stevens, G. W. H. and Richards, G. J.: Theory of the Flat Elastic Parachute, R. & M. No. 2118, March, 1942.
3. Heinrich, H. G.: Guide Surface Parachute, ASTIA Document ATI 28935, February 10, 1948.
4. Jones, R.: On the Aerodynamic Characteristics of Parachutes, R. & M. No. 862, June, 1923.
5. O'Hara, F.: Notes on the Opening Behaviour and the Opening Forces of Parachutes, J. Roy. Aero. Soc, 53 (1949), pp. 1053-1062.
6. Reagan, J. F.: A Theoretical Investigation into the Dynamics and Stress Analysis of Parachutes for the Purpose of Determining Design Factors, Daniel Guggenheim Airship Institute Report No. 130, February, 1945.
7. Stevens, G. W. H. and Johns, T. F.: The Theory of Parachutes With Cords Over the Canopy, R. & M. No. 2320, July, 1942.
8. Topping, A. D., Marketos, J. D. and Costakos, N. C.: A Study of Canopy Shapes and Stresses for Parachutes in Steady Descent, WADC TR 55-294, Goodyear Aircraft Corporation, October, 1955.

Unclassified

Security Classification

DOCUMENT CONTROL DATA - R&D		
<i>(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)</i>		
1. ORIGINATING ACTIVITY (Corporate author) University of Minnesota Minneapolis 14, Minnesota		2a. REPORT SECURITY CLASSIFICATION Unclassified
		2b. GROUP n/a
3. REPORT TITLE Stress Analysis of a Fully Inflated Ribless Guide Surface Parachute		
4. DESCRIPTIVE NOTES (Type of report and inclusive dates) Final Report April 63 - March 65		
5. AUTHOR(S) (Last name, first name, initial) Heinrich, Helmut G Jamison, Lelan R., Jr		
6. REPORT DATE September 1965	7a. TOTAL NO. OF PAGES 22	7b. NO. OF REFS 8
8a. CONTRACT OR GRANT NO. AF33(657)-11184	8d. ORIGINATOR'S REPORT NUMBER(S) AFDOL-TR-65-111	
b. PROJECT NO. 6065		
c. Task No 606503	8b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report) NONE	
10. AVAILABILITY/LIMITATION NOTICES Qualified users may obtain copies of this report from DDC. DDC release to CFSIT is not authorized. Foreign announcement and dissemination of this report is not authorized.		
11. SUPPLEMENTARY NOTES NONE	12. SPONSORING MILITARY ACTIVITY AFDOL (FDFR) WPAFB, Ohio	
13. ABSTRACT <p>A stress analysis of a fully inflated ribless guide surface parachute is presented. The method is an extension of an earlier publication, which is applicable to the transient state of inflation. However, in view of the normal use of ribless guide surface parachutes, the transient phase is considered to be less important since for the so-called infinite mass cases, the maximum force is considered to occur when full inflation is reached.</p> <p>In general, this analysis can be applied to most canopies having non-triangular gore patterns. A numerical calculation is made for a 12-gore ribless guide surface parachute over a range of pressure loadings, canopy sizes, and cloth types representing practical application.</p>		

DD FORM 1473
1 JAN 64

Unclassified
Security Classification

Unclassified

Security Classification

74. KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
<p>Parachute Canopy Stress Non-Triangular Gore Pattern</p>						

INSTRUCTIONS

1. **ORIGINATING ACTIVITY:** Enter the name and address of the contractor, subcontractor, grantee, Department of Defense activity or other organization (corporate author) issuing the report.
- 2a. **REPORT SECURITY CLASSIFICATION:** Enter the overall security classification of the report. Indicate whether "Restricted Data" is included. Marking is to be in accordance with appropriate security regulations.
- 2b. **GROUP:** Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forces Industrial Manual. Enter the group number. Also, when applicable, show that optional markings have been used for Group 3 and Group 4 as authorized.
3. **REPORT TITLE:** Enter the complete report title in all capital letters. Titles in all cases should be unclassified. If a meaningful title cannot be selected without classification, show title classification in all capitals in parenthesis immediately following the title.
4. **DESCRIPTIVE NOTES:** If appropriate, enter the type of report, e.g., interim, progress, summary, annual, or final. Give the inclusive dates when a specific reporting period is covered.
5. **AUTHOR(S):** Enter the name(s) of author(s) as shown on or in the report. Enter last name, first name, middle initial. If military, show rank and branch of service. The name of the principal author is an absolute minimum requirement.
6. **REPORT DATE:** Enter the date of the report as day, month, year, or month, year. If more than one date appears on the report, use date of publication.
- 7a. **TOTAL NUMBER OF PAGES:** The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.
- 7b. **NUMBER OF REFERENCES:** Enter the total number of references cited in the report.
- 8a. **CONTRACT OR GRANT NUMBER:** If appropriate, enter the applicable number of the contract or grant under which the report was written.
- 8b, 8c, & 8d. **PROJECT NUMBER:** Enter the appropriate military department identification, such as project number, subproject number, system number, task number, etc.
- 9a. **ORIGINATOR'S REPORT NUMBER(S):** Enter the official report number by which the document will be identified and controlled by the originating activity. This number must be unique to this report.
- 9b. **OTHER REPORT NUMBER(S):** If the report has been assigned any other report numbers (either by the originator or by the sponsor), also enter this number(s).
10. **AVAILABILITY/LIMITATION NOTICES:** Enter any limitations on further dissemination of the report, other than those

imposed by security classification, using standard statements such as:

- (1) "Qualified requesters may obtain copies of this report from DDC."
- (2) "Foreign announcement and dissemination of this report by DDC is not authorized."
- (3) "U. S. Government agencies may obtain copies of this report directly from DDC. Other qualified DDC users shall request through _____."
- (4) "U. S. military agencies may obtain copies of this report directly from DDC. Other qualified users shall request through _____."
- (5) "All distribution of this report is controlled. Qualified DDC users shall request through _____."

If the report has been furnished to the Office of Technical Services, Department of Commerce, for sale to the public, indicate this fact and enter the price, if known.

11. **SUPPLEMENTARY NOTES:** Use for additional explanatory notes.
12. **SPONSORING MILITARY ACTIVITY:** Enter the name of the departmental project office or laboratory sponsoring (funding for) the research and development. Include address.
13. **ABSTRACT:** Enter an abstract giving a brief and factual summary of the document, indicative of the report, even though it may also appear elsewhere in the body of the technical report. If additional space is required, a continuation sheet shall be attached.

It is highly desirable that the abstract of classified reports be unclassified. Each paragraph of the abstract shall end with an indication of the military security classification of the information in the paragraph, represented as (TS), (S), (C), or (U).

There is no limitation on the length of the abstract. However, the suggested length is from 150 to 225 words.

14. **KEY WORDS:** Key words are technically meaningful terms or short phrases that characterize a report and may be used as index entries for cataloging the report. Key words must be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location, may be used as key words but will be followed by an indication of technical context. The assignment of links, rules, and weights is optional.

Unclassified

Security Classification