



Calhoun: The NPS Institutional Archive

Theses and Dissertations

Thesis and Dissertation Collection

1965

A thermal testing facility for the Aeronautics
Department at USNPS.

Wilcox, Bruce A.

Monterey, California: U.S. Naval Postgraduate School

<http://hdl.handle.net/10945/13286>



**DUDLEY
KNOX
LIBRARY**

Calhoun is a project of the Dudley Knox Library at NPS, furthering the precepts and goals of open government and government transparency. All information contained herein has been approved for release by the NPS Public Affairs Officer.

**Dudley Knox Library / Naval Postgraduate School
411 Dyer Road / 1 University Circle
Monterey, California USA 93943**

<http://www.nps.edu/library>

NPS ARCHIVE
1965
WILCOX, B.

A THERMAL TESTING FACILITY FOR THE
AERONAUTICS DEPARTMENT AT USNPS

BRUCE A. WILCOX

A THERMAL TESTING FACILITY FOR THE AERONAUTICS
DEPARTMENT AT USNPS

* * * * *

BRUCE A. WILCOX

A THERMAL TESTING FACILITY FOR THE AERONAUTICS

DEPARTMENT AT USNPS

by

Bruce A. Wilcox

//

Lieutenant, United States Navy

Submitted in partial fulfillment
of the requirements for the degree of

MASTER OF SCIENCE

IN

AERONAUTICAL ENGINEERING

United States Naval Postgraduate School

Monterey, California

1965

A THERMAL TESTING FACILITY FOR THE AERONAUTICS

DEPARTMENT AT USNPS

by

Bruce A. Wilcox

This work is accepted as fulfilling
the thesis requirements for the degree of

MASTER OF SCIENCE

IN

AERONAUTICAL ENGINEERING

from the

United States Naval Postgraduate School

A THERMAL TESTING FACILITY FOR THE AERONAUTICS

DEPARTMENT AT USNPS

ABSTRACT

An engineering study was conducted of a testing facility for the Aeronautics Department at USNPS designed to test for thermal effects on aircraft structures. Types of equipment and testing methods are described. A recommended facility employing radiant quartz tube lamps as a heat source and mechanical loading is described in detail. Cost breakdowns of this and alternate facilities are compared. Additional recommended equipment and typical uses are discussed.

TABLE OF CONTENTS

Section	Title	Page
I.	INTRODUCTION	1
II.	HIGH TEMPERATURE CAUSES AND EFFECTS	3
	Aerodynamic Heating	3
	Other Sources of Heat	4
	High Temperature Effects on Structures ...	4
III.	MODEL SIMILARITY	12
IV.	THERMAL EFFECTS FACILITIES	17
	Wind Tunnels	17
	Structural Testing Facilities	20
	Design Criteria	21
V.	HEAT SOURCES	23
	Radiant Heat Sources	23
	Induction Heating Methods	25
	Conduction Heating	26
	Resistance Heating	27
	Conclusions	28
VI.	POWER REGULATION	30
	Variable Transformers	30
	Saturable Core Reactors	30
	Electronic Methods	31
	Conclusions	33

VII.	SYSTEM CONTROL	34
VIII.	ASSOCIATED EQUIPMENT	41
	Reflector Assemblies	41
	Quartz Tube Supports	46
	Efficiency Aids and Temperature Measurement	46
	High Temperature Strain Gages	47
IX.	RECOMMENDATIONS FOR USNPS	50
	Facility Placement	50
	Equipment Proposals	55
	System Layout	62
	Alternate Proposals and Cost Analysis	64
	Clam Shell Furnace	69
	Line Heater	70
X.	FACILITY USES	72
	Determination of Thermal Stresses in a Flat Plate	72
	Investigation of Thermal Stresses in a Missile Tail	75
	Investigation of Natural Frequency Change with Temperature of a Titanium Wing Model	77
	Investigation of Reradiation Effect on Heat Transfer in a Multicell Wing	79

XI.	CONCLUSIONS	82
XII.	BIBLIOGRAPHY	84
XIII.	APPENDIX A	88

LIST OF ILLUSTRATIONS

Figure		Page
1.	Stagnation and adiabatic wall temperatures for flight at constant speed	5
2.	Chordwise variation of surface temperature with Mach number for wedge shaped wing ..	7
3.	Variation of elastic modulus with tempera- ture	10
4.	Block diagram of temperature controlled heating system	36
5.	Block diagram of a closed loop control system for the simulation of aerodynamic heating	38
6.	Variation of material reflectivity	42
7.	Research Inc. reflector assembly with lamps	43
8.	Plan view of basement area - Building 234	51
9.	Loaded heated specimen in self-contained loading jig	53
10.	System layout	63
11.	Top view of flat plate	74
12.	Multicell wing model	78

LIST OF TABLES

Table		Page
I.	Comparison of heat sources	29
II.	Comparison of selected facility proposals..	65
III.	Total installed cost in alternate locations	68

TABLE OF SYMBOLS

a = absorptivity factor

c = volumetric specific heat

E = modulus of elasticity

h = convective heat transfer coefficient

k = conductivity

L = length

M = Mach number

q = heat flow per unit area

T = temperature

ΔT = temperature increase

t = time

λ = constant of radiation

δ = deflection

σ = stress

α = coefficient of thermal expansion

μ = Poisson's ratio

SUBSCRIPTS

aw = adiabatic wall

m = model

o = free stream

p = prototype

s = surface

st = stagnation

I. INTRODUCTION

Man has been observing thermal effects on airborne objects since the first meteor was seen streaking across the night sky. Detailed study in the field, however, has been confined to the twentieth century. Since the relatively recent development of supersonic and hypersonic vehicles, the study of the effects of aerodynamic heating on aircraft structures has become increasingly important. A survey of the literature will show that considerable research is still to be done in this field.

No graduate of a program of study in aeronautics can consider his education complete without having studied the effects of thermal stresses on aircraft structures and performance. The program of study at the United States Postgraduate School in Monterey, California now includes the study of thermal effects; however, additional laboratory facilities are necessary with which to demonstrate classic examples. In addition the facilities should be such that small scale research work may be pursued in conjunction with thesis and dissertation work by both students and faculty.

This paper will be concerned with an investigation of what experimental testing should be done, what laboratory equipment should be procured, how much it is likely to cost, how it shall be installed in conjunction with existing equipment, and finally some typical problems which may be investigated with it.

Research for this paper was done at the U. S. Naval Postgraduate School under the guidance of Professor C. Kahr whose assistance is gratefully appreciated.

II. HIGH TEMPERATURE CAUSES AND EFFECTS

Aerodynamic Heating

The primary source of heat in a supersonic vehicle is aerodynamic heating. This is caused by the large amounts of energy which are imparted, essentially by compressive and viscous effects, to relatively small air masses adjacent to the aircraft surfaces. Most of this energy is retained at the surface in the form of heat. The temperature in the boundary layer surrounding the airplane, therefore, is much higher than the surrounding stream, and heat is conducted into the aircraft.

To get some idea of the magnitude of temperatures encountered, consider a body moving at a velocity V in a gas at rest. At the stagnation point of the fluid flow field, the total kinetic energy of the relative velocity is transformed into heat energy. If it is assumed that no heat is lost, the stagnation temperature can be calculated from the following formula:

$$T_{st} = T_o (1+0.2M^2)$$

where T_{st} = stagnation temperature ($^{\circ}R$)
 T_o = free stream temperature ($^{\circ}R$)
 M = Mach number of the flow.

Theoretically this stagnation temperature exists at the nose of the aircraft and leading edges of flight surfaces. A laminar boundary layer develops at these leading edges and changes into a turbulent boundary layer at some point downstream. The temperature at the interface of the boundary layer, called the adiabatic wall temperature, can be calculated by modifying the above formula as follows:

$$T_{aw} = T_o (1+0.2RM^2)$$

where symbols are as before and R is the recovery factor which may be thought of as a convective efficiency factor. This recovery factor is mainly dependent upon whether the boundary layer is laminar or turbulent, being slightly higher for turbulent flow.

Fig. 1 shows a plot of temperature versus Mach number at an arbitrary altitude of 50,000 ft. The dashed line represents stagnation temperature which is not attainable in practice due to conduction and radiation losses to the atmosphere. Losses in the boundary layer are accounted for by the recovery factor which is usually between 0.8 and 0.9. A fair representation of the surface temperature at a stagnation point of an aircraft flying at 50,000 ft. will therefore lie between the 0.8 and 0.9 recovery factor lines. (1)

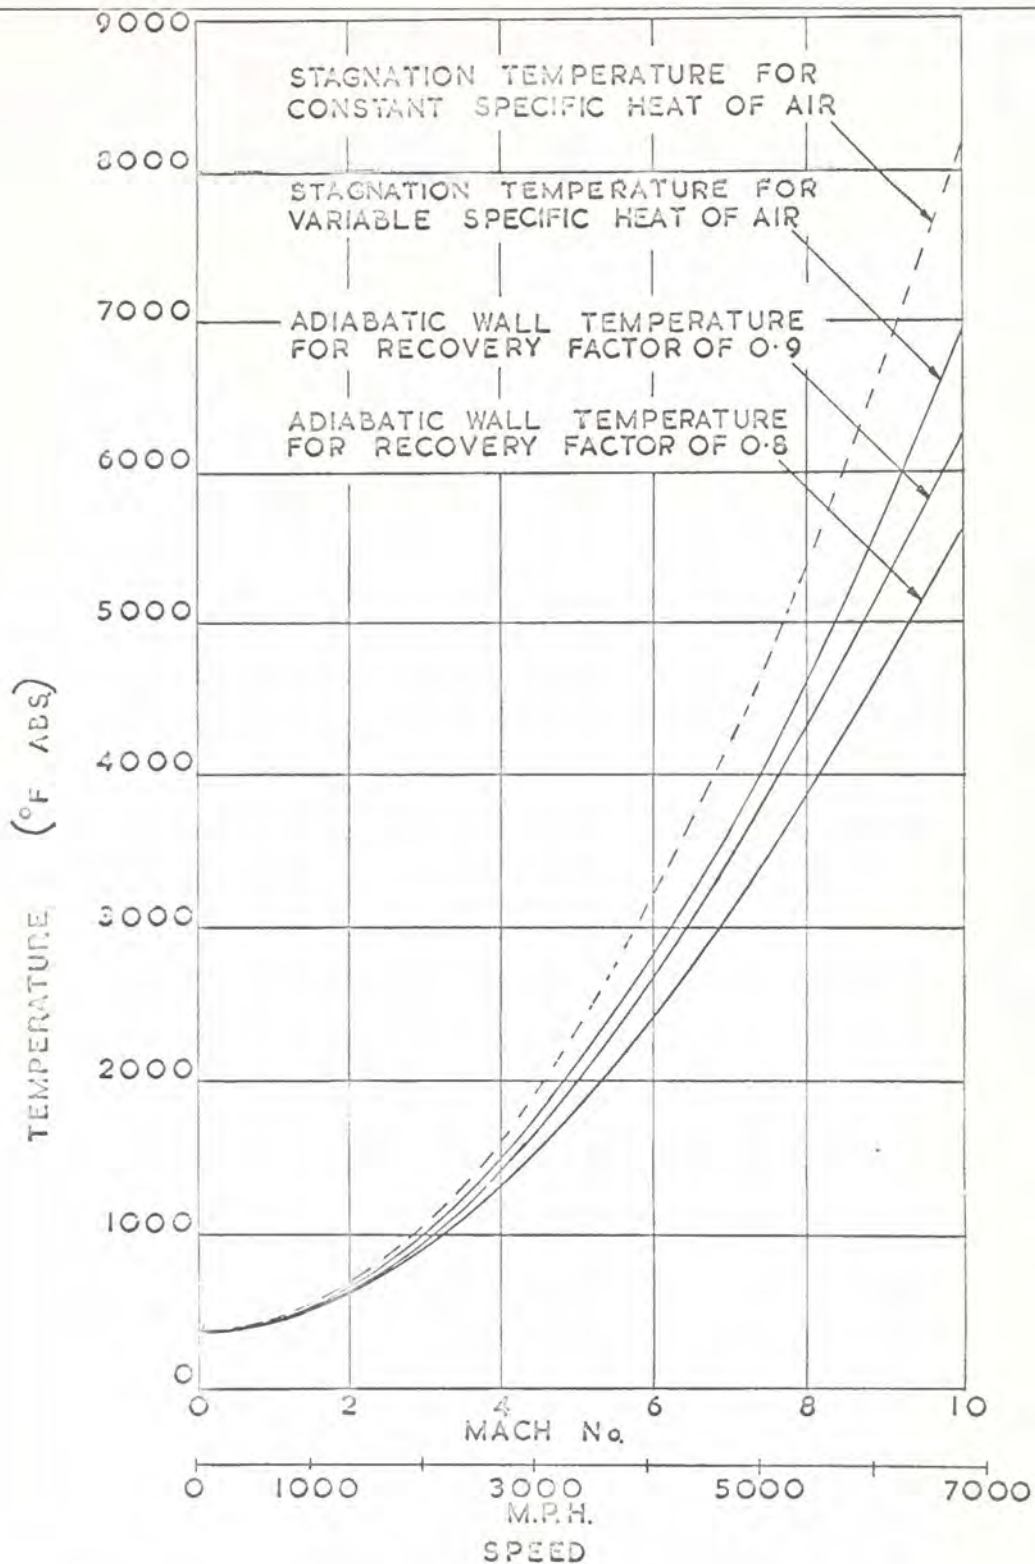


FIG. 1 STAGNATION AND ADIABATIC WALL TEMPERATURES FOR FLIGHT OF CONSTANT SPEED IN AIR AT 50,000 FEET (REPRODUCED FROM REF. 1)

Newton's law of convective heat transfer can be expressed as follows:

$$q = h (T_{aw} - T_s)$$

where q = heat flow between BL interface and surface
(BTU/ft²)

h = the heat transfer coefficient (BTU/hr/ft²/°F).

A major difficulty in using this equation is the fact that h depends on many variables. Primarily, these are the pressure distribution on the wing and the form of the boundary layer - whether laminar or turbulent. For example, the heat transfer in a turbulent boundary layer is so much greater than in a laminar boundary layer that the surface temperature may, under certain conditions, even exceed the stagnation temperature. (1)

Fig. 2 shows the combined effects of all heat sources on the chordwise temperature distribution of a wedge shaped wing at 50,000 ft. The high temperature at the leading and trailing edges is due to the fact that these areas are at or near stagnation conditions. The dip in the center area is due to a Prandtl-Meyer expansion at a surface discontinuity at this point.

The previous considerations were for the case in which the assumption was made that the total heat transfer

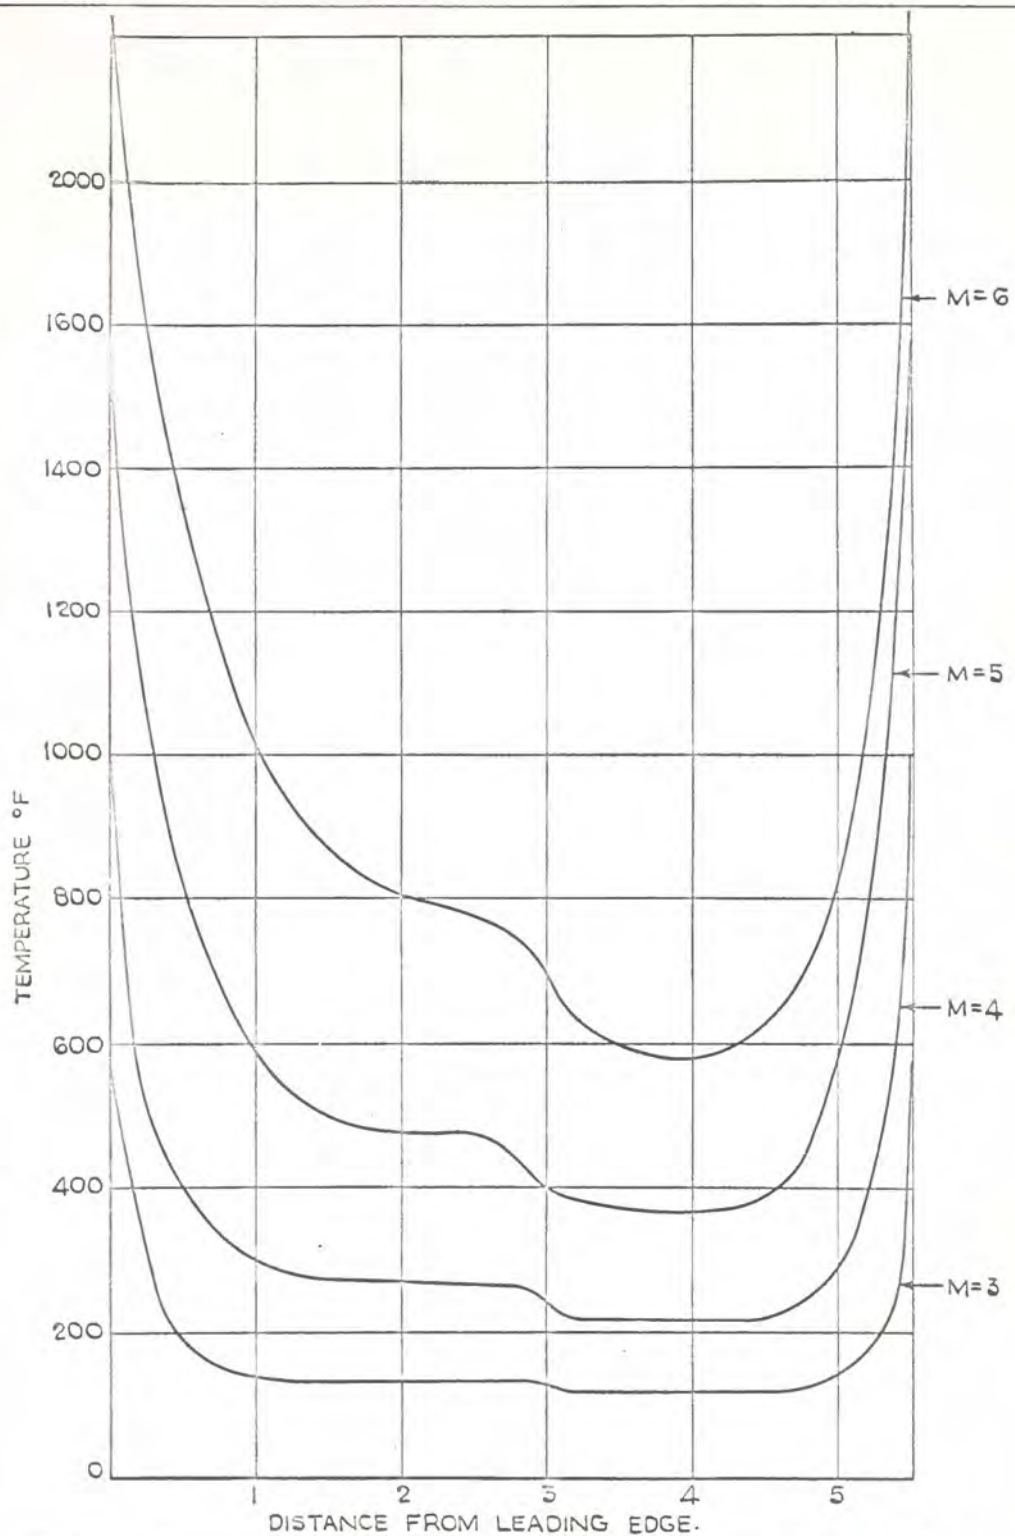


FIG. 2 CHORDWISE VARIATION OF SURFACE TEMPERATURE WITH MACH NUMBER FOR WEDGE SHAPED WING FOR ACCELERATION OF $1g$ AT 50,000 FT.

was due to aerodynamic heating. To completely define the heating problem, radiation must be considered, since all bodies, whether moving or stationary, continuously emit and absorb radiation. A better formula for heat flow into the structure therefore is:

$$q = h(T_{aw} - T_s) - \lambda T_s^4 + f(S)$$

where λT_s^4 = the Stefan-Boltzman radiation loss to free space (BTU/hr/ft²)

$$f(S) = \text{solar radiation gain} \simeq 400 \text{ BTU/hr/ft}^2 \quad (1).$$

Other Sources of Heat

Temperature gradients due to aerodynamic heating are not the only type encountered. In addition to a chord-wise temperature gradient previously described, there may be thermal gradients within the wing perpendicular to the surface. These gradients may be caused by cooling of fuel within the wings or may be due to conduction into ribs and spars. Also, there may be hot areas near engine exhaust outlets.

High Temperature Effects on Structures

The primary effect of high temperatures on structural members is to reduce the value of the elastic limit, the yield point, the failing stress, and the modulus of elas-

ticity of the materials of construction. Fig. 3 shows how temperature effects the modulus of elasticity of some commonly used materials. A scale of Mach number is included at a rate equivalent to maximum temperatures which may be encountered. Since the modulus of elasticity is proportional to the buckling load of an element, the curve shows the deterioration of load carrying capacity of the structure with temperature.

Another effect of high temperatures occurs as a result of the thermal gradients which occur within the component. Since various areas of the structure tend to expand at a rate according to the local temperature, a complicated stress pattern develops relative to the thermal gradients which exist. This would cause little problem if the temperature levels and gradients were such that materials remained truly elastic, but this is not the case. Behavior is inelastic in nature in some situations and creep deformations may occur in others.

Buckling of thin walled structural elements is probably the greatest danger in aircraft and missiles. This is due to the fact that elastic buckling of a wing panel can change the flow of air over the surface of a wing enough to produce a dangerous aerodynamic situation at high Mach numbers. The changes in flow pattern can then change the

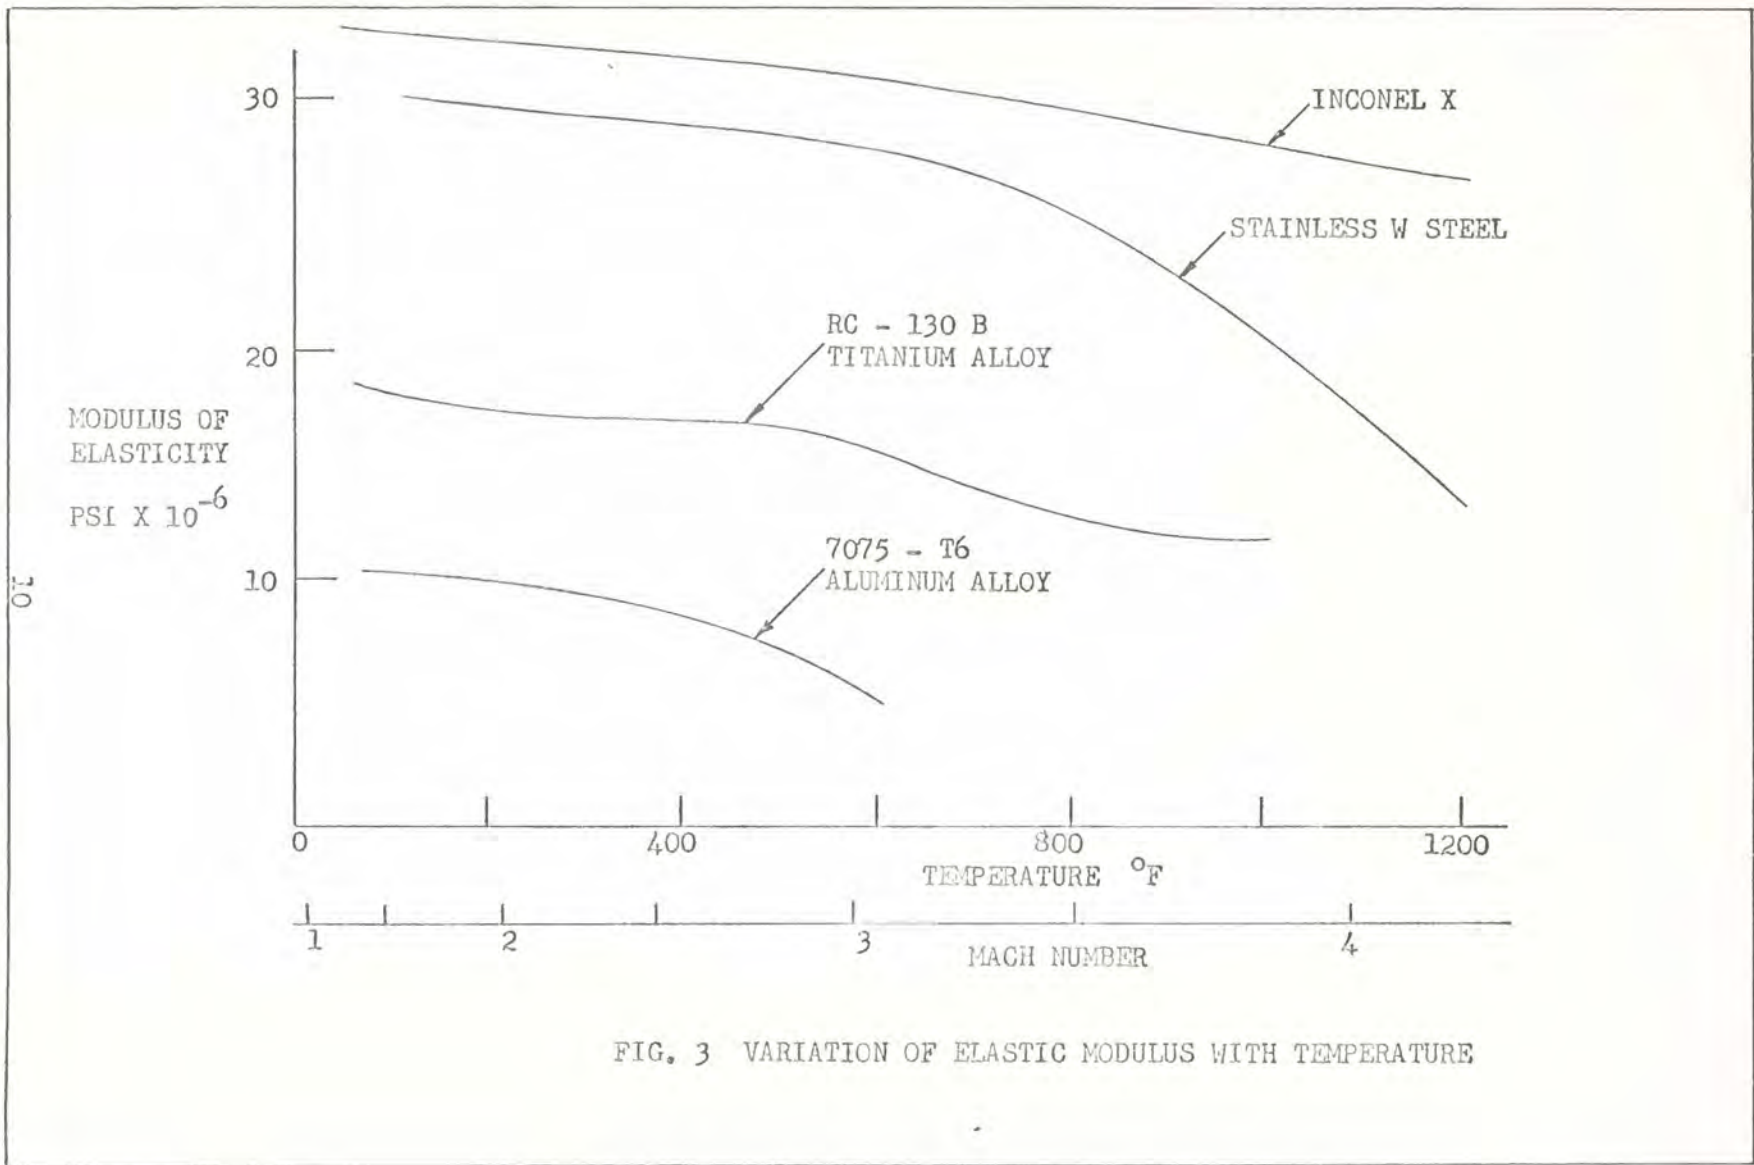


FIG. 3 VARIATION OF ELASTIC MODULUS WITH TEMPERATURE

thermal gradient enough to produce new thermal stresses sufficient to cause inelastic buckling or failure of the element.

The mechanism of creep has been the object of considerable study in recent years. Creep may be defined as the time-dependent portion of the strain imposed upon a metal by the application of a stress. (3) A significant aspect of creep is that it is also temperature dependent. If a loaded component is above a critical temperature, it will undergo creep. This critical temperature is usually from 25 to 50 percent of the melting point of the material. For this reason creep can become a significant limiting factor in the choice of construction materials of vehicles which will undergo conditions of high temperature.

There are other effects of flight at high temperature, however, the most significant ones have been discussed here. The object of this section has been to emphasize the need for detailed study in this field. In the following sections it will be shown how needed experimentation in this field can be accomplished.

III. MODEL SIMILARITY

Due to the inherent difficulties associated with testing full scale structural components, it is often convenient to test a scale model. The problems associated with simulation of the general aerodynamic heating problem are the subject of several reports. (4, 5, 6, and 7) The authors of these reports vary somewhat in their approach to the problem, but they are unanimous in their conclusion that exact simulation of general aerodynamic heating by use of a scale model in an unheated wind tunnel is mathematically impossible. The alternative, therefore, to full scale testing is "incomplete aerothermoelastic testing". This is a testing technique in which some means other than an air stream is used to simulate aerodynamic pressure and heating. An example of this would be a facility in which the heat source were a radiant heater and the aerodynamic pressure source were a mechanical loading device.

Full development of similarity parameters as applied to thermal testing and mathematical proof of the impossibility of "complete aerothermoelastic testing" with a scale model may be found in Appendix A. "Complete aero-

thermoelastic testing" as meant here is characterized by a test in which a scale model is tested in a wind tunnel with nothing but unheated tunnel air as a heat and pressure source.

The approach to the development of similarity parameters varies with the author. Dugundji (7) starts with the general equations of motion for a compressible, viscous, heat-conducting perfect gas. These equations are nondimensionalized and an order of magnitude analysis is made. The result is a series of combinations of quantities which must be the same for both the model and the prototype. These are called similarity parameters. Examples of these parameters include the well known Reynolds number, Prandtl number, and Mach number. Another method of obtaining the same results is by applying the Buckingham π theorem of dimensional analysis. This approach was used by O'Sullivan who wrote of his results for NACA in 1957 (4).

For reasons which will be elaborated on in following sections, the type of testing facility which will be proposed in this paper is one in which the source of heat is radiant and the source of loading is mechanical. Therefore

a discussion of some similarity considerations for this type of testing will follow.

First it must be assumed that the adiabatic wall temperature and heat transfer coefficient or alternately the rate of heat input in an aerodynamic heating problem are known. These may be supplied by aerodynamic analysis or full scale tests. In order to simulate structural response (deflections, distortions, and thermal stresses) using a scale model, it is necessary to duplicate the variation of temperature in all directions in the model. In order to accomplish this, the quantity of heat input and heating rate must be scaled in a manner which can be described by similarity parameter laws. From a consideration of dimensional analysis, the applicable relationship can be expressed as: (8)

$$\frac{\delta}{L}, \frac{\sigma}{E}, \Delta T \alpha = f\left(\mu, a, \frac{E \alpha}{c}, \frac{q \alpha L}{k}, \frac{kt}{cL^2}\right)$$

where δ = deflection

L = characteristic length

σ = stress

E = modulus of elasticity

ΔT = temperature increase

α = coefficient of thermal expansion

μ = Poisson's ratio

a = absorptivity factor

c = volumetric specific heat

q = thermal flux

k = conductivity

t = time.

If it can be assumed that the same material is used for the model and prototype, the following relationships will automatically be true:

$$E_m = E_p$$

$$\mu_m = \mu_p$$

$$c_m = c_p$$

$$k_m = k_p$$

$$\alpha_m = \alpha_p$$

where subscripts m and p denote model and prototype respectively. Furthermore, if $a_m = a_p$, then

$$\delta_m = \frac{L_m}{L_p} \delta_p$$

$$\sigma_m = \sigma_p$$

and $T_m = T_p$

if the following conditions are satisfied:

$$q_m = \frac{L_p}{L_m} q_p$$

$$t_m = \left(\frac{L_m}{L_p} \right)^2 t_p .$$

Therefore, for a $\frac{1}{4}$ scale model, $q_m = 4q_p$ and $t_m = t_p/16$.

The physical meaning of the first equality is that the absorbed intensity per unit area in the model must be four times a given intensity in the prototype to obtain the same results. The second equation shows that, since heating rate is proportional to t^{-1} , the heating rate of the model must be 16 times larger than a heating rate in a prototype to be simulated to have similar effects.

The above analysis shows the primary limitations of testing small scale models. Maximum thermal stresses, which are of primary interest, occur when temperature changes are most rapid. It may be concluded, therefore, that testing requiring large rates of temperature change or high heating rates must be done on full scale or nearly full scale models.

IV. THERMAL EFFECTS FACILITIES

The most accurate method for determining the behavior of an aircraft structure under the influence of aerodynamic heating would be a full scale flight test. For obvious reasons this is not practical. Therefore, the structure or component under consideration must be tested under conditions which most nearly simulate those which might actually be encountered. The difficulties and inaccuracies inherent in laboratory simulation of anything other than a full scale model have previously been discussed. There is an advantage to the laboratory test, however. This is the fact that data collection can be more complete in the laboratory, since a component of interest can be studied separate from the flight vehicle if necessary. The laboratory simulation of thermal effects can, therefore, be extremely useful for the evaluation of these effects. In this and following sections a survey will be made of equipment useful for the study of thermal effects in the laboratory.

Wind Tunnels

One of the most obvious approaches to the laboratory simulation problem might be the use of a wind tunnel.

There are several approaches to the problem of satisfying the laws of similarity. These include the use of gasses other than air or the use of materials other than those of the actual component. In addition, since it is nearly impossible to provide for flow of a magnitude that would produce stagnation conditions representative of high speed flight through a workable test section, some provision would be necessary for heating the circulating gas. A design for such a wind tunnel is proposed by Molyneux, (5) however he concludes that it is quite impractical.

Trussell and Weidman have described a recent endeavor by NASA to solve the problems described above on a practical basis. Their approach was to equip the existing supersonic unitary plan wind tunnel at Langley Research Center with an internal radiant heating device. The test section of this tunnel is four feet high, four feet wide and approximately seven feet long. The heat source used was 96 quartz tube heat lamps mounted inside the test section which provide about $26 \text{ BTU/ft}^2 \text{ sec}$ at a distance of 12 inches from the heater. Surface temperatures of up to 700°F are available. (9) Such a facility

is considered impractical for USNPS in view of the fact that such a wind tunnel does not exist at USNPS and projected needs do not warrant its construction.

An alternative which may be suggested is to equip one of the present subsonic wind tunnels at USNPS with some kind of heating apparatus. This could be accomplished by lining the heated area with metal to protect the wood construction, and mounting a bank of quartz tube lamps on each side. Such a setup would be suitable for only specialized tests. The major restriction to its use is the fact that the flow is subsonic. In addition, the lamp banks must be mounted behind a heat resistant glass enclosure to prevent interference with the air stream. Resistance heating by passing a current directly through the specimen may be a simpler method of accomplishing the same results. In either case, care in interpretation of results is necessary, since similarity parameters must be satisfied.

Horton and Johnson have described a hypersonic wind tunnel for structural research which exists at Stanford University. This wind tunnel is of the standard blow-down type with a test section variable in size of from five to eight inches square and 14 inches long. The

largest model successfully evaluated was two inches in diameter. The heat source is a gas-fired heat exchanger through which air passes prior to passage through a hypersonic nozzle. (10) Although a blowdown tunnel exists at USNPS, conversion of this facility to a structural thermal effects study device would not be advised at this time in view of the cost involved and the limited use that it would receive at this institution.

Structural Testing Facilities

The wind tunnel approach to investigation of thermal effects on structures has been shown impractical. In addition, similarity considerations dictate the use of as large a scale model as possible for accurate correlation of results. Therefore, the only acceptable alternative is a full scale testing facility which would simulate aerodynamic heating with or without the addition of simulated aerodynamic forces. Such a facility has been built at Massachusetts Institute of Technology (8) and Stanford University (11, 12, 13). Testing facilities such as exist at these institutions can be as elaborate or as simple as needs and available funds prescribe. Investigations which can be conducted include:

1. temperature gradient studies,
2. thermal stress studies,
3. combined static and thermal load studies,
4. combined dynamic and thermal load studies,
5. studies on variations in structural stiffness and strength at elevated temperatures,
6. cumulative thermal damage studies,
7. thermal fatigue studies,
8. contact joint conductance studies,
9. internal reradiation effects, and
10. deflection and distortion studies. (8)

The following discussion, therefore, will deal with this type of facility in great detail.

Design Criteria

The design criteria of a facility for testing thermal effects on aircraft structures are as follows:

1. The heat source must be such that high intensity rapid heating rates are available.
2. The heat input must be controllable in a manner that will permit simulation of a particular flight history of interest.
3. The facility must be large enough to permit test-

ing of full scale or large scale model structural components.

4. Test specimen loading must be possible without undue complexity.
5. The heating system should be such that it, by itself, will not induce stresses into the specimen.
6. The specimen should, if possible, be visible during the test.
7. The entire system must be simple enough to be operated by one or two persons.
8. Operation of the facility must be nonhazardous.

(8, 1)

In addition to these criteria, consideration must be given to power, space, and money available for such a facility.

V. HEAT SOURCES

Radiant Heat Sources

Within the past fifteen years Abramson, of Research Incorporated, Minneapolis, working under contract to the Wright Air Development Center (14) and Horton at the Royal Aircraft Establishment, Farnborough, England and Stanford University (1, 15) have carried out considerable research and development on systems of structural testing at high temperatures. Their work had in common the use of infrared radiation from quartz tube lamps as the heat source. Abramson's work led to the marketing by Research Inc. of the best commercially available "off the shelf" components for this type of facility. Horton's work led to the design and construction of a highly successful facility of this type by three former USNPS students, Campbell, Watson, and Geronime, at Stanford University in 1962 (11, 12, 13).

The T-3 quartz tube lamp, manufactured by General Electric, is gas filled and consists of a tungsten filament held in the center of a quartz tube of 3/8 inch outside diameter by a series of tantalum disc spacers. Molybdenum foils are sealed into the ends of the quartz

tube and are attached to the filament wires. Power output is of the order of 1 KW per lamp at 220 volts. Up to 480 volts per lamp is permissible and under these conditions 3 KW per lamp output is obtainable. Lamp life is 5000 hours (16). Lamps may be mounted as close together as $\frac{1}{2}$ inch between centers in arrays. In such a configuration power dissipation of 200 KW/ft² is obtainable. (1) At the resulting heat flux density of 100 BTU/ft²sec at two inches, specimen temperatures of up to 2700^o are available. (17)

Other approaches to heating by radiation have been used with varying degrees of success. One approach is the nickel-chromium heating element. A typical configuration is a 30 inch long element mounted at the focal point of a parabolic reflector. Major disadvantages of this system include high thermal inertia and low heat-transfer rates. (18)

One additional method of radiation heating worthy of note is the silicon-carbide Global. These are resistance type heaters mounted in a manner similar to quartz tube lamps. This is the type of heating system originally installed in the facility at M. I. T. The primary disadvantage of this system compared with the quartz

tube again is high thermal inertia (resistance to temperature change). In addition, tests conducted on the M. I. T. facility showed a heat flux density of approximately 50 BTU/ft²sec under conditions similar to those in which a quartz tube lamp will produce 100 BTU/ft²sec. A further disadvantage is the fact that Globar elements have a lifetime of up to 100 hours compared to 5000 hours for the quartz tube lamp. (8)

Induction Heating Methods

A somewhat different approach to heating is the induction heating method. Briefly, this is accomplished by inducing eddy currents in a test specimen made of electrically conducting material by a changing magnetic field. The resulting current flow in the material which has resistance requires expenditure of energy, which appears in the form of heat. In order to set up the necessary magnetic field, the test specimen must be encircled by an induction coil or alternately large pancake coils may be mounted close to a surface to be heated. Advantages of induction heating include high heating power density (of the order 200 KW/ft²) and low thermal inertia.

Considerable work was done by McLean and Lederman

at Polytechnic Institute of Brooklyn in 1956 (19, 20) on two small (1 KW and 20 KW) induction heating machines. Models of wing structures approximately 8 inches by 12 inches in size were tested and results compared with theory. Considerable satisfaction was expressed at results. Types of tests which may be performed with this method are somewhat limited since thermal gradients are only obtainable within the model itself. Heat application on the outside of the model is constant due to the nature of the required test setup. Experimental work with induction heating on full scale models has proven the method effective but costly compared with radiant heating methods for large scale applications.

Conduction Heating

Another method of heating which has been tested is conduction heating. This is accomplished by covering the test specimen with a heating blanket, strip heater or film type heater. The heating blanket consists of electric resistance wires embedded in a flexible, electrically nonconducting matrix such as rubber or plastic. A strip heater is similar except that the heating element and electrical insulation do not form an integral unit. A

film type heater is formed by spraying the surface to be heated with an insulating material and then spraying on a series of electrical heating elements. Operating temperatures with these methods range from 450°F to 600°F. Power densities obtainable range up to 95 BTU/ft² sec (1 KW/ft²) with 90% heating efficiency. (3)

Disadvantages of these methods as compared to others are many. First is the lack of high temperature capability (700°F as opposed to 2700°F for radiant heating methods). In addition, there is a certain lack of flexibility. All of these heaters must be tailored to the test specimen. In the case of film type heaters a semi-permanent attachment is necessary. A disadvantage with heating blankets is that sometimes hot spots result from the blanket not making intimate contact in an area. (18)

Resistance Heating

A heat source useful for some applications is the heat of a heavy electrical current passing through the test specimen itself. This technique is particularly appropriate to the testing of materials in a universal testing machine for reactions to combined applied loads and thermal stresses. An advantage to be gained with this type of heating is the fact that the test specimen

is fully visible throughout the entire test. A restriction is the fact that the test specimen must be an electrical conductor.

Conclusions

Three conclusions can be drawn from this discussion of heat sources. They are:

1. For a full scale structural testing facility the most effective heat source is the quartz tube radiant heating lamp.
2. For a small testing unit with limited application an induction heating device yields satisfactory results.
3. Resistance heating is very effective for universal testing machine applications when possible.

Table I shows a comparison of the various types of heating sources.

TABLE I COMPARISON OF HEAT SOURCES

	MAX TEMP OF SOURCE °F	HEAT UP TIME °F PER SEC	HEATING RATES BTU/FT ² -SEC	ADVANTAGES	DISADVANTAGES
RADIANT SOURCES					
QUARTZ TUBE LAMPS	5800	10,000	100	1. OPERATES AT ANY TEMP 2. LOW THERMAL INERTIA	1. EXPENSIVE
HEATING ELEMENT	2000-2400	56	15	1. INEXPENSIVE	1. HIGH THERMAL INERTIA
GLOBAR	3000	100	50	1. LONG TIME OPERATION AT HIGH TEMP POSSIBLE	1. HIGH THERMAL INERTIA
INDUCTION	1000	1000	100	1. LOW THERMAL INERTIA	1. EXPENSIVE 2. ELECTRICAL CONDUCTOR SPECIMEN 3. THERMAL GRADIENTS IMPOSSIBLE
CONDUCTION					
HEATING BLANKETS	450	50	1	1. LOW POWER REQUIRED	1. LOW TEMP CAPABILITY 2. HIGH THERMAL INERTIA 3. LACK OF FLEXIBILITY 4. HOT SPOTS
STRIP HEATERS	600	50	75		
FILM TYPE HEATERS	500	50	25		
RESISTANCE HEATING	MELTING	50-100	VARIES	1. SPECIMEN FULLY VISIBLE	1. ELECTRICAL CONDUCTOR SPECIMEN 2. NO THERMAL GRAD

VI. POWER REGULATION

One of the basic needs of any heating facility is a method of regulating electric power input to the heating devices such that desired temperatures and heating rates are achieved. With a full scale facility, a 750 KVA, 480 volt, 3 phase transformer such as is available at USNPS is capable of producing over one megawatt of power. Heavy duty equipment is necessary to regulate this power. Methods available include the variable transformer, saturable core reactors and electronic devices. These methods will be discussed in this section.

Variable Transformers

Possibly the most direct approach to power regulation is a variable transformer. Advantages of this system include low cost and smoothness of regulation. The primary disadvantage is the relative slowness of operation. In addition, its bulkiness makes the variable transformer inferior to other methods of power regulation for a radiant heating facility. (15)

Saturable Core Reactors

A more effective method of power regulation and one which has been used extensively is the saturable core

reactor. This is essentially a d-c polarized choke inserted in the primary circuit of a transformer. When premagnetization is increased by passing current through the d-c winding, the a-c resistance of the choke is reduced and power output increases. This system is relatively trouble free and characterized by long life. Disadvantages include bulkiness and relatively slow response rate. It is this type of regulation which is incorporated in the system at Stanford University. (11)

Electronic Methods

A modern method superior in all respects to others is the use of electronic components such as ignitrons, thyratrons or silicon controlled rectifiers (SCR) in a combination regulation-control device. Advantages of these systems include extremely high response, compactness, accuracy, and reliability.

An ignitron is a large metal vacuum tube in which a pool of mercury is the cathode and a graphite cylinder the anode. A third electrode, the ignitor, is a short bar of refractory material in contact with the surface of the mercury. Current flows when the anode is positively charged and ionized mercury vapor exists in the space between the anode and cathode. The positive half of an

applied a-c current supplies the first requirement. The mercury vapor is supplied by energizing the ignitor with a voltage of 100-200 volts. Current then starts flowing and continues to flow until the end of the half cycle. By varying the time at which the ignitor is "fired" in each cycle, the amount of power per half cycle is varied. Since current flow in a single ignitron takes place only during a half cycle it is necessary to connect two of them in inverse parallel for full wave output. A characteristic of this device is that 100% overload for periods of up to five minutes is permissible. This and other advantages make this device the best high response, heavy current power regulating device on the market today.

(17)

For lower current loads a thyatron system is recommended. This device operates in much the same manner as an ignitron except that in a thyatron the electrons are emitted by a heated cathode and current flow is "triggered" by a grid. Thyatrons do not have the short term overload capacity that characterizes ignitrons. Advantages include low cost, light weight and compactness. For multichannel applications thyatrons are recommended

provided loads greater than 40 amps per channel are not required. (17)

For applications requiring loads greater than 40 amps but not great enough to require the use of ignitrons, the silicon controlled rectifier is useful. This is a solid state device which works in much the same manner as the ignitron and thyatron. For applications in which loads are not too great it has an advantage over other methods in that no external cooling devices are necessary. In addition, it is extremely compact, lightweight and maintenance free. (17)

Conclusions

The following recommendations are made concerning the use of power regulating devices.

1. For heavy power output applications ignitron regulation units are recommended.
2. For medium power output applications SCR units are recommended.
3. For light power output applications thyatron regulation is recommended.
4. For high current low power applications in which high response is unnecessary variable transformer regulation is satisfactory.

VII. SYSTEM CONTROL

System control must be such that each part of the test specimen is held at the desired temperature. In Section II it was shown that in an aerodynamic heating problem, the desired temperature is high at the leading and trailing edges of a lifting surface and lower in the midchord area. It was pointed out that the heat flow into the structure may be expressed as:

$$q = h(t_{aw} - t_s) - \lambda t_s^4 + f(S)$$

where

λt_s^4 = the Stefan-Boltzman radiation loss to free space (BTU/hr/ft²)

$f(S)$ = solar radiation gain \simeq 400 BTU/hr/ft².

There are two approaches to controlling the heat input into a test specimen which corresponds to these conditions. The first is to compute analytically a temperature profile in the specimen which varies according to a flight profile being simulated. This temperature profile is then fed into an electronic controller which compares program temperature with specimen temperature as measured by thermocouples welded to the test specimen. Error signal is transmitted into the power

regulator which varies power input into the heaters. Fig. 4 shows a block diagram of this system. This system could consist of as many channels as necessary to simulate the desired temperature profile over a surface such as a wing. The primary advantage of this system is simplicity. In addition, since temperature is measured directly at the specimen, the system is independent of the source of heat. A disadvantage of this system is the fact that the theoretical temperature to be programmed into the control system is extremely difficult to compute accurately. (1)

The other method is to program each of the quantities in the heat flow equation as a function of time into a computer. The output of the computer is heat flow rate corresponding to a flight profile to be simulated. Net radiant heat flow rate at the test specimen is measured with special transducers which compare radiant heat to and from the test specimen. This system has the advantage that no control system connections or thermocouples are necessary on the test specimen itself. This might be useful, for example, in the measurement of the effects of solar radiation on an orbiting satellite.

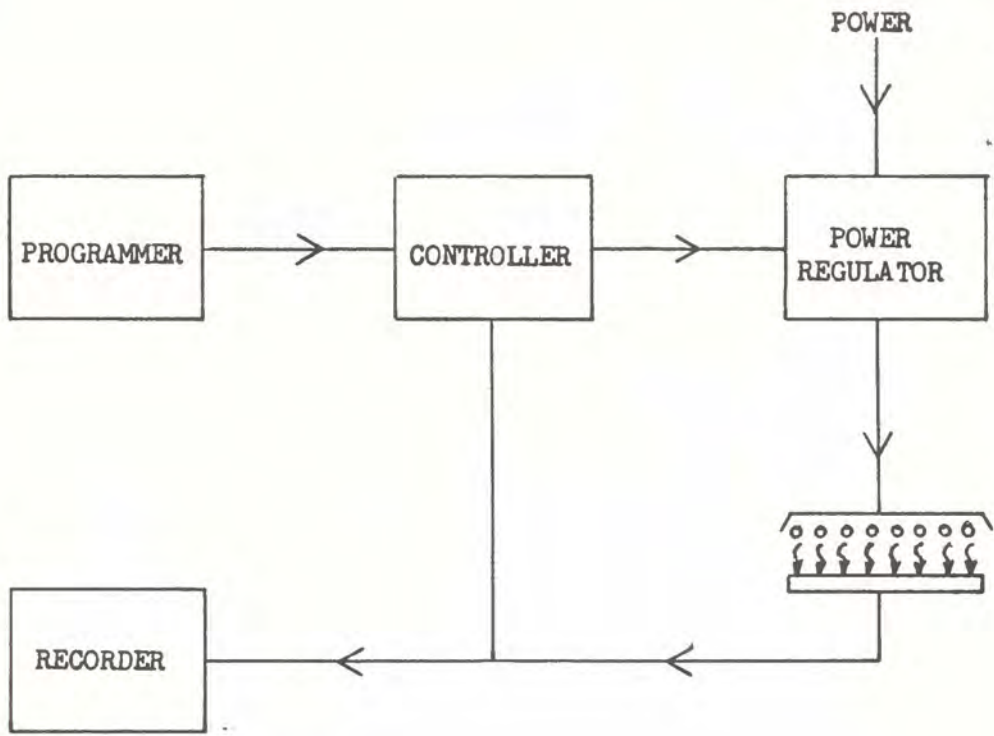


FIG. 4

BLOCK DIAGRAM OF TEMPERATURE CONTROLLED HEATING SYSTEM

The disadvantage of this system is the uncertainty of how much heat actually is transmitted to the test specimen. The transducer only measures net radiation to the test specimen; therefore, convective heat is unaccounted for.

The decision as to which system to use must be made primarily on the basis of application. Research Incorporated offers a variety of programmers for use by either system. They also offer a heat flux density sensing device which would replace thermocouple input to the system with no other component changes. Therefore, a system built of these components would be most flexible.

The control system on the facility at Stanford, was proposed by Professor W. H. Horton (1) and the prototype was designed and built by Lts. Watson, Campbell, and Geronimo (11, 12, 13) It is based on a combination of the two systems. An additional refinement is included as a hybrid computer function generator with a time sharing feature so that each of four heating channels share its use. Feedback is by both temperature from thermocouples in the test specimen and transducers in the radiant heat path. Fig.5 shows a block diagram of this system. (11)

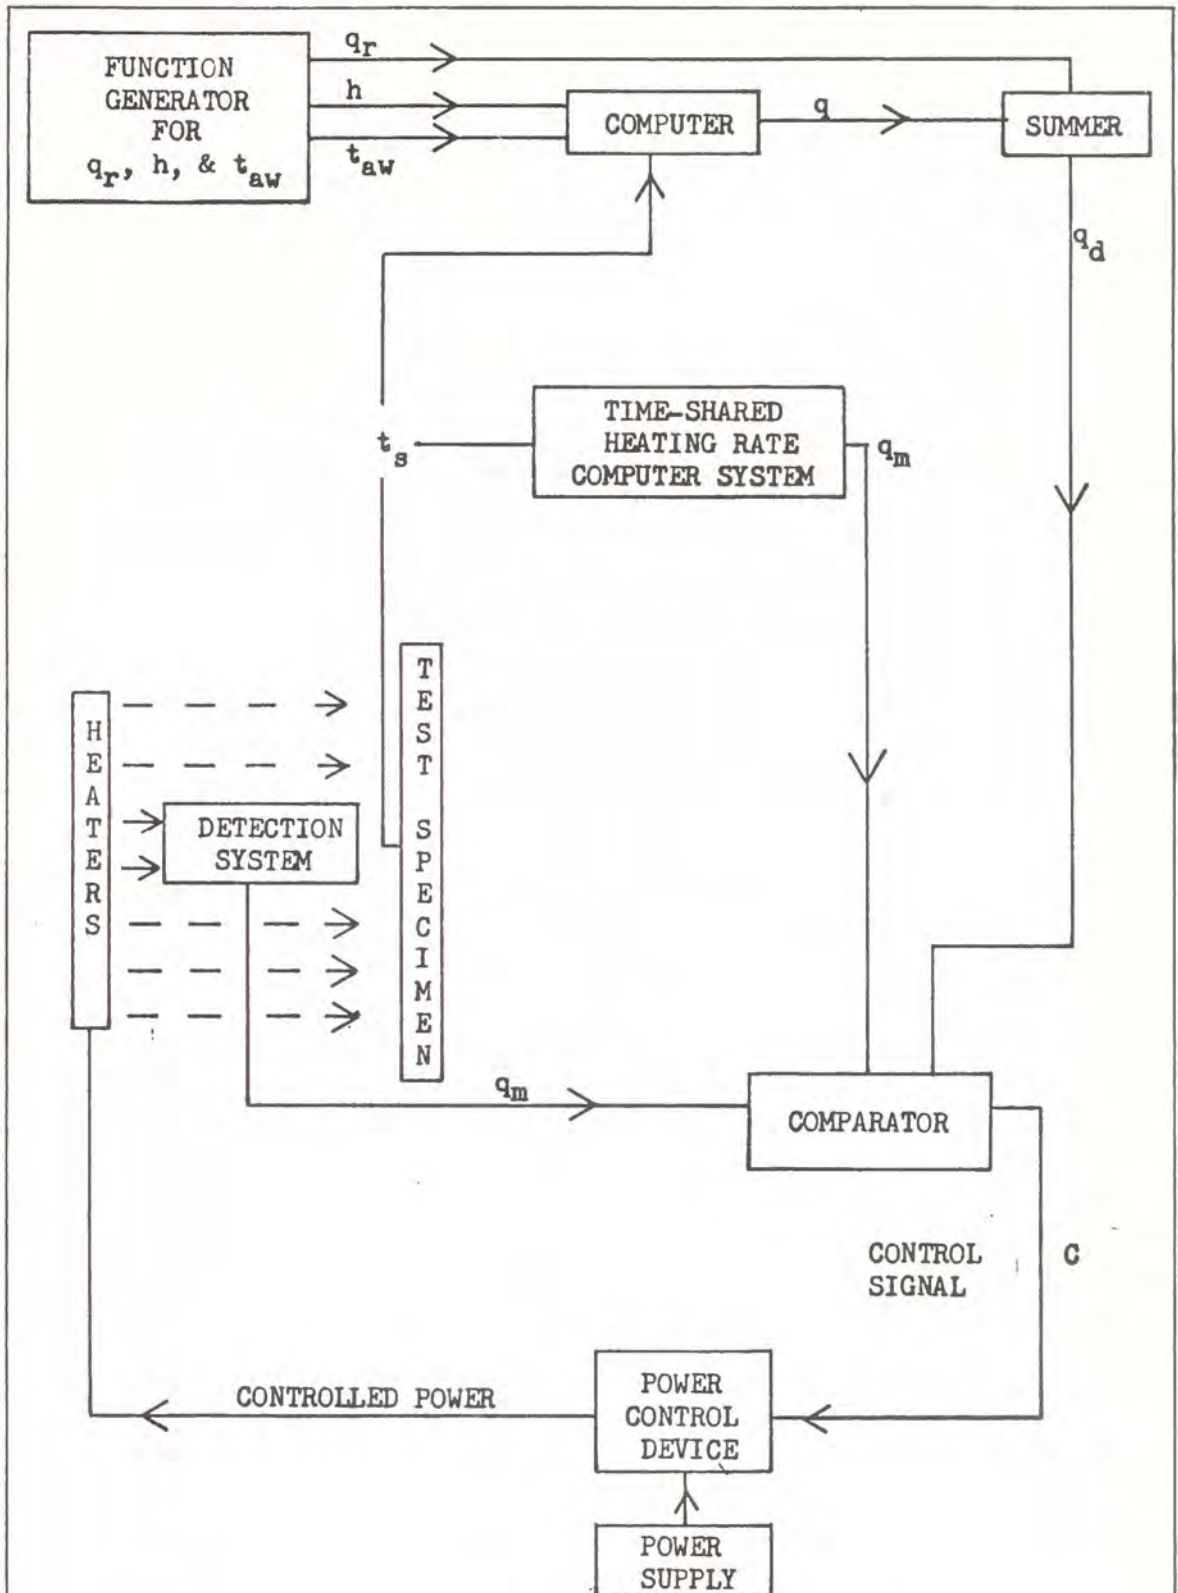


FIG. 5
 BLOCK DIAGRAM OF A CLOSED LOOP CONTROL SYSTEM FOR THE SIMULATION
 OF AERODYNAMIC HEATING (REF 11)

The unique feature of this system is the digital to analogue converter. The premise on which this system is based is that q (the heat which is conducted at the surface) is the actual quantity of interest since it combines the effects of all inputs and losses. The computer, therefore, reads digital values of T_{aw} , h , and $f(S)$ since these are the basic given time dependent variables. It then computes q in a basic analogue computer utilizing measured values of T_s . A significant cost saving feature is the fact that a single amplifier per channel is used for all operations. This is done by storing each computed value as a voltage in a capacitor until the next one can be computed and then recalling the stored information for the summing process.

The advantage of this system is that the three variables, T_{aw} , h , and $f(S)$ can be varied independently according to the flight profile to be simulated. Also, there is no need to precompute the T_s which would correspond to a given flight condition. Although there are no disadvantages to this system, it is not available commercially. The advantages to be gained are not considered to be sufficient to warrant its construction. The control

system which is recommended for USNPS, therefore, is the more versatile temperature controlled system which is commercially available.

VIII. ASSOCIATED EQUIPMENT

There are numerous types of equipment which must be used in conjunction with any thermal effects testing setup in addition to the major components already discussed. In this section some of these miscellaneous equipments will be discussed.

Reflector Assemblies

The first requirement of a reflector assembly is that it reflect a maximum amount of the radiant heat energy in the direction of the test specimen. Fig. 6 shows a comparison in this respect of several materials which have been used for this purpose. (1) Note that the most efficient metal is gold followed by aluminum in various forms.

A second requirement of the reflector material is that it be capable of withstanding the temperatures to which it will be subjected. Again gold is by far the best material. Research Inc. offers reflectors plated with a special "Ceragold" (Fig. 7) which will withstand any temperature within the capability of the quartz tube lamps themselves. It is this reflector type which should be used for the most intense heating applications.

FIG. 6 VARIATION OF MATERIAL REFLECTIVITY (REF 1)

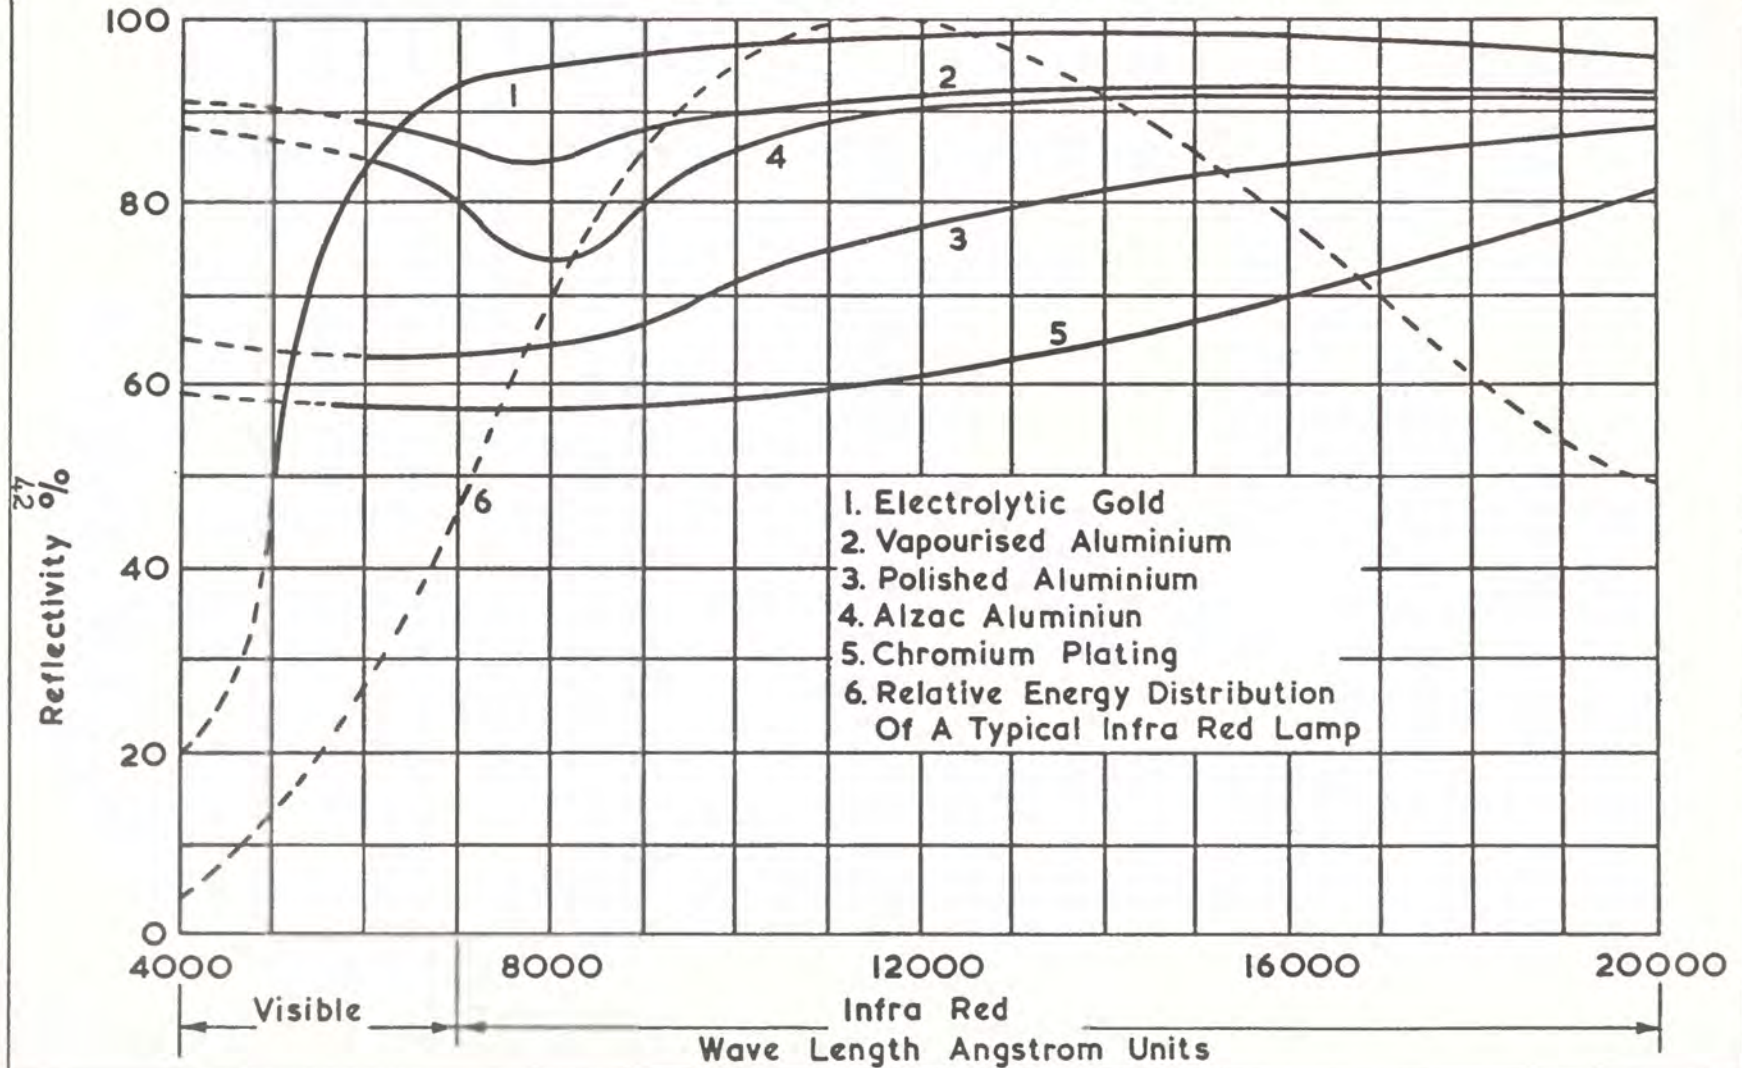


FIG. 1. BUREAU OF INVESTIGATION, ELECTRONIC EQUIPMENT
WITH JAMES



Some concern was expressed recently during a test by Lt Schultz while working on a thesis project at USNPS, when it was discovered that upon occasion, some gold was deposited on the test specimen from the reflector. (21) This reflector was Research Inc. model AU8-618B. It was concluded by Lt Schultz after analysis that this occurred only when heating titanium with the reflector accidentally in contact with the specimen. It was also concluded that since this occurred during use of a new reflector, the source of the gold might have been some residue on the new reflector. Care should be taken in this respect, therefore, when using gold reflectors.

An alternate reflector material offered by Research Inc. is polished aluminum. Already mentioned was the fact that aluminum is less efficient than gold in reflective ability. In addition to this drawback, aluminum reflectors will not withstand nearly as much heat as the gold reflectors. For example, if maximum power were inadvertently applied to lamps in an uncooled aluminum reflector, it would take about one minute to melt! Since replacement cost is about \$50 per reflector, uncooled

polished aluminum reflectors should not be used where the ambient temperature exceeds 700°F. (17)

Since gold reflector assemblies are about 50% more expensive than aluminum reflector assemblies, a third alternative is offered by Research Inc. in the form of water-cooled aluminum reflector assemblies. This enables heat output to be considerably increased over unheated aluminum, but not to the point that full power on the lamps would not melt the reflectors. In addition, a heat exchanger and water pump with connecting tubing must be provided. For a small facility, the additional expenditure for this equipment would increase the cost of this cooled aluminum reflector unit to a point beyond that of gold reflectors.

In view of the preceding discussion the following conclusions can be drawn:

1. For high intensity heating requirements, Ceregold plated reflectors are recommended.
2. For large facilities involved with high radiant flux densities (up to 200 KW/ft² with specimen temperature up to 2700°), water-cooled aluminum reflector assemblies are recommended.

3. For smaller facilities which require lamp temperatures over 700^oF, Ceregold plated reflector assemblies are recommended.

Quartz Tube Supports

The weakest point in the quartz tube lamp is the end seal. In fact, for high temperature applications, it has been shown that lamp life is directly proportional to end seal temperature. (17) For this reason manufacturers of reflector assemblies offer an end seal aircooling system as an option. Inclusion of this device is recommended for any but low temperature application thermal testing facilities.

Efficiency Aids and Temperature Measurement

In order to provide maximum efficiency of power radiation, the specimen should be painted black. This is due to the basic law of physics that a black body absorbs heat better than any other. No recommendations were available by commercial manufacturers of such heat resistant black paint at this writing. Watson, however, reports that he tested several commercial products for such use and found the best to be common stove blacking. (13) This paint was reported extremely resistant to heat, easily applied by brush, and resulting in an even

coat. A disadvantage is that the coating is easily scratched.

Standard thermocouples are available for temperature measurement. Chromel-Alumel thermocouples are available for use at temperatures up to 2400^oF. Good response was reported by Watson using this type at temperatures up to 2450^oF (13). For measurement of temperatures beyond this limit, use of the more expensive platinum-rhodium thermocouple is required.

High Temperature Strain Gages

For many applications of a thermal testing facility it will be required to measure strain. Several problems are present in this regard. Some of these problems and limitations will be discussed here.

For temperatures up to 350^oF phenol-resin (Bakelite)-backed gages with either Bakelite or high-temperature epoxy cement bonding are used. Few insurmountable problems are encountered in this range. Bonding and temperature compensation procedures are well established.

In the temperature range of 350^o-600^oF mounting techniques are different in that a different gage carrier material is used. Since Bakelite becomes unstable at 350^o F, phenol-resin or glass fiber bases are used.

These are good up to 450°F when bonded with a suitable cement (EPY-400, Mithra 200, etc). For applications between 450°F and 600°F the copper-nickel filament must be imbedded directly in high-temperature organic cement (filled epoxies, phenols, and epoxy-phenol combinations). Gage readings must be corrected for gage resistance change and gage factor change. (22)

Above 600°F, accurate measurement of static strain is very difficult. Since copper-nickel alloys become unstable at 600°F, other alloys are used for the filament. Chrome-nickel alloys (Nichrome V as marketed by Driver-Harris Co.) are often used because resistance and gage factors tend to remain more stable than do these properties with any other alloy at temperatures up to 2000°F. However, since these properties do change with temperature, many corrections must be applied and consistent accurate results are difficult to attain. (22)

In addition to filament problems there are serious bonding problems above 600°F. The most common method is to imbed the gage element in a ceramic cement (metallic oxides with a phosphoric acid binder for chemical setting or refractory materials which are flowed in place).

Commercially available ceramic cements for this purpose are: Budd-Type H; Allen P-1 and PBX-Robert A. Allen Co., Mechanicsville, N. Y.; Brimor U-529-Morganite, Inc., Long Island City 1, N. Y. These cements have been used in temperatures up to 1500°F, although there is a strong tendency in upper ranges toward decreasing resistance with increasing temperature. (22)

One other method of gage mounting for use at high temperature worthy of note is a process developed by Rolls-Royce. This process utilizes oxide rods which are melted by oxyacetylene flame. The atomized molten oxide is sprayed on the pre-positioned gage to bond it in place. Good bonding and thermal-stability characteristics up to 2200°F were obtained through the use of laminar base coatings. (22) Equipment for this process is available through BLH Electronics (a division of Baldwin-Lima-Hamilton). The spray gun costs about \$1000 and supporting equipment such as gas tanks, flow meters, etc. costs about \$700. Therefore, due to the high cost and limited applications, purchase of this equipment is not recommended at this time.


IX. RECOMMENDATIONS FOR USNPS

In the previous sections the experimental study of thermal effects on aircraft structures has been discussed from all aspects in general terms. In this section these concepts and conclusions will be used in an effort to design a facility for the investigation to thermal effects on structures by students at USNPS. Several alternate facilities will be proposed and cost figures will be included.

Facility Placement

Fig. 8 shows a plan view of the basement of Building 234 where the proposed facility is to be located. Three power sources are shown as load centers T-6, T-7, and T-9. Load center T-6 supplies heat and lights for the building. Load center T-9 services the mechanical engineering laboratory including a linear accelerator. Load center T-7 supplies power for the wind tunnel and structures laboratory. The load floor, where heavy mechanical forces may be applied to a test specimen, is shown.

In the placement of a radiant heating facility, the primary consideration must be the source of electrical power. Load center T-7 must be the source of power for

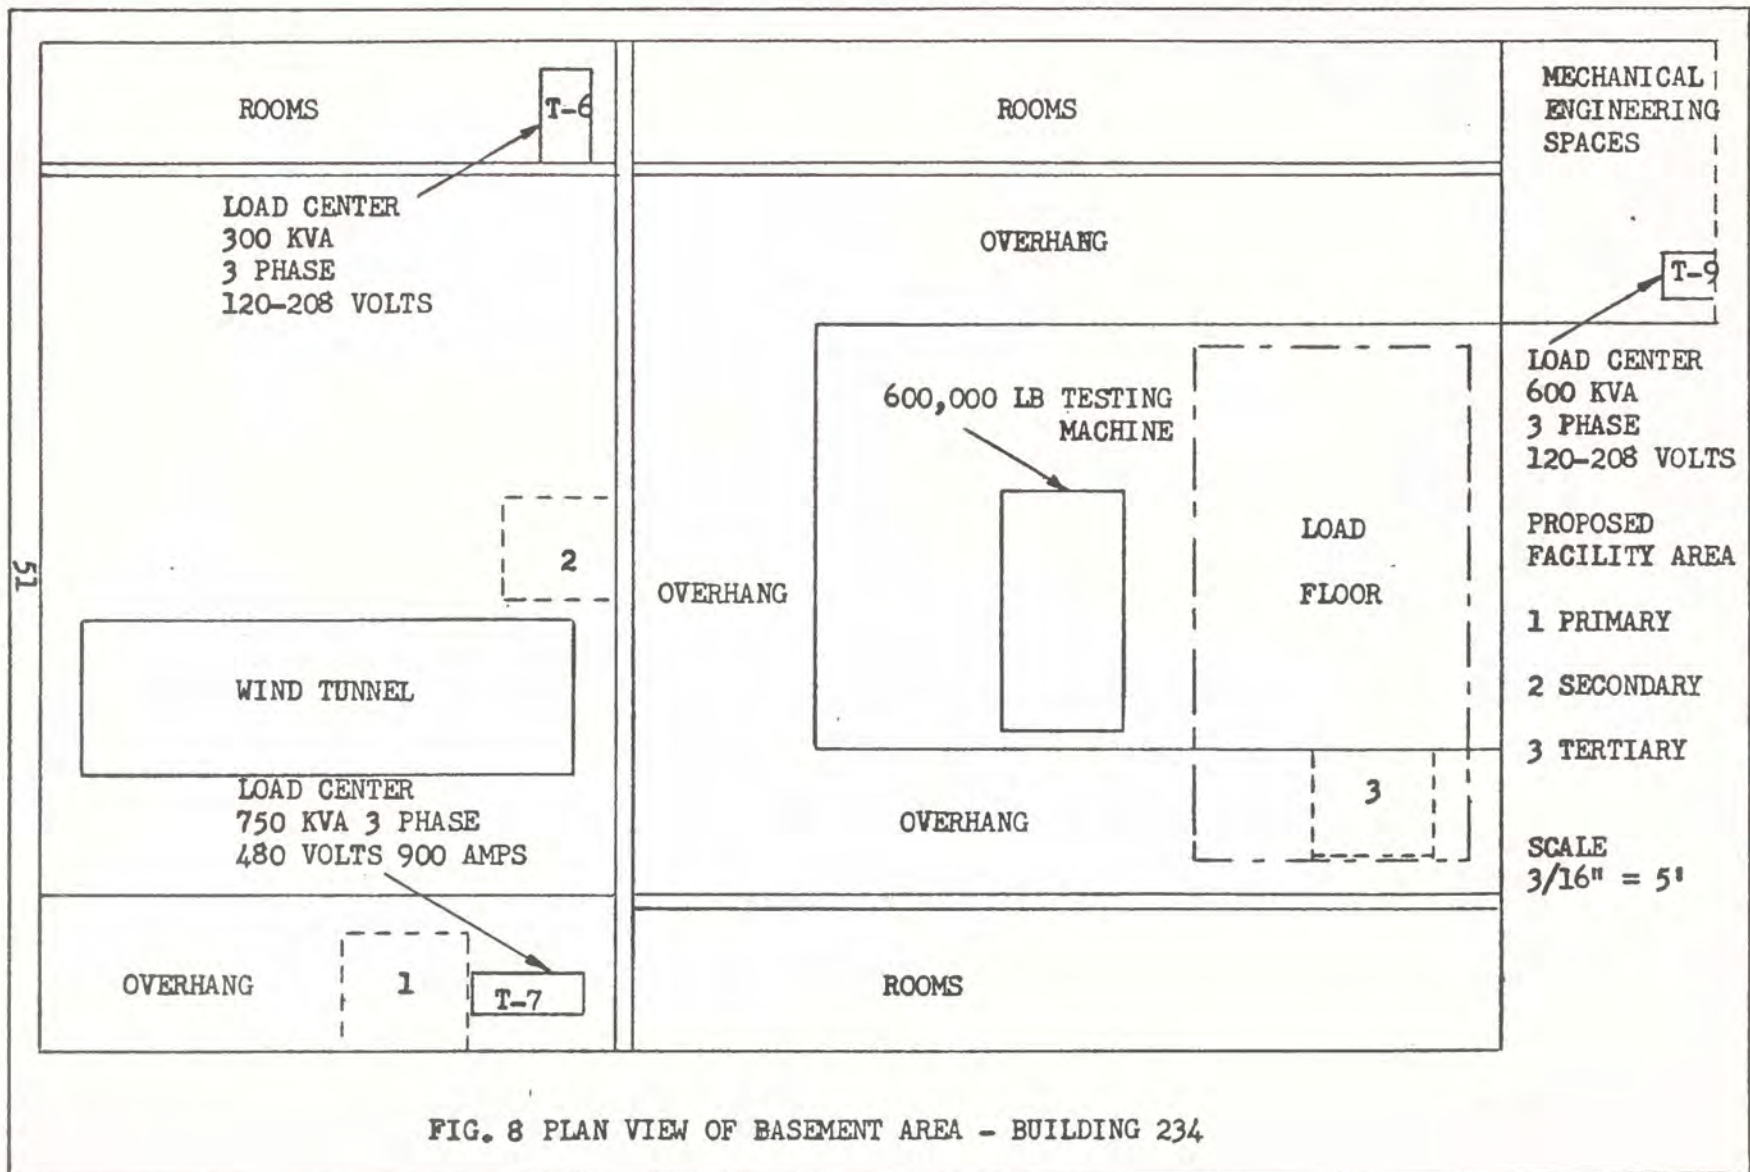


this system for two reasons. First, as shown on Fig. 8, it has 3 phase, 750 KVA, 480 volts, and 900 amps available, which is more than either of the others. Second, the other load centers are constantly in use, whereas load center T-7 is only used for testing by the Aeronautics Department. There will be applications when nearly the entire capacity of the load center will be useful. In these cases all other use of the load center must cease and this will best be arranged with the users of load center T-7.

Another consideration in the placement of this testing facility is the fact that certain applications will require loading the test specimen. This is most easily done on the load floor since both test rig and loading device can easily be bolted to the floor. If it is desired to load a specimen other than on the load floor, a simple loading platform can be constructed such that it mounts both test specimen and loading device as shown in Fig. 9. Such a device can be built by laboratory personnel for the cost of the material, which is estimated to be \$1000.

The proposed testing facility will occupy about 225 square feet. The primary area proposed is immediately

FIG. 9

LOADED HEATED SPECIMEN IN SELFCONTAINED LOADING JIG

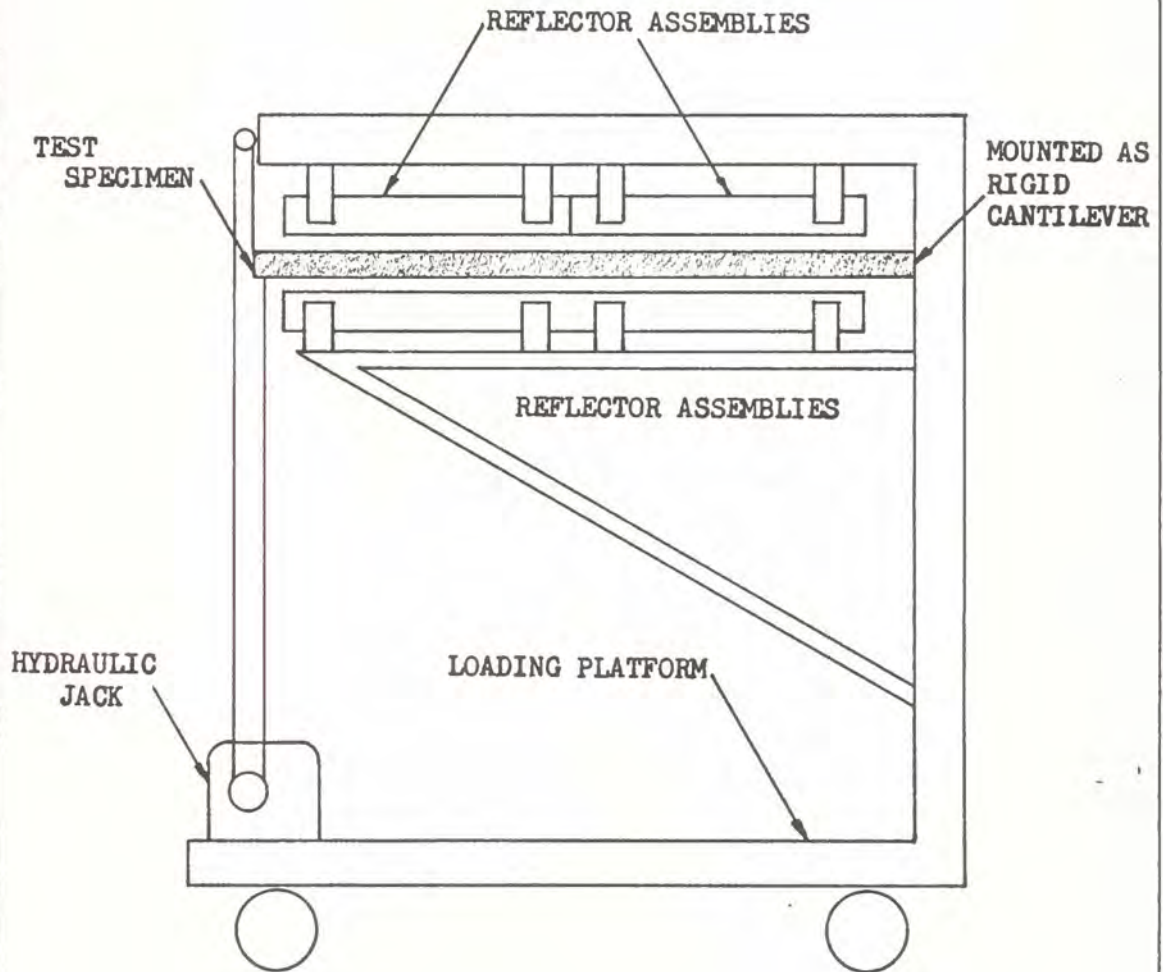

adjacent to load center T-7 as shown in Fig. 8.

The main reason for this choice is the fact that it was estimated by Public Works engineers that it would cost about \$8000 to extend the entire power capability a distance of 100 feet. It would only cost \$1000 to build the loading platform. The floor at this location is concrete with built-in trenches which could be used for power and control cables. An additional advantage is that water is located here. This will be necessary for ignitron power regulator cooling.

A secondary location is also shown on Fig. 8. This is about 50 feet from the load center and the cost of extending the required power to this area is estimated at about \$4000. An additional \$1000 would be needed to install a proper concrete floor since none exists here now. Use of this area would, therefore, cost \$5000 more than use of the primary area.

A tertiary location for the facility, as shown in the figure is on the load floor of the structures laboratory. This would eliminate the cost of a loading platform; however, the power extension cost would be about \$8000 for a net increase of \$7000 in overall cost.

Regardless of the location, it should be pointed out that when this facility is used at or near its capacity, no other major power requirement may be served by the same load center. Under these conditions, therefore, it will be impossible to run the wind tunnel and the thermal effects testing facility at the same time. This should pose no major problem, however, since run time for a typical test with this facility will not exceed ten minutes. An exception to this may be creep tests; however, these will no doubt be at relatively low temperatures (500°-800°F), thus requiring an insignificant amount of power.

Equipment Proposals

An investigation was made of the commercial availability of suitable "off the shelf" equipment of the type needed for a thermal effects testing facility and it was found that at least one company markets it. Prices quoted here will be approximate, therefore, and will be based on the current known prevailing prices on known components.

In order to show how much testing can be done with a given amount of money, a hypothetical set of general

specifications for a proposed facility will be assumed.

These are as follows:

1. The three phase, 750 KVA, 480 volt, 900 amp load center (T-7) will be the only source of power.
2. The heating source will be infrared quartz tube lamps.
3. 2000^oF will be the maximum specimen temperature required. Reference to Figs, 1 and 2 show that this simulates speeds up to Mach 5 at 50,000 ft.
4. Three channels will be sufficient to obtain temperature profiles desired in test specimens.
5. A test specimen with an area of nine square feet is to be tested. An example might be a missile fin model 1.5 ft by 3 ft to be heated equally on both sides.
6. A capability to program a time temperature variation into each channel is desired. Such a capability is necessary to simulate a flight in which a wide variation of conditions are met in a relatively short time.

In addition to these general specifications for the overall facility, each component should also have certain capabilities which will be listed.

Reference to Fig. 4 shows that the primary components necessary for each channel of such a system include: 1. a programmer, 2. a controller, 3. a power regulator, 4. lamp banks, 5. a feedback device, and 6. a data recorder. Some of these components can be combined into integral units. If available these are to be preferred over individual components since the combined unit is more compact and the components are matched to each other, thus reducing sources of error in temperature control.

One type of combination unit which would be both versatile and economical for the facility proposed is a combination temperature controller and power regulator for all three channels. It should meet the following specifications:

1. Three independently controlled and regulated channels.
2. Operate interchangeably on 230 or 460 volts.
3. Rated current capacity of 300 amps per channel.
4. Power output of 130 KW per channel at 460 volts.

5. Overload capacity of twice rated current.
6. High response to feedback signal.
7. Precise temperature control ($\pm \frac{1}{4}\%$ of full scale).
8. Zero to full power capability.
9. Proportional band control (ability of operator to select highest system accuracy commensurate with system stability).
10. Corrective signal limiter control (overvoltage protection for lamps).
11. Selection of manual or remotely programmed control signal.
12. Portable, compact, lightweight.

A unit which meets the above specifications currently sells for about \$8000.

Assuming that the power regulation and signal control functions for the three channels are taken care of, a second combination unit which can be added immediately or at a future date is a programmer. It is definitely advisable to have all channels programmed by a single unit to facilitate coordination of the three channels. A single unit will turn the program for all channels on and off simultaneously or singly as desired. The

following specifications must also be met:

1. Program preparation easily and quickly accomplished by an unskilled operator.
2. Static accuracy and repeatability of at least 0.1%.
3. Dynamic accuracy of 1% at maximum signal rate of change.
4. Adjustable time base from 10 seconds to 10 minutes.

A unit which meets the above specifications currently sells for about \$3500.

For the actual heating process quartz tube reflector assemblies are necessary. For reasons previously stated, it is recommended that units with gold reflectors and air-cooled lamp-end seals be utilized. Size of reflector units is variable; however, for the example test specimen cited (missile fin $1\frac{1}{2}$ ft by 3 ft), coverage could be accomplished by 12 units 6 inches by 18 inches in size. This would cover both sides completely. Since the Aeronautics Department already owns four such reflectors, purchase of eight additional units is necessary. Cost is about \$80 per unit for a total of \$640.

Quartz tube lamps come in all sizes and power ratings. As will be shown later, the proper lamp is General Electric lamp number 1600T3/1CL/HT, or its equivalent. This is rated at 1600 watts at 240 volts. Twice rated voltage is permissible, however, and in this condition power output is 4.5 watts. Cost per lamp is about \$10. Since each reflector requires eight lamps, a total of 96 lamps is needed. The Aeronautics Department presently owns 32 lamps; therefore, only 64 are needed. Total cost then of the 64 lamps is \$640.

Separate from the heating facility itself but still a vital part of any investigation is a method of data collection. A means must be available to read thermocouple data as well as strain gage data for any thermal stress problem. Furthermore, the readings must be continuous for any but a constant temperature test. For this purpose it is recommended that one or more multichannel strip chart recorders be purchased. Two eight channel recorders would provide for independent temperature and corresponding strain measurement at eight positions in the hypo-

thetical missile fin previously mentioned as a possible test specimen. Each recorder will cost about \$3000 for a total of \$6000. Prices quoted are for constant reading type recorders complete with amplifiers.

Additional equipment necessary to complete the facility includes thermocouples, mounting frames, and necessary wiring. Cost of these items will vary greatly, but an estimate of their combined cost is \$2000.


Now that the basic components have been described, let us see how the assumed specifications are met by this facility. The basic requirement was that a surface temperature of 2000^oF at the specimen depends on a number of things, including heat absorption ability of the specimen and heat losses at specimen. A typical value, however, for a black painted aluminum specimen is 32 KW/ft². Assuming a typical heating rate efficiency of 67%, it is found that 48 KW/ft² at the heat source is required. Since each reflector module is six by 18 inches in size (3/4 ft²), and holds eight lamps, it is readily seen that each lamp is required to produce 4.5 KW. This is the maximum output per lamp at 480 volts for the lamps recommended. Since

nine square feet must be heated, the total power output required is 432 KW. The controller-regulator unit recommended is rated at 130 KW per channel for a total of 390 KW available. This can be doubled for periods of five minutes and under these conditions could easily handle the 432 KW required. If any part of the test specimen requires a lower temperature, or if heating efficiencies better than those predicted prevail, the specified temperature could be held for a longer period of time. The amperage requirement for 432 KW at 480 volts can be seen to be 900 amps, which is the maximum available from load center T-7. Therefore, the requirements as stated in the assumed specifications are just met by this proposed facility.

System Layout

Fig. 10 shows a proposed system layout. If location one as shown in Fig. 8 is chosen, the south wall would be the top boundary in Fig. 10. The load center would therefore border on position one in the figure. The controller-regulator unit should be as close to the power outlet as possible (position two) so that attachment cables may be short. The recorders and

FIG. 10
SYSTEM LAYOUT

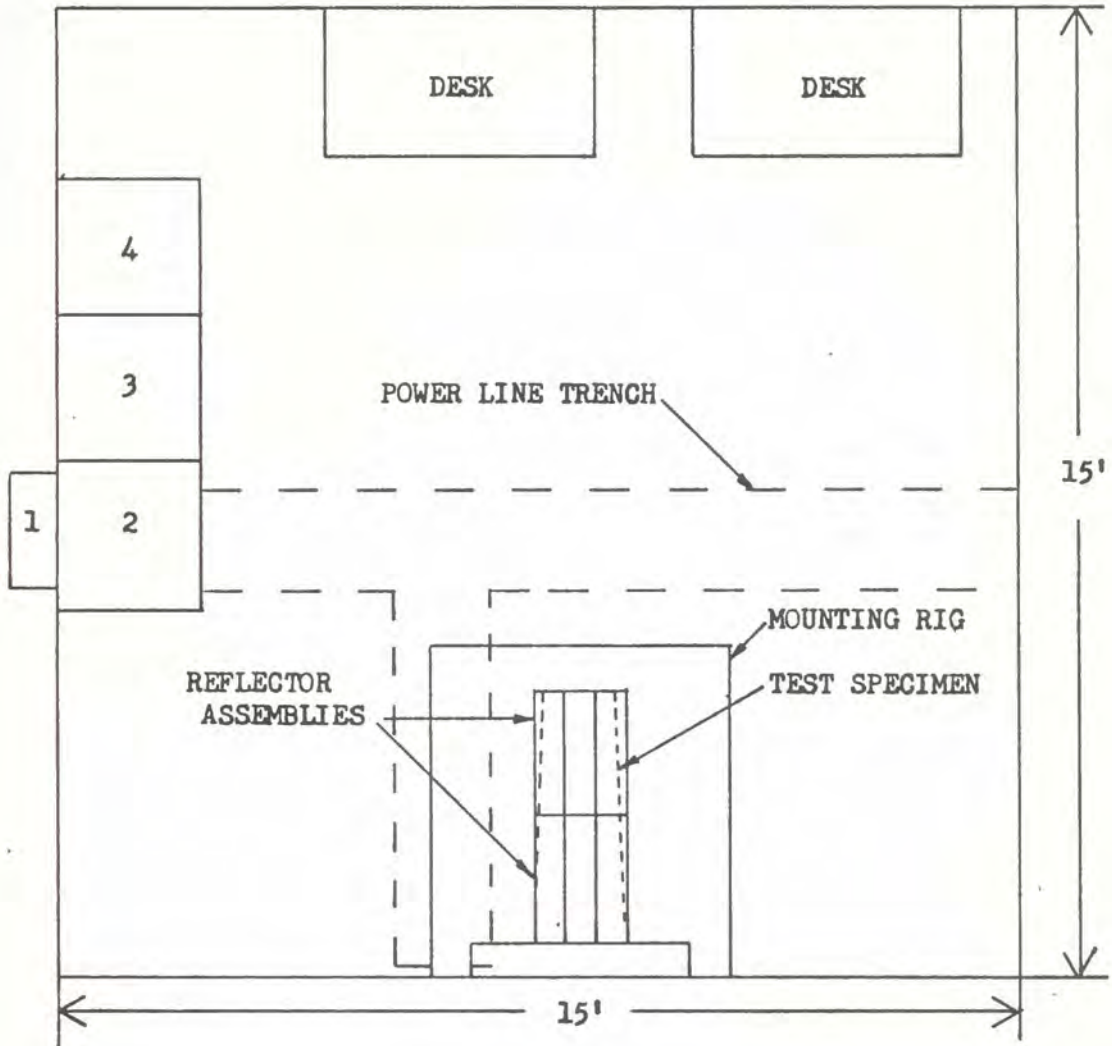

1. POWER INLET AND CIRCUIT BREAKER
2. POWER CONTROLLERS AND REGULATORS
3. RECORDERS
4. PROGRAMMER

programmer were placed next to the power regulators so that one person may tend all controls. The mounting platform with test specimen is close enough to the operator positions to be observed, but not so close as to be uncomfortable or dangerous at high temperatures.

Alternate Proposals and Cost Analysis

In order to show the cost of building a facility with a variety of capabilities, Table II has been prepared. Proposals shown vary in cost from \$20,780 to \$11,500. All costs are approximate list prices which may be discounted about 15%. This is approximately the cost for installation, however, so list prices as shown can be considered realistic.

In selecting proposals, it was considered that the test area of nine square feet should be kept constant. This is considered a minimum test area for maximum capability and flexibility of the testing facility.

Proposal one is the one previously described. Proposal two is identical except that no programmer is included. This would restrict its use to applications

TABLE II COMPARISON OF SELECTED FACILITY PROPOSALS

PROPOSAL	1	2	3	4	5	6	7	8
CHANNELS	3	3	1	1	3	3	1	1
MAX TEMP	2000°F	2000°F	2000°F	2000°F	1000°F	1000°F	1000°F	700°F
TEST AREA	9 ft ²	9 ft ²	9 ft ²	9 ft ²	9 ft ²	9 ft ²	9 ft ²	9 ft ²
POWER (ALL 3 PHASE)	480 v 900 amp	480 v 900 amp	480 v 900 amp	480 v 900 amp	460 v 100 amp	460 v 100 amp	460 v 100 amp	460 v 100 amp
CONTROLLER REGULATOR	IGNITRON 1 \$8,000	IGNITRON 1 \$8,000	IGNITRON 1 \$3,500	IGNITRON 1 \$3,500	SCR \$7,000	SCR \$7,000	SCR \$7,600 2	SCR \$2,500
REFLECTORS & LAMPS	GOLD \$1,280	GOLD \$1,280	GOLD \$1,280	GOLD \$1,280	GOLD \$1,280	GOLD \$1,280	GOLD \$1,280	ALUMINUM \$1,000
RECORDERS	2-8 CHANNEL \$6,000	2-8 CHANNEL \$6,000	2-8 CHANNEL \$6,000	2-8 CHANNEL \$6,000	2-8 CHANNEL \$6,000	2-8 CHANNEL \$6,000	1-8 CHANNEL \$3,000	2-8 CHANNEL \$6,000
PROGRAMMER	3 CHANNEL \$3,500	NONE 0	1 CHANNEL \$2,000	NONE 0	3 CHANNEL \$3,500	NONE 0	1 CHANNEL 0 2	NONE 0
THERMOCOUPLES & MISC.	\$2,000	\$2,000	\$2,000	\$2,000	\$2,000	\$2,000	\$2,000	\$2,000
TOTAL COST	\$20,780	\$17,280	\$14,780	\$12,780	\$19,780	\$16,280	\$13,880	\$11,500

1 NEEDS WATER COOLING

2 ONE UNIT INCLUDES CONTROLLER, REGULATOR, PROGRAMMER, AND ONE RECORDER

NOTE - ALL PRICES ARE APPROXIMATE AND INCLUDE INSTALLATION

where conditions under steady state temperatures (rather than transient temperatures) are being tested. As previously stated, a programmer could be added later with no further modifications to the facility necessary.

Proposals three and four are identical to one and two respectively except that only one channel of heating is provided. This would restrict applications to those of constant temperature. These facilities, therefore, would be unable to simulate the classical aerodynamic heating problem whereby a temperature gradient exists along the chordwise perimeter as shown in Fig. 2.

Although a one channel facility could later be converted to a multichannel facility, this is not as economical as initially purchasing the three channel unit.

Proposals five through seven are restricted in temperature capability to 1000^oF. Significant is the fact that current requirements are reduced to 100 amps at 460 volts for these facilities. This permits the less expensive, solid state SCR units to be used for power regulation. Other variations in these proposals

are as before except that in proposal seven, a single unit is proposed which includes controller, regulator, programmer, and recorder. An additional recorder should still be purchased, however, if strain gage information is to be recorded.

Proposal eight is the least expensive version proposed. Temperature capability is restricted to 700^oF since uncooled aluminum reflectors are to be used. Also, no programmer is included.

Table III shows a comparison of the eight proposals with the cost of power extension and loading added to obtain a total installation cost for any of the three proposed locations. Note that the cost of power extension to location three for proposals five through eight is significantly less than the others. The reason for this is that 440 volt, 60 amp power already exists at this location. The estimate of \$1000 is therefore only for a duplication of this power line to provide a total of 120 amps.

A most significant conclusion which can be drawn from this comparison is the fact that a 100% gain in maximum temperature capability may be had for an average

TABLE III TOTAL INSTALLED COST IN ALTERNATE LOCATIONS

PROPOSAL	1	2	3	4	5	6	7	8
FACILITY COST	\$20,780	\$17,280	\$14,780	\$12,780	\$19,780	\$16,280	\$13,880	\$11,500
POWER AND LOADING LOCATION 1	1,000	1,000	1,000	1,000	1,000	1,000	1,000	1,000
POWER AND LOADING LOCATION 2	6,000	6,000	6,000	6,000	3,000	3,000	3,000	3,000
POWER AND LOADING LOCATION 3	8,000	8,000	8,000	8,000	1,000	1,000	1,000	1,000
TOTAL COST LOCATION 1	21,780	18,280	15,780	13,780	20,780	17,280	14,880	12,500
TOTAL COST LOCATION 2	26,780	23,280	20,780	18,780	22,780	19,280	16,880	14,500
TOTAL COST LOCATION 3	28,780	25,280	22,780	20,780	20,780	17,280	14,280	12,500

of 20% increase in cost. Also, a 300% increase in temperature controllability (three channels versus one) may be had for an average 30% increase in cost. Proposal one is an excellent value, therefore, compared to the others and is recommended for installation at USNPS.

Clam Shell Furnance

Although the above described facility is flexible enough to handle most problems involving thermal effects on structures, there is one type of problem which it will not handle. That problem is one involving the use of cylindrical or near cylindrical shapes. An example might be an investigation of creep in a cylinder under compression in a universal testing machine and at a raised temperature. Recommended apparatus for this type of test is a clam shell furnance, again using quartz tube lamps as the source of heat. Such a furnance need not be capable of as rapid a response rate as a wing test facility. Since losses are low in an enclosed furnance and the nature of typical tests does not require rapid heating, the furnance need not require a great deal of power. Power regulation and control may therefore be

accomplished by thyratron equipment presently owned by the Aeronautics Department. The only purchase necessary then to commence this type of testing is the furnace itself. The cost of this unit is \$1100 complete with lamps.

Line Heater

One piece of equipment which would prove useful for laboratory work in conjunction with a thermoelectricity course is a line heater. This is a heating device which provides a high intensity heat source along a line from ten to thirty inches long. Such a device would prove useful in conjunction with an experiment involving stresses in a flat plate with a thermal gradient. Details of such a proposed experiment will be included in the following section.

The line heater recommended is of the infrared elliptical reflector type. This type would generate a highly concentrated radiant heat flux density along a thin line at the external focal axis of an elliptical reflector. The focal line is adjustable to accommodate various specimen thicknesses. Specimen temperature along the line can be raised to 2000°F in less

than 30 seconds at 288 volts and 8.34 amps input in a typical heater. Such a heater including the lamp sells for about \$150.

In order to regulate heater power to control specimen temperature, a power regulator unit will be needed. For currents in this range solid state devices are adequate and compact. The regulator should be capable of manual control or accept an input signal from an external automatic control system for maximum flexibility. Such a power regulator is currently available for about \$200. The combined cost for this line heating facility therefore is about \$350.

X. FACILITY USES

There are many ways in which a thermal effects testing facility such as has been described may be used. A primary use should be to provide facilities for laboratory experiments in conjunction with a thermoelasticity course. Laboratory demonstration of classic principles is mandatory for successful instruction in this field. In addition to this, students must have a means of conducting experimental investigations of high temperature effects in conjunction with thesis work.

In this section, experiments and investigations will be suggested which would fit into both programs. Obviously, all possibilities for study will not be discussed; however, it is hoped that ideas for interesting and useful investigations will be precipitated by the proposals which follow.

Determination of Thermal Stresses in a Flat Plate

An experiment which should be included as a laboratory experiment in a thermoelasticity course is the determination of stresses in a flat plate. The object of this experiment is to compare experimentally determined stresses with calculated stresses in a flat plate


of known dimensions and material and at an established temperature gradient.

Fig. 11 shows a top view of the proposed test setup. The flat plate is $\frac{1}{4}$ inch thick, 7075 aluminum alloy, measuring 16 inches by 24 inches. This will be mounted horizontally with ends restrained. The line heater is to be mounted under the plate and applies high intensity heat to the plate. On both edges a water pipe is mounted with the edge of the flat plate welded to the pipe. Eighteen strain gage rosettes and thermocouples are to be mounted as shown on the top of the plate. On both sides of the plate can be placed an asbestos cover.

With this setup, then, a linear temperature distribution can be established from the center outward with the outer edge temperature adjusted by varying the flow of cooling water through the pipes. The center temperature is adjusted by the power regulator. Edges will be restrained in a horizontal plane and either restrained or unrestrained in either longitudinal direction.

The procedure is to set 300°F at the center and 100°F at the edges by appropriate adjustment of the heater and water flow. When the temperature distribu-

FIG. 11 TOP VIEW OF FLAT PLATE

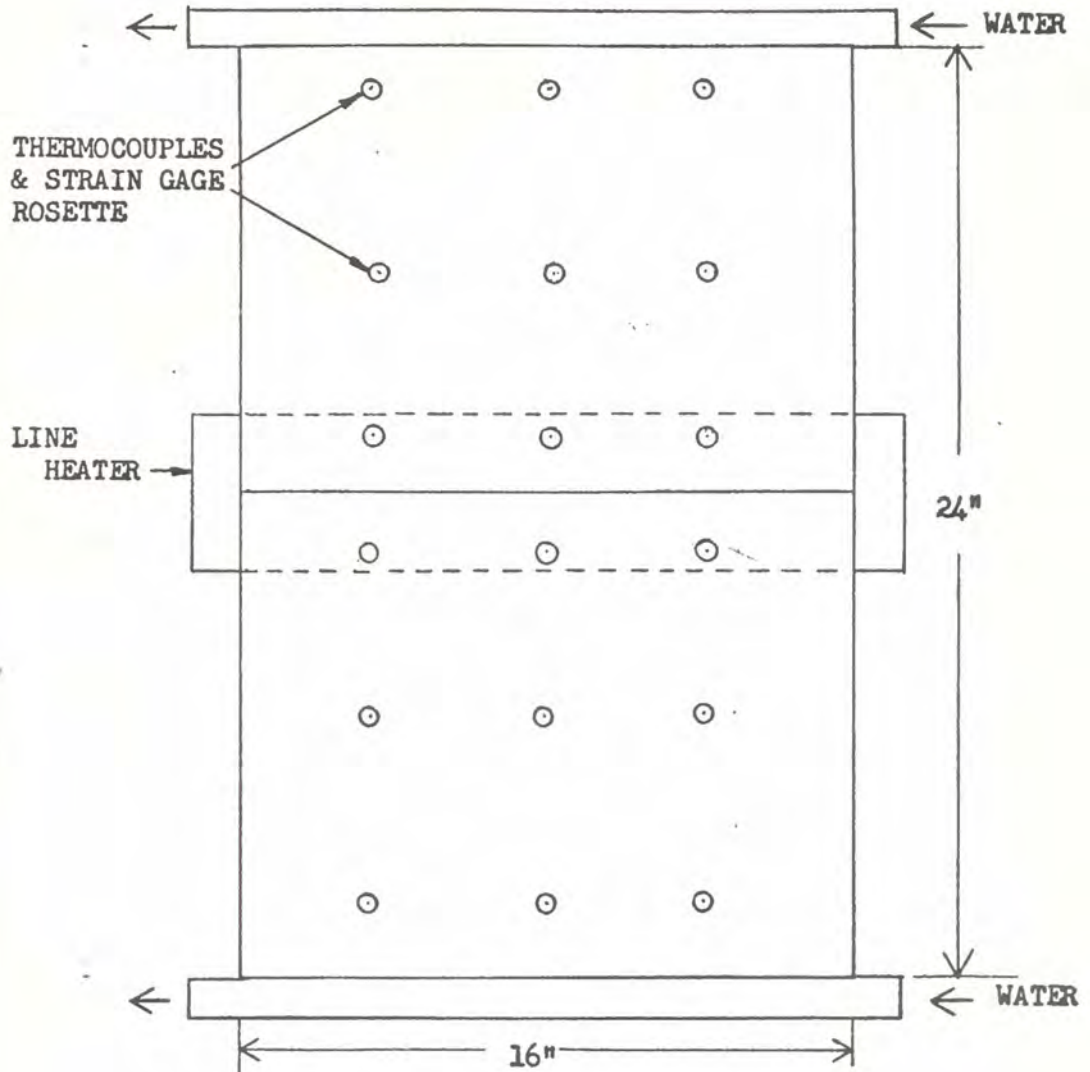

MATERIAL - 1/4" 7075 ALUMINUM ALLOY

tion is observed to be linear from the center outward, read all temperatures and strains. A second run with the centerline at 500°F and the edge at 100°F should also be performed. Each of these runs should be performed with edges restrained in the longitudinal direction and then repeated with these edges unrestrained.

Several observations can be made when results are plotted. First, the observed stresses can be compared with previously calculated theoretical stresses. Second, discrepancies in high and lower temperature runs can be observed and attributed to changes in properties of the metal. Third, the effects of end restraint can be observed. Fourth, tendency of the plate to buckle will be indicated by unsymmetrical strain readings in symmetrical locations.

Investigation of Thermal Stresses in a Missile Tail

To conduct this experiment, it would first be necessary to obtain a tail surface from a supersonic missile. Talos, Bomarc, and Tartar are designed to fly at about Mach 3.0. Surfaces from these missiles would be of an ideal size for testing in the proposed facility. Temperatures encountered at Mach 3.0 range to about 600°F at 50,000 ft.

The surface should be mounted horizontally in the testing facility. Eight strain gages and eight thermocouples should then be mounted on the test specimen and the reflector modules mounted so as to be one inch from the specimen surface.

With this setup, a series of tests can be run on the tail surface with the strain distribution measured for both constant temperatures and temperature gradients. First, the temperature should be raised in steps to 600°F. Next, the temperature should be raised at gradually increasing rates to 600°F by use of the programmer. A plot of both strain and temperature versus time should be obtained for these runs on the multichannel recorders. Next, a flight profile can be programmed such that the leading and trailing edges are higher as the temperature increases to 600°F.

When these tests have been completed, the curves of temperature versus stress can be compared to theoretical calculations. Conclusions can then be drawn as to the effect of temperature, temperature gradients, and temperature rates of change on the tail surface. The type of construction can then be evaluated for use on high Mach number vehicles.


Equipment necessary for this experiment includes a testing facility capable of heating nine square feet of surface to 600°F. Three channel temperature control and programming will also be necessary. Proposals one or five as previously described would meet these requirements.

Investigation of Natural Frequency Change with Temperature of a Titanium Wing Model

A phenomena important in aeroelastic design is the change of natural frequency of an object with temperature change. In order to study this effect, it will first be necessary to construct a model. It is suggested that this be constructed of titanium. A six cell model such as shown in Fig. 12 would be adequate. Top and bottom are flat plates 1/8 inch thick. Webbing consists of seven channel sections of 0.062 inch sheet riveted to top and bottom. Such a model could readily be constructed in the USNPS machine shop. Titanium is recommended so that the model may be used for other tests in which material constants of this material are important.

When the model is constructed, mount it horizontally

FIG. 12 MULTICELL WING MODEL

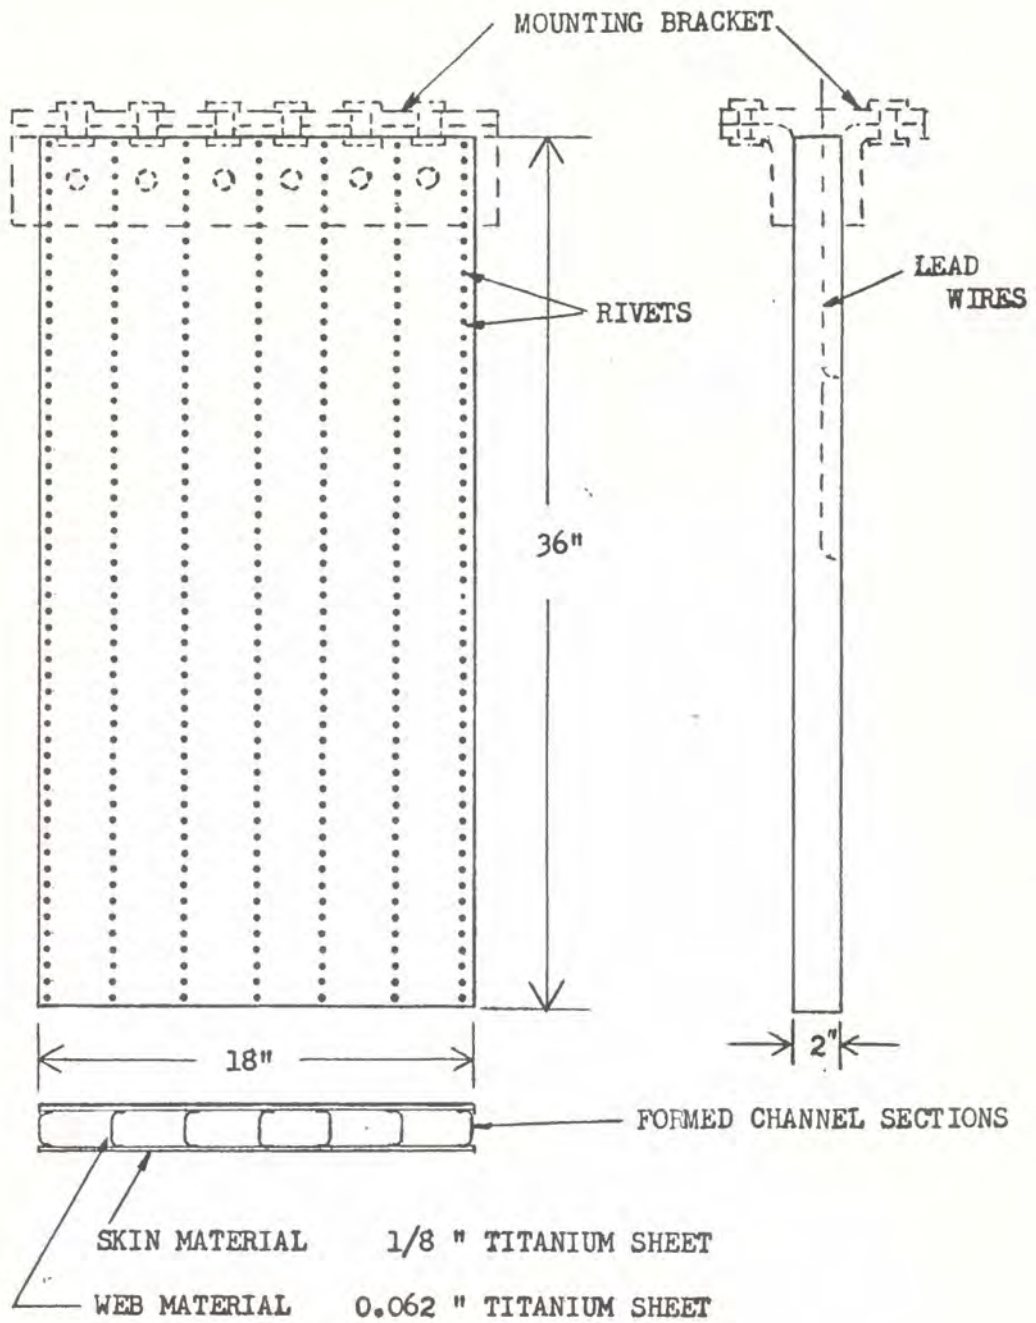

and attach a shaker to the root of the model. Attach several high temperature strain gages near the free end of the model. Determine the natural frequency by changing the frequency of the driving force and observing the response on a cathode ray oscilloscope until a first mode resonant peak is found. Then mount the heaters above and below the model. Care must be taken that the amplitude of vibration is not sufficient to strike the quartz tube lamps. Next, the temperature of the model should be raised in 100°F increments and the natural frequency determined at each step.

Results can be plotted in the form of a curve of ω_t/ω_0 versus temperature. It will be observed that the natural frequency reduces with increasing temperature. Observed results can then be compared with a theoretical analysis of the model.

Equipment necessary for this experiment is included in proposals one, two, three, or four.

Investigation of Reradiation Effect on Heat Transfer in a Multicell Wing

The principal mode of heat transfer in a multicell wing at low temperature is conduction. Convection and

reradiation within the cells plays an insignificant roll. However, since heat transfer by radiation at a point inside the structure is proportional to the difference between the fourth power of the temperature at that point and the fourth power of all other points in the line of sight, the reradiation effect becomes increasingly important as the temperatures and the temperature gradients increase.

This experiment, therefore, is to evaluate the extent of reradiation on the temperature of the webs under various heat transfer conditions. The model described in the previous experiment will do as a test specimen.

The model should be mounted horizontally in the thermal testing facility with heaters on both sides. Thermocouples for temperature control should be attached to the surface and additional thermocouples attached along the centerline of the inner web for measurement. Then, from room temperature, the temperature of the model should be raised at a constant rate to a selected temperature which should be 100°F higher each run. Results will be in the form of a

plot of skin temperature and web temperature versus time for each value of skin temperature selected. Then the same procedure should be repeated, only this time with a shielding installed along the inside of the outside skin. This shielding should be designed to reduce the effect of radiation of the inner skin to a minimum.

Comparison of the result of the two sets of data will show that reradiation causes the inner web to rise in temperature faster than when shielded. Since temperature gradients within the structure are the primary cause of thermal stresses, it can be concluded that, from this point of view, reradiation within the structure is a desirable effect.

XI. CONCLUSIONS

In the analysis it was shown that the study of thermal effects on aircraft structures is both necessary and feasible. The most practical method of testing is by use of an external radiant heating source with loads, when necessary, applied mechanically. Due to the effects of scaling, the facility should be capable of testing full scale components of large models.

The recommended facility is capable of heating nine square feet up to 2000^oF. Three channels are proposed to simulate temperature gradients. The heat source is an array of quartz tube lamps mounted in reflectors with gold plating. Power regulation is of the ignitron type. A three channel programmer and two eight channel recorders are included. Control signal feedback is surface temperature. Total cost including loading platform and installation is \$20,780. Alternate proposals are included.

Also recommended for purchase is a clam shell heater and a line heater. These cost \$1100 and \$350 respectively including necessary support equipment. Some uses for these items and the main testing facility have been discussed in detail.

The total estimated cost for all recommended equipment is \$22,230. Purchase of this equipment is considered a sound investment for USNPS.

XII. BIBLIOGRAPHY

1. Horton, W. H., The Simulation of Heat and Load Environment in High Speed Vehicles, Engineers Thesis, Stanford University, Stanford California, 1959.
2. Hoff, N. J., High Temperature Effects in Aircraft Structures, Pergamon Press, 1958.
3. Loria, J. C. and Blackstock, W. J., Aerodynamic Heating of Aircraft Structures in High-speed Flight, (Notes for a Special Summer Seminar), Chapter 18, Massachusetts Institute of Technology, 1956.
4. O'Sullivan, W. J., Theory of Aircraft Structural Models Subject to Aerodynamic and External Loads, NACA TN 4115, Sept., 1957.
5. Molyneaux, W. G., A Consideration of the Similarity Requirements for Aerothermoelastic Tests on Reduced Scale Models, Proceedings of Symposium on Aerothermoelasticity, USAF ASD TR 61-645, Nov., 1961.
6. Ting, L., Similarity Conditions for Testing High Speed Aircraft Models, Polytechnic Institute of Brooklyn, PIBAL Rep. no. 308, Nov., 1956.

7. Dugundji, J. and Calligeros, J., Similarity Laws for Aerothermoelastic Testing, Journal of Aerospace Sciences, Vol. 29, No. 8, August, 1962.
8. Loria, J. C., Mar, J. W., and Blackstock, W. J., The Design and Application of the MIT Radiant Heating Structural Test Facilities, Proceedings of the Society for Experimental Stress Analysis, Vol. XV, No. 1, 1957.
9. Trussell, D. H. and Weidman, D. J., A Radiant Heater to Simulate Aerodynamic Heating in a Wind Tunnel, NASA TN D-530, Nov. 1960.
10. Horton, W. H. and Johnson, R. W., The Stanford Aeronautics and Astronautics Department Hypersonic Wind Tunnel for Structural Research, SUDAER No. 164, August, 1963.
11. Campbell, J. D., A Feedback System for Automatic Control of Simulated Aerodynamic Heating, Engineers Thesis, Stanford University, Stanford, California, August, 1962.
12. Geronime, E. L., A Digital-Analog Computer Control for Use in an Aerodynamic Heat Simulation System, Engineers Thesis, Stanford University, Stanford, California, 1962.

13. Watson, R. M., A Heat Flow Measurement System for a Radiant Heating Test Facility, Engineers Thesis, Stanford University, Stanford, California, 1962.
14. Berman, J. S., Research into the Application of Radiant Heating Structural Testing of Aircraft at Elevated Temperatures, Final report submitted by Research Inc., Minneapolis, Minn. to WADC under contract AF 33(616)-2162, June 1954.
15. Horton, W. H., Experimental Methods in Kinetic Heat Tests, Aircraft Engineering, August, 1957.
16. Duberg, J. E., Some NACA Research on the Effect of Transient Heating on Aircraft Structures, Symposium on Structures for Thermal Flight, ASME, 1956.
17. Anonymous, Research Inc. (Controls Division) Catalogue of Thermal Testing Components, 1965.
18. Baird, R. B. and Brouns, R. C., Aircraft Structural Testing Techniques at Elevated Temperatures, Symposium on Structures for Thermal Flight, ASME, 1956.
19. Hoff, N. J. and others, Theory and Experiment in the Solution of Structural Problems of Supersonic Aircraft, Polytechnic Institute of Brooklyn, WADC TR 55-291, March, 1956.

20. Hoff, N. J. and others, Induction Heating and Theory in the Solution of Transient Problems of Aircraft Structures, Polytechnic Institute of Brooklyn, WADC TR 56-145, August, 1956.
21. Schultz, Experiments on Thermal Properties of Honeycomb Sandwiches Using a Radiant Heat Source, Thesis, USNPS, 1965.
22. Dove, R. C. and Adams, P. H., Experimental Stress Analysis and Motion Measurement, Clark E. Merrill Books, Inc., Columbus, Ohio, 1964.

APPENDIX A

Derivations of basic similarity parameters will be shown. The development is that of Dugundji (7). Symbols used are listed at the end of this Appendix.

Aerodynamic Similarity

Of primary importance in aerodynamic similarity are the pressure distribution and heat transfer rate due to external flow. The following are the applicable equations for a compressible, viscous, heat-conducting perfect gas:

Continuity:

$$\frac{\partial \rho}{\partial t} + \left(\frac{\partial}{\partial x_k} \right) (\rho v_k) = 0 \quad (1)$$

Momentum:

$$\rho \left[\frac{\partial v_j}{\partial t} + v_k \frac{\partial v_j}{\partial x_k} \right] = - \frac{\partial p}{\partial x_j} + \frac{\partial}{\partial x_k} \left[\mu \left(\frac{\partial v_j}{\partial x_k} + \frac{\partial v_k}{\partial x_j} \right) \right] - \frac{2}{3} \frac{\partial}{\partial x_j} \left(\mu \frac{\partial v_k}{\partial x_k} \right) \quad (2)$$

Energy:

$$\rho c_p \left[\frac{\partial T}{\partial t} + v_k \frac{\partial T}{\partial x_k} \right] = \frac{\partial p}{\partial t} + v_k \frac{\partial p}{\partial x_k} + \frac{\partial}{\partial x_j} \left(k \frac{\partial T}{\partial x_j} \right) + \mu \left[\frac{\partial v_j}{\partial x_k} \left(\frac{\partial v_j}{\partial x_k} + \frac{\partial v_k}{\partial x_j} \right) - \frac{2}{3} \left(\frac{\partial v_k}{\partial x_k} \right)^2 \right] \quad (3)$$

State:

$$p = \rho \left(\frac{R}{m} \right) T \quad (4)$$

The boundary conditions are:

Free stream:

$$\sqrt{v_k v_k} = V \quad \rho = \rho_\infty \quad T = T_\infty \quad (5)$$

Body forces:

$$(x_j)_d = (x_j)_u + u_j \quad (6)$$

$$v_j = \frac{\partial u_j}{\partial t} \quad (7)$$

$$(T)_{AIR} = (T)_{BODY} \quad (8)$$

$$q_A = \left(-k \frac{\partial T}{\partial n}\right)_{gas} = \left(-k \frac{\partial T}{\partial n}\right)_{body} \quad (9)$$

If the following nondimensional quantities are introduced:

$$\bar{x}_j = x_j/L \quad \bar{\rho} = \rho/\rho_\infty \quad \hat{c}_p = c_p/c_{p\infty}$$

$$\bar{t} = t/t_0 \quad \bar{P} = P/\rho_\infty V^2 \quad \hat{k} = k/k_\infty \quad (10)$$

$$\bar{v}_j = v_j/V \quad \bar{T} = T/T_0 \quad \hat{\mu} = \mu/\mu_\infty$$

$$\bar{U}_j = U_j/U_0 \quad \bar{K} = K/K_0$$

the applicable equations and boundary conditions reduce to:

$$\left(\frac{L}{v t_0}\right) \frac{\partial \bar{P}}{\partial \bar{t}} + \frac{\partial}{\partial \bar{x}_k} (\bar{\rho} \bar{v}_k) = 0 \quad (11)$$

$$\bar{\rho} \left[\left(\frac{L}{v t_0}\right) \frac{\partial \bar{v}_j}{\partial \bar{t}} + \bar{v}_k \frac{\partial \bar{v}_j}{\partial \bar{x}_k} \right] = - \frac{\partial \bar{P}}{\partial \bar{x}_j} + \left(\frac{\mu_\infty}{\rho_\infty V L}\right) \left[\frac{\partial}{\partial \bar{x}_k} \left(\hat{\mu} \frac{\partial \bar{v}_j}{\partial \bar{x}_k} \right) + \dots \right] \quad (12)$$

$$\begin{aligned} \bar{p} \hat{C}_p \left[\left(\frac{L}{V t_0} \right) \frac{\partial \bar{T}}{\partial \bar{t}} + \bar{v}_k \frac{\partial \bar{T}}{\partial \bar{x}_k} \right] &= \left(\frac{V^2}{C_{p\infty} T_0} \right) \left[\left(\frac{L}{V t_0} \right) \frac{\partial \bar{P}}{\partial \bar{t}} + \bar{v}_k \frac{\partial \bar{P}}{\partial \bar{x}_k} \right] \\ &+ \left(\frac{k_\infty}{C_{p\infty} \mu_\infty} \right) \left(\frac{\mu_\infty}{\rho_\infty V L} \right) \frac{\partial}{\partial \bar{x}_k} \left(\hat{K} \frac{\partial \bar{T}}{\partial \bar{x}_k} \right) + \left(\frac{V^2}{C_{p\infty} T_0} \right) \left(\frac{\mu_\infty}{\rho_\infty V L} \right) \\ &\left[\hat{\mu} \left(\frac{\partial \bar{v}_j}{\partial \bar{x}_k} \right) \left(\frac{\partial \bar{v}_j}{\partial \bar{x}_k} + \dots \right) \right] \end{aligned} \quad (13)$$

$$\bar{p} = \left[\frac{\rho T_0}{(m V^2)} \right] \bar{p} \bar{T} \quad (14)$$

Free stream:

$$\sqrt{\bar{v}_k \bar{v}_k} = 1 \quad \bar{p} = 1 \quad \bar{T} = \frac{T_\infty}{T_0} \quad (15)$$

Body surface:

$$(\bar{x}_j)_d = (\bar{x}_j)_u + \left(\frac{u_0}{L} \right) \bar{u}_j \quad (16)$$

$$\bar{v}_j = \left(\frac{u_0}{L} \right) \left(\frac{L}{V t_0} \right) \left(\frac{\partial \bar{u}_j}{\partial \bar{t}} \right) \quad (17)$$

$$(\bar{T})_{air} = (\bar{T})_{body} \quad (18)$$

$$\left(\frac{k_\infty}{k_0} \right) \left(\hat{K} \frac{\partial \bar{T}}{\partial \bar{h}} \right)_{gas} = \left(\hat{K} \frac{\partial \bar{T}}{\partial \bar{h}} \right)_{body} \quad (19)$$

Upon consideration of the above equations it becomes apparent that if certain nondimensional parameters are identical for both the model and prototype, then the nondimensional equations would be the same for both cases. This would lead to identical solutions for such unknowns as \bar{P} , \bar{T} , \bar{p} and \bar{v}_j . Knowledge of these quantities would then lead to the solution for corresponding quantities

on the prototype by use of equations (10). The so called "similarity parameters" that must be equal for both model and prototype are seen to be:

$$\begin{array}{cccc}
 M_{\infty} & Re_{\infty} & Pr & \gamma \\
 \frac{Vt_o}{L} & \frac{u_o}{L} & \frac{T_o}{T_{\infty}} & \frac{k_{\infty}}{K_o} \\
 \hat{c}_p & \hat{k} & \hat{\mu} & \hat{K} & \bar{T}_B & \bar{u}_j
 \end{array} \quad (20)$$

The first four parameters are Mach number, Reynolds number, Prandtl number and specific heat ratio for the free stream. The "unsteady parameter", $\frac{Vt_o}{L}$, "deflection parameter", $\frac{u_o}{L}$, and temperature ratio parameter, $\frac{T_o}{T_{\infty}}$, define appropriate reference time, t_o , reference deflection, u_o , and reference temperature, T_o , respectively. $\frac{k_{\infty}}{K_o}$ concerns similarity of body surface temperatures. Circumflexed quantities (\hat{c}_p , \hat{k} , $\hat{\mu}$, and \hat{K}) depend only on temperature and serve to require that variations of these quantities with temperature variations be the same for both model and prototype. This condition will be satisfied if the same gas and material is used in each case and if a common reference temperature, T_o , is used. \bar{T}_B and \bar{u}_j require body temperatures and deflections to be similar.

The above development, as stated, is for the general case of aerodynamic heating. If, however, it becomes

convenient for a given problem to consider only the case of aerodynamic pressure distribution, appropriate simplifications can be made by assuming a nonviscous non-heat-conducting fluid. In this case the similarity parameters are reduced to:

$$M_\infty, \gamma, \frac{Vt_0}{L}, \frac{u_0}{L}, \bar{c}_p, \bar{u}_j \quad (21)$$

Other more specialized problems may be investigated by making the appropriate assumptions and thereby reducing the similarity parameters to the minimum number acceptable.

On the other hand it may be desirable to consider only the problem of aerodynamic heat transfer. In this case some additional considerations are necessary. A later development will show the necessity of the Biot - number parameter:

$$\frac{q_A}{K_0} \frac{L}{T_0} \quad (22)$$

where q_A is the aerodynamic heat input rate. Since

$$q_A = (-k \frac{\partial T}{\partial n})_{gas},$$

the Biot - number parameter reduces to the general similarity condition $\frac{k_\infty}{K_0}$ as shown in (9) and (19). This assumes of course that \bar{T} is the same at corresponding points in the flow field. This will only occur if the complete set of dynamic similarity conditions (20) are satisfied.

A less restrictive example of aerodynamic heat transfer can be examined. Consider the case of two-dimensional steady flow over an isothermal, semi-infinite flat plate. The Prandtl boundary layer equations yield:

For laminar flow:

$$q_A = 0.332 \left(\frac{k}{x}\right) \sqrt{Re} (Pr)^{1/3} (T_{AW} - T_w) \quad (23)$$

For turbulent flow:

$$q_A = 0.029 \left(\frac{k}{x}\right) (Re)^{0.8} (Pr)^{1/3} (T_{AW} - T_w) \quad (24)$$

where T_{AW} is the adiabatic wall temperature.

If the assumption is made that pressure gradients are small, the properties in the above equations can be assumed to be equal to those just outside of the boundary layer or in the free stream. Using this assumption and placing the above heating rates into the general Biot - number parameter and combining with the general similarity parameters yields:

For laminar flow:

$$\left(\frac{k_\infty}{k_0}\right) \sqrt{Re_\infty} (Pr)^{1/3}, \quad \frac{T_{AW}}{T_0}, \quad \bar{T}_w \hat{k}, \quad \nearrow \quad (25)$$

For turbulent flow:

$$\left(\frac{k_\infty}{k_0}\right) (Re_\infty)^{0.8} (Pr)^{1/3}, \quad \frac{T_{AW}}{T_0}, \quad \bar{T}_w \hat{k}, \quad \nearrow \quad (26)$$

It can be concluded, then, that a temperature gradient along the plate will not effect the similarity results. A small conflict will result if laminar and turbulent flow are present on a plate simultaneously. This will be small, however. Of more importance would be insuring that the

transition point occurs at the same relative position on both model and prototype. This could be forced with a trip wire if necessary.

Heat Conduction Similarity

The primary means of heat flow within a structure is conduction. The applicable formula is therefore the Fourier equation:

$$\frac{\partial}{\partial x_j} \left(k \frac{\partial T}{\partial x_j} \right) = \rho_B c \frac{\partial T}{\partial t} \quad (27)$$

the boundary conditions being:

at the surface

$$-K \left(\frac{\partial T}{\partial n} \right) = q_A - \epsilon_w \sigma T_w^4 \quad (28)$$

$$\text{and at } t = 0, T = T_{Bi} \quad (29)$$

The following nondimensional quantities are introduced:

$$\begin{aligned} \bar{x}_j &= x_j/L & \hat{K} &= K/K_0 \\ \bar{t} &= t/t_0 & \hat{c} &= c/c_0 \\ \bar{T} &= T/T_0 & \hat{\epsilon}_w &= \epsilon_w/\epsilon_0 \end{aligned} \quad (30)$$

The following similarity parameters result:

$$\frac{q_A L}{K_0 T_0}, \quad \frac{\tilde{K}_0 t_0}{L^2}, \quad \frac{\epsilon_0 \sigma T_0^3 L}{K_0} \quad (31)$$

$$\hat{K}, \quad \hat{c}, \quad \hat{\epsilon}_w, \quad T_{Bi}/T_0$$

where thermal diffusivity $\tilde{k}_0 = k_0 / \rho_B c_0$

The first number is the Biot number, the second the Fourier number defining the reference time t_0 and the third involves reradiation effects. Circumflexed parameters again require temperature variations of these quantities to be similar for both model and prototype. The last parameter defines reference temperature in terms of initial body temperature.

As in the case of aerodynamic heating, less restrictive similarity conditions can be determined for certain special cases by making appropriate assumptions. Consider for example the case of heat conduction in a thin plate. It is assumed that in a plate of thickness δ , temperature rises uniformly through the thickness (in the x_3 direction). The heat conduction equation becomes:

$$\frac{\partial}{\partial x_1} \left(k \delta \frac{\partial T}{\partial x_1} \right) + \frac{\partial}{\partial x_2} \left(k \delta \frac{\partial T}{\partial x_2} \right) = \rho_B c \delta \frac{\partial T}{\partial t} - q_A + \epsilon_w \sigma T_w^4 \quad (32)$$

Upon nondimensionalizing the above equation the following similarity parameters evolve.

$$\frac{q_A L^2}{k_0 T_0 \delta}, \quad \frac{\tilde{k}_0 t_0}{L^2}, \quad \frac{\epsilon_0 \sigma T_0^3 L^2}{k_0 \delta} \quad (33)$$

$$\hat{K}, \quad \hat{C}, \quad \hat{\epsilon}_w, \quad T_{Bi}/T_0$$

These parameters are less restrictive than those in (31) since they allow the thickness ratio, δ/L , of the plate to be different in model and prototype. However, both must behave in a "thermally thin" manner as described by the assumption.

A further simplification can be made by assuming negligible heat conduction in the x_1 and x_2 directions as well as the x_3 direction. In this case the left side of equation (32) drops out and the similarity parameters become:

$$\frac{q_A t_0}{\rho_B c_0 T_0 \delta} \quad , \quad \frac{\epsilon_0 \sigma T_0^3 t_0}{\rho_B c_0 \delta} \quad (34)$$

$$\hat{c} \quad , \quad \hat{\epsilon}_w \quad , \quad \frac{T_{B_i}}{T_0}$$

This would be appropriate for example in the simulation of heat conduction in a thin, solid, two-dimensional wing.

A built up structure could be considered using parameters less restrictive than the general case (31) provided certain simplifications could be made for the period of time involved. For example, consider a multiweb wing with a "thermally thin" skin. During the early heating period the assumption could be made that the skin heats up before any heat is conducted into the webs. This would permit use of expressions numbered (33). If, in addition,

it can be assumed that heat flow in the x_2 and x_3 directions is negligible, then the less restrictive parameters (34) could be used. This would be appropriate for only early time investigations; however, this is when large temperature differences between skin and web occur and, therefore, the greatest thermal stresses.

Stress and Deflection Similarity

The stress and deflection equations for a three-dimensional, isotropic, heated elastic body can be written as:

$$\frac{\partial \sigma_{jk}}{\partial x_k} = \rho_B \left(\frac{\partial^2 u_j}{\partial t^2} \right) - \rho_B g_i \quad (35)$$

$$\begin{aligned} \frac{1}{2} \left(\frac{\partial u_j}{\partial x_k} + \frac{\partial u_k}{\partial x_j} \right) + \frac{1}{2} \left(\frac{\partial u_r}{\partial x_j} \frac{\partial u_r}{\partial x_k} \right) &= \frac{1+\nu}{E} \sigma_{jk} \\ - \frac{\nu}{E} \delta_{jk} \sigma_{rr} + \delta_{jk} \alpha (T - T_{B_i}) & \end{aligned} \quad (36)$$

These represent nine equations with which to solve for six unknown stresses, σ_{ij} , and three unknown deflections, u_j . The boundary conditions are:

$$T = (T)_{\text{prescribed}}$$

and either $u_j = (u_j)_{\text{prescribed}}$

or $\sigma_n = (\sigma_n)_{\text{prescribed}} = P_A + P_F$

$$\sigma_T = (\sigma_T)_{\text{prescribed}} \approx 0$$

The following nondimensional quantities are introduced:

$$\begin{aligned}
\bar{x}_j &= x_j/L & \bar{\sigma}_{jk} &= \sigma_{jk}/\sigma_0 & E &= E/E_0 \\
\bar{t} &= t/t_0 & \bar{u}_j &= u_j/u_0 & \hat{\alpha} &= \alpha/\alpha_0 \\
\bar{T} &= T/T_0
\end{aligned} \tag{37}$$

Following procedures as before yields the similarity parameters for the general case:

$$\begin{aligned}
\frac{\sigma_0 L}{E_0 u_0}, \quad \frac{\alpha_0 T_0 L}{u_0}, \quad \frac{u_0}{L}, \quad \frac{p_A}{\sigma_0}, \quad \frac{p_E}{\sigma_0} \\
\frac{\rho_B u_0 L}{\sigma_0 t^2}, \quad \frac{\rho_B g L}{\sigma_0}, \quad \nu, \quad \bar{E}, \quad \hat{\alpha}, \quad \bar{T}
\end{aligned} \tag{38}$$

The first parameter is the basic stress parameter. The second has to do with thermal stresses. The third parameter serves to define the reference deflection, u_0 , along with other parameters. It may be dropped for small deflections. The next two parameters define the reference stress, σ_0 . The first parameter in the bottom line concerns dynamic vibrations and defines reference time. The next parameter has to do with gravitational loadings. Meanings of remaining parameters are self-evident.

As in previous considerations, a set of less restrictive parameters can be obtained for specialized cases involving stress and deflection similarity. One structure

important to the aeronautical engineer is the plate. Wing panels are plates and sometimes entire wings can be treated as plates provided they are thin and low aspect ratio.

Appropriate for the case of large-deflection of a heated and laterally loaded isotropic plate of variable stiffness are the von Karman equations:

$$\frac{\partial^2}{\partial x_1^2} \left[D \left(\frac{\partial^2 u_3}{\partial x_1^2} + \nu \frac{\partial^2 u_3}{\partial x_2^2} \right) \right] + \frac{\partial^2}{\partial x_2^2} \left[D \left(\frac{\partial^2 u_3}{\partial x_1^2} + \nu \frac{\partial^2 u_3}{\partial x_2^2} \right) \right] + 2(1-\nu) \frac{\partial^2}{\partial x_1 \partial x_2} \left[D \frac{\partial^2 u_3}{\partial x_1 \partial x_2} \right] = \Delta p + \frac{\partial^2 F}{\partial x_1^2} \frac{\partial^2 u_3}{\partial x_1^2} \quad (40)$$

$$+ \frac{\partial^2 F}{\partial x_1^2} \frac{\partial^2 u_3}{\partial x_2^2} - 2 \frac{\partial^2 F}{\partial x_1 \partial x_2} \frac{\partial^2 u_3}{\partial x_1 \partial x_2} - \frac{1}{1-\nu} \left(\frac{\partial^2 M_T}{\partial x_1^2} + \frac{\partial^2 M_T}{\partial x_2^2} \right)$$

$$\frac{\partial^2}{\partial x_1^2} \left[\frac{1}{B} \left(\frac{\partial^2 F}{\partial x_1^2} - \nu \frac{\partial^2 F}{\partial x_2^2} \right) \right] + \frac{\partial^2}{\partial x_2^2} \left[\frac{1}{B} \left(\frac{\partial^2 F}{\partial x_1^2} - \nu \frac{\partial^2 F}{\partial x_2^2} \right) \right] + \quad (41)$$

$$2(1+\nu) \frac{\partial^2}{\partial x_1^2 \partial x_2^2} \left[\frac{1}{B} \frac{\partial^2 F}{\partial x_1 \partial x_2} \right] = (1-\nu^2) \left[\left(\frac{\partial^2 u_3}{\partial x_1 \partial x_2} \right)^2 - \frac{\partial^2 u_3}{\partial x_1^2} \frac{\partial^2 u_3}{\partial x_2^2} \right] - \frac{\partial^2}{\partial x_1^2} \left[\frac{N_T}{B} \right] - \frac{\partial^2}{\partial x_2^2} \left[\frac{N_T}{B} \right]$$

where: $\Delta p(x_1, x_2, t)$ is lateral loading on the plate due to aerodynamic, inertial, gravitational or other applied forces.

$$\Delta p = \Delta p_A - m \left(\frac{\partial^2 u_3}{\partial t^2} \right) - mg + P_F \quad (42)$$

The stress function F is defined as:

$$\frac{\partial^2 F}{\partial x_1^2} = N_{22} = \int_{-\frac{y_2}{2}}^{\frac{y_2}{2}} \sigma_{22} dx_3, \quad \frac{\partial^2 F}{\partial x_2^2} = N_{11} = \int_{-\frac{y_1}{2}}^{\frac{y_1}{2}} \sigma_{11} dx_3, \quad -\frac{\partial^2 F}{\partial x_1 \partial x_2} = N_{12} = \int_{-\frac{y_1}{2}}^{\frac{y_1}{2}} \sigma_{12} dx_3 \quad (43)$$

The extensional stiffness B is defined as:

$$B = \int_{-\delta/2}^{\delta/2} \frac{E}{1-\nu^2} dx_3 \quad (44)$$

The bending stress D is defined as:

$$D = \int_{-\delta/2}^{\delta/2} \frac{E x_3^2}{1-\nu^2} dx_3 \quad (45)$$

The thermal force N_T is defined as:

$$N_T = \int_{-\delta/2}^{\delta/2} E \alpha [T - T_{B_i}] dx_3 \quad (46)$$

The thermal moment M_T is defined as:

$$M_T = \int_{-\delta/2}^{\delta/2} E \alpha [T - T_{B_i}] x_3 dx_3 \quad (47)$$

Nondimensional quantities to be introduced are:

$$\begin{aligned} \bar{x}_i &= x_i/L & \bar{F} &= F/N_0 L^2 & N_T &= N_T/N_{T_0} \\ \bar{u}_3 &= u_3/u_0 & \hat{B} &= B/B_0 & M_T &= M_T/M_{T_0} \\ \bar{N}_{ij} &= N_{ij}/N_0 & \hat{D} &= D/D_0 & \bar{\sigma}_{ij} &= \sigma_{ij}/\sigma_0 \\ m &= m/m_0 & \overline{\Delta P_A} &= \Delta P_A/(\Delta P_A)_0 \end{aligned} \quad (48)$$

The resulting similarity parameters which occur when

the equations are made nondimensional are:

$$\begin{aligned} \frac{\Delta P_A L^4}{D_0 u_0} & \quad \frac{m_0 L^4}{D_0 t^2} & \quad \frac{m_0 g L^4}{D_0 u_0} & \quad \frac{\rho_F L^4}{D_0 u_0} \\ \frac{N_0 L^2}{D_0} & \quad \frac{L^2 M_{T_0}}{D_0 u_0} & \quad \frac{B_0 u_0^2}{N_0 L^2} & \quad \frac{N_{T_0}}{N_0} \end{aligned} \quad (49)$$

$$\hat{B} \quad \hat{D} \quad \hat{N}_T \quad \hat{M}_T \quad \bar{m} \quad \overline{\Delta P_A}$$

If deflections are small, $\frac{B_0 u_0^2}{N_0 L^2}$ may be neglected.

These parameters may be reduced by considering a plate of thickness $\delta = \uparrow L \bar{\delta}$. Thus the quantities B_0 , D_0 , N_{T_0} , M_{T_0} , and N_0 can be related to $\bar{\delta}$ using equations

(44) through (47) and the parameters become after rearrangement:

$$\begin{aligned} & \frac{(\Delta P_A)_0 L}{E_0 \uparrow^3 u_0}, \quad \frac{\rho_B L^2}{E_0 \uparrow^2 t_0^2}, \quad \frac{\rho_B g L^2}{E_0 \uparrow^2 u_0} \\ & \frac{\rho_F L}{E_0 \uparrow^3 u_0}, \quad \frac{\sigma_0}{E_0 \uparrow^2}, \quad \frac{\alpha_0 T_0 L}{u_0 \uparrow}, \quad \frac{u_0}{L \uparrow} \quad (50) \\ & \frac{\alpha_0 T_0}{\uparrow^2}, \quad \nu, \quad \bar{T}, \quad \bar{\delta}, \quad \overline{\Delta P_A} \end{aligned}$$

Again $\frac{u_0}{L \uparrow}$ may be neglected for small deflections, however, $\frac{\alpha_0 T_0 L}{u_0 \uparrow}$ and $\frac{\alpha_0 T_0}{\uparrow^2}$ must be mutually satisfied. Note that these parameters are less restrictive than the general plate parameters (49) since they permit variation of the thickness ratio \uparrow of the plates.

Use of the general plate parameters (49) has been indicated to provide similarity between multiweb and multi-spar wings of differing internal arrangement. Such "equivalent plate" wings have been discussed by Ting and others. (4, 5, 6)

Complete and Incomplete Aerothermoelastic Testing

Complete aerothermoelastic testing is achieved by the placing of a model in a wind tunnel such that the air stream will simulate completely the aerodynamic-heating-rate environment required for the model. In order for this to be accomplished, the general similarity parameters of the three previous sections must be combined. This was

done and after some rearrangement the following general similarity parameters resulted:

$$\begin{aligned}
 M_\infty, \quad Re_\infty, \quad \frac{k_\infty}{K_0}, \quad \frac{\rho V^2}{E_0}, \quad \alpha_{0T_0}, \quad \frac{\rho_B}{\rho_\infty} \\
 \frac{T_0}{T_\infty}, \quad \frac{\tilde{K}_0 t_0}{L^2}, \quad \frac{V t_0}{L}, \quad \frac{u_0}{L}, \quad \frac{\sigma_0}{E_0}, \quad \frac{PF}{E_0} \\
 \frac{\epsilon_0 \sigma T_0^3 L}{K_0}, \quad \frac{\rho_B g L}{\rho_\infty V^2}, \quad Pr, \quad \delta, \quad \nu, \quad \hat{k}, \quad \hat{c}_p \\
 \hat{\mu}, \quad \hat{K}, \quad \hat{c}, \quad \hat{E}, \quad \hat{\alpha}, \quad \hat{\epsilon}_w, \quad \frac{T_{Bi}}{T_0}
 \end{aligned} \tag{51}$$

Difficulties connected with the reconciliation of the first five parameters have been found to be insurmountable for any but a scale factor of unity. Attempts have been made to overcome this problem by the use of gasses other than air and materials other than those used on the prototype for tests. Even then results are generally poor. For these reasons attempts at complete aerothermoelastic testing are not recommended at USNPS.

If complete aerothermoelastic testing is not feasible, a testing technique called "incomplete aerothermoelastic testing" is available. In this case means other than air flow alone provide net aerodynamic pressure (P_{net}) and net heat transfer input (q_{net}) to the model. Parameters appropriate to this case were obtained by combining parameters

(31) and (39). After rearrangement the following parameters result:

$$\frac{q_{\text{net}} L}{K_o (T_o - T_{Bi})}, \quad \frac{P_{\text{net}}}{E_o}, \quad \alpha_o (T_o - T_{Bi})$$

$$\frac{\rho_B L^2}{E_o t_o^2}, \quad \frac{\tilde{K}_o t_o}{L^2}, \quad \frac{u_o}{L}, \quad \frac{\sigma_o}{E_o}, \quad \frac{\rho_B g L}{\sigma_o} \quad (52)$$

$$\hat{\nu}, \quad \hat{K}, \quad \hat{C}, \quad \hat{E}, \quad \hat{\alpha}$$

In the evaluation of P_{net} and q_{net} an estimate must first be made of the expected aerodynamic pressure p_A , aerodynamic heating rate q_A , and radiation loss $\epsilon \sigma T_w^4$ for both prototype and model. Then the necessary p_F and q_F is added externally to the model to satisfy the parameters. In spite of the apparent crudeness of this method, it is commonly used for structural testing at high temperature.

A further degree of freedom may be attained if it can be assumed that deflections are small for a given problem. In this case the $\frac{u_o}{L}$ parameter need not be satisfied and the second, third, and seventh parameters can be expressed as:

$$\frac{P_{\text{net}} L}{E_o u_o}, \quad \frac{\alpha_o (T_o - T_{Bi}) L}{u_o}, \quad \frac{\sigma_o L}{E_o u_o} \quad (53)$$

These are less restrictive since they allow greater freedom in that u_o can be chosen arbitrarily for both proto-

type and model.

If problems associated with adding P_F forces to the model are great, it may be desirable to simulate the complete P_{net} force by the air stream. In this case:

$$P_{net} = P_A = \rho_{\infty} V^2 \bar{p}$$

where \bar{p} is established by use of the general parameters

(21). The similarity parameters become:

$$\frac{q_{net} L}{K_o (T_o - T_{Bi})}, \quad M_{\infty}, \quad \frac{\rho_{\infty} V^2}{E_o}, \quad \alpha_o (T_o - T_{Bi})$$

$$\frac{\rho_B}{\rho_{\infty}}, \quad \frac{\tilde{K}_o t_o}{L^2}, \quad \frac{vt_o}{L}, \quad \frac{u_o}{L}, \quad \frac{\sigma_o}{E_o}, \quad \frac{\rho_B g L}{\rho_{\infty} V^2} \quad (54)$$

$$\delta, \quad \nu, \quad \hat{c}_p, \quad \hat{K}, \quad \hat{c}, \quad \hat{E}, \quad \hat{\alpha}$$

To satisfy the first parameter it will be necessary to add q_F to the model, possibly by use of radiant heaters within the wind tunnel. Tests on a device of this type have been completed by NASA (9).

TABLE OF SYMBOLS

b	= semichord of wing
B	= plate extensional stiffness
C	= specific heat of body material
c_p	= specific heat of gas at constant pressure
D	= plate bending stiffness
E	= Young's modulus
F	= stress function
G	= shear modulus
h	= wing thickness
g	= acceleration due to gravity
I	= area moment of inertia
J	= torsional stiffness constant
K	= heat conductivity of body material
k	= heat conductivity of gas
\tilde{k}	= thermal diffusivity
L	= characteristic length
M	= Mach number
m	= molecular weight, mass
M_t	= plate midplane thermal moment per unit length
N_t	= plate midplane thermal force per unit length
n	= normal direction

p = pressure
 Pr = Prandtl number
 q = heat flux per unit area
 \mathcal{R} = universal gas constant
 R = resistance
 Re = Reynolds number
 T = temperature
 T_1 = temperature distribution
 T_{aw} = adiabatic wall temperature
 t = time
 u_j = displacement component, deflection component
 V = free stream velocity, voltage
 v_j = velocity component, deflection component
 x_j = rectangular coordinate
 α = coefficient of thermal expansion
 δ = ratio of specific heats
 δ = thickness
 ϵ = emissivity
 ϵ_{jk} = strain component
 μ = viscosity of gas
 ν = Poisson's ratio
 ρ = density
 σ_{jk} = stress component

σ_n, σ_t = normal and tangential stresses on boundary

\uparrow = thickness ratio

SUBSCRIPTS

a = of aerodynamic origin

aw = adiabatic wall

b = body

d = deformed state

f = of nonaerodynamic origin

i = initial value

j, k, r = summation indices 1, 2, 3

m = model

o = reference value

p = prototype

u = undeformed state

w = wall value

∞ = free stream value

SUPERSCRIPTS


$(\bar{\quad})$ = nondimensional quantity

$(\hat{\quad})$ = nondimensional, temperature-dependent property variation

Note: Tensor summation convention for repeated indices is used.

thesW5851

A thermal testing facility for the Aeron



3 2768 001 95800 2

DUDLEY KNOX LIBRARY