


UNCLASSIFIED

AD NUMBER
AD480995
NEW LIMITATION CHANGE
TO Approved for public release, distribution unlimited
FROM Distribution authorized to U.S. Gov't. agencies and their contractors; Administrative/Operational Use; DEC 1965. Other requests shall be referred to Office of Naval Research, 875 North Randolph Street, Arlington, VA 22203.
AUTHORITY
ONR notice dtd 27 Jul 1971

THIS PAGE IS UNCLASSIFIED

480995

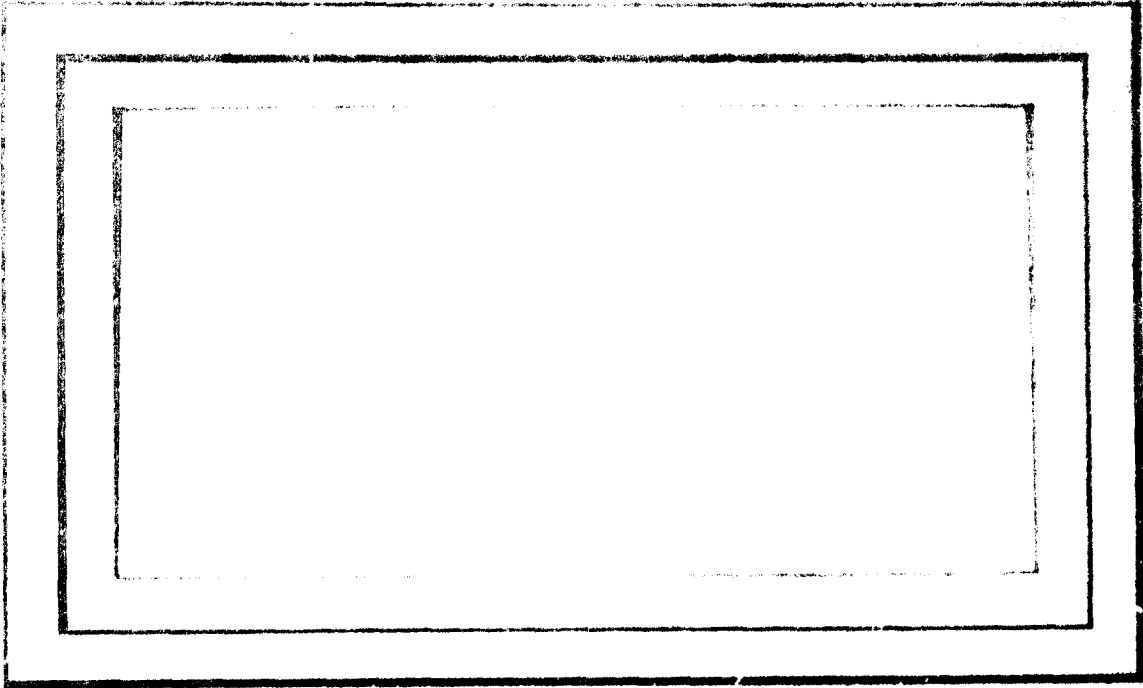

Therm
Advanced
Research, Inc.

100 HUDSON CIRCLE • ITHACA, NEW YORK

A COMPARISON OF DUCTED PROPELLER THEORY
WITH BELL X-22A EXPERIMENTAL DATA

by

Gary R. Hough & Alvin L. Kaskel

TAR-TR 6510

December 1965

Submitted to

Air Programs, Office of Naval Research
Washington, D. C.

In partial fulfillment of Contract Nonr-4357(00)

Approved:

Alfred Ritter
Alfred Ritter,
President

ABSTRACT

For the forward flight regime, a limited comparison is made between theoretical predictions of duct pressure distributions and data obtained from one-third and full scale model tests of the Bell X-22A ducted propeller unit. The theoretical calculations are based upon studies of ducted propellers with finite blade number which have been undertaken at Thermo Advanced Research, Inc. It is found that the theory is in reasonable agreement with experiment and generally tends to underestimate the measured pressures. Also, the characteristic shape of the predicted distribution agrees well with the measured distribution. More conclusive evaluation of the reliability and range of applicability of the theory is needed, not only for forward flight, but also for the static case and in transition.

Reproduction in whole or in part is permitted for any purpose of the United States Government.

TABLE OF CONTENTS

INTRODUCTION	1
CHAPTER ONE - BASIC THEORY	
1.1 Formulation	2
1.2 Application to X-22A Calculations	3
CHAPTER TWO - COMPARISON WITH ONE-THIRD SCALE EXPERIMENTS	
2.1 Model Data and Tests	4
2.2 Results	5
CHAPTER THREE - COMPARISON WITH FULL SCALE EXPERIMENTS	
3.1 Model Data and Tests	10
3.2 Results	10
3.3 Modifications to Theory	10
CONCLUSIONS	14
REFERENCES	15

NOMENCLATURE

C_{T_P}	propeller thrust coefficient, $T_P/\frac{1}{2}\rho U^2 \pi R_P^2$
c	duct chord, ft
C_P	duct surface pressure coefficient, $(p - p_\infty)/\frac{1}{2}\rho U^2$, see also Eq. (1)
J	propeller tip advance ratio, $U/\Omega R_P$
p	static pressure on duct surface, lb/ft ²
p_∞	free stream static pressure, lb/ft ²
R_P	propeller radius, ft
T_P	propeller thrust, lb
U	free stream velocity, ft/sec
u	total axial perturbation velocity on duct surface, ft/sec
x	axial distance from duct leading edge, ft
ΔC_P	duct net loading, or inner surface pressure coefficient minus outer surface pressure coefficient
ρ	fluid density, lb sec ² /ft ⁴
Ω	propeller angular velocity, rad/sec

INTRODUCTION

A comprehensive theoretical study of ducted propellers with finite blade number was undertaken at Therm Advanced Research, Inc.¹⁻⁹, the major portion of the study being concerned with the determination of the steady loading on the duct in forward flight at zero angle of attack. In order to facilitate preliminary design applications, the theory as developed^{1,2,4} has been put into the form of a simple numerical procedure^{5,8} which permits the rapid calculation of effects of varying duct parameters such as camber, thickness and chord-to-diameter ratio, as well as propeller parameters such as thrust coefficient, blade number, advance ratio, tip clearance, and axial location in the duct.

An essential part of this study would have been the experimental evaluation of the reliability and range of applicability of the theory as developed. Unfortunately, a lack of suitable experimental data on ducted propellers precluded such an evaluation. However, with the current design and development of the X-22A Tri-Service VTOL Aircraft by Bell Aerosystems Co., both one-third scale and full scale test results of a powered ducted-propeller configuration became available. These tests were not, of course, designed specifically to provide a means for verification of our theory. However, by a judicious choice of parameters and a careful examination of the test data, it was possible to extract sufficient results to enable us to obtain at least a preliminary comparison with our theoretical predictions.

The purpose of this report, then, is to make such a comparison for the forward flight regime at zero angle of attack. The first Chapter outlines briefly the basic mathematical model, the assumptions made and the development of the theory. Chapter Two is devoted to the comparison of the one-third scale X-22A test data with theoretical predictions while Chapter Three gives corresponding results for the comparison with the full scale X-22A tests. Finally, the results are summarized and appropriate conclusions drawn as to the degree of validity of the theory.

CHAPTER ONE
BASIC THEORY

1.1 Formulation

The three-dimensional theory of ducted propellers in forward flight as developed at Therm Advanced Research, Inc. has been reported previously¹⁻⁴. However, it appears appropriate to review briefly the basic ideas underlying the theory before proceeding to the details of the limited comparison with experiment. The mathematical model for the ducted propeller is formulated as follows. A lightly-loaded ducted propeller in uniform motion at zero angle of attack in an inviscid, incompressible fluid is considered. Viewed in propeller-fixed coordinates, the duct is replaced by suitable distributions of sources and vortices which are used to represent the effects of thickness and camber. These singularities are placed on an appropriate mean reference cylinder. The propeller is represented by the classical model of a bound, radial vortex line of varying circulation for each blade accompanied by associated trailing helical vortex sheets. The path of these trailing vortices is determined solely by the incoming free stream and the angular rotational velocity of the propeller.

If the duct geometry is specified and the form of the propeller circulation distribution is assumed, the formulation of the governing equations follows the procedures of thin lifting-surface theory. That is, we require the flow to be tangent everywhere to the duct surface and satisfy the Kutta condition at the trailing edge. Within the limitations of the theory, the problem of determining the steady duct loading is equivalent to the problem of a ring wing with the same thickness distribution but having an "effective" camber composed of the original duct camber plus the camber required to cancel the radial velocities induced by the propeller trailing vortices as well as by the sources used to provide duct thickness.

The duct source strength is calculated directly from the known rate of change of the duct thickness and the corresponding induced camber may be expressed as a simple matrix operation on known thickness distribution coefficients⁴. With regard to the propeller induced camber, this is determined once the propeller circulation distribution is specified. The duct vortex strength is then obtained by correcting the value associated with the effective camber for the effect of duct chord-to-diameter ratio. This operation has also been expressed in simple matrix form².

In order to present the analytic solution in a form suitable for detailed aerodynamic evaluation, certain calculations* requiring the use of a digital

* The propeller circulation was assumed to be reasonably approximated by the Betz optimum¹⁰ with a Goodman tip correction¹¹ for these calculations.

computer were carried out for representative ducted propeller configurations, an engineering design procedure and accompanying charts were prepared and the results were combined in report form^{5,8}. Thus, a simple procedure is available whereby the steady duct net loading, surface pressure distributions, thrust and sectional radial force, pitching moment and center of pressure can be calculated by hand. Configurations whose parameters fall somewhere in-between or outside the tabulated parameter values can be evaluated by interpolation and/or extrapolation.

1.2 Application to X-22A Calculations

The calculation of the duct net loading and surface pressure distributions was carried out for the Bell X-22A one-third scale and full scale models at several flight conditions, the hand-calculation procedures of Ref. 5 being used for this purpose. In general, the X-22A parameters did not correspond exactly with those for which computational tables had been prepared. As a result, interpolation was required in several of the tables given in that report. The duct thickness and geometric camber distributions were approximated by seven and thirteen term power series respectively.

Two changes were made in the calculation procedure of Ref. 5, one being in the final calculation of the surface pressure coefficients and the other in the inclusion of hub effects.

If u is the total axial perturbation velocity on the assumed reference cylinder which represents the duct and U is the free stream velocity, the full Bernoulli equation for the surface pressure coefficient c_p is given by

$$c_p = -2u/U - (u/U)^2 \quad (1)$$

For the calculations contained in this report, Eq. (1) was used for c_p with u composed of the contributions from the singularities representing the duct, propeller and hub. This method differs from that employed in Ref. 5. There, either the well-known linear form of Bernoulli's equation or the form of Eq. (1) with the term of order u^2 containing only the contribution from the duct source distribution was used.

The second change was to permit the inclusion of the effect of the propeller hub. For this, the hub was replaced simply by an appropriate distribution of line sources along the hub axis. The effective induced camber and the contribution to the axial perturbation velocity on the shroud were then determined straightforwardly in accordance with the methods as given in, say, Ref. 12.

CHAPTER TWO
COMPARISON WITH ONE-THIRD SCALE EXPERIMENTS

2.1 Model Data and Tests

The powered one-third scale model of the Bell X-22A ducted propeller was tested in the 8' by 10' subsonic wind tunnel at the David Taylor Model Basin. The tests were carried out in the period from the Fall of 1963 to the Spring of 1964 and were designed to obtain propulsion data in order to verify the estimated performance. Data was recorded for the various combinations of angle of attack, forward flight speed and power input that were anticipated for the complete flight regime of the X-22A .

The model geometry was scaled down exactly, from its full scale counterpart, by a factor of three except for the propeller hub which was somewhat larger than one-third scale in order to house the driving motor. Dimensions of the principal parameters for both the one-third scale and full scale units are listed below. A three bladed propeller was used; further information regarding the model and test runs may be found in Ref. 13 .

<u>Principal Parameters</u>	<u>1/3 - Scale Model</u>	<u>Full Scale Model</u>
Duct chord	16.3"	49.0"
Maximum duct thickness	2.8	8.4
Radius of reference cylinder	15.5	46.6
Propeller radius	14.0	42.0
Propeller tip clearance	0.1	0.4
Propeller axial location	4.7	14.0
Hub length	26.8	43.9
Maximum hub radius	9.4	17.5

Static pressure distributions were measured at five azimuthal stations on the duct with sixteen taps on the inner surface and fourteen on the outer surface. In view of the close proximity of several azimuthal stations to the elevons and supporting struts, there was a noticeable variation in many readings and, accordingly, considerable care had to be exercised in selecting what could be considered as reliable data. Consequently, the data points labelled "experimental" in the comparison curves represent the azimuthal average of the readings retained at any axial location on the shroud.

2.2 Results

In Fig. 1 we see a comparison of the theoretical predictions and experimental results for the duct inner and outer surface pressure coefficients. For this case, the propeller tip advance ratio, $J = U/\Omega R_p$, was 0.302 and the propeller thrust coefficient, $C_T = T_p / \frac{1}{2} \rho U^2 \pi R_p^2$, was 0.129, values which correspond to customary cruise flight. Despite the many differences between the mathematical model used in the theory and the actual model used in the tests, the theoretical predictions and experimental measurements are in reasonable agreement, the theory generally underestimating the magnitude of the pressure coefficient. However, note that the characteristic shapes of the two curves are very similar.

Variation of the net duct loading, Δc_p , namely, the inner surface pressure coefficient minus the outer surface pressure coefficient, is shown in Fig. 2. Here again, the theoretical curve follows the experimental data thus indicating that the duct vortex distribution (which is simply proportional to the net loading) is predicted fairly well.

The calculated pressure coefficients on the duct and hub units without propeller are shown in Fig. 3 along with the corresponding one-third scale data. To illustrate the effect of the hub, the contribution of duct alone is also shown. It is seen that aft of approximately the one-quarter chord, or equivalently, the propeller plane, the hub has little effect on pressure coefficient. Comparison of Figs. 1 and 3 reveals that, for this particular propeller thrust coefficient, the propeller contribution is at most about 10% of the total value of the pressure coefficient.

A comparison of theory and experiment for a larger propeller thrust coefficient is shown in Fig. 4 for $J = 0.242$ and $C_T = 0.486$. Reasonable agreement between the two results is obtained, particularly with respect to the characteristic shapes of the curves, although the theory still tends to underestimate the measured values. In this case, the propeller contribution has now risen to about 20-30% of the total value of the pressure coefficient.

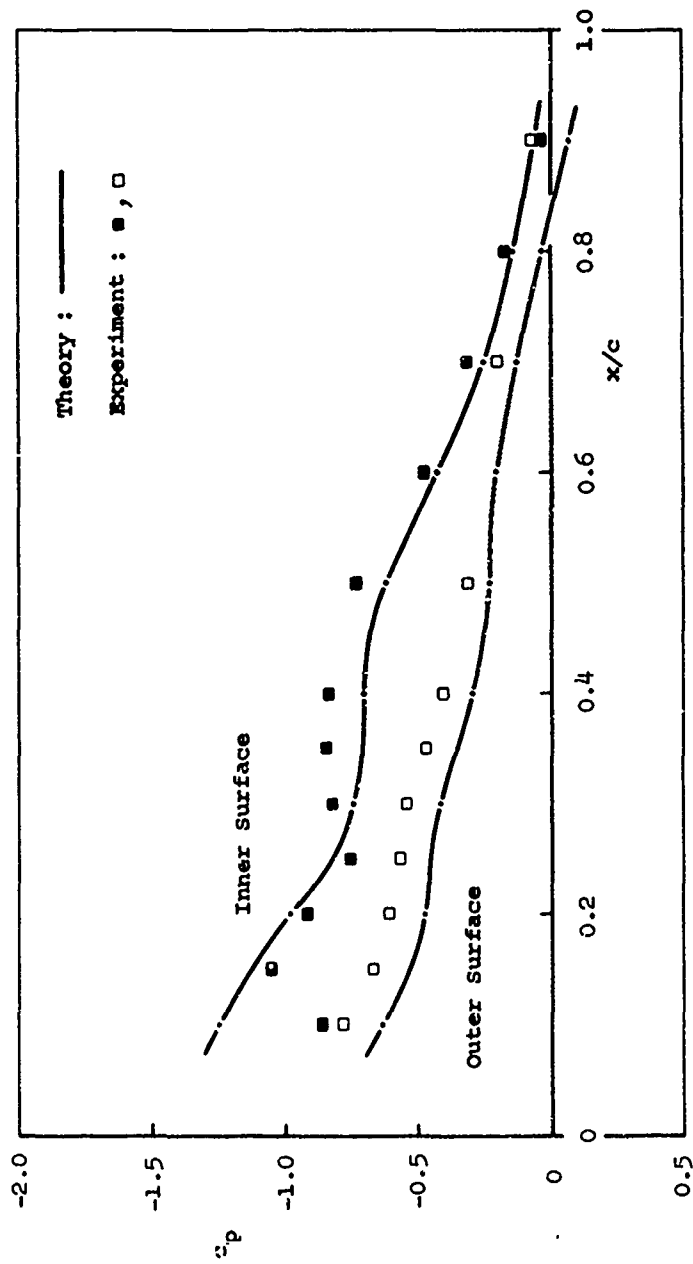


FIGURE 1
 DISTRIBUTION OF DUCT SURFACE PRESSURES
 COMPARISON OF THEORY AND ONE-THIRD SCALE EXPERIMENTAL DATA
 $J = 0.302$, $C_T = 0.129$

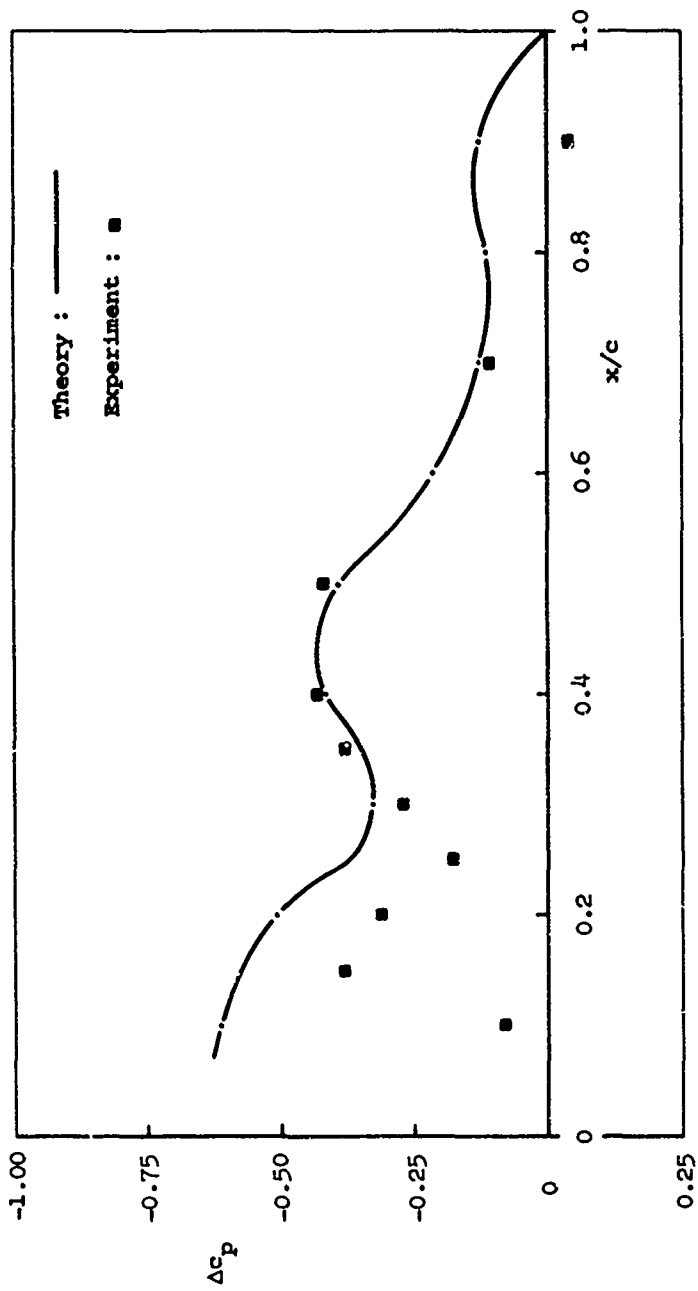


FIGURE 2
 DISTRIBUTION OF DUCT NET LOADING
 COMPARISON OF THEORY AND ONE-THIRD SCALE EXPERIMENTAL DATA
 $J = 0.302$, $C_T = 0.129$

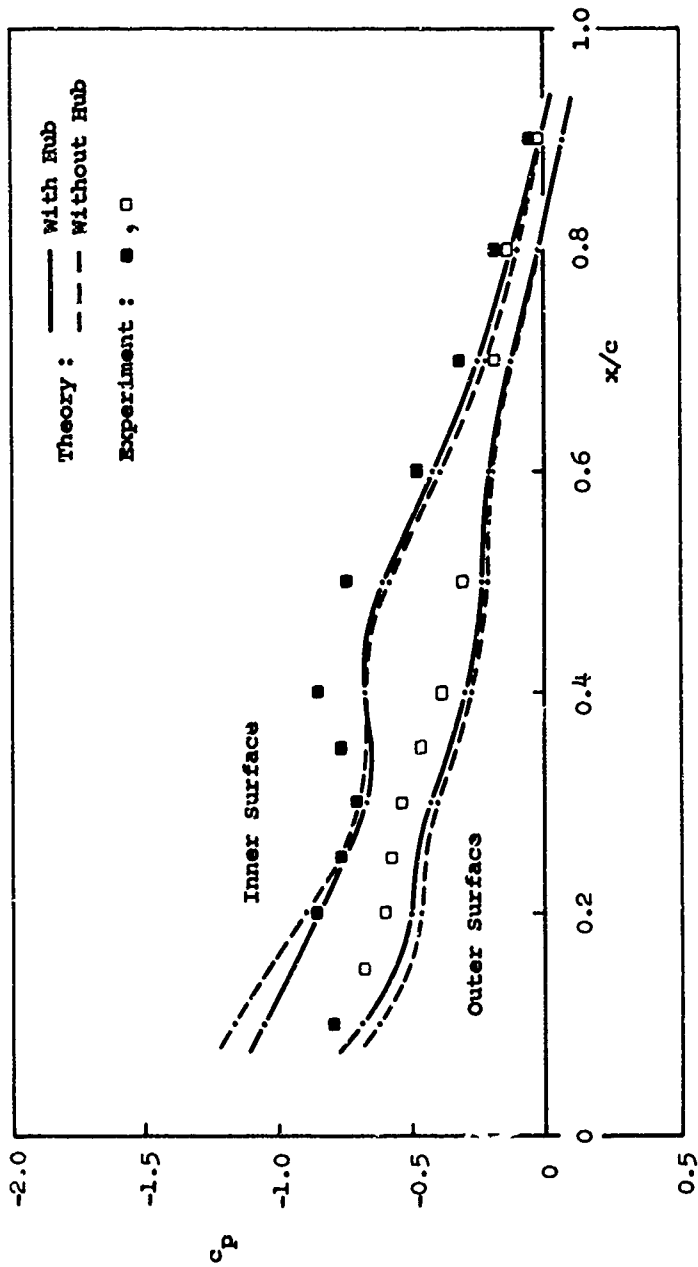


FIGURE 3
 DISTRIBUTION OF DUCT SURFACE PRESSURES
 COMPARISON OF THEORY AND ONE-THIRD SCALE EXPERIMENTAL DATA
 No Propeller

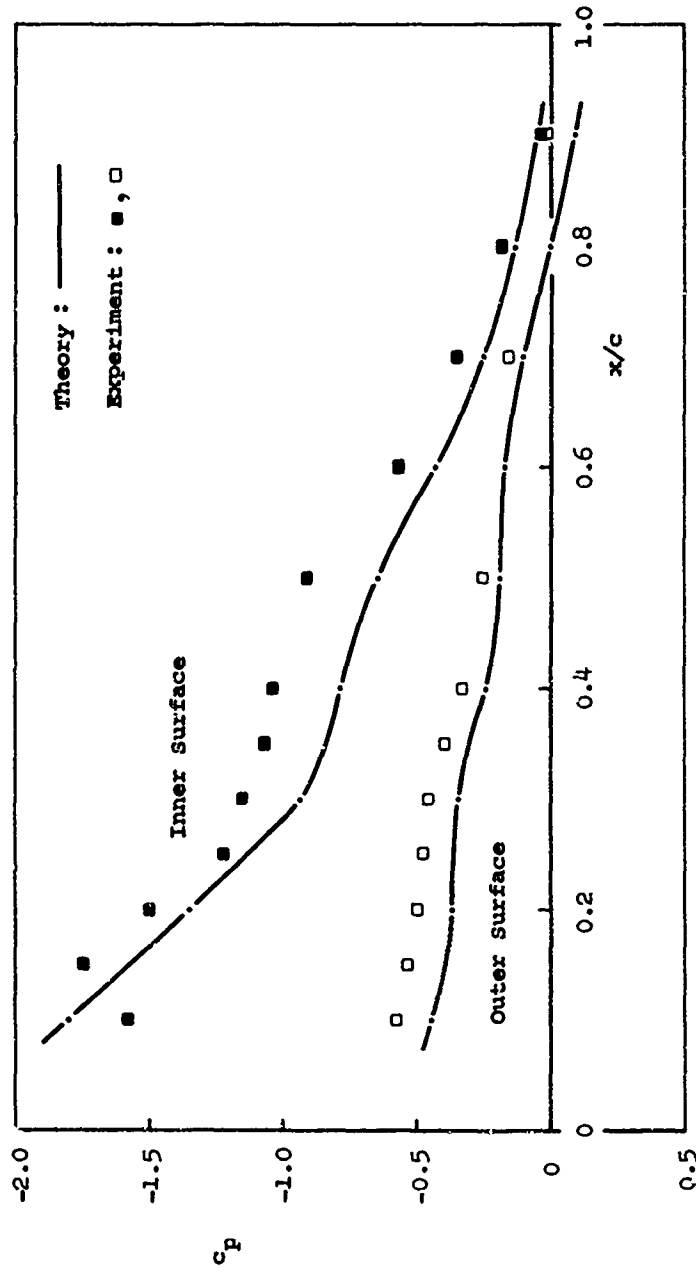


FIGURE 4

DISTRIBUTION OF DUCT SURFACE PRESSURES
 COMPARISON OF THEORY AND ONE-THIRD SCALE EXPERIMENTAL DATA
 $J = 0.242$, $C_T = 0.486$

CHAPTER THREE
COMPARISON WITH FULL SCALE EXPERIMENTS

3.1 Model Data and Tests

The tests of the powered full scale model of the X-22A ducted propeller unit, conducted at the NASA Ames Research Center in the 40' by 80' wind tunnel in August 1964 and March 1965, are reported in Ref. 14 . The overall objective of these tests was essentially the same as those undertaken for the one-third scale model. In addition, a model which had a modified inlet camber and duct diffuser ratio was tested to determine if any benefits in performance could be obtained as a result of this type of configuration change. The essential model dimensions are listed in Chapter Two.

For these tests, the static pressure distribution was measured at three azimuthal stations on the duct with eleven pressure taps on the inner surface and eight on the outer surface. Again, a selected average of the pressure readings was used to determine the experimental points shown in the comparisons.

Two full scale test runs were compared with the corresponding theoretical predictions. As opposed to the one-third scale model test cases, the elevons were not mounted in the duct unit for these runs.

3.2 Results

The results for $J = 0.200$ and $C_T = 0.276$ are shown in Fig. 5 and the results for $J = 0.249$ and $C_T = 0.496$, in Fig. 6 . The values of C_T were calculated on the assumption that the propeller thrust is simply the difference between the total thrust and the shroud thrust, both of which were measured.

Generally, the agreement between theory and experiment is quite good for the outer surface but not as favorable for the inner surface where the differences at several stations are as great as 40%. However, the characteristic shape of the theoretical curve again matches well with the test results.

Further calculations at higher propeller thrust coefficients show that the discrepancy between theory and experiment increases with increasing thrust coefficient. This is to be expected since the linearized theory begins to break down at large thrust coefficients.

3.3 Modifications to Theory

Two modifications to the theory were investigated in order to determine if better agreement with test data could be obtained. First, the duct boundary layer displacement thickness was estimated, based on the known inviscid velocity

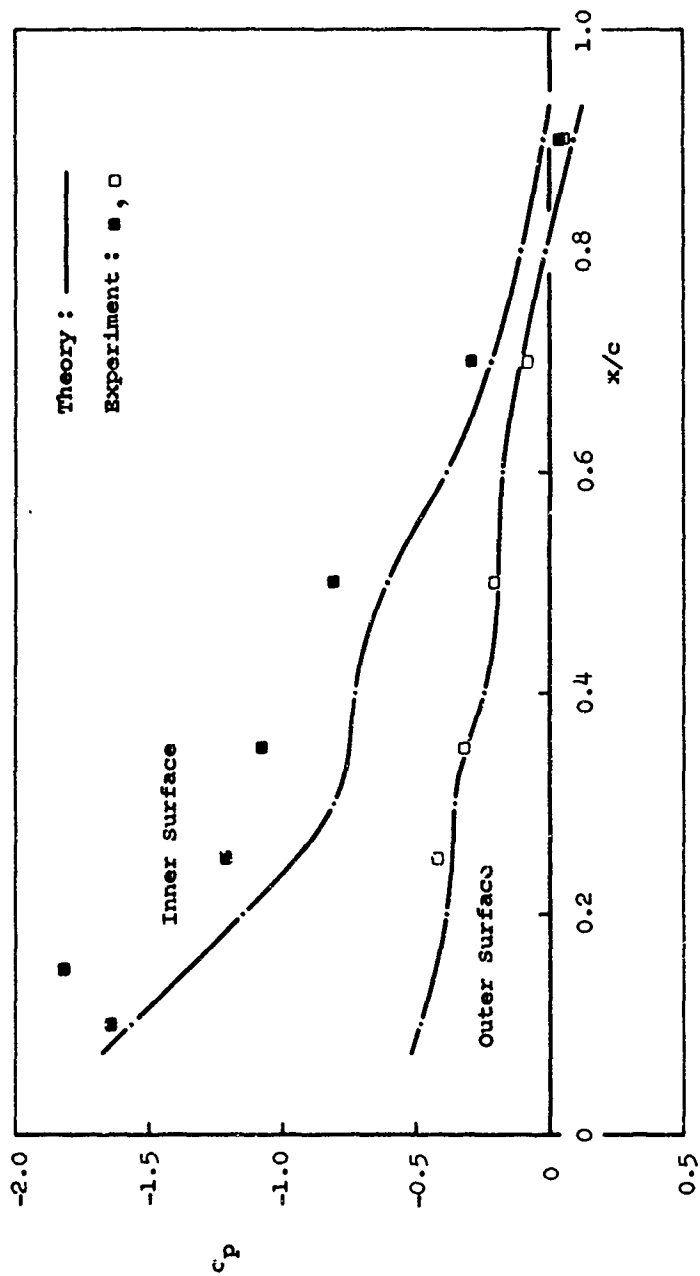


FIGURE 5
 DISTRIBUTION OF DUCT SURFACE PRESSURES
 COMPARISON OF THEORY AND FULL SCALE EXPERIMENTAL DATA
 $J = 0.200$, $C_T = 0.276$

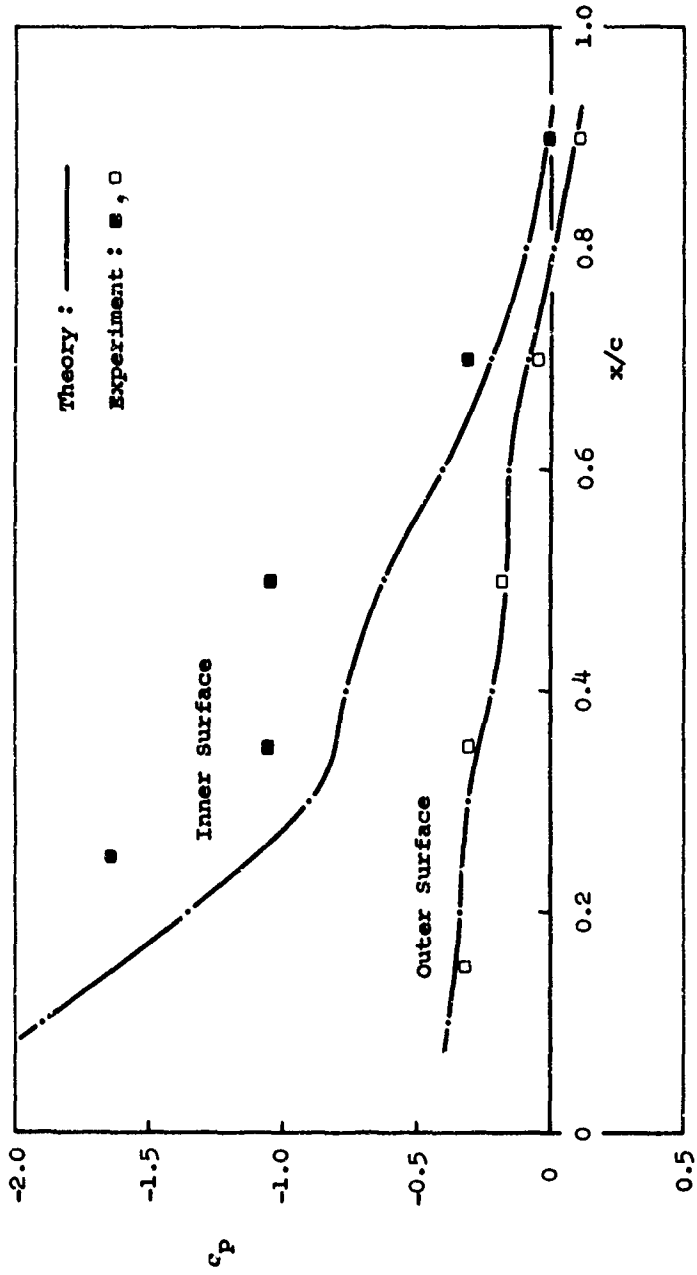


FIGURE 6
 DISTRIBUTION OF DUCT SURFACE PRESSURES
 COMPARISON OF THEORY AND FULL SCALE EXPERIMENTAL DATA
 $J = 0.249$, $C_T = 0.496$

field, and then added to the duct thickness to yield a new "effective" duct thickness. The calculation of c_p was then carried out as before but based on this new thickness distribution. In view of the extremely small viscous layer, the results were virtually unchanged, thus indicating that inclusion of the boundary-layer thickness in the previous calculations is not warranted.

Secondly, we investigated the effect of duct reference cylinder location with respect to the propeller tip. That is, for a duct of large thickness — as was used in the X-22A — it appears more appropriate to distribute the duct vortices on reference cylinders more nearly approximating the true inner and outer duct surfaces. This was in fact carried out for run #39-29 where we found that a relocation of the reference cylinder produced better agreement between theory and experiment for the inner surface pressure distribution. This is particularly so ahead of the propeller plane where the theoretically obtained values were increased by approximately 20%. Aft of the propeller, the effect of relocating the reference cylinder diminishes rapidly. The entire outer surface pressure distribution is relatively unaffected by appropriate relocation of the mean reference cylinder.

CONCLUSIONS

As a first step in evaluating the applicability of the three-dimensional theory of ducted propellers which had been developed at Therm Advanced Research, a comparison was made between theoretical predictions of the duct surface pressure distributions and appropriate data obtained from one-third and full scale model tests of the Bell X-22A aircraft for the forward flight regime. Despite the very limited quantity of suitable data for comparison purposes, it was still possible to draw the following conclusions:

The theoretical predictions are in reasonable agreement with experiment and generally tend to underestimate the measured pressures.

The characteristic shape of the predicted distribution agrees well with the measured distribution.

It is important to determine accurately the contribution to the pressure coefficient of the duct separately as this comprised from 60 to 90 percent of the total value.

Improved agreement between theory and experiment was obtained when — to make allowances for the relatively thick duct — mathematical singularities were distributed on individual reference cylinders representing the inner and outer surfaces, rather than on a single mean reference cylinder.

In order to consider all regions of practical interest, more conclusive evaluation of the reliability and range of applicability of the theory is needed, not only for forward flight, but also for the static case and in transition.

REFERENCES

1. Ordway, D. E., Sluyter, M. M., and Sonnerup, B. U. O., Three-Dimensional Theory of Ducted Propellers, THERM, Incorporated, TAR-TR 602, August 1960.
2. Ordway, D. E., and Greenberg, M. D., General Harmonic Solutions for the Ducted Propeller, THERM, Incorporated, TAR-TR 613, August 1961.
3. Ritter, A., and Ordway, D. E., Some Results of Finite-Bladed Ducted-Propeller Theory for VTOL, Aerospace Engineering, Vol. 21, No. 7, pp. 54-55, 88-90, July 1962.
4. Hough, G. R., The Aerodynamic Loading on Streamlined Ducted Bodies, Eighth Midwestern Mechanics Conference, Cleveland, Ohio, April 1-3, 1963; also, Developments in Mechanics, pp. 340-357, Pergamon Press, Oxford, 1965.
5. Kaskel, A. L., Ordway, D. E., Hough, G. R., and Ritter, A., A Detailed Numerical Evaluation of Shroud Performance for Finite-Bladed Ducted Propellers, THERM, Incorporated, TAR-TR 539, December 1963.
6. Hough, G. R., and Ordway, D. E., The Generalized Actuator Disk, Second Southeastern Conference on Theoretical and Applied Mechanics, Atlanta, Ga., March 5-6, 1964; also, Developments in Theoretical and Applied Mechanics, Vol. II, pp. 317-336, Pergamon Press, Oxford, 1965.
7. Greenberg, M. D., and Ordway, D. E., The Ducted Propeller in Static and Low-Speed Flight, Therm Advanced Research, Inc., TAR-TR 6407, October 1964.
8. Kaskel, A. L., and Greenberg, M. D., A Detailed Numerical Evaluation of Shroud Performance for Finite-Bladed Ducted Propellers, Addendum: Computation of Shroud-Induced Axial Velocity, Therm Advanced Research, Inc., TAR-TR 6508, December 1965.
9. Greenberg, M. D., Ordway, D. E., and Lo, C. F., A Three-Dimensional Theory for the Ducted Propeller at Angle of Attack, Therm Advanced Research, Inc., TAR-TR 6509, December 1965.
10. Durand, W. F., Editor, Aerodynamic Theory, Reprint, Vol. IV, pp. 251-258, Durand Reprinting Committee, California, 1943.
11. Goodman, T., The Tip Correction for Wind-Tunnel Tests of Propellers, Journal of the Aeronautical Sciences, Vol. 23, No. 12, pp. 1094-1098, December 1956.
12. Sears, W. R., Introduction to Theoretical Hydrodynamics, Cornell University, Ithaca, N. Y., 1957.
13. Boone, J. R., Wind Tunnel Test Data Report for the 1/3 Scale Powered Duct Model, Bell Aerosystems Co., Report No. 2127-921003, March 11, 1964. Prepared under BuWeps Contract No. NOW 63-0118-ci.
14. Hesby, A., and Sherman, E. W., Jr., Wind Tunnel Test Data Report for the Full-Scale Powered Duct Model, Bell Aerosystems Co., Report No. 2127-921007, August 12, 1965. Prepared under BuWeps Contract No. NOW 63-0118-ci.

Unclassified
Security Classification

DOCUMENT CONTROL DATA - R&D		
<i>(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)</i>		
1. ORIGINATING ACTIVITY (Corporate author) Therm Advanced Research, Inc. Ithaca, New York 14850		2a. REPORT SECURITY CLASSIFICATION Unclassified
		2b. GROUP
3. REPORT TITLE A COMPARISON OF DUCTED PROPELLER THEORY WITH BELL X-22A EXPERIMENTAL DATA		
4. DESCRIPTIVE NOTES (Type of report and inclusive dates) Final Report		
5. AUTHOR(S) (Last name, first name, initial) Hough, Gary R. Kaskel, Alvin L.		
6. REPORT DATE December 1965	7a. TOTAL NO. OF PAGES 15	7b. NO. OF REFS 13
8a. CONTRACT OR GRANT NO. Nonr-4357(00)	8a. ORIGINATOR'S REPORT NUMBER(S) TAR-TR 6510	
b. PROJECT NO. NR 212-103	8b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report) None	
c.		
d.		
10. AVAILABILITY/LIMITATION NOTICES Qualified requesters may obtain copies of this report from DDC.		
11. SUPPLEMENTARY NOTES None	12. SPONSORING MILITARY ACTIVITY Air Programs, Office of Naval Research, Washington, D. C.	
13. ABSTRACT <p>For the forward flight regime, a limited comparison is made between theoretical predictions of duct pressure distributions and data obtained from one-third and full scale model tests of the Bell X-22A ducted propeller unit. The theoretical calculations are based upon studies of ducted propellers with finite blade number which have been undertaken at Therm Advanced Research, Inc. It is found that the theory is in reasonable agreement with experiment and generally tends to underestimate the measured pressures. Also, the characteristic shape of the predicted distribution agrees well with the measured distribution. More conclusive evaluation of the reliability and range of applicability of the theory is needed, not only for forward flight, but also for the static case and in transition.</p>		

14. KEY WORDS Ducted Propellers, Theory Ducted Propellers, Wind Tunnel Tests VTOL Aircraft	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT

INSTRUCTIONS

1. ORIGINATING ACTIVITY: Enter the name and address of the contractor, subcontractor, grantee, Department of Defense activity or other organization (*corporate author*) issuing the report.

2a. REPORT SECURITY CLASSIFICATION: Enter the overall security classification of the report. Indicate whether "Restricted Data" is included. Marking is to be in accordance with appropriate security regulations.

2b. GROUP: Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forces Industrial Manual. Enter the group number. Also, when applicable, show that optional markings have been used for Group 3 and Group 4 as authorized.

3. REPORT TITLE: Enter the complete report title in all capital letters. Titles in all cases should be unclassified. If a meaningful title cannot be selected without classification, show title classification in all capitals in parenthesis immediately following the title.

4. DESCRIPTIVE NOTES: If appropriate, enter the type of report, e.g., interim, progress, summary, annual, or final. Give the inclusive dates when a specific reporting period is covered.

5. AUTHOR(S): Enter the name(s) of author(s) as shown on or in the report. Enter last name, first name, middle initial. If military, show rank and branch of service. The name of the principal author is an absolute minimum requirement.

6. REPORT DATE: Enter the date of the report as day, month, year, or month, year. If more than one date appears on the report, use date of publication.

7a. TOTAL NUMBER OF PAGES: The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.

7b. NUMBER OF REFERENCES: Enter the total number of references cited in the report.

8a. CONTRACT OR GRANT NUMBER: If appropriate, enter the applicable number of the contract or grant under which the report was written.

8b, 8c, & 8d. PROJECT NUMBER: Enter the appropriate military department identification, such as project number, subproject number, system numbers, task number, etc.

9a. ORIGINATOR'S REPORT NUMBER(S): Enter the official report number by which the document will be identified and controlled by the originating activity. This number must be unique to this report.

9b. OTHER REPORT NUMBER(S): If the report has been assigned any other report numbers (*either by the originator or by the sponsor*), also enter this number(s).

10. AVAILABILITY/LIMITATION NOTICES: Enter any limitations on further dissemination of the report, other than those

imposed by security classification, using standard statements such as:

- (1) "Qualified requesters may obtain copies of this report from DDC."
- (2) "Foreign announcement and dissemination of this report by DDC is not authorized."
- (3) "U. S. Government agencies may obtain copies of this report directly from DDC. Other qualified DDC users shall request through _____."
- (4) "U. S. military agencies may obtain copies of this report directly from DDC. Other qualified users shall request through _____."
- (5) "All distribution of this report is controlled. Qualified DDC users shall request through _____."

If the report has been furnished to the Office of Technical Services, Department of Commerce, for sale to the public, indicate this fact and enter the price, if known.

11. SUPPLEMENTARY NOTES: Use for additional explanatory notes.

12. SPONSORING MILITARY ACTIVITY: Enter the name of the departmental project office or laboratory sponsoring (*paying for*) the research and development. Include address.

13. ABSTRACT: Enter an abstract giving a brief and factual summary of the document indicative of the report, even though it may also appear elsewhere in the body of the technical report. If additional space is required, a continuation sheet shall be attached.

It is highly desirable that the abstract of classified reports be unclassified. Each paragraph of the abstract shall end with an indication of the military security classification of the information in the paragraph, represented as (TS), (S), (C), or (U).

There is no limitation on the length of the abstract. However, the suggested length is from 150 to 225 words.

14. KEY WORDS: Key words are technically meaningful terms or short phrases that characterize a report and may be used as index entries for cataloging the report. Key words must be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location, may be used as key words but will be followed by an indication of technical context. The assignment of links, roles, and weights is optional.