

UNCLASSIFIED

AD NUMBER
AD482005
NEW LIMITATION CHANGE
TO Approved for public release, distribution unlimited
FROM Distribution authorized to U.S. Gov't. agencies and their contractors; Critical Technology; MAY 1966. Other requests shall be referred to Arnold Engineering Development Center, Arnold AFS, TN.
AUTHORITY
ADEC/IN [STINFO] memo, 29 Jan 1996

THIS PAGE IS UNCLASSIFIED

THIS REPORT HAS BEEN DELIMITED
AND CLEARED FOR PUBLIC RELEASE
UNDER DOD DIRECTIVE 5200.20 AND
NO RESTRICTIONS ARE IMPOSED UPON
ITS USE AND DISCLOSURE.

DISTRIBUTION STATEMENT A

APPROVED FOR PUBLIC RELEASE;
DISTRIBUTION UNLIMITED.

AEDC-TR-66-62



**THE EFFECTS OF A RIBBED WALL
ON THE EFFICIENCY OF
A WIDE ANGLE SUBSONIC DIFFUSER**

**W. E. Carleton and C. F. Anderson
ARO, Inc.**

May 1966

This document is subject to special export controls and each transmittal to foreign governments or foreign nationals may be made only with prior approval of Arnold Engineering Development Center.

**PROPULSION WIND TUNNEL FACILITY
ARNOLD ENGINEERING DEVELOPMENT CENTER
AIR FORCE SYSTEMS COMMAND
ARNOLD AIR FORCE STATION, TENNESSEE**

NOTICES

When U. S. Government drawings, specifications, or other data are used for any purpose other than a definitely related Government procurement operation, the Government thereby incurs no responsibility nor any obligation whatsoever, and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise, or in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Qualified users may obtain copies of this report from the Defense Documentation Center.

References to named commercial products in this report are not to be considered in any sense as an endorsement of the product by the United States Air Force or the Government.

THE EFFECTS OF A RIBBED WALL
ON THE EFFICIENCY OF
A WIDE ANGLE SUBSONIC DIFFUSER

W. E. Carleton and C. F. Anderson
ARO, Inc.

This document is subject to special export controls and each transmittal to foreign governments or foreign nationals may be made only with prior approval of Arnold Engineering Development Center.

FOREWORD

The work reported herein was done at the request of the Arnold Engineering Development Center (AEDC), Air Force Systems Command (AFSC), under Program Element 65402234, Project 6950, Task 695002.

The results of the research presented were obtained by ARO, Inc. (a subsidiary of Sverdrup & Parcel and Associates, Inc.), contract operator of the Arnold Engineering Development Center, AFSC, Arnold Air Force Station, Tennessee, under Contract AF 40(600)-1200. The test was conducted from January 20 to May 21, 1965, under ARO Project No. PR3423. The manuscript was submitted for publication on March 3, 1966.

This technical report has been reviewed and is approved.

Forrest B. Smith, Jr.
Propulsion Division
DCS/Research

Donald R. Eastman, Jr.
DCS/Research

ABSTRACT

Tests were conducted to determine the effects of a ribbed wall on the efficiency of a single side expanded, wide angle, subsonic diffuser. Rib geometry, diffuser angle, Reynolds number, and Mach number were varied. Except at low Reynolds numbers, ribs were found to improve the efficiency of the diffuser. They were also more effective than vortex generators except at low Reynolds numbers for all Mach numbers and at high Mach numbers for all Reynolds numbers. The ribs produced maximum improvement at diffuser angles of 20 to 22 deg. The data indicated that the depth-to-width ratio of the grooves between the ribs should be in the range of 2 to 6. The range of Reynolds numbers and Mach numbers over which the ribs were effective appeared to be primarily a function of the groove width.

CONTENTS

	<u>Page</u>
ABSTRACT	iii
NOMENCLATURE	vii
I. INTRODUCTION	1
II. APPARATUS	
2.1 Test Facility	3
2.2 Test Article	3
2.3 Instrumentation	3
III. TEST DESCRIPTION	
3.1 Test Conditions and Procedures.	4
3.2 Precision of Measurements.	5
IV. RESULTS	5
V. CONCLUSIONS	8
REFERENCES.	9

ILLUSTRATIONS

Figure

1. Single Side Expanded Diffuser (Summary of Data Obtained from Ref. 1)	11
2. Schematic of Test Cell and Test Unit Installation	12
3. Test Unit Details and Dimensions	
a. Test Unit and Ribs	13
b. Vortex Generators	14
4. Photographs of Test Unit	
a. Test Unit before Installation.	15
b. Test Unit Installed in Test Cell	16
c. Vortex Generators (Configuration 2)	17
5. Variation of Reynolds Number with Mach Number	18
6. Variation of Pressure Efficiency with Reynolds Number and Mach Number for the 16-deg Diffuser with and without Ribs	
a. Smooth	19
b. Configuration 3	20
c. Configuration 8	21

<u>Figure</u>	<u>Page</u>
7. Variation of Pressure Efficiency with Reynolds Number and Mach Number for the 20-deg Diffuser with and without Ribs	
a. Smooth	22
b. Configuration 1	23
c. Configuration 2	24
d. Configuration 3	25
e. Configuration 4	26
f. Configuration 5	27
g. Configuration 6	28
h. Configuration 7	29
i. Configuration 8	30
8. Variation of Pressure Efficiency with Reynolds Number and Mach Number for the 22-deg Diffuser with and without Ribs	
a. Smooth	31
b. Configuration 1	32
c. Configuration 3	33
d. Configuration 8	34
9. Variation of Pressure Efficiency with Groove Depth-to-Width Ratio for the 20-deg Diffuser	
a. $M_\infty = 0.06$	35
b. $M_\infty = 0.08$	35
c. $M_\infty = 0.10$	35
d. $M_\infty = 0.15$	36
e. $M_\infty = 0.20$	36
f. $M_\infty = 0.30$	36
g. $M_\infty = 0.40$	37
h. $M_\infty = 0.50$	37
10. Variation of Pressure Efficiency with Reynolds Number and Mach Number for the 20- and 22-deg Diffuser with Vortex Generators	
a. Vortex Generator Configuration 2, $\theta = 20$ deg	38
b. Vortex Generator Configuration 1, $\theta = 22$ deg	39
c. Vortex Generator Configuration 2, $\theta = 22$ deg	40
d. Vortex Generator Configuration 3, $\theta = 22$ deg	41
e. Vortex Generator Configuration 4, $\theta = 22$ deg	42

SECTION I INTRODUCTION

Recent Union of Soviet Socialist Republics (U.S.S.R.) research in subsonic diffuser design (Ref. 1) indicates that the efficiency of a wide angle subsonic diffuser can be increased at high Reynolds numbers by cutting transverse ribs in the wall of the diffuser downstream of the diffuser entrance. Reference 1 consists of limited excerpts of reports of the research conducted in the U.S.S.R. on ribbed diffusers. The available excerpts are incomplete, and related U.S.S.R. reports, if any, are unavailable. Some of the highlights of the excerpts are presented here; however, it should be noted that the translations are not clear on many points.

Several tests were conducted in the U.S.S.R. with various types of diffusers. The information given in the excerpts describing the test article and test conditions is tabulated in Table I.

Test 1 showed that transverse ribs increased diffuser efficiency by a factor of 2 above a critical Reynolds number of about 9×10^4 . Below $Re = 9 \times 10^4$, efficiency decreased with decreasing Reynolds number to some minimum Reynolds number below which the effect of ribs was negligible.

Test 2 showed that increasing the number of ribs above eight did not further increase the diffuser efficiency.

In Test 3, the ribs again increased the efficiency by a factor of 2; however, the results were not affected by Reynolds number. Also the ribbed diffusers exhibited a more uniform flow field at the diffuser exit. In addition, two other significant observations were made in Test 3:

- 1) The ribs were not effective unless the position of the first groove was upstream of the flow separation point for the smooth diffuser;
- 2) The ribs must be flush with the surface of the diffuser; ribs protruding into the flow field increased the intensity of flow separation and decreased the efficiency.

Test 4 indicated that a ribbed diffuser with $\beta = 31$ deg experienced a minimum in efficiency at inlet velocities of 50 to 60 m/sec. This was attributed to the possible emission of acoustic waves from the grooves. The acoustic waves were caused by resonance which occurred when the frequency of vortex decay at the "end" of a rib coincided with the natural frequency of air vibration inside the groove. Maximum increase in efficiency occurred at $\beta \approx 40$ to 45 deg. For these angles, the efficiency

was 2.2 to 2.4 times that of the smooth diffusers. At large opening angles ($\beta \approx 60$ deg) the flow was separated at the diffuser inlet rim and did not interact with the ribs. Inlet rims were made with different curvature radii, and the position of the first groove was varied up to a point at which it was located at the inlet rim. However, in all instances for $\beta \approx 60$ deg, the efficiency was no greater than that of the smooth diffuser. With decreasing β ($\beta < 40$ to 50 deg), the intensity of flow separation in the smooth diffuser decreased, and consequently, the favorable effect of ribs decreased. At $\beta \approx 20$ deg, the ribs had practically no effect on efficiency. Ribs in annular diffusers gave a slightly smaller increase in efficiency than in conical diffusers. A ribbed diffuser with $\beta = 40$ deg gave efficiencies equivalent to a 20-deg smooth diffuser. Based on results of tests 1, 2, and 4 on conical diffusers, it was concluded that within the range of parameters studied, changing the scale of the diffuser and rib section had no effect on the efficiency.

Test 5 was conducted on a flat diffuser with one-sided expansion to study the effects of groove depth (a), groove width (b), and number of ribs. The results of this study are presented in Fig. 1. The author concluded that to obtain a favorable effect of ribs, the grooves should be sufficiently deep so that stable vortices are formed. This occurred for a depth-to-width ratio, a/b, of 2.0 to 2.5, and the diffuser efficiency did not increase with further increase in depth. Pressure distributions between ribs along the height of the rib showed that a pressure minimum existed in the grooves and gave evidence of strong vortex formation in the inter-rib spaces. Practically no difference in diffuser efficiency was observed for groove widths of 1 to 5 mm. The favorable effect of ribs decreased for groove widths greater than 5 mm which apparently was caused by the increased resistance to the flow over such a rib system. A relatively small number of ribs was required for obtaining the desired effect.

A preliminary investigation conducted at AEDC on a 40-deg conical diffuser with and without ribs verified that ribs do increase diffuser efficiency. However, this investigation was limited in Mach number and Reynolds number range, and the rib parameters were not varied. Therefore, a research test was conducted in the Propulsion Wind Tunnel Facility (PWT) in an attempt to investigate the mechanism by which ribs cause an increase in diffuser efficiency and to establish optimum rib parameters over a wide range of subsonic Mach number, Reynolds number, and diffuser opening angle. Also, a limited amount of data was obtained with vortex generators to compare the increase in diffuser efficiency with diffusers using transverse ribs.

SECTION II APPARATUS

2.1 TEST FACILITY

This investigation was conducted in the Aerodynamic Wind Tunnel, Supersonic (1S). This wind tunnel is an open-circuit, continuous flow wind tunnel capable of operation at Mach numbers from 1.5 to 5.0. For this test, the test section, diffuser, and nozzle side plates were removed, and a liner was installed in the nozzle. This converted the tunnel to a subsonic test cell capable of operation at Mach numbers from 0.06 to 0.80 and at stagnation pressures from 200 to 5500 psf. A schematic of the tunnel test section showing the test unit installation is presented in Fig. 2. Further details of the facility can be found in Ref. 2.

2.2 TEST ARTICLE

The test unit (Fig. 3a) consisted of a bellmouth connected to a 4-in. square duct 44 in. long. A diffuser with one side expanded and with interchangeable flap and rib inserts was attached to the duct. The length of the test unit was dictated by the test cell. Each side of the diffuser was made of clear plastic with inserts of optically flat glass at the rib location to permit the use of the schlieren system to observe the flow over the ribs. The remainder of the test unit was constructed of aluminum. The rib inserts had groove depths (a) of 0.30, 0.40, and 0.50 in., and groove widths (b) of 0.08, 0.16, and 0.24 in. which gave values of a/b from 1.25 to 6.25. The vortex generators were designed in accordance with data from Ref. 3 and had NACA 0012 airfoil sections. Each vortex generator was mounted at an angle of attack of 15 deg. Further details of the vortex generators are shown in Fig. 3b.

2.3 INSTRUMENTATION

Static and total pressures were measured with a 100-tube, 120-in., water-filled manometer board and were recorded photographically. Each tube of the manometer board was connected to two orifices through a two-way switching valve to allow 200 pressures to be measured.

Seven static pressure orifices located in the side wall of the diffuser at the exit plane were manifolded together to obtain an average exit plane static pressure. A 1-psi differential pressure transducer was connected between the exit plane static pressure manifold and an

orifice located 28 in. upstream of the diffuser inlet to measure the static pressure rise through the diffuser.

Fluctuating pressures were measured with three close-coupled, high response transducers and a microphone. The transducers had a flat response from dc to 1250 cps, and the microphone had a flat response from 30 cps to 100 kc. Two of the transducers were located on the bottom of the ribbed insert with orifices in the bottoms of grooves 3 and 9 and were referenced to orifices on top of ribs 3 and 9. The third transducer was installed in the exit plane and was referenced to the exit plane manifold. Reference lead lengths of approximately 1 ft were selected to dampen any fluctuations in the reference pressure. The microphone was located in the diffuser side wall at the exit plane as shown in Fig. 4b. The outputs of the transducers and the microphone were monitored on an oscilloscope and were recorded on a direct reading oscillograph.

Total and static pressures at the diffuser inlet were measured with a retractable, traversing pitot-static probe. The probe was supported approximately 16 in. downstream of the diffuser exit and was designed for minimum thickness to reduce probe interference to the diffuser flow.

For the flow visualization part of the investigation, heated wires were installed in the diffuser inlet and on the traversing probe to allow the flow over the ribs to be observed with the schlieren system. The resulting flow patterns were recorded on color and black and white motion pictures and photographs.

Test conditions were set with reference to conditions 28 in. upstream of the diffuser inlet using a 100-in. mercury electromanometer to measure total pressure and an 80-in. mercury electromanometer to measure static pressure.

SECTION III TEST DESCRIPTION

3.1 TEST CONDITIONS AND PROCEDURES

Pressure data were obtained for each configuration at Mach numbers from 0.06 to 0.70 at Reynolds numbers from 10^5 to 1.6×10^6 . The stagnation pressure varied from 200 to 5500 psf, and the stagnation temperature varied from 80 to 130°F. Up to $M_\infty = 0.30$, maximum Reynolds numbers were limited by the available air supply pressure of 5500 psf. Above $M_\infty = 0.30$, the maximum Reynolds numbers were limited by the

maximum allowable differential pressure on the manometer board and the pressure transducers. Minimum Reynolds numbers were limited by the accuracy with which Mach number could be set and by test cell leaks below 200 psf. The resulting Reynolds number variation with Mach number is presented in Fig. 5.

3.2 PRECISION OF MEASUREMENTS

The estimated precision of the data obtained during this test is as follows:

Re x 10 ⁻⁵	Mach Number			
	M _∞ = 0.06	M _∞ = 0.15	M _∞ = 0.30	M _∞ = 0.70
1	±0.003	±0.004	±0.004	±0.005
3	±0.001	±0.002	±0.002	±0.002
5	-	±0.001	±0.001	±0.001
7	-	±0.001	±0.001	-
10	-	-	±0.001	-

Re x 10 ⁻⁵	Pressure Efficiency			
	M _∞ = 0.06	M _∞ = 0.15	M _∞ = 0.30	M _∞ = 0.70
1	±0.06	±0.02	±0.009	-
3	±0.02	±0.01	±0.005	±0.001
5	-	±0.01	±0.004	±0.001
7	-	±0.01	±0.003	-
10	-	-	±0.001	-

The uncertainties quoted in the tables were determined by a statistical method based on a 95-percent confidence level and a normal error distribution (Ref. 4).

SECTION IV RESULTS

The results presented in Ref. 1 for a flat diffuser model with one side expanded are summarized in Fig. 1. The range of groove depth, groove width, and number of ribs tested during the PWT investigation are indicated on Fig. 1 for comparison. Reference 1 gave no information pertaining to the Mach numbers and Reynolds numbers at which these tests were conducted.

During the test reported herein, the duct Mach number was set using a static pressure measured at a reference station 28 in. upstream of the diffuser inlet. The pressure efficiency is defined as the static pressure rise between the reference duct station and the exit plane of the diffuser, divided by the theoretical one-dimensional pressure rise through the diffuser.

The variations of pressure efficiency with Reynolds number and Mach number are presented in Figs. 6, 7, and 8, respectively, for diffuser opening angles of 16, 20, and 22 deg. Data obtained with a 24-deg ribbed diffuser showed that the ribs had no effect on diffuser efficiency because the flow was always separated at the diffuser inlet. Therefore, results for the 24-deg diffuser are not presented. In general, all other ribbed diffusers tested exhibited a higher pressure efficiency than the corresponding smooth diffuser for a particular Mach number and Reynolds number range, depending on rib geometry. For all rib geometries, none of the ribbed diffusers exhibited an increase in efficiency at Reynolds numbers equal to or less than that where the smooth diffuser exhibited complete separation. This appears to agree with the Ref. 1 observation that the ribs are effective only when the separation is downstream of the first groove.

In all instances, for Mach numbers less than about 0.4, the ribbed diffusers exhibited a small range of Reynolds numbers in which diffuser efficiency sharply increased to a maximum. For Mach numbers greater than 0.4 (Figs. 6, 7, and 8) the increase in diffuser efficiency with Reynolds number was much less, and in some cases for Mach number above 0.4, the smooth diffuser became more efficient than the ribbed diffuser.

The variations of pressure efficiency with the ratio of groove depth to groove width (a/b) for the 20-deg diffuser at Mach numbers 0.06 to 0.50 and high Reynolds number are presented in Fig. 9. For Mach numbers up to 0.30, the data indicate that the efficiency increased with increasing groove width and possibly with increasing groove depth; however, the change was small. Therefore, it is concluded that the ratio a/b is not critical as long as $a/b > 2$. Based on extrapolation of these results, it appears that an optimum rib configuration for the flat diffuser with one side expanded would have been a groove width of 0.25 in. and an a/b of about 5. For any diffuser configuration appreciably different from those investigated in this experiment, the optimum value of the parameter, b , should be determined experimentally and the groove depth chosen for maximum a/b up to about 6.

For comparison purposes, a limited amount of tests was conducted using vortex generators in the 20- and 22-deg diffusers. The results of

these tests are presented in Fig. 10. The effects of size and location of the vortex generators were investigated in the 22-deg diffuser. Vortex generator configuration 2 exhibited the greatest efficiency in the 22-deg diffuser, and this configuration was then tested in the 20-deg diffuser. In general, the vortex generators caused an increase in efficiency at Reynolds numbers below those at which the ribbed diffuser first became effective, but the vortex generators did not increase the efficiency as much as the ribbed diffuser at the higher Reynolds numbers. The vortex generators exhibited a gradual decrease in efficiency with increasing Mach number and a gradual increase in efficiency with increasing Reynolds number, as did the smooth diffusers; whereas the ribbed diffusers correspondingly exhibited an abrupt decrease to zero efficiency at some Mach number between 0.3 to 0.6, and a relatively constant efficiency with increasing Reynolds number.

The variation of diffuser efficiency with diffuser angle is presented in Fig. 11 for the smooth diffuser, the diffuser with vortex generators, and the diffuser with ribs 3 and 8 at $M_\infty = 0.06, 0.15, 0.30,$ and 0.50 . The variations of η_{vg}/η_s and η_r/η_s with diffuser angle are presented in Fig. 12 for comparison purposes. As mentioned earlier, the 24-deg diffuser remained completely separated for all rib configurations, Mach numbers, and Reynolds numbers. Therefore, the curves in Fig. 11 for ribs 3 and 8 are extrapolated to zero efficiency between $\theta = 22$ and 24 deg when the efficiency did not become zero before $\theta = 22$ deg. Comparisons of the data obtained with the smooth diffuser with that of the ribbed diffuser indicate that the ribs increased the efficiency considerably for diffuser angles in the range of 20 to 22 deg at high Reynolds numbers. For the 16-deg diffuser, the smaller groove width (rib 3) caused a slight increase in efficiency, whereas the larger groove width had only small effects on efficiency. Reference 1 explains this as a decrease in the intensity or extent of flow separation in a smooth diffuser with decreasing diffuser opening angle. Therefore, by the argument of Ref. 1, at $\theta = 16$ deg, the losses caused by small-scale separation and by flow over the ribs become equal to the losses caused by the large-scale separation, and the ribs have practically no effect on efficiency. The practical use of ribbed diffusers would appear to be limited to angles of roughly $\theta = 18$ to 22 deg where a maximum increase in efficiency is prevalent. In this range, the ribbed diffuser exhibited increases in efficiency greater than a factor of 2. The diffuser with vortex generators did not exhibit as high an increase in efficiency as the ribbed diffuser at high Reynolds numbers. However, the diffuser with vortex generators exhibited higher efficiencies at the lower Reynolds numbers, where the ribbed diffuser was ineffective.

Several attempts were made to study the mechanism by which transverse ribs cause an increase in diffuser efficiency. From visual

observation using the schlieren system in conjunction with heated wires, the flow over the ribbed section was observed to be either attached to the expanded wall over the entire length of the ribbed section or separated at the inlet of the diffuser. At very low Reynolds numbers, the flow was separated for the diffusers with $\theta = 20$ and 22 deg. As the Reynolds number was increased, a point was reached at which the flow would occasionally attach to the expanded wall for a short period of time. As the Reynolds number was further increased, the flow would remain attached for longer periods of time until the Reynolds number became high enough for the flow to remain permanently attached to the expanded wall.

Reference 1 was somewhat vague as to the details of the vortex system. It is well known that a vortex will form in a slot or groove when flow is established over the surface (Ref. 5). The schlieren system was used in an effort to investigate the vortex system; however, no evidence of a vortex system in the vicinity of transverse ribs could be found.

Reference 1 stated that the ribs could emit "acoustic waves" when "the frequency of vortex decay at the end of the fin coincides with the natural frequency of air vibrations inside the interfin spaces." Three high-response transducers and a microphone were used in an attempt to measure any pressure fluctuations or noise in the diffuser; however, no evidence of the acoustic wave phenomena could be found. The pressure variations and noise were extremely small unless the flow was separated from the expanded wall.

SECTION V CONCLUSIONS

The following conclusions have been drawn from the results obtained:



1. Ribs significantly improved the efficiency of a one side expanded, wide angle diffuser in the wall angle range of 16 to 22 deg except at low Reynolds numbers and at diffuser inlet Mach number in excess of about 0.4 .
2. The exact size of the grooves did not appear to be critical. The data indicated that the grooves should have a depth-to-width ratio of 2 to 6 , and the groove width should be varied to obtain maximum efficiency.

3. The ribs were found to be more efficient than the vortex generators tested except at low Reynolds numbers for all Mach numbers and at high Mach numbers for all Reynolds numbers.

REFERENCES

1. AID Report T-63-8. "Diffusers with Transverse Fins (Translations and Excerpts)." Aerospace Information Division, Library of Congress, 14 January 1963.
2. Test Facilities Handbook (5th Edition). "Propulsion Wind Tunnel Facility, Vol. 3." Arnold Engineering Development Center, July 1963.
3. Taylor, H. D. "Summary Report on Vortex Generators." Report R-05280-9, United Aircraft Corporation Research Department, March 1950.
4. Dean, Robert C., Jr. "Aerodynamic Measurements." Gas Turbine Laboratory, Massachusetts, 1953.
5. Roshko, Anatol. "Some Measurements of Flow in a Rectangular Cutout." NACA TN 3488, August 1955.



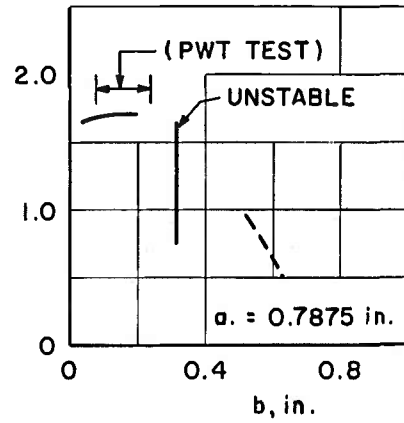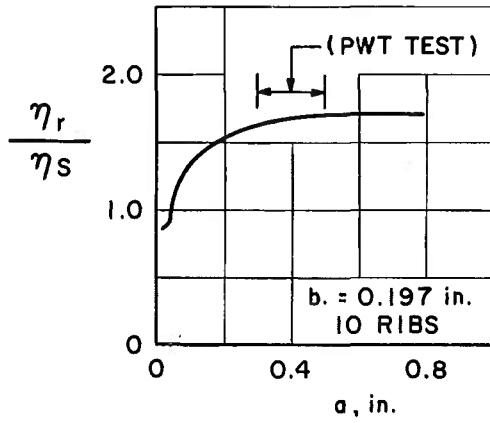

0.118 in. FROM THROAT TO
FIRST GROOVE
RIB THICKNESS 0.059 in.
a = GROOVE DEPTH
b = GROOVE WIDTH

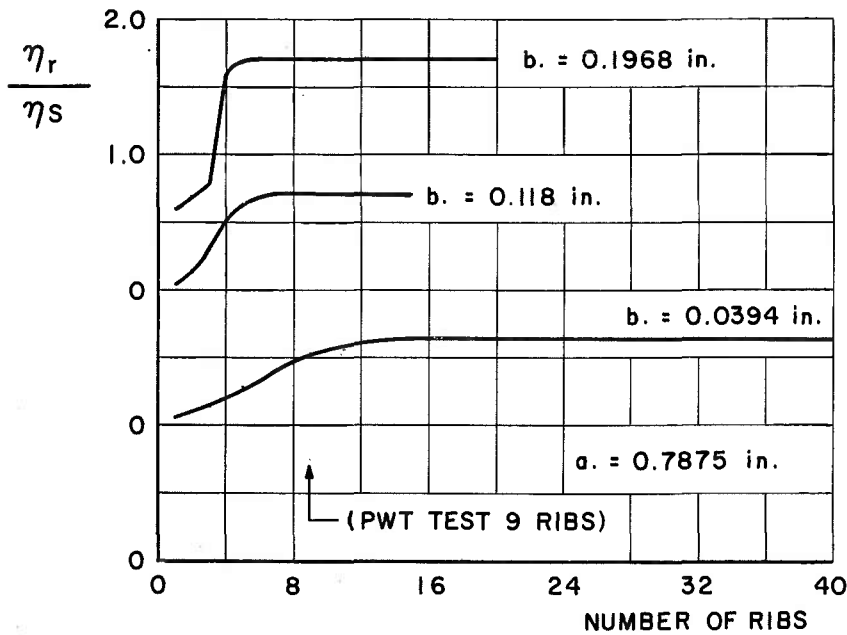
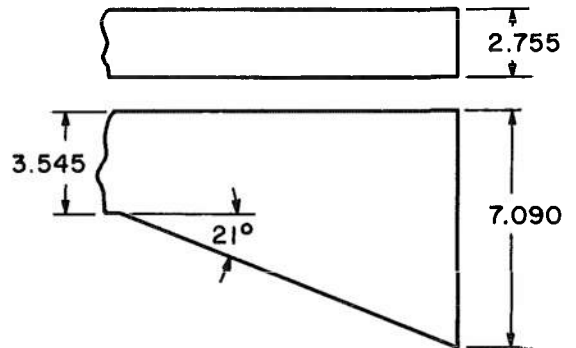


Fig. 1 Single Side Expanded Diffuser (Summary of Data Obtained from Ref. 1)

NOTE: TEST SECTION WALLS, SUPERSONIC DIFFUSER, AND NOZZLE SIDE PLATES AFT OF STA. -38.6 REMOVED. FLEXIBLE NOZZLE SET TO $M = 1.5$ CONTOUR.



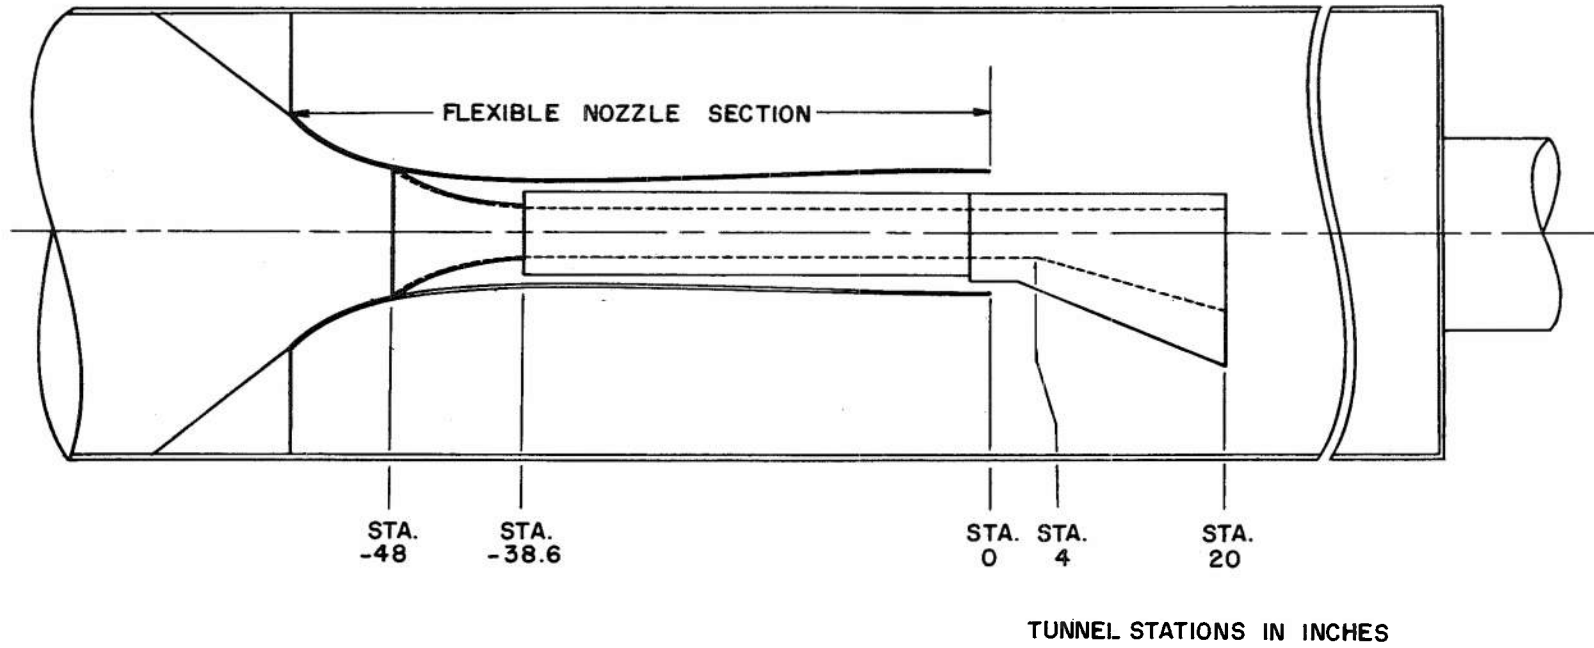


Fig. 2 Schematic of Test Cell and Test Unit Installation

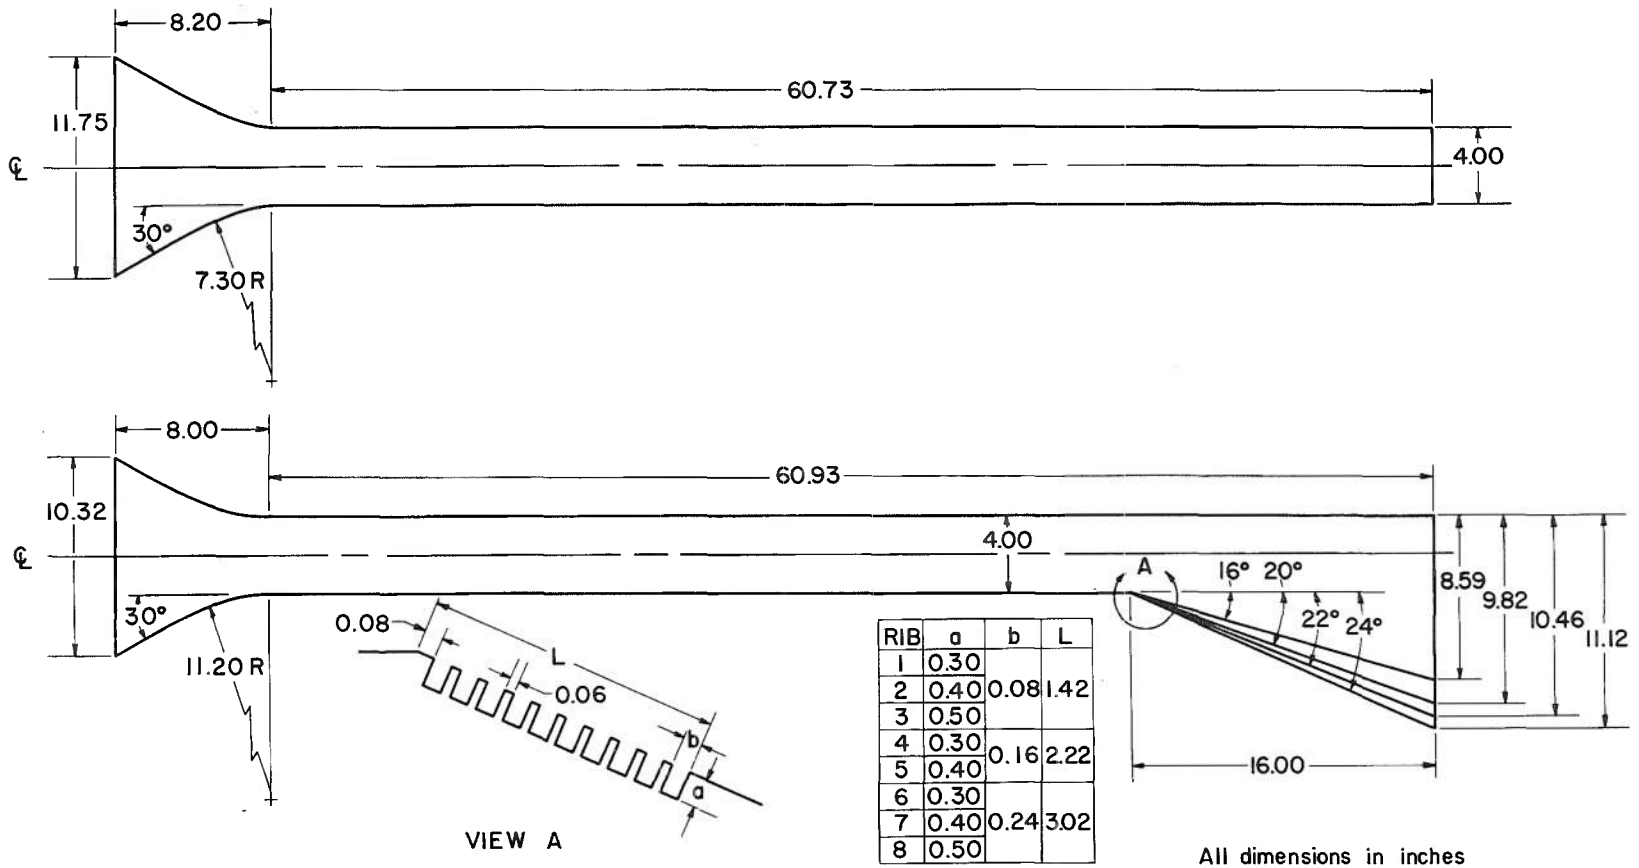


a. Test Unit and Ribs


Fig. 3 Test Unit Details and Dimensions

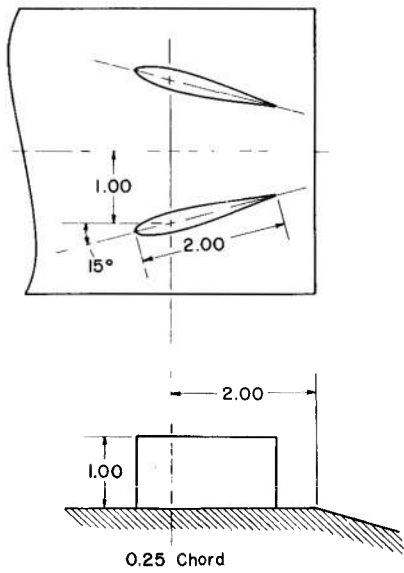


CONFIGURATION 1

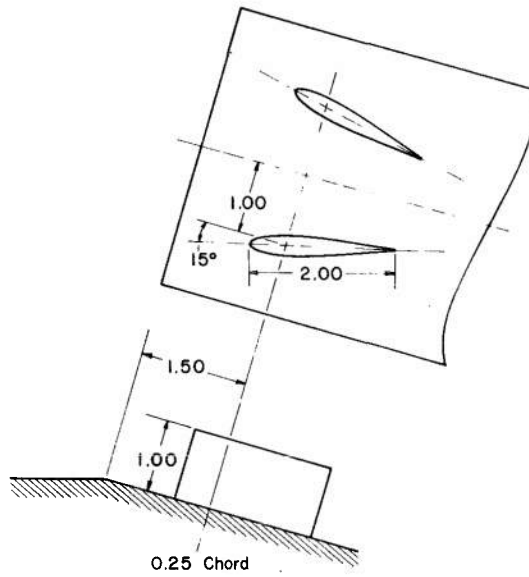

CONFIGURATION 2

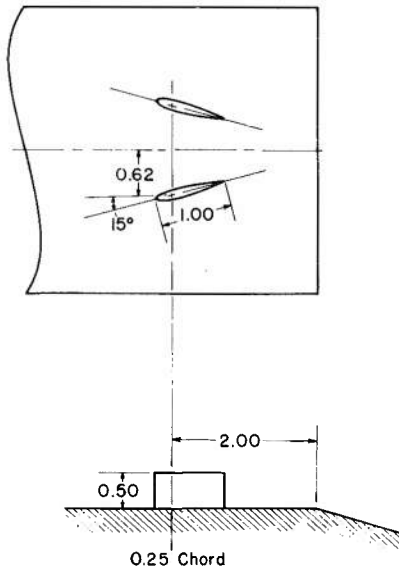

CONFIGURATION 3

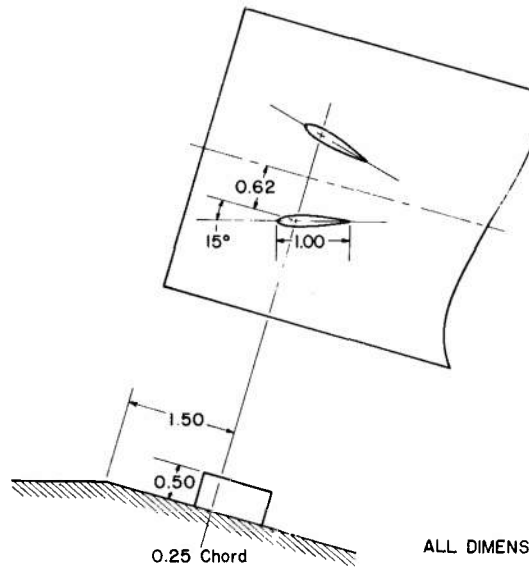


CONFIGURATION 4

ALL DIMENSIONS IN INCHES


b. Vortex Generators

Fig. 3 Concluded

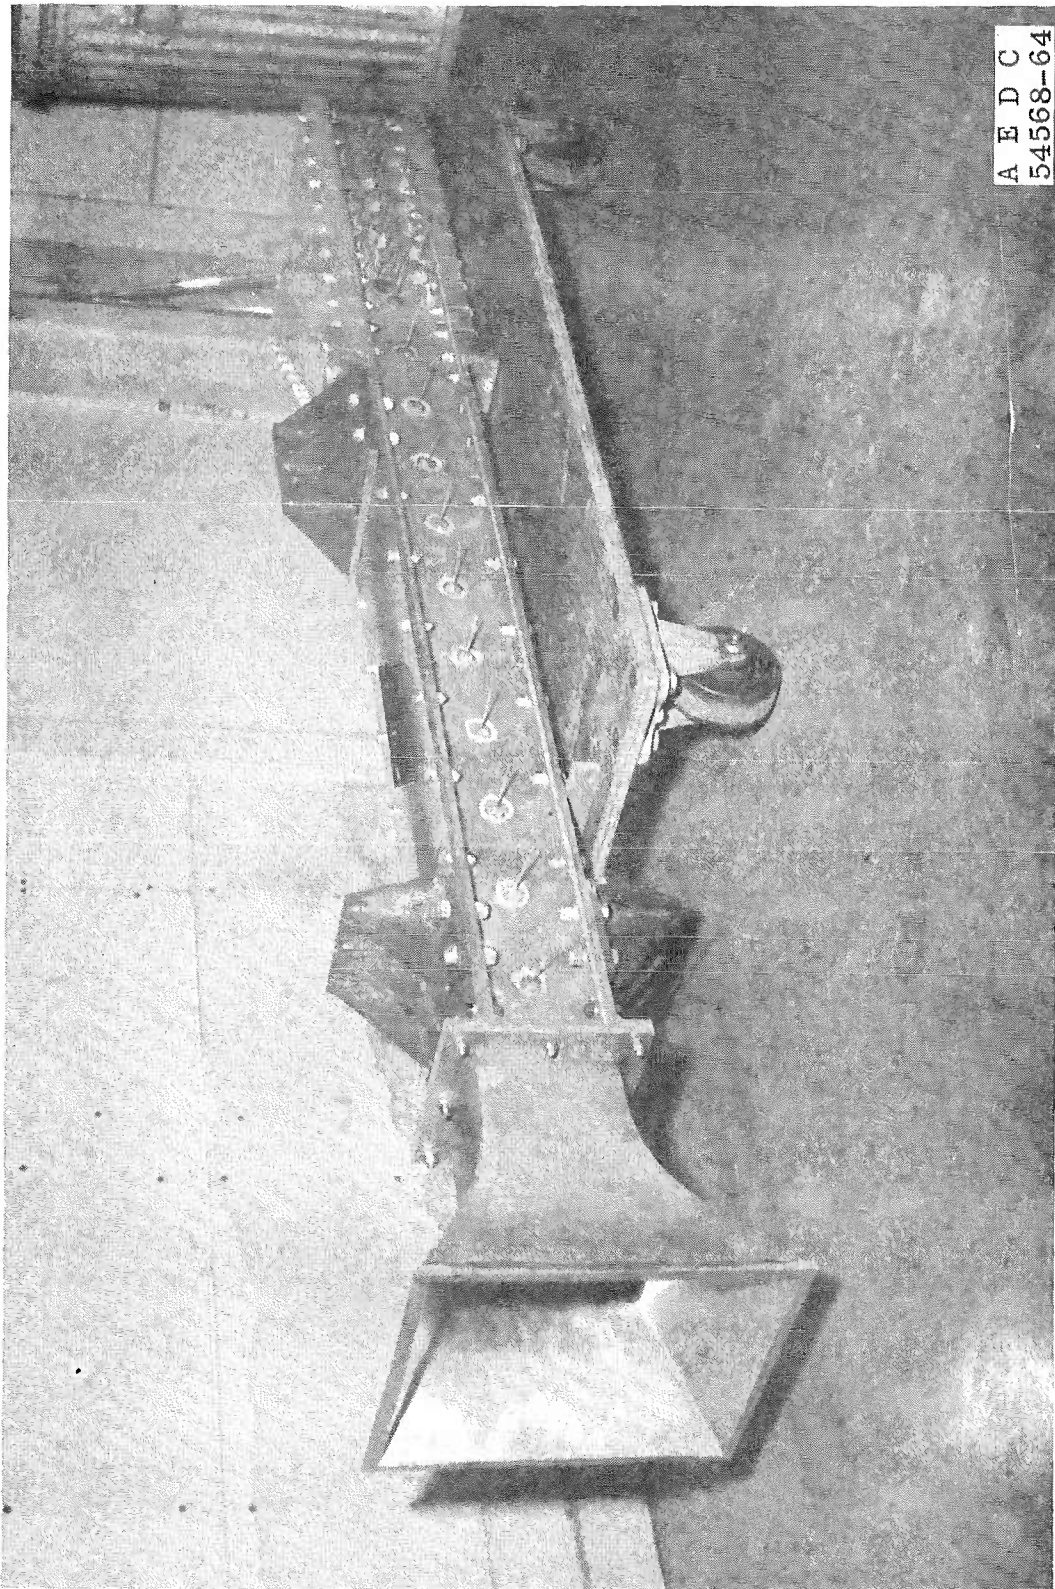


a. Test Unit before Installation

Fig. 4 Photographs of Test Unit

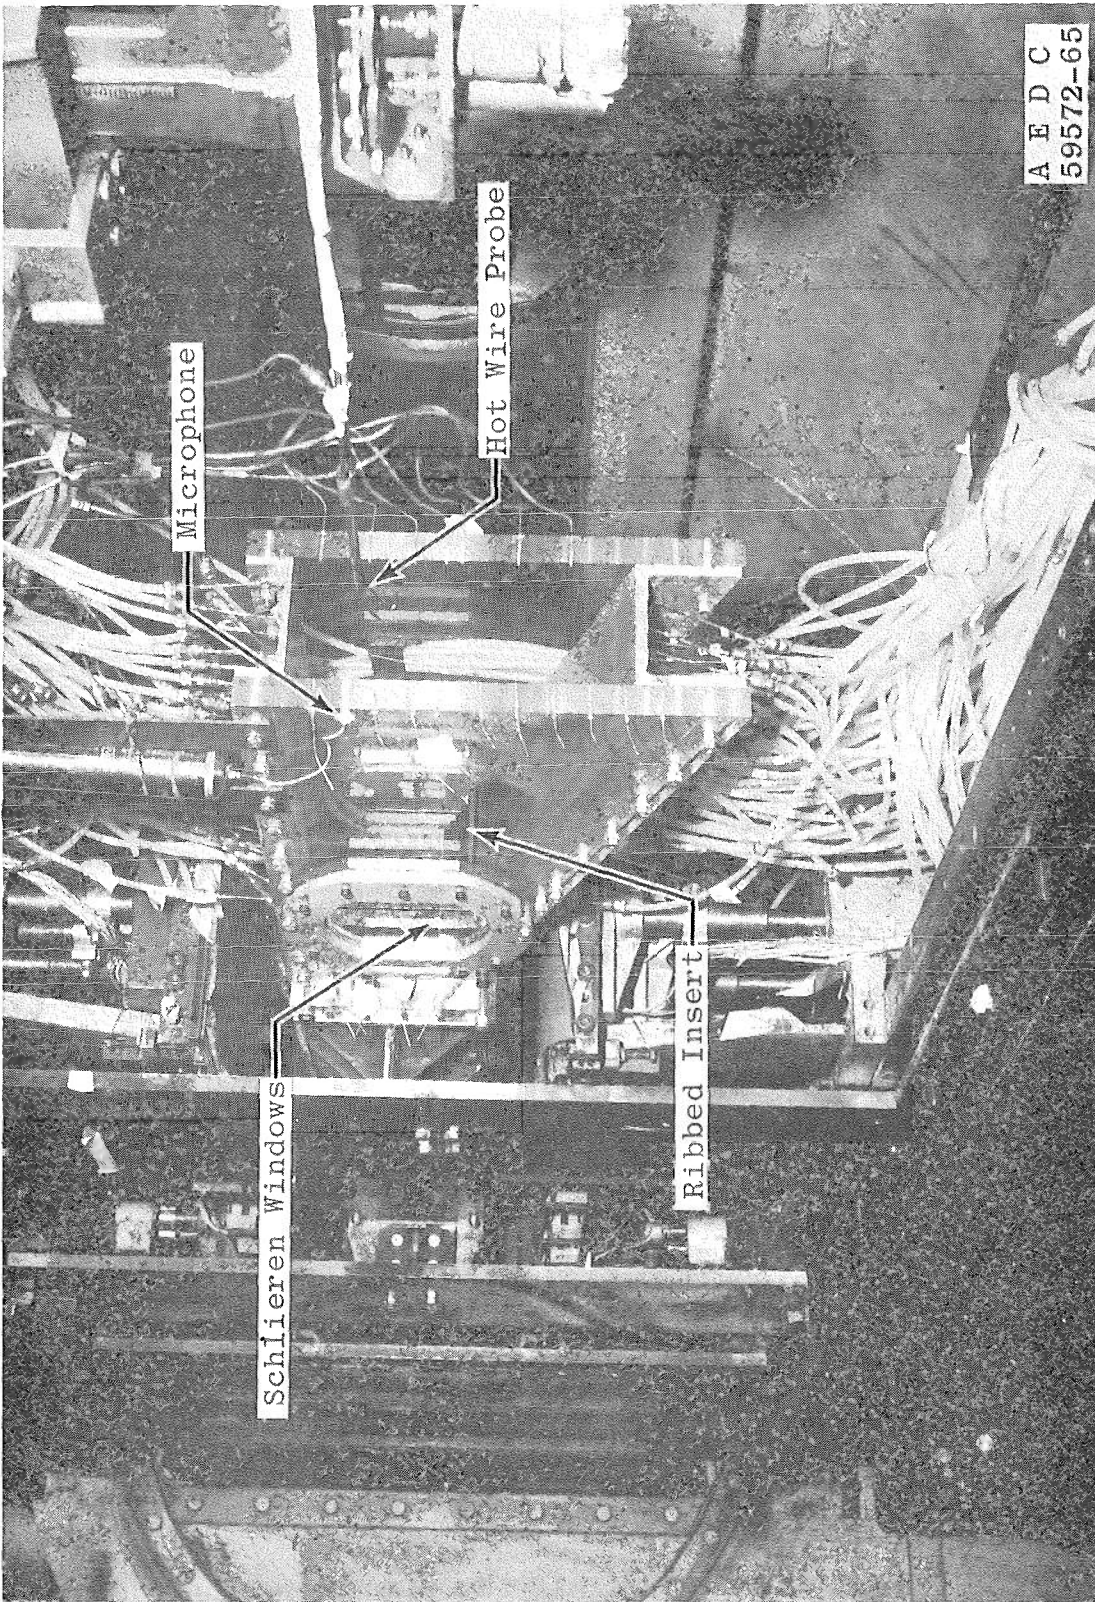

b. Test Unit Installed in Test Cell
Fig. 4 Continued

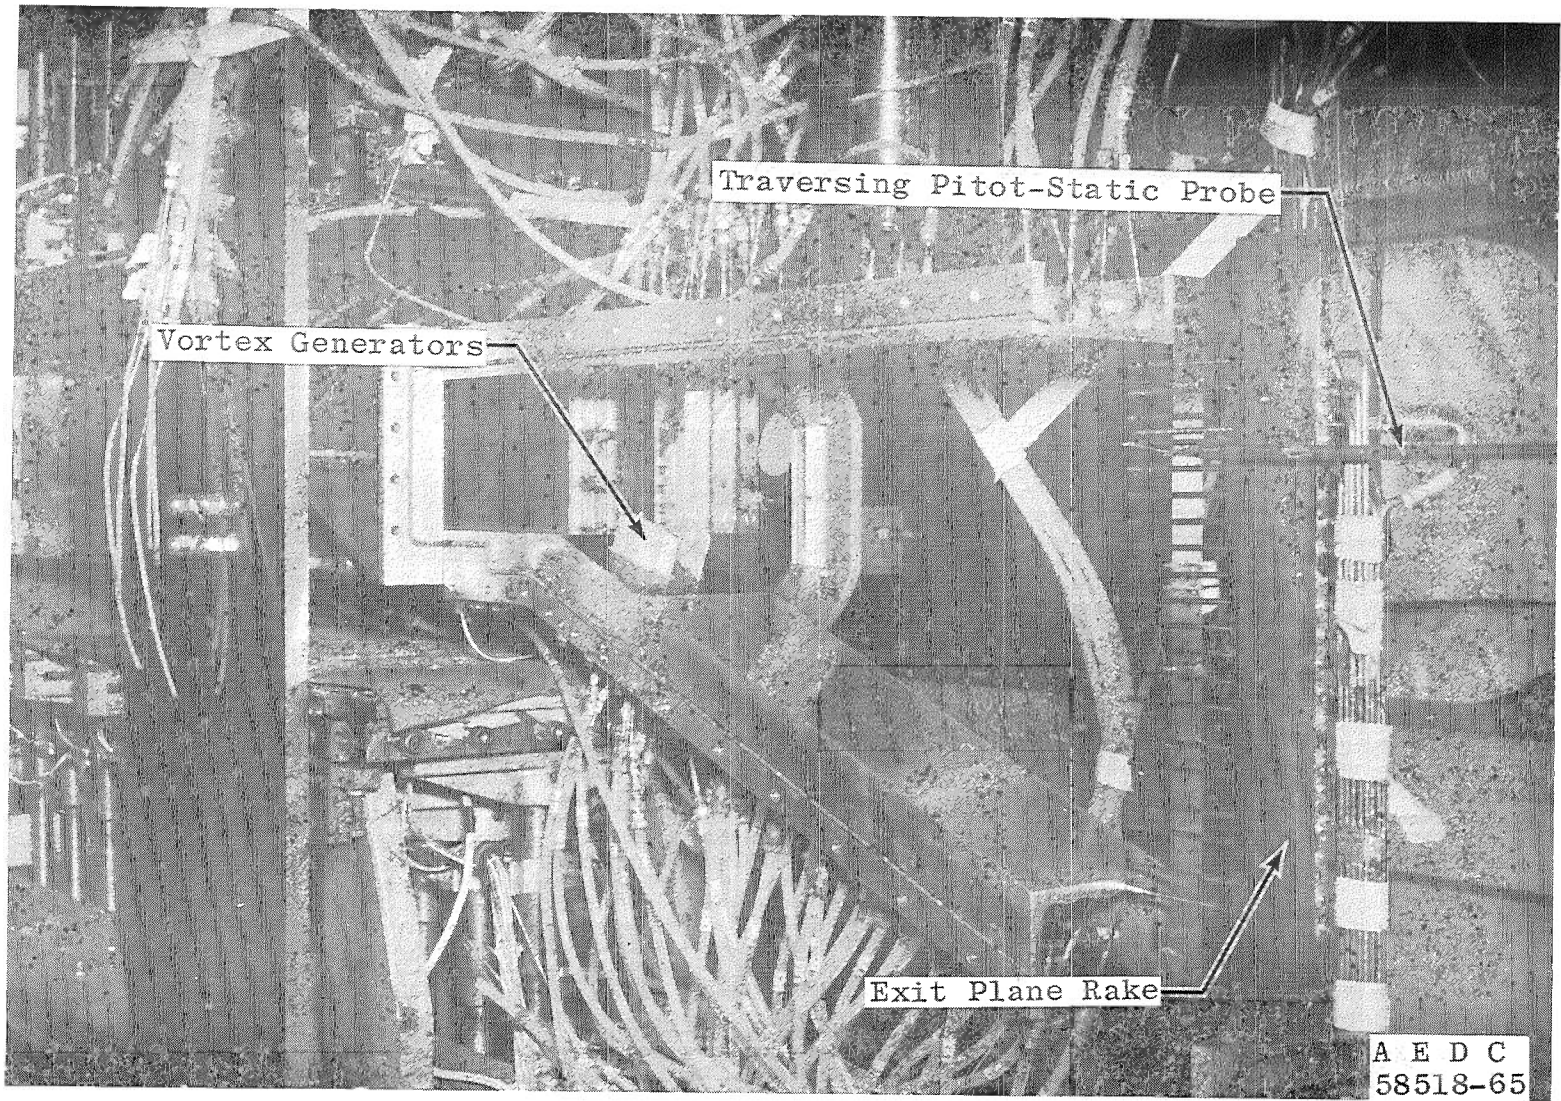

c. Vortex Generators (Configuration 2)

Fig. 4 Concluded



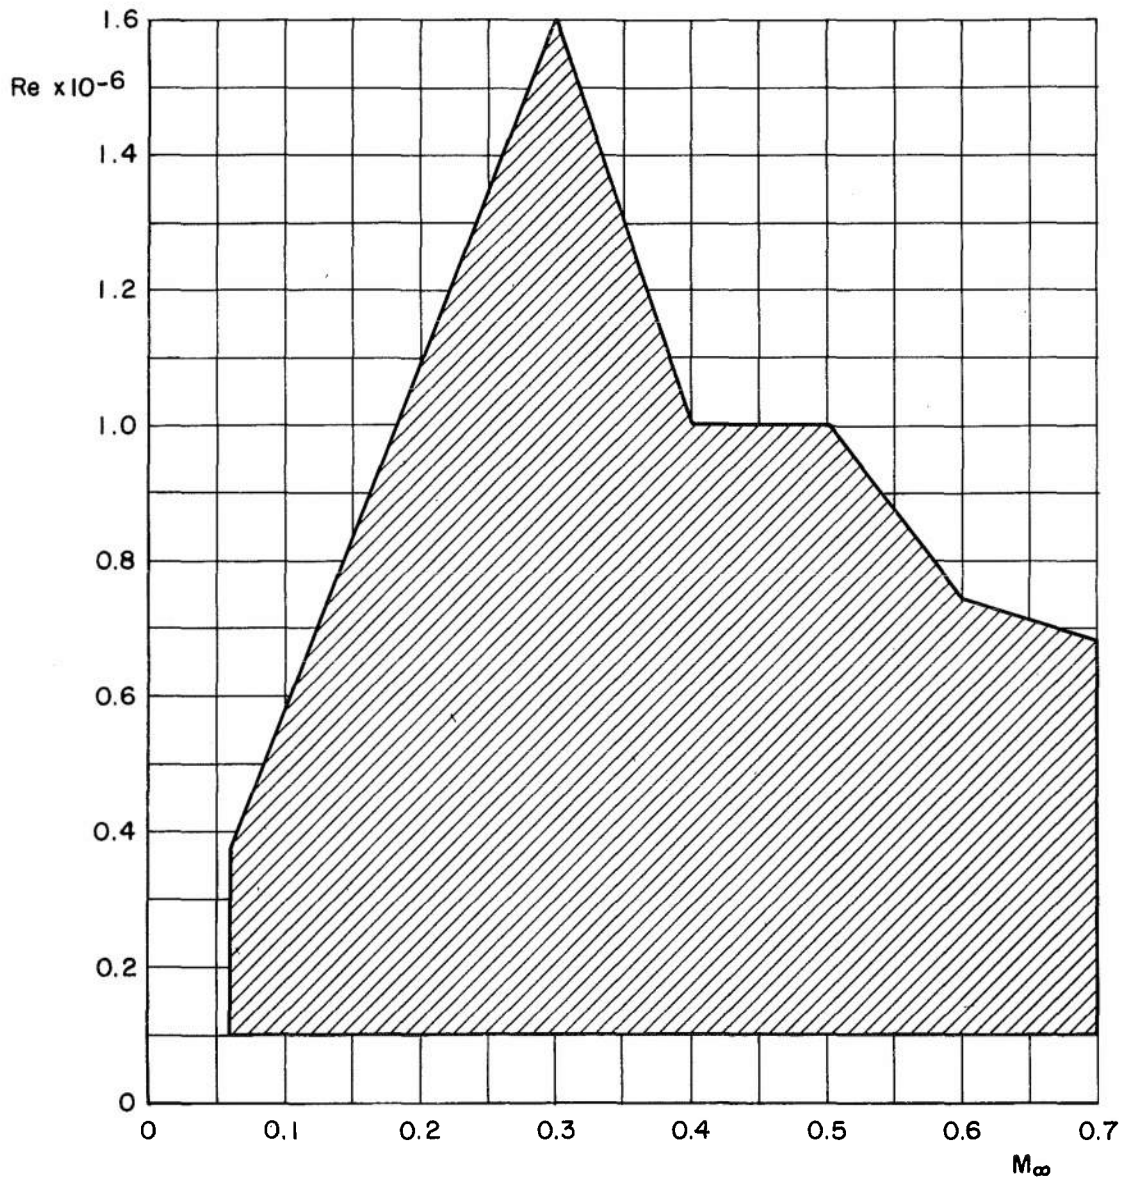




Fig. 5 Variation of Reynolds Number with Mach Number

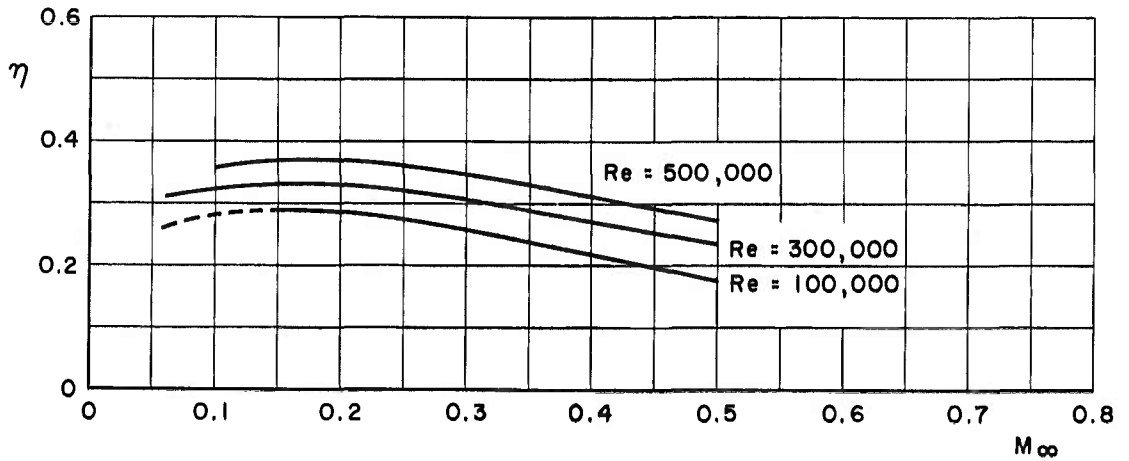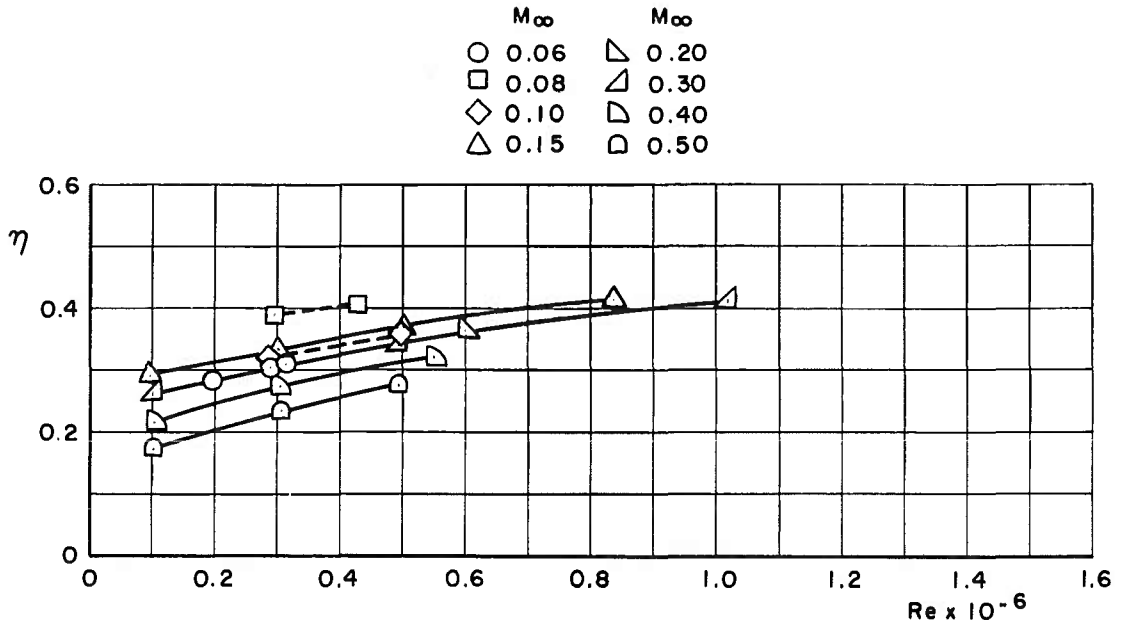



a. Smooth

Fig. 6 Variation of Pressure Efficiency with Reynolds Number and Mach Number for the 16-deg Diffuser with and without Ribs

M_∞		M_∞	
○	0.06	△	0.30
□	0.08	▷	0.40
◇	0.10	◻	0.50
△	0.15	◊	0.60
▷	0.20		

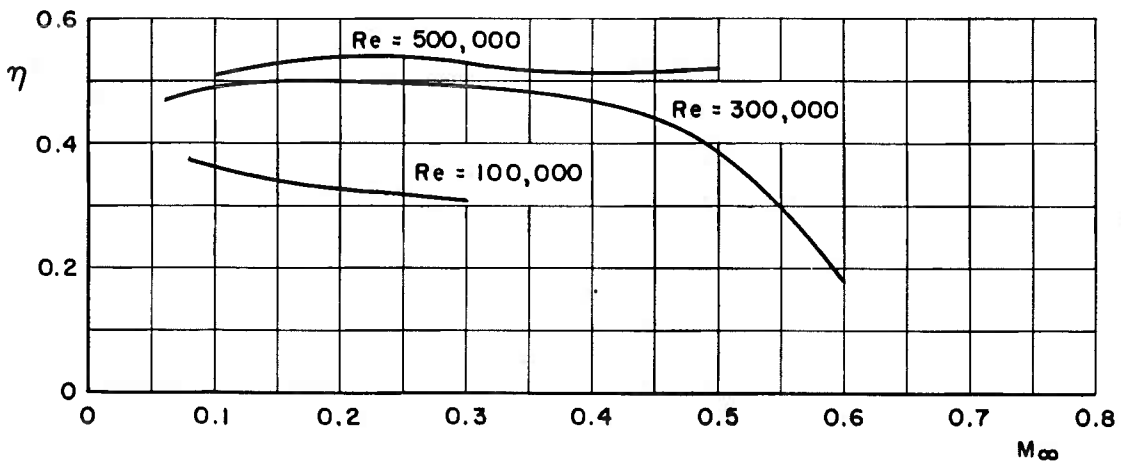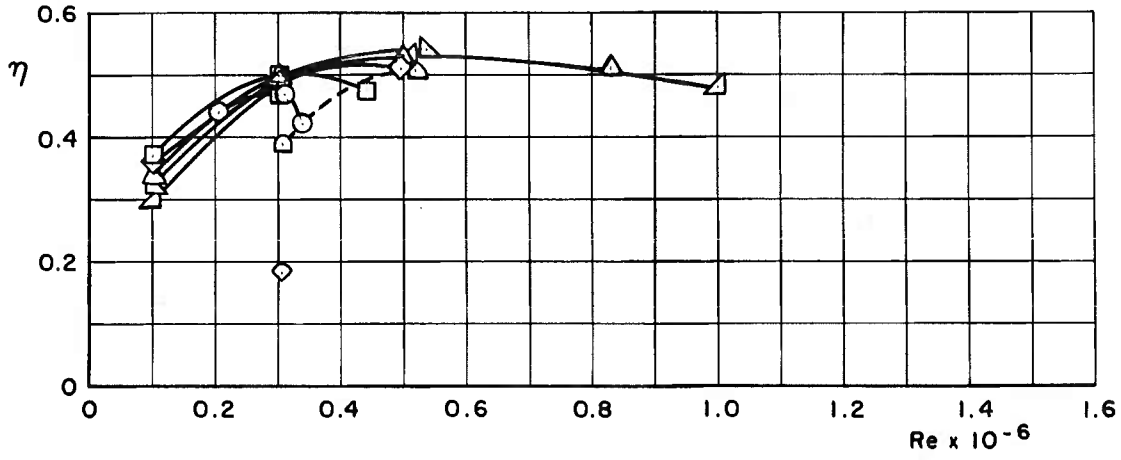

b. Configuration 3
 Fig. 6 Continued

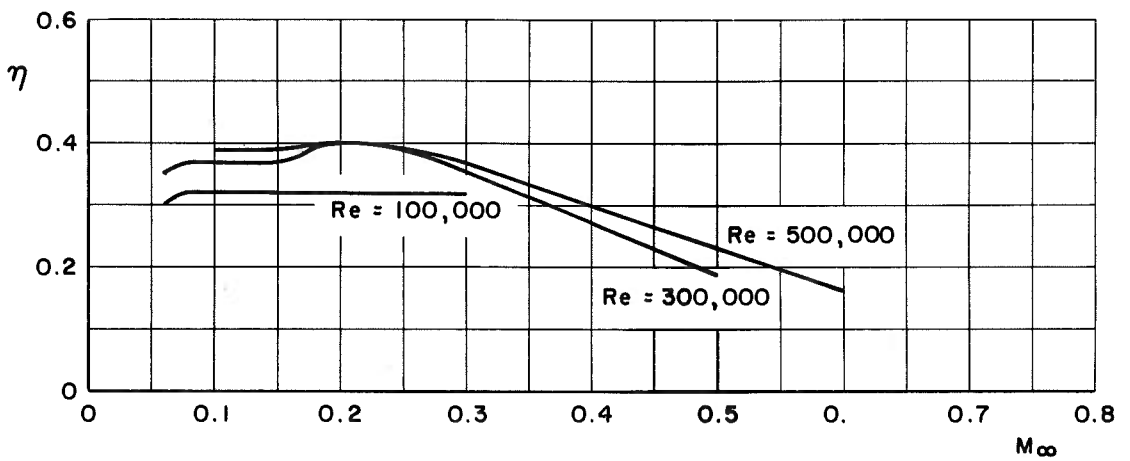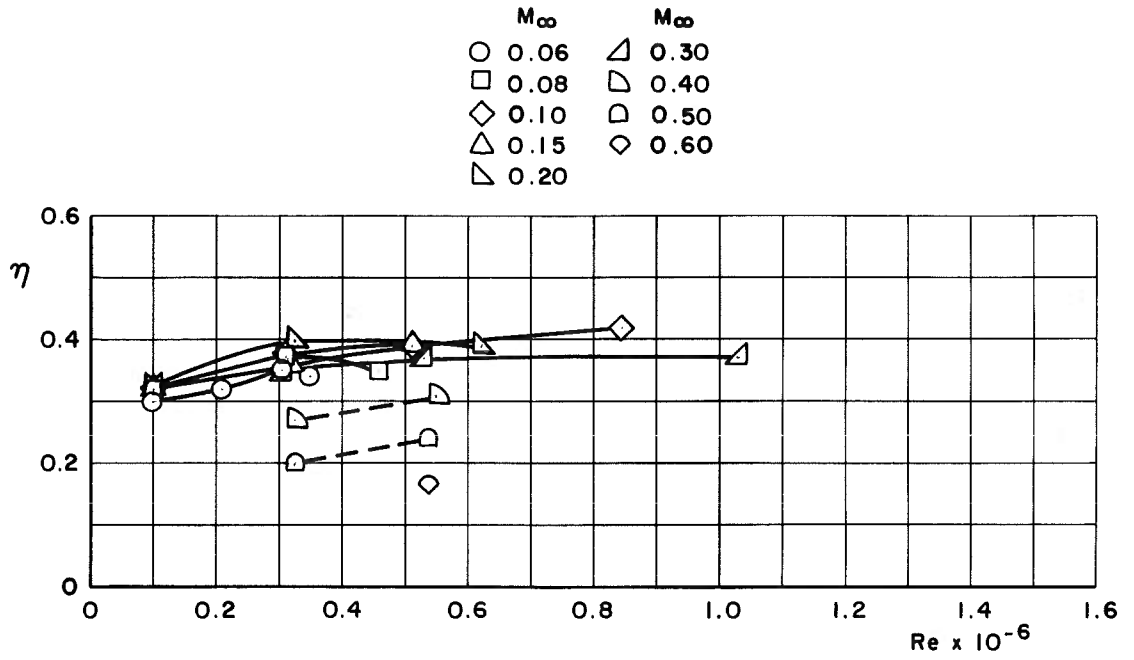

c. Configuration 8

Fig. 6 Concluded







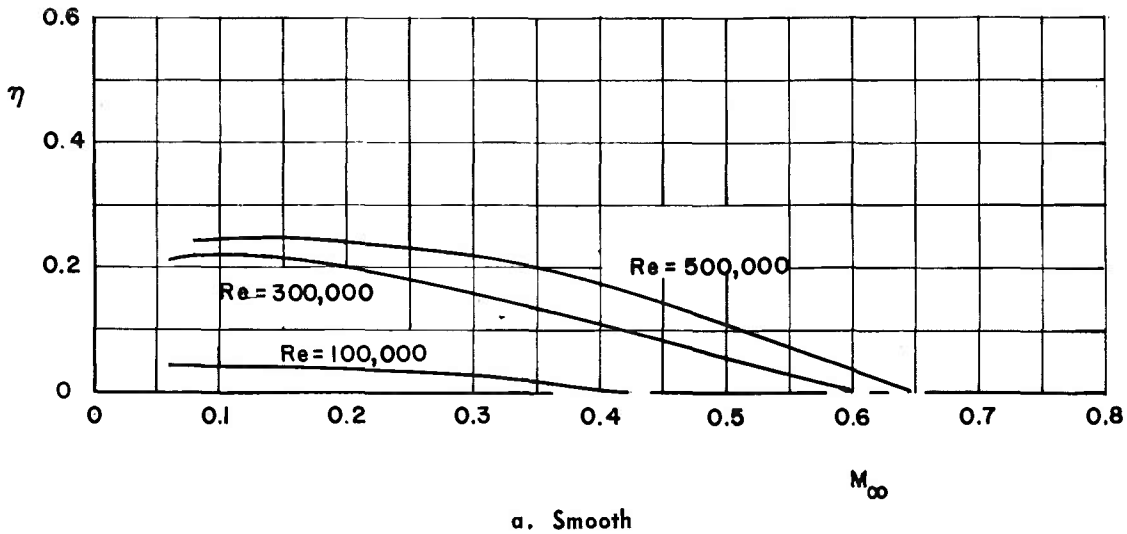


Fig. 7 Variation of Pressure Efficiency with Reynolds Number and Mach Number for the 20-deg Diffuser with and without Ribs

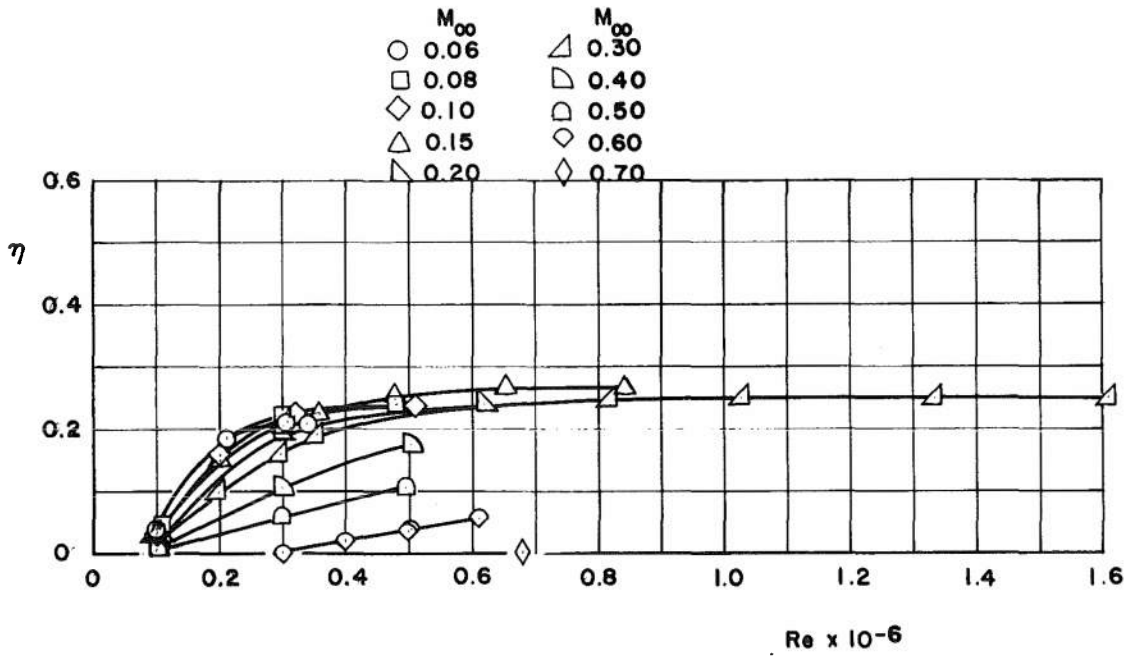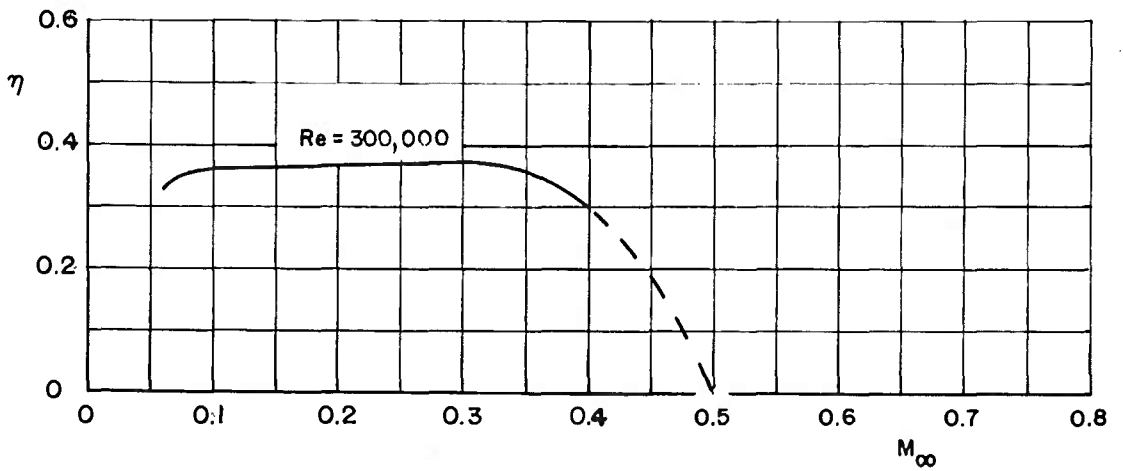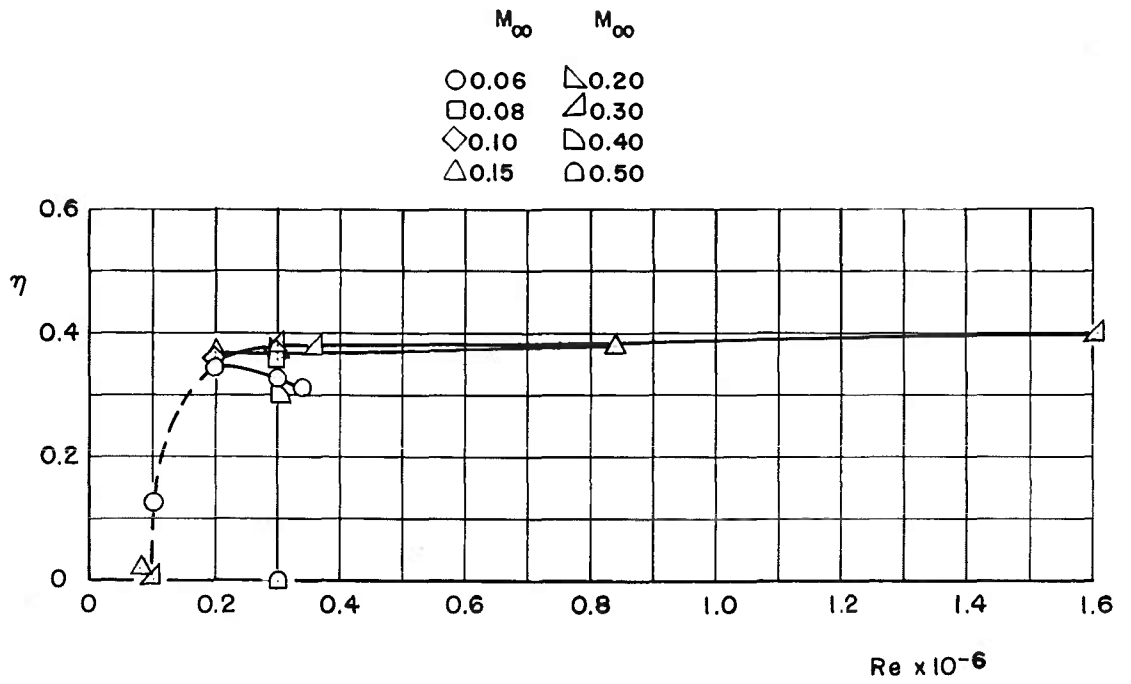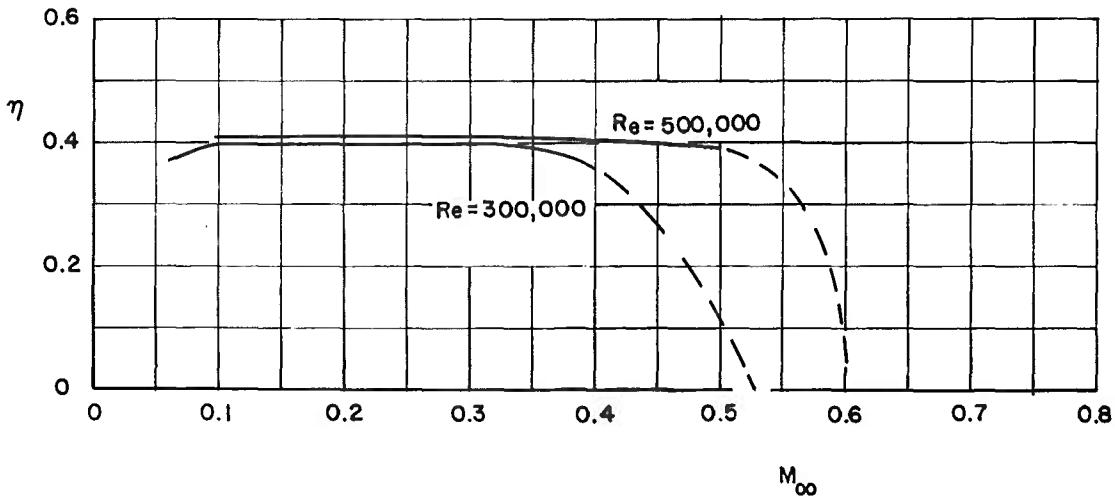
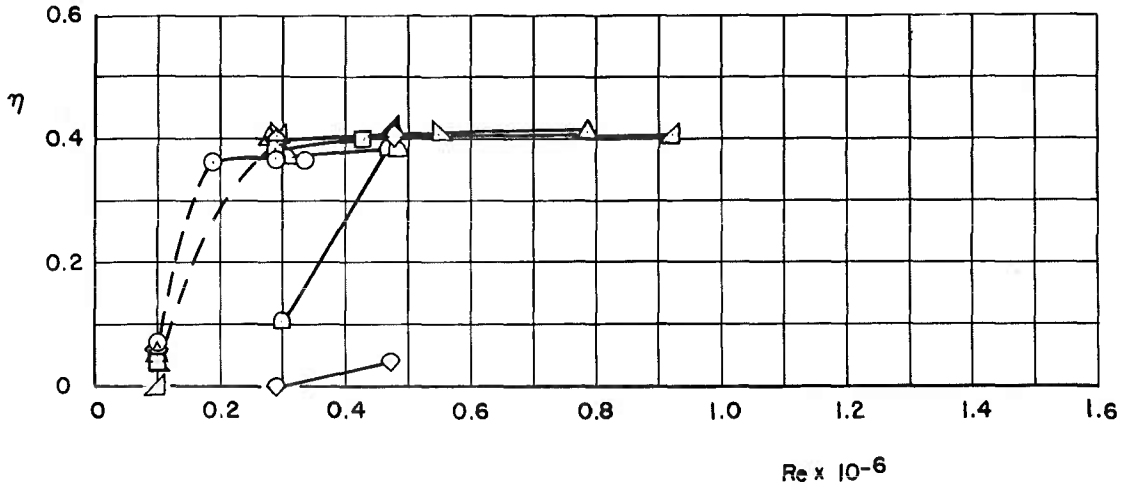


b. Configuration 1
 Fig. 7 Continued





c. Configuration 2

Fig. 7 Continued

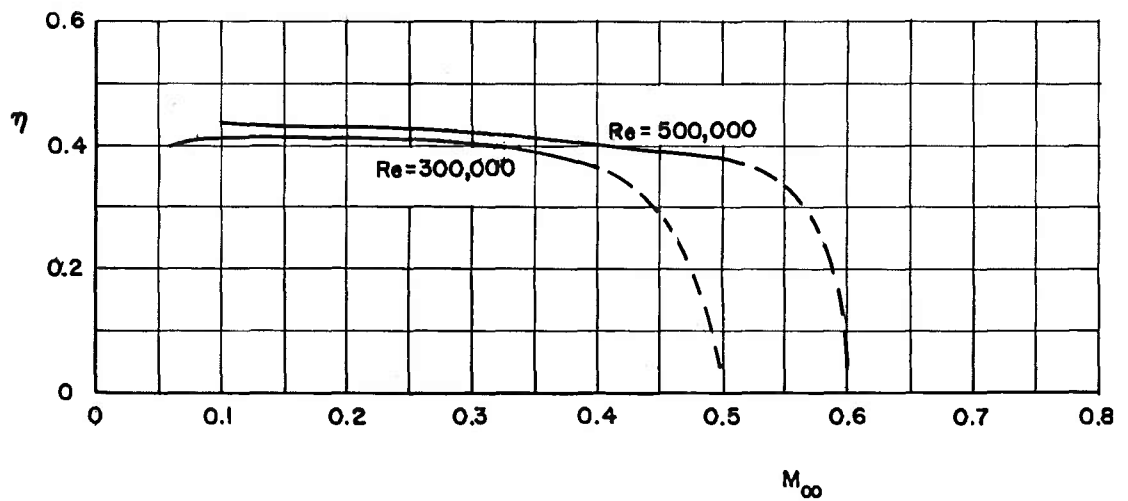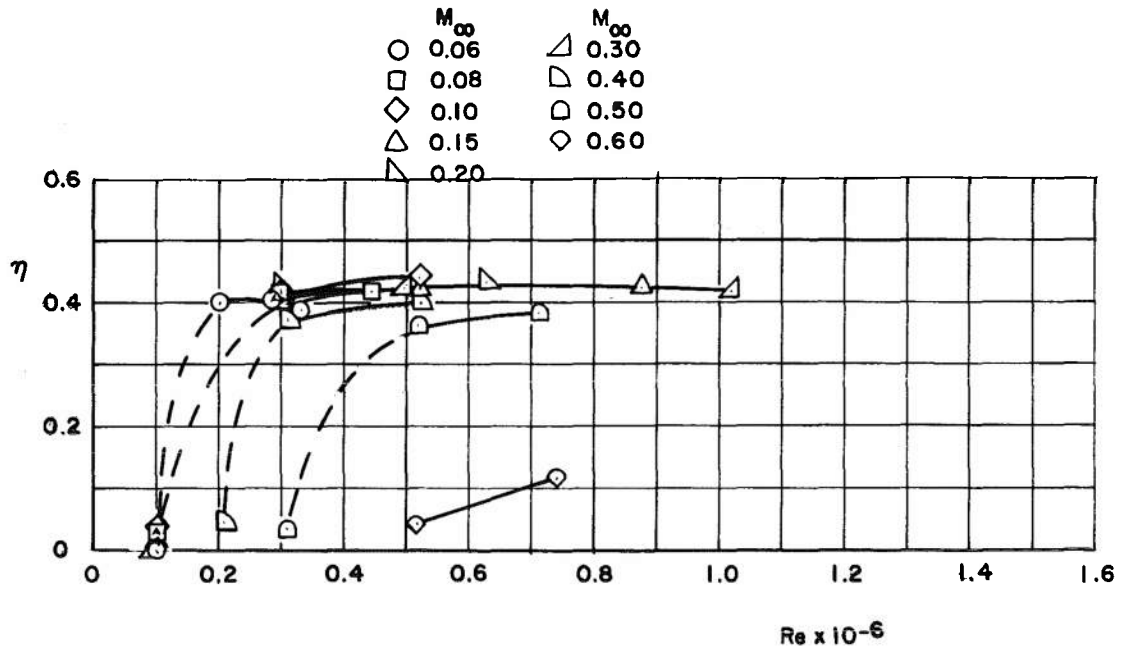



d. Configuration 3

Fig. 7 Continued


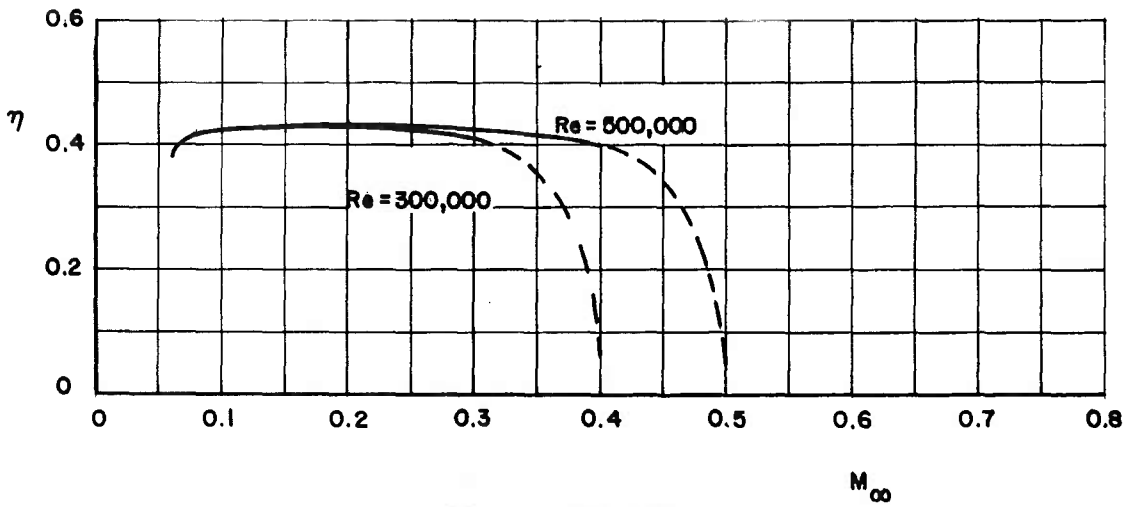
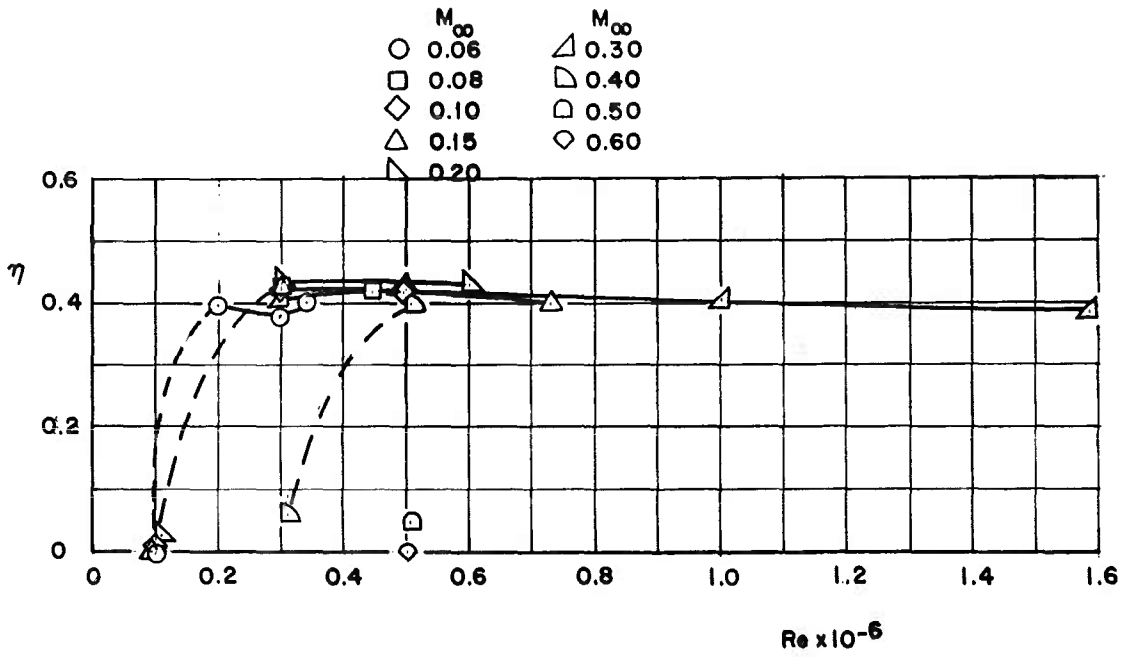


e. Configuration 4



Fig. 7 Continued

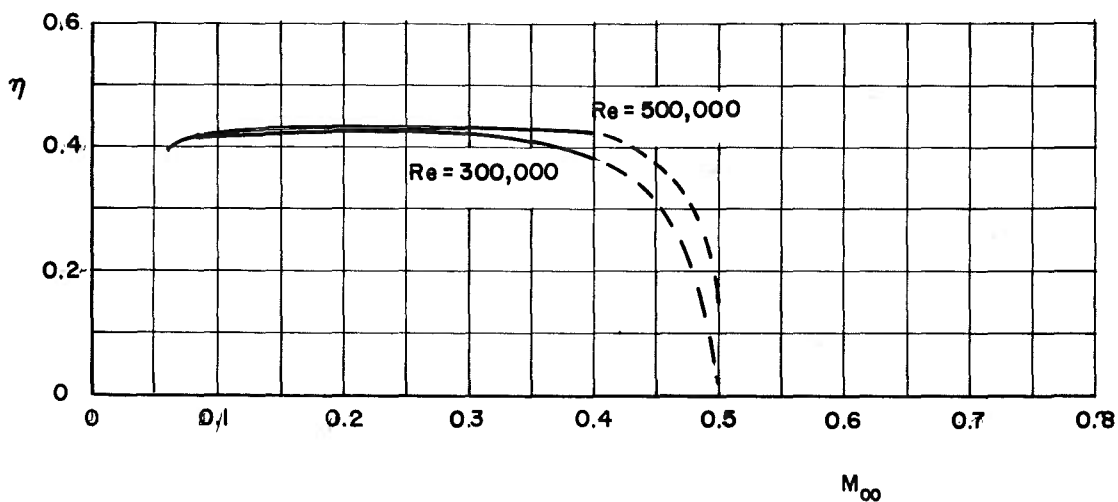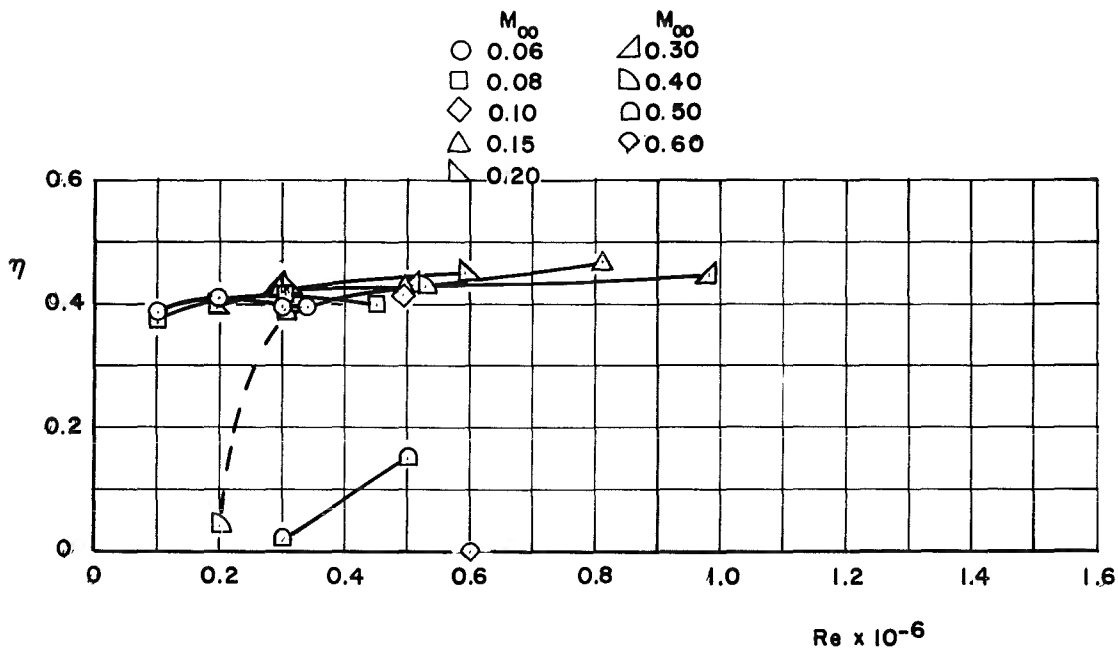

f. Configuration 5
Fig. 7 Continued

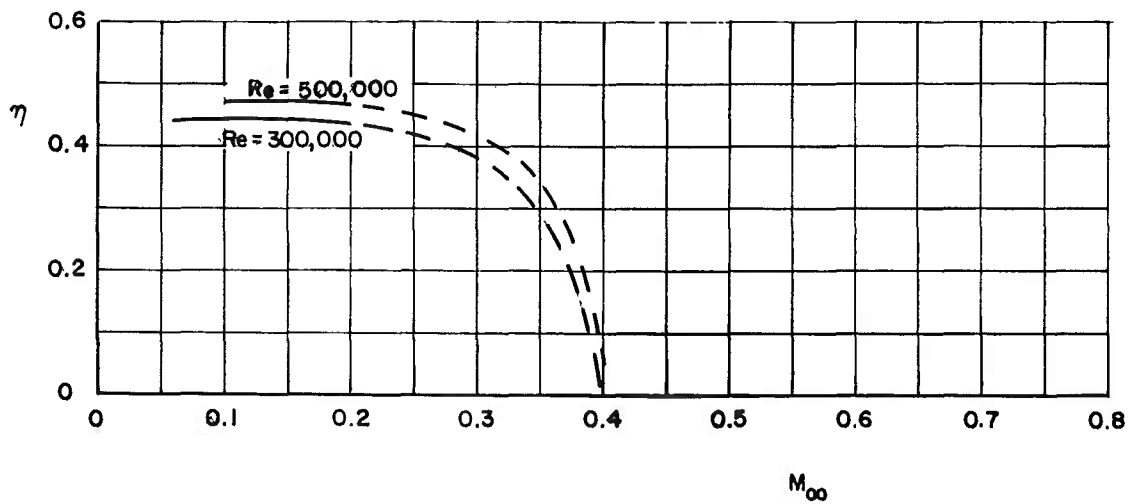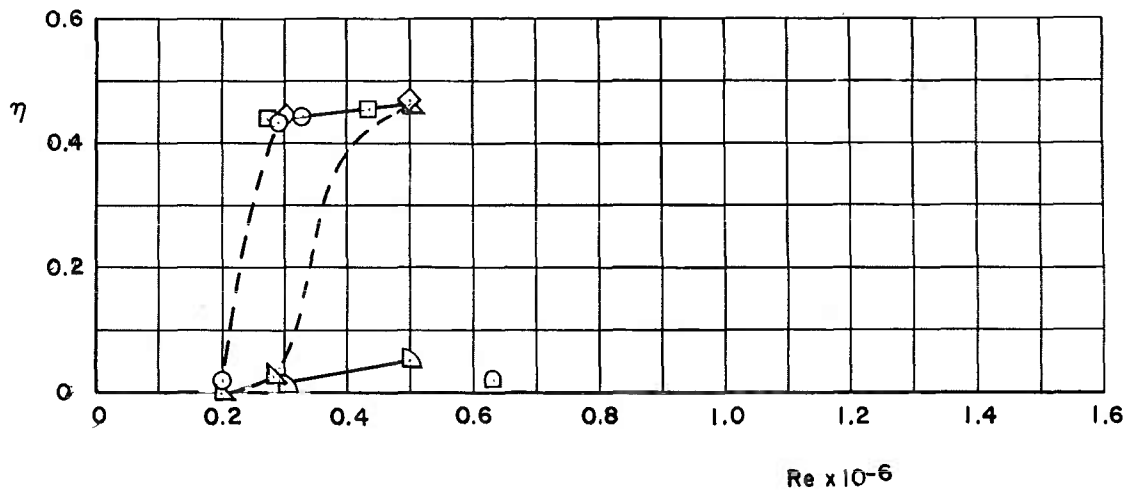



g. Configuration 6
Fig. 7 Continued

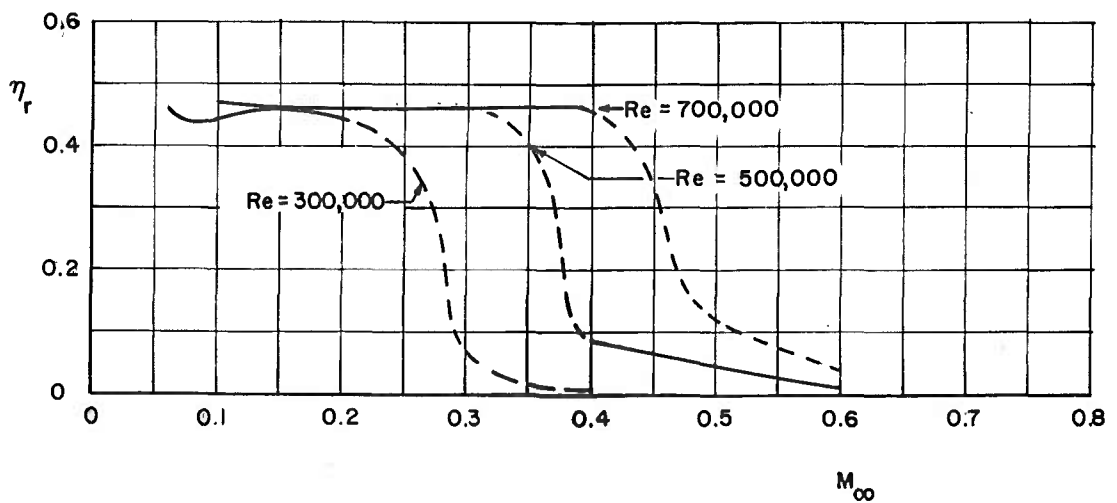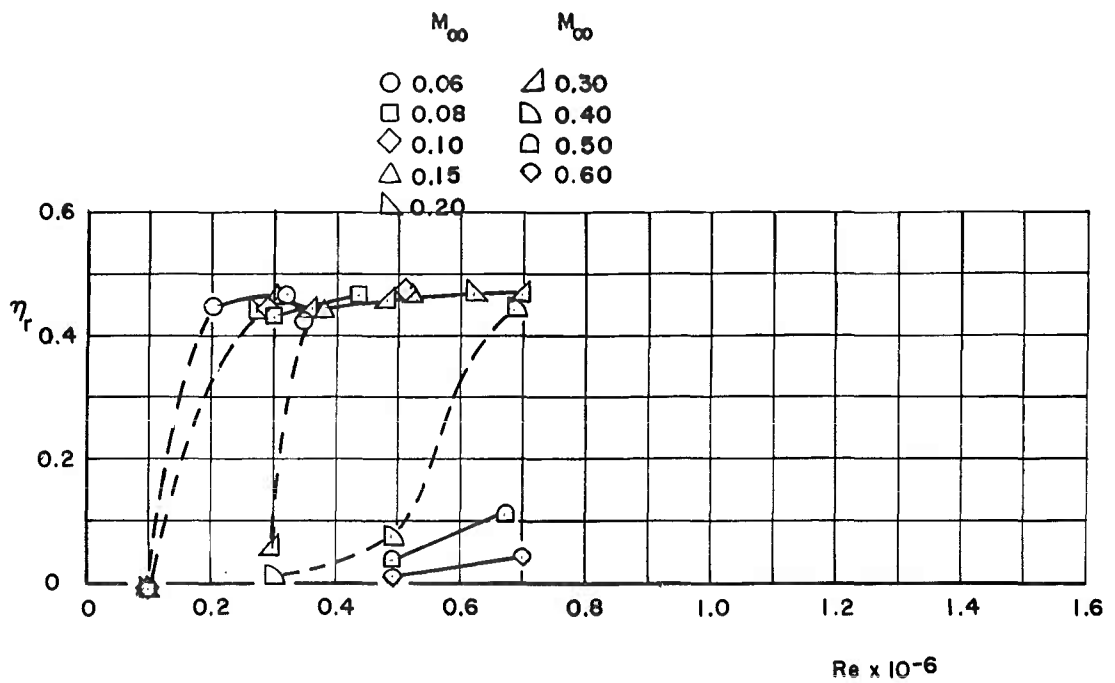



h. Configuration 7

Fig. 7 Continued

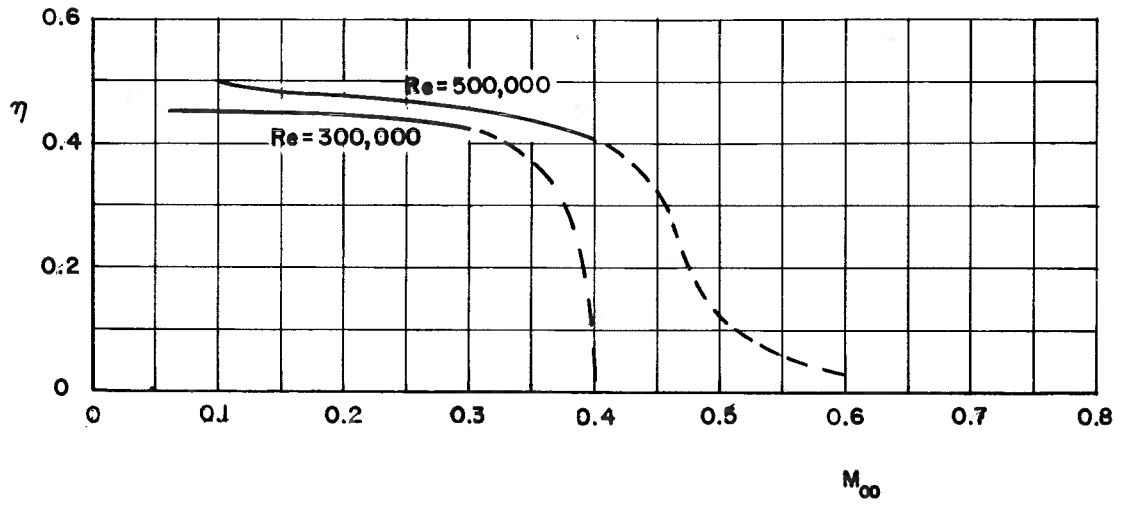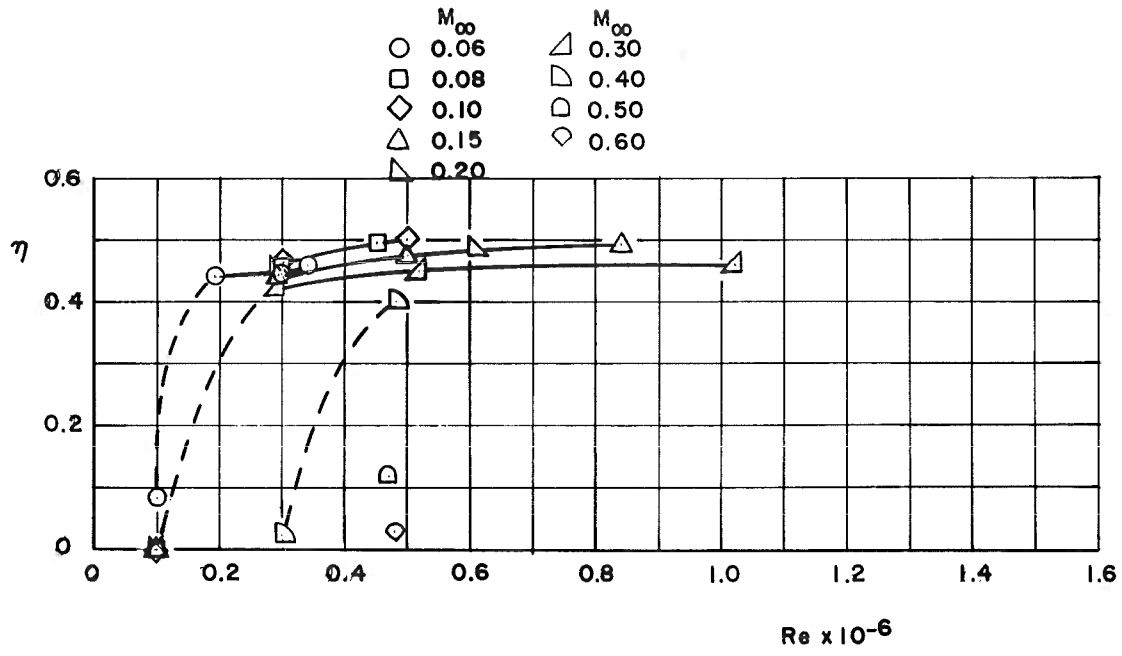



i. Configuration 8

Fig. 7 Concluded

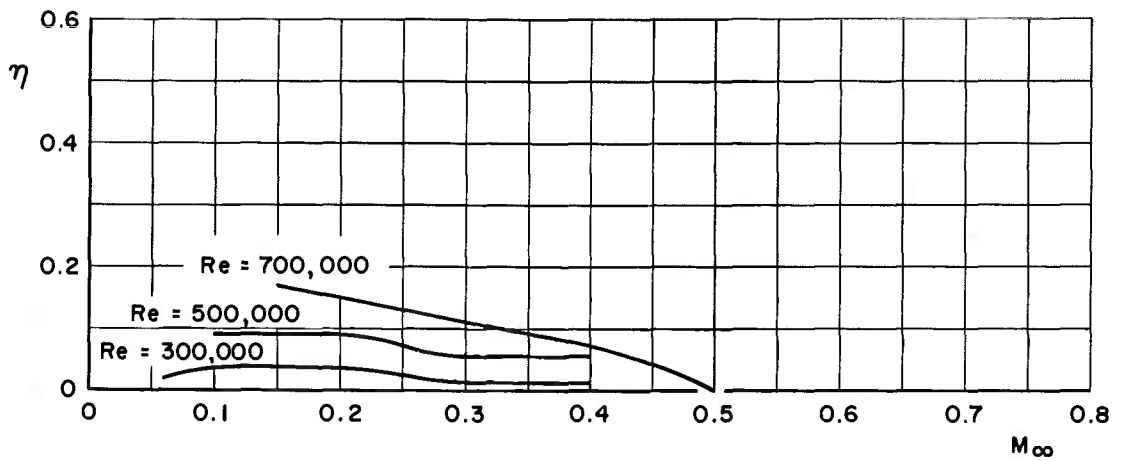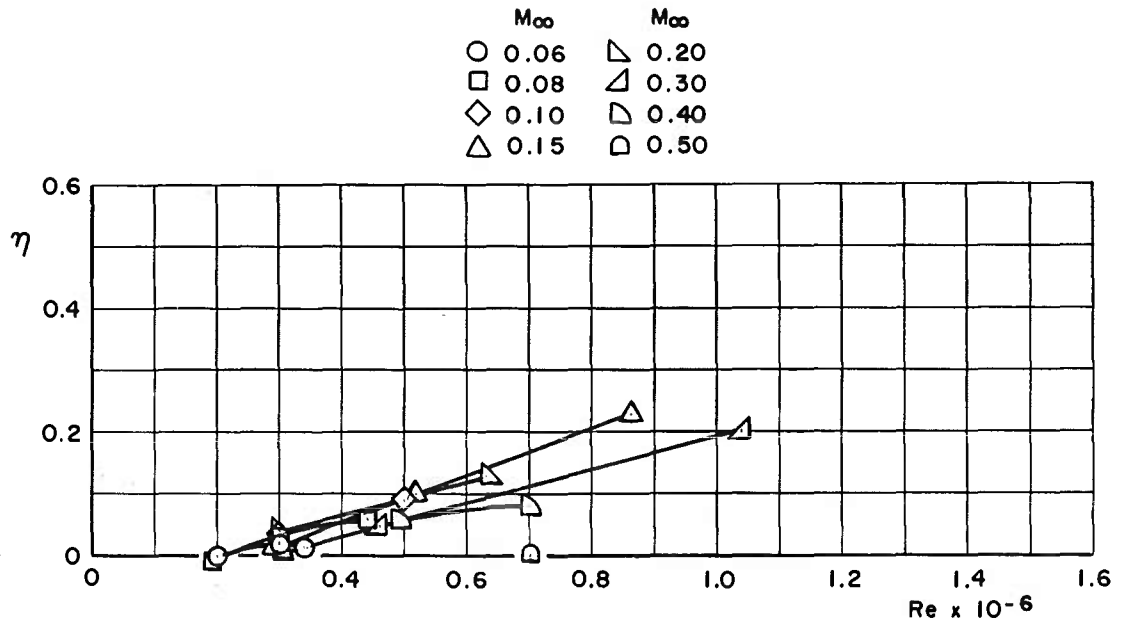



a. Smooth

Fig. 8 Variation of Pressure Efficiency with Reynolds Number and Mach Number for the 22-deg Diffuser with and without Ribs

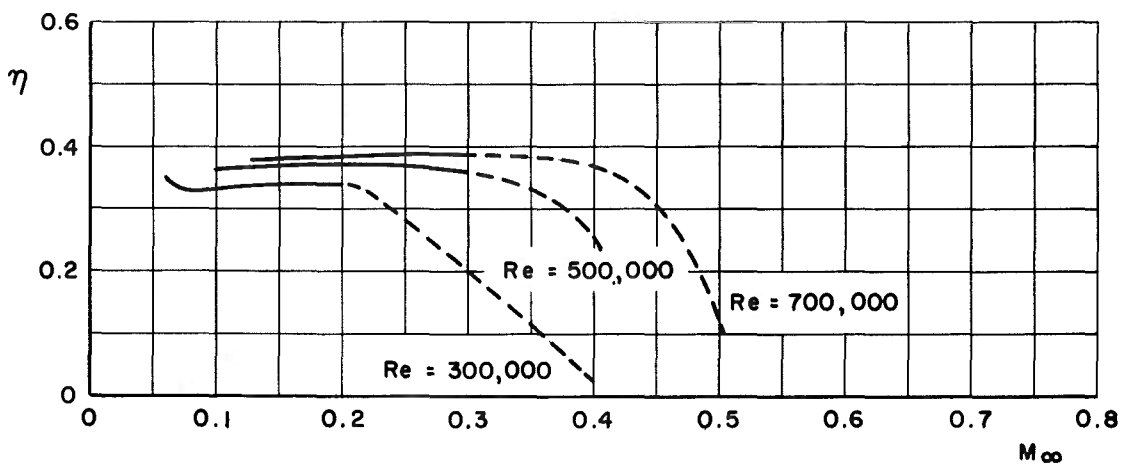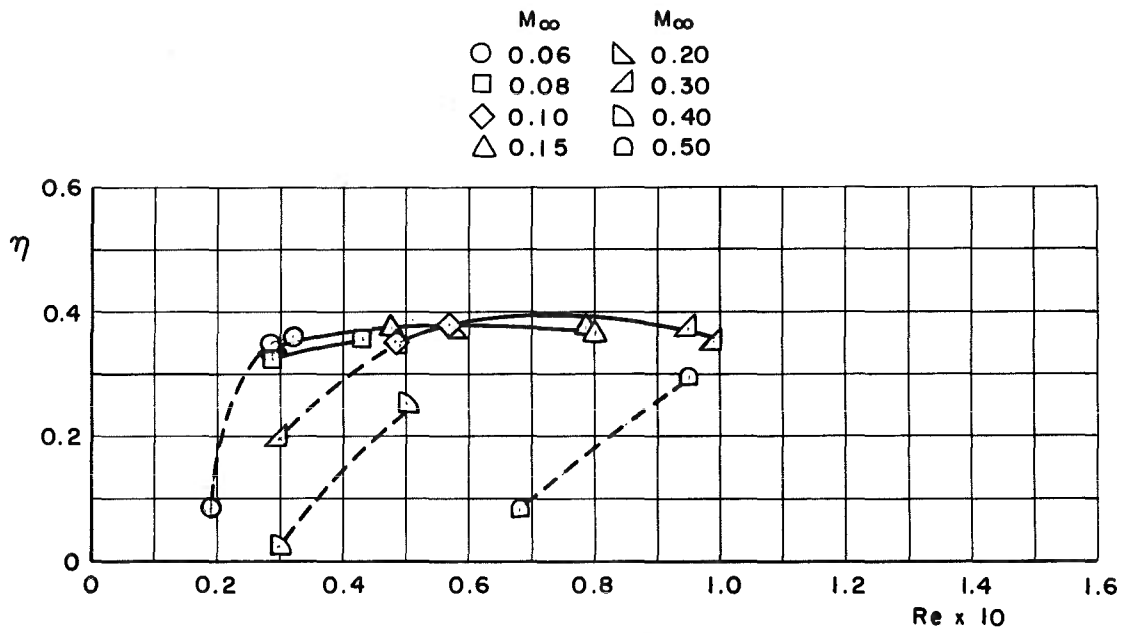



b. Configuration 1

Fig. 8 Continued

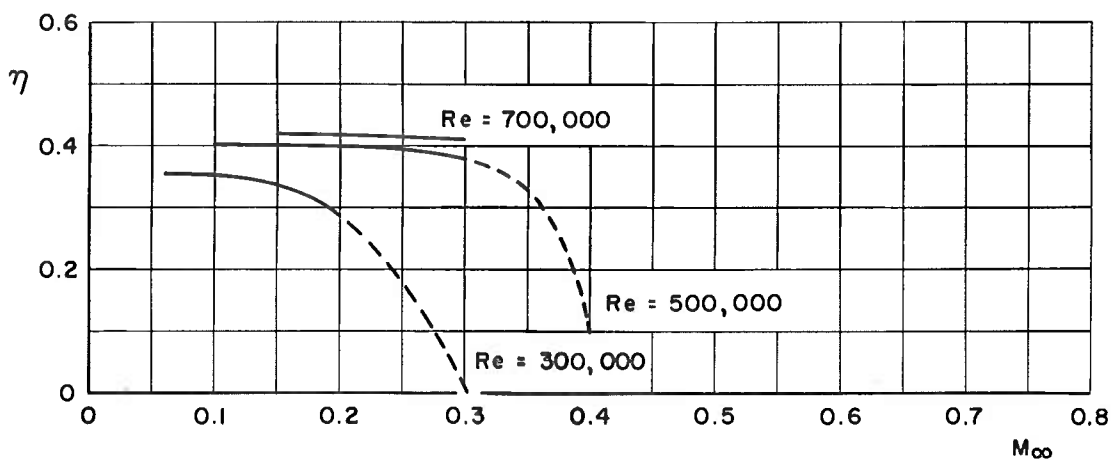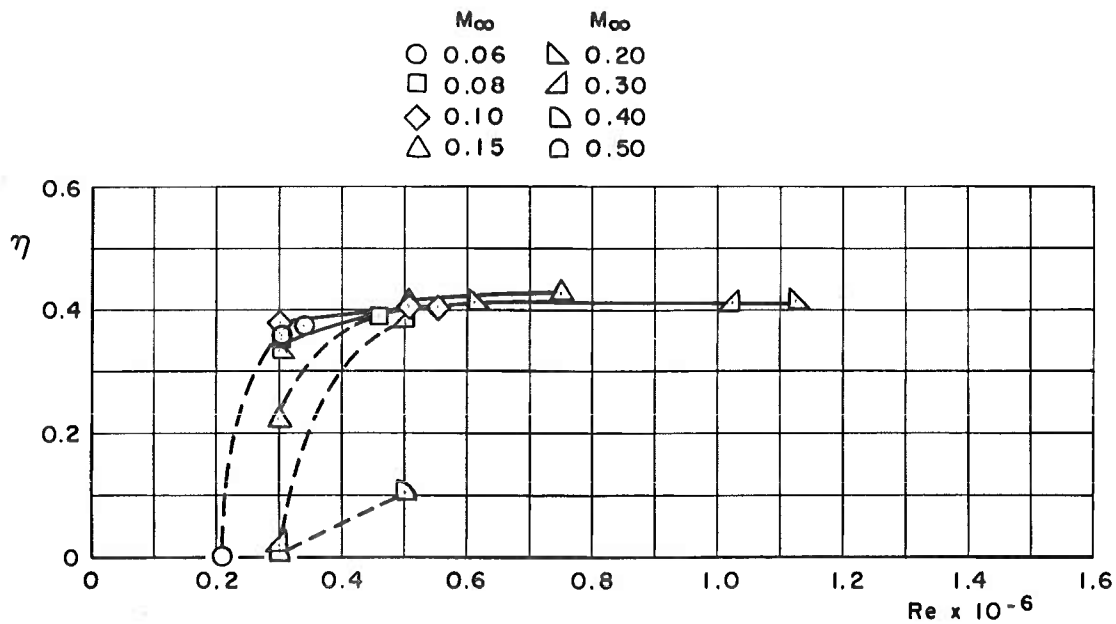

c. Configuration 3

Fig. 8 Continued

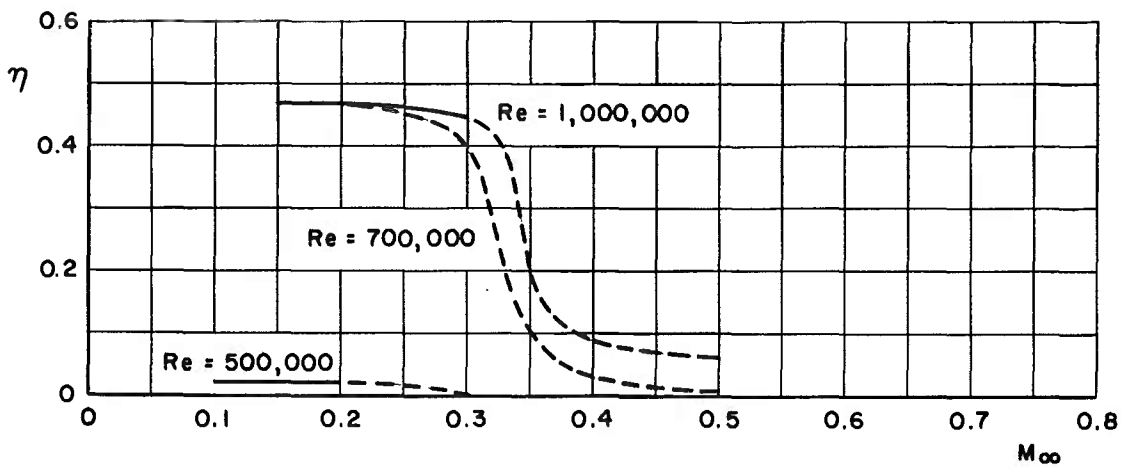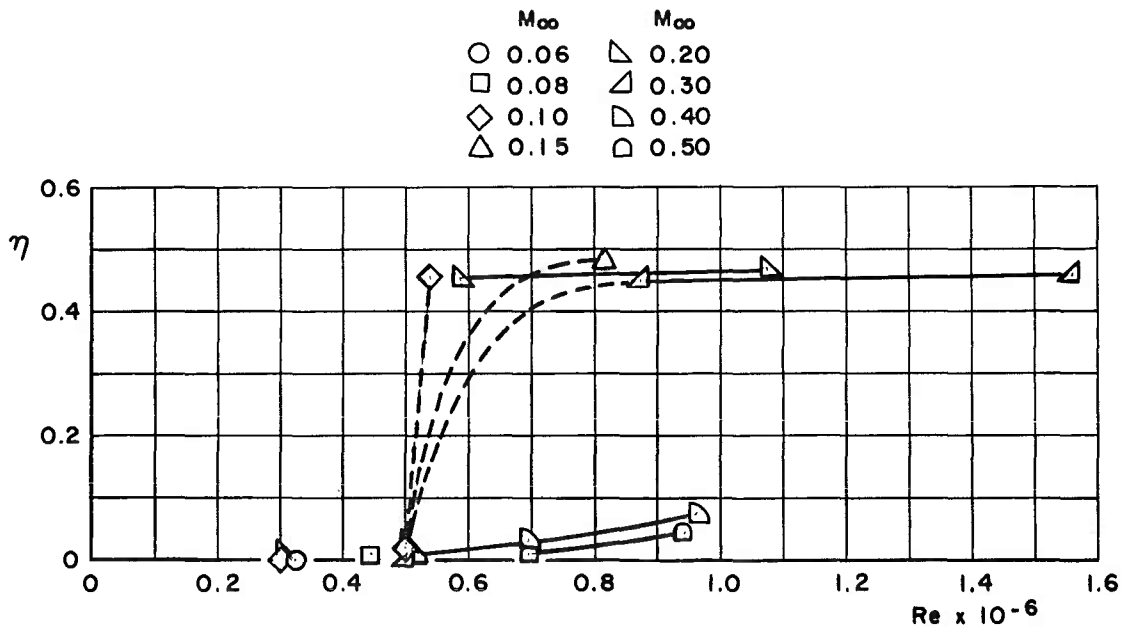

d. Configuration 8

Fig. 8 Concluded



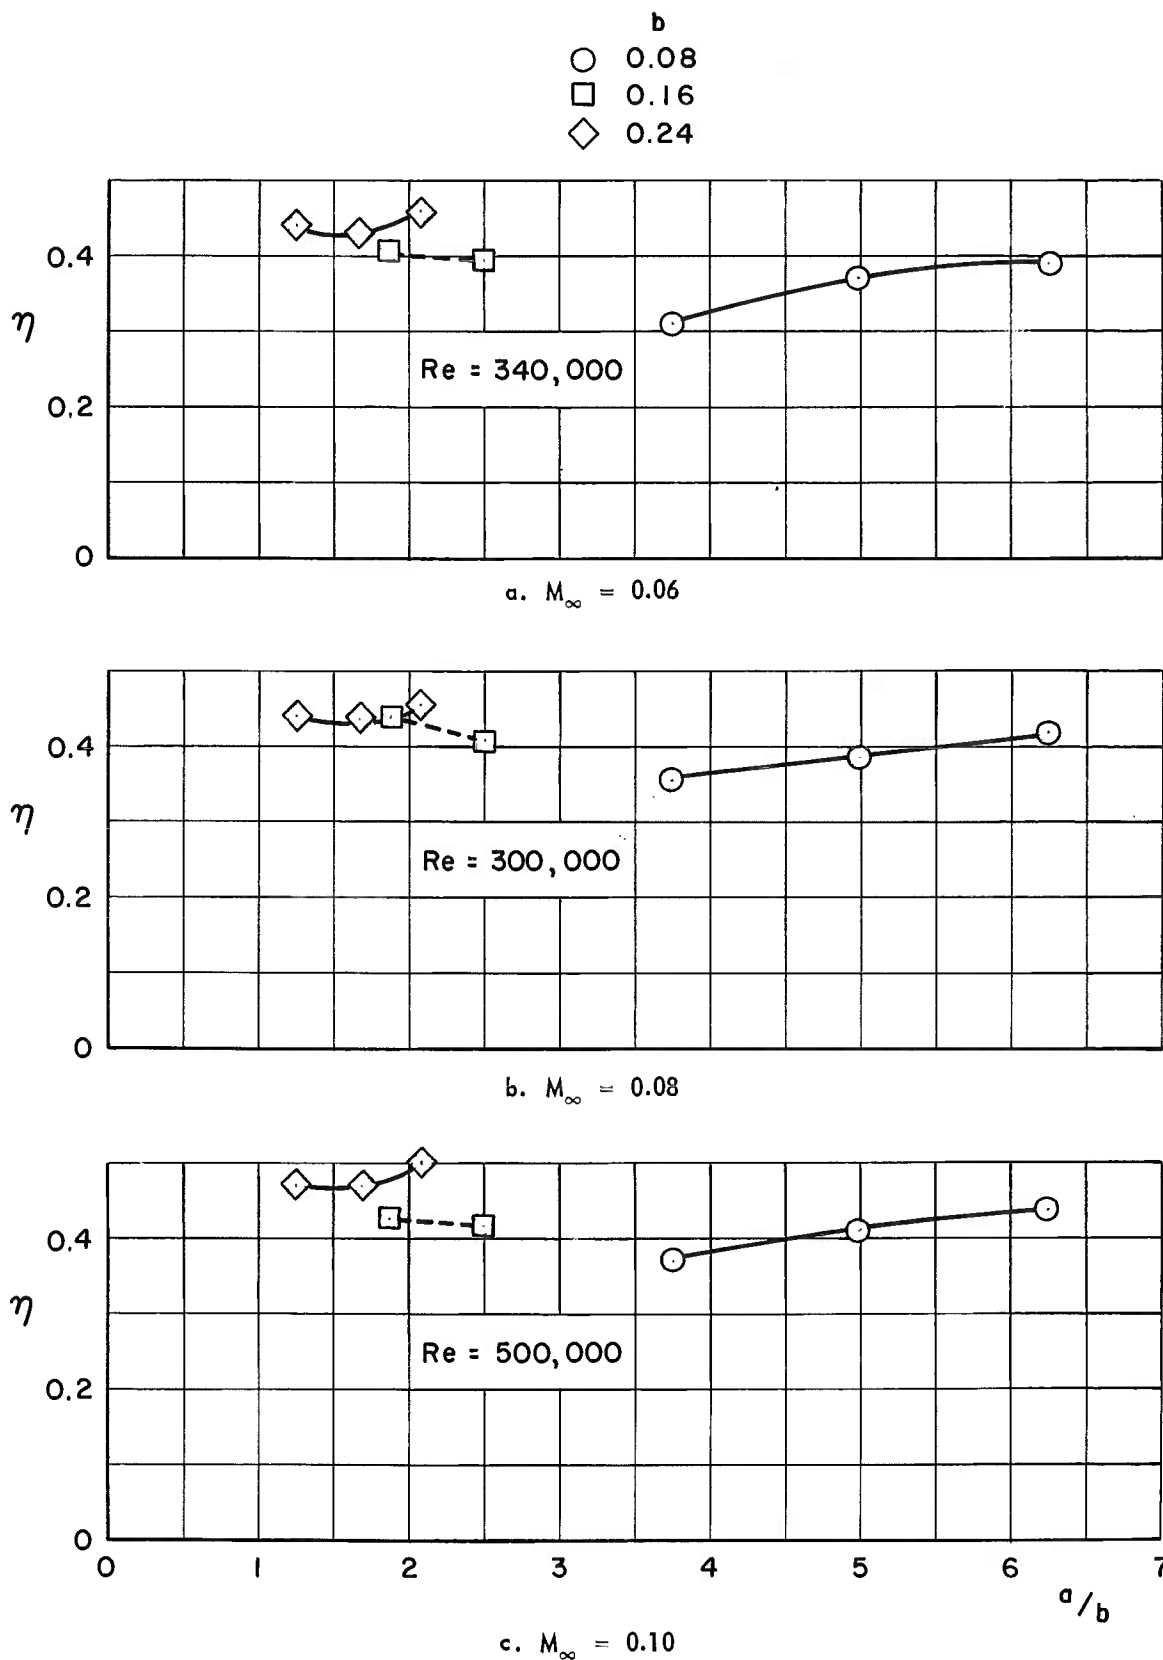


Fig. 9 Variation of Pressure Efficiency with Groove Depth-to-Width Ratio for the 20-deg Diffuser


b
 ○ 0.08
 □ 0.16
 ◇ 0.24

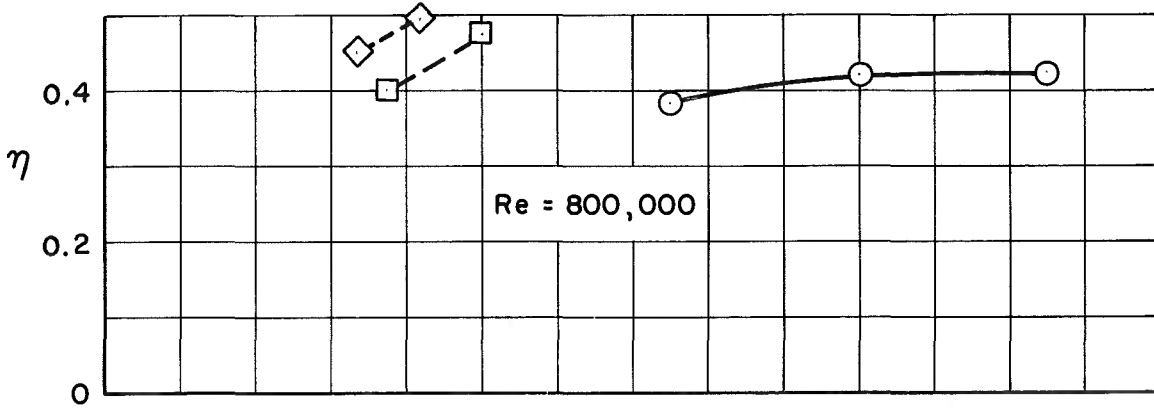

d. $M_\infty = 0.15$

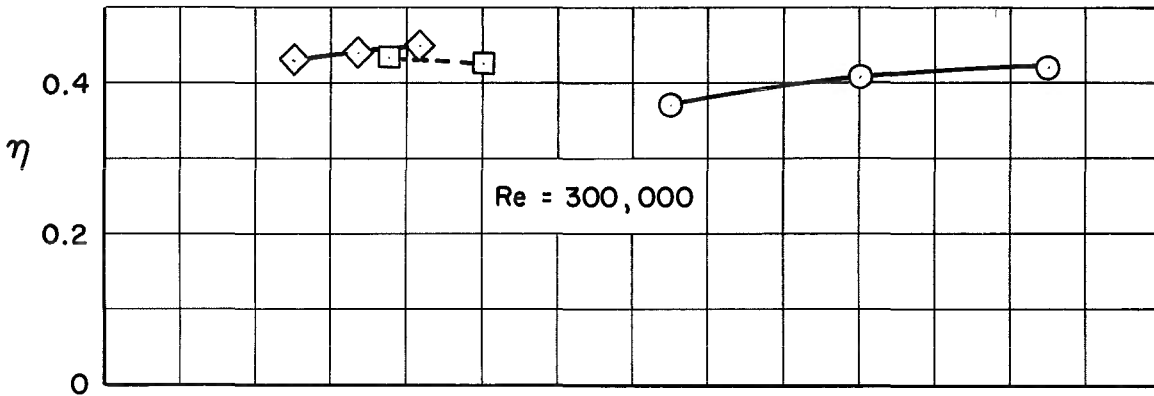


e. $M_\infty = 0.20$

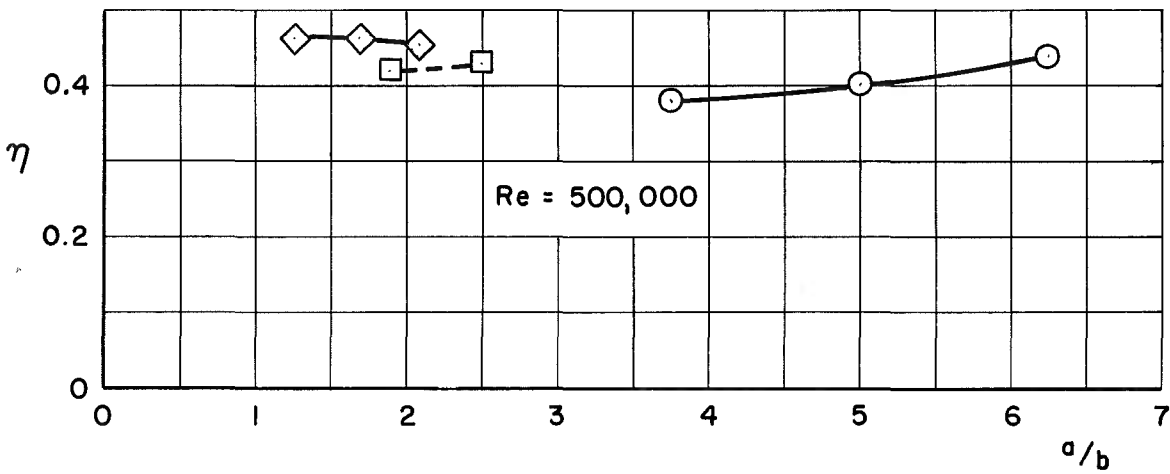


f. $M_\infty = 0.30$

Fig. 9 Continued


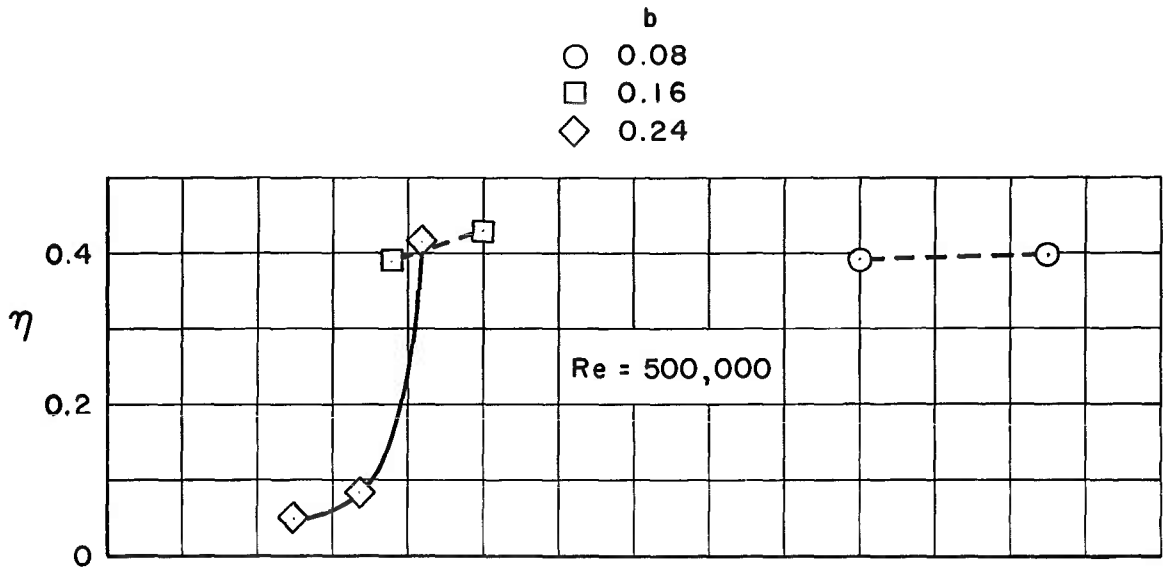


g. $M_\infty = 0.40$

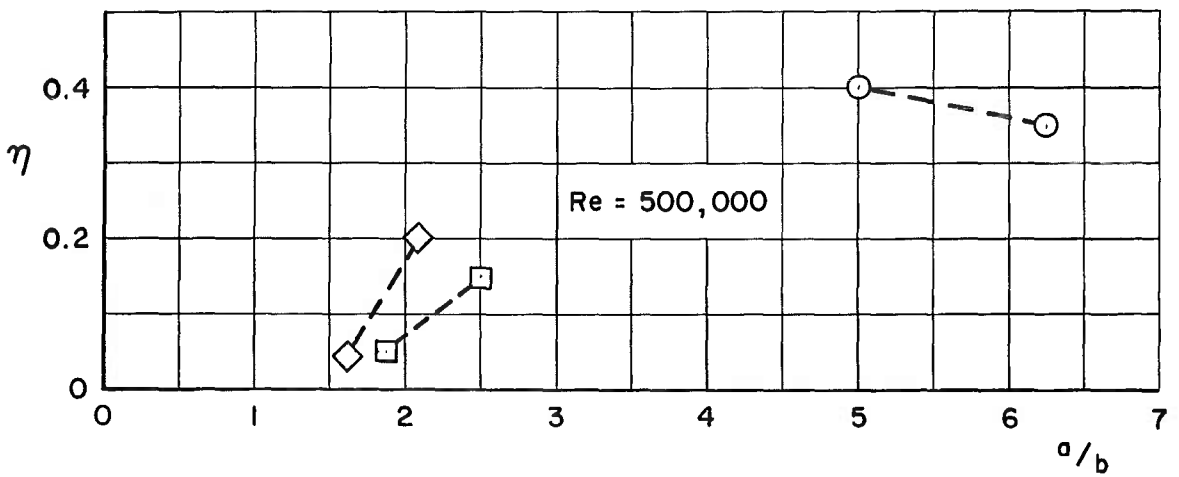



h. $M_\infty = 0.50$

Fig. 9 Concluded

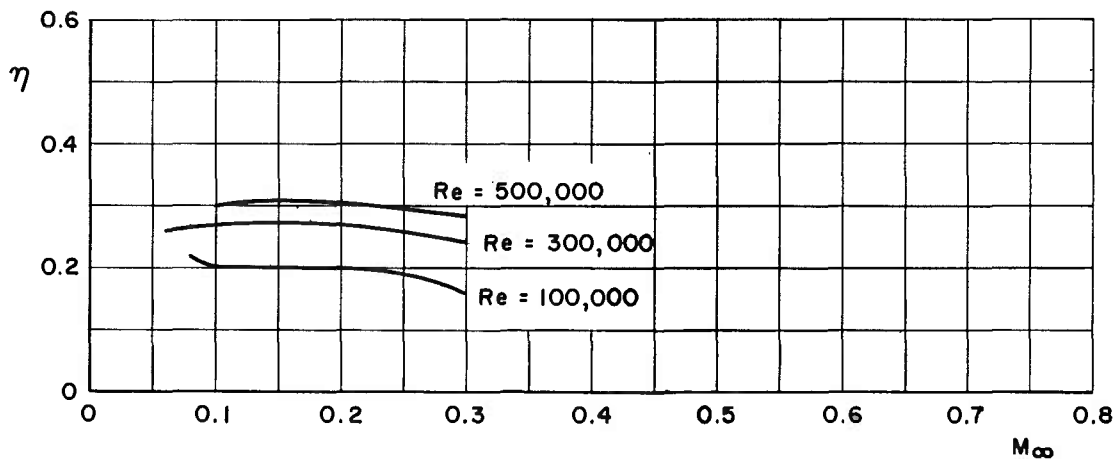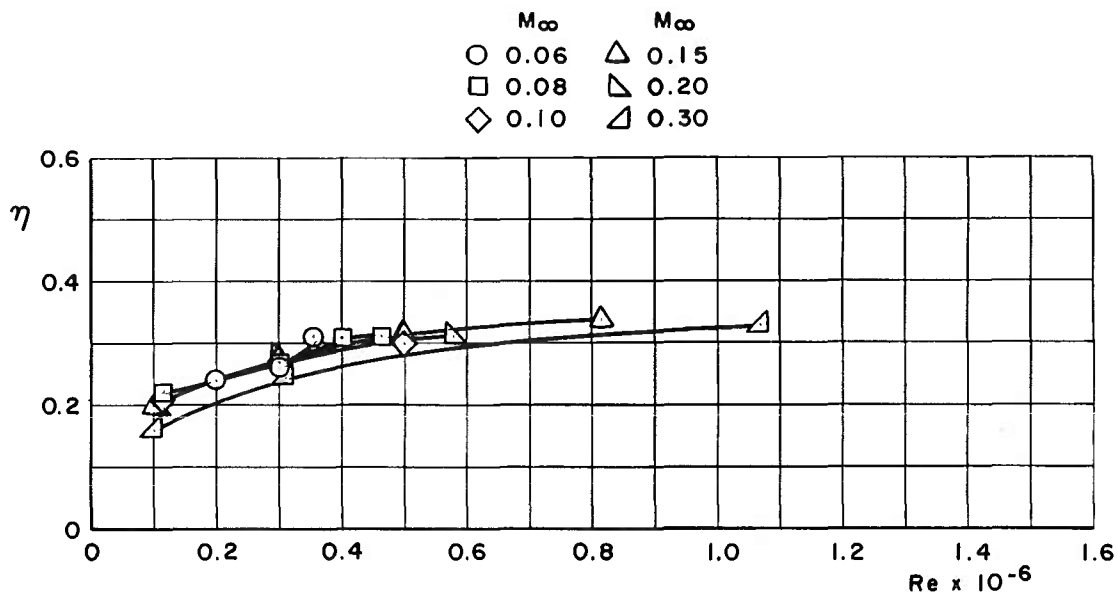



a. Vortex Generator Configuration 2, $\theta = 20$ deg

Fig. 10 Variation of Pressure Efficiency with Reynolds Number and Mach Number for the 20- and 22-deg Diffuser with Vortex Generators

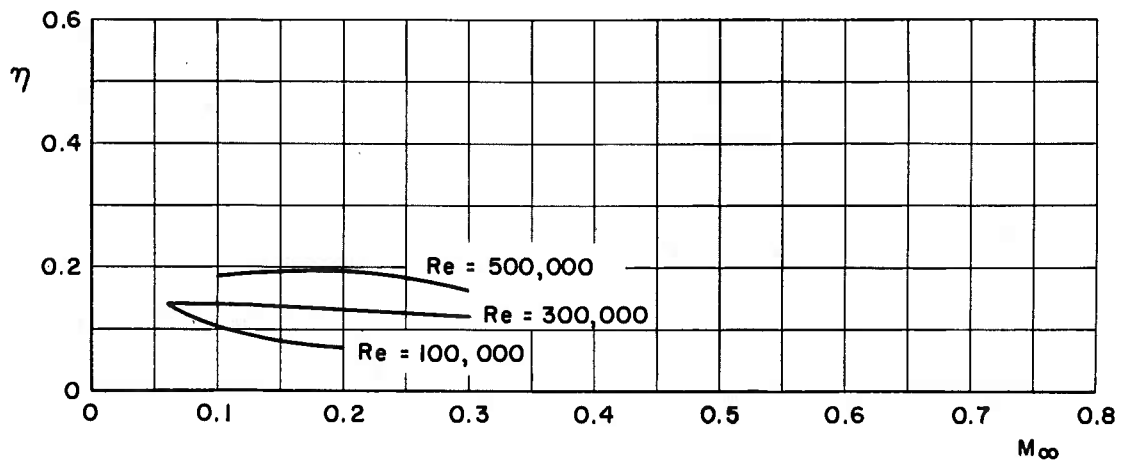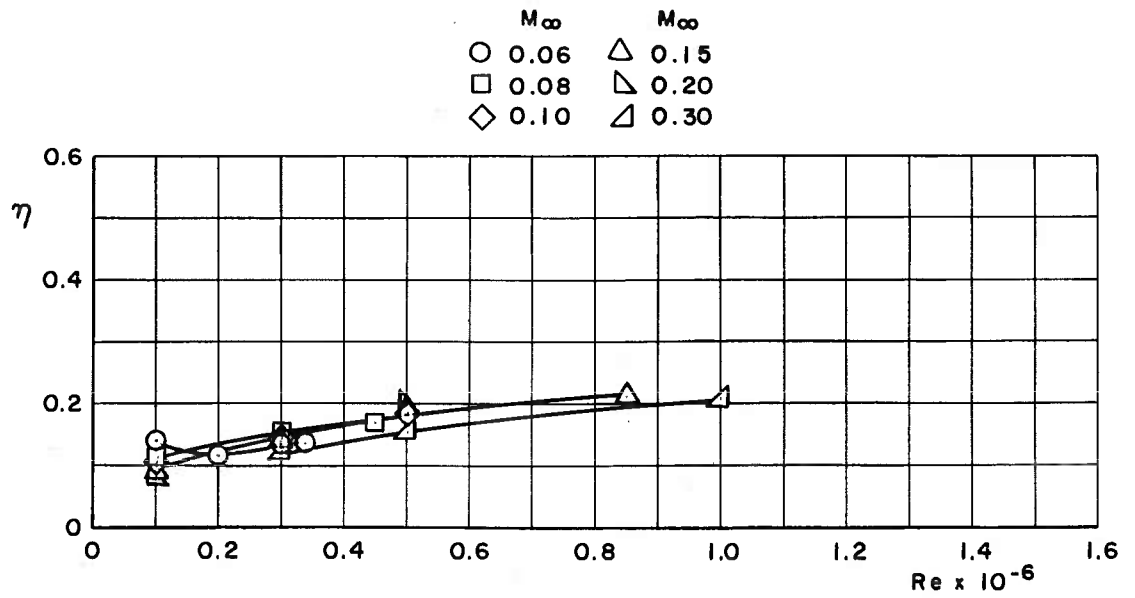



b. Vortex Generator Configuration 1, $\theta = 22$ deg

Fig. 10 Continued

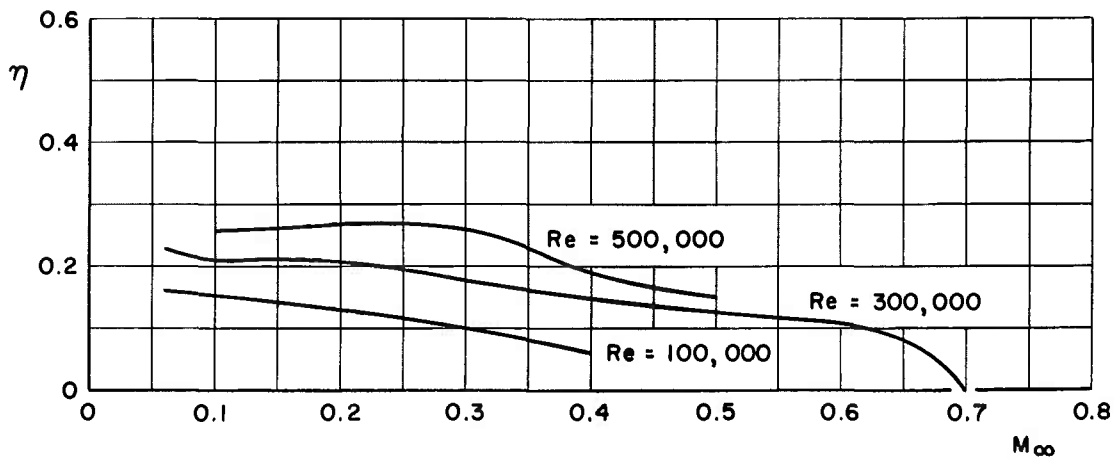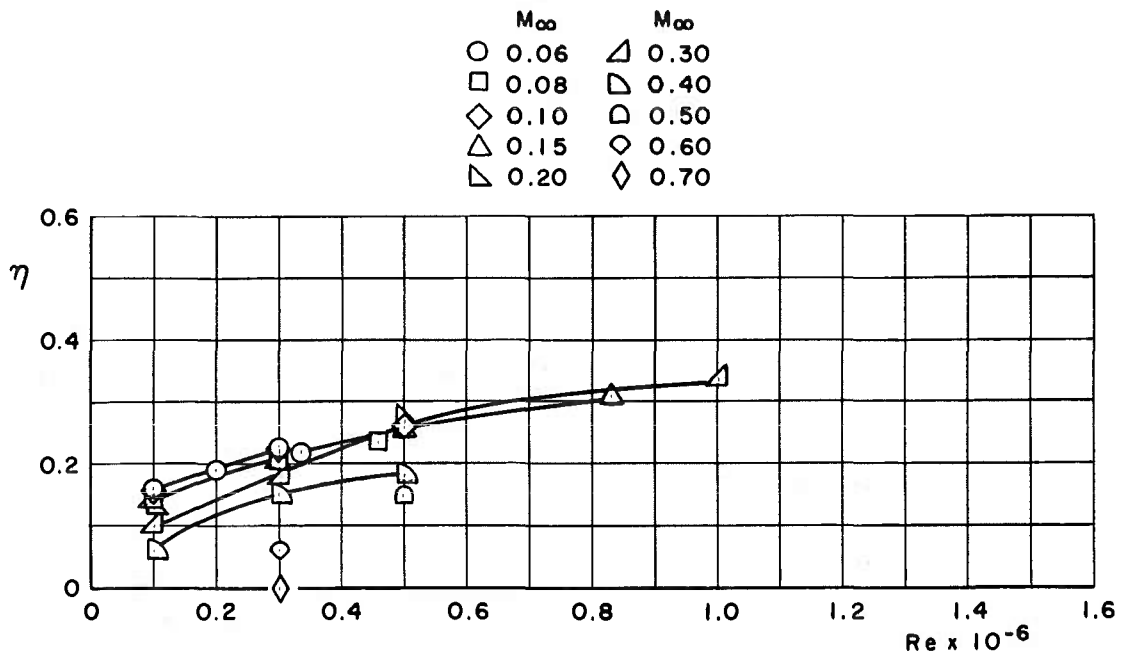

c. Vortex Generator Configuration 2, $\theta = 22$ deg



Fig. 10 Continued

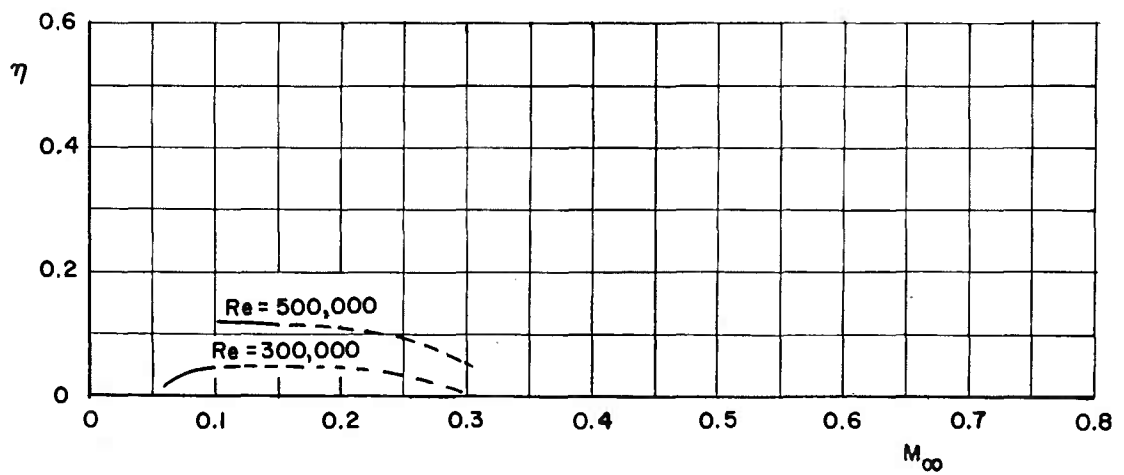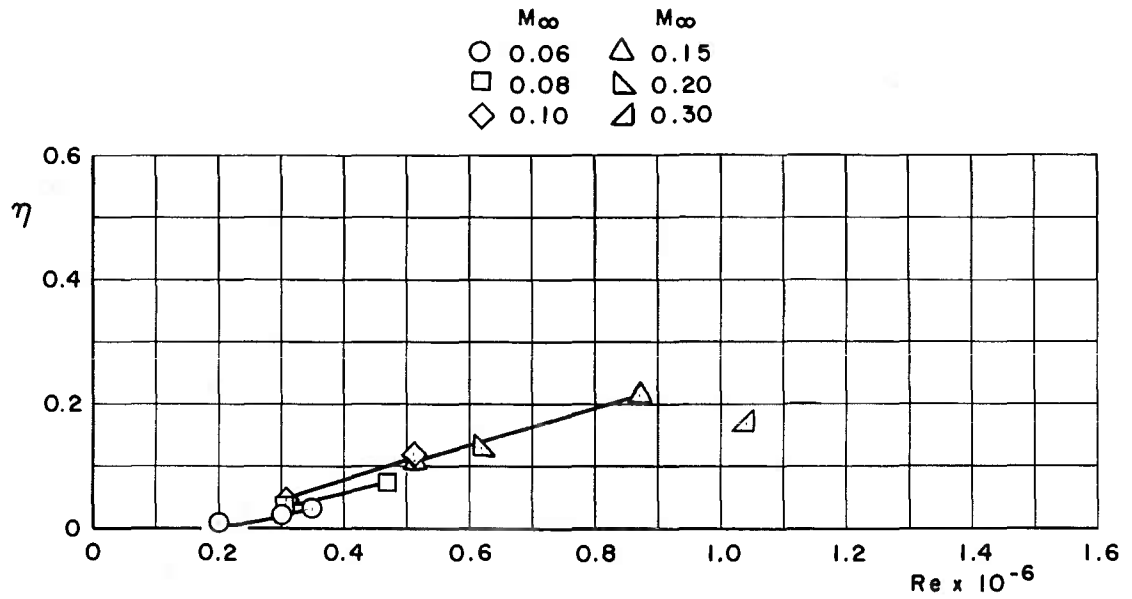

d. Vortex Generator Configuration 3, $\theta = 22$ deg


Fig. 10 Continued

M_∞	
○ 0.06	△ 0.20
□ 0.08	△ 0.30
◇ 0.10	△ 0.40
△ 0.15	

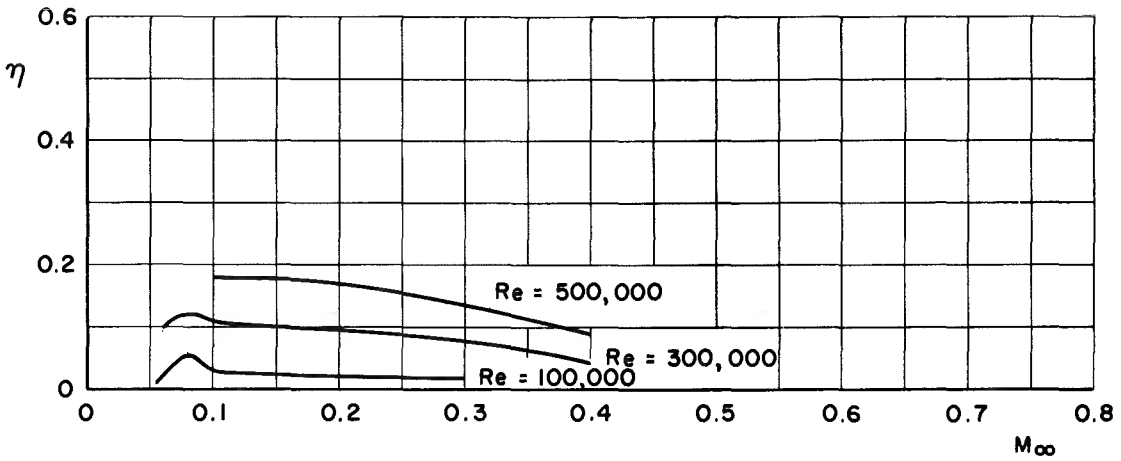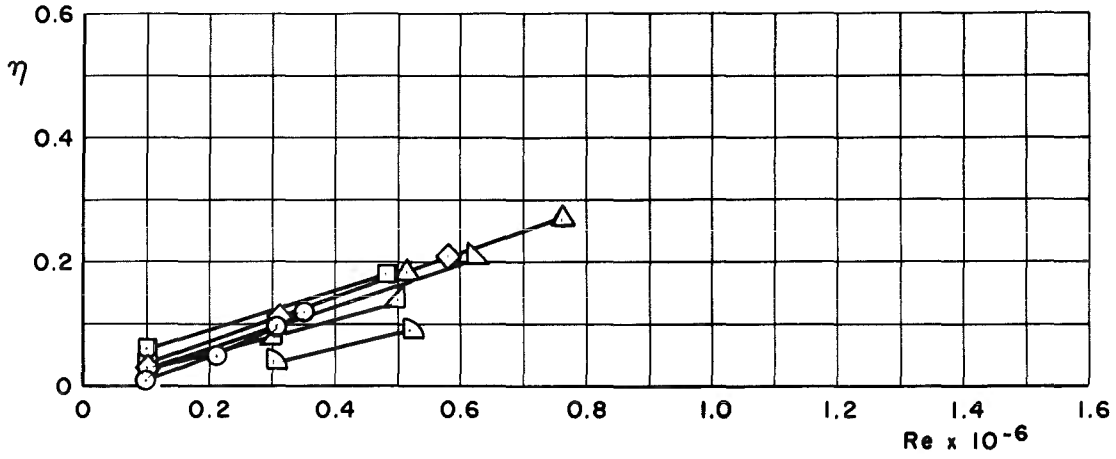


e. Vortex Generator Configuration 4, $\theta = 22$ deg


Fig. 10 Concluded

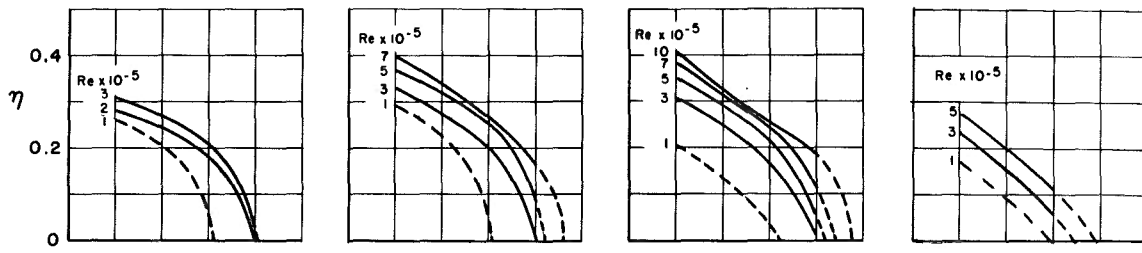


a. Smooth Diffuser

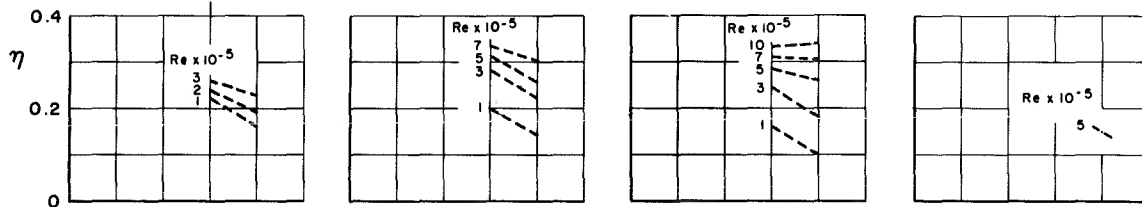

b. Vortex Generator Configuration 2

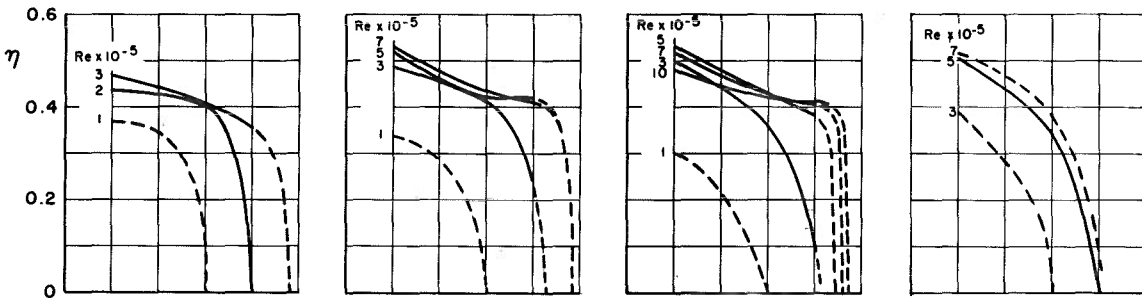


c. Rib Configuration 3

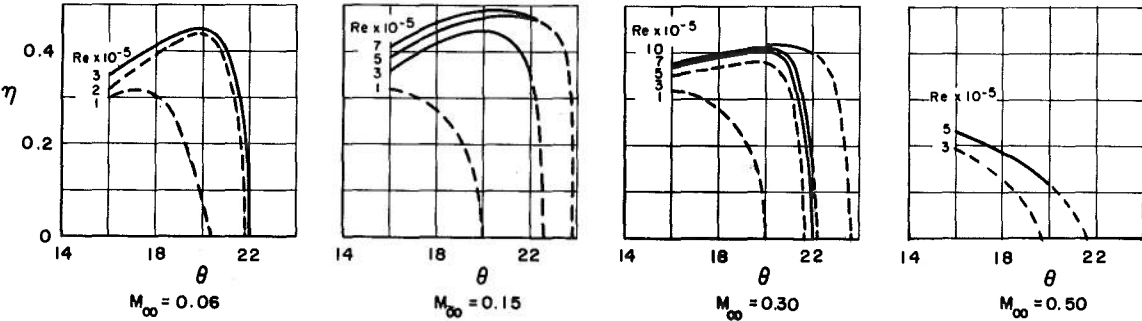


d. Rib Configuration 8


Fig. 11 Variation of Pressure Efficiency with Diffuser Angle

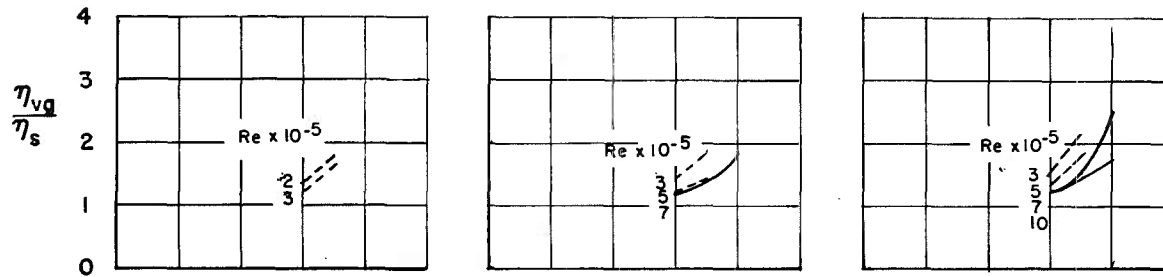

a. Vortex Generator Configuration 2

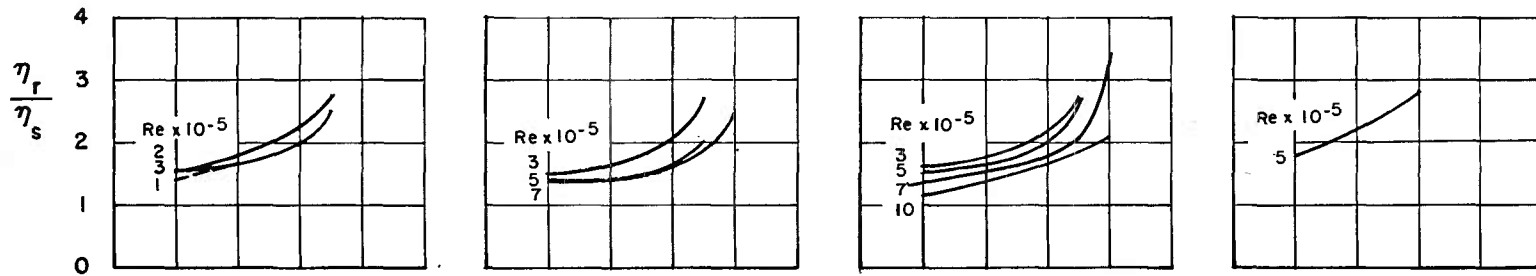

b. Rib Configuration 3

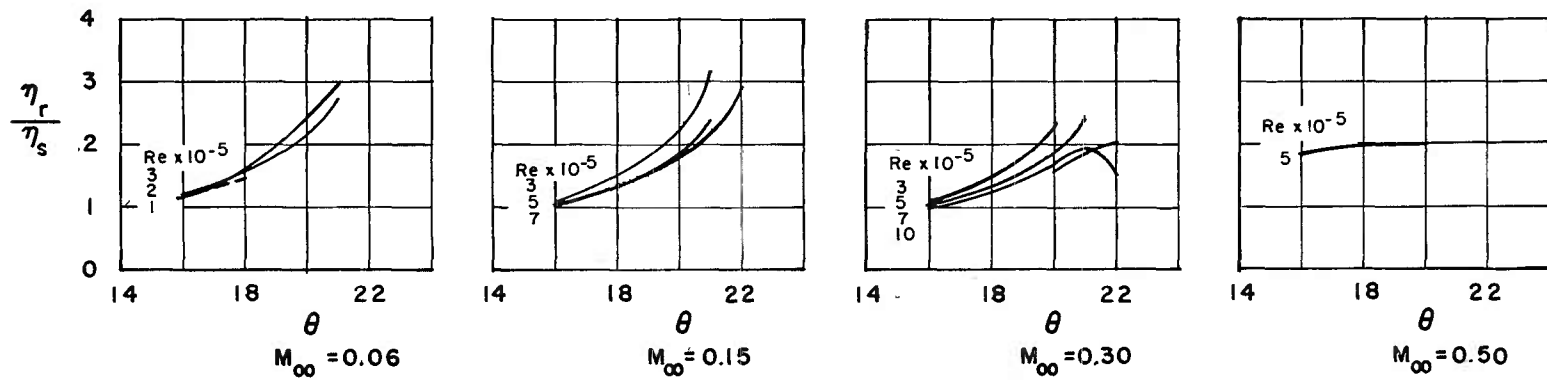

c. Rib Configuration 8

Fig. 12 Variation of η_r/η_s and η_{vg}/η_s with Diffuser Angle

TABLE I
SUMMARY OF U.S.S.R. TESTS

Test	Diffuser Type		D ₁ ,mm	D ₂ ,mm	L,mm	θ	a,mm	b,mm	t,mm	d,mm	n	V _a ,m/sec	Re x 10 ⁻⁵	η _r / η _s	
1	Conical	Rib	30	96	100	34	4	2	1	unk	32	unk	0.5 to 1.0	0.7 to 2.0	
		Smooth					-	-	-	-	-				
2	Conical	Rib	30	96	100	34	6	2	1	unk	1 to 30	unk	0.9 *	1 Rib	1.49
		Smooth					-	-	-	-	-			5 Ribs	1.80
		-					-	-	-	-	30 Ribs			1.84	
3	Conical	Rib	unk	unk	unk	40	unk	unk	unk	4	unk	unk	0.5 to 6.0 *	unk	
		Smooth					-	-	-	-	-				
	Multistage		unk	unk	unk	11	-	-	-	-	-				
Separating Walls		unk	unk	unk	unk	-	-	-	-	-					
4	Conical	Rib	100	Varied by β	195	22,31,40,60	7	3	1.5	3	11	10 to 110 for β = 31	unk	31 deg	1.42
		Smooth					-	-	-	-	-			40 deg	2.45
	Annular	Rib					7	3	1.5	3	11	10 to 57 for β = 40	unk	31 deg	1.37
		Smooth					-	-	-	-	-			40 deg	2.37
5	Flat One Side Expanded	Rib	90 by 70	180 by 70	235	θ = 22 deg	See Fig. 1	See Fig. 1	1.5	3	See Fig. 1	unk	unk	See Fig. 1	
		Smooth					-	-	-	-	-				

* Reference length for Reynolds number unknown.

DOCUMENT CONTROL DATA - R&D

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

1. ORIGINATING ACTIVITY (Corporate author) Arnold Engineering Development Center ARO, Inc., Operating Contractor Arnold Air Force Station, Tennessee		2 a. REPORT SECURITY CLASSIFICATION UNCLASSIFIED	
		2 b. GROUP N/A	
3. REPORT TITLE THE EFFECTS OF A RIBBED WALL ON THE EFFICIENCY OF A WIDE ANGLE SUBSONIC DIFFUSER			
4. DESCRIPTIVE NOTES (Type of report and inclusive dates) N/A			
5. AUTHOR(S) (Last name, first name, initial) Carleton, W. E. and Anderson, C. F., ARO, Inc.			
6. REPORT DATE May 1966		7 a. TOTAL NO. OF PAGES 53	7 b. NO. OF REFS 5
8 a. CONTRACT OR GRANT NO. AF40(600)-1200		9 a. ORIGINATOR'S REPORT NUMBER(S) AEDC-TR-66-62	
b. PROJECT NO. 6950			
c. Program Element 65402234		9 b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report)	
d. Task 695002		N/A	
10. AVAILABILITY/LIMITATION NOTICES Qualified requesters may obtain copies of this report from DDC and transmittal to foreign governments and foreign nationals must have prior approval of AEDC.			
11. SUPPLEMENTARY NOTES N/A		12. SPONSORING MILITARY ACTIVITY Arnold Engineering Development Center(AEDC) Air Force Systems Command (AFSC) Arnold Air Force Station, Tenn.	
13. ABSTRACT Tests were conducted to determine the effects of a ribbed wall on the efficiency of a single side expanded, wide angle, subsonic diffuser. Rib geometry, diffuser angle, Reynolds number, and Mach number were varied. Except at low Reynolds numbers, ribs were found to improve the efficiency of the diffuser. They were also more effective than vortex generators except at low Reynolds numbers for all Mach numbers and at high Mach numbers for all Reynolds numbers. The ribs produced maximum improvement at diffuser angles of 20 to 22 deg. The data indicated that the depth-to-width ratio of the grooves between the ribs should be in the range of 2 to 6. The range of Reynolds numbers and Mach numbers over which the ribs were effective appeared to be primarily a function of the groove width.			

14. KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
diffusers - subsonic ribbed wall vortex generators						

INSTRUCTIONS

1. **ORIGINATING ACTIVITY:** Enter the name and address of the contractor, subcontractor, grantee, Department of Defense activity or other organization (*corporate author*) issuing the report.
- 2a. **REPORT SECURITY CLASSIFICATION:** Enter the overall security classification of the report. Indicate whether "Restricted Data" is included. Marking is to be in accordance with appropriate security regulations.
- 2b. **GROUP:** Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forces Industrial Manual. Enter the group number. Also, when applicable, show that optional markings have been used for Group 3 and Group 4 as authorized.
3. **REPORT TITLE:** Enter the complete report title in all capital letters. Titles in all cases should be unclassified. If a meaningful title cannot be selected without classification, show title classification in all capitals in parenthesis immediately following the title.
4. **DESCRIPTIVE NOTES:** If appropriate, enter the type of report, e.g., interim, progress, summary, annual, or final. Give the inclusive dates when a specific reporting period is covered.
5. **AUTHOR(S):** Enter the name(s) of author(s) as shown on or in the report. Enter last name, first name, middle initial. If military, show rank and branch of service. The name of the principal author is an absolute minimum requirement.
6. **REPORT DATE:** Enter the date of the report as day, month, year; or month, year. If more than one date appears on the report, use date of publication.
- 7a. **TOTAL NUMBER OF PAGES:** The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.
- 7b. **NUMBER OF REFERENCES:** Enter the total number of references cited in the report.
- 8a. **CONTRACT OR GRANT NUMBER:** If appropriate, enter the applicable number of the contract or grant under which the report was written.
- 8b, 8c, & 8d. **PROJECT NUMBER:** Enter the appropriate military department identification, such as project number, subproject number, system numbers, task number, etc.
- 9a. **ORIGINATOR'S REPORT NUMBER(S):** Enter the official report number by which the document will be identified and controlled by the originating activity. This number must be unique to this report.
- 9b. **OTHER REPORT NUMBER(S):** If the report has been assigned any other report numbers (*either by the originator or by the sponsor*), also enter this number(s).
10. **AVAILABILITY/LIMITATION NOTICES:** Enter any limitations on further dissemination of the report, other than those

imposed by security classification, using standard statements such as:

- (1) "Qualified requesters may obtain copies of this report from DDC."
- (2) "Foreign announcement and dissemination of this report by DDC is not authorized."
- (3) "U. S. Government agencies may obtain copies of this report directly from DDC. Other qualified DDC users shall request through _____."
- (4) "U. S. military agencies may obtain copies of this report directly from DDC. Other qualified users shall request through _____."
- (5) "All distribution of this report is controlled. Qualified DDC users shall request through _____."

If the report has been furnished to the Office of Technical Services, Department of Commerce, for sale to the public, indicate this fact and enter the price, if known.

11. **SUPPLEMENTARY NOTES:** Use for additional explanatory notes.
12. **SPONSORING MILITARY ACTIVITY:** Enter the name of the departmental project office or laboratory sponsoring (*paying for*) the research and development. Include address.
13. **ABSTRACT:** Enter an abstract giving a brief and factual summary of the document indicative of the report, even though it may also appear elsewhere in the body of the technical report. If additional space is required, a continuation sheet shall be attached.

It is highly desirable that the abstract of classified reports be unclassified. Each paragraph of the abstract shall end with an indication of the military security classification of the information in the paragraph, represented as (TS), (S), (C), or (U).

There is no limitation on the length of the abstract. However, the suggested length is from 150 to 225 words.

14. **KEY WORDS:** Key words are technically meaningful terms or short phrases that characterize a report and may be used as index entries for cataloging the report. Key words must be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location, may be used as key words but will be followed by an indication of technical context. The assignment of links, rules, and weights is optional.