

UNCLASSIFIED

AD NUMBER: AD0482481

LIMITATION CHANGES

TO:

Approved for public release; distribution is unlimited.

FROM:

Distribution authorized to U.S. Gov't. agencies and their contractors; Administrative/Operational Use; 1 DEC 1965. Other requests shall be referred to the Air Force Space and Missile Systems Organization, Norton AFB, CA.

AUTHORITY

SAMSO, USAF LTR, 28 FEB 1972

THE UNIVERSITY OF MICHIGAN**COLLEGE OF ENGINEERING****DEPARTMENT OF ELECTRICAL ENGINEERING****Radiation Laboratory*****Surface Field Data for Cone-Sphere-Like Objects***

by

L. P. ZUKOWSKI and T. B. A. SENIOR**December 1965****Contract AF 04(694)-683****Contract Officer, Major A. Aharonian BSYDF*****Technical Report***

Contract With: **Ballistic Systems Division, USAF**
Air Force Systems Command
Norton Air Force Base, California 92409

Administered through:**OFFICE OF RESEARCH ADMINISTRATION • ANN ARBOR**

AD-482481



THE UNIVERSITY OF MICHIGAN

7030-6-T

Requests for additional copies by agencies of the Department of Defense, their contractors, or other government agencies should be directed to:

**DEFENSE DOCUMENTATION CENTER (DDC)
CAMERON STATION
ALEXANDRIA, VIRGINIA 22314**

Department of Defense contractors must be established for DDC services or have their "need-to-know" certified by the cognizant military agency of their project or contract.

THE UNIVERSITY OF MICHIGAN

7030-6-T

SURFACE FIELD DATA FOR CONE-SPHERE-LIKE OBJECTS

by

L. P. Zukowski and T. B. A. Senior

December 1965

Contract AF04(694)-683

Prepared for

BALLISTIC SYSTEMS DIVISION
AIR FORCE SYSTEMS COMMAND
UNITED STATES AIR FORCE
NORTON AIR FORCE BASE, CALIFORNIA

THE UNIVERSITY OF MICHIGAN

7030-6-1

TABLE OF CONTENTS

I	INTRODUCTION	1
II	THE MEASUREMENTS	1
III	ACKNOWLEDGEMENTS	3
IV	REFERENCES	4
	MODELS	5
	EXPERIMENTAL DATA	10
	DD FORM 1473	

I INTRODUCTION

In the course of a recent study of the currents excited on the surfaces of various metallic objects by an incident plane wave, the surface fields have been measured for a number of cone-sphere-like shapes. The prime purpose in making these measurements was to provide a basis for the development and checking of formulae for predicting the scattering behavior through approximations applied to the surface fields, and the conclusions reached from analyses of the data are described elsewhere (Senior and Zukowski, 1966). Although it is realized that the results of such 'interpretative' studies are not everybody's 'cup of tea', it is felt that the experimental data itself may be of somewhat wider interest, and could be of particular value to those concerned with the verification of digital computer methods for the direct derivation of the surface field from the appropriate integral equations. A selection of the surface field traces has therefore been assembled and is presented here.

II THE MEASUREMENTS

These were all made in a new facility designed and constructed by the staff of the Radiation Laboratory. A sketch of the facility has been given by Knott et al (1965), and for our purposes it is sufficient to note that the body to be tested is placed on a pedestal within an anechoic chamber and is illuminated by a transmitting antenna placed approximately 35 feet away. The surface field is sampled using a small probe whose type depends on the field component to be measured, and to minimize the disturbances created by the lead from the probe to the detector, the incident illumination is horizontally polarized and the probe lead maintained vertical. L, S, C and X-band frequencies are employed, and the facility is equipped for both phase and amplitude measurements. A detailed description of measurement techniques and operating procedures can be found in a companion report by Knott (1965).

The shapes covered by this study were all bodies of revolution of the general character of cone-spheres. In the particular case of the cone-sphere (i. e. a cone terminated in a spherical cap with continuity of tangency at the join), the body is specified completely by the half-angle, α , of the cone, and the value of ka , where a is the radius of the cap and $k = 2\pi/\lambda$, but for more complex shapes, additional parameterization is required. The models used were made of cold-rolled aluminum stock, machined to a high degree of surface finish. Being metallic with (effectively) infinite conductivity, linear scaling laws can be assumed to hold, and to provide reasonable coverage of the low resonance region, $1 < ka < 10$ (say), it is sufficient to vary the frequency with only a single model of each shape. In practice, however, it was desirable to add extra models to ensure continuity of coverage with the experimental frequencies readily available.

Even for a single model at one frequency and aspect, any attempt at measuring the (vector) surface field at all points of a closely spaced grid extending over the entire surface of the body would be a very time-consuming task, and in consonance with the aim of providing the maximum assistance to the theoretical investigations within the time available, attention was restricted to that component of the induced current which is in the direction of the cone generators and their continuations over the cone termination. For the data given here, the probe displacement was confined to the trajectory in a horizontal plane through the axis of the model. Only the current amplitude was measured, and this is shown as a function of s/λ , where s is the distance from the foremost point of the body. Since readings are usually taken with the probe stationary, each curve is the result of a sequence of datum points whose separation averages less than 0.1λ .

For a body of revolution at nose-on incidence, a knowledge of the longitudinal component of the current over the above trajectory specifies the component

everywhere by virtue of its known azimuthal variation. In particular, the amplitudes at corresponding points on the left and right trajectories should be identical, but the measured data did show some slight discrepancies. These can be attributed to a partial sensitivity of the probe to the normal component of the electric vector as well as to a tangential component of the magnetic field, and the nature of this effect (and its consequences as regards probe design) are discussed by Knott (1965). The amount of asymmetry can be judged from Fig. 15, a case chosen at random from those investigated, in which the values of the amplitude on the negative side (or right hand trajectory as viewed from the transmitter) are compared with the curve based on the readings for the positive side. Since detailed studies of measured data for a sphere showed that errors are drastically reduced if the amplitudes for the two sides are averaged, all of the nose-on ($\phi=0$) data presented here are the averages of readings at corresponding points on the two sides of the body. For oblique incidence, of course, no such averaging is possible, and the measured data is given directly: the solid curves then represent the current amplitudes measured along that side of the object inclined toward the direction of incidence at the indicated angle ϕ , and the curves shown as broken lines refer to the opposite side (which, for ϕ greater than the half cone angle, will be shadowed).

III. ACKNOWLEDGEMENTS

It is a pleasure to acknowledge the dedicated and painstaking work of the experimental staff, directed by Mr. E. F. Knott, and to express our thanks to Miss C. E. Hayes and Messrs. R. E. Cook, D. E. Goings, R. Liang, D. P. Teeter and R. E. Wetter who, at various times, were involved in the lengthy and tedious process of reducing the measured data to the form in which the results are presented here. We are also indebted to the Lincoln Laboratory of the Massachusetts Institute of Technology for the loan of the Golf model.

IV REFERENCES

Knott, E. F. (1965), "Design and Operation of a Surface Field Measurement Facility," The University of Michigan Radiation Laboratory Technical Report 7030-7-T


Knott, E. F., V. V. Liepa and T. B. A. Senior (1965), "A Surface Field Measurement Facility," Proc. IEEE, 53, pp. 1105-1107.

Senior, T. B. A. and L. P. Zukowski (1966), "The Interpretation of Some Surface Field Data," The University of Michigan Radiation Laboratory Technical Report 7030-8-T

MODELS

1. Cone-Sphere


This is formed from a cone of semi-vertex angle α terminated in a spherical cap of radius a , with continuity of tangency at the join.

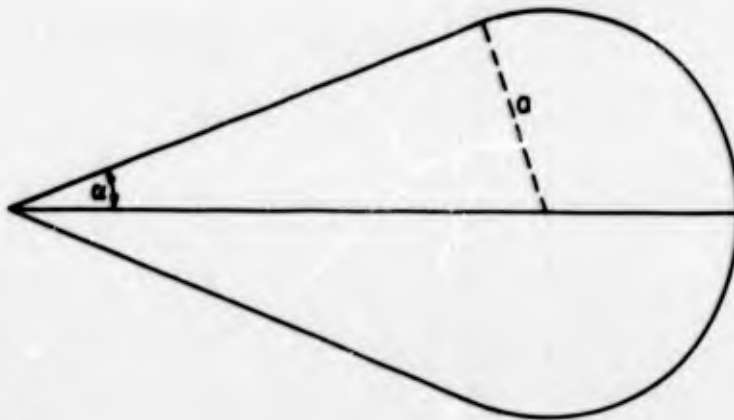

<u>Model No.</u>	<u>α (degrees)</u>	<u>a (inches)</u>
1	7.50	1.500
2	15.00	1.500
3	7.50	3.000
4	15.00	3.000
5	7.53	2.210

2. Cone-Sphere with Rounded Tip

The tip of Model No. 5 was removed in favor of one or other of two spherical tips of radius b which could be screwed in place to produce continuity of tangency at the join with the conical surface.

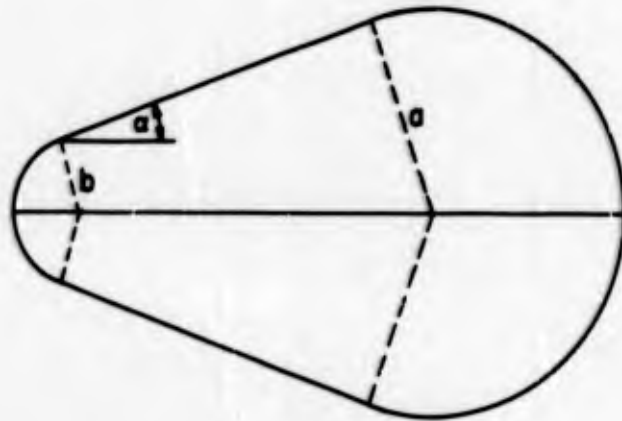


<u>Model</u>	<u>α (degrees)</u>	<u>a (inches)</u>	<u>b (inches)</u>
A	7.53	2.210	0.250
B	7.53	2.210	1.000

3. Cone-Spheroid with Rounded Tip

The spherical cap of Models A and B above was unscrewed and replaced by an oblate spheroidal cap to give Models C and E respectively. With axes as shown in the diagram, the cap corresponded to the rotation of the ellipse

$$\frac{(x-\delta)^2}{l^2} + \frac{y^2}{4l^2} = 1$$


about the x axis, where $l = 1.098$ inches and $\delta = 0.072$ inches, and produced continuity of tangency at its join with the cone.

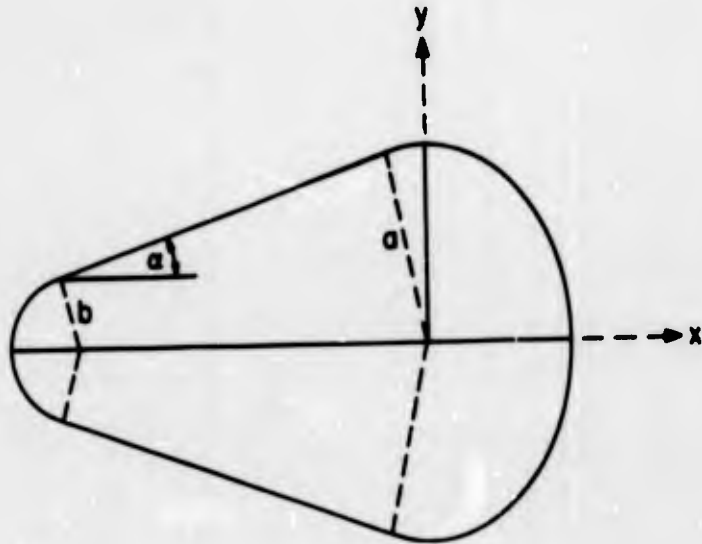

Model	α (degrees)	Cap	b (inches)
C	7.53	spheroid	0.250
E	7.53	spheroid	1.000

4. Cone-Quartic-Spheroid (Golf)

This is a three-part surface in which a quartic transition region is inserted between the cone and a prolate spheroidal cap. The radius of curvature, as well as the tangent, is continuous at each join.

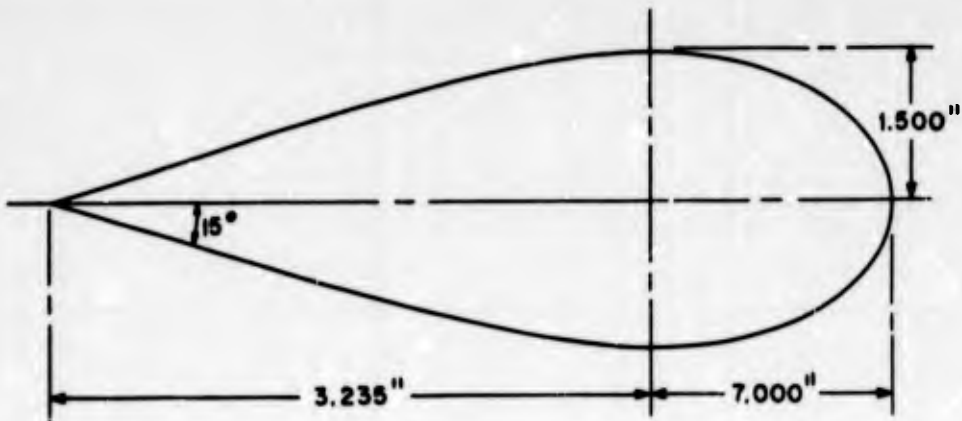

THE UNIVERSITY OF MICHIGAN

7030-6-T

<u>Fig. No.</u>	<u>Model</u>	<u>α ($^{\circ}$)</u>	<u>Freq. (Gc)</u>	<u>k_a</u>	<u>ϕ ($^{\circ}$)</u>
1	2	15	1.252	1.0	0
2	2	15	1.502	1.2	0
3	2	15	1.753	1.4	0
4	4	15	1.002	1.6	0
5	4	15	1.127	1.8	0
6	4	15	1.252	2.0	0
7	2	15	2.755	2.2	0
8	2	15	3.005	2.4	0
9	2	15	3.256	2.6	0
10	2	15	3.507	2.8	0
11	2	15	3.757	3.0	0
12	4	15	3.131	5.0	0
13	4	15	3.256	5.2	0
14	4	15	6.263	10.0	0
15	4	15	3.256	5.2	0
16	2	15	5.278	4.2	0
17	2	15	5.278	4.2	7 1/2
18	2	15	5.278	4.2	13
19	2	15	5.278	4.2	15
20	2	15	5.278	4.2	17
21	2	15	5.278	4.2	30
22	2	15	5.278	4.2	75
23	1	7 1/2	1.252	1.0	0
24	1	7 1/2	1.502	1.2	0
25	1	7 1/2	1.753	1.4	0
26	5	7 1/2	1.360	1.6	0
27	5	7 1/2	1.530	1.8	0
28	5	7 1/2	1.700	2.0	0
29	1	7 1/2	2.755	2.2	0
30	1	7 1/2	3.005	2.4	0

(continued)


THE UNIVERSITY OF MICHIGAN


7030-6-T


<u>Fig. No.</u>	<u>Model</u>	<u>α ($^{\circ}$)</u>	<u>Freq. (Gc)</u>	<u>ka</u>	<u>ϕ ($^{\circ}$)</u>
31	1	7 1/2	3.256	2.6	0
32	1	7 1/2	3.507	2.8	0
33	1	7 1/2	3.757	3.0	0
34	A	7 1/2	2.550	3.0	0
35	5	7 1/2	4.250	5.0	0
36	5	7 1/2	4.420	5.2	0
37	A	7 1/2	3.570	4.2	0
38	A	7 1/2	3.570	4.2	2 1/2
39	A	7 1/2	3.570	4.2	5
40	A	7 1/2	3.570	4.2	7 1/2
41	A	7 1/2	3.570	4.2	32 1/2
42	A	7 1/2	3.570	4.2	57 1/2
43	A	7 1/2	3.570	4.2	82 1/2
44	A	7 1/2	5.100	6.0	0
45	B	7 1/2	2.550	3.0	0
46	B	7 1/2	8.500	10.0	0
47	C	7 1/2	1.700	2.0	0
48	C	7 1/2	3.400	4.0	0
49	C	7 1/2	5.100	6.0	0
50	C	7 1/2	8.500	10.0	0
51	E	7 1/2	1.700	2.0	0
52	E	7 1/2	3.400	6.0	0
53	E	7 1/2	5.100	6.0	0
54	E	7 1/2	8.500	10.0	0
55	Golf	15	2.005	2.0	0
56	Golf	15	3.757	3.0	0
57	Golf	15	5.009	4.0	0
58	Golf	15	6.262	5.0	0


EXPERIMENTAL DATA

In each of the following graphs the measured amplitude of the longitudinal component J of the surface current, normalized relative to the amplitude of the incident field, is plotted as a function of the distance s , in wavelengths, from the tip (or front-most) point of the body.

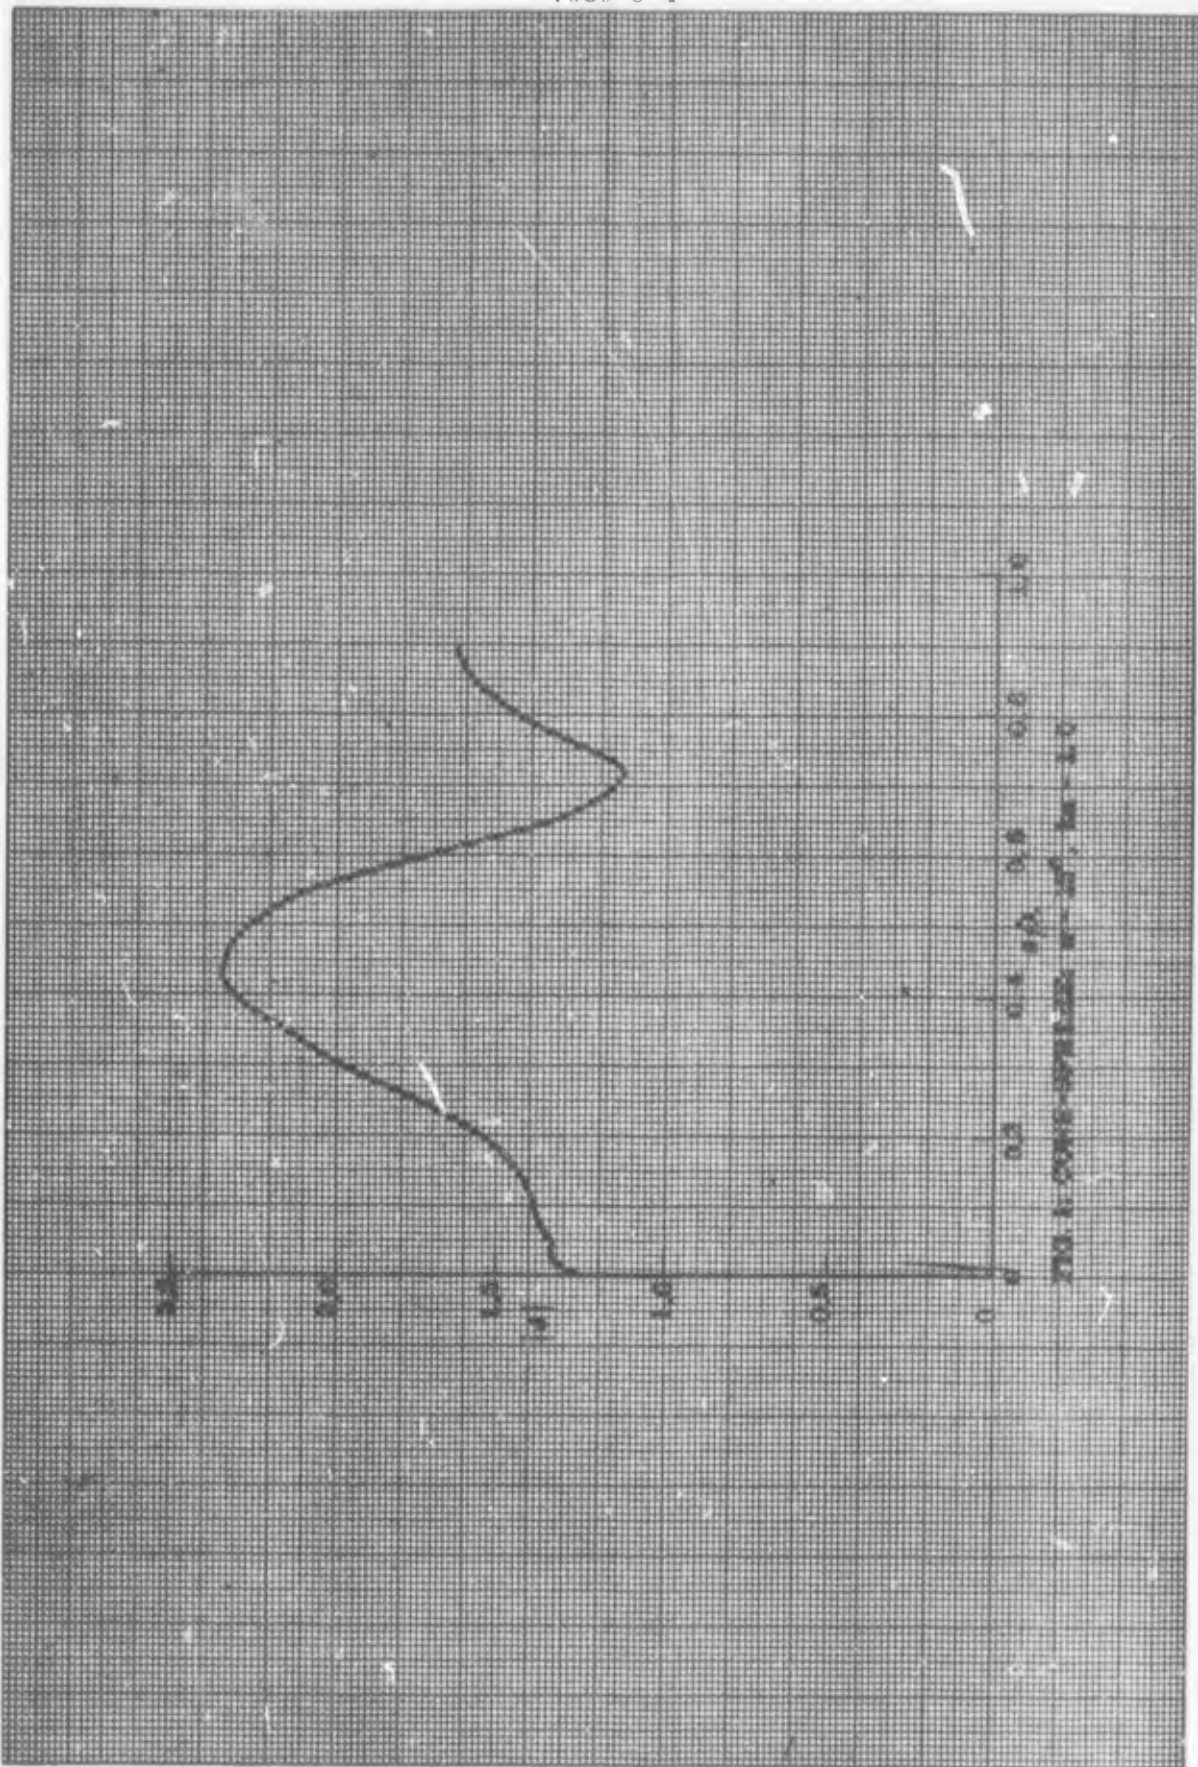

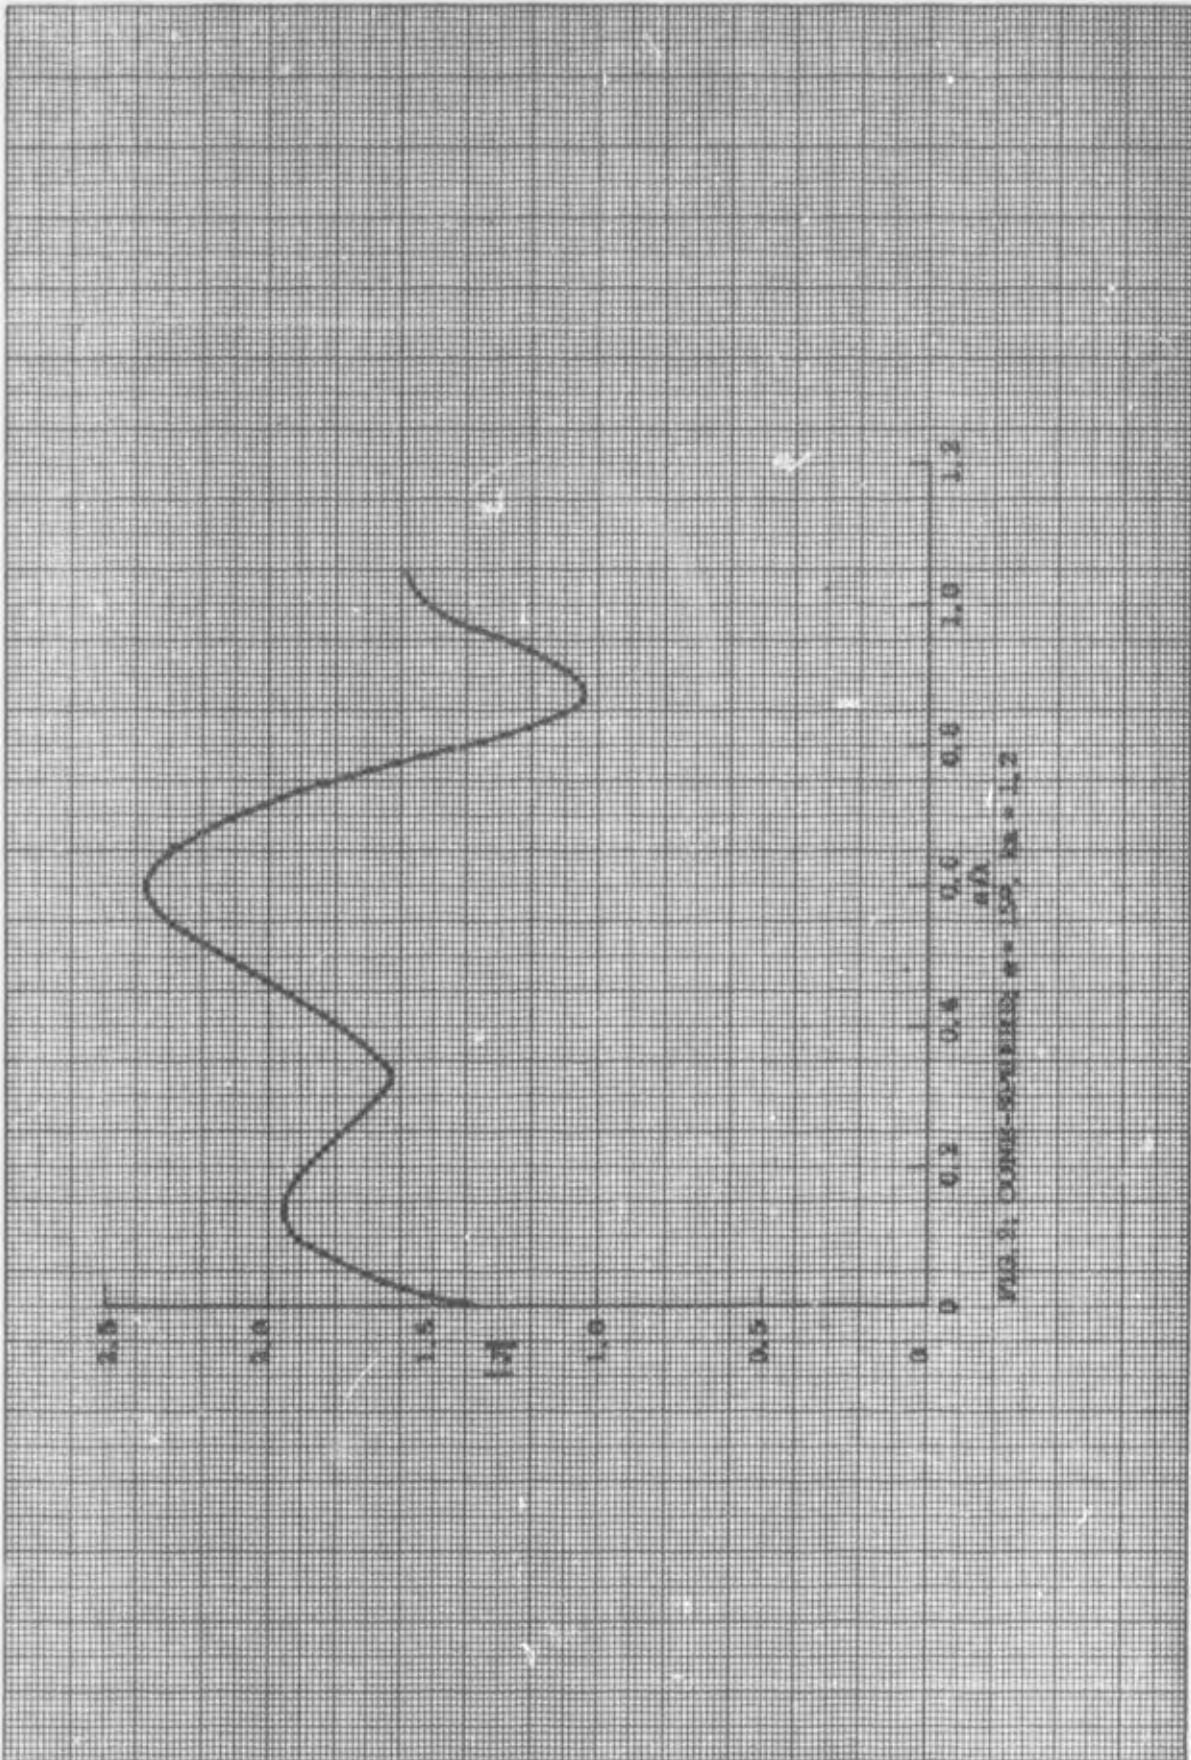

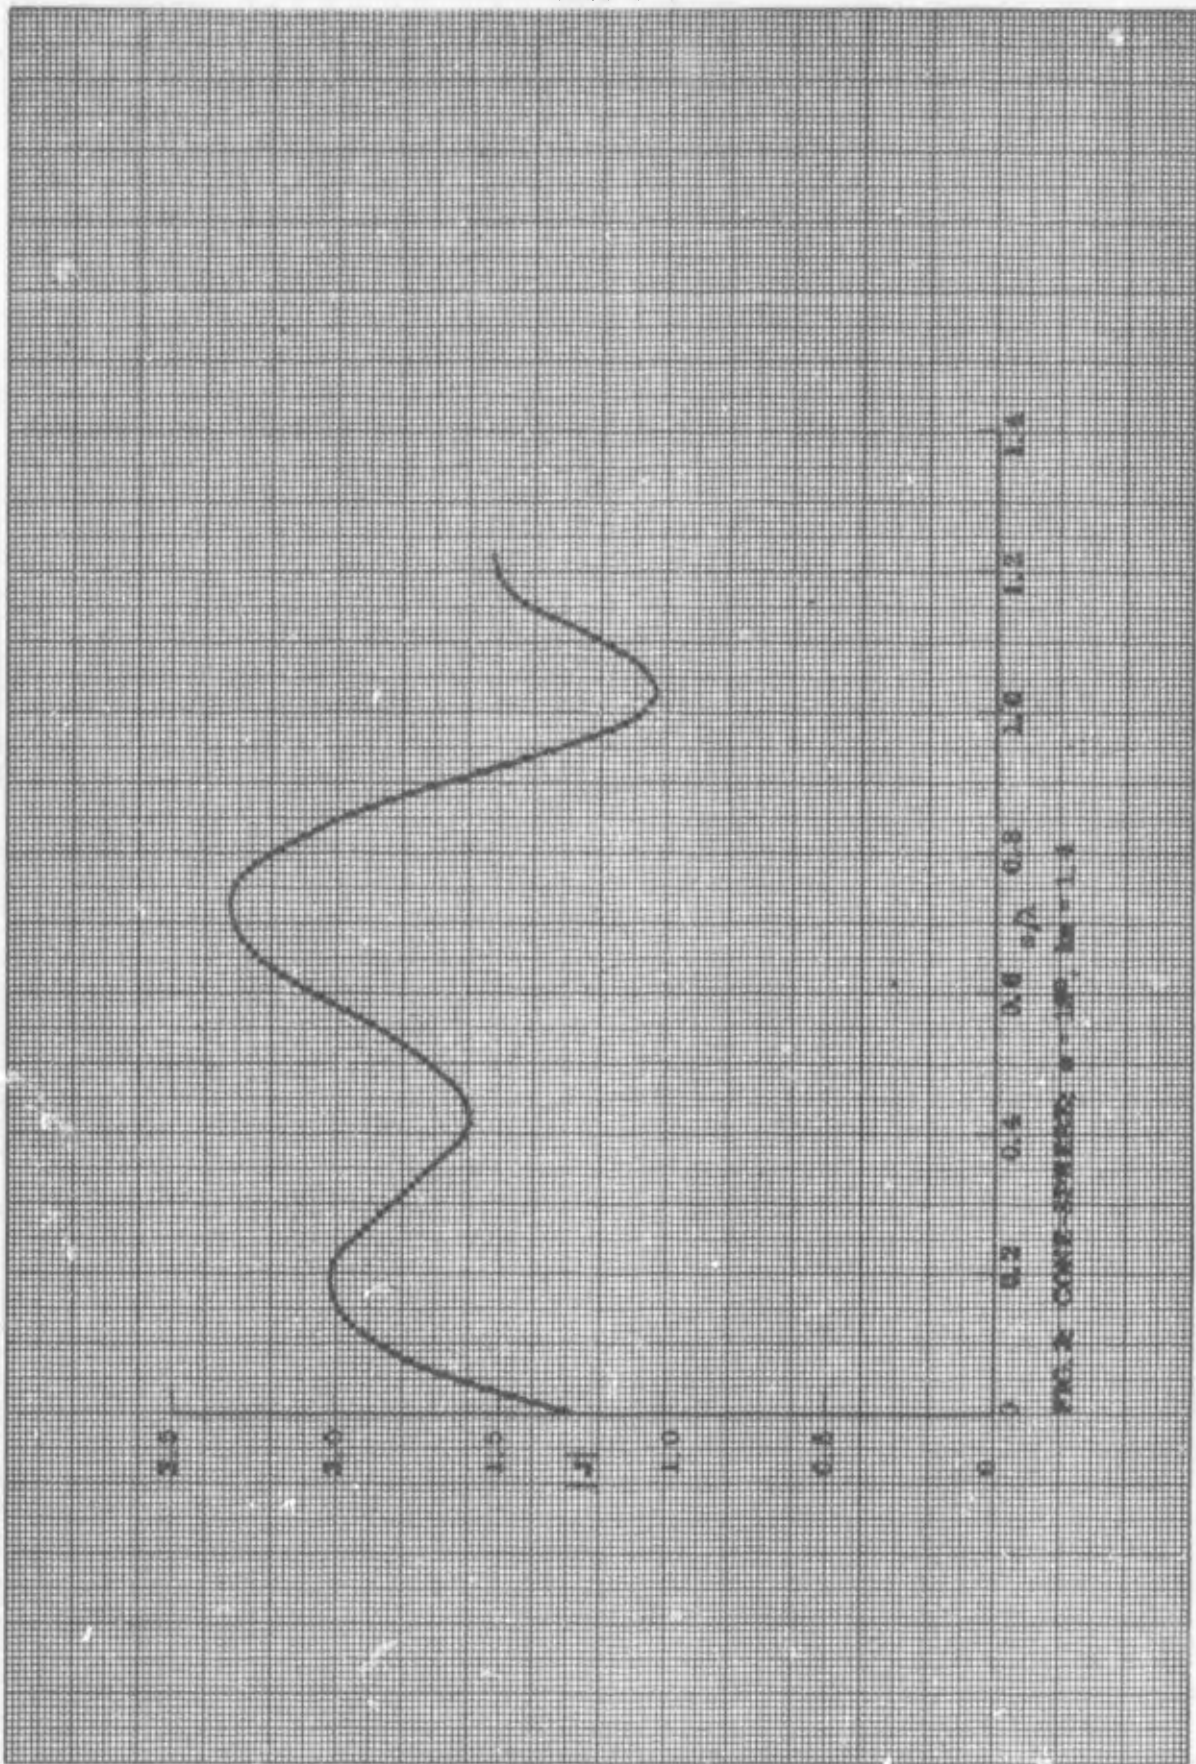

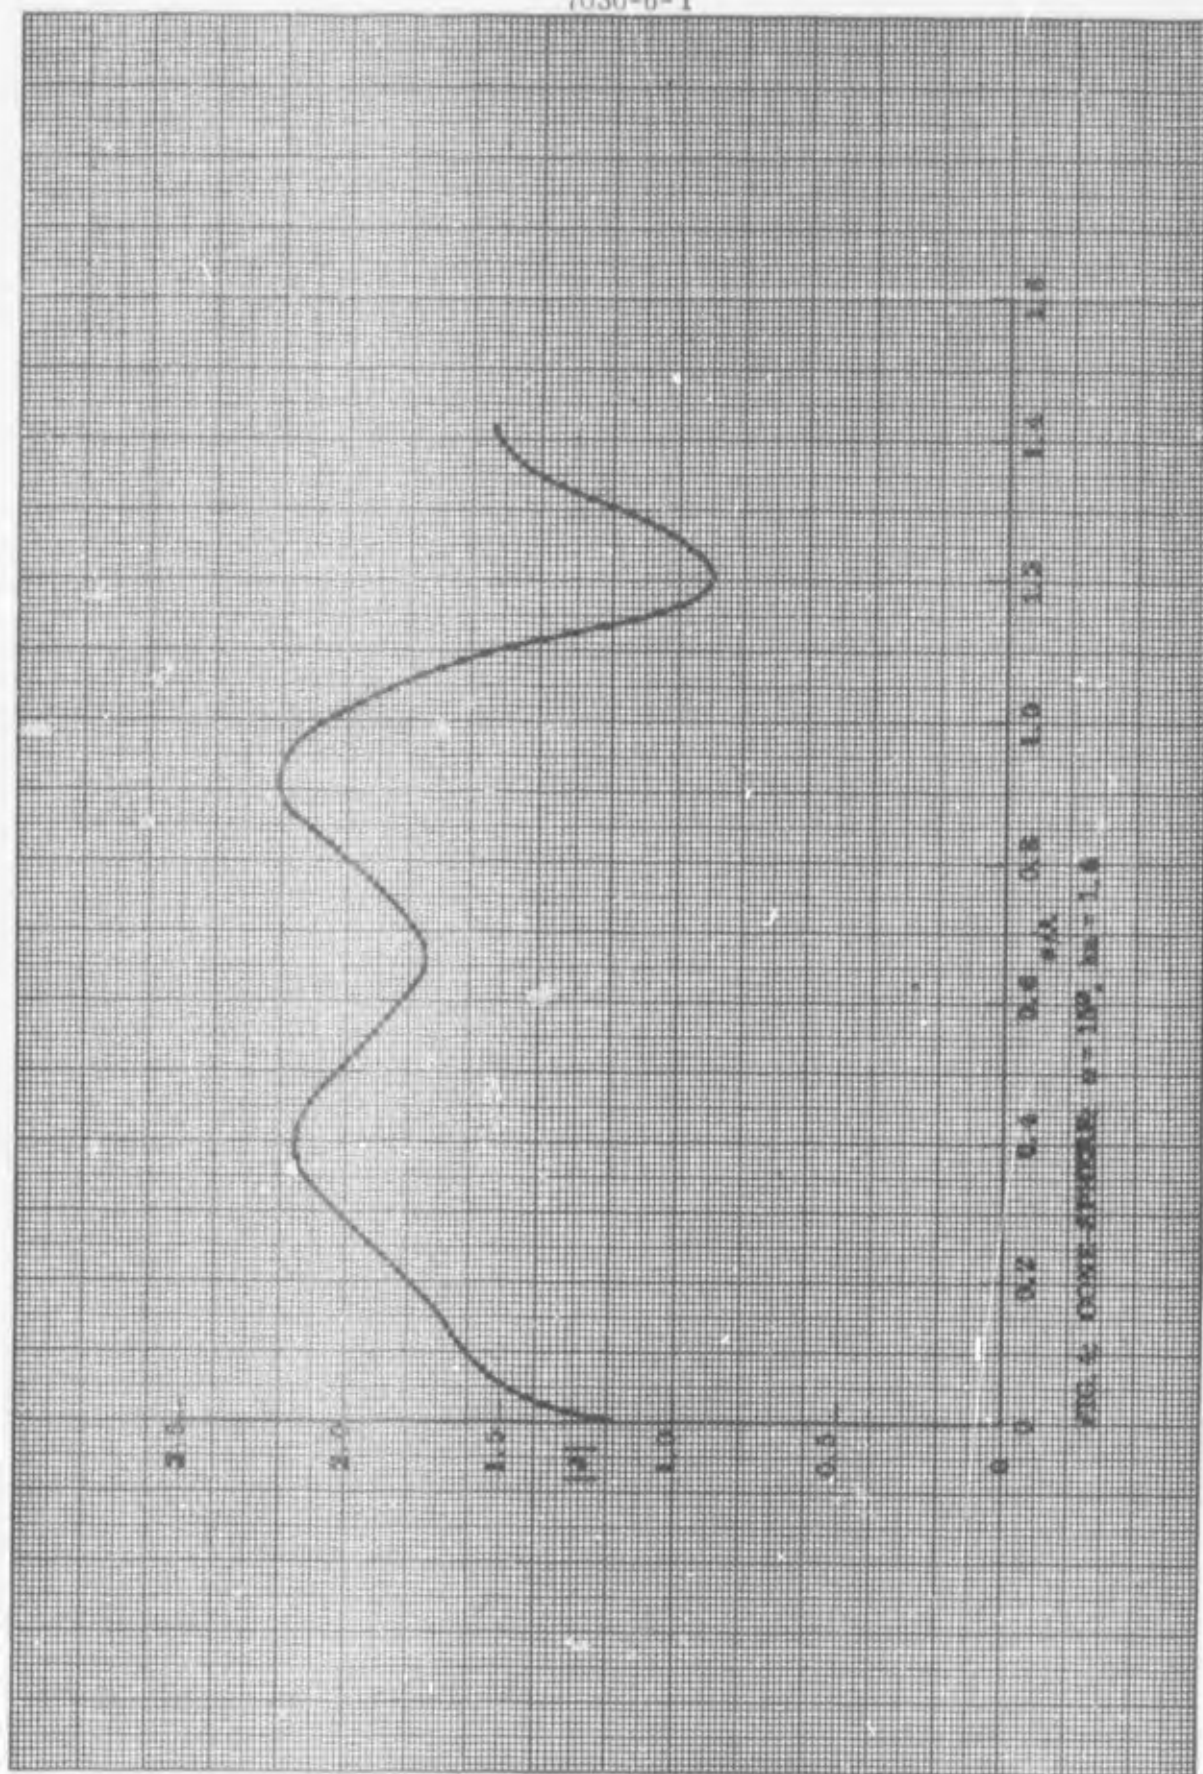

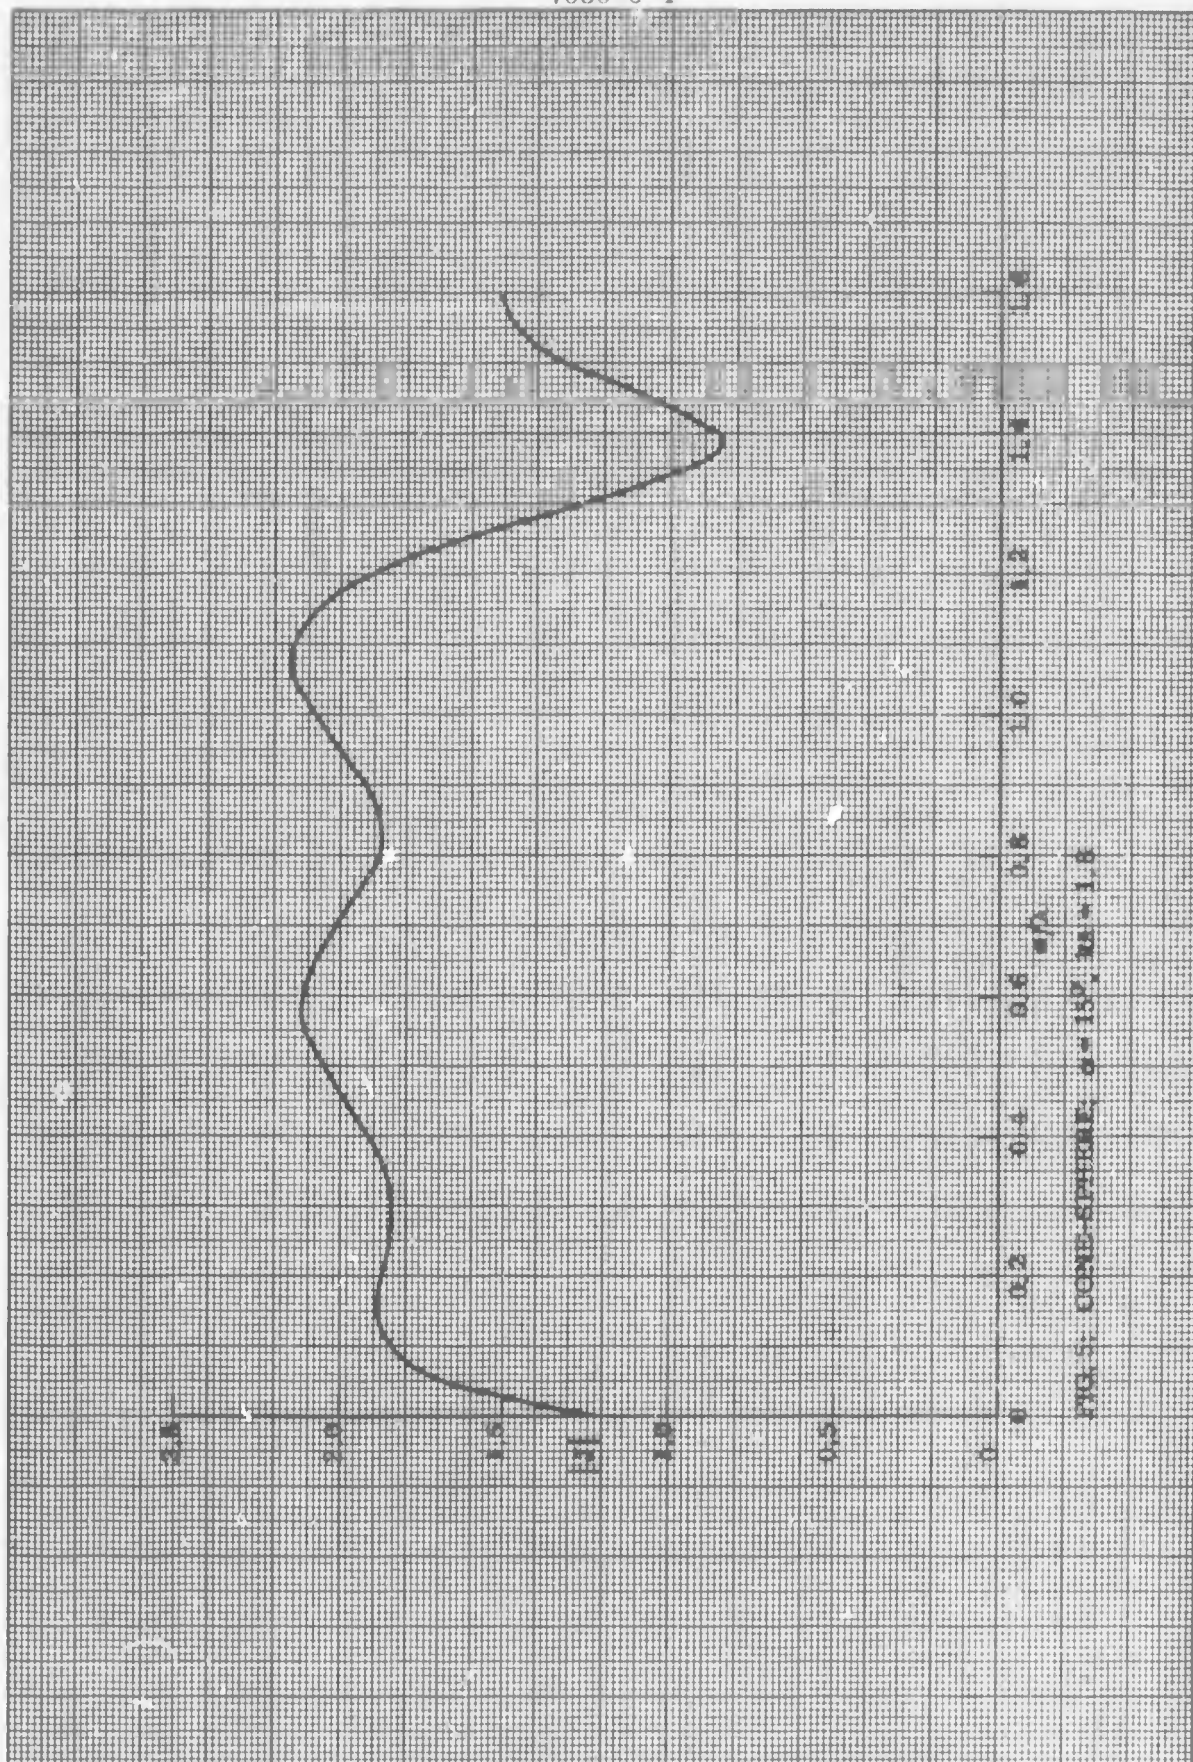
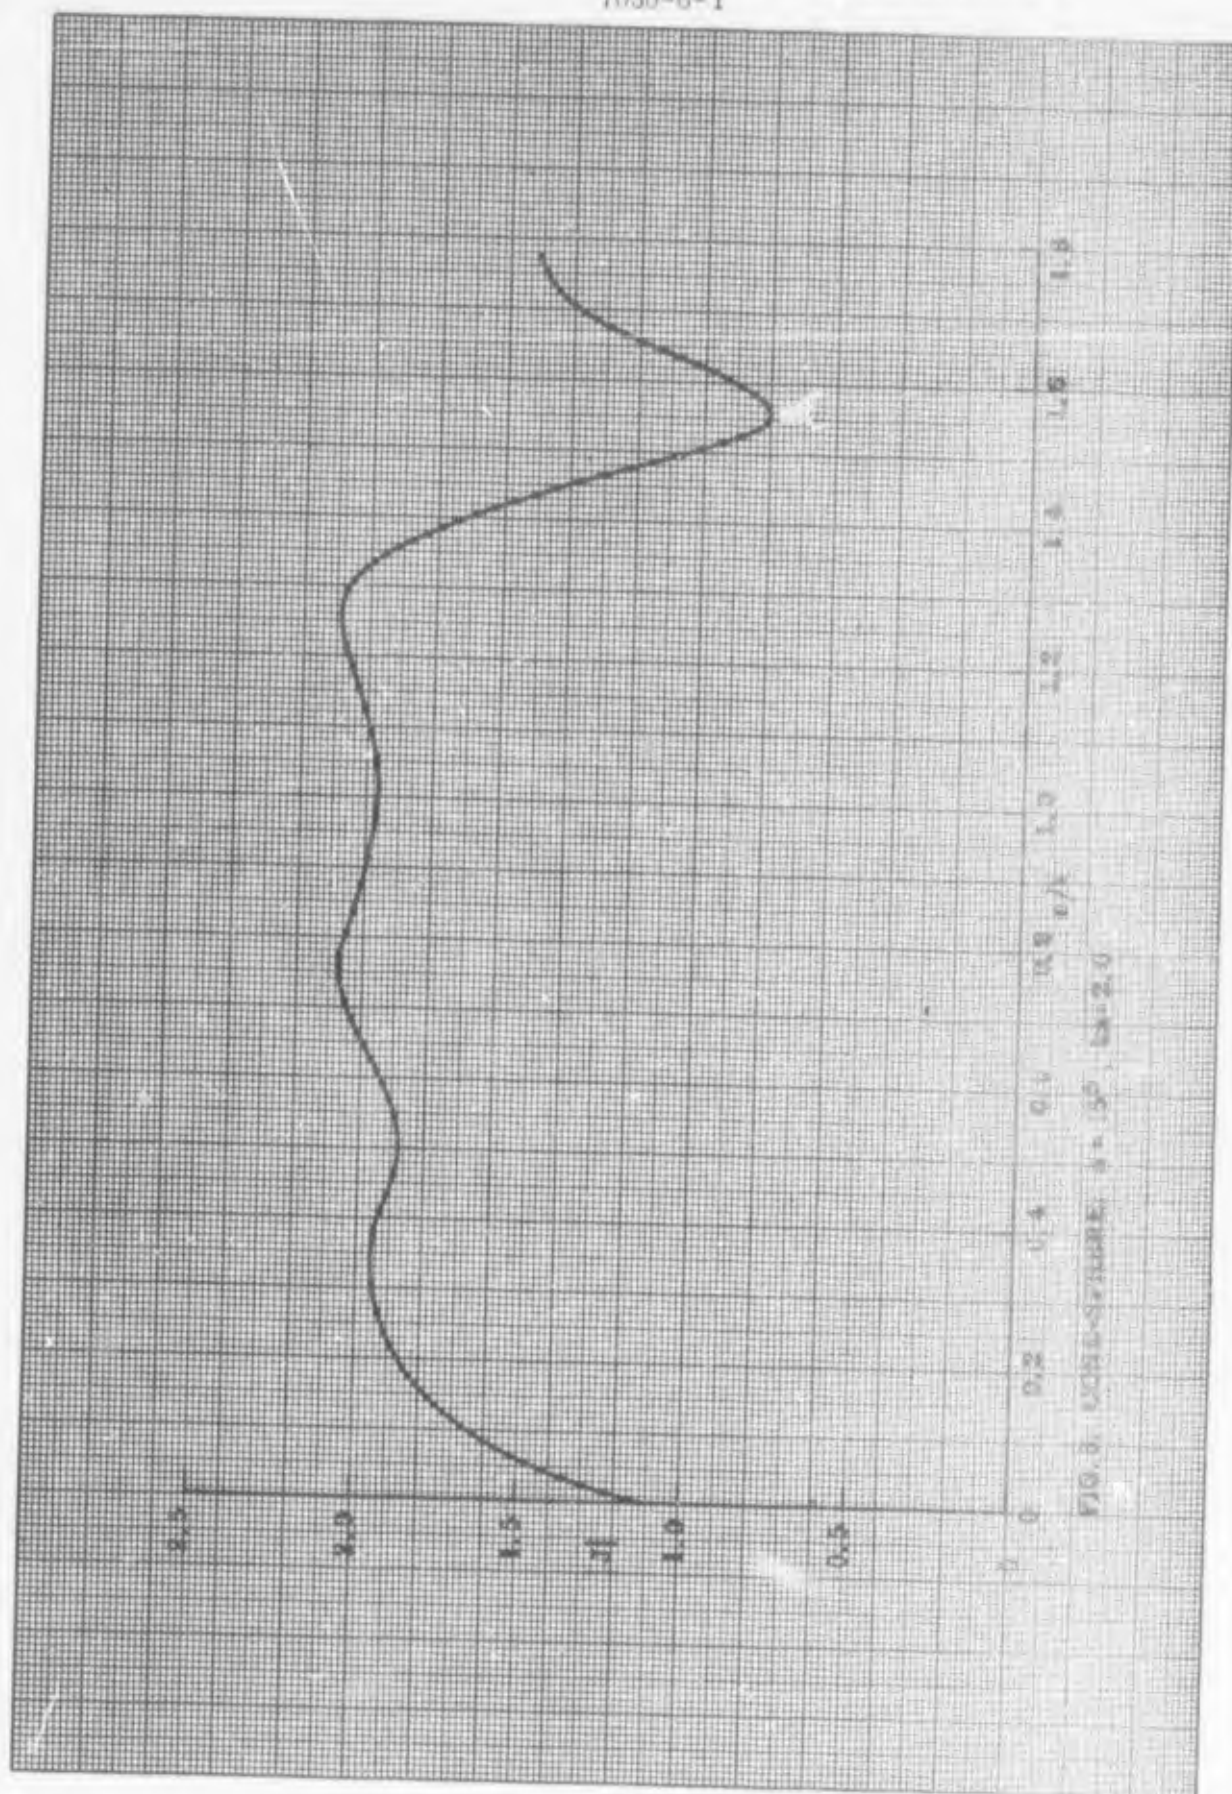
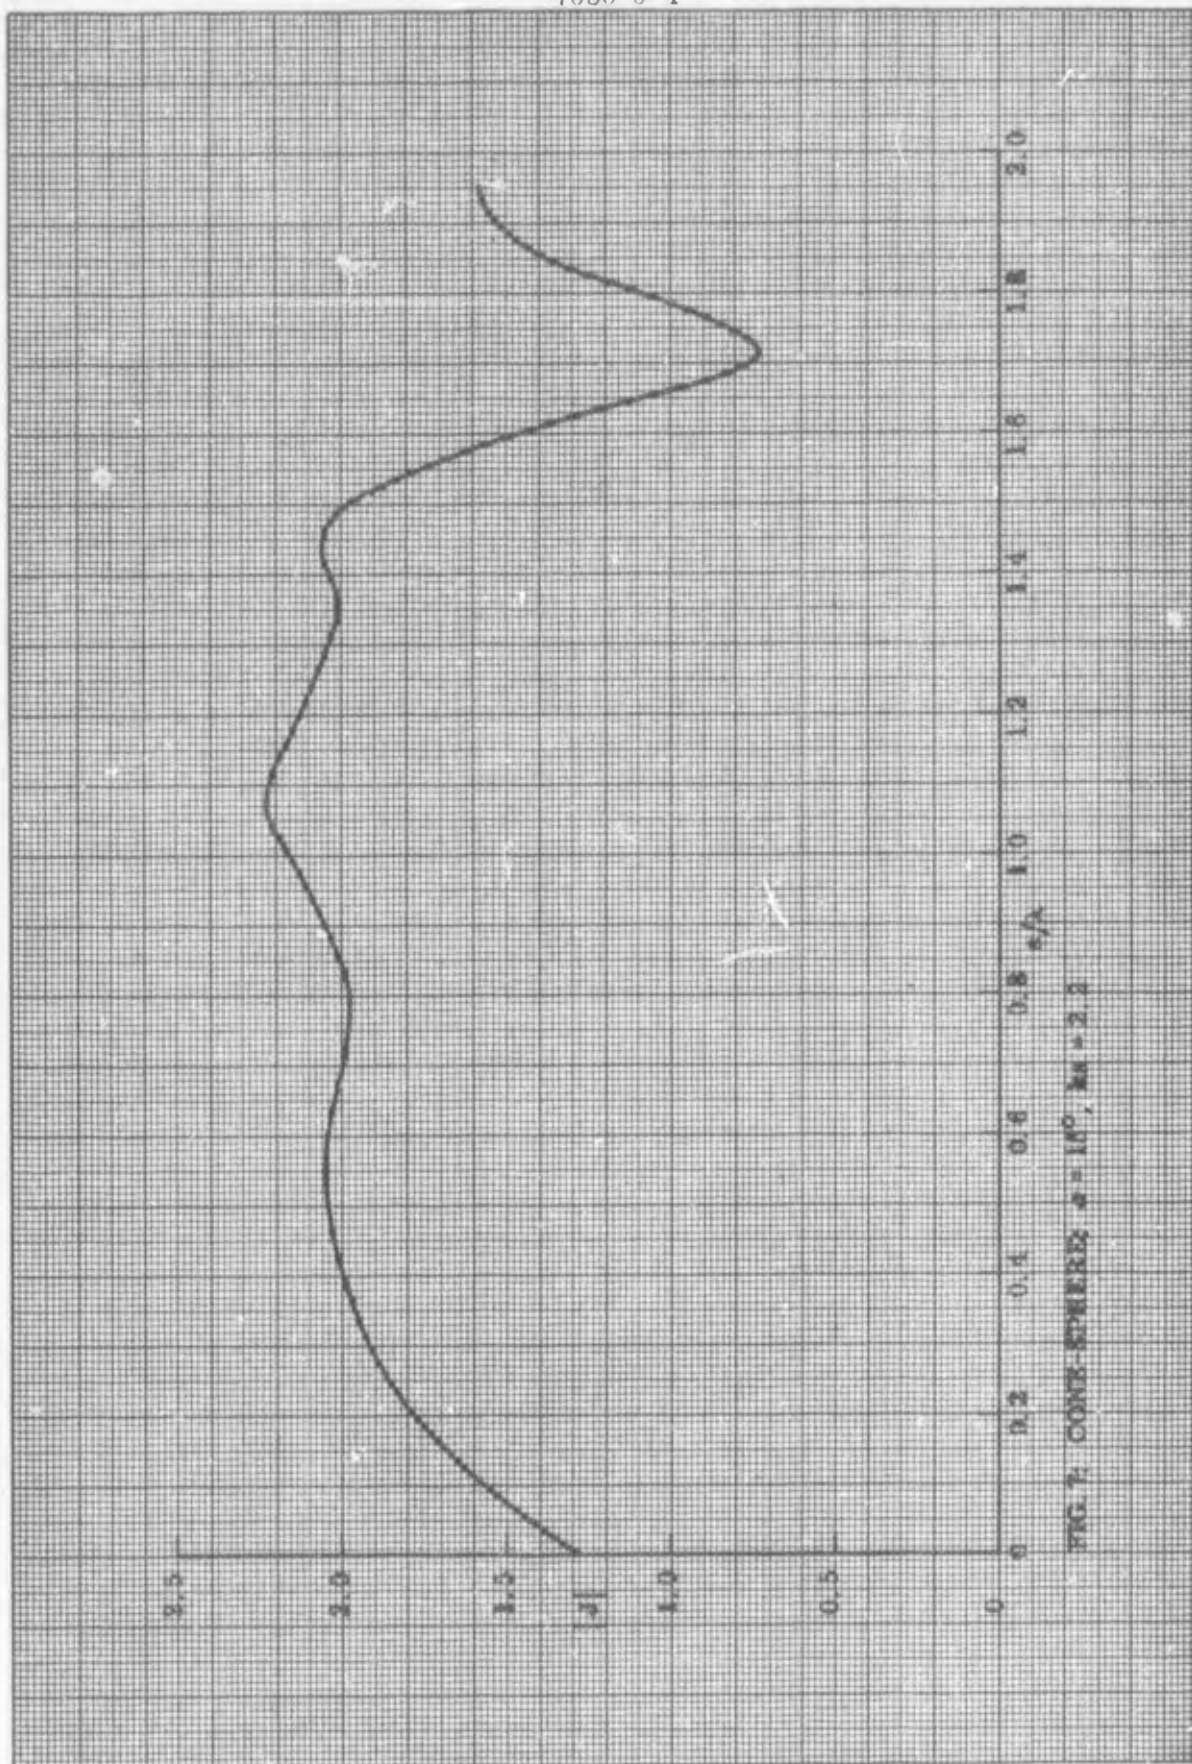
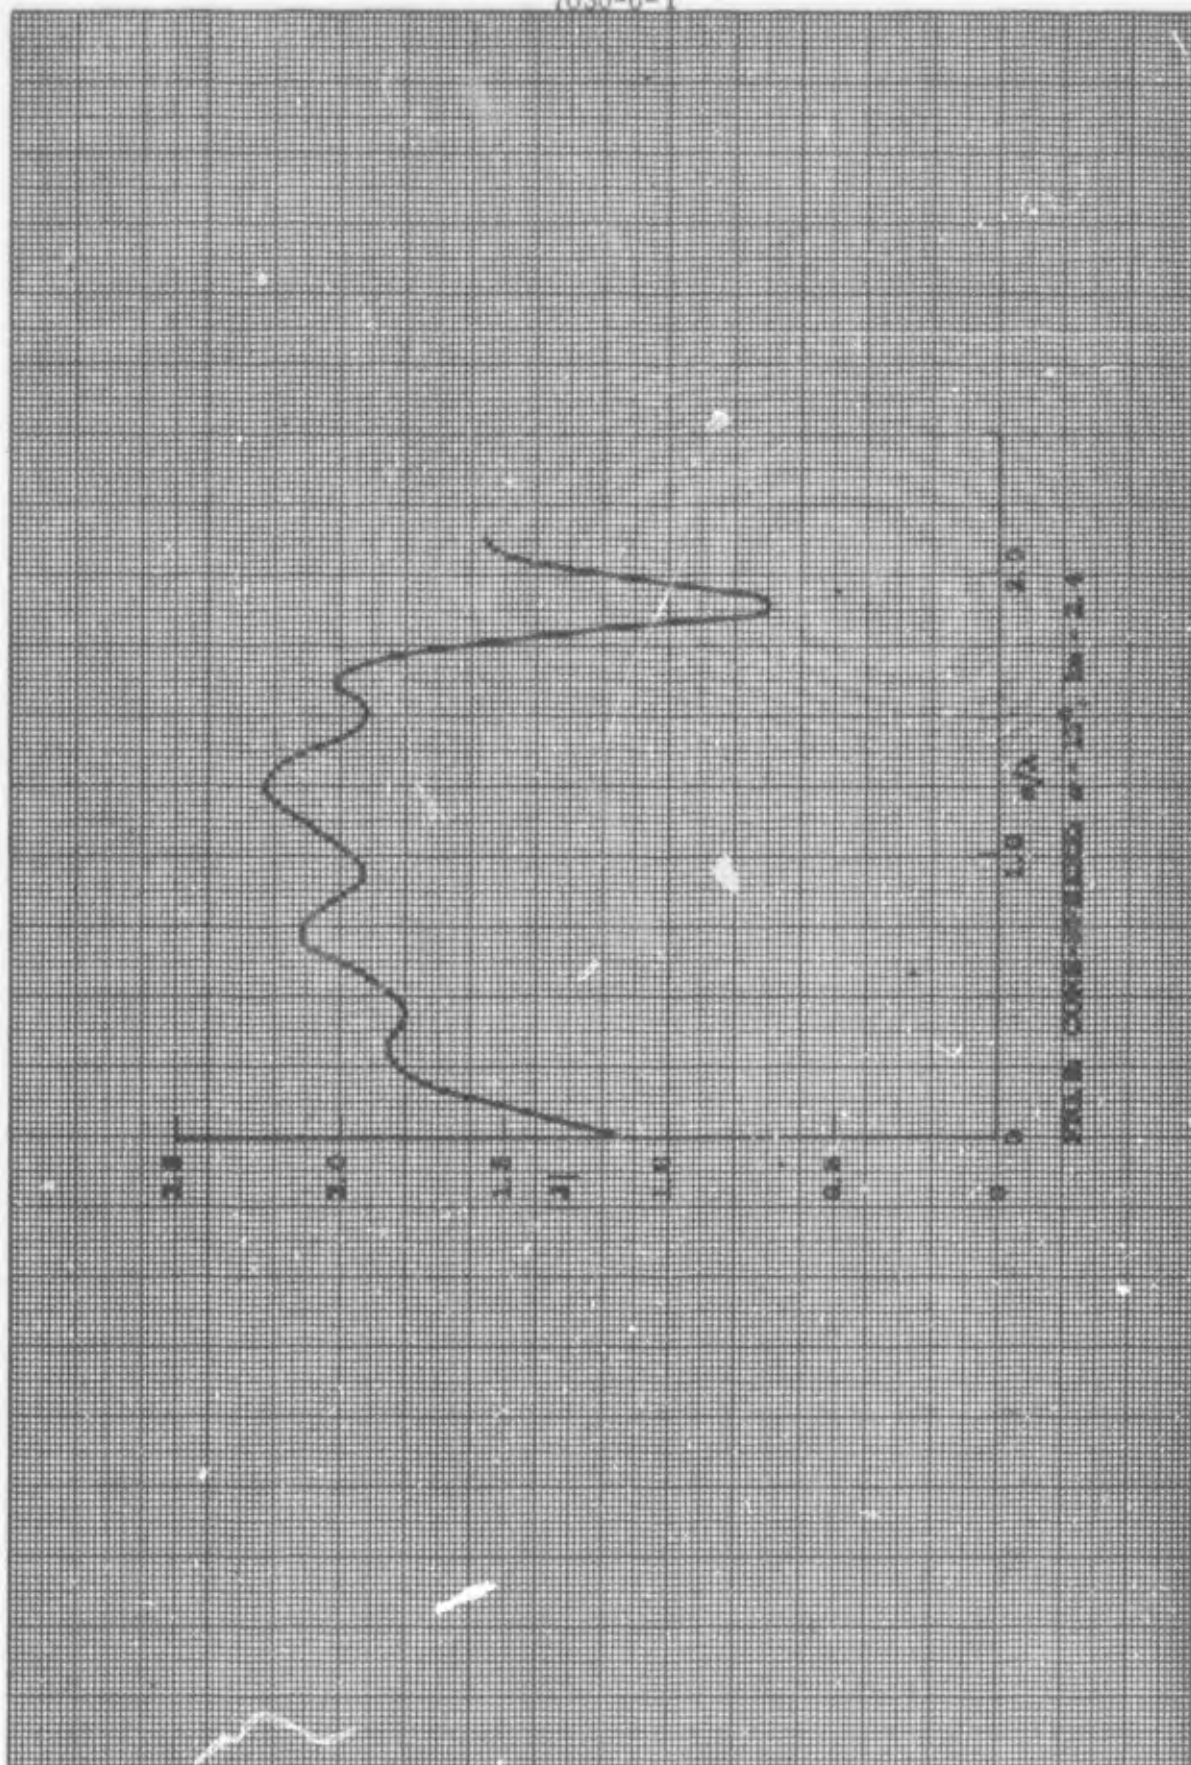


FIG. 5: COND-SPHERE, $d = 137$, $z_1 = 1.6$







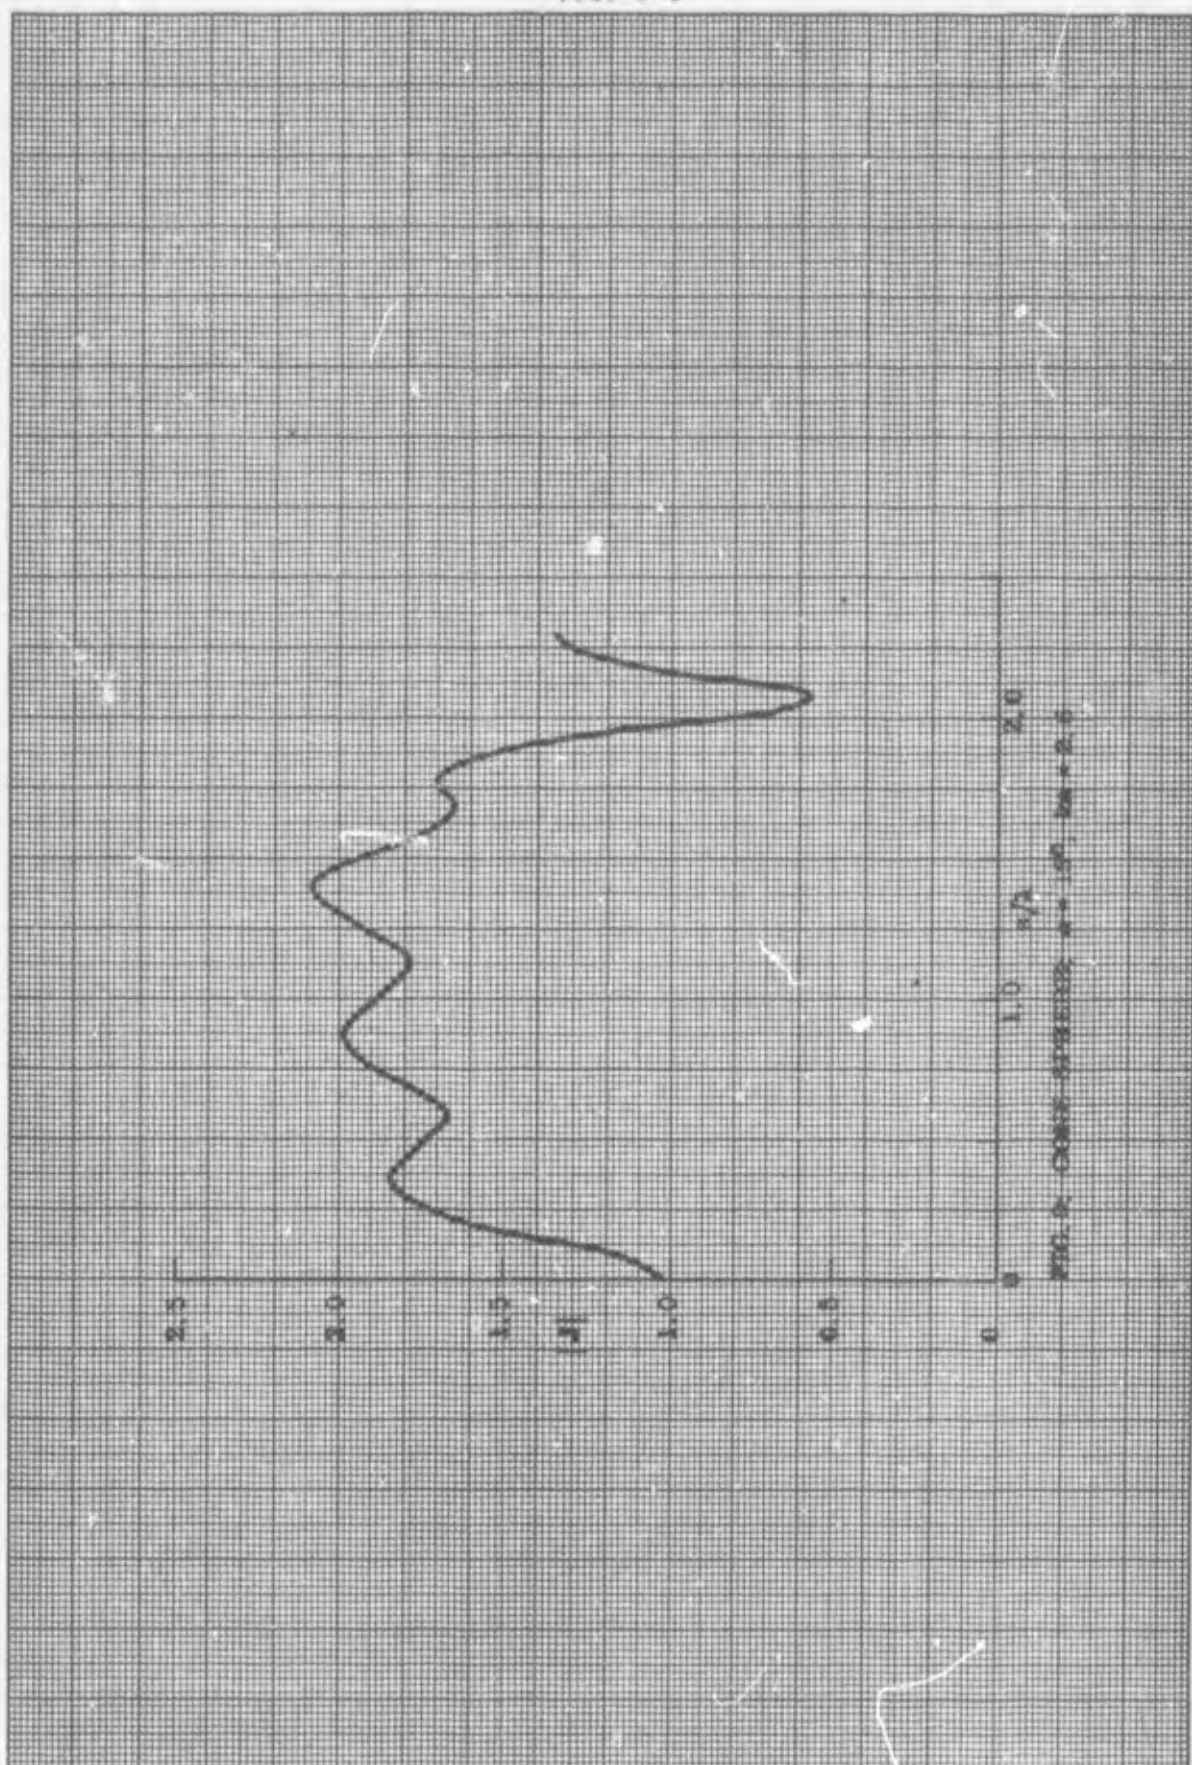
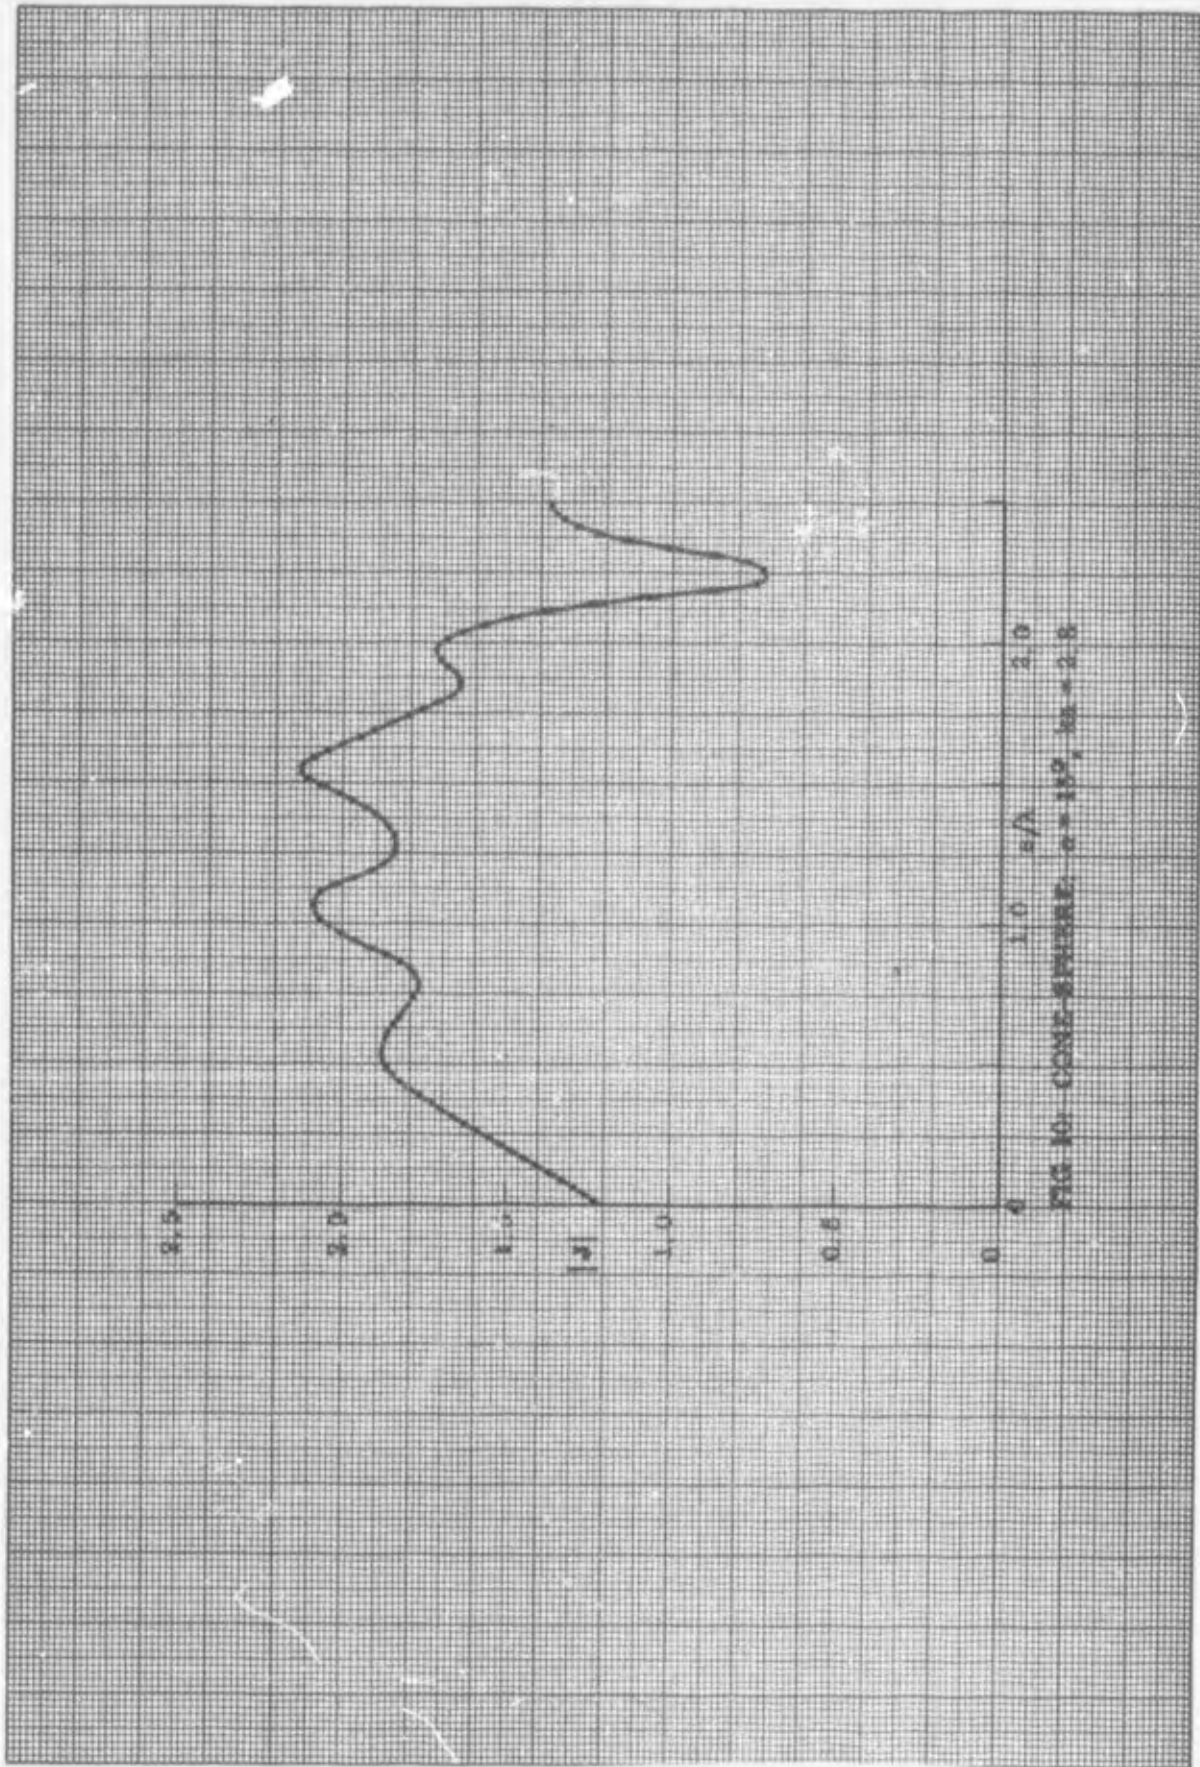


FIG. 4. COND. STRIPPER, $\mu = 1.57$, $\text{Im} = 2.6$



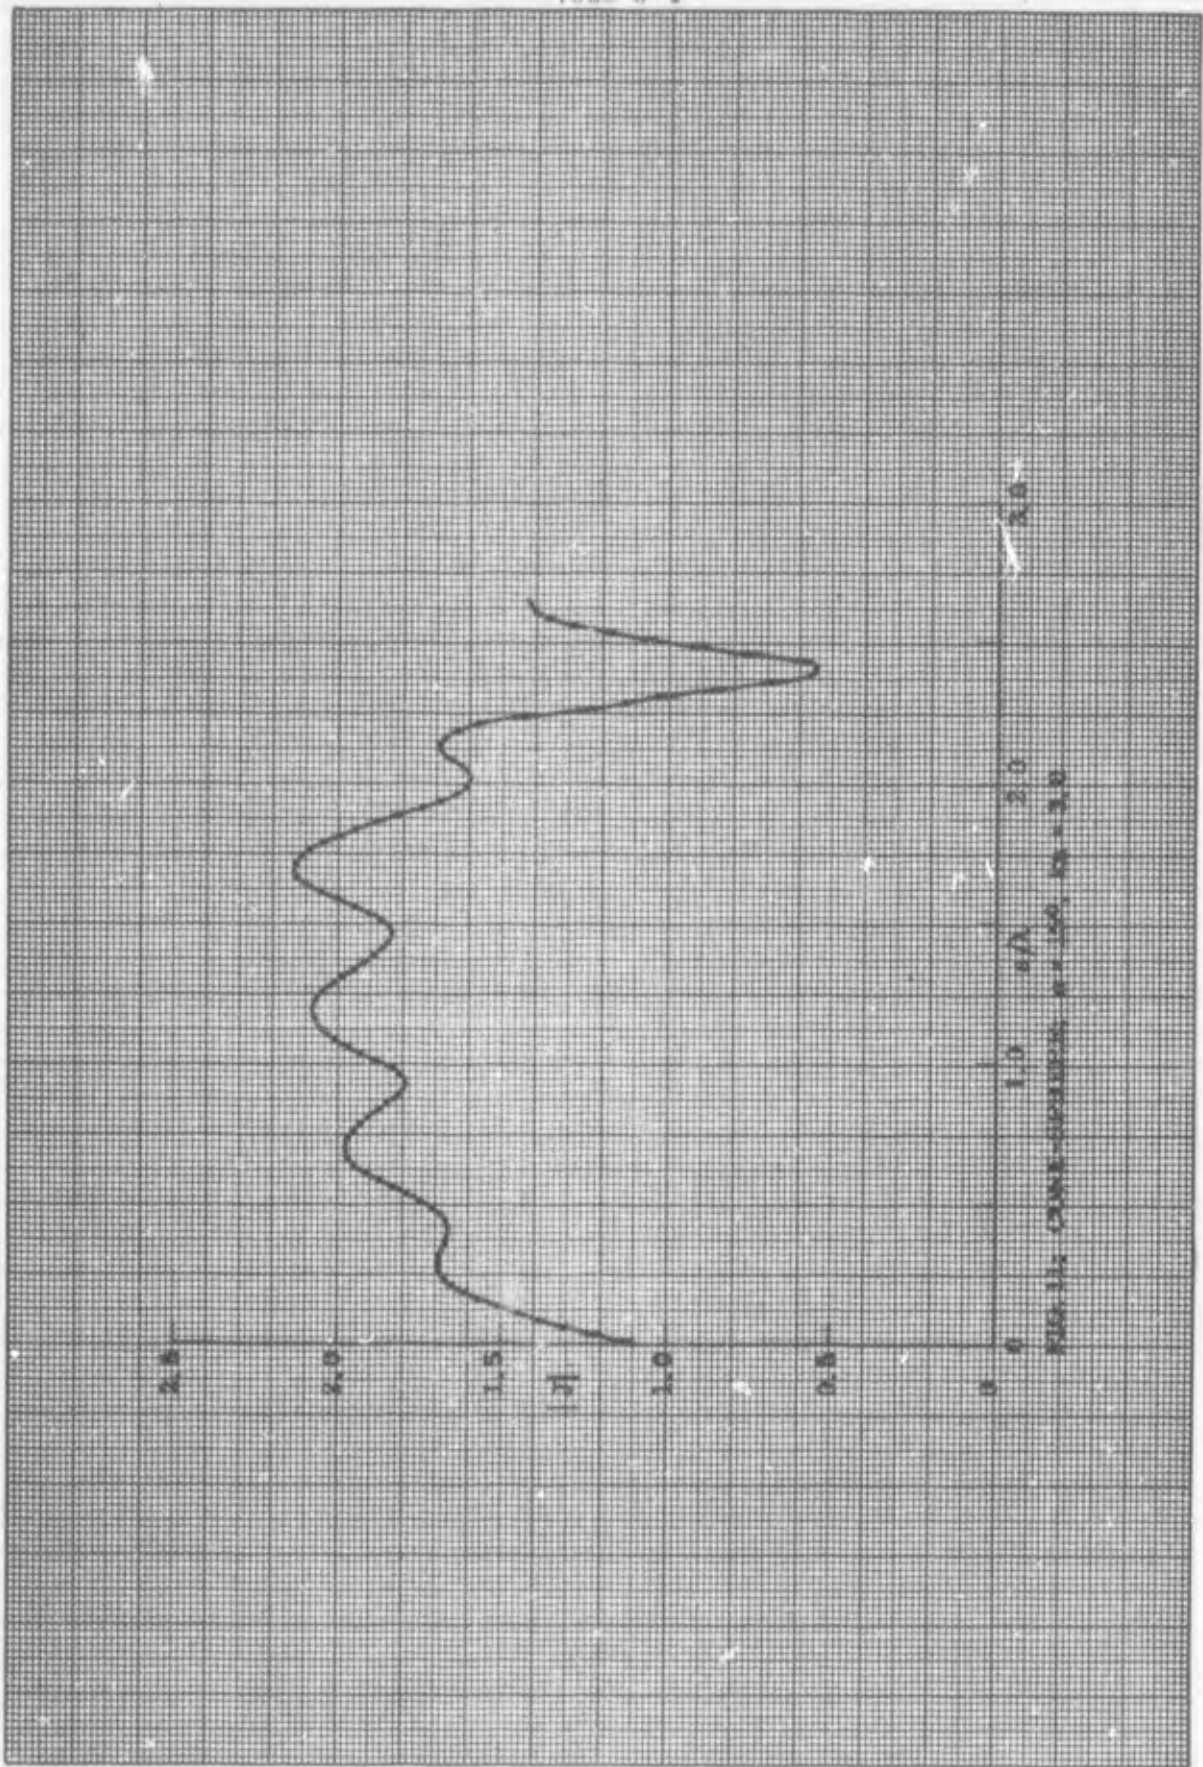
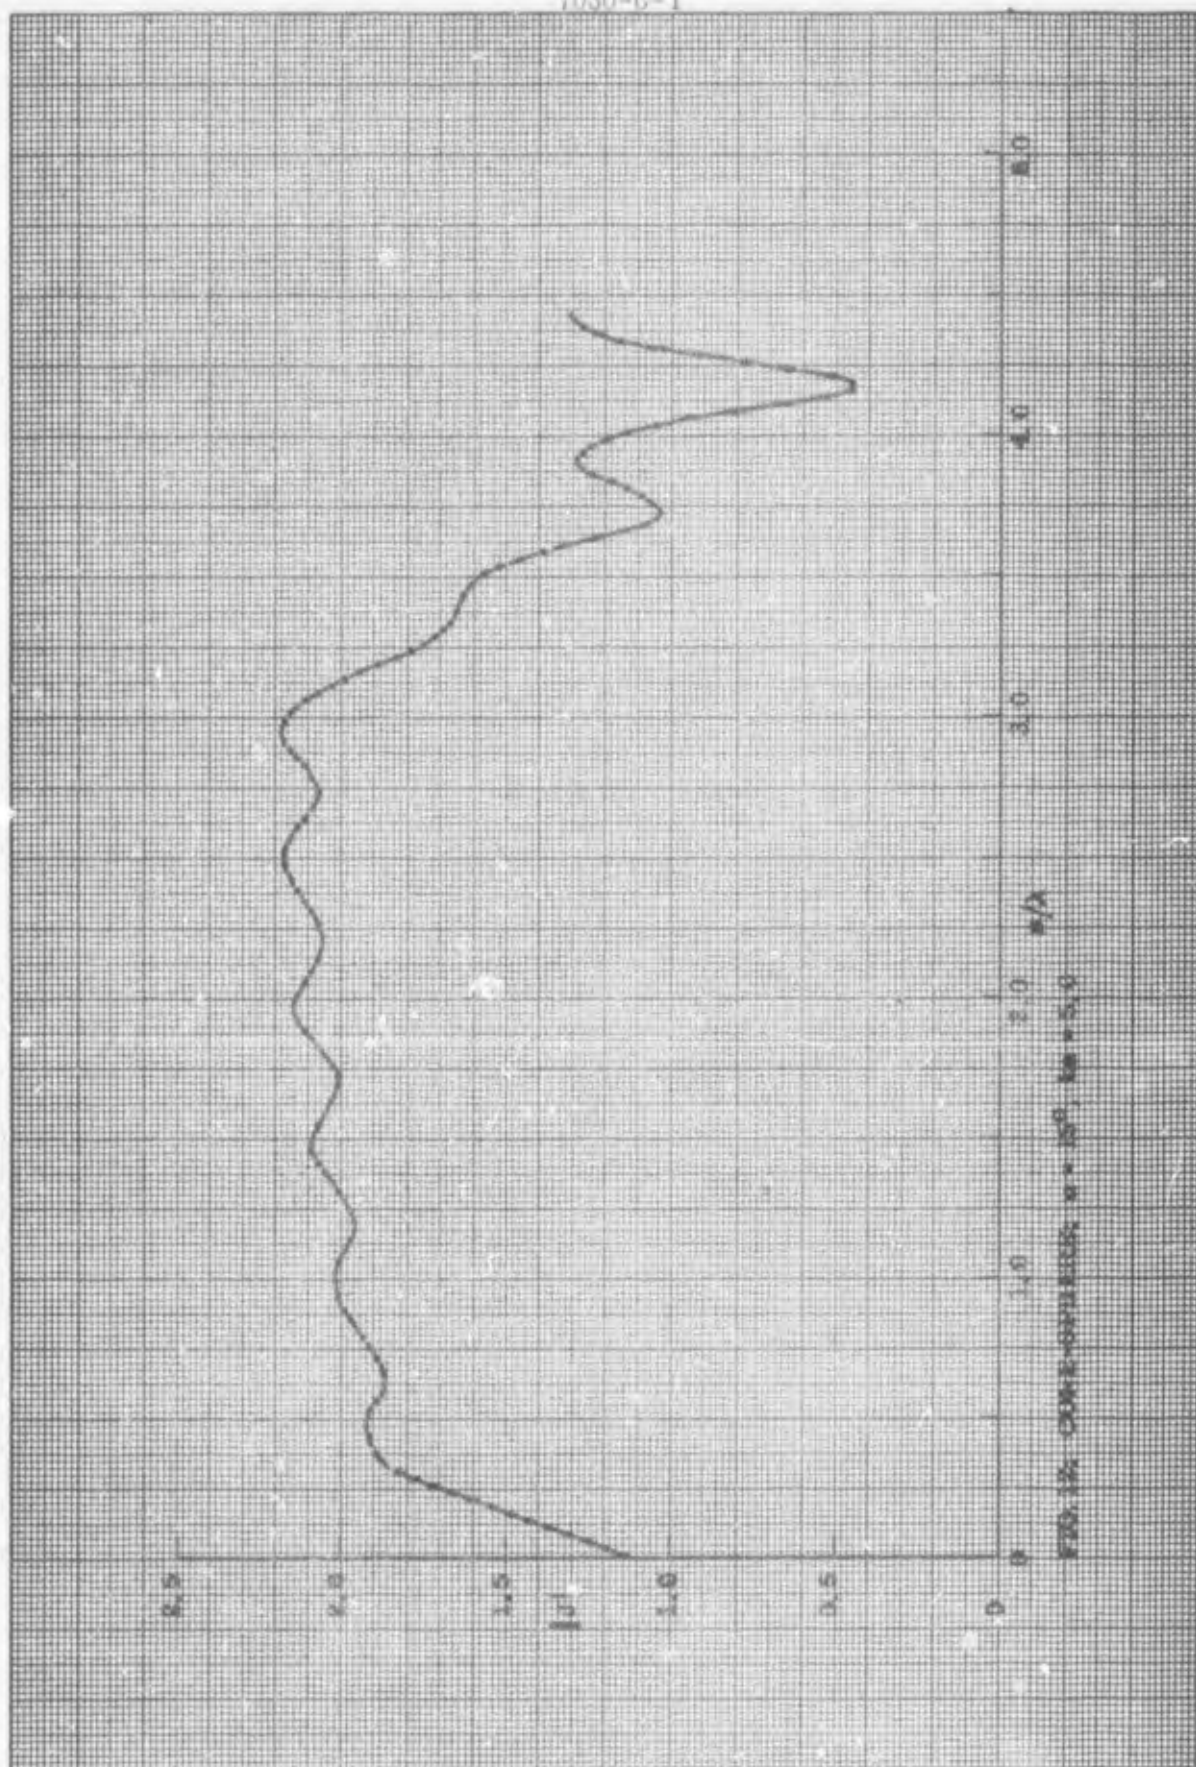


FIG. 11: CHARGE-SENSITIVE DETECTOR, $\tau = 1.0 \mu s$, $\tau_s = 3.0 \mu s$



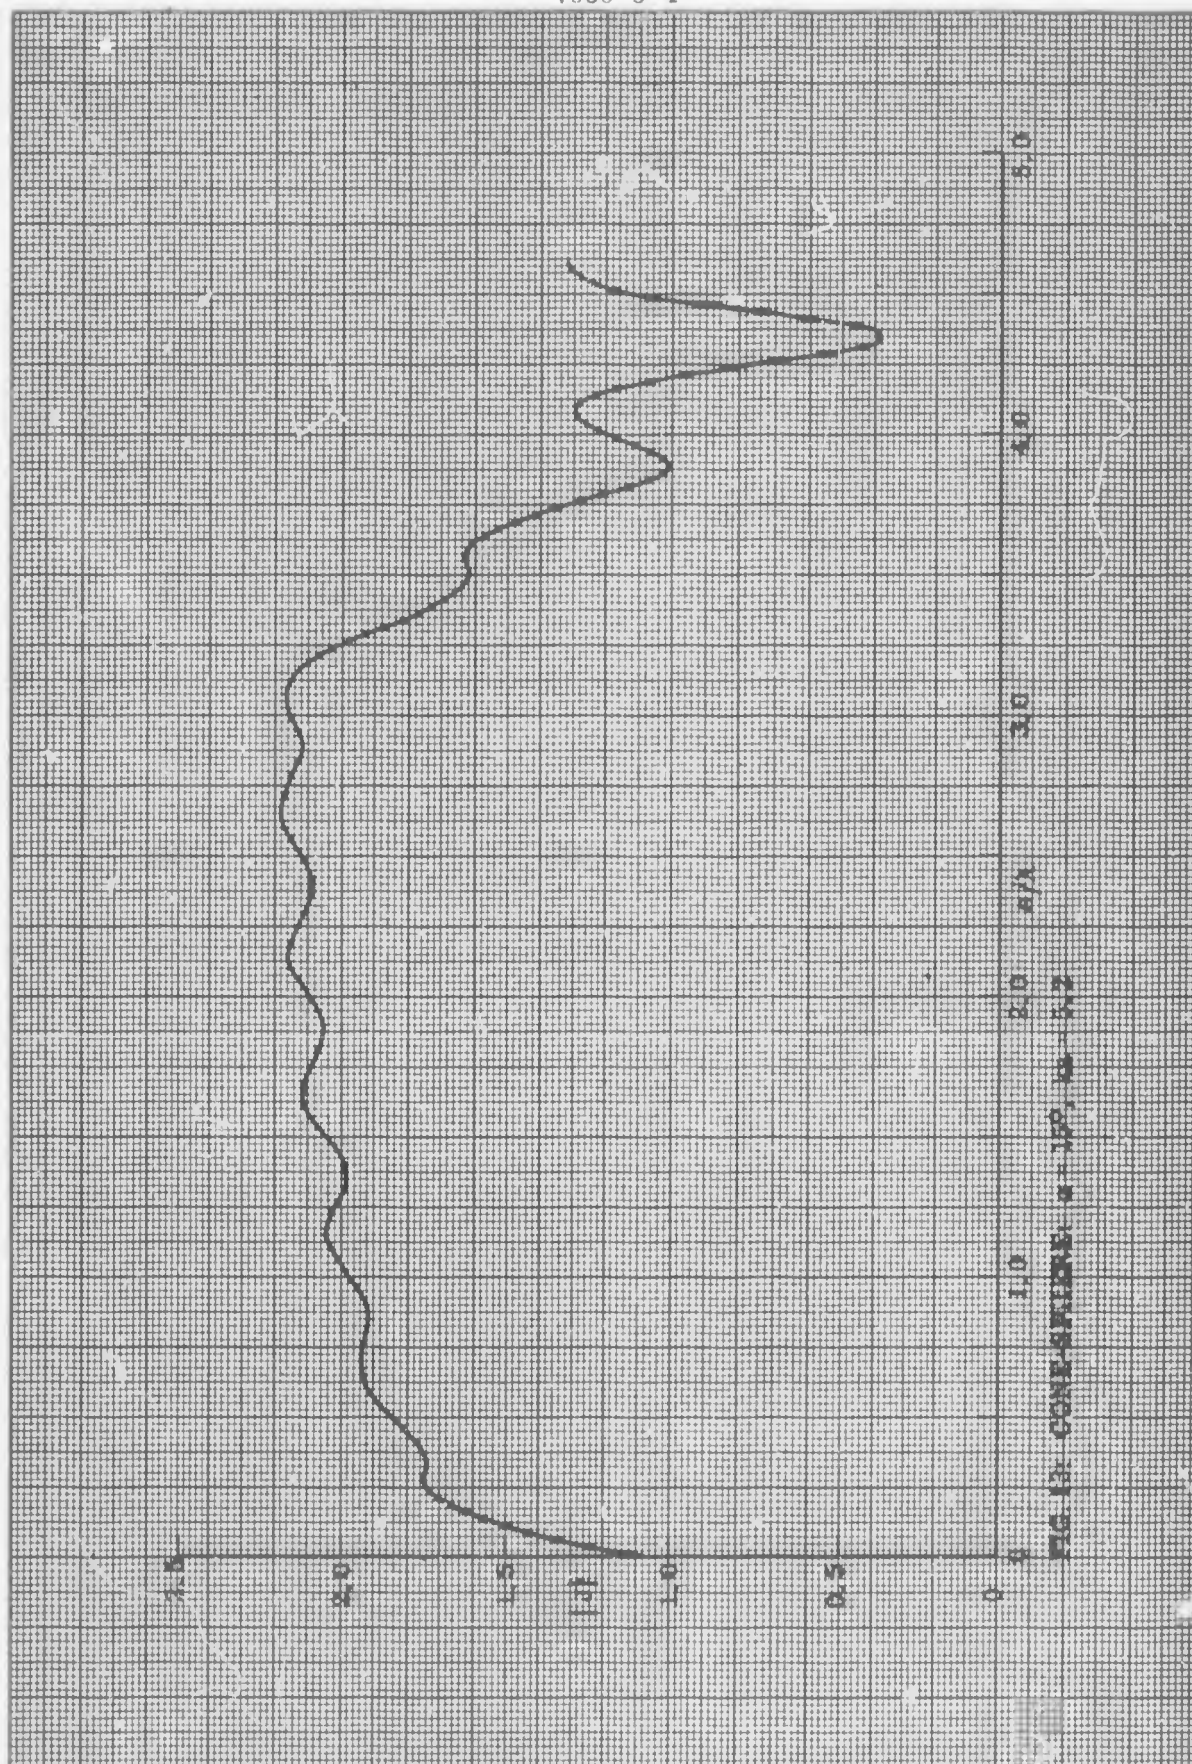
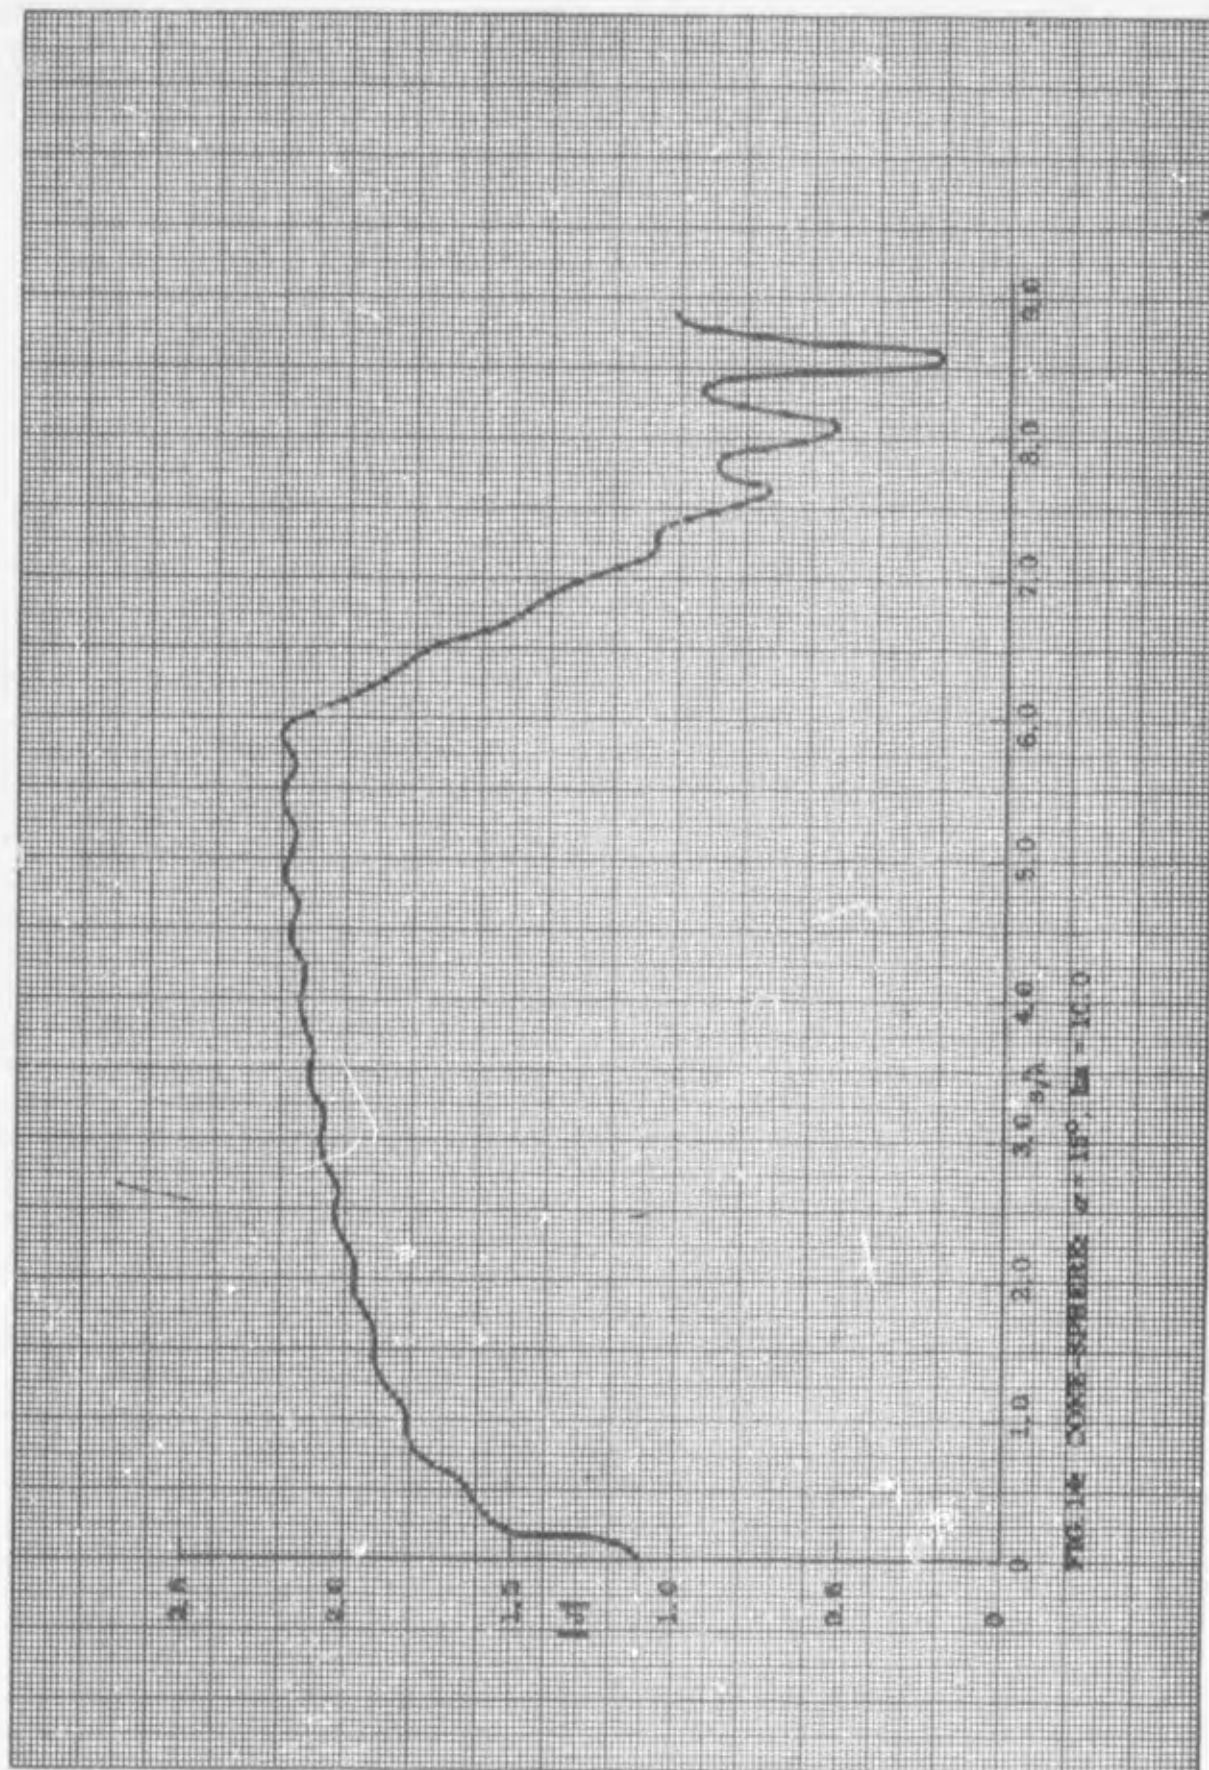


FIG. 12- CONE-SPIRALS, $\theta = 120^\circ$, $\lambda = 5.2$



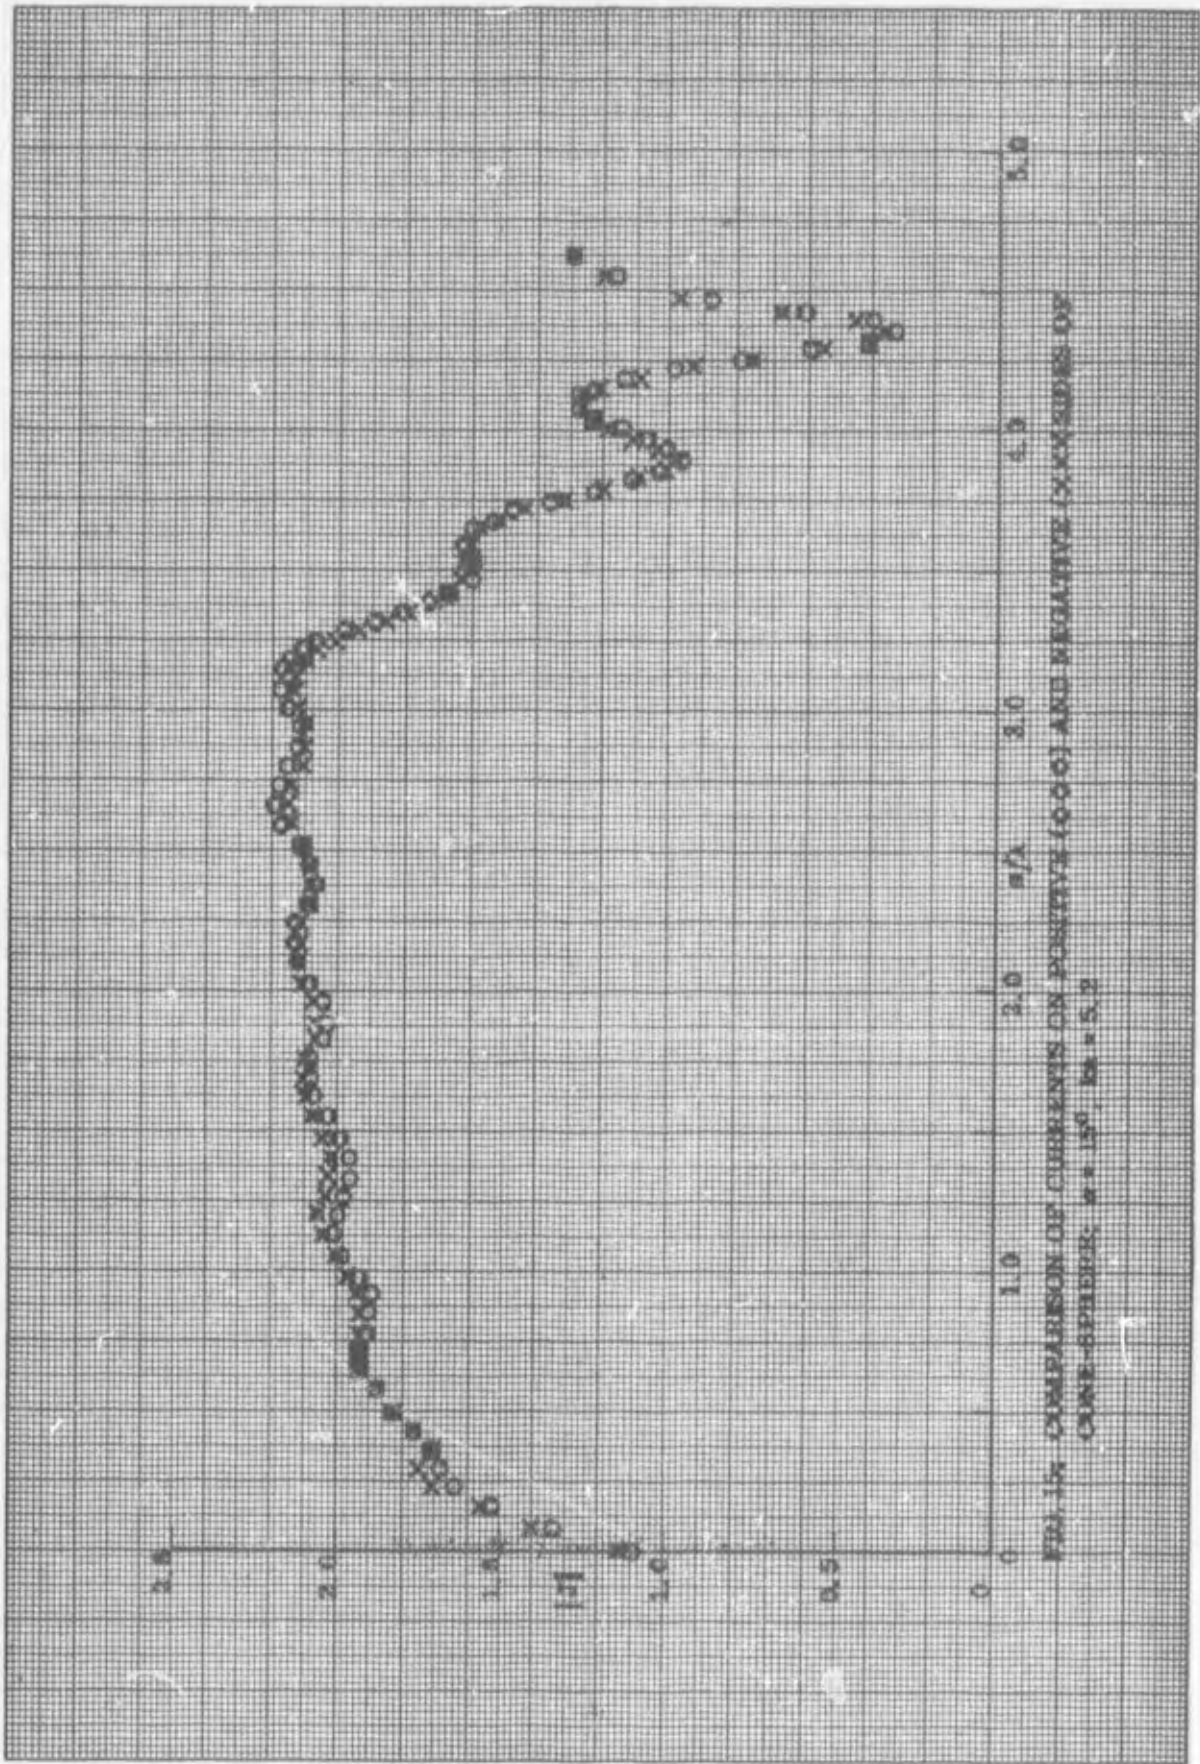
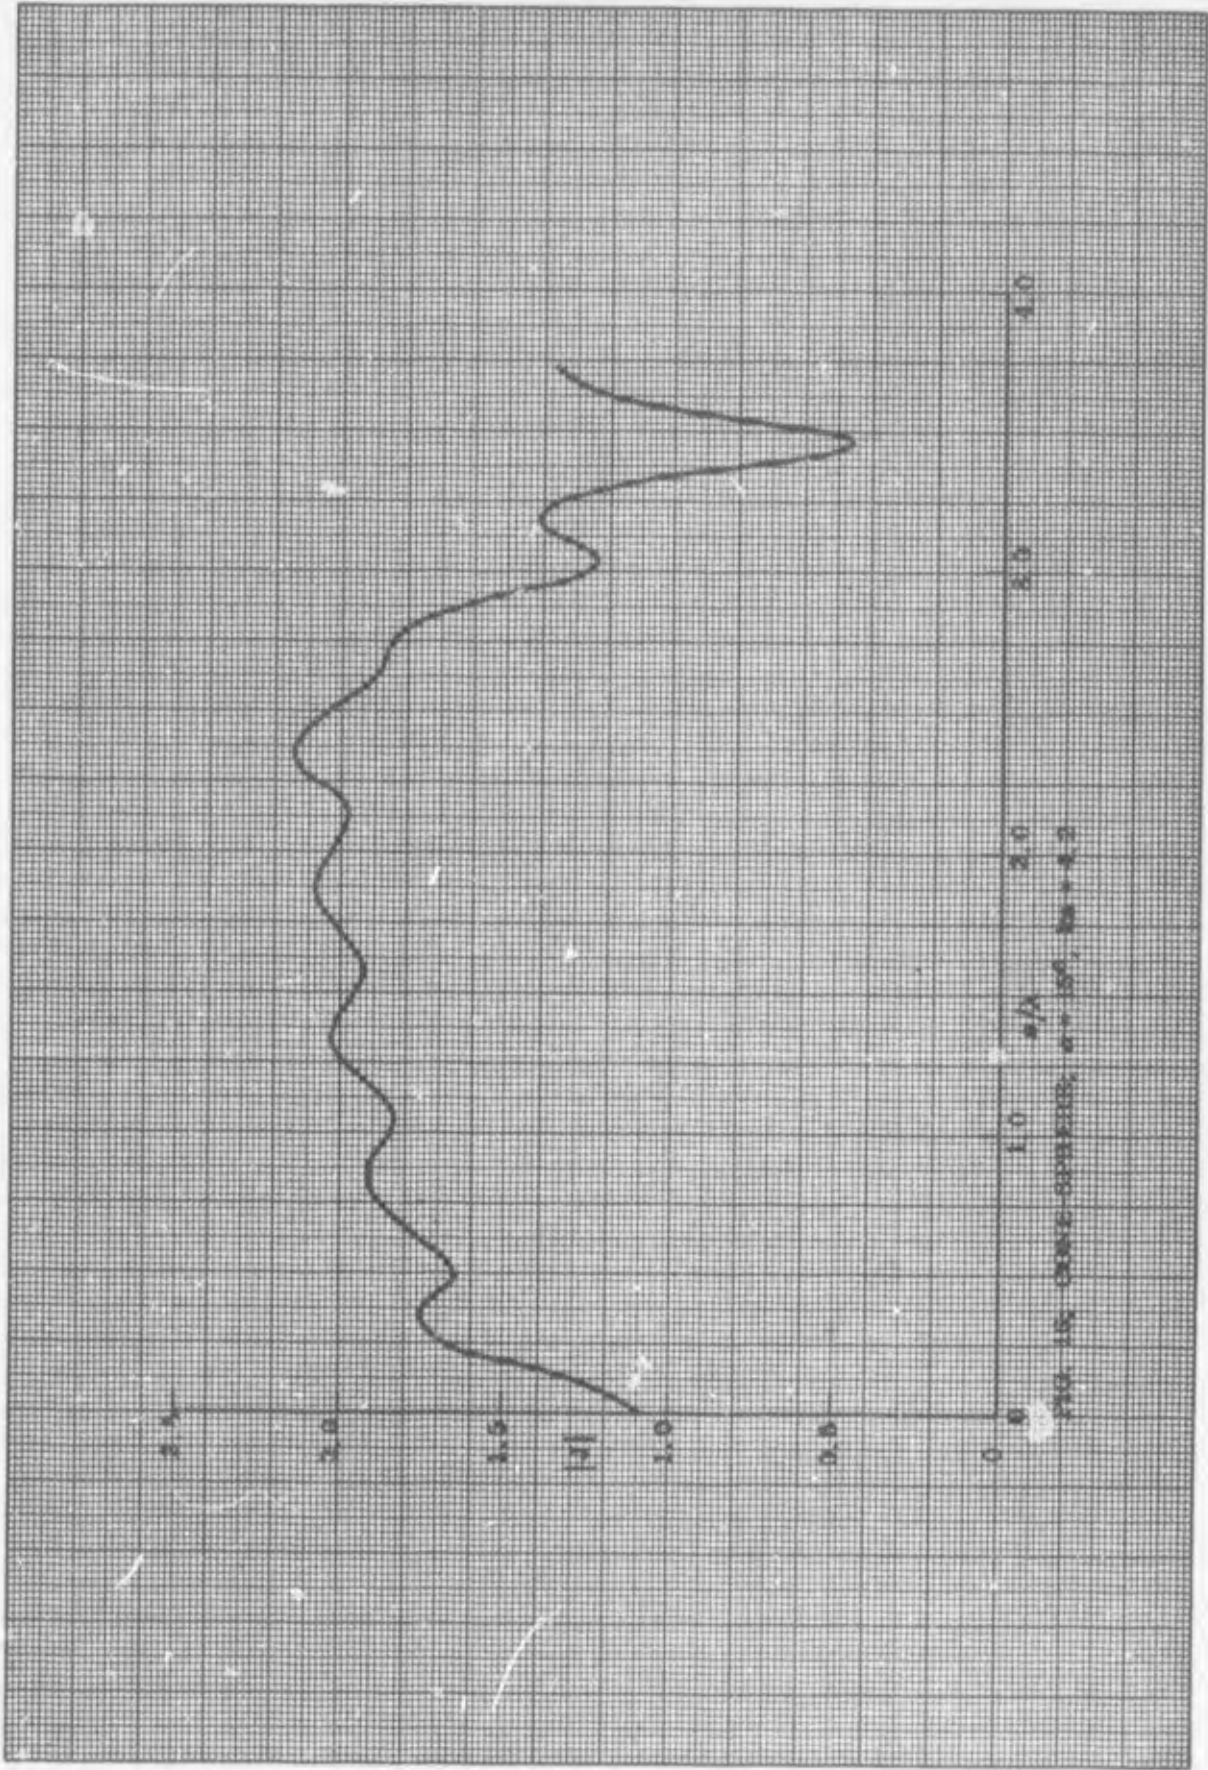


FIG. 15. COMPARISON OF CURRENTS ON POSITIVE (O-O) AND NEGATIVE (X-X) SIDES OF CONE SPHERES; $\theta = 15^\circ$, $h = 5.2$



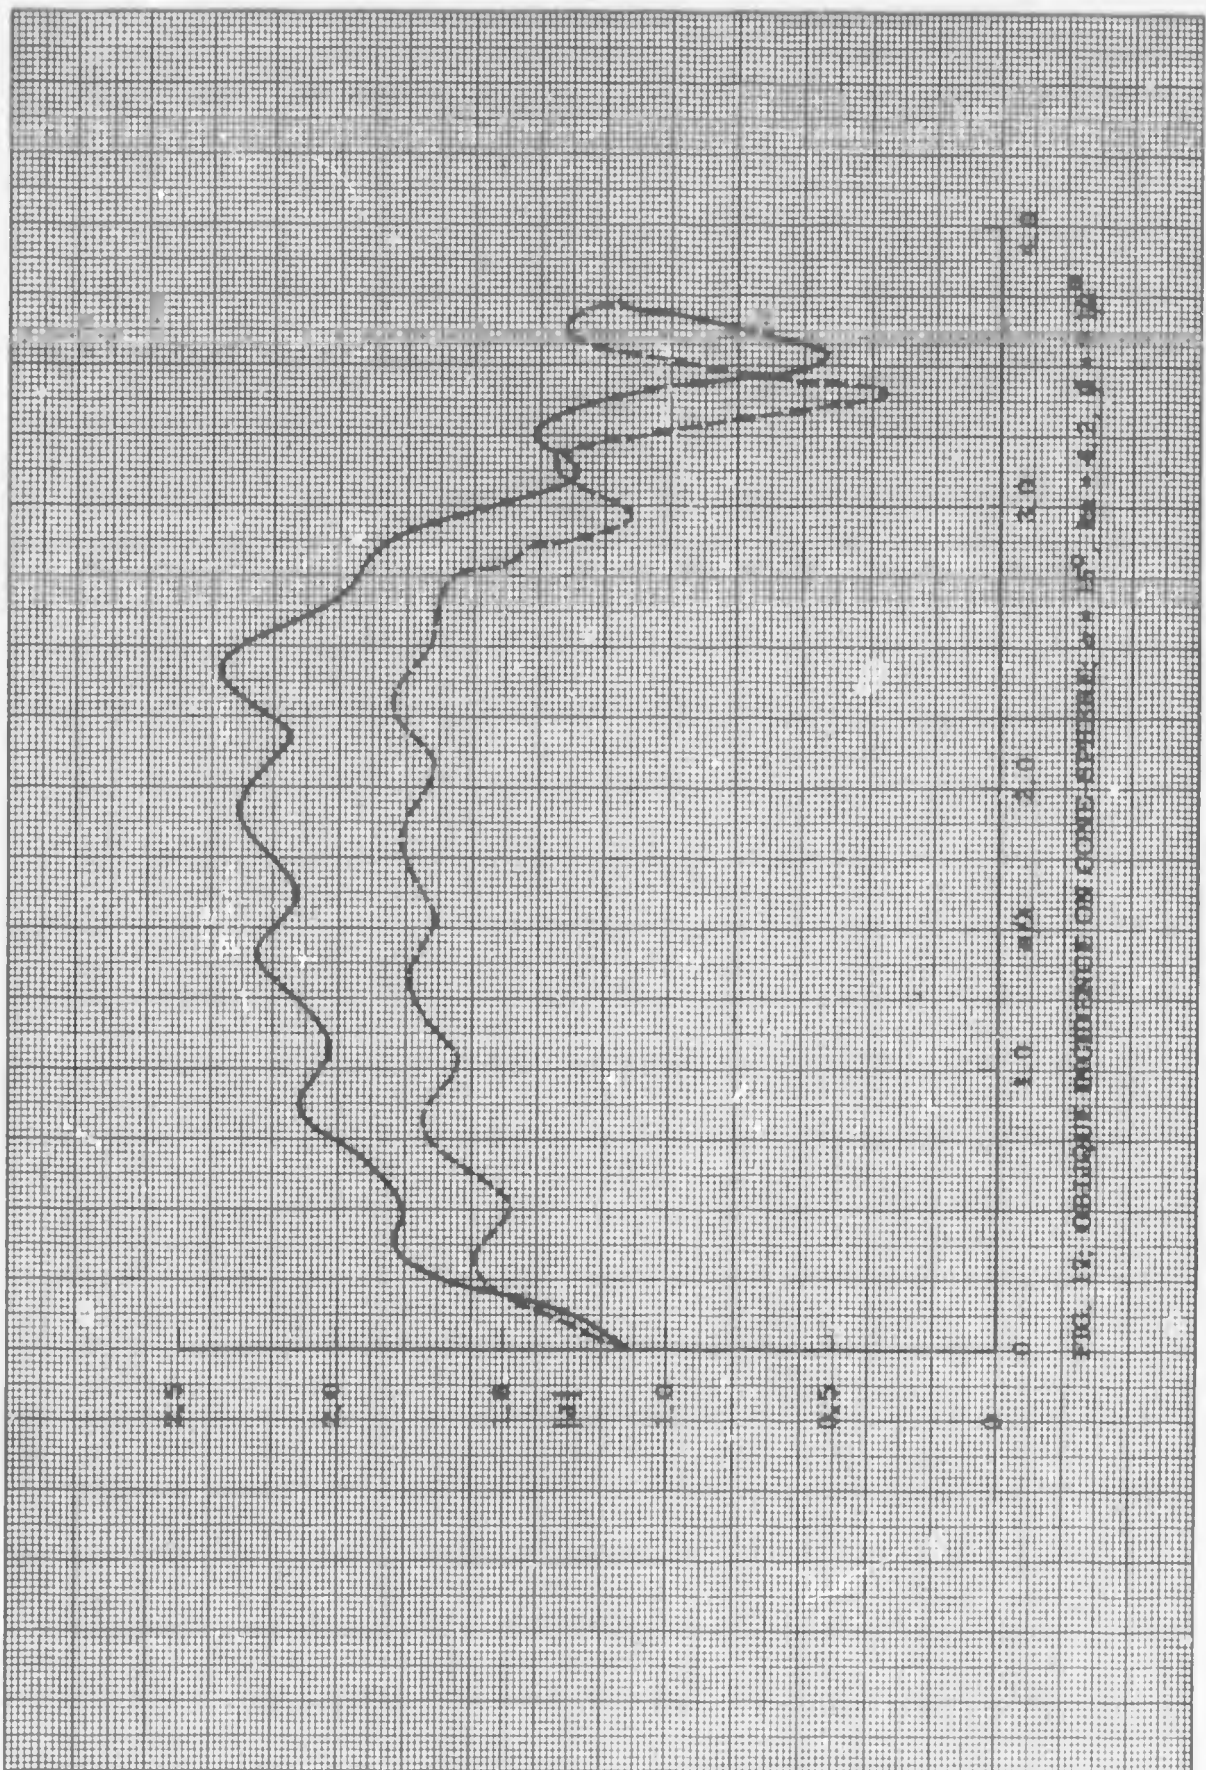
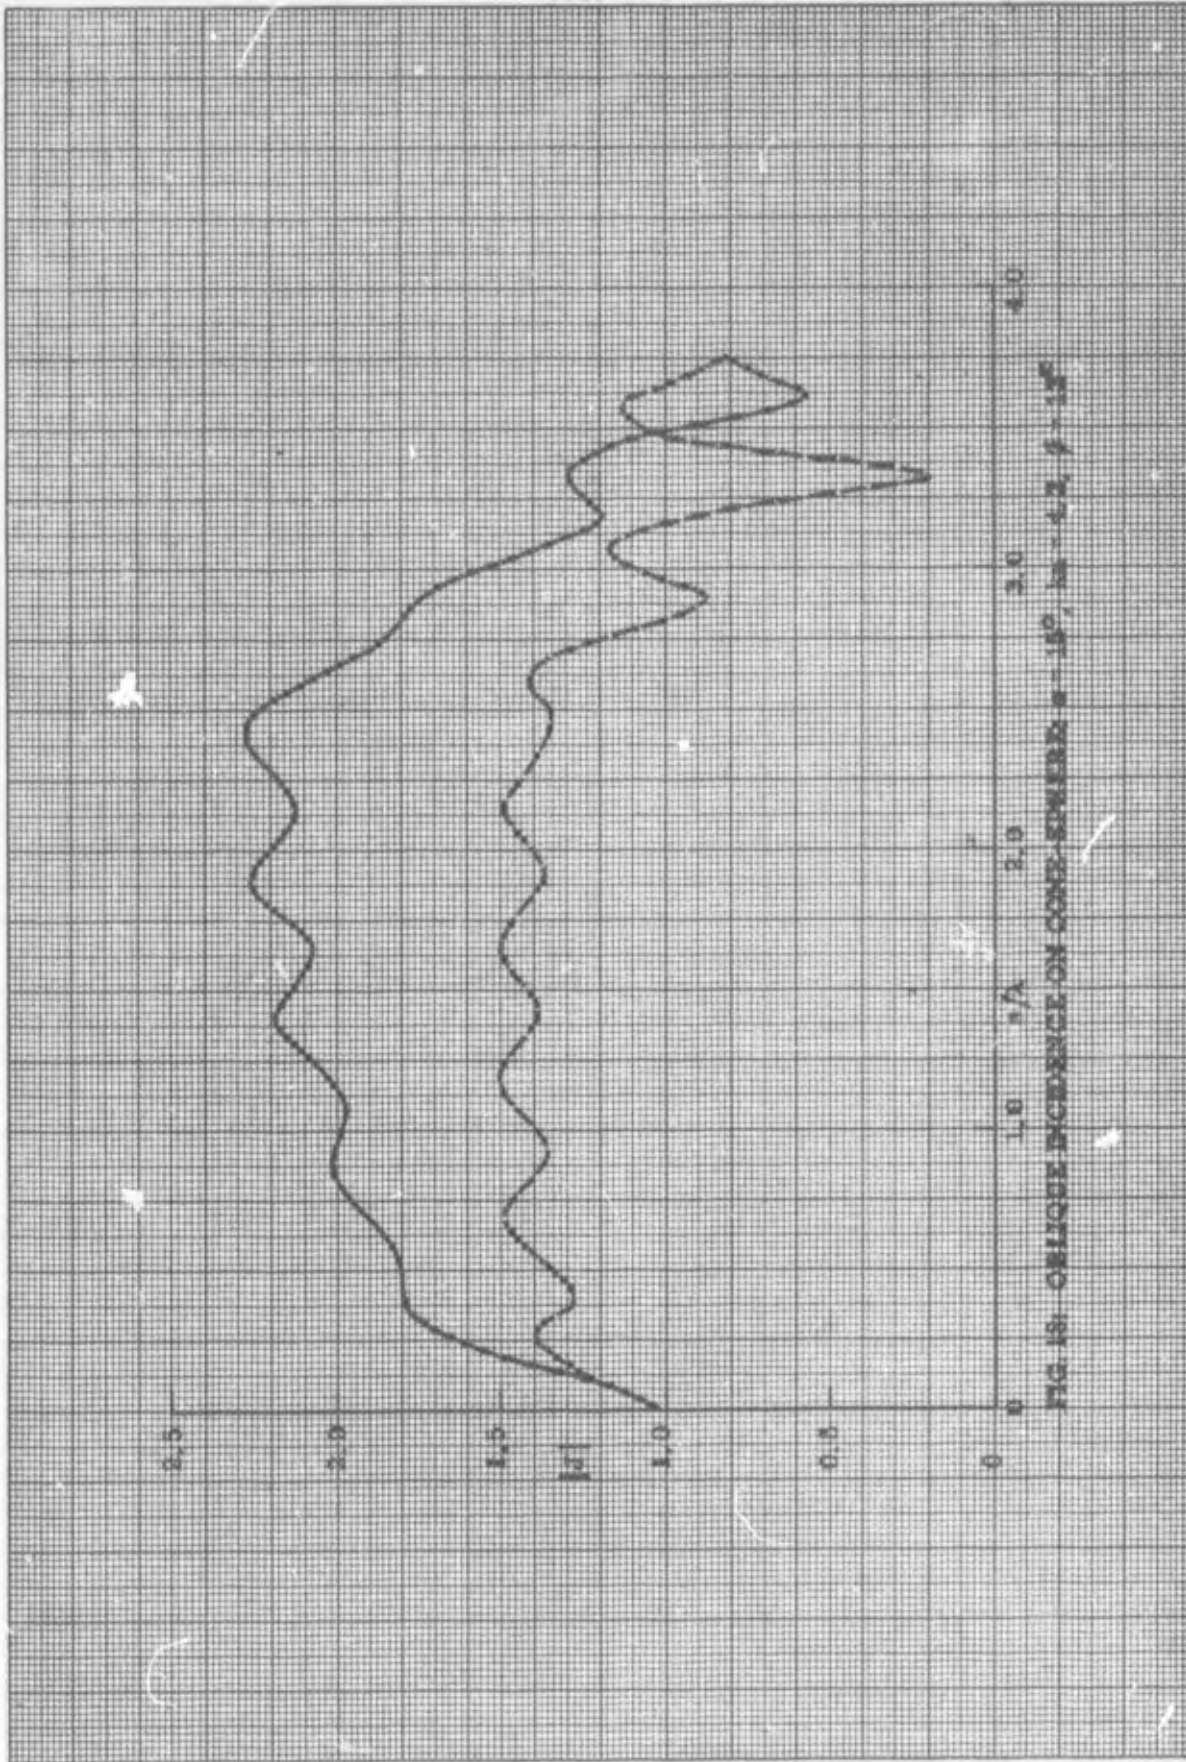
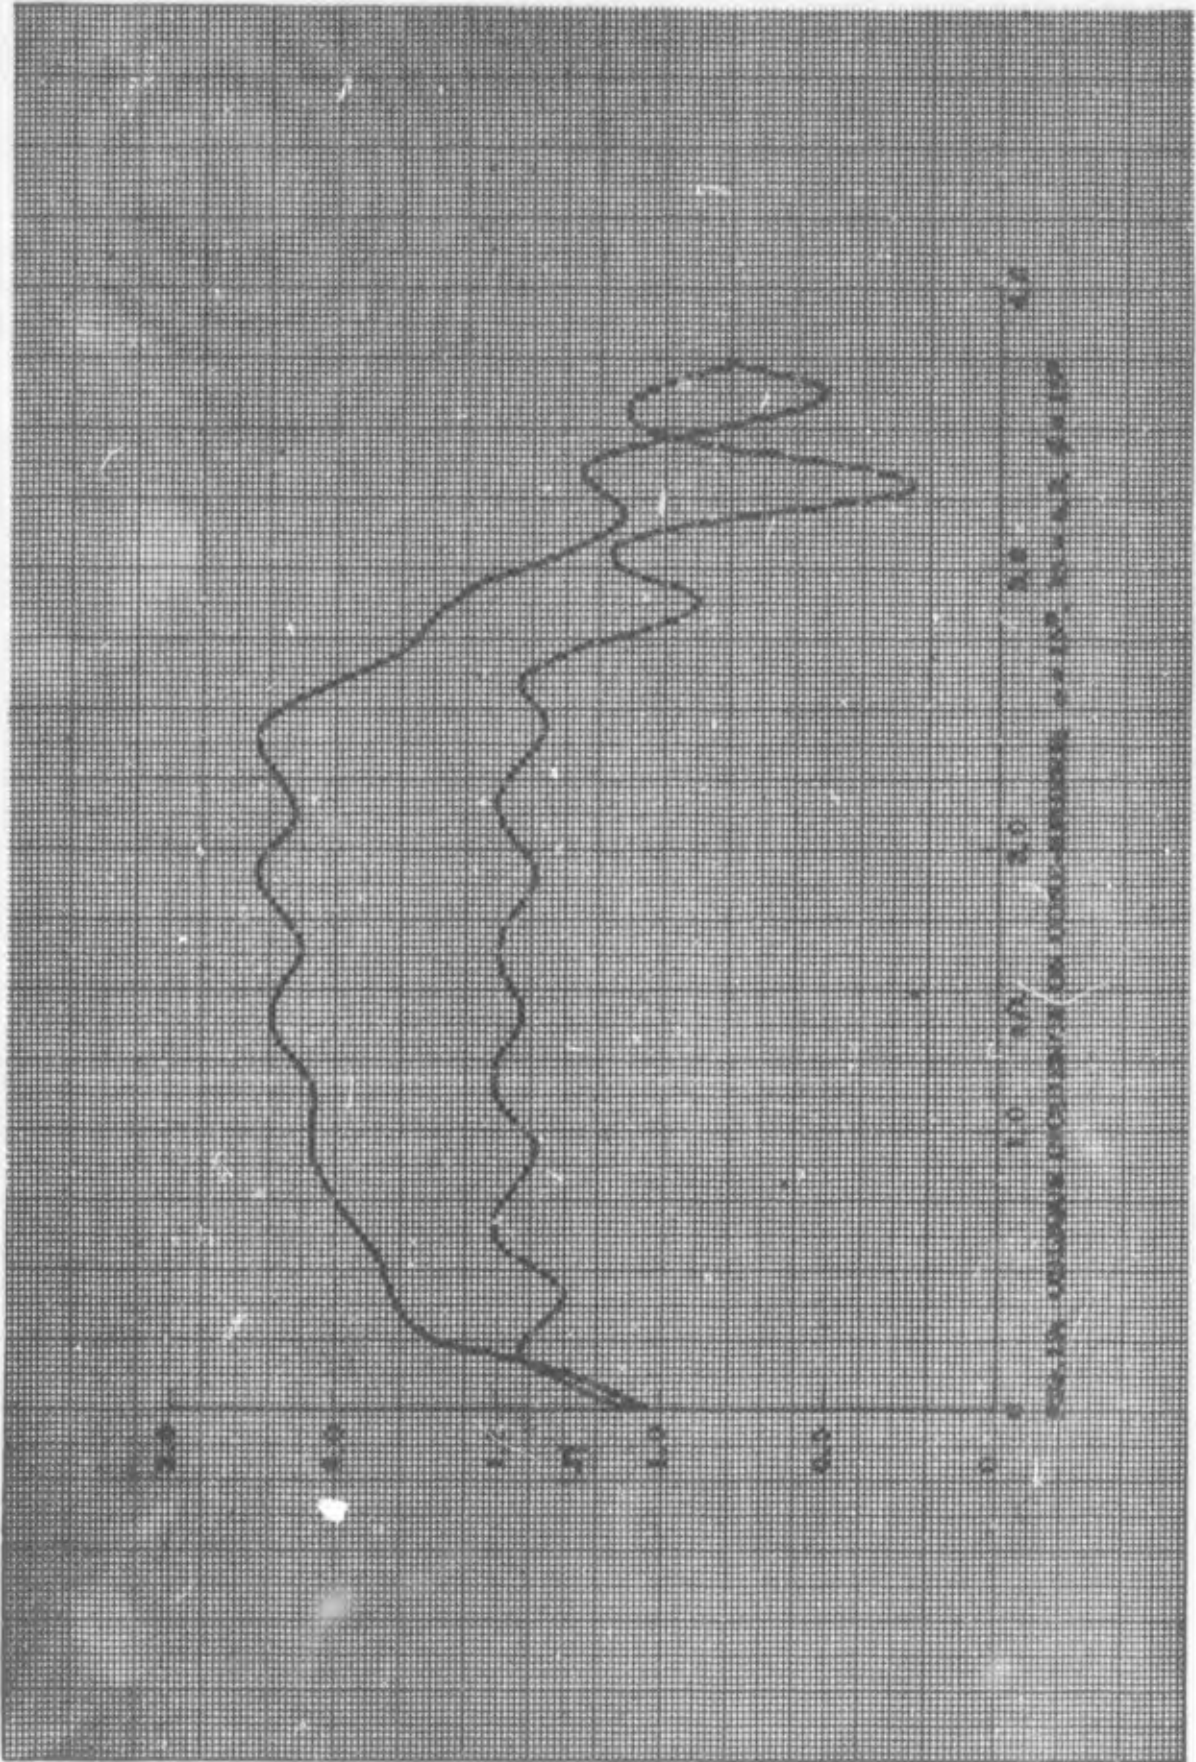


FIG. 17. OBLIQUE INCIDENCE ON CONE SPHERE; $\alpha = 5^\circ$, $\beta = 4.2$, $\mu = 1.2$





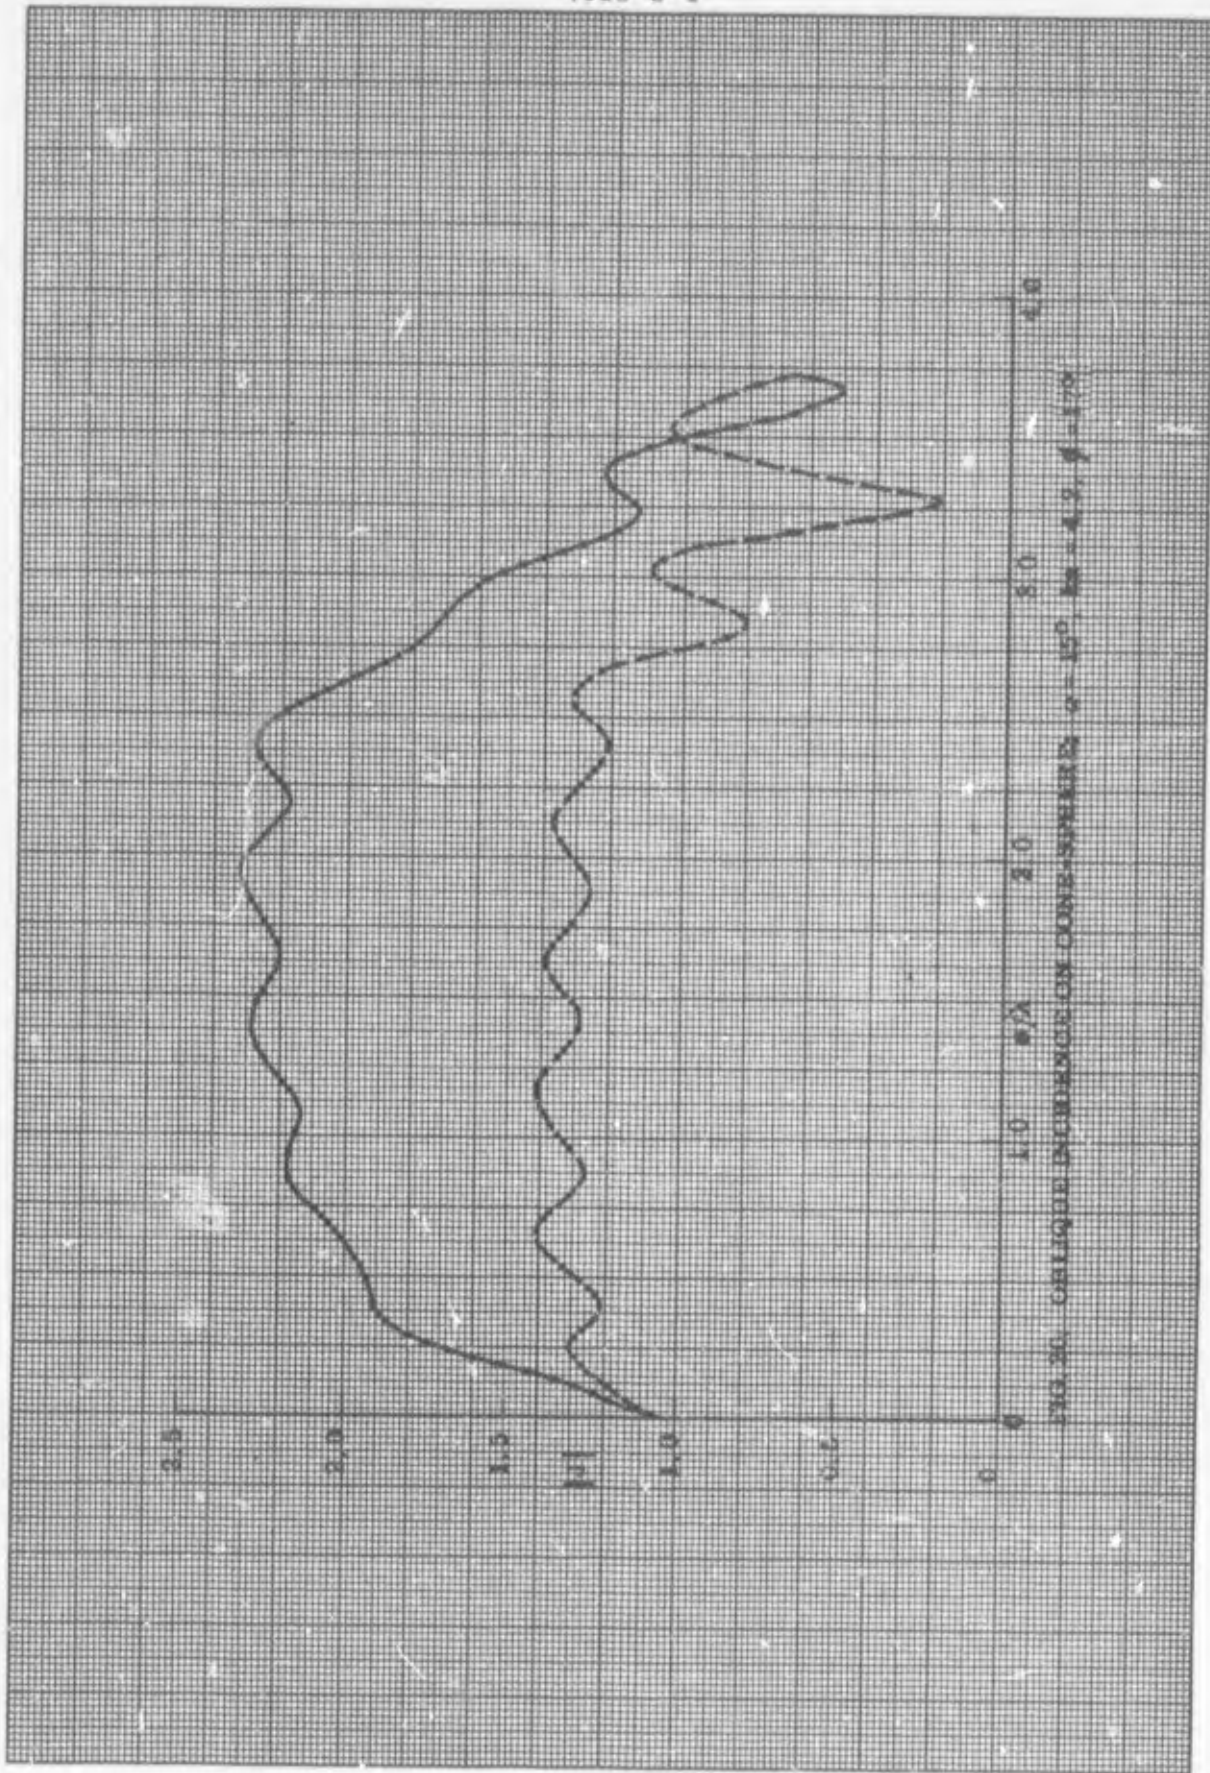
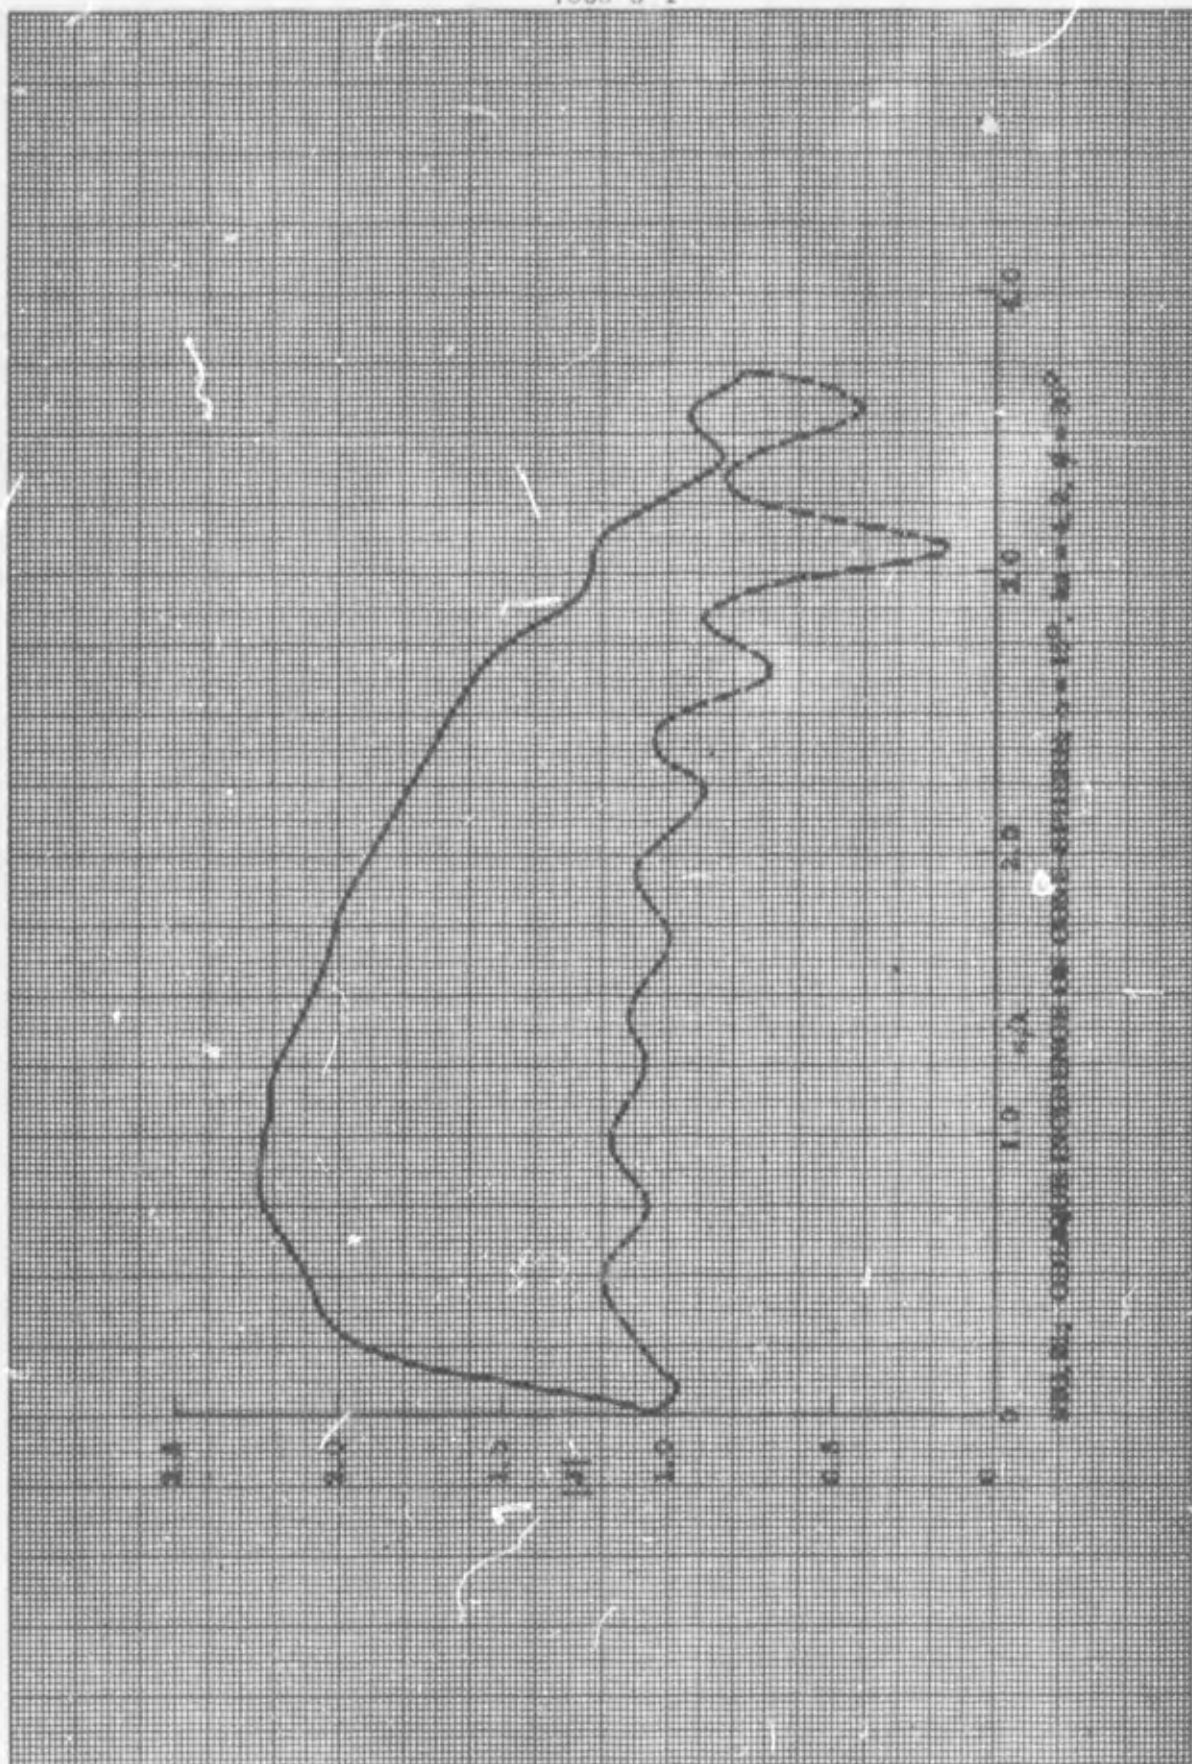
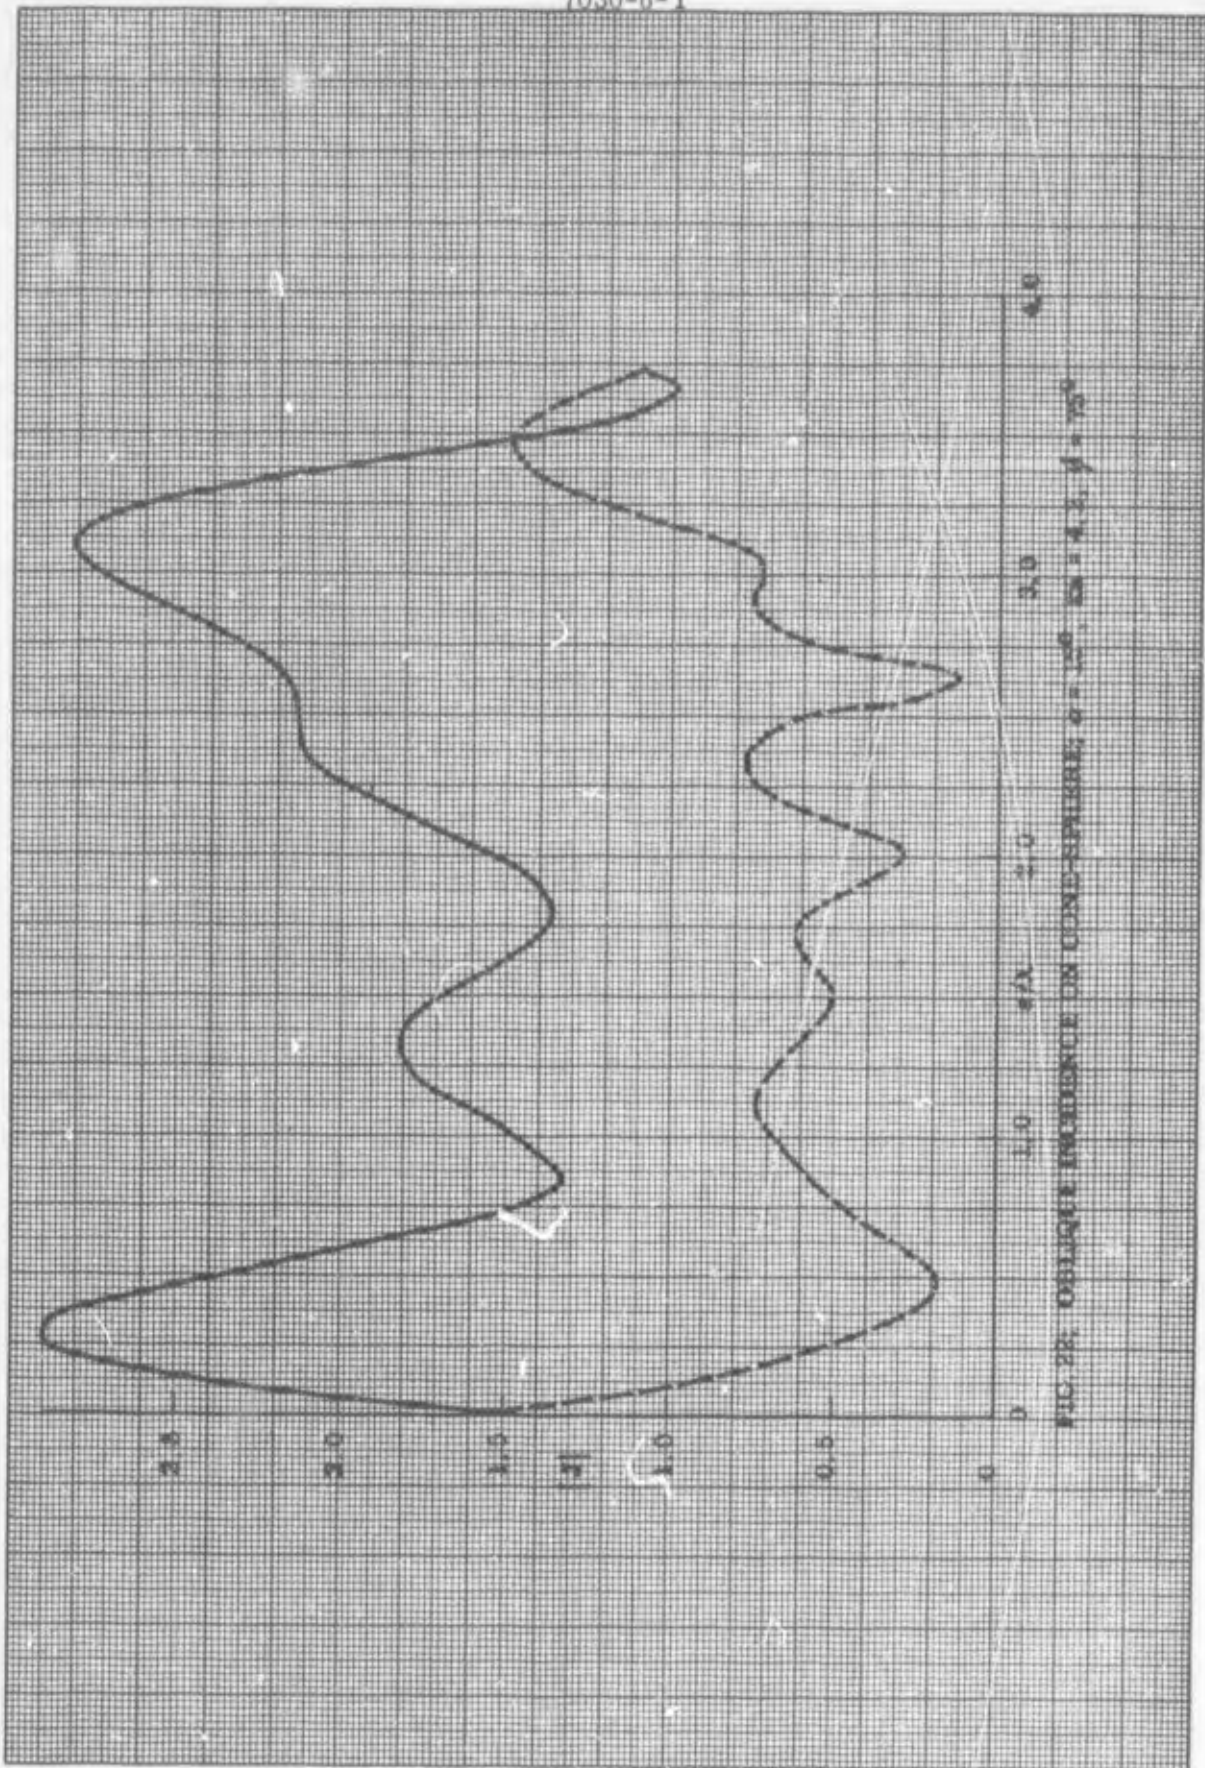
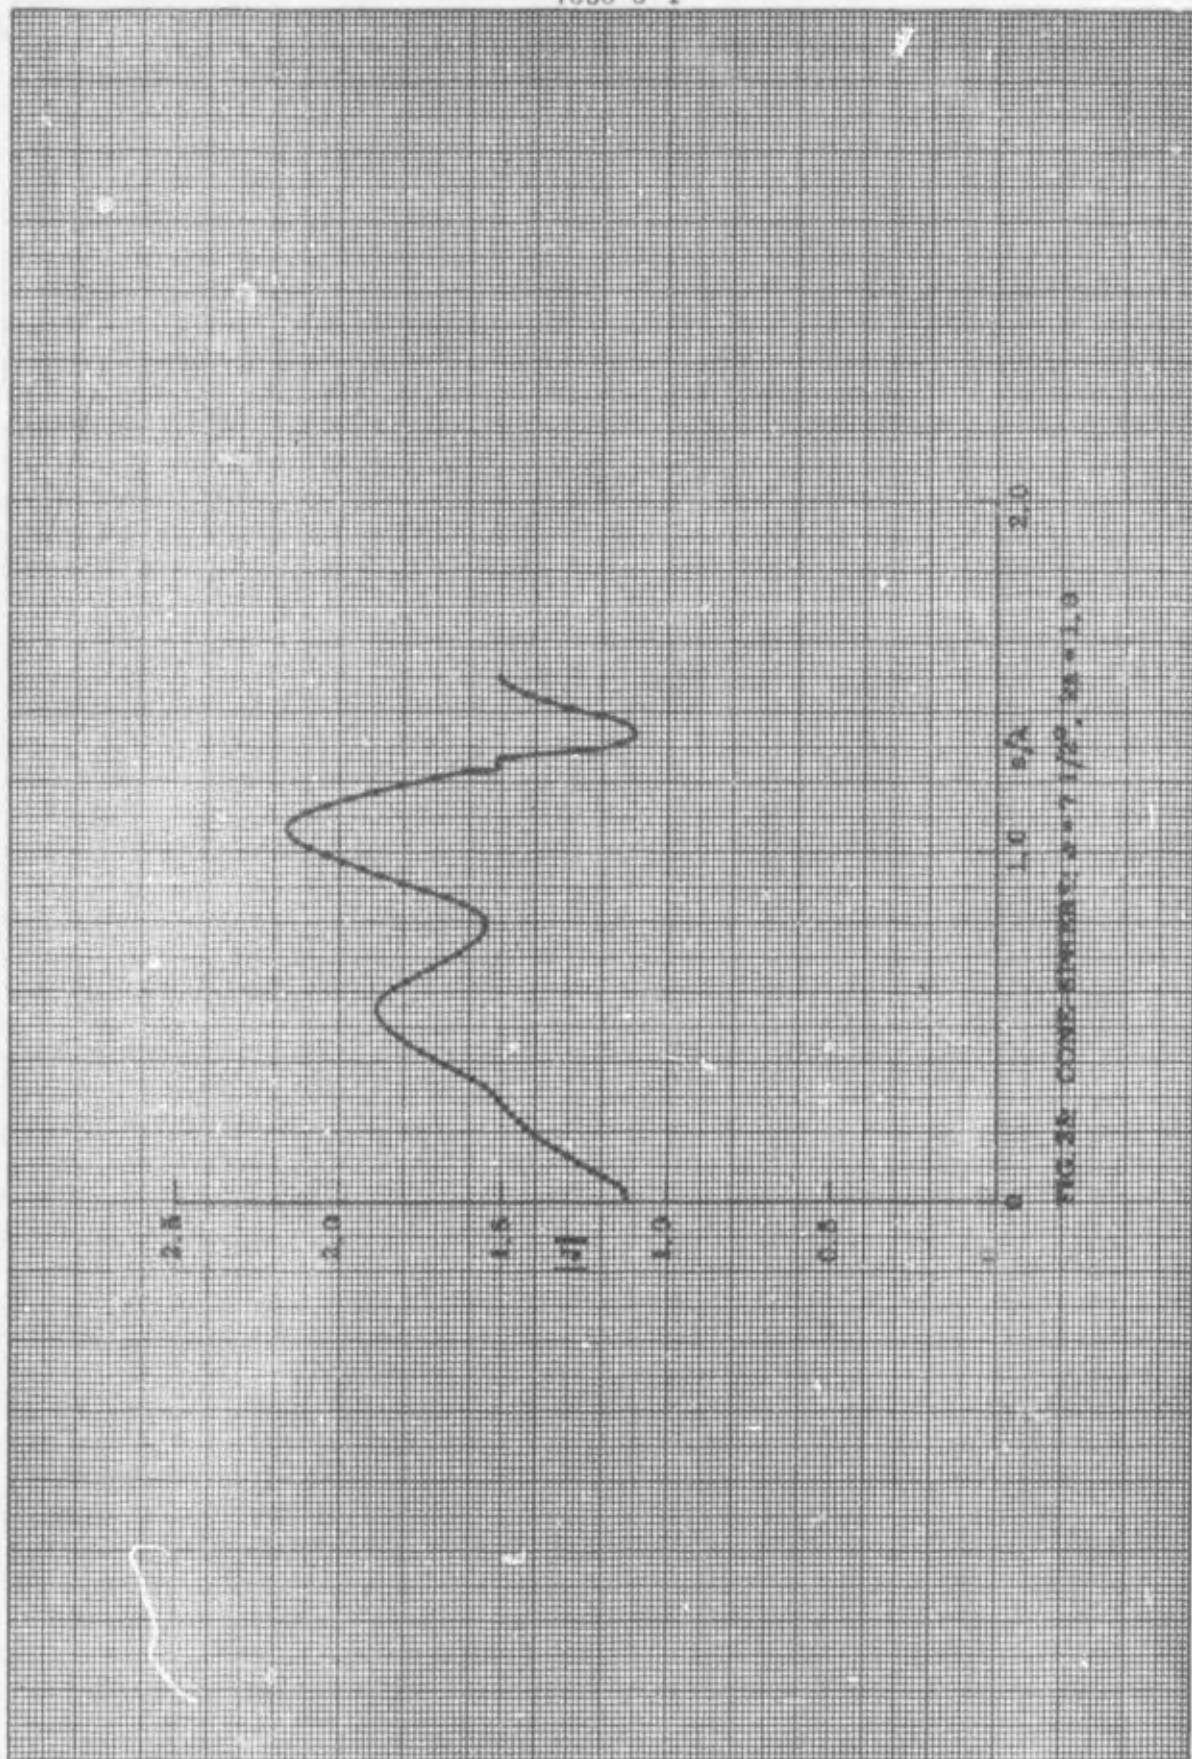
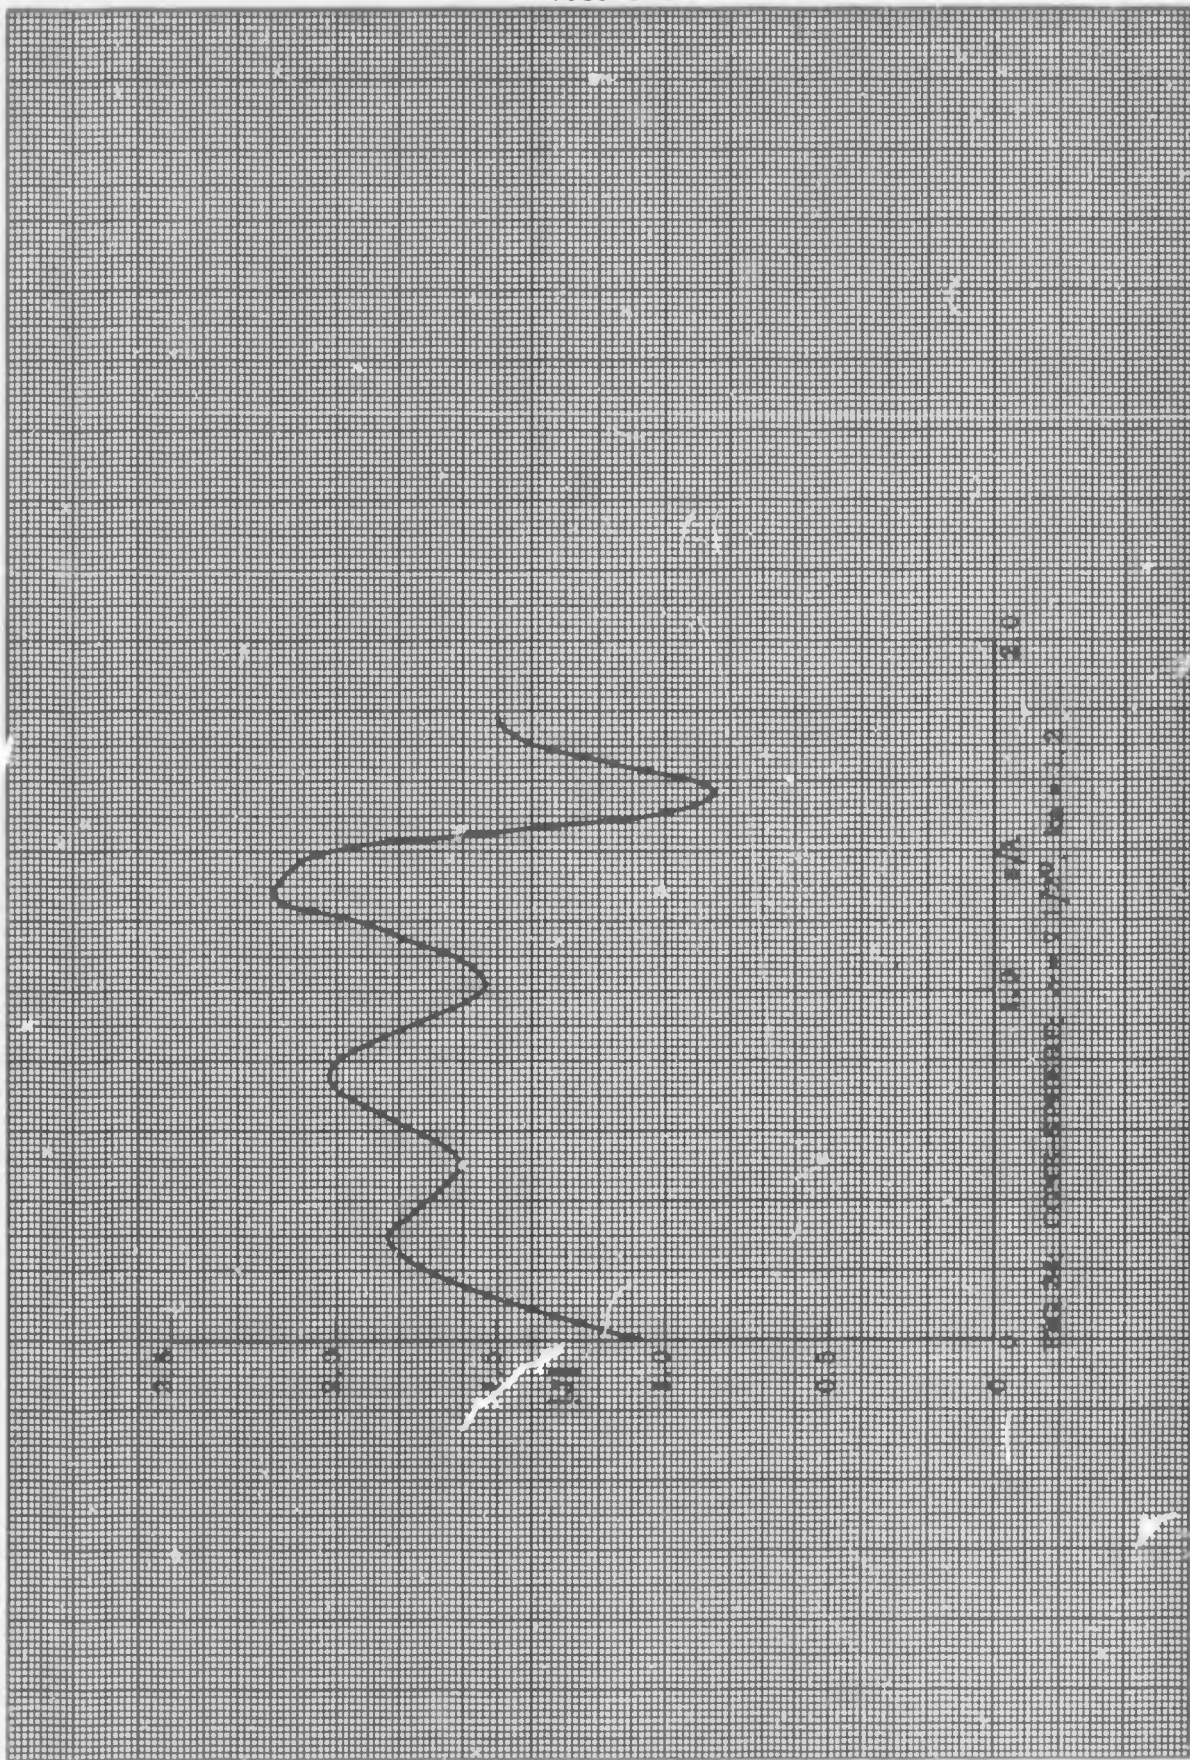



FIG. 30. CHANGE IN RESISTANCE ON CONE SPEEDS. $\sigma = 150$, $\mu = 4.2$, $\rho = 1.0$









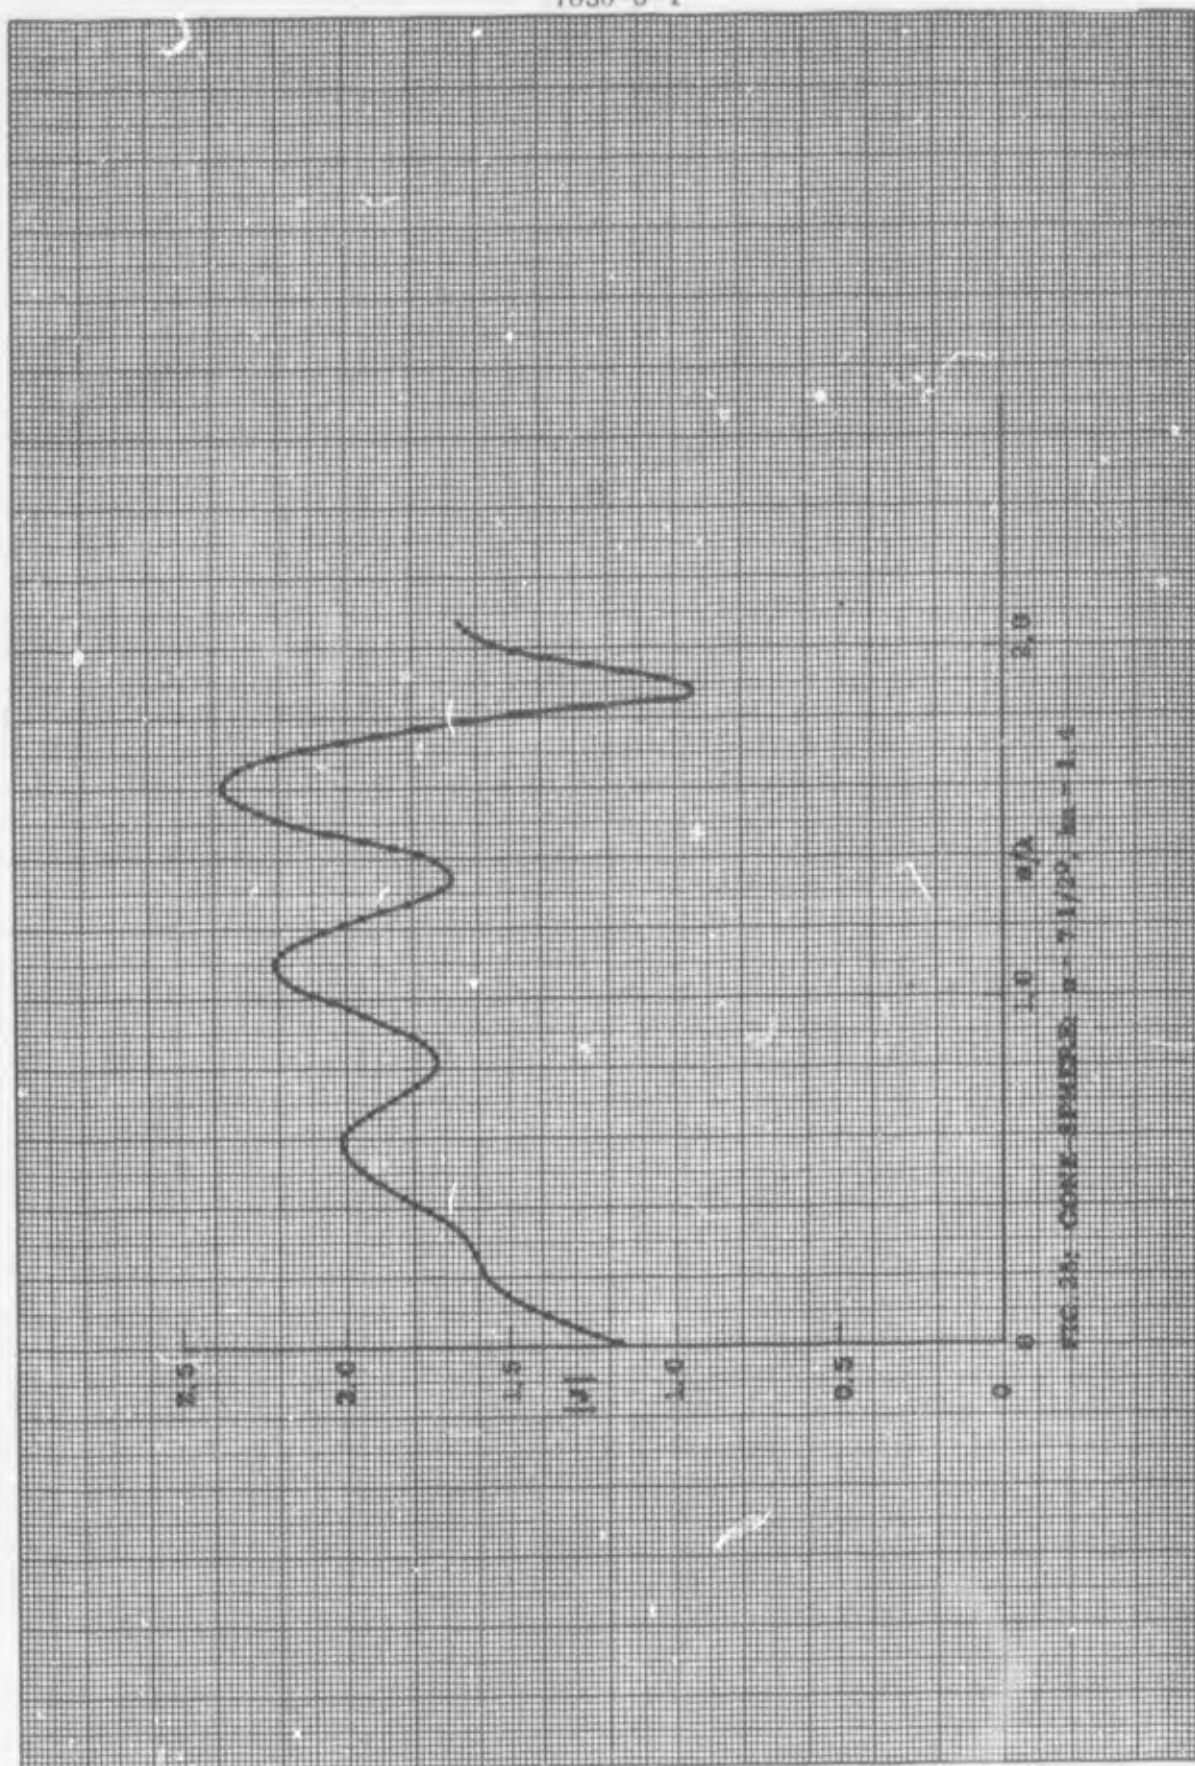

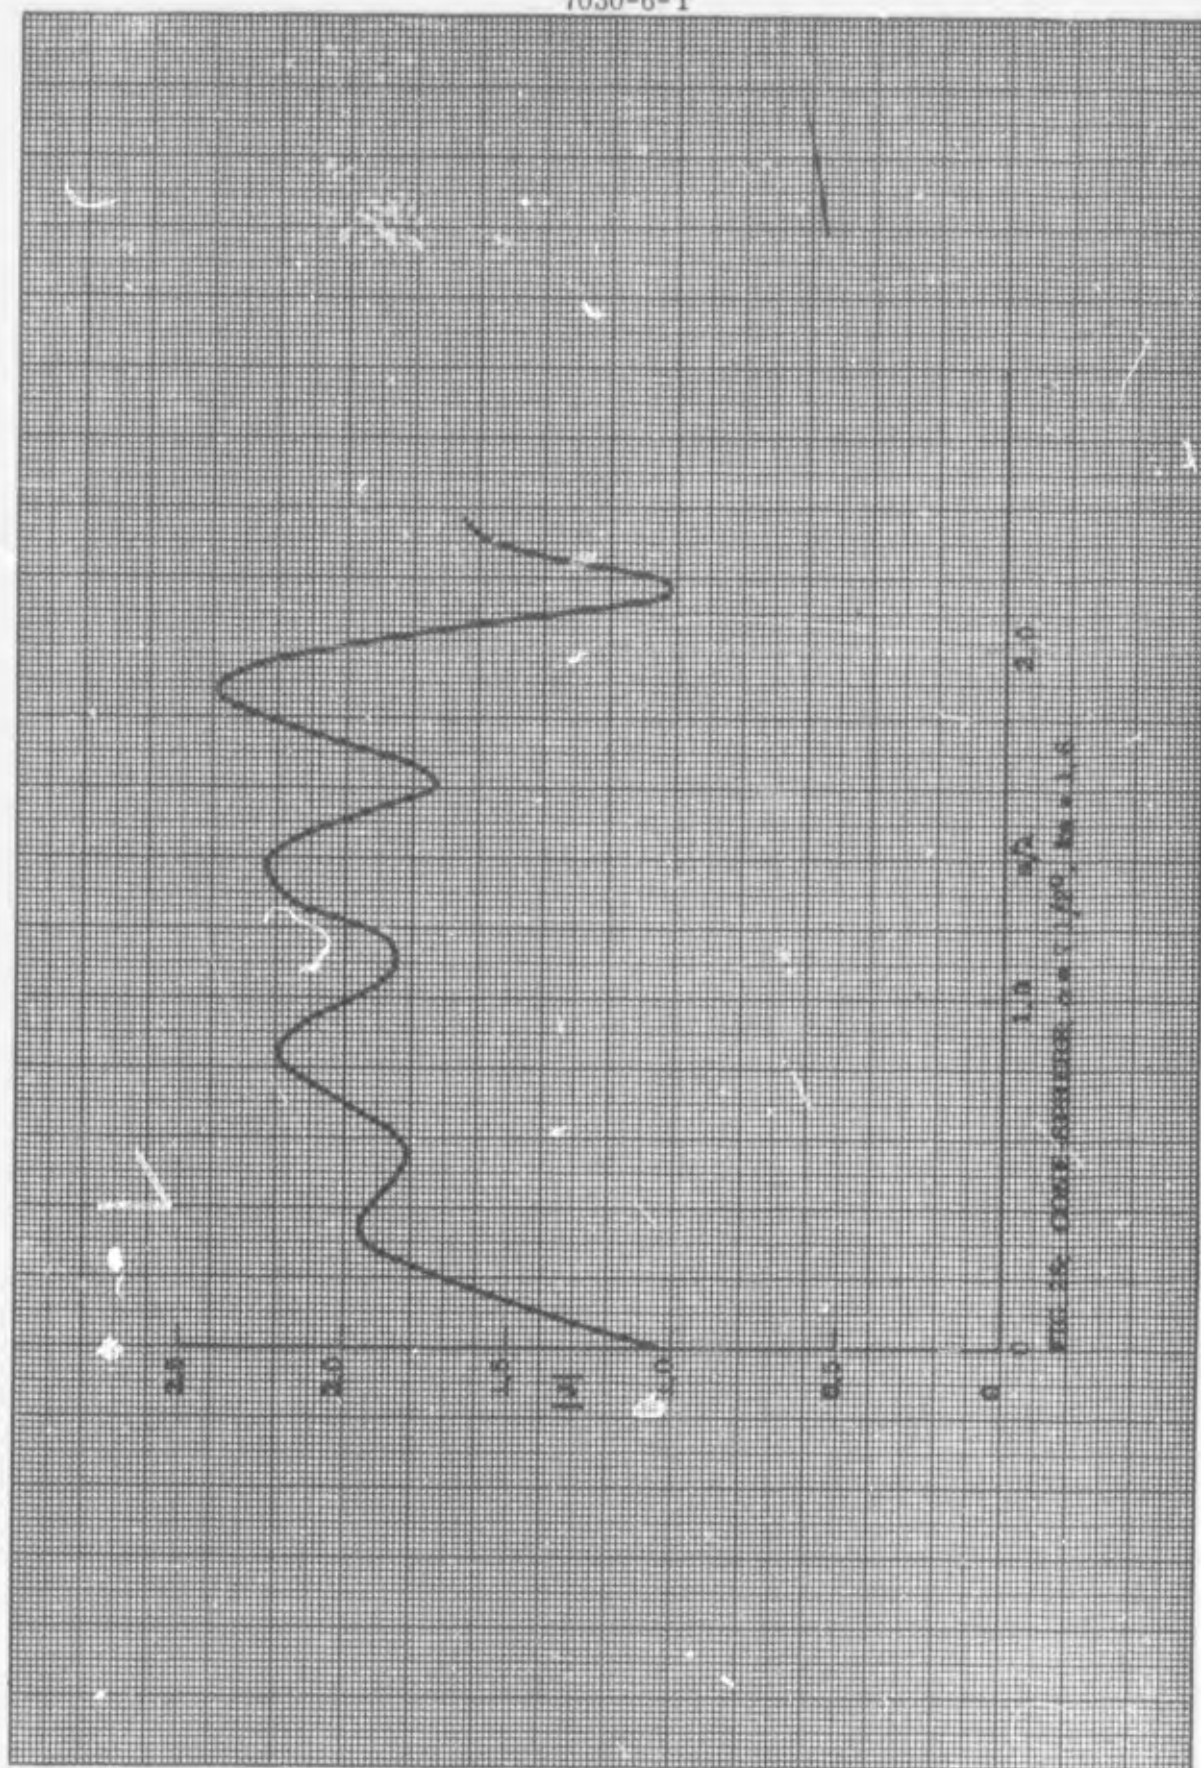
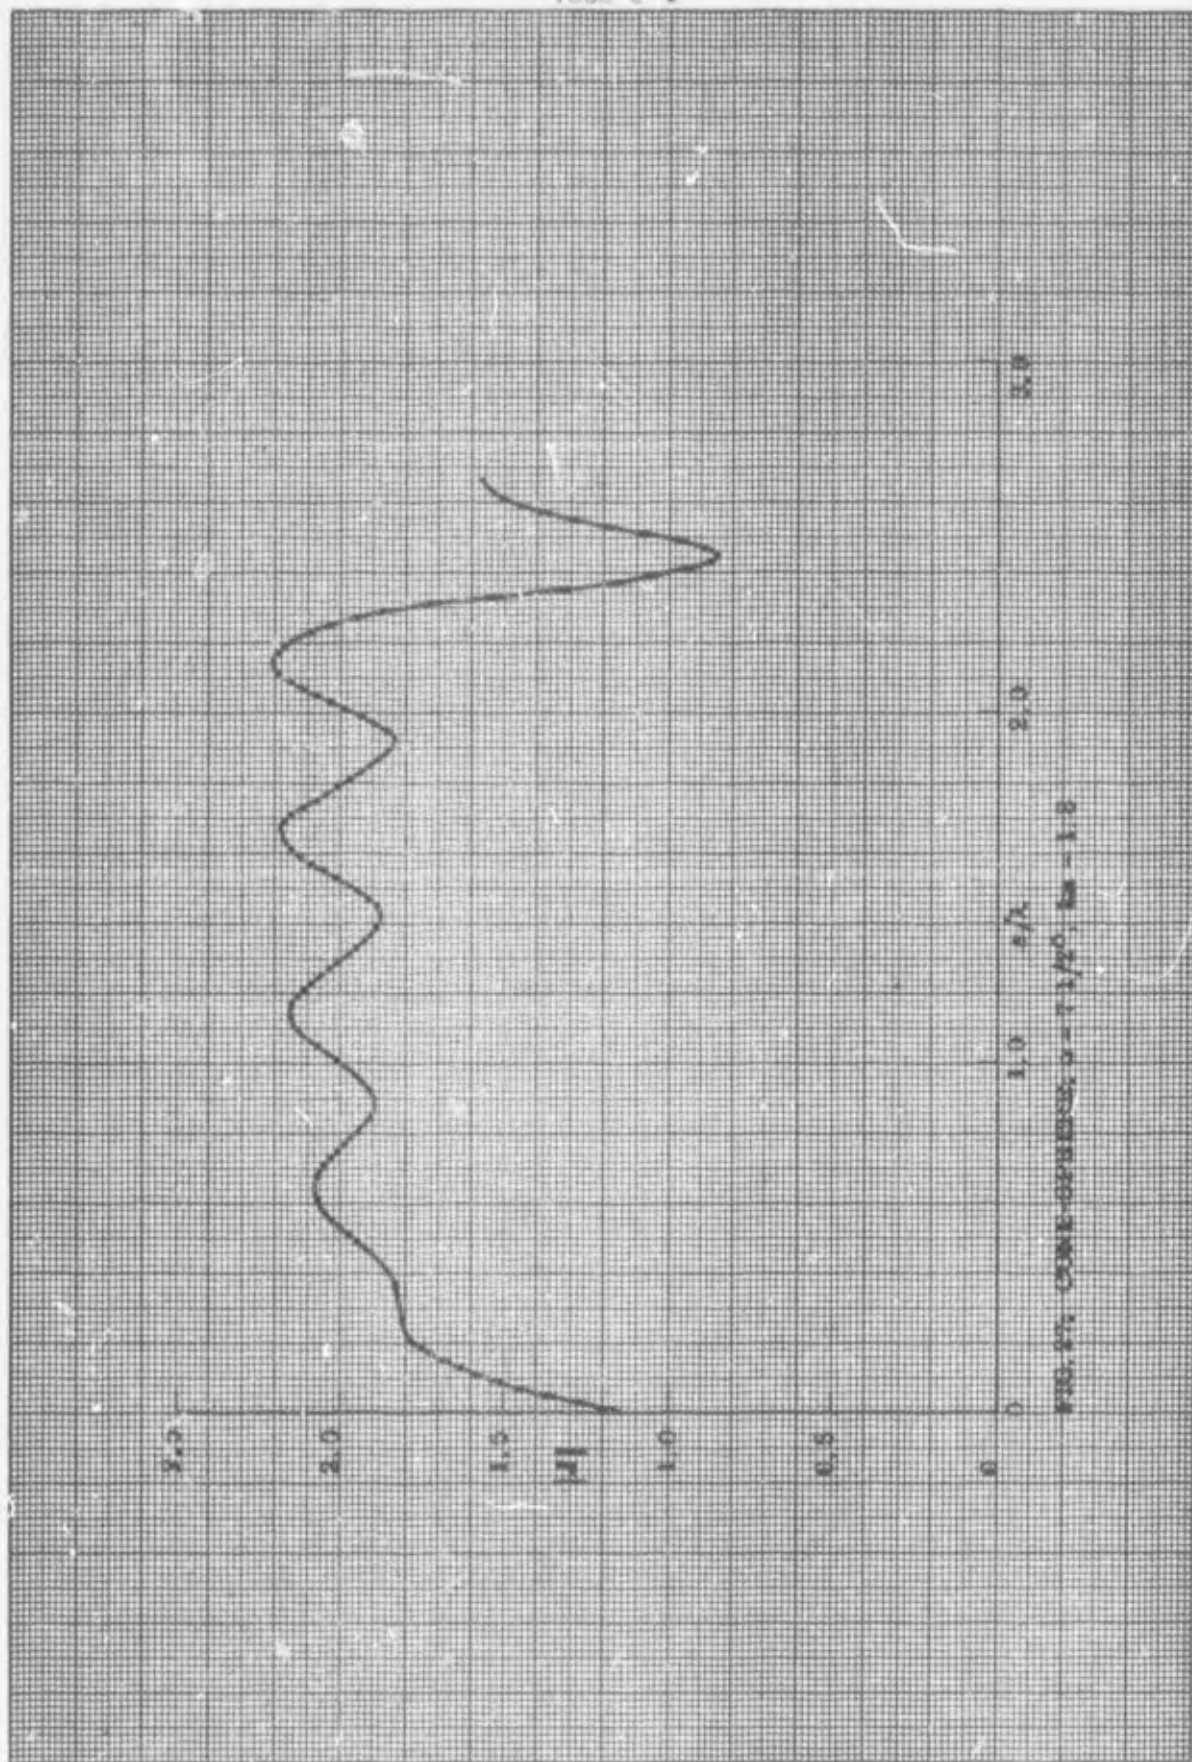
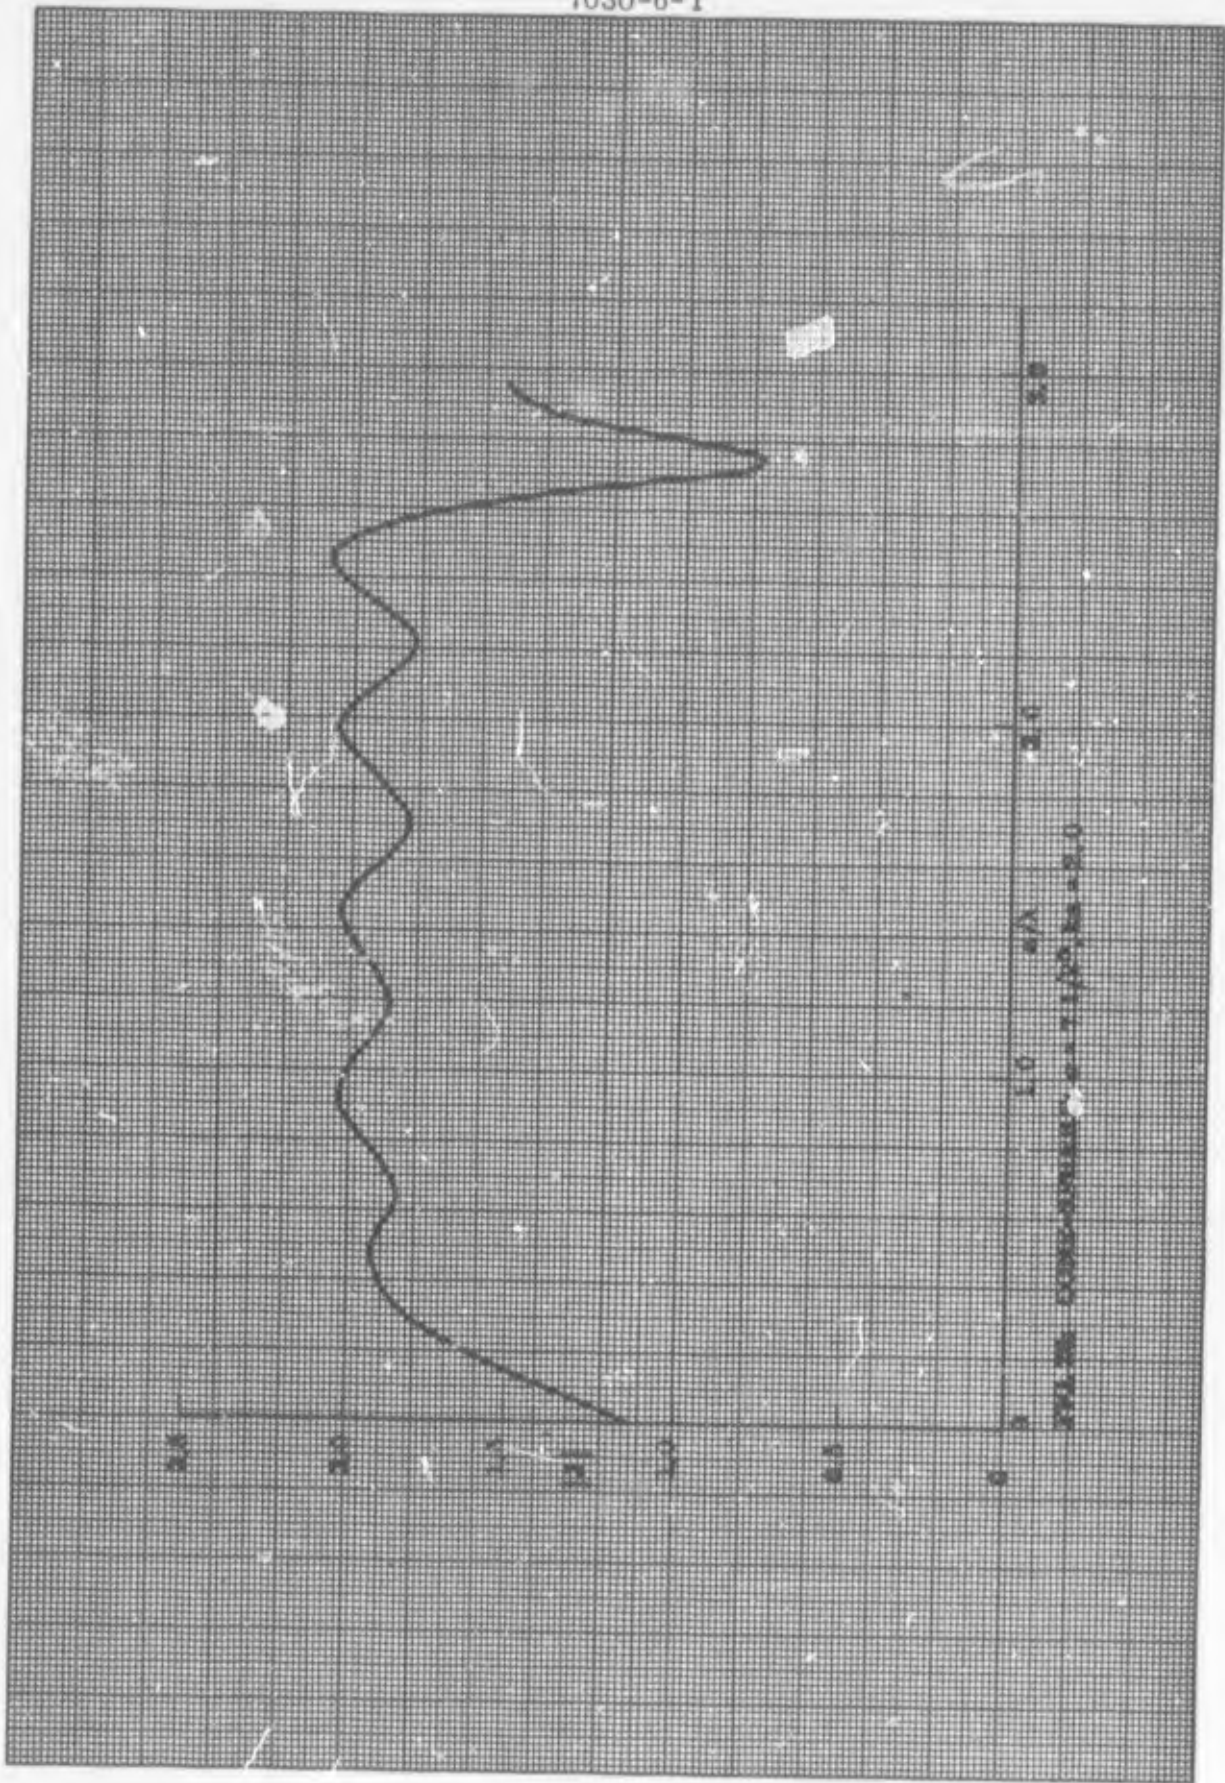
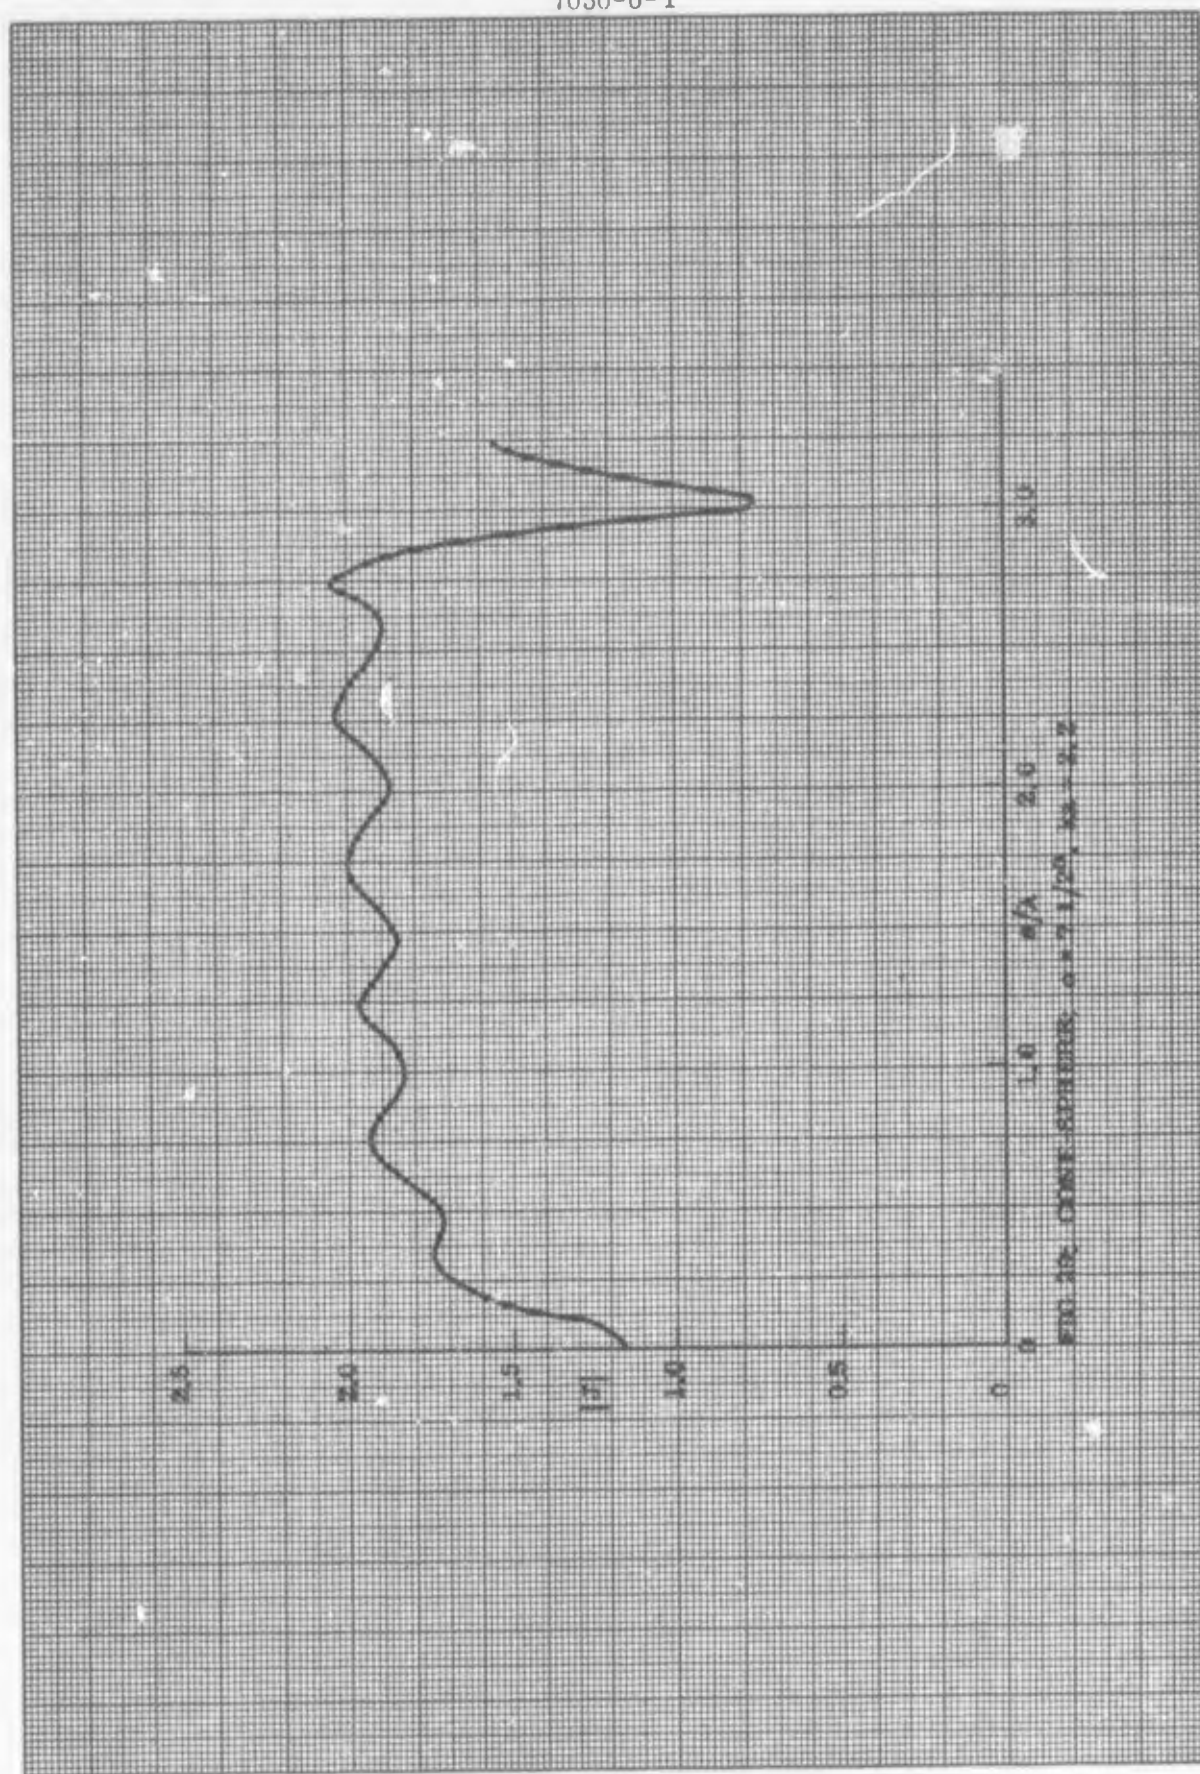
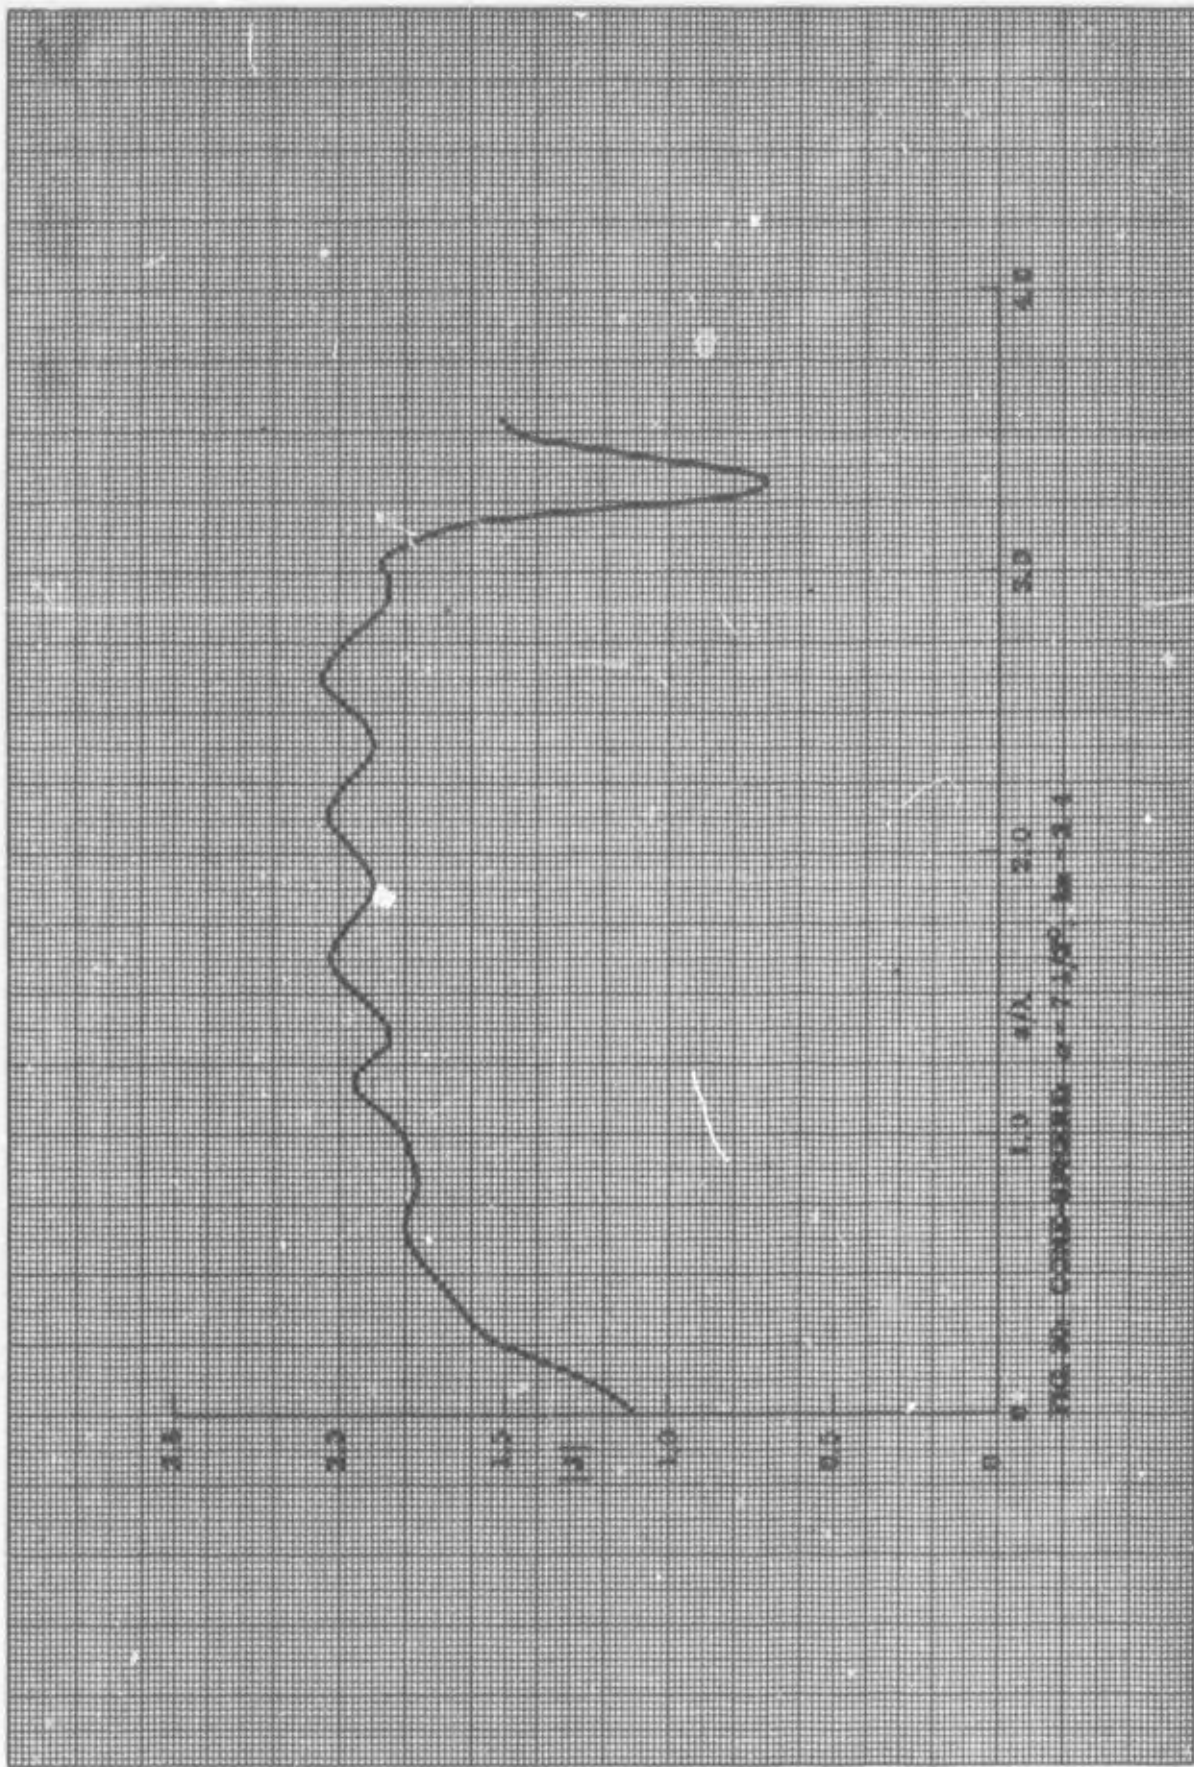



FIG. 26. OXIDE RESISTANCE vs. LIGHT, Run # 1.6











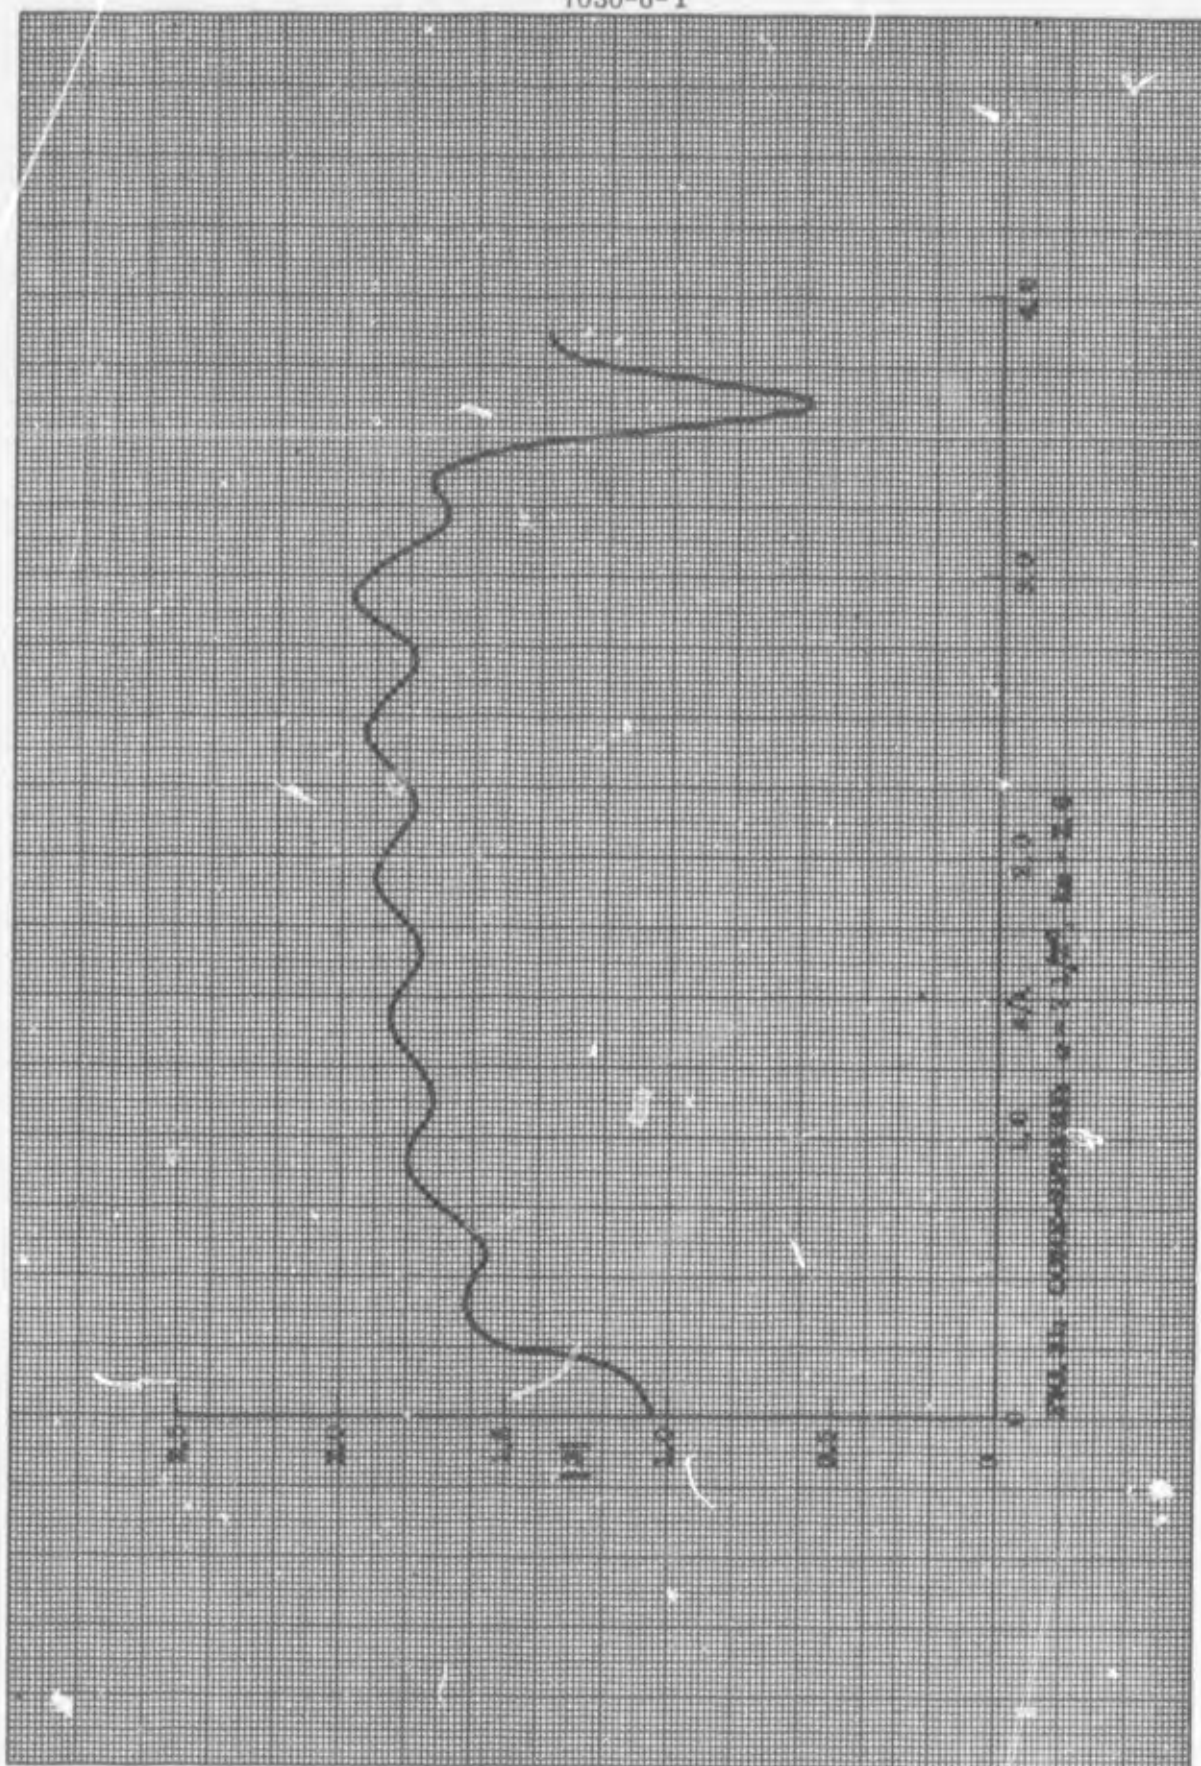

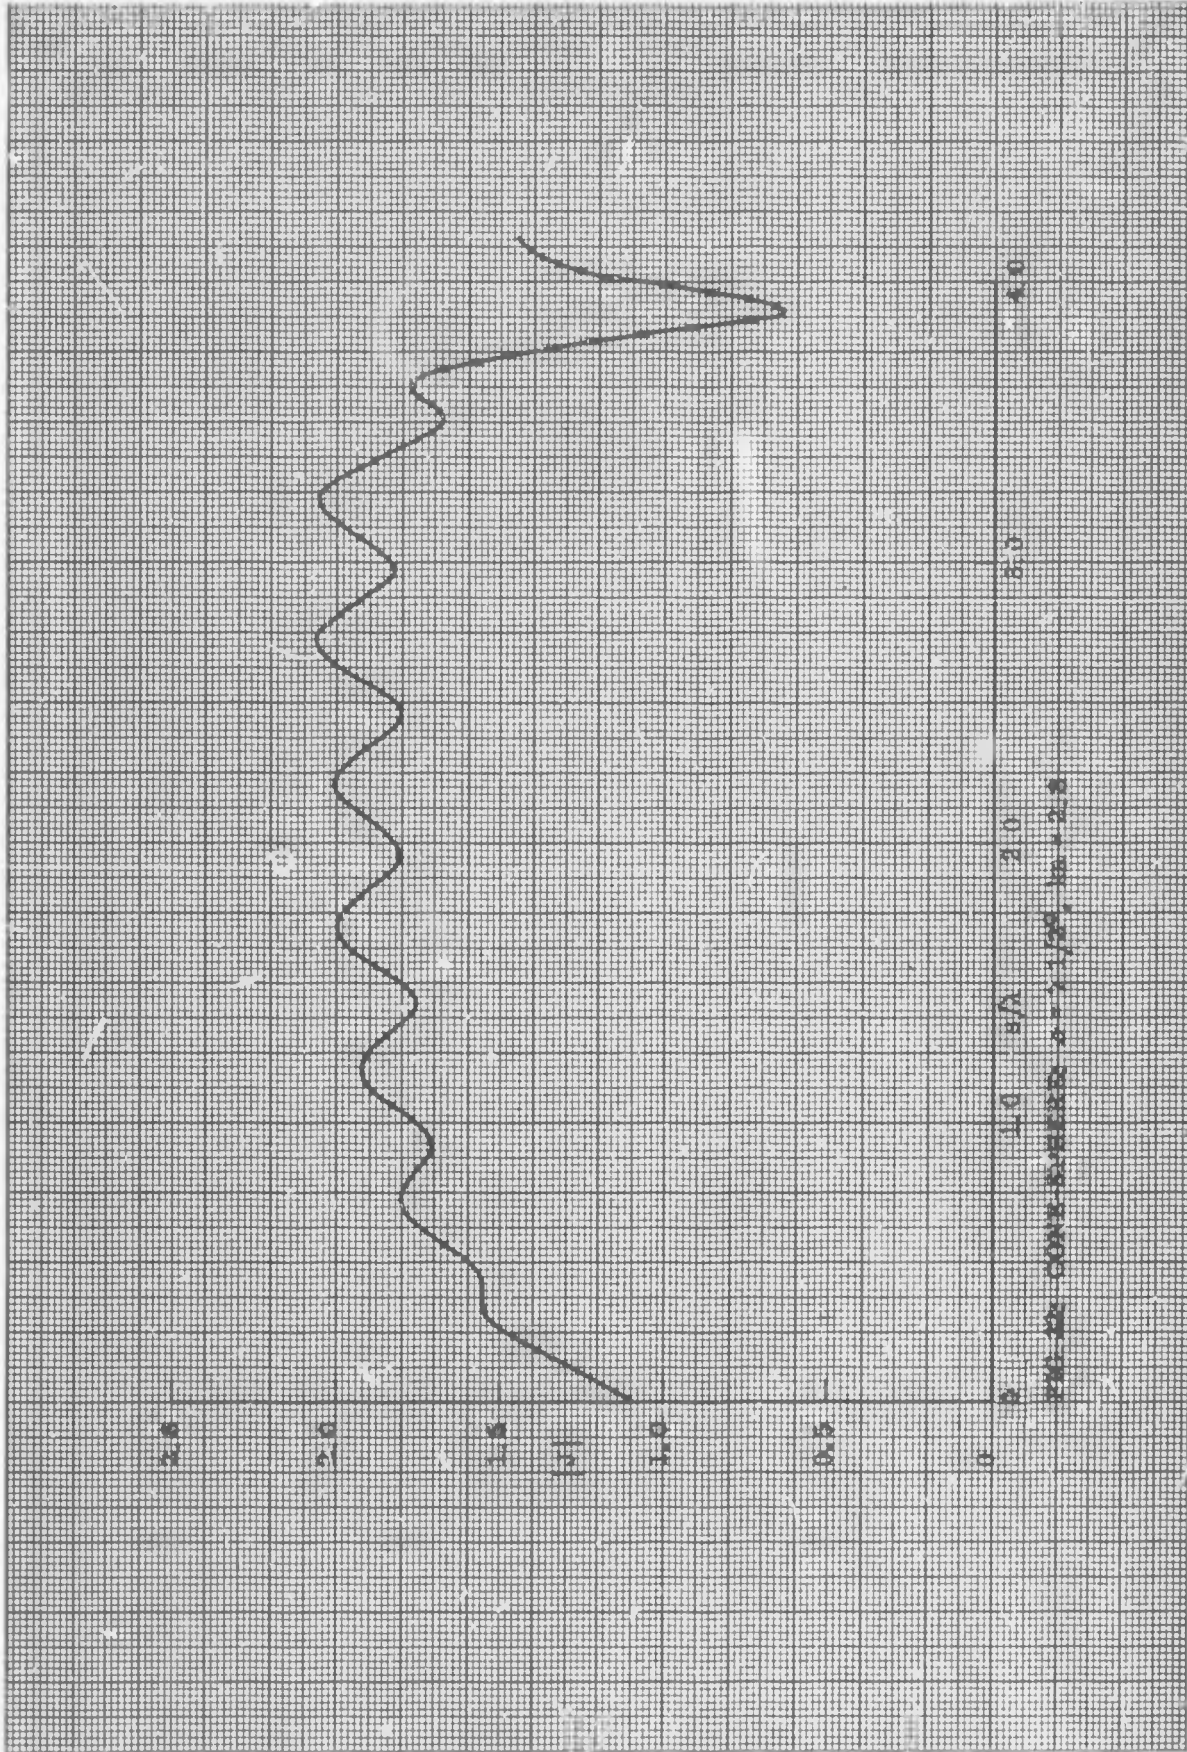

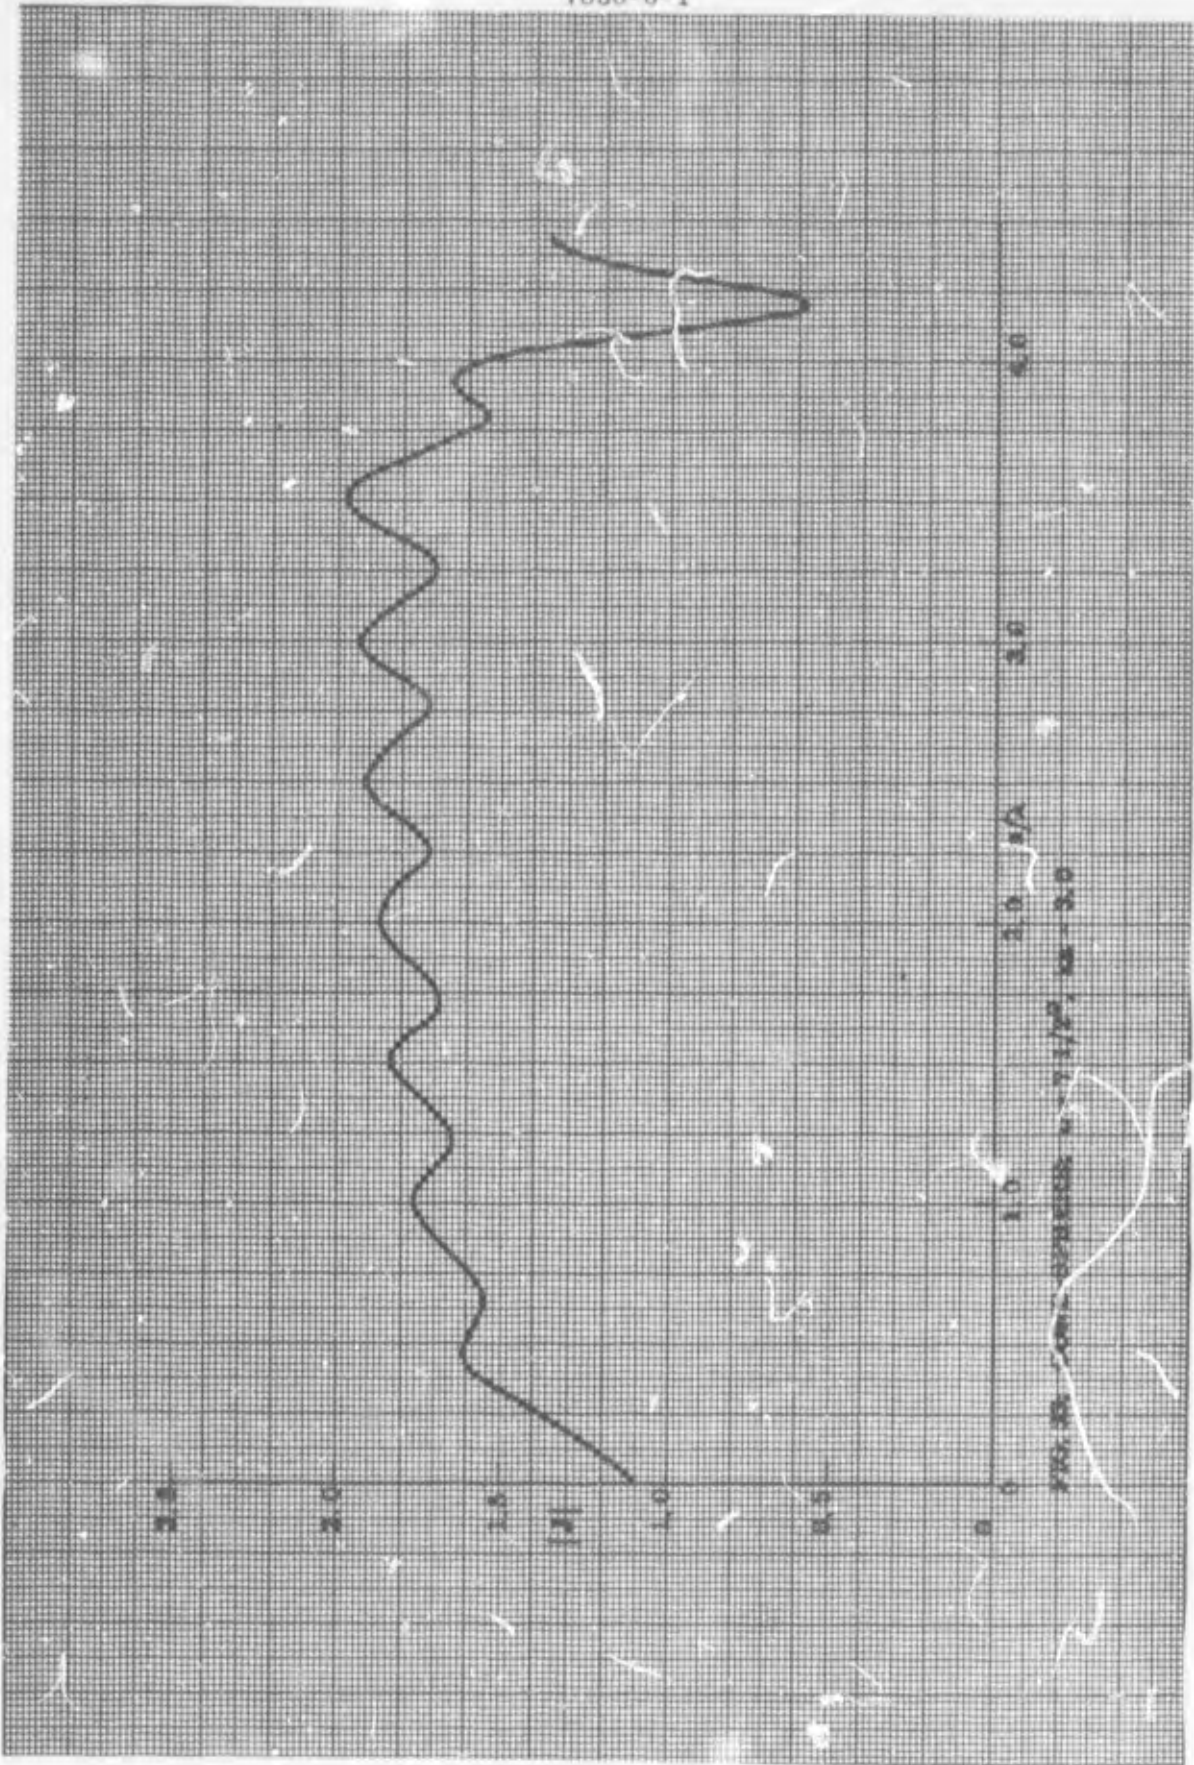

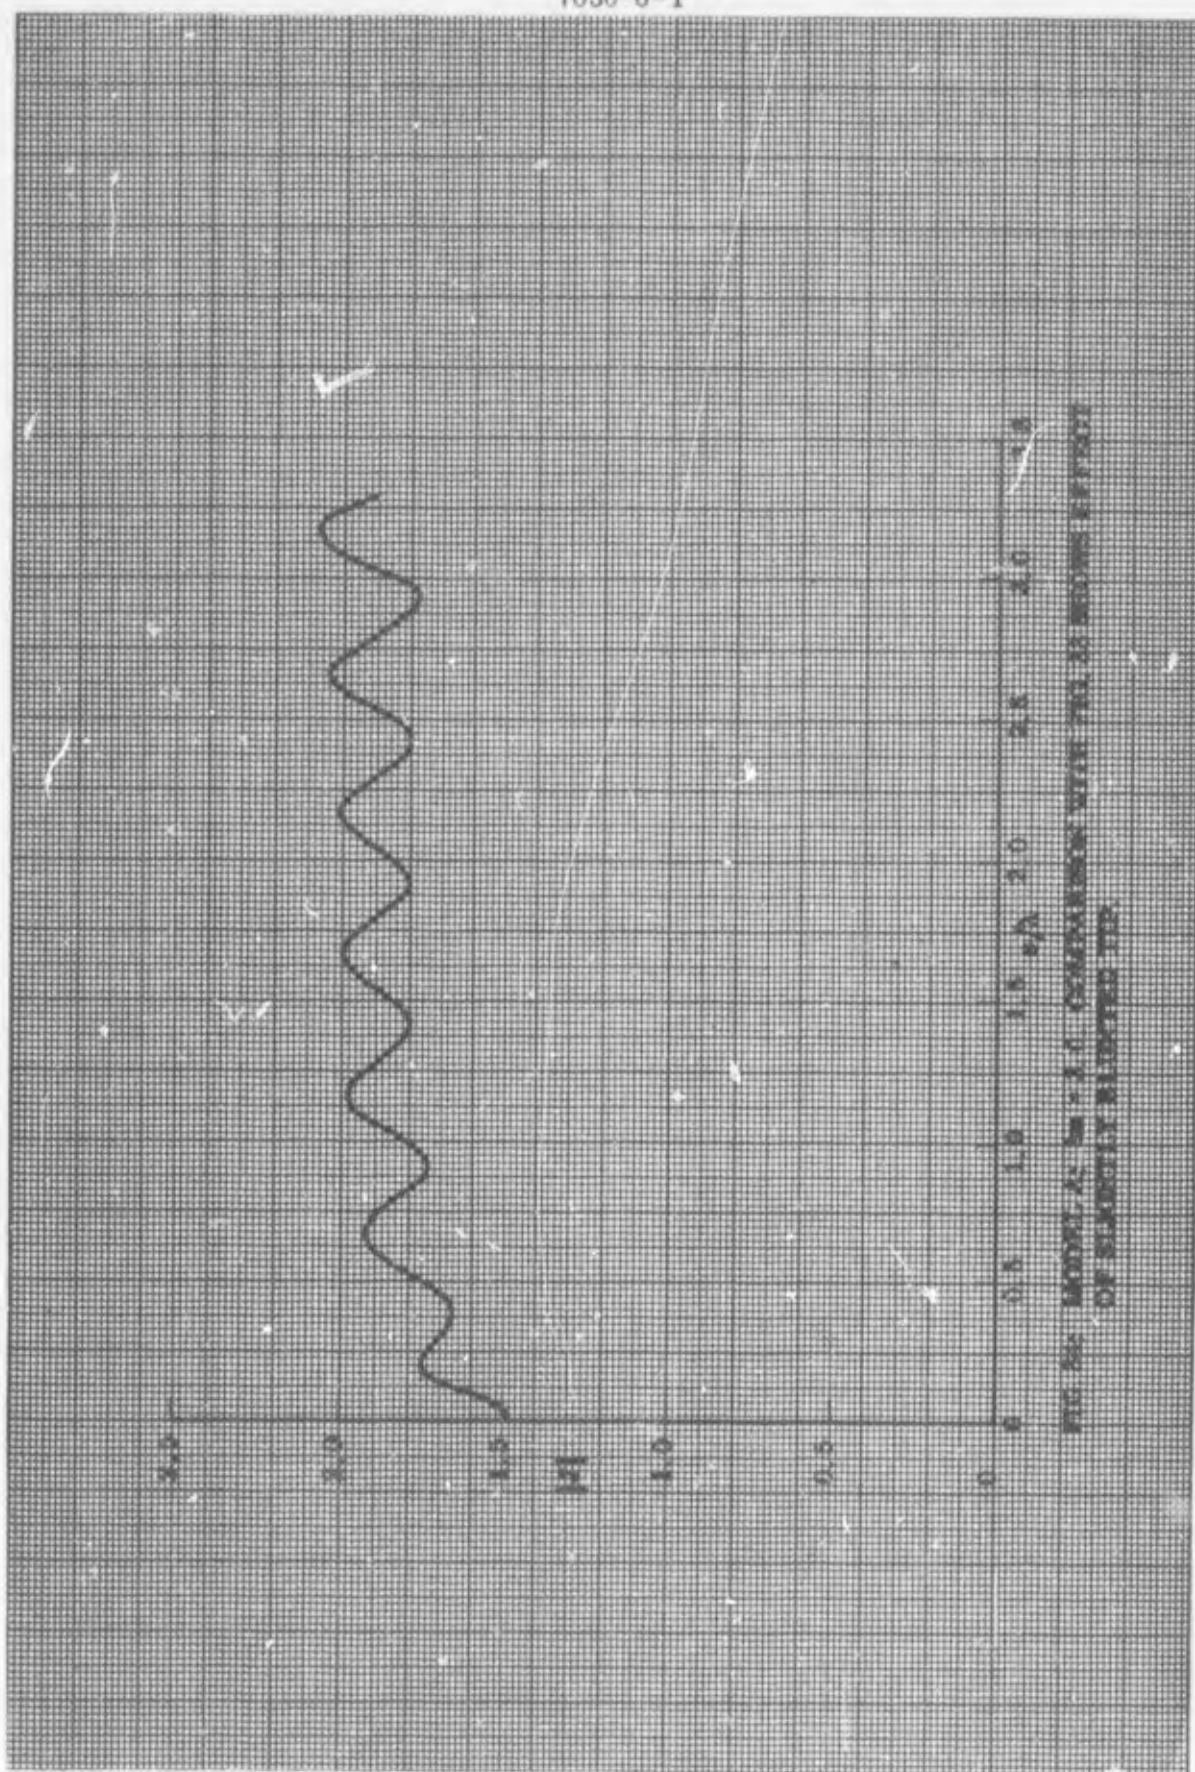
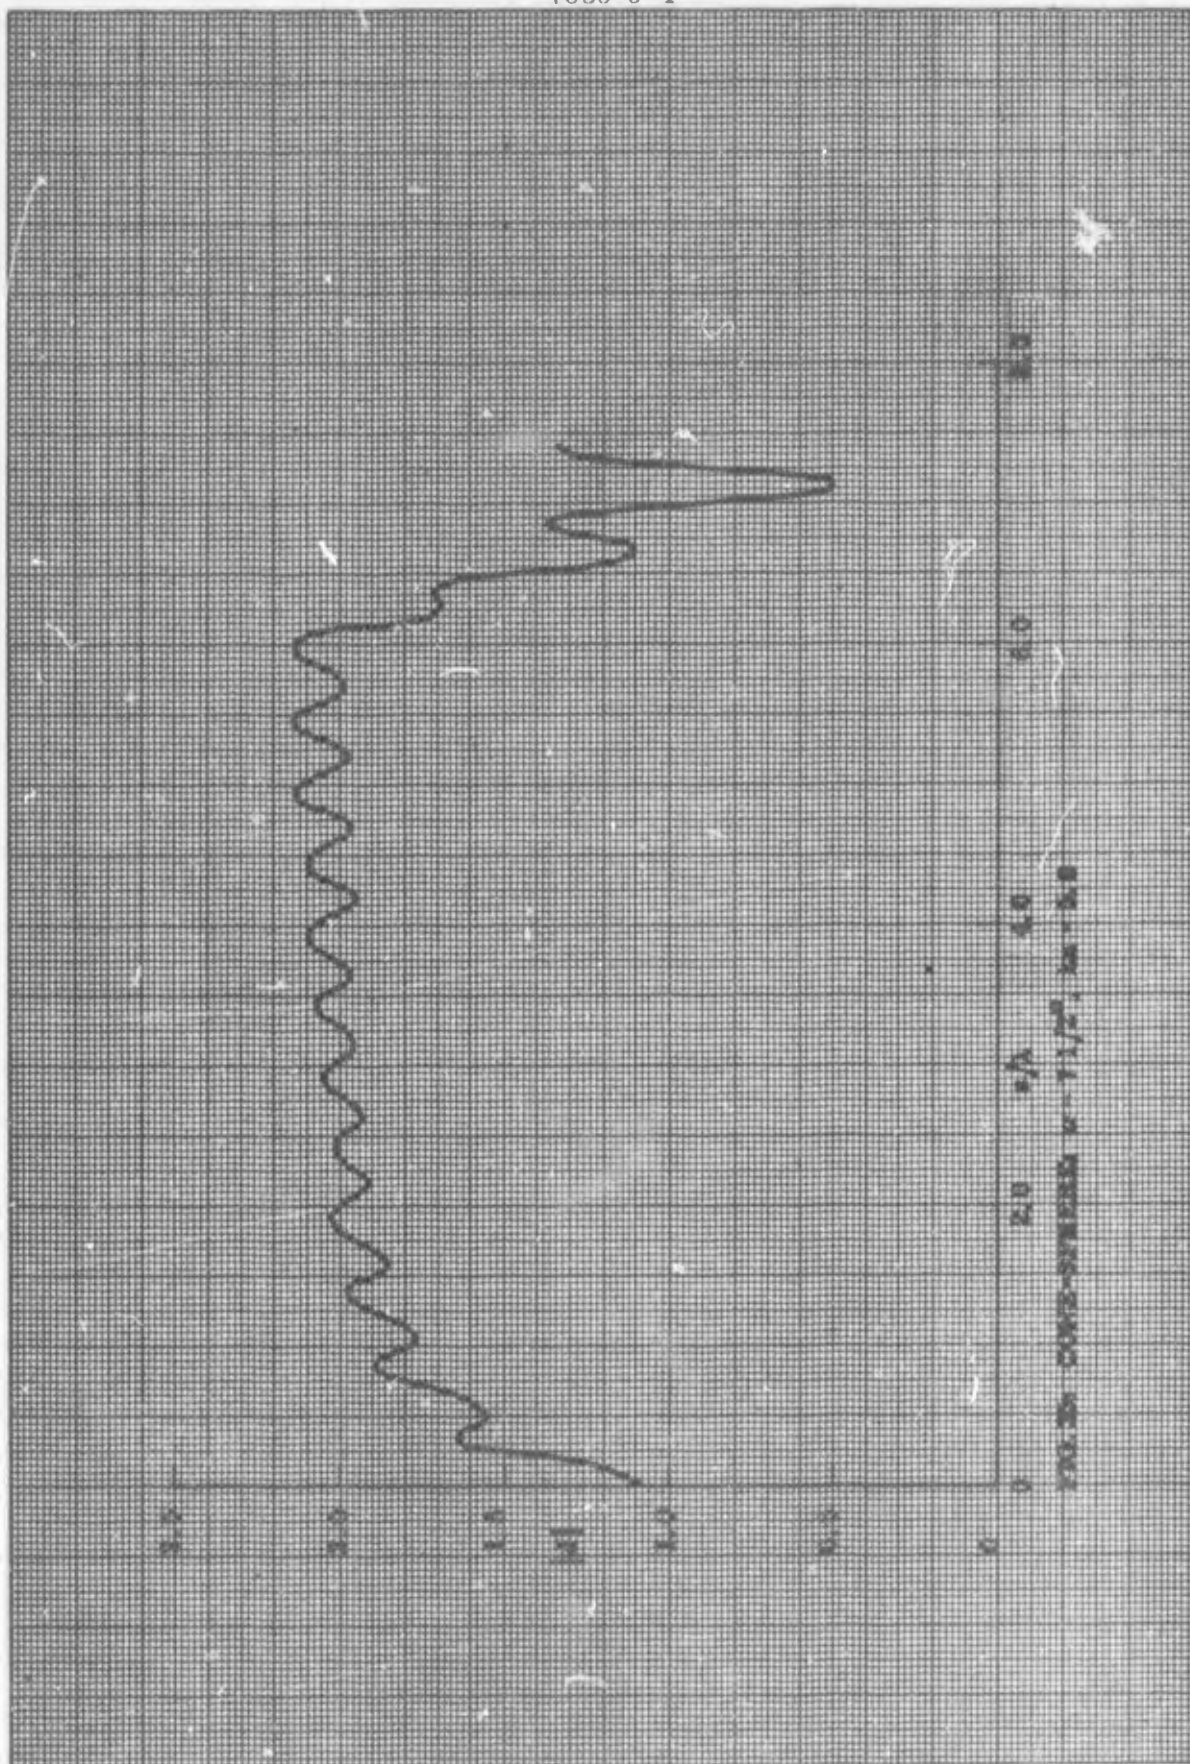


FIG. 10. MODEL A: Na^+ I.C. CHARACTERISTICS WITH 100.00 HERTZ INPUT OF SQUARE WAVEFORM.



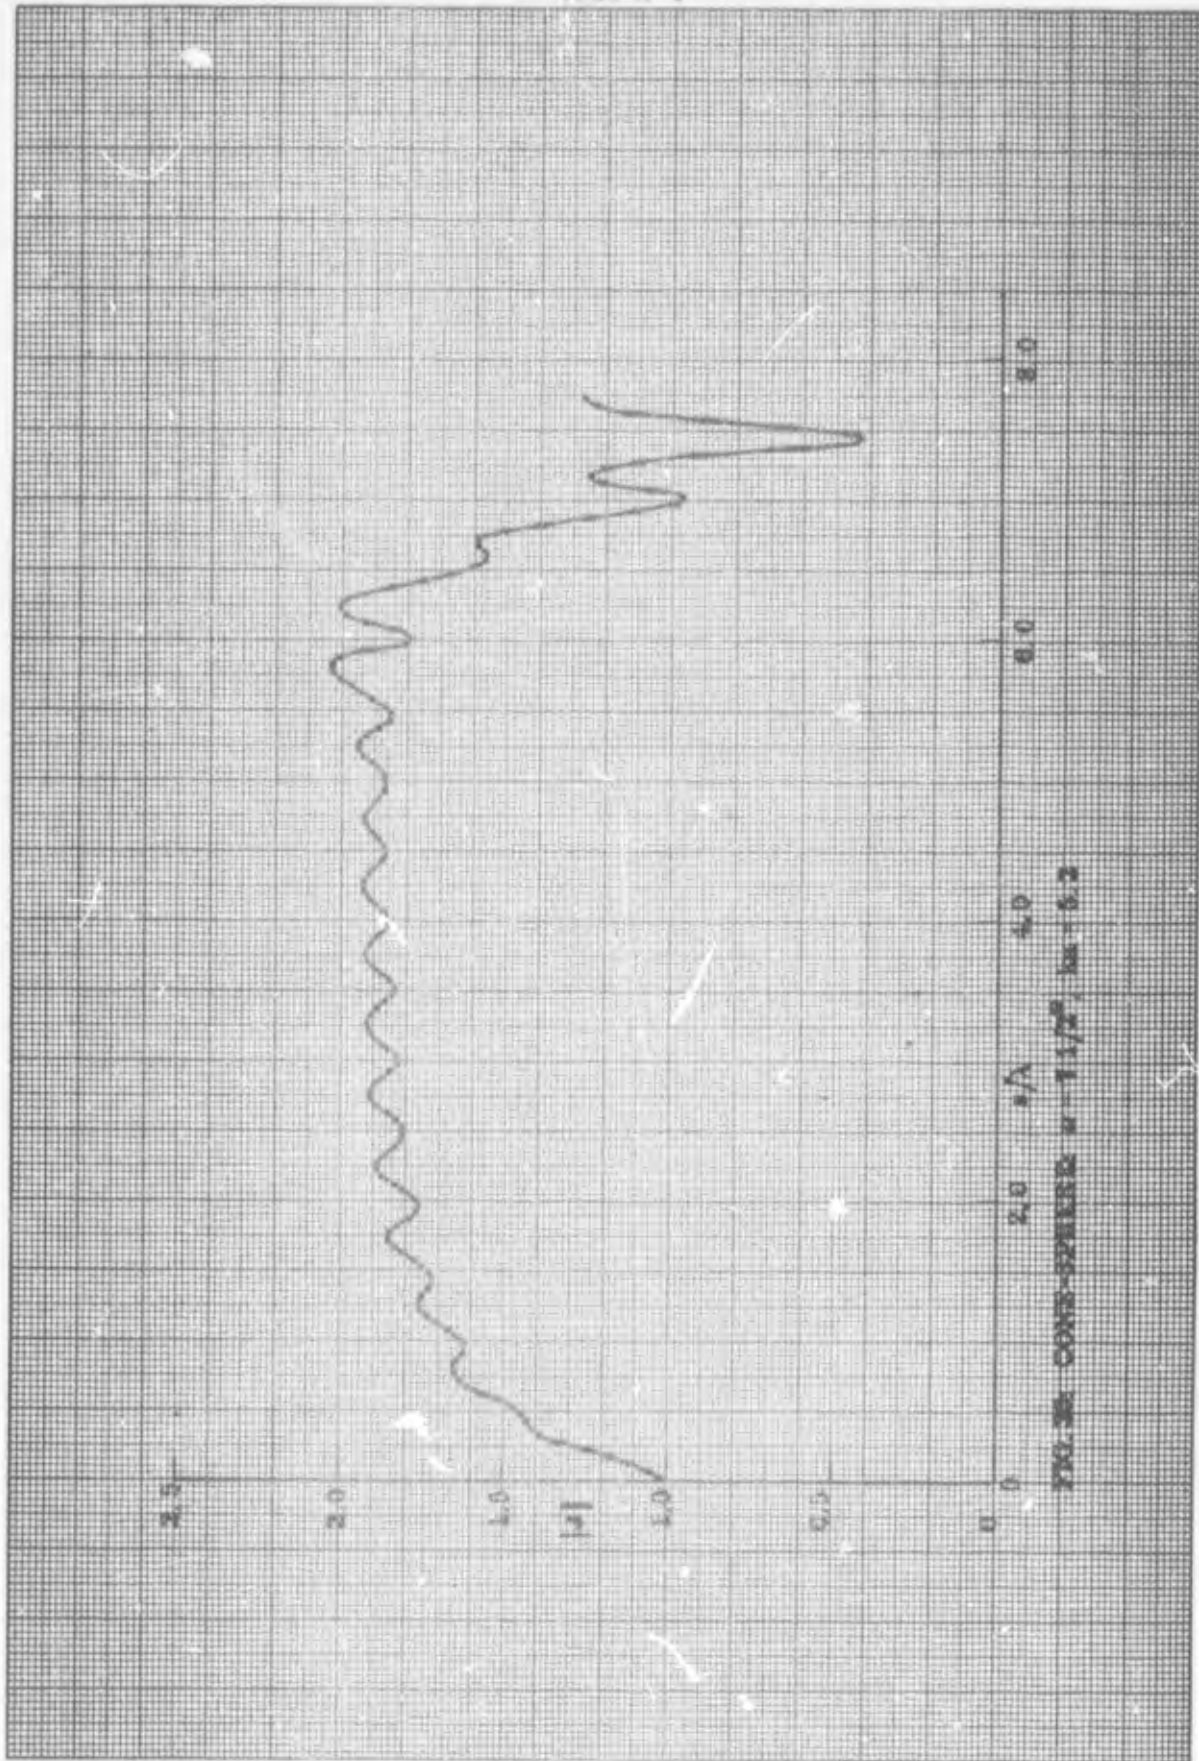
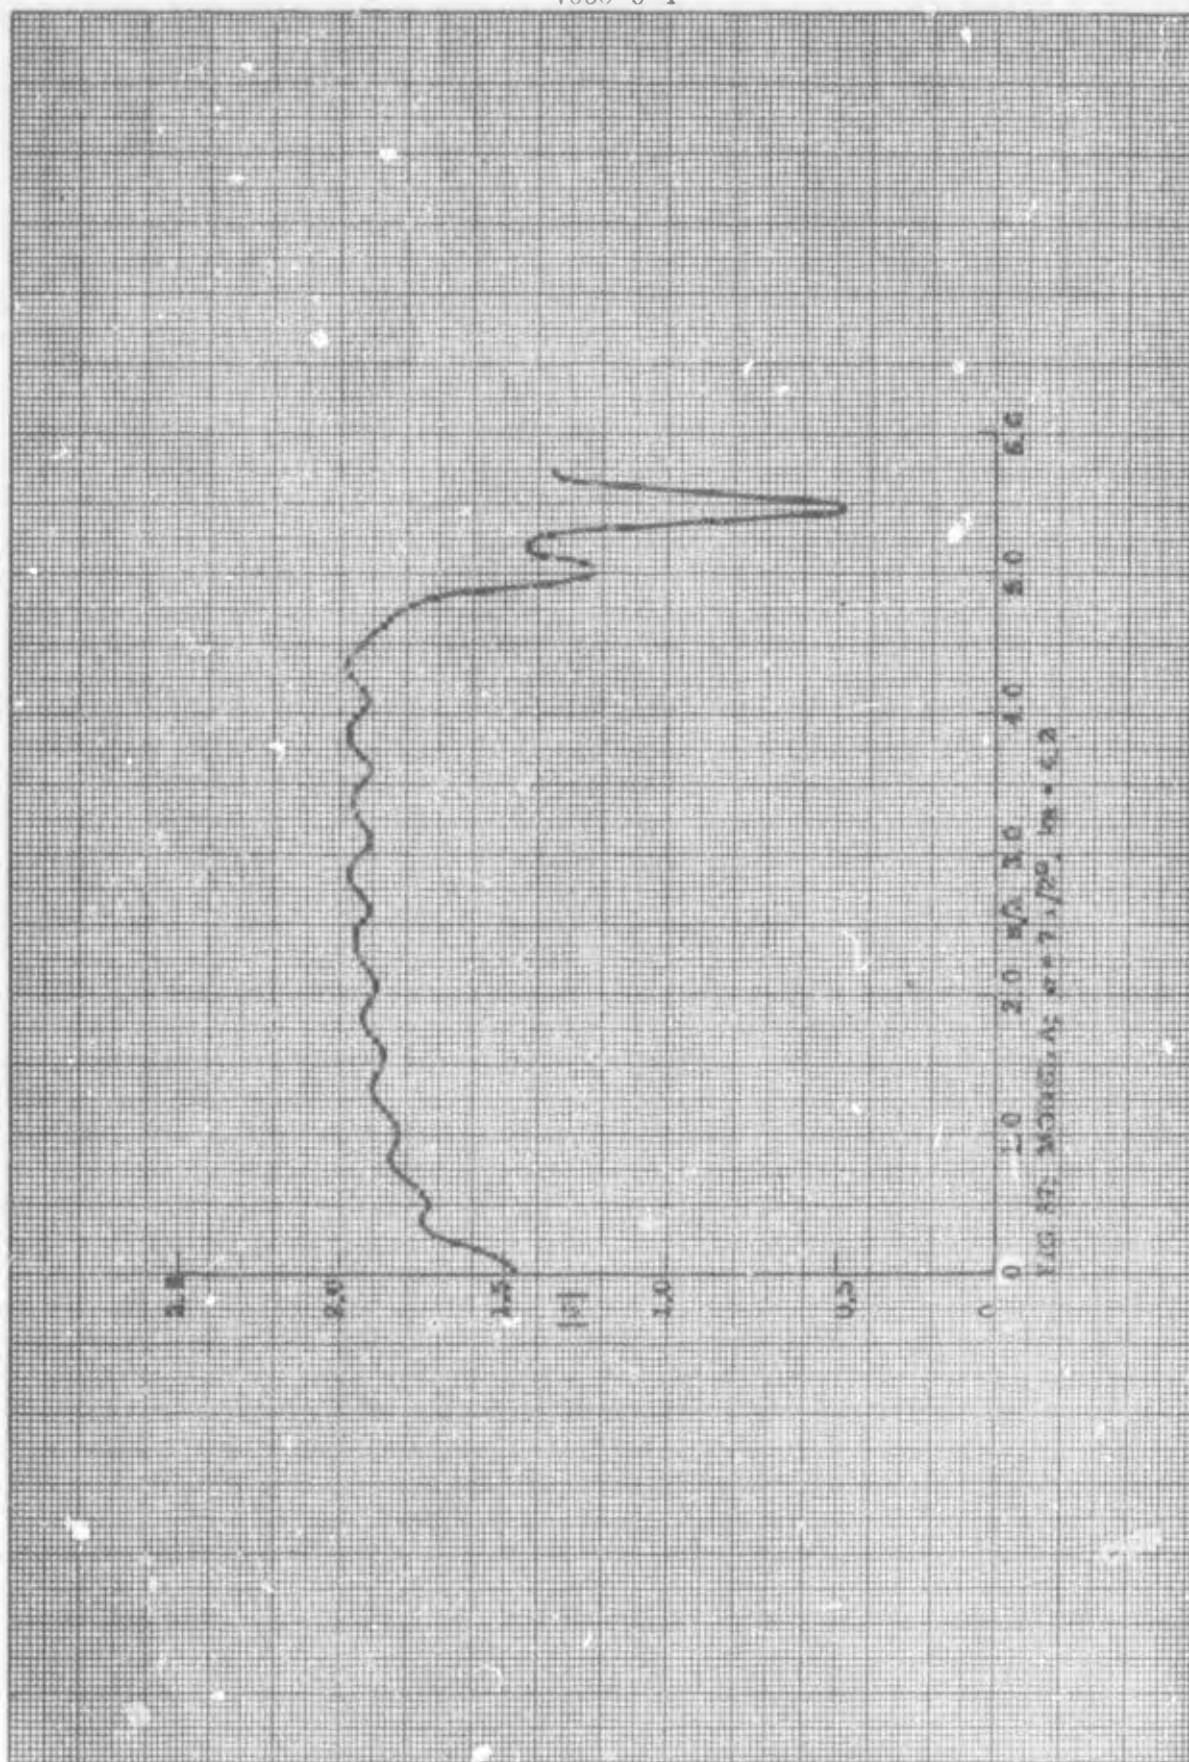


FIG. 36. CONDENSER-SPREADER at $1\frac{1}{2}^\circ$, $\lambda = 6.2$



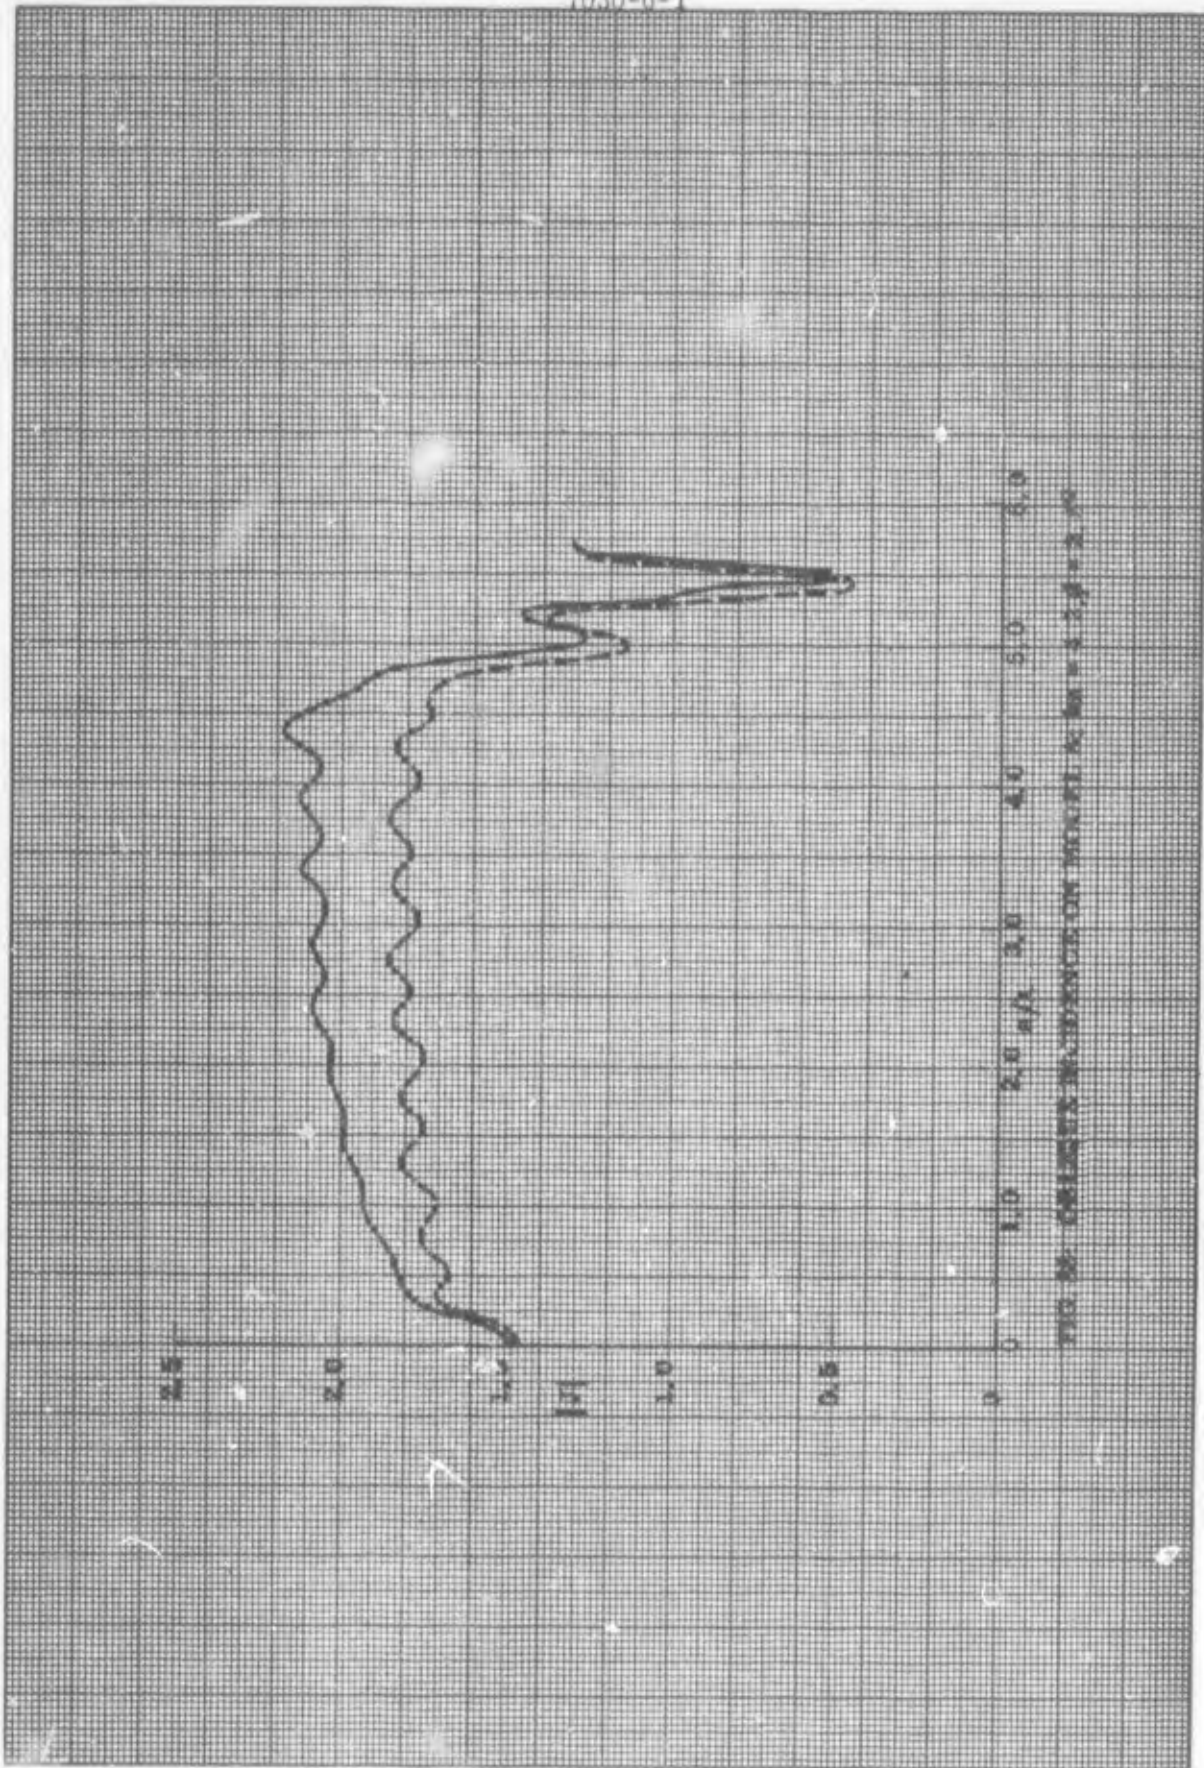


FIG. 10. OBSERVED SECTION OF TUNNEL. (See also p. 2, p. 3, p. 4, p. 5)

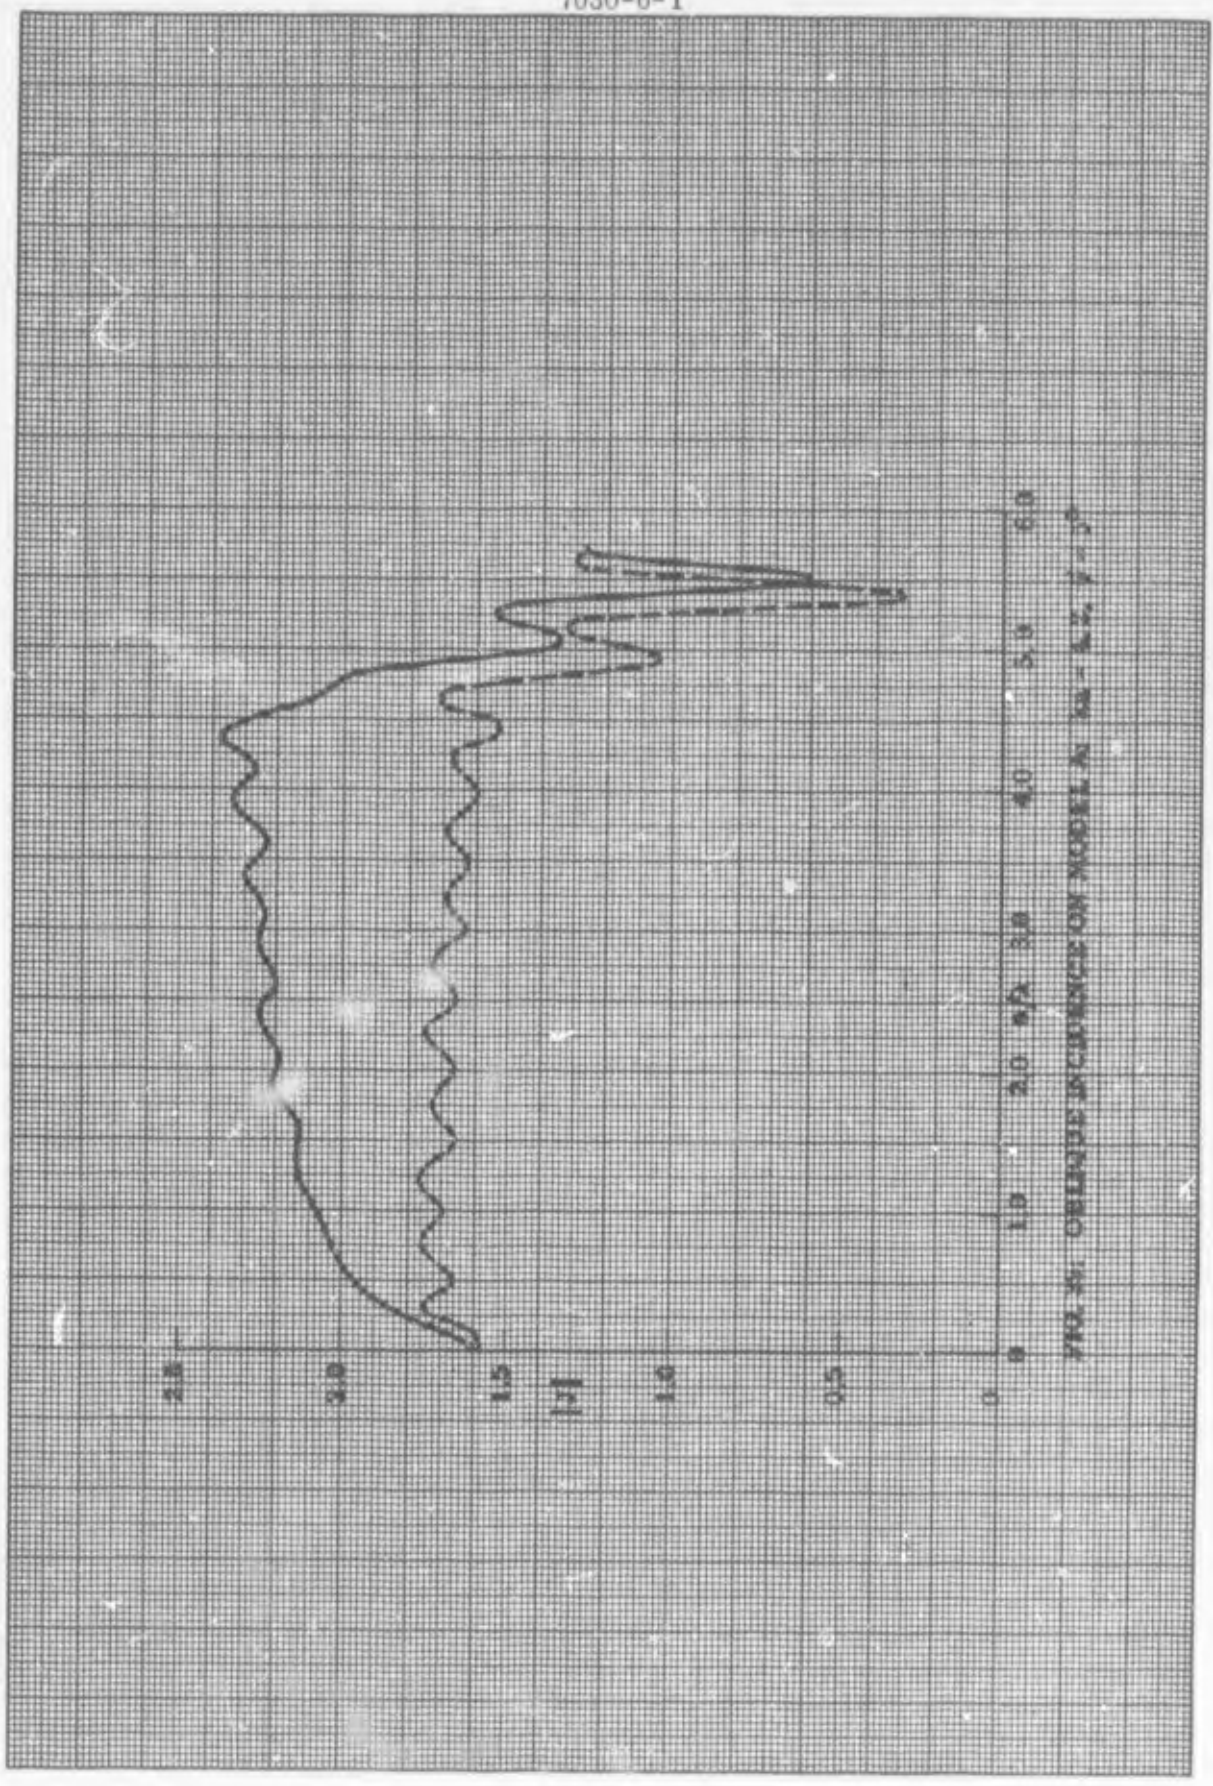


FIG. 57. CHANGE IN CURRENT ON MODEL IN AIR - A.C. $f = 50$

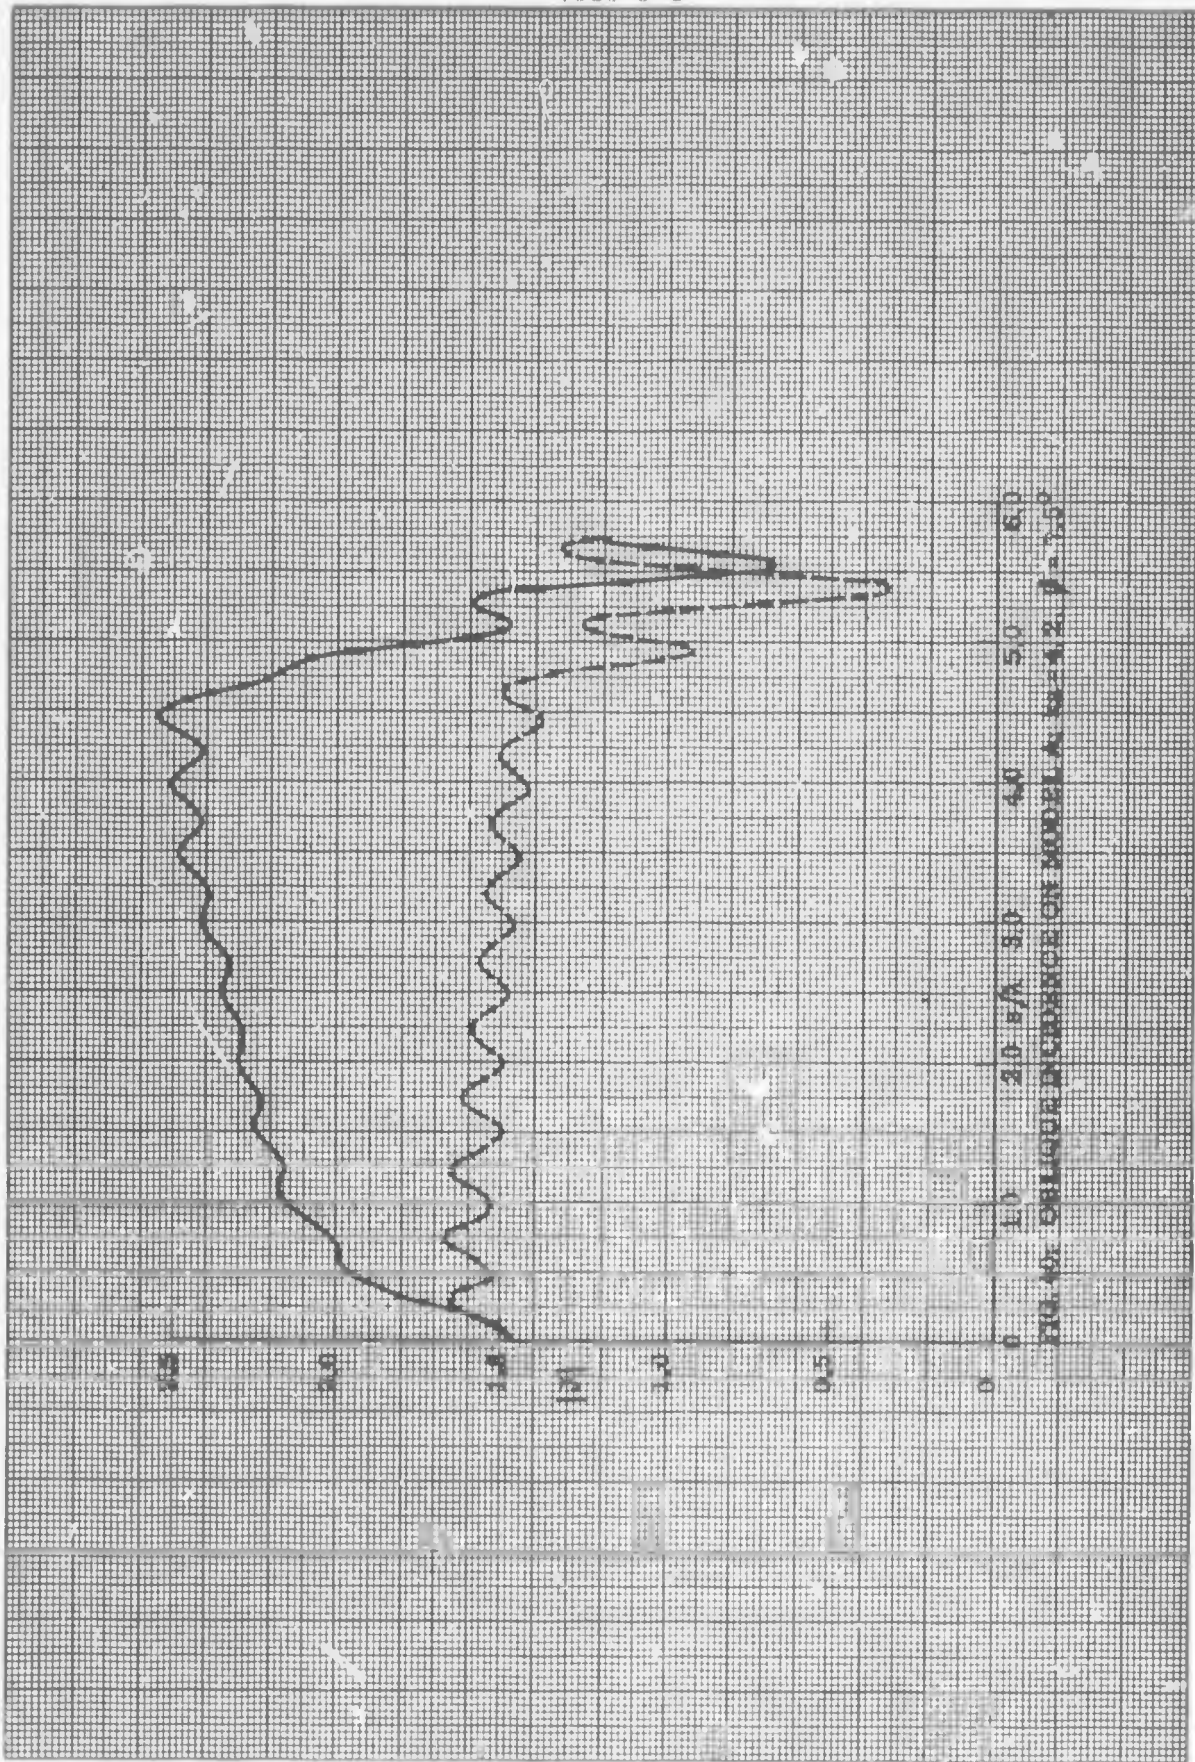


FIG. 10. RELUCTANCE ON MODEL A. $\mu = 1.2$, $\beta = 2.5$

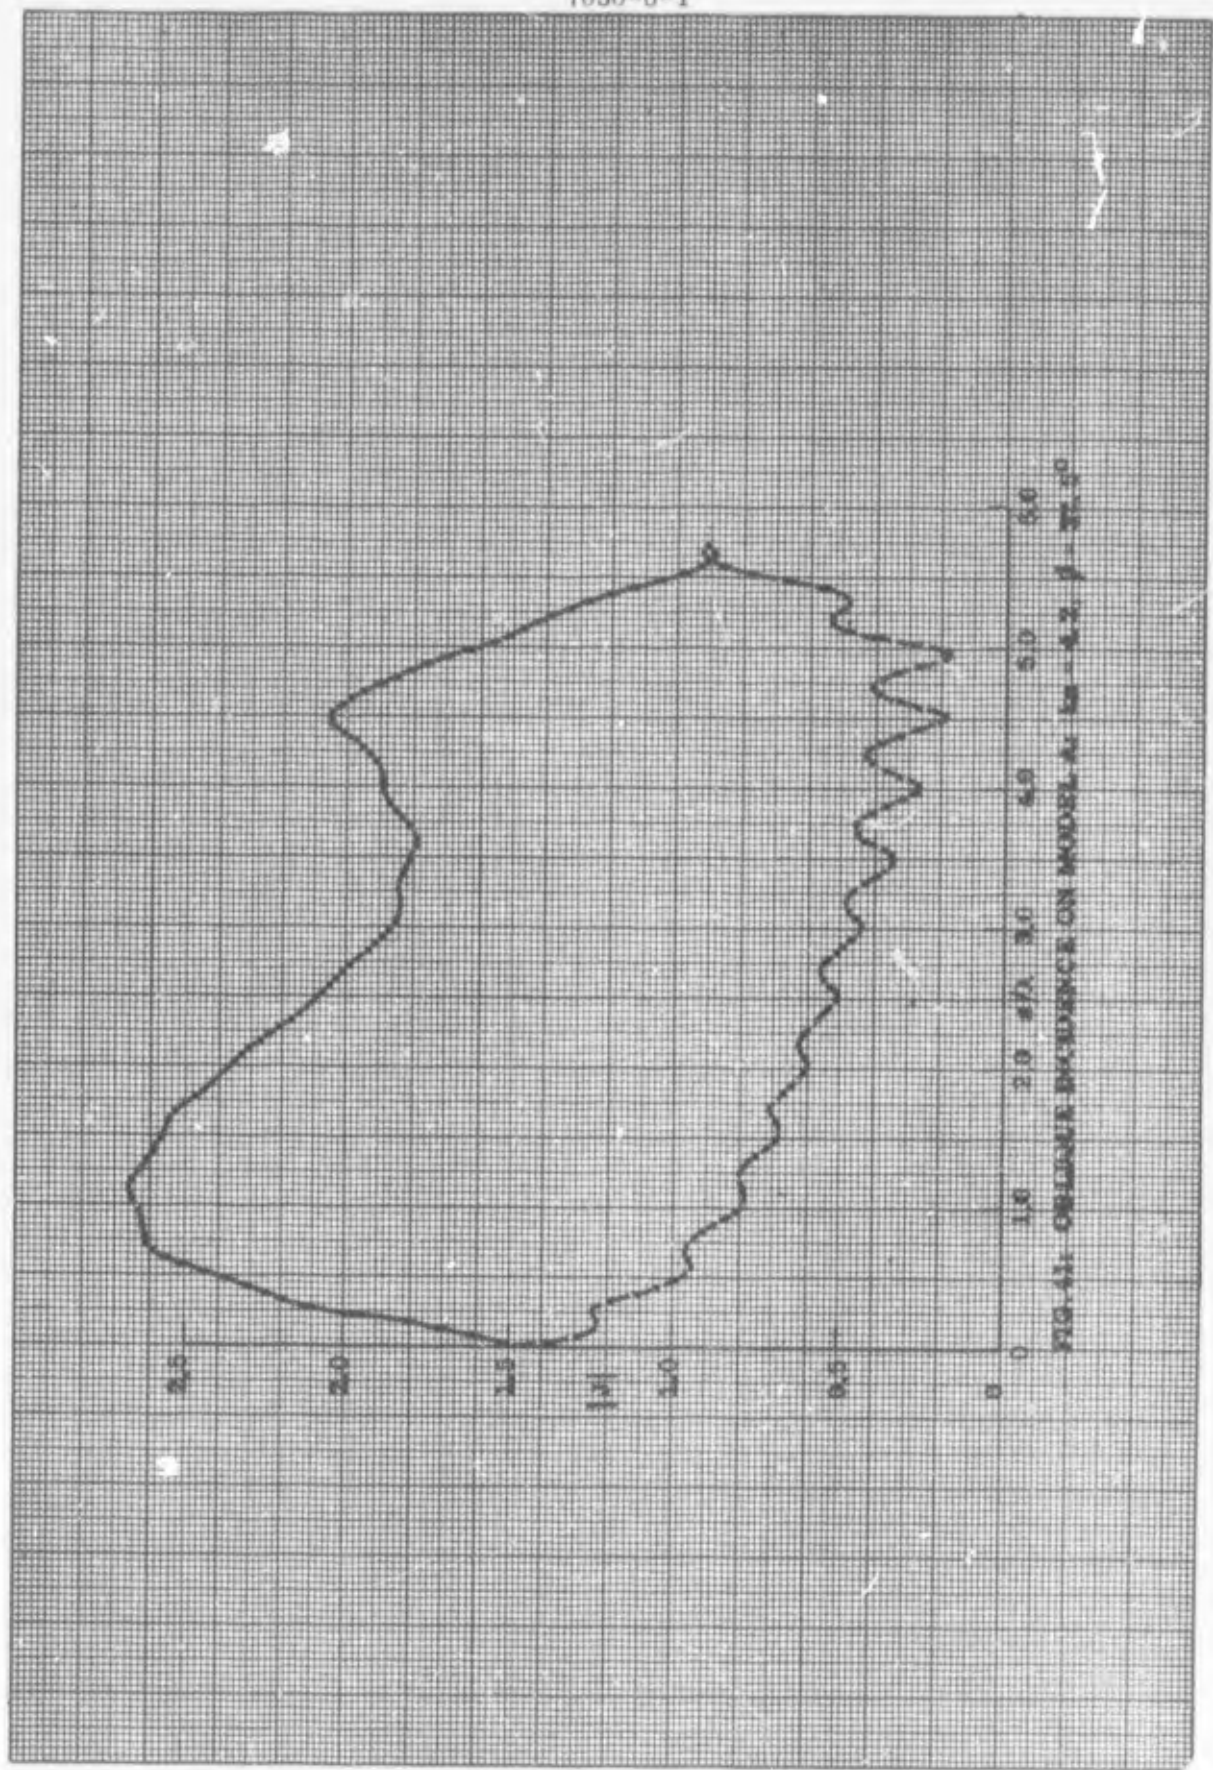


FIG. 41: ORBITAL ENVELOPE ON MODEL A: $\mu = 0.2$, $\beta = 37.5^\circ$

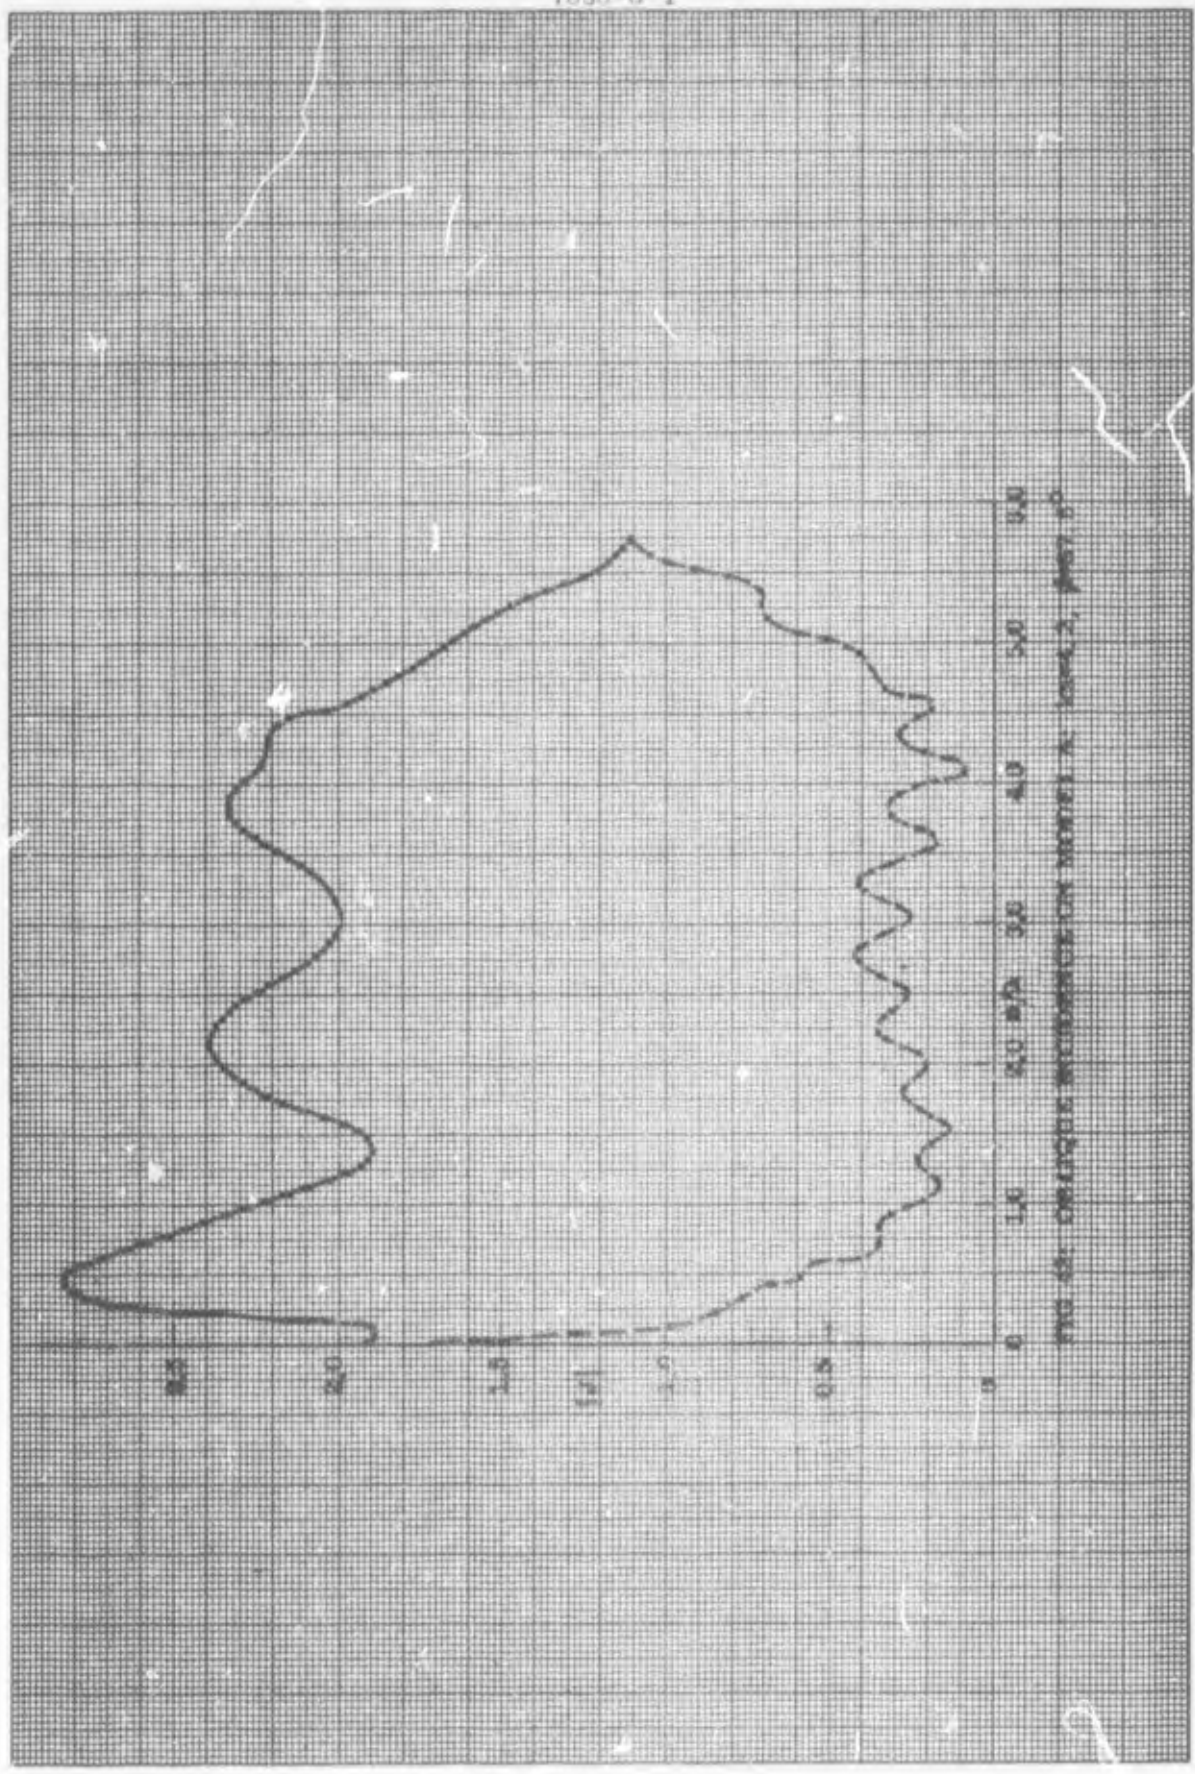


FIG. 48. CHARACTERISTICS OF MONOMER A. (Series 2, plot of



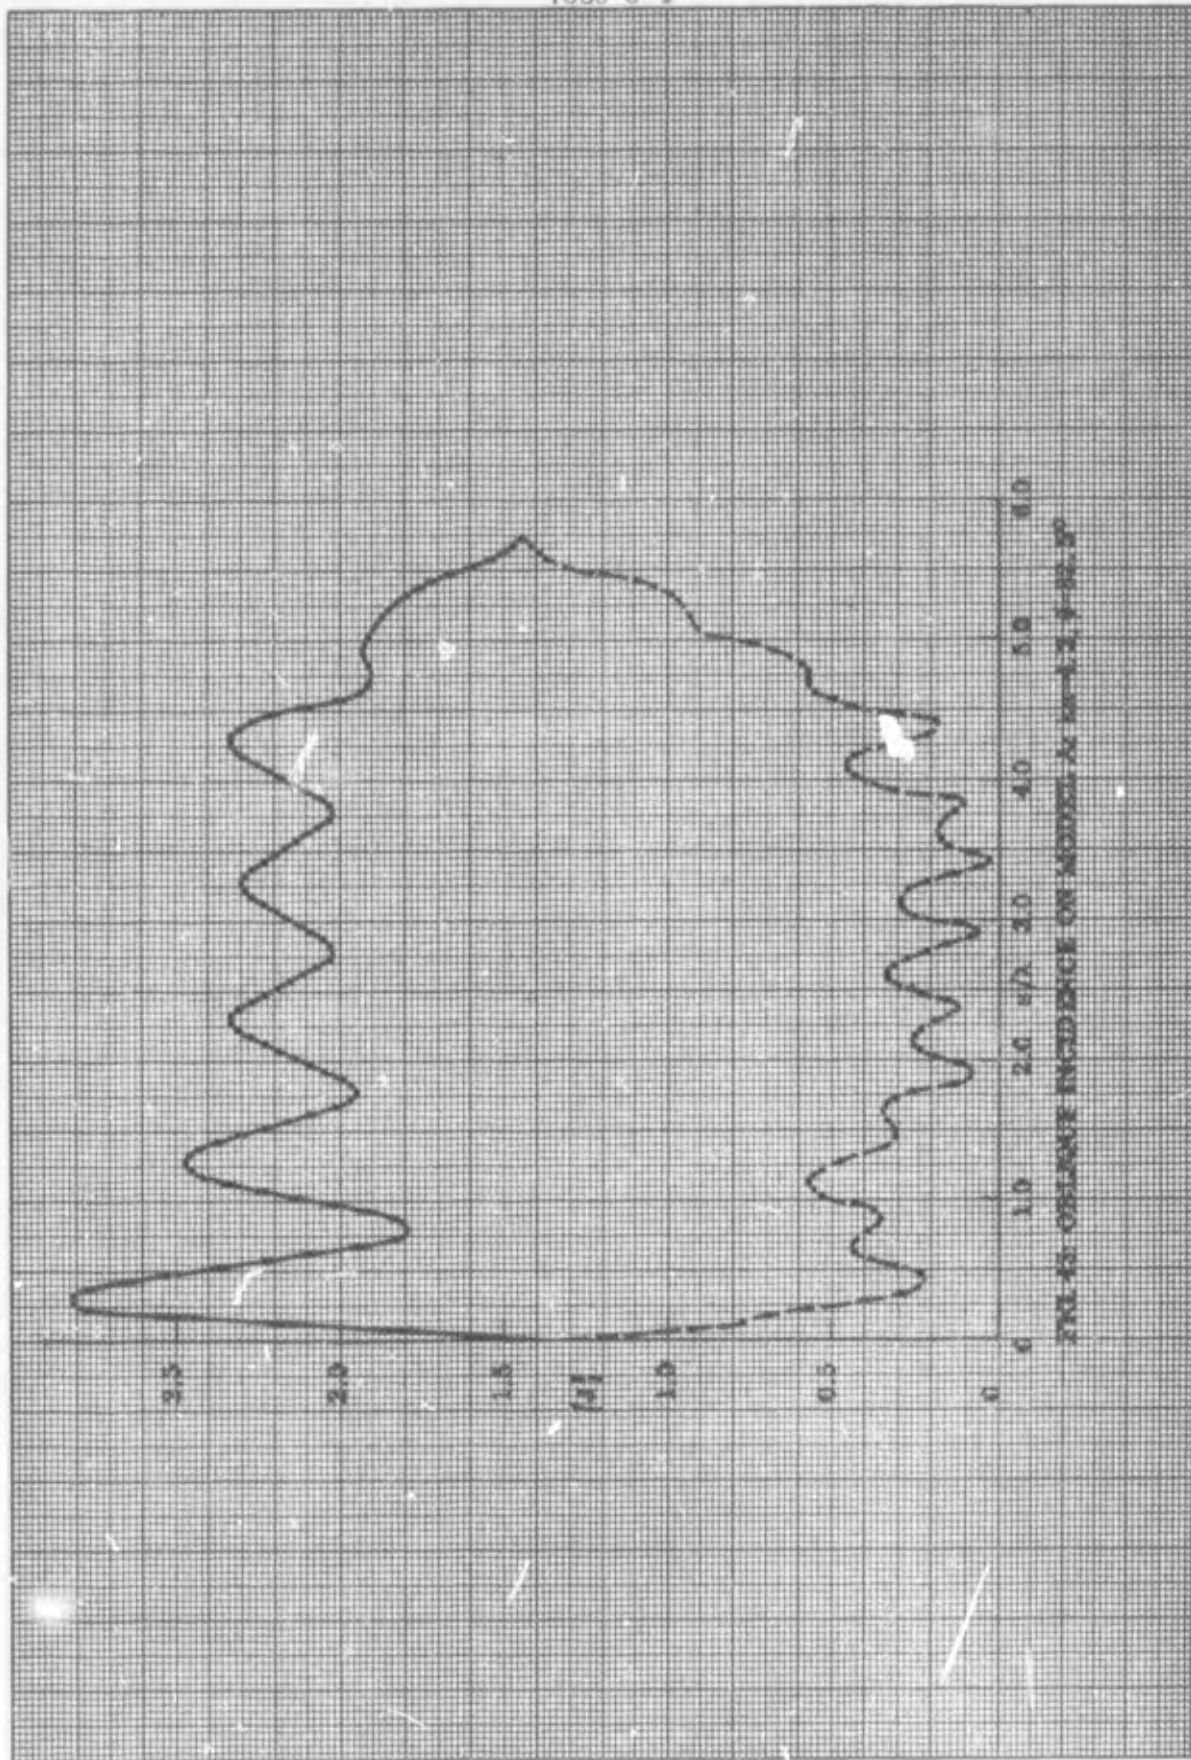



FIG. 13 - OBSERVED INCIDENCE ON MODEL A, $\mu = 1.2$, $\beta = 0.5$, $\sigma = 0.5$


7030-6-T

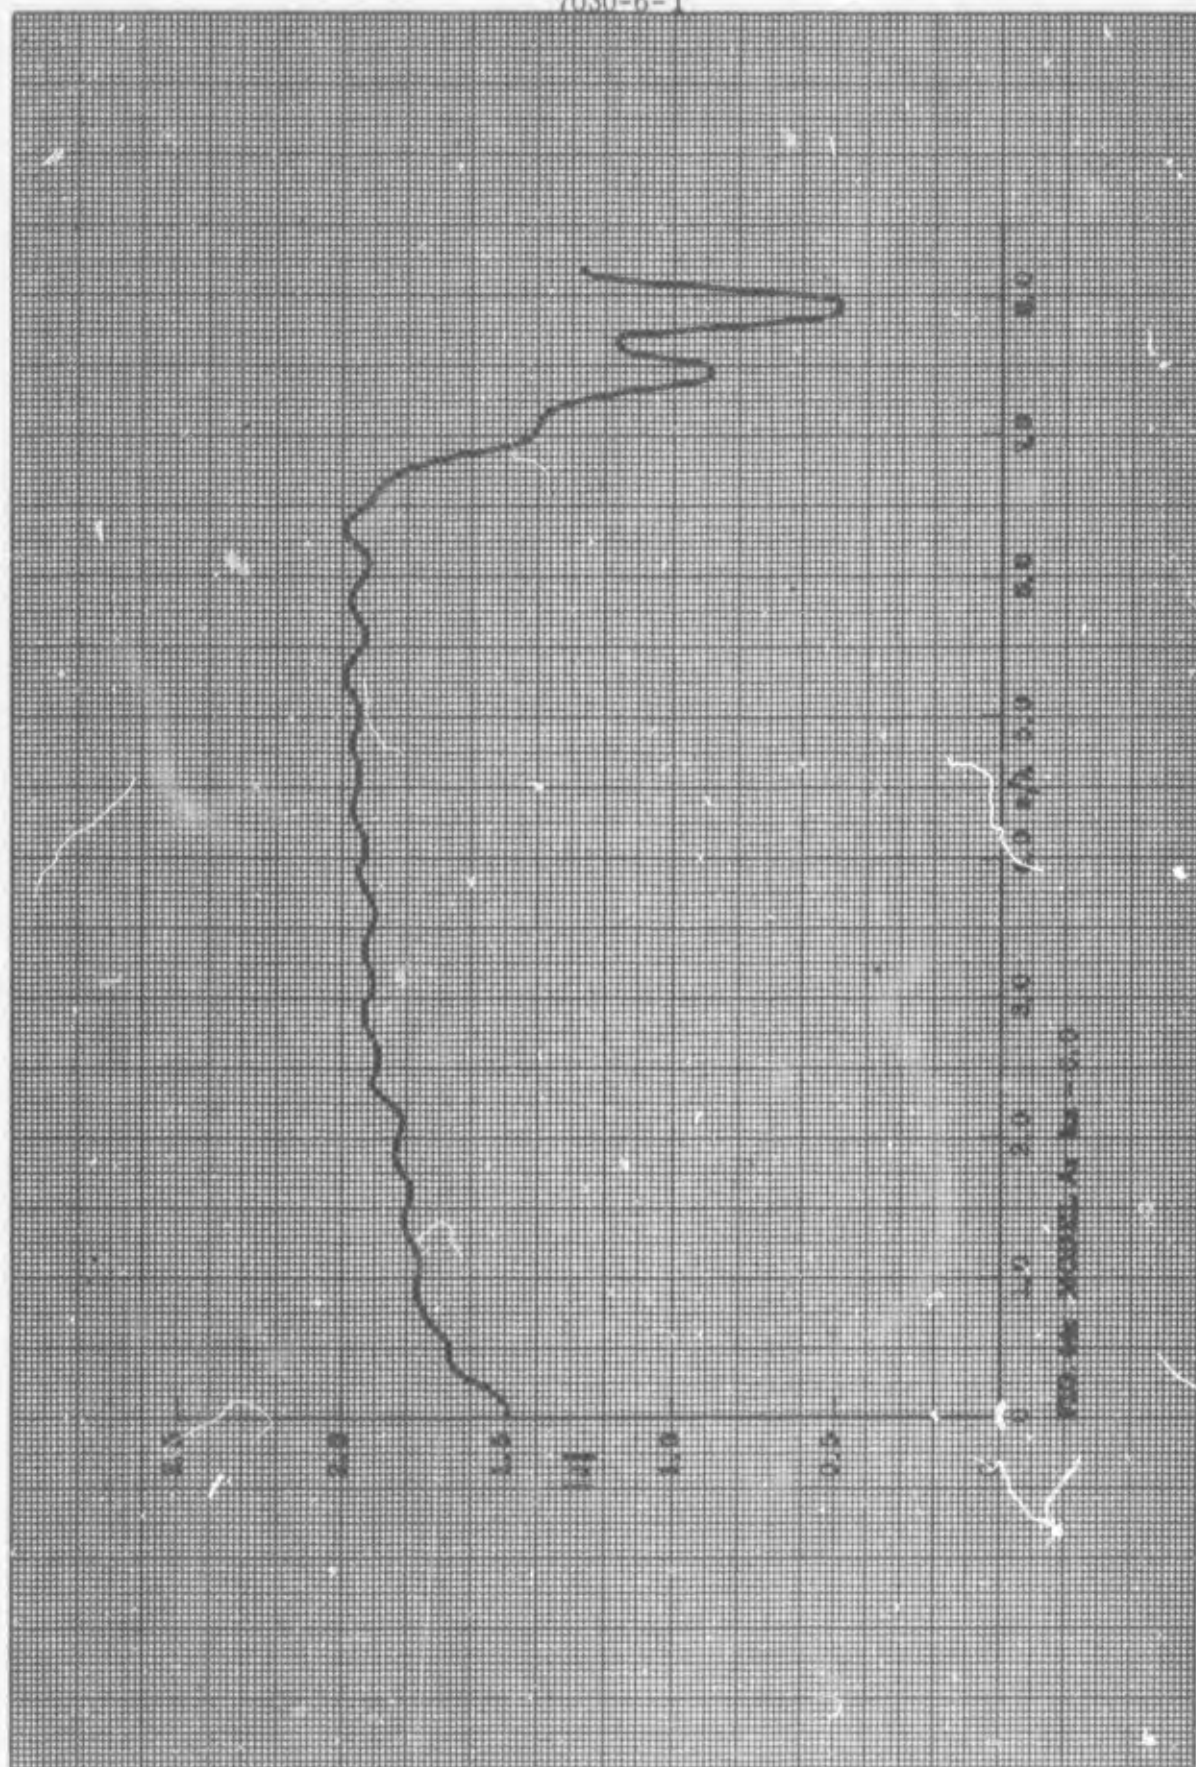

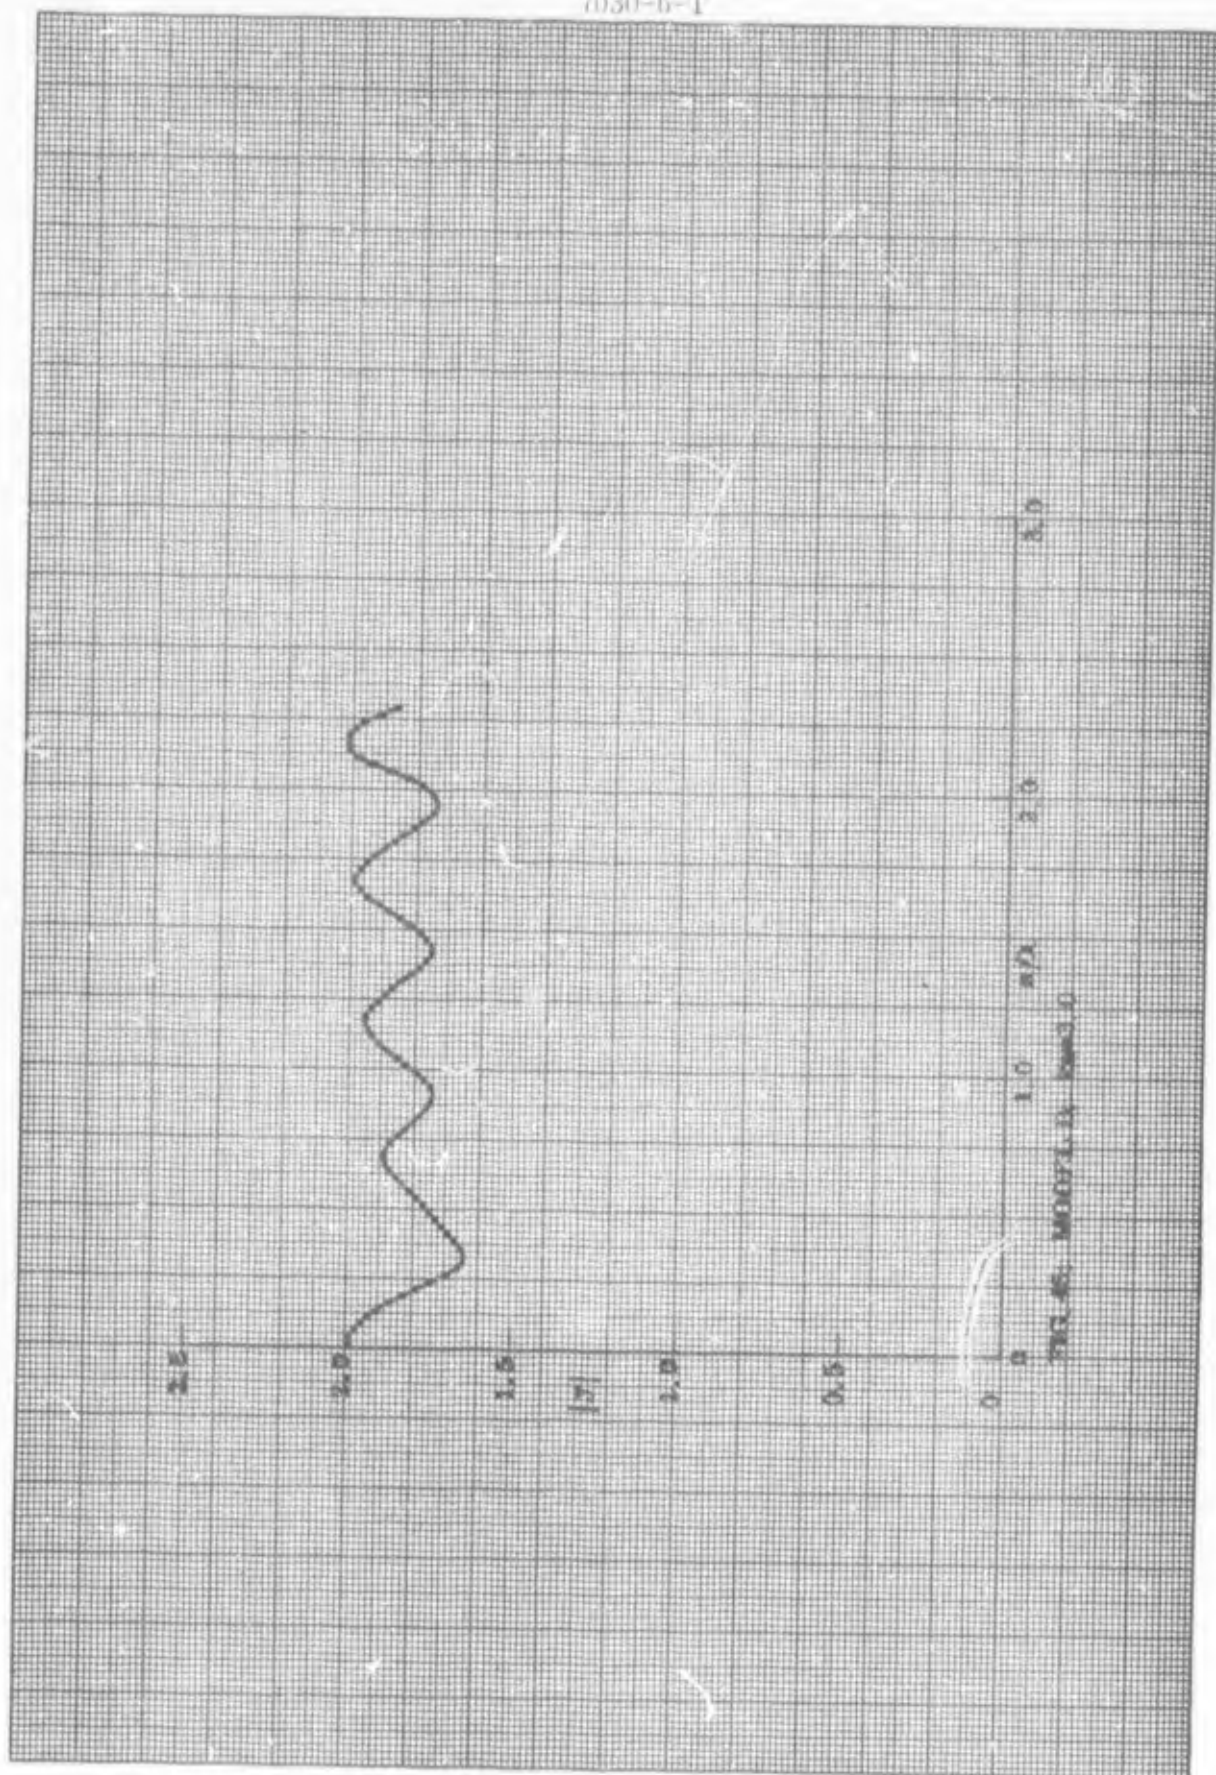



7030-6-T

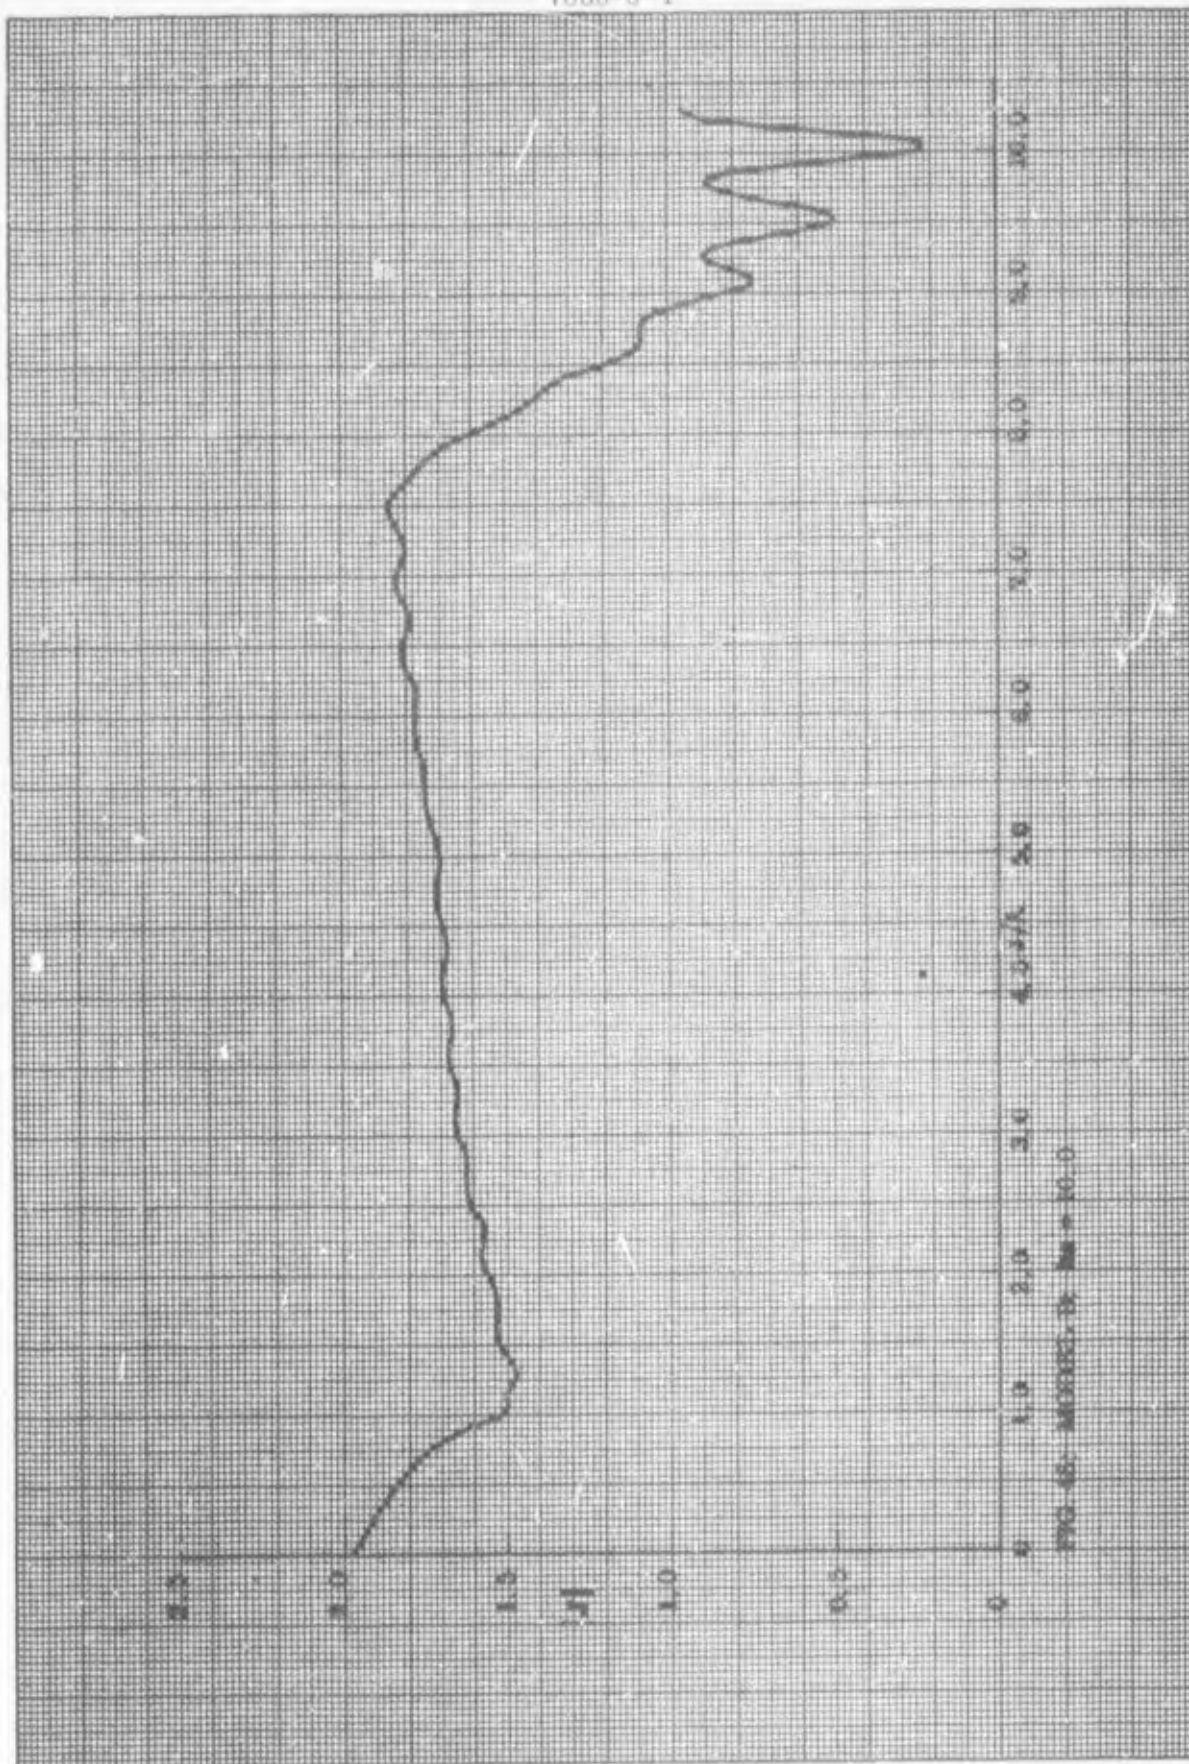


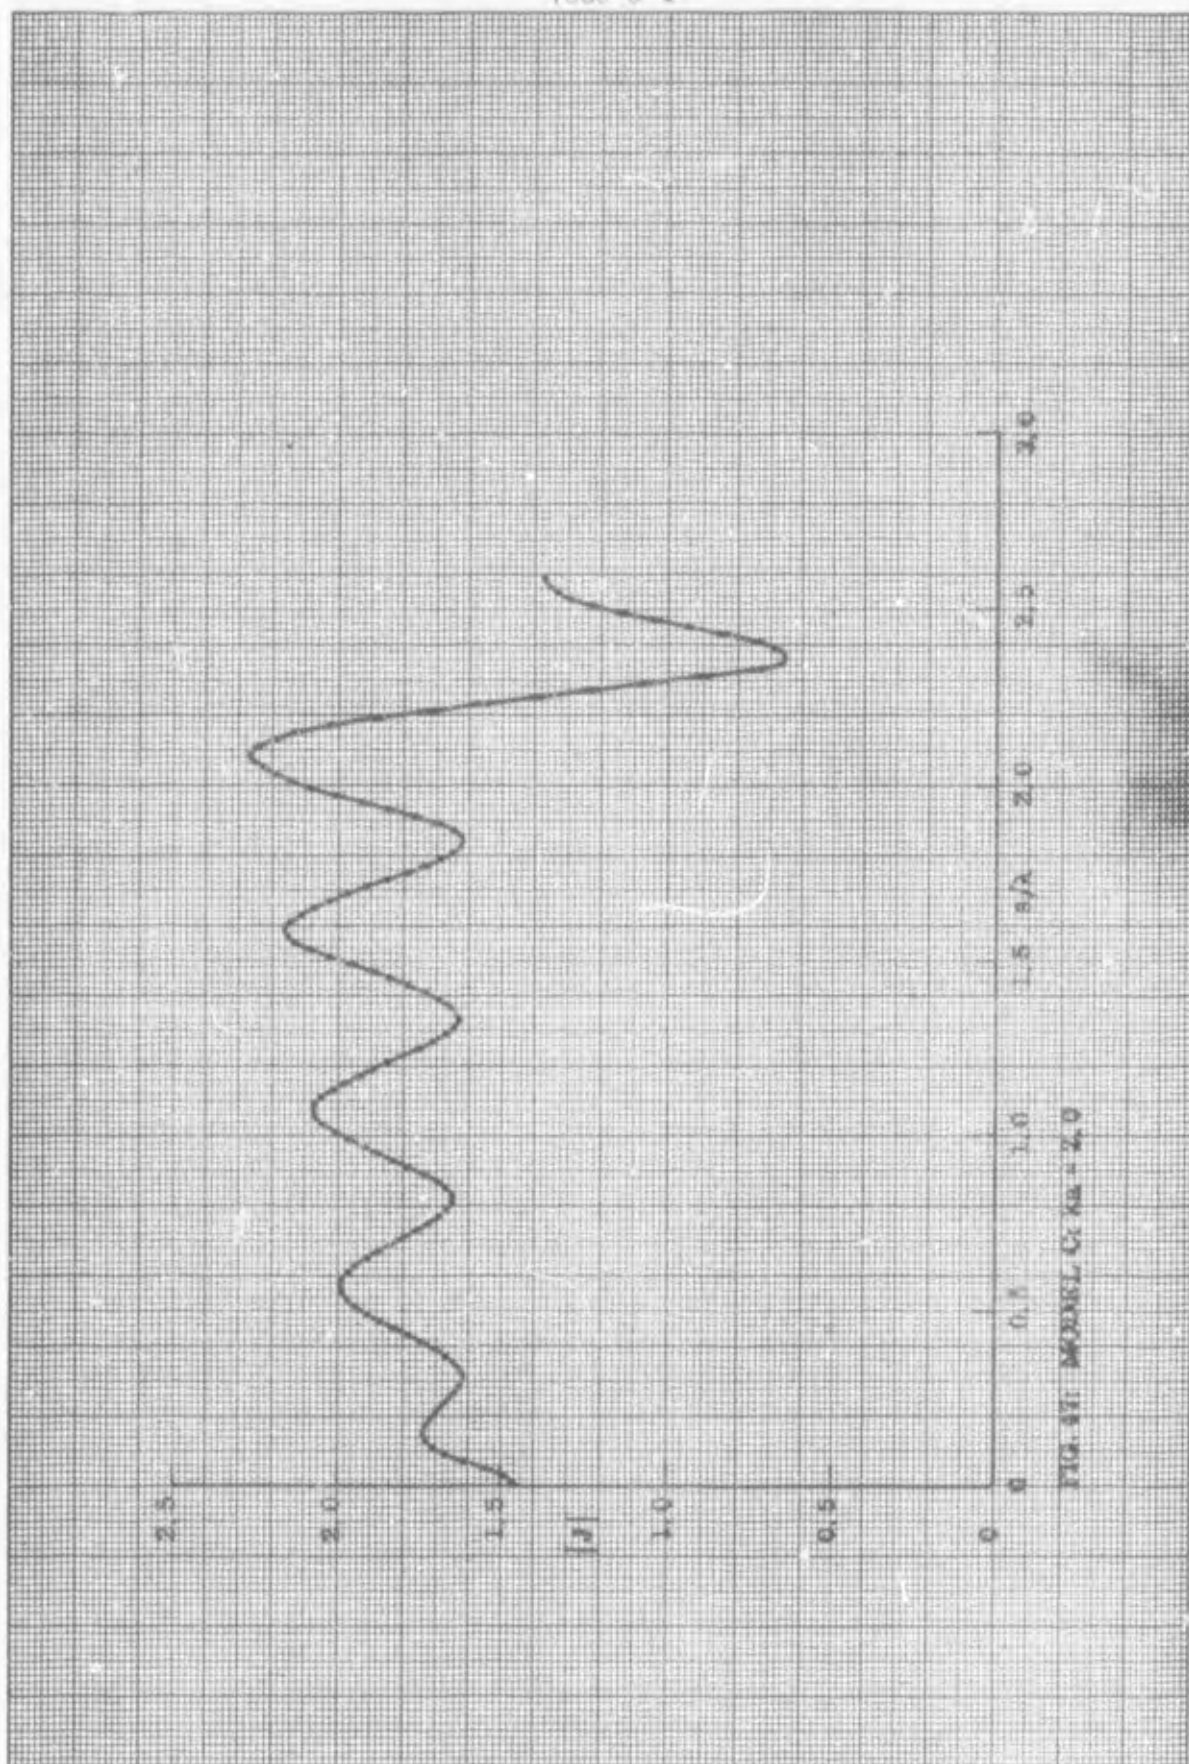


703-6-T

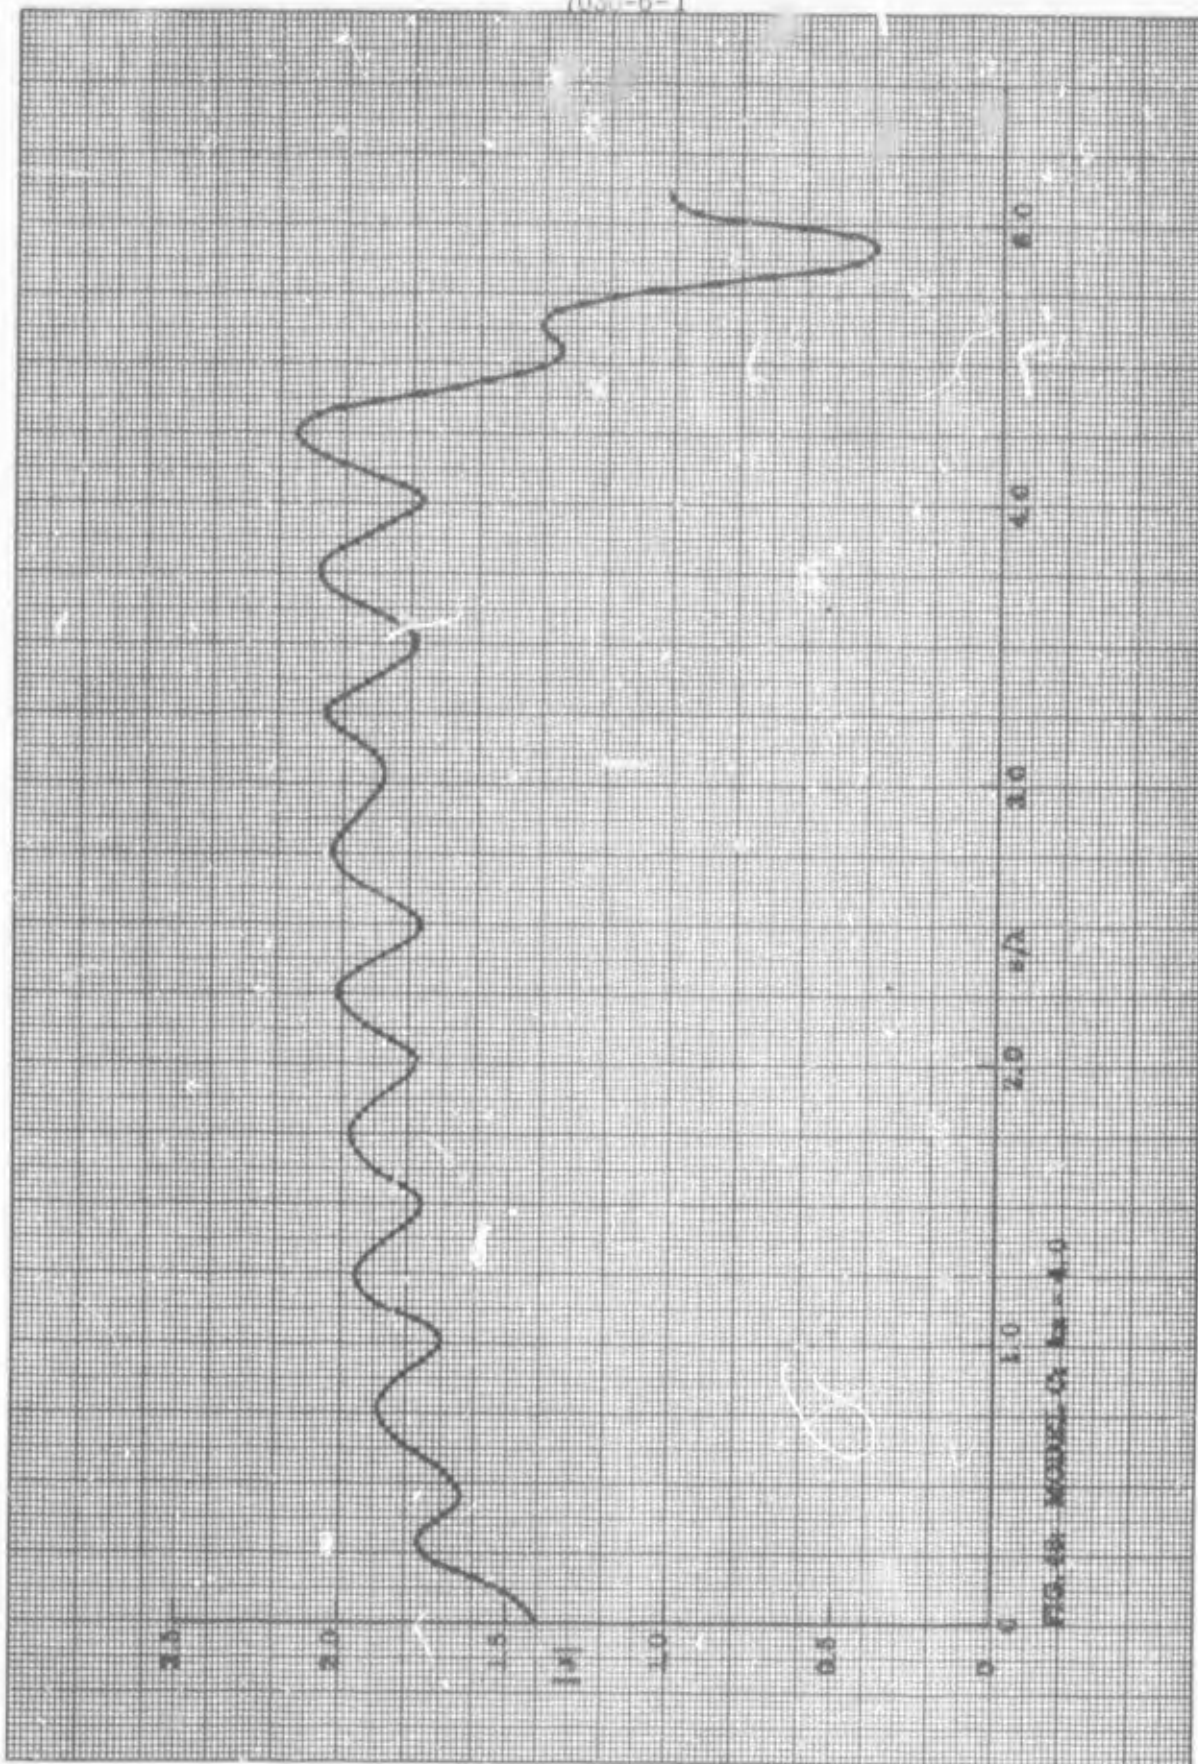

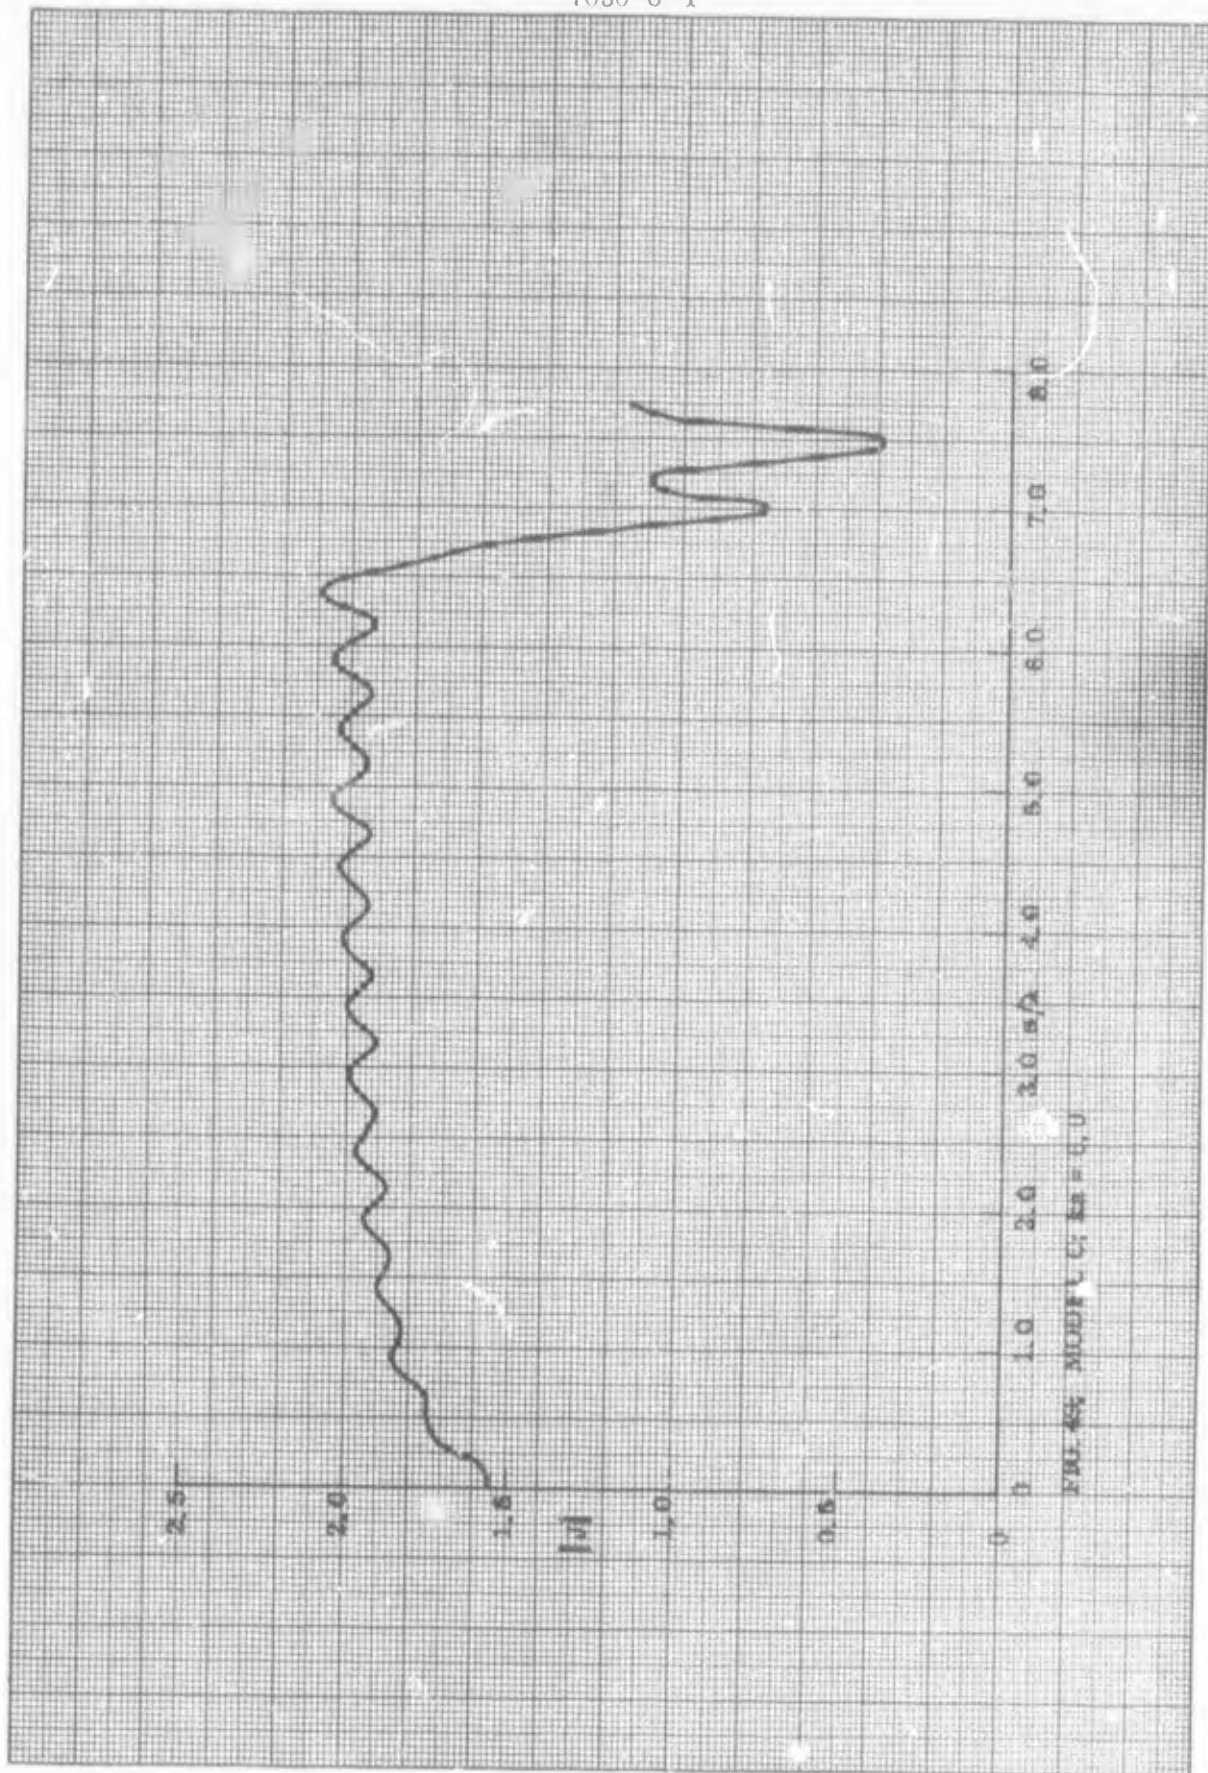

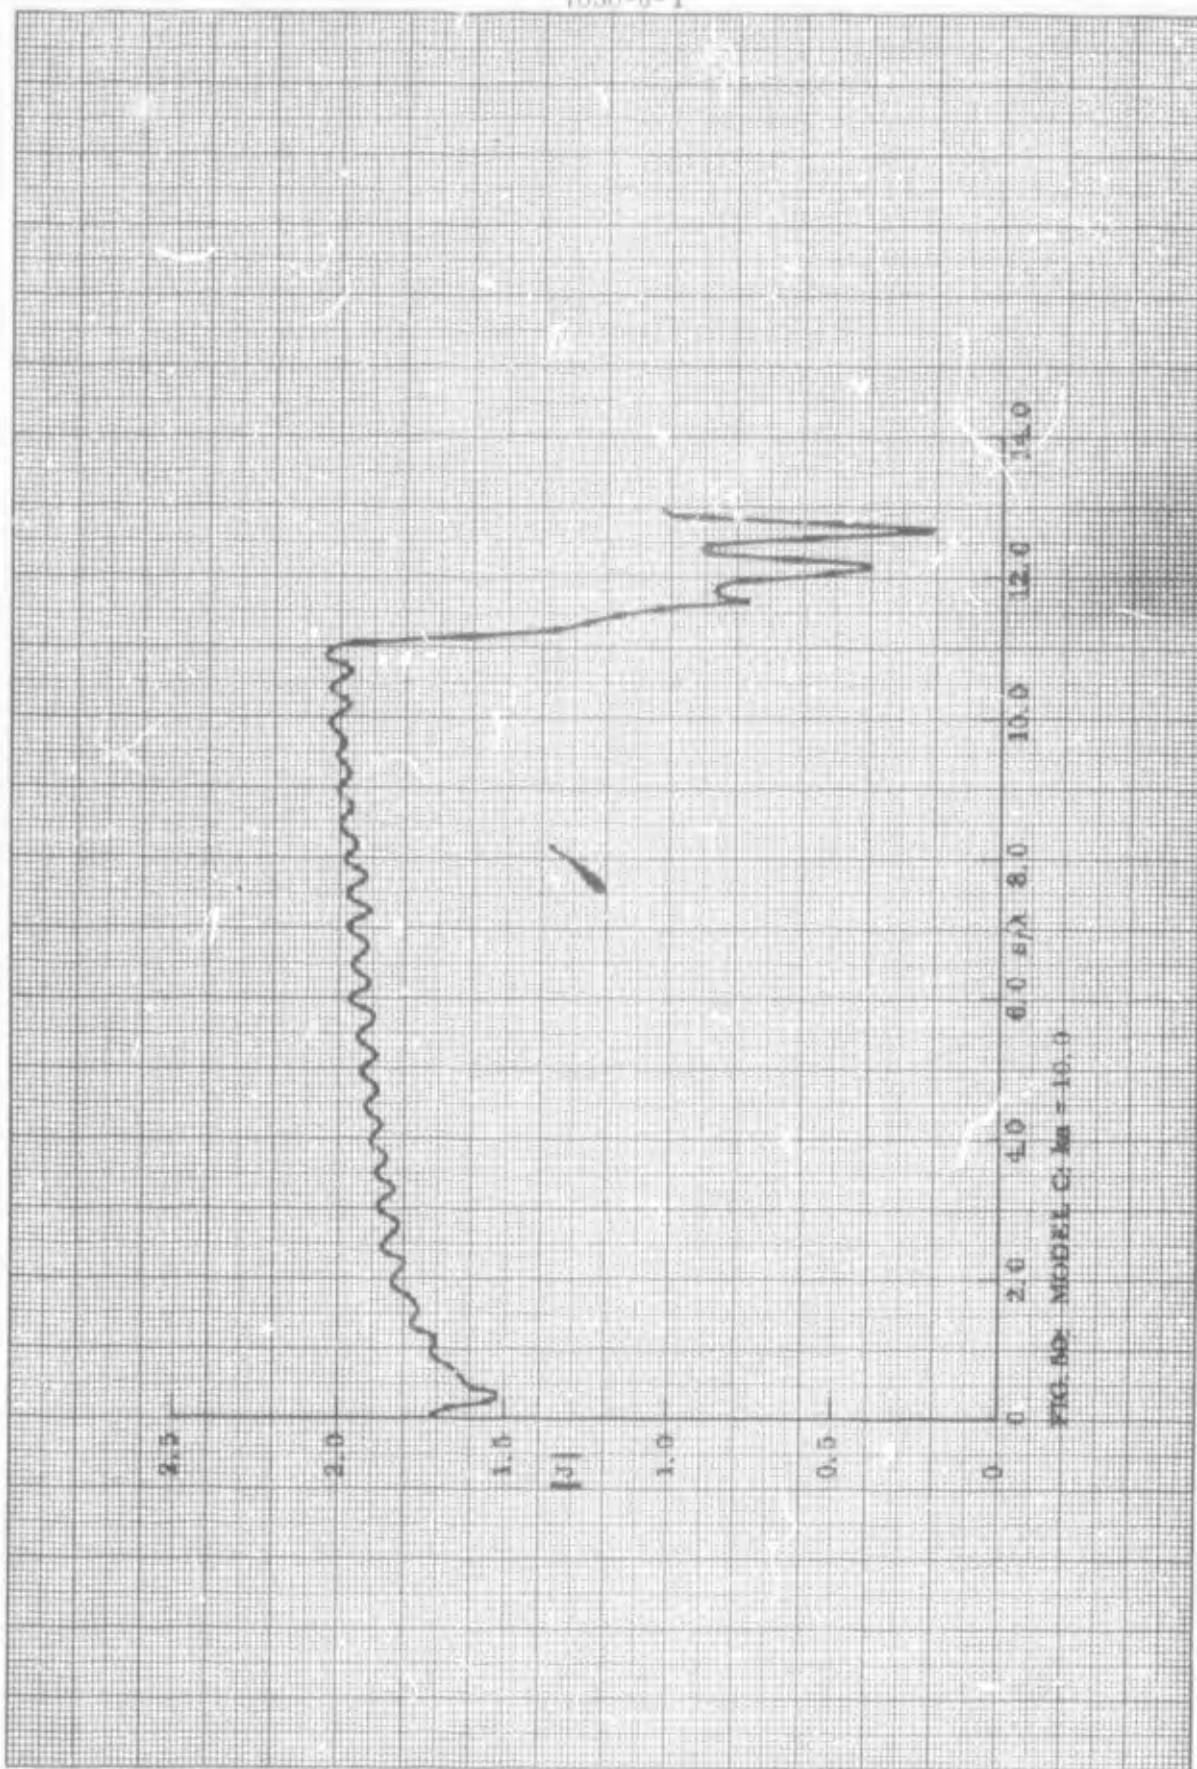

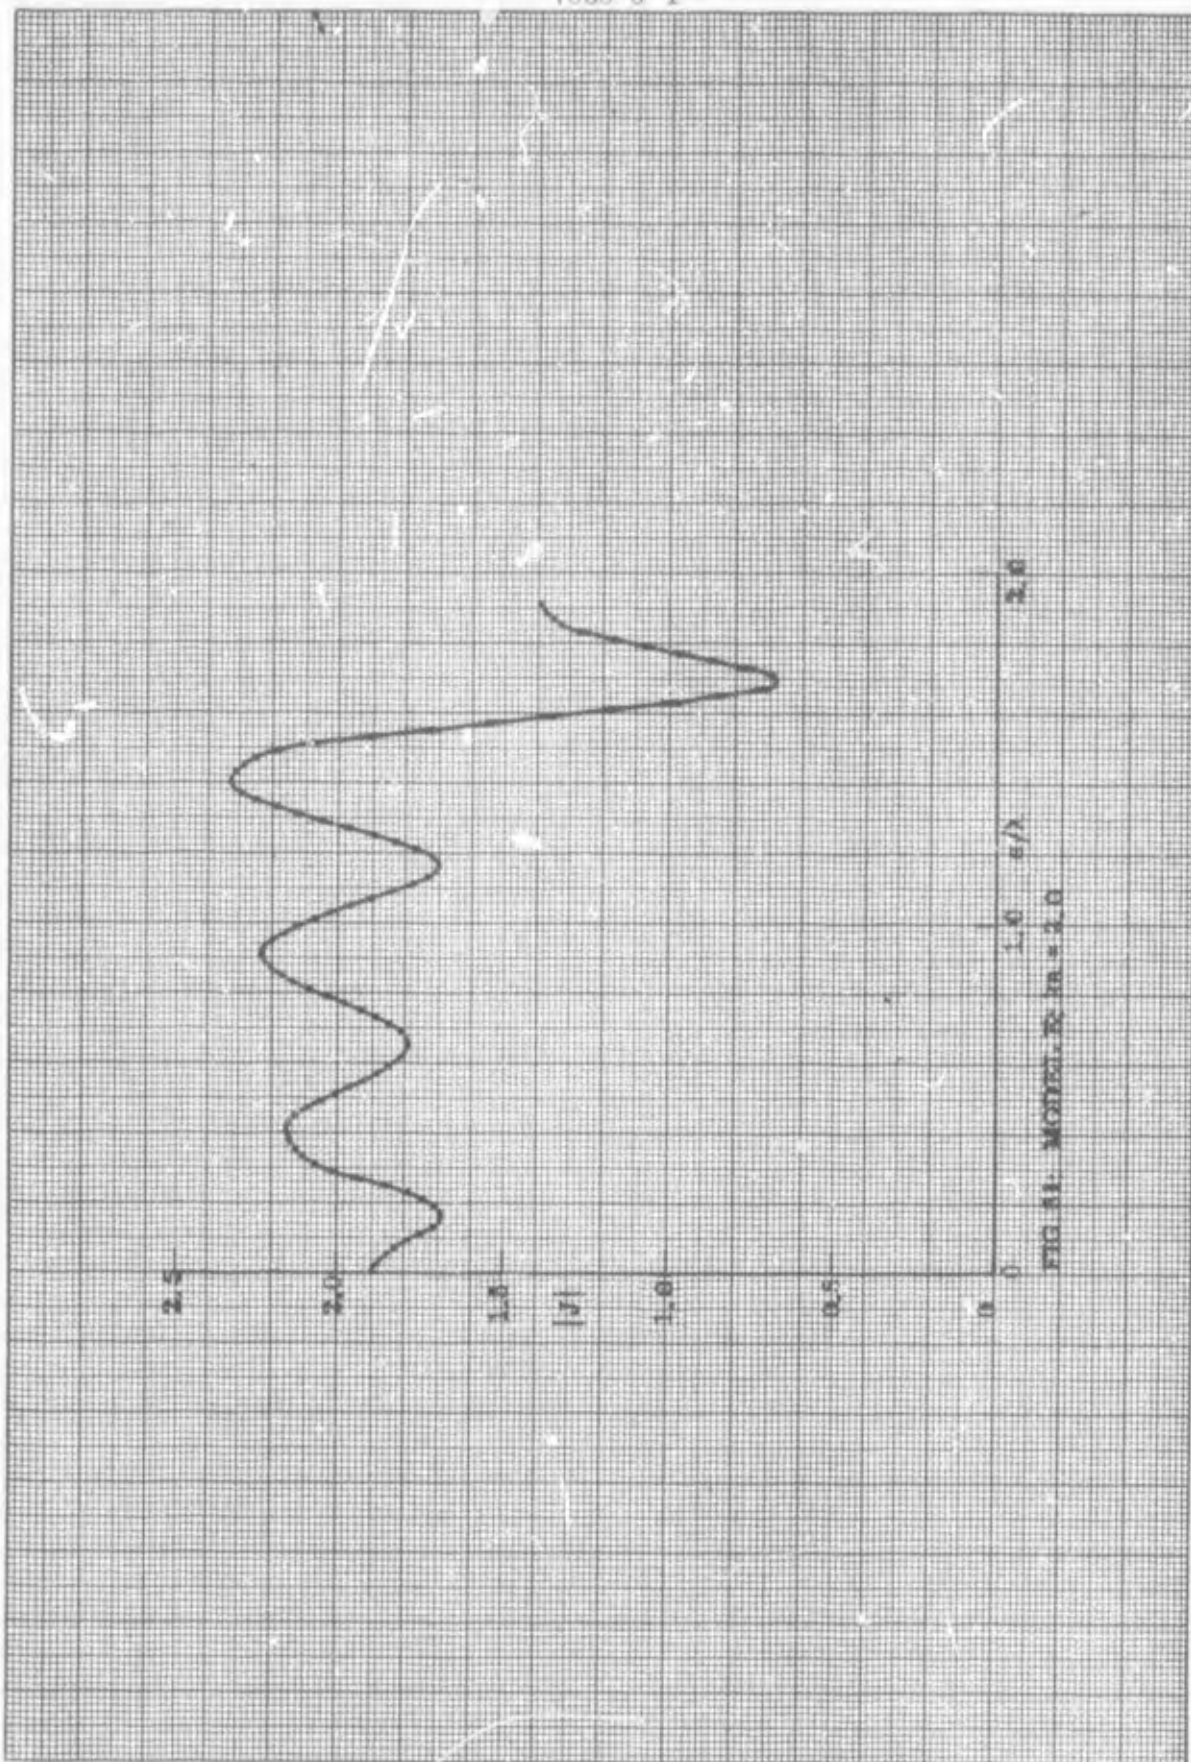




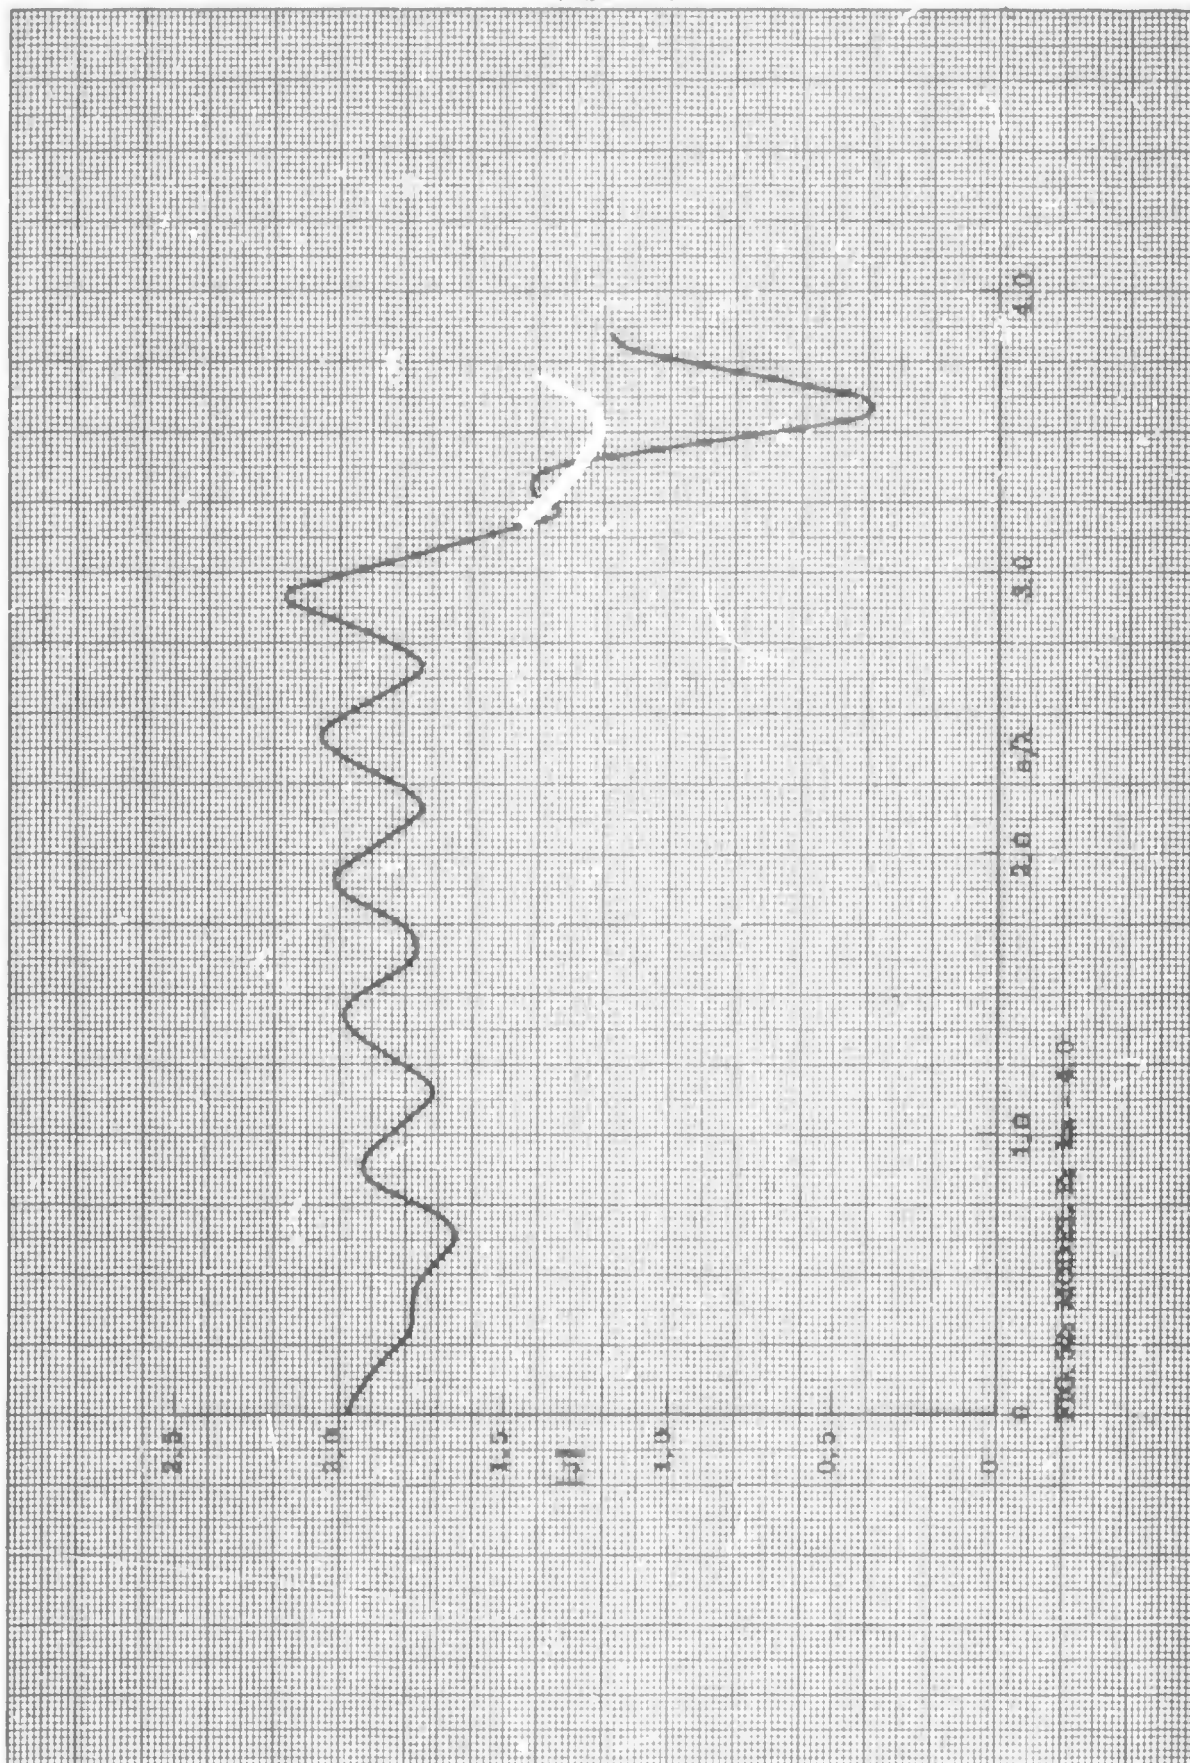



FIG. 52. MODEL 24

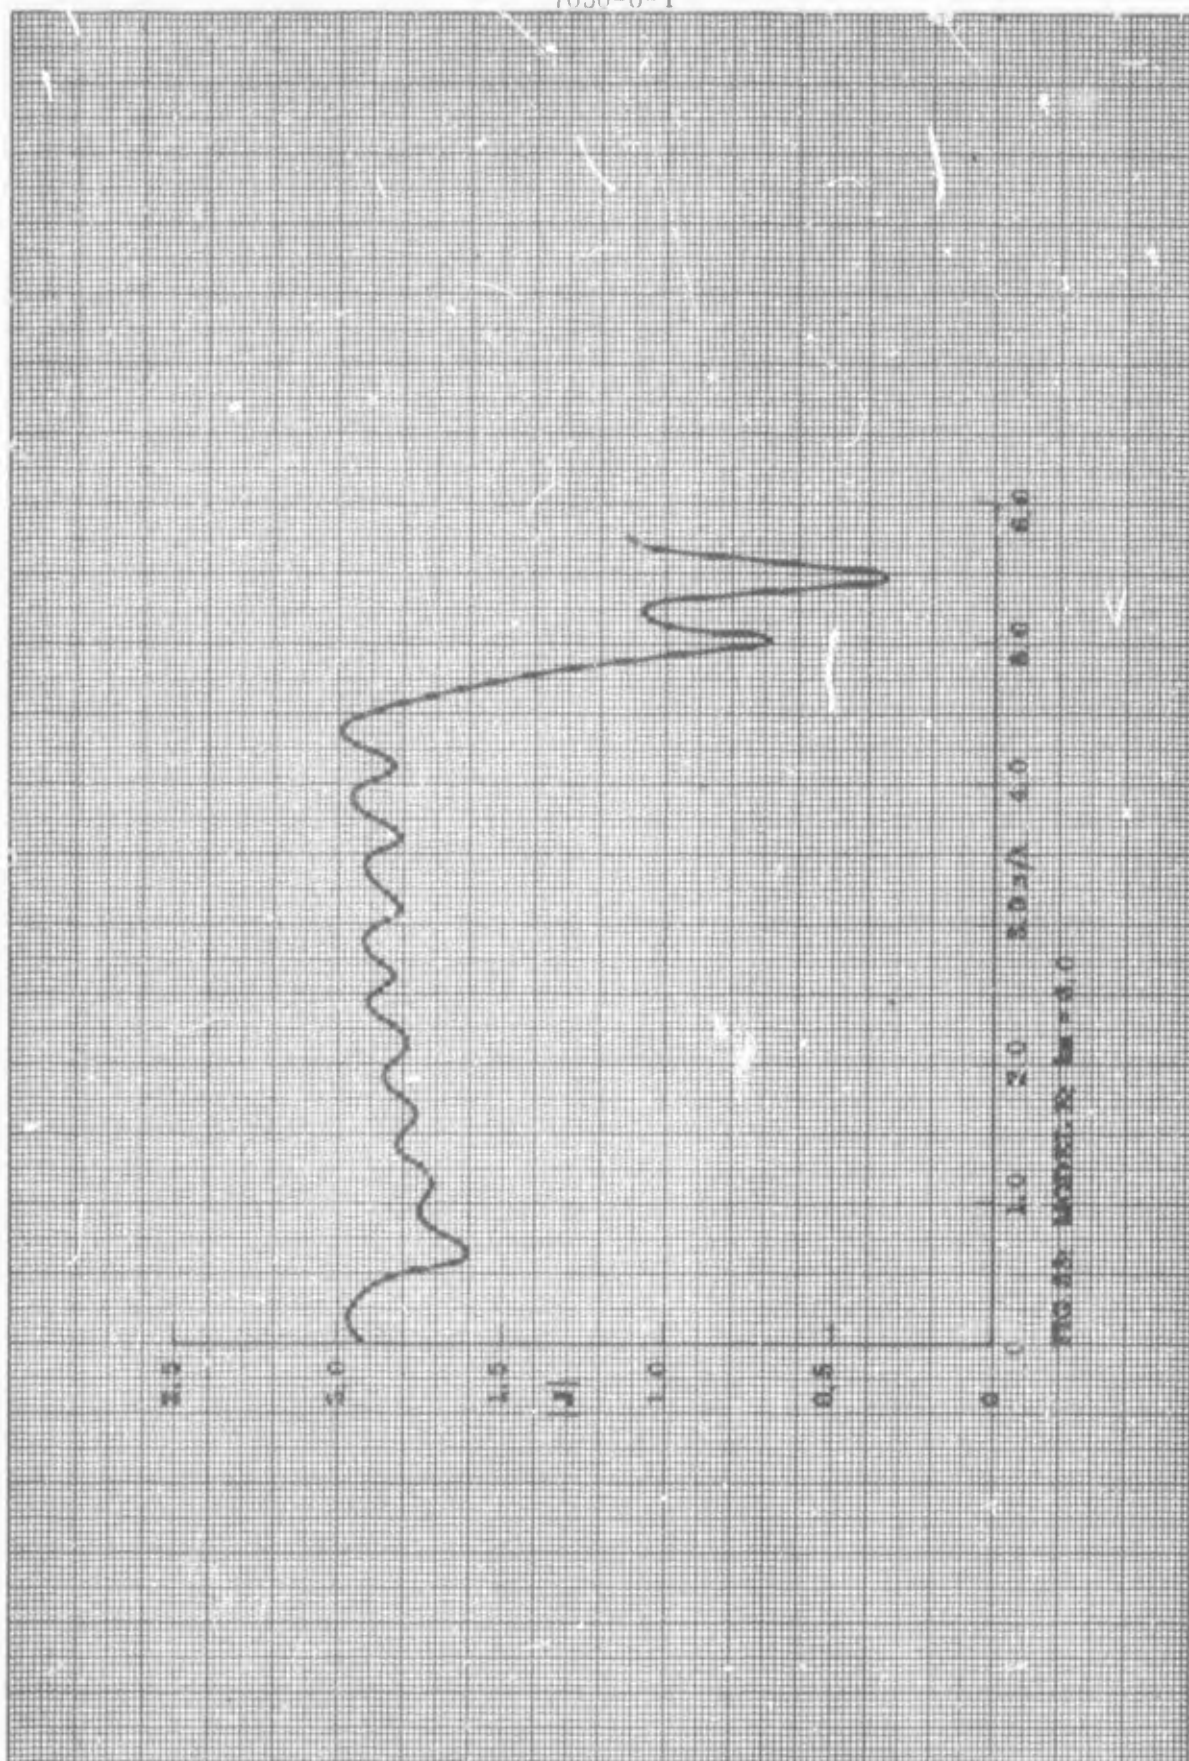



7030-B-T

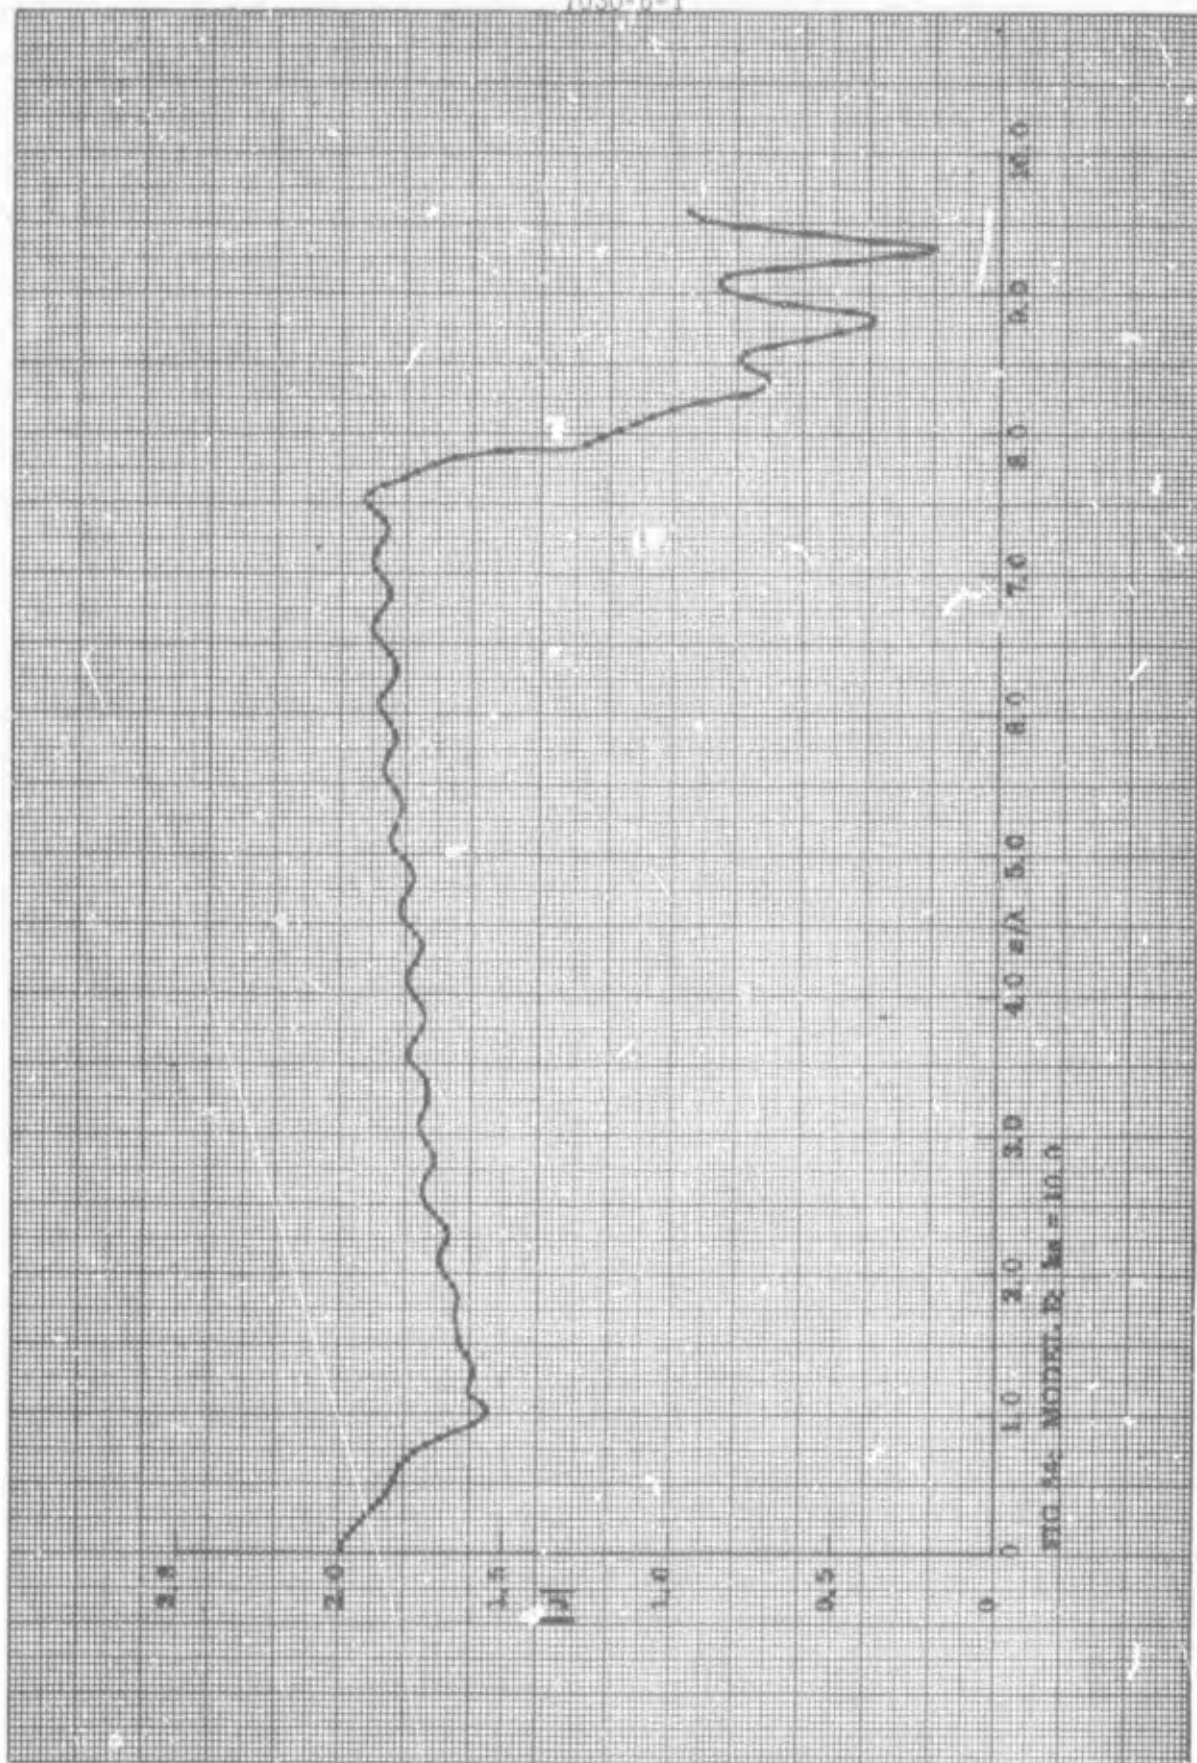

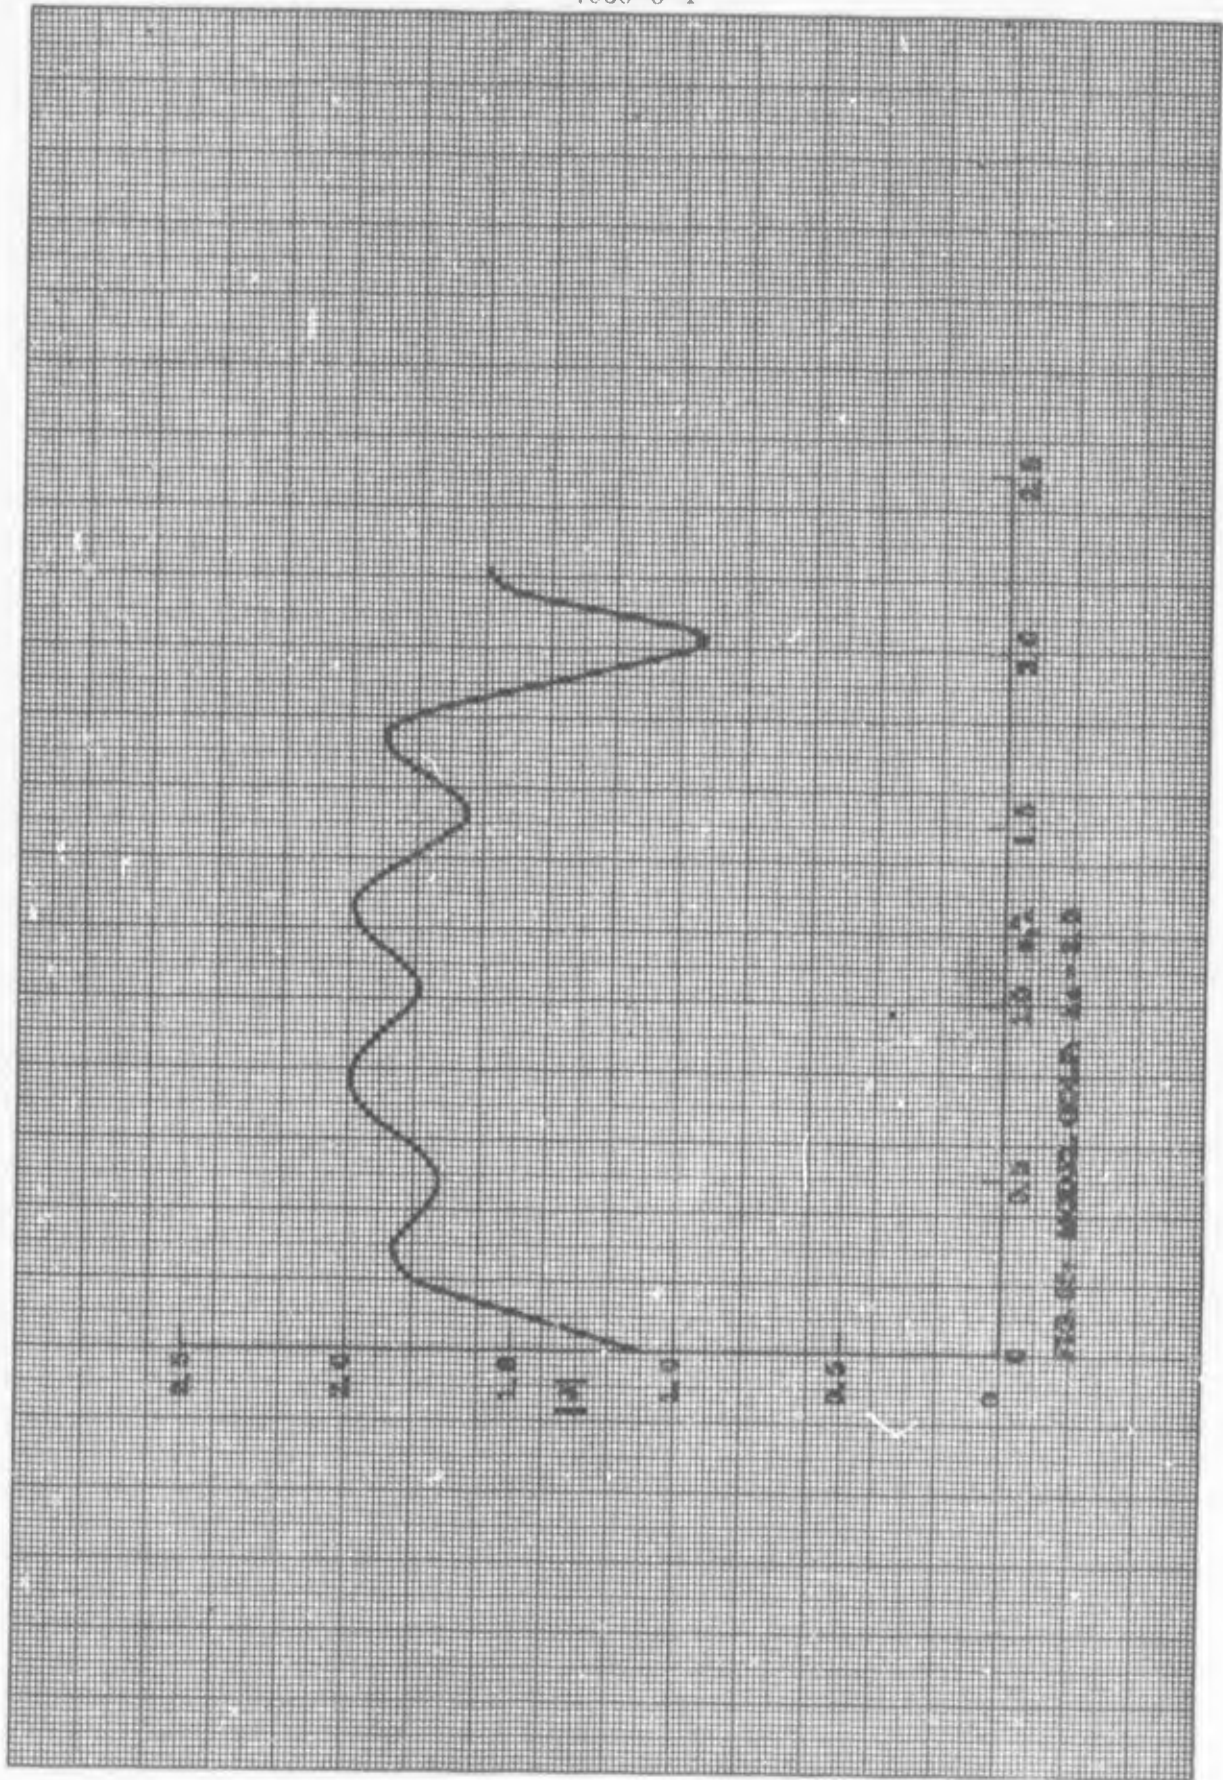

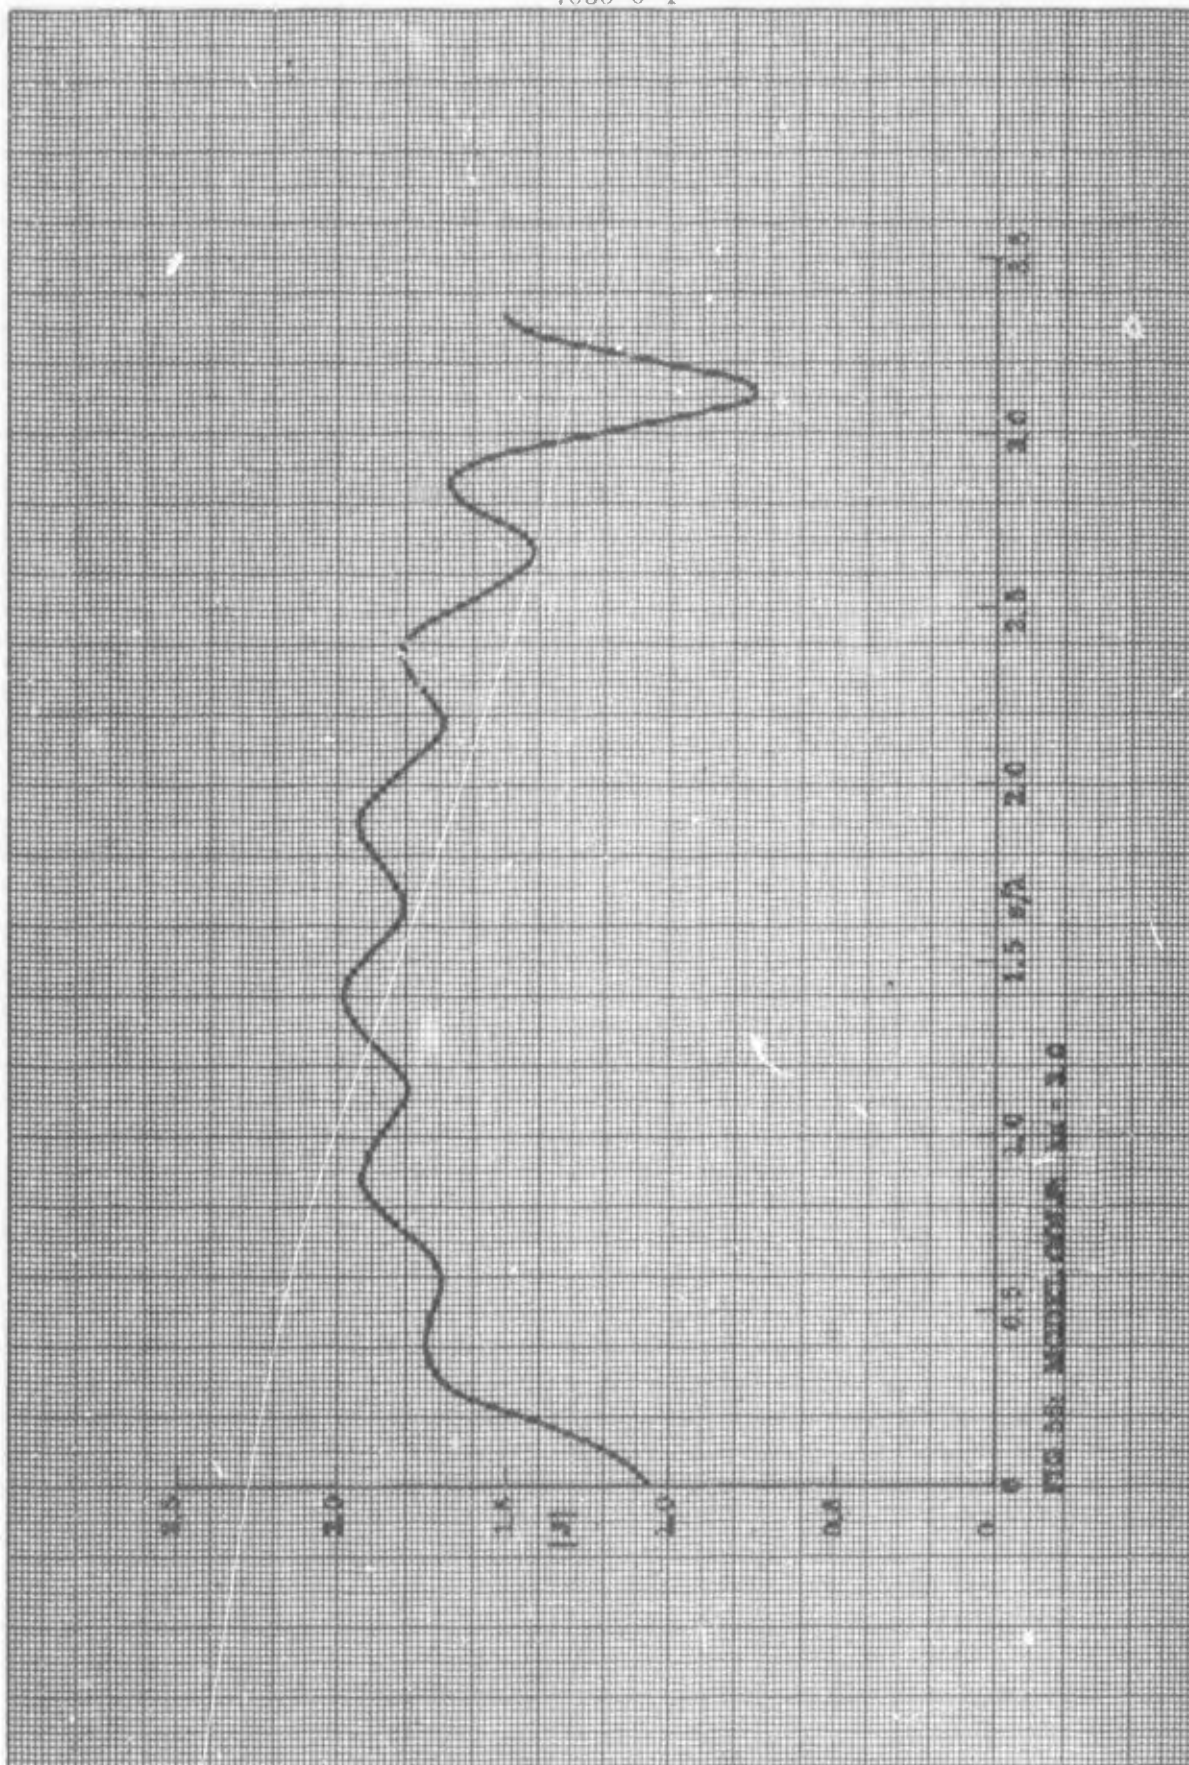

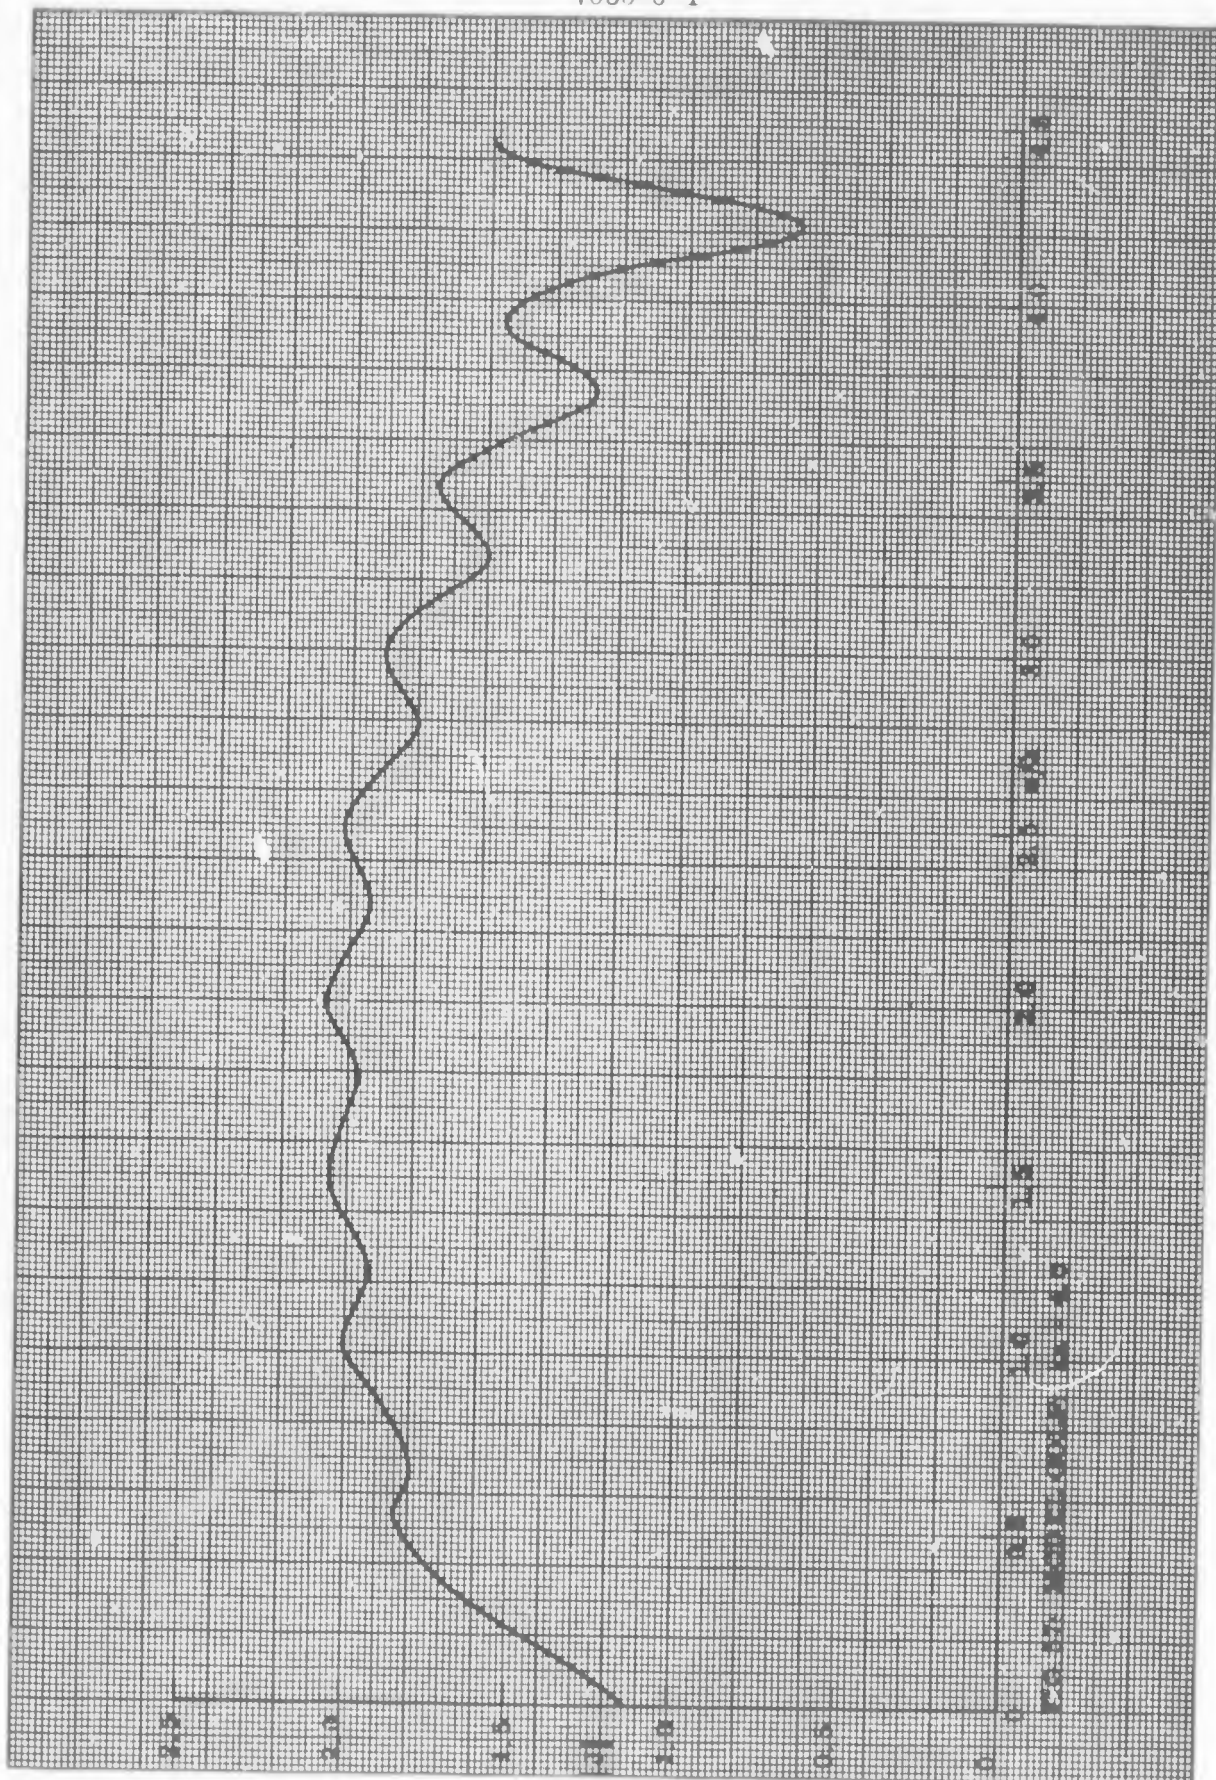

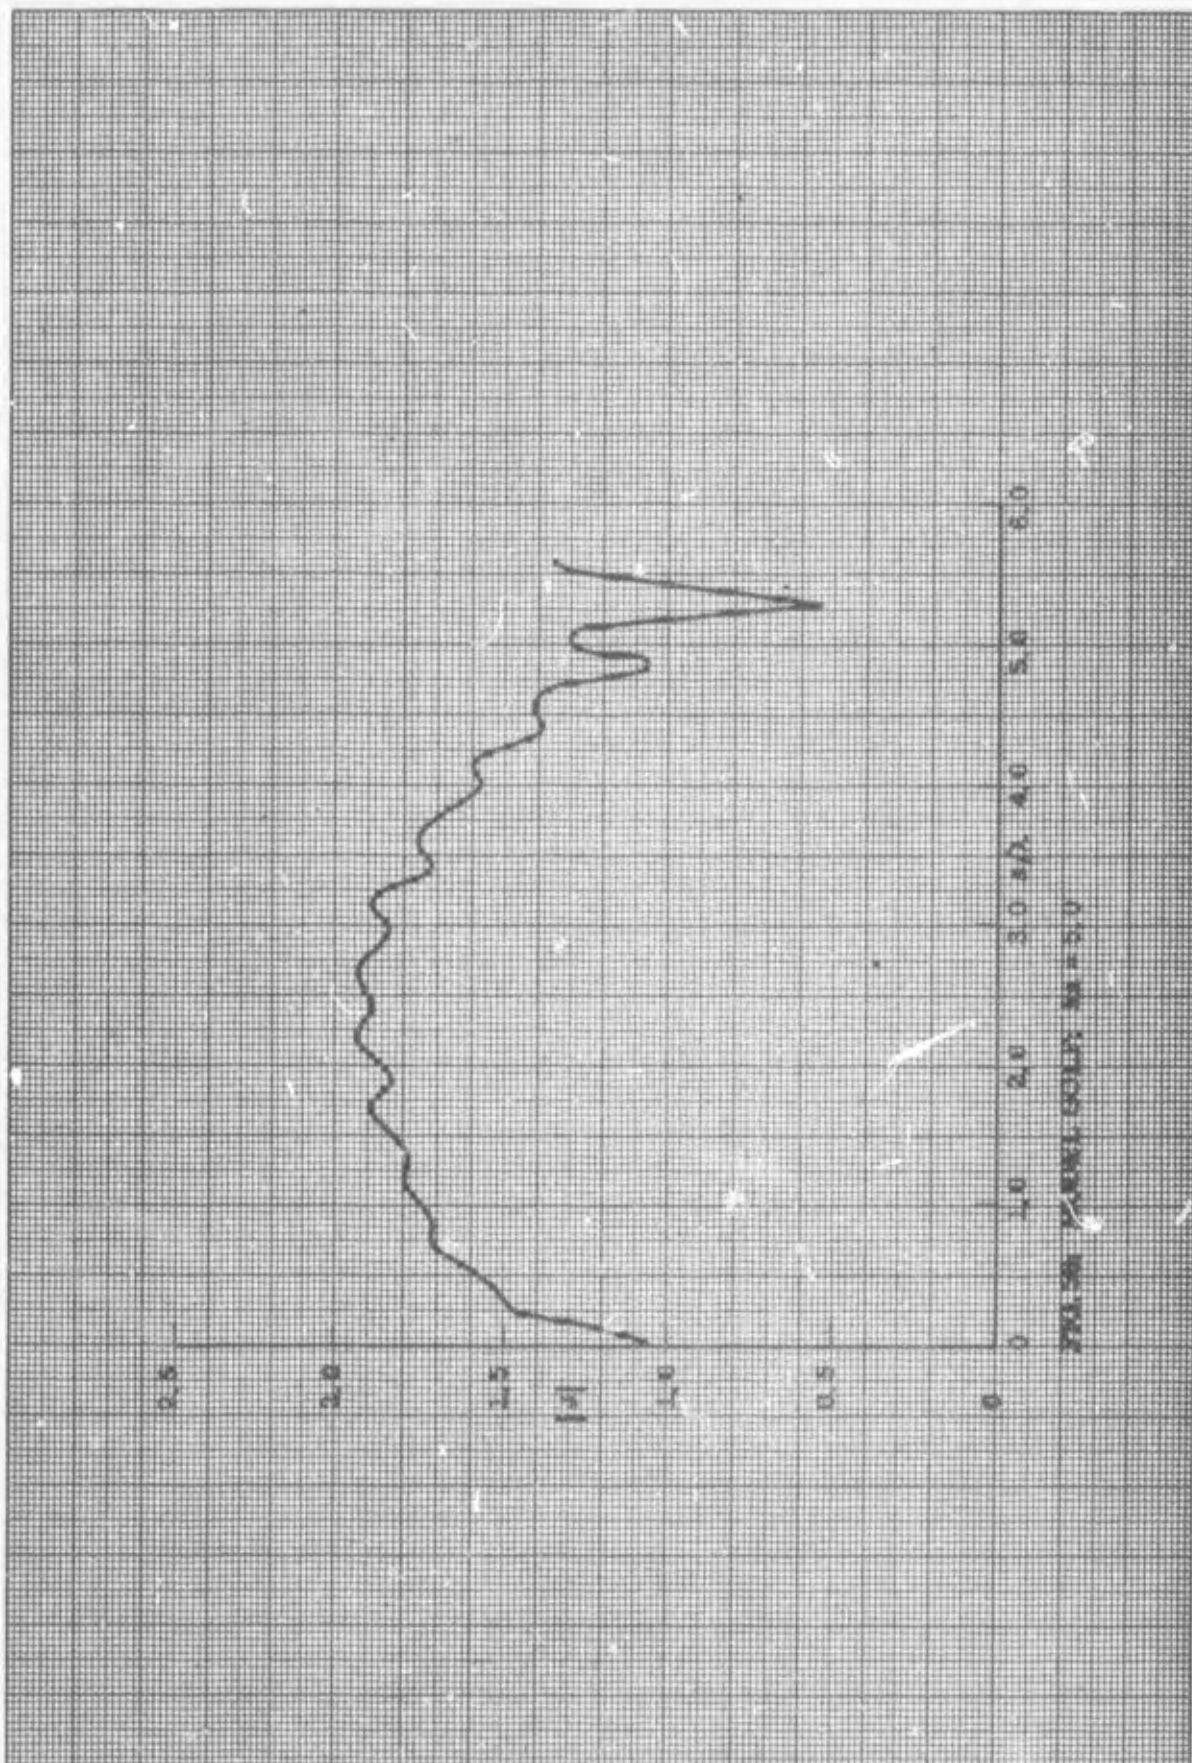

UNCLASSIFIED

Security Classification

DOCUMENT CONTROL DATA - R&D

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

1 ORIGINATING ACTIVITY (Corporate author) The University of Michigan Radiation Laboratory Department of Electrical Engineering		2a REPORT SECURITY CLASSIFICATION UNCLASSIFIED	
		2b GROUP	
3 REPORT TITLE Surface Field Data for Cone-Sphere-Like Objects			
4 DESCRIPTIVE NOTES (Type of report and inclusive dates) Technical Report			
5 AUTHOR(S) (Last name, first name, initial) Zukowski, Leon P Senior, Thomas B. A.			
6 REPORT DATE December 1965		7a TOTAL NO OF PAGES 68	7b NO OF REFS 3
8a CONTRACT OR GRANT NO AF 04(694)-683		9a ORIGINATOR'S REPORT NUMBER(S) 7030-6-T	
b. PROJECT NO		9b OTHER REPORT NO(S) (Any other numbers that may be assigned this report)	
c			
d			
10 AVAILABILITY/LIMITATION NOTICES Qualified Requestors may obtain copies of this report from DDC.			
11 SUPPLEMENTARY NOTES		12 SPONSORING MILITARY ACTIVITY USAF Ballistic Systems Division Norton AFB, California 92409	
13 ABSTRACT In the course of a recent study of the currents excited on the surfaces of various metallic objects by an incident plane wave, the surface fields have been measured for a number of cone-sphere-like objects. The prime purpose in making these measurements was to provide a basis for the development and checking of formulae for predicting the scattering behavior through approximations applied to the surface fields, and the conclusions reached from analyses of the data are described elsewhere ⁺ . Although it is realized that the results of such 'interpretative' studies are not everybody's 'cup of tea', it is felt that the experimental data itself may be of somewhat wider interest, and could be of particular value to those concerned with the verification of digital computer methods for the derivation of the surface field from the appropriate integral equations. A selection of the surface field traces has therefore been assembled and is presented. ⁺ Senior, T. B. A. and L. P. Zukowski (1966), "The Interpretation of Some Surface Field Data," The University of Michigan Radiation Laboratory Technical Report No. 7030-8-T. UNCLASSIFIED .			

DD FORM 1473
1 JAN 64UNCLASSIFIED
Security Classification

14	KEY WORDS	LINK A		LINK B		LINK C	
		ROLE	WT	ROLE	WT	ROLE	WT
ELECTROMAGNETIC SCATTERING SURFACE FIELDS CONE-SPHERE SHAPE							

INSTRUCTIONS

1. **ORIGINATING ACTIVITY:** Enter the name and address of the contractor, subcontractor, grantee, Department of Defense activity or other organization (*corporate author*) issuing the report.
- 2a. **REPORT SECURITY CLASSIFICATION:** Enter the overall security classification of the report. Indicate whether "Restricted Data" is included. Marking is to be in accordance with appropriate security regulations.
- 2b. **GROUP:** Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forces Industrial Manual. Enter the group number. Also, when applicable, show that optional markings have been used for Group 3 and Group 4 as authorized.
3. **REPORT TITLE:** Enter the complete report title in all capital letters. Titles in all cases should be unclassified. If a meaningful title cannot be selected without classification, show title classification in all capitals in parenthesis immediately following the title.
4. **DESCRIPTIVE NOTES:** If appropriate, enter the type of report, e.g., interim, progress, summary, annual, or final. Give the inclusive dates when a specific reporting period is covered.
5. **AUTHOR(S):** Enter the name(s) of author(s) as shown on or in the report. Enter last name, first name, middle initial. If military, show rank and branch of service. The name of the principal author is an absolute minimum requirement.
6. **REPORT DATE:** Enter the date of the report as day, month, year, or month, year. If more than one date appears on the report, use date of publication.
- 7a. **TOTAL NUMBER OF PAGES:** The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.
- 7b. **NUMBER OF REFERENCES:** Enter the total number of references cited in the report.
- 8a. **CONTRACT OR GRANT NUMBER:** If appropriate, enter the applicable number of the contract or grant under which the report was written.
- 8b, 8c, & 8d. **PROJECT NUMBER:** Enter the appropriate military department identification, such as project number, subproject number, system numbers, task number, etc.
- 9a. **ORIGINATOR'S REPORT NUMBER(S):** Enter the official report number by which the document will be identified and controlled by the originating activity. This number must be unique to this report.
- 9b. **OTHER REPORT NUMBER(S):** If the report has been assigned any other report numbers (*either by the originator or by the sponsor*), also enter this number(s).
10. **AVAILABILITY/LIMITATION NOTICES:** Enter any limitations on further dissemination of the report, other than those

imposed by security classification, using standard statements such as:

- (1) "Qualified requesters may obtain copies of this report from DDC."
- (2) "Foreign announcement and dissemination of this report by DDC is not authorized."
- (3) "U. S. Government agencies may obtain copies of this report directly from DDC. Other qualified DDC users shall request through _____."
- (4) "U. S. military agencies may obtain copies of this report directly from DDC. Other qualified users shall request through _____."
- (5) "All distribution of this report is controlled. Qualified DDC users shall request through _____."

If the report has been furnished to the Office of Technical Services, Department of Commerce, for sale to the public, indicate this fact and enter the price, if known.

11. **SUPPLEMENTARY NOTES:** Use for additional explanatory notes.
12. **SPONSORING MILITARY ACTIVITY:** Enter the name of the departmental project office or laboratory sponsoring (*paying for*) the research and development. Include address.
13. **ABSTRACT:** Enter an abstract giving a brief and factual summary of the document indicative of the report, even though it may also appear elsewhere in the body of the technical report. If additional space is required, a continuation sheet shall be attached.

It is highly desirable that the abstract of classified reports be unclassified. Each paragraph of the abstract shall end with an indication of the military security classification of the information in the paragraph, represented as (TS), (S), (C), or (U).

There is no limitation on the length of the abstract. However, the suggested length is from 150 to 225 words.

14. **KEY WORDS:** Key words are technically meaningful terms or short phrases that characterize a report and may be used as index entries for cataloging the report. Key words must be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location, may be used as key words but will be followed by an indication of technical context. The assignment of links, rules, and weights is optional.