

AD-A108 046

NUS CORP ROCKVILLE MD
CAMERON STATION ENERGY AUDIT BUILDING NUMBER 3.(U)
JUL 81 D A STUDLEY

F/6 13/1


DACA31-80-D-0019

UNCLASSIFIED

USAFESA-T-2105


NL

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193

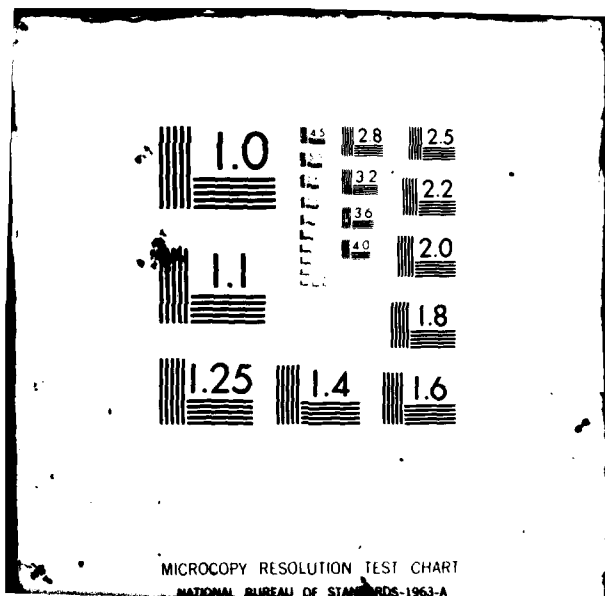

LEVEL ✓

②



**United States Army
Corps of Engineers**

... Serving the Army
... Serving the Nation

FACILITIES ENGINEERING SUPPORT AGENCY

U FESA-T-2105

Cameron Station Energy Audit, Building No. 3


NUS Corporation
4 Research Place
Rockville, Maryland 20850

September 1981

Final Report

APPROVED FOR PUBLIC RELEASE; DISTRIBUTION UNLIMITED

Prepared for:
US Army Facilities Engineering Support Agency
Technology Support Division
Fort Belvoir, VA 22060



AD A108046

DTIC FILE COPY

81 02 02 008

Notice

The contents of this report are not to be used for advertising, publication, or promotional purposes. Citation of trade names does not constitute an official indorsement or approval of the use of such commercial products. The findings of this report are not to be construed as an official Department of the Army position, unless so designated by other authorized documents.

Comments

Comments on the contents of this report are encouraged, and should be submitted to:

Commander and Director
US Army Facilities Engineering Support Agency
Fort Belvoir, Virginia 22060

CAMERON STATION ENERGY AUDIT

BUILDING NO. 3

PREPARED UNDER

CONTRACT NO. DACA 31-80-D-0019


AMENDMENT NO. 00005

PREPARED FOR
U.S. DEPARTMENT OF THE ARMY
CORPS OF ENGINEERS
FACILITIES ENGINEERING SUPPORT AGENCY
FORT BELVOIR, VIRGINIA 22060


PREPARED BY
NUS CORPORATION
4 RESEARCH PLACE
ROCKVILLE, MARYLAND 20850

September 1981

Author


D. A. Studley
Project Engineer

Approved


M. R. Mychajliw, Manager
Mechanical Engineering Department

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

19 REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER 249 AFESA-T-2105	2. GOVT ACCESSION NO. AD-A108 046	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) Cameron Station Energy Audit Building No. 3 <i>(Vancouver)</i>		5. TYPE OF REPORT & PERIOD COVERED (9) Final rept.
7. AUTHOR(s) NU5 Corporation		6. PERFORMING ORG. REPORT NUMBER
9. PERFORMING ORGANIZATION NAME AND ADDRESS US Army Facilities Engineering Support Agency Technology Support Division Fort Belvoir, VA 22060		8. CONTRACT OR GRANT NUMBER(s) (15) DACA 31-80-D-0019 Amendment No. 00005
11. CONTROLLING OFFICE NAME AND ADDRESS James A. Carelock, Project Engineer USA FESA (703) 664-5732		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS (10) D. A. / study
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		12. REPORT DATE (11) July 1981
		13. NUMBER OF PAGES (13) 403
16. DISTRIBUTION STATEMENT (of this Report) APPROVED FOR PUBLIC RELEASE, DISTRIBUTION UNLIMITED		15. SECURITY CLASS. (of this report) UNCLASSIFIED
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Energy Conservation, energy audit		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) The results of an energy audit on Building No. 3 Cameron Station are detailed herein. The report investigates various systems which consume energy in order to identify energy conservation opportunities. These selected systems include HVAC equipment, temperature and humidity controls, heat recovery equipment, building insulation, ventilation rate reduction, lighting systems and domestic hot water. The study analyzes energy conservation opportunities to determine which are cost effective and produce adequate energy savings.		

DD FORM 1 JAN 73 1473

EDITION OF 1 NOV 65 IS OBSOLETE

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

404340

CAMERON STATION ENERGY AUDIT

BUILDING NO. 3

TABLE OF CONTENTS

	Page No.
1.0 <u>EXECUTIVE SUMMARY</u>	iii
1.1 Introduction	iii
1.2 Objectives	iii
1.3 Conclusion And Findings	iii
2.0 <u>CURRENT ENERGY PROFILE</u>	7
2.1 Total Energy Consumption	
3.0 <u>TECHNICAL DESCRIPTION OF MODIFICATIONS AND RECOMMENDATIONS</u>	9
3.1 Modification No. 1 - Add Insulation To Ceiling	9
3.2 Modification No. 2 - Repair Economizer Controls And Reduce Ventilation Rates	15
3.3 Modification No. 3 - Add Shut-Off Damper To Outdoor Air Intake	17
3.4 Modification No. 4 - Reschedule Air Handling Unit Operation	20
3.5 Modification No. 5 - Relocate Master Thermostats	21
4.0 <u>BASIS FOR ANALYSIS</u>	23
4.1 Load Calculations	23
4.2 Escalation And Inflation Rates	23
4.3 Fuel And Utility Costs	23
Appendix A Supplementary Calculation	A-i
Appendix B Computer Output Summarys	B-1

Accession For	
NTIS GR&I	☒
DTIC TAB	☐
Unannounced	☐
Justification	
By _____	
Distribution/	
Availability Codes	
Avail and/or	
Dist	Special
A	

CAMERON STATION ENERGY AUDIT

BUILDING NO. 3

LIST OF TABLES

Table 1	Summary of Energy Conservation Measures	3
Table 2	Economic Analysis Summary, Modification 1, Alternate C	12
Table 3	Economic Analysis Summary, Modification 1, Alternate B	13
Table 4	Economic Analysis Summary, Modification 1, Alternate A	14
Table 5	Economic Analysis Summary, Modification 2	16
Table 6	Economic Analysis Summary, Modification 3	19
Table 7	Economic Analysis Summary, Modification 5	22

LIST OF FIGURES

Figure 1	Site Plan	5
Figure 2	Floor Plan	6
Figure 3	Energy Profile	8
Figure 4	Energy Cost Profile	8
Figure 5	Energy Savings From Adding Several Thicknesses Of Insulation	11
Figure 6	Modification No. 3 Schematic	18

1.0 EXECUTIVE SUMMARY

1.1 INTRODUCTION

This report is in response to Contract No. DACA 31-80-D-0019, Amendment 00005 with the U.S. Department of the Army to perform an energy conservation study on building No. 3 of Cameron Station. During the early 60's, building No. 3 was converted to administrative office space, after having served as a warehouse for many years. All of the office space is contained on a single floor with a total area of approximately 130,000 sq. ft. The building envelope consists of windowless, three course brick walls with a pitched roof that is separated from occupied space by a suspended ceiling. The 21 HVAC units located in the plenum space above the ceiling, provide comfort conditioning thru the use of steam heating and chilled water cooling.

1.2 OBJECTIVES

The objectives of this energy conservation study are as follows:

- a. Investigate various systems which consume energy in order to identify energy conservation opportunities. These selected systems include HVAC equipment, temperature and humidity controls, heat recovery equipment, building insulation, ventilation rate reduction, lighting systems and domestic hot water.
- b. Analyze energy conservation opportunities to determine which are cost effective and produce adequate energy savings. Provide design concepts, cost estimates and economic analyses to quantify the implementation of the proposed measures.

1.3 CONCLUSION AND FINDINGS

The results of the study, indicate the potential for saving 2787.5 MBTU/yr (10^6 BTU/yr) or \$27,206 per year (FY81) with a total capital investment of \$117,600 and a survey cost of \$15,600. The savings can be

realized from both capital intensive and non-capital intensive modifications. The energy saving measures represent 29 percent of the present energy costs. See Table 1 for a summary of modifications and economic analyses. See Section 3 of this report for a detailed discussion of each modification.

Many of the non-capital intensive modifications are maintenance deficiencies that have resulted in a greater consumption model than the original design. The maintenance items include the following:

- a. Uncalibrated and faulty economizer controls.
- b. Sticky or disconnected damper operators.
- c. Air Handling Unit (AHU) time-clocks without all or any of the necessary devices to trip or actuate unit operation. Several of the time-clocks were installed but never set up.

NUS feels that these maintenance deficiencies should be remedied regardless of the economic analysis. However the analysis does show economic benefits from correcting these problems.

Due to the structural and mechanical similarities among all eight major buildings at Cameron Station, NUS feels that benefits similar to those predicted for building No. 3 could be realized by investigating the proposed modifications' applicability to the other buildings. Adding insulation, calibrating controls and reducing ventilation rates will all lead to energy savings similar to those expected from building No. 3.

In addition, NUS feels that adding individual steam, cooling water, and electricity metering capabilities for each building will increase control over the energy consumption profile. Metering energy consumption on building 3 both before and after the modifications are implemented will increase the accuracy of the energy analysis on the remaining seven buildings, thereby helping Cameron Station reach its energy conservation goals.

During the energy analysis, several energy conservation measures were observed that cannot be implemented without either modifying all of the buildings or modifying the central plants. The following observations are basewide deficiencies that could be investigated.

- a. One possible modification is to add insulation to the steam condensate return system. The existing condensate lines have no insulation and are currently wasting approximately 100 BTU's per pound of steam generated. In 1979 the central steam generating plant produced 59.33 million lbs. of steam. Assuming that the addition of insulation could save 50 BTU per pound of steam, a yearly saving of 2967 MBTU/yr or \$25,300/yr (FY 81) would be realized.
- b. Another possible modification is to raise the chilled water temperature. A higher chilled water temperature saves energy by (1) decreasing the heat gain to piping (10-15 percent of the piping gains) and (2) increasing the refrigeration equipment efficiency. The current chilled water plant provides 40°F water throughout the entire cooling season. The chilled water controller should be adjusted to maintain the highest possible temperature; 55°F should be the minimum to comply with the Emergency Building Temperature Restriction. During periods of high outdoor humidity or peak cooling load, the temperature of the chilled water could be gradually lowered to 45°F or 40°F. As a general rule, efficiency increases 1½ percent for each degree of increase in chilled water temperature. Utilizing a 50°F chilled water temperature could save up to 2000 MBTU/yr or \$6,660/yr (FY 81).

TABLE 1
SUMMARY OF ENERGY CONSERVATION MEASURES

Recommendation	Energy Savings (FY 81)	Energy Savings Purchased Electric Power	Capital Investment (Dollars)	Simple Payback Period (Yr.)	Discounted Benefit/Cost Ratio	E/C Ratio
Modification No. 1 Alternate A - Add 9" of Ceiling Insulation	1160 MBTU/Yr. \$9,131/Yr.	150 MBTU/Yr.	\$72,300	7.92	2.37	16.04
Modification No. 1 Alternate B - Add 6" of Ceiling Insulation	1060 MBTU/Yr. \$8,434/Yr.	121 MBTU/Yr.	\$45,900	5.44	3.46	23.1
Modification No. 1 Alternate C - Add 3" of Ceiling Insulation	805 MBTU/Yr. \$6,468/Yr.	78 MBTU/Yr.	\$38,520	5.96	3.16	20.9
Modification No. 2 Replace Economizer Controls and Reduce Ventilation	1230 MBTU/Yr. \$9,274/Yr.	239 MBTU/Yr.	\$33,000	3.56	3.4	37.3
Modification No. 3 Add Outdoor Air Shut-off Damper and Steam Isolation Valve	230 MBTU/Yr. \$1,961/Yr.	--	\$11,750	5.99	2.06	19.6
Modification No. 4 Reschedule AHU Operation	157 MBTU/Yr. 117.4 x 10 ³ KWH/Yr. \$6,750/Yr.	1362 MBTU/Yr.	--	--	--	--

T. 1.1

SUMMARY OF ENERGY CONSERVATION MEASURES

Recommendation	Energy Savings (FY 81)	Energy Savings Purchased Electric Power	Capital Investment (Dollars)	Simple Payback Period (Yr.)	Discounted Benefit/Cost Ratio	E/C Ratio
Modification No. 5 Relocate Thermostats (7 Thermostats)	10.5 MBTU/Yr. \$90/Yr.	--	\$560	6.2	2.1	18.8
TOTAL: = (Using 9" Insulation)	\$27,206 2787.5 MBTU/Yr.	--	\$117,610 + Survey Cost = \$133,210	4.9		

CAMERON STATION ENERGY AUDIT BUILDING NO. 3

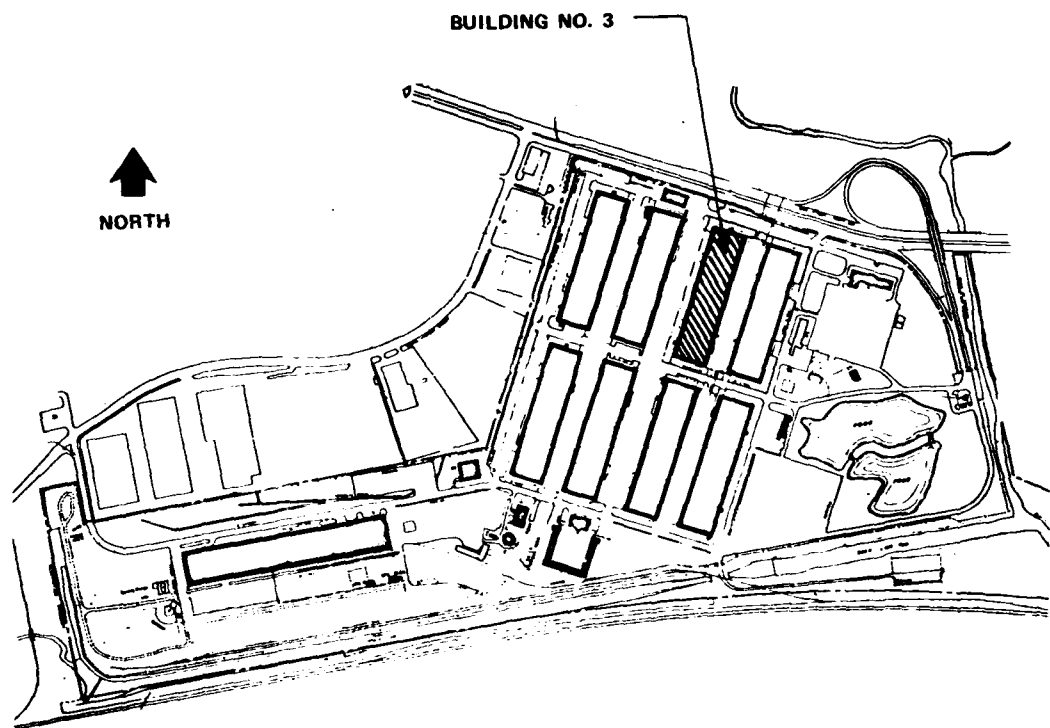


FIGURE 1
SITE PLAN

CAMERON STATION ENERGY AUDIT BUILDING NO. 3

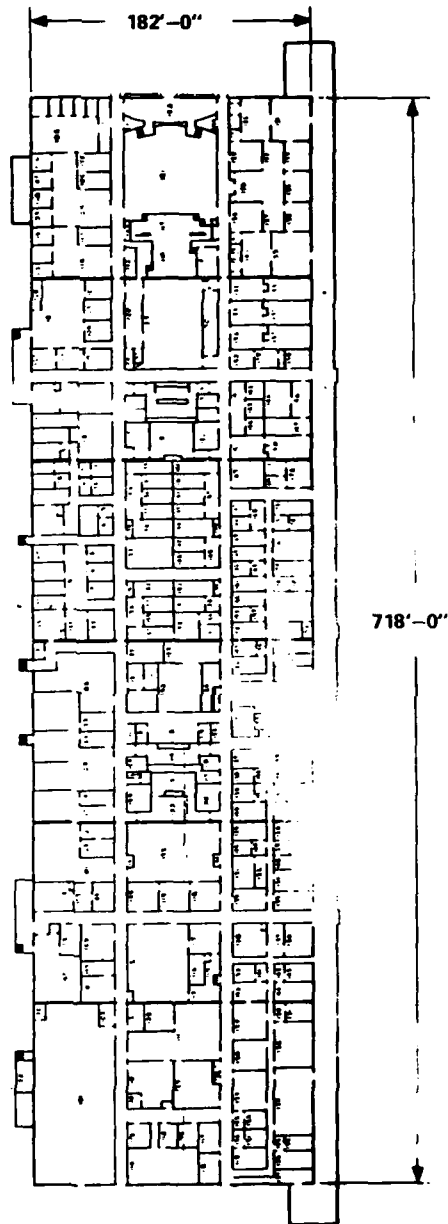


FIGURE 2
FLOOR PLAN

2.0 CURRENT ENERGY PROFILE

2.1 TOTAL ENERGY CONSUMPTION

Figure 3 shows graphically the current energy consumption for building 3 of Cameron Station. The quantity of energy consumed is based on detailed review of the building drawings, visual inspection, analysis of the building dynamics, and limited records from the existing monitoring equipment. The eight major buildings at Cameron Station are not individually monitored for their consumption of electricity, steam, and cooling water. Recently, a kilowatt-hour meter was installed to monitor the combined load for buildings 3 and 4. Figure 4 shows graphically the total cost of energy consumption for fiscal year 1980. The total energy consumption is 10,355 MBTU/yr. at a present cost of \$92,290. With a combined inflation and escalation rate of 14 percent per year, the estimated energy cost for building No. 3 in 1990 will be \$342,139. Implementing all of the proposed energy conservation measures will reduce the energy cost for 1990 to \$242,280.

CAMERON STATION ENERGY AUDIT BUILDING NO. 3

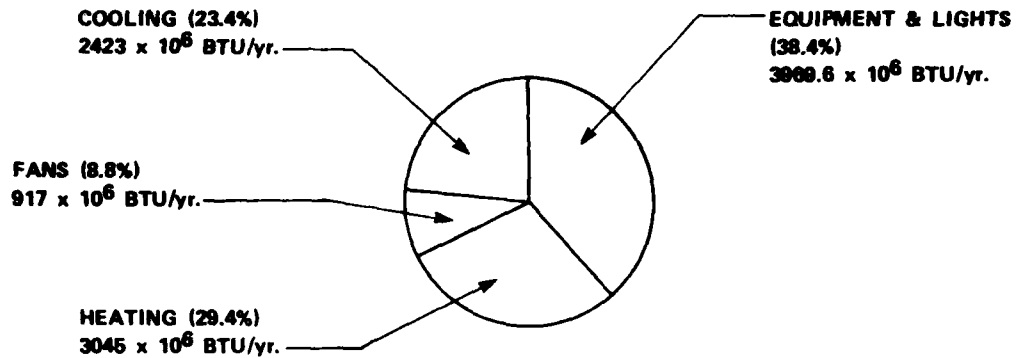


FIGURE 3
ENERGY PROFILE (MILLION BTU'S/yr.)
TOTAL CONSUMPTION = 10,355 MBTU/yr.

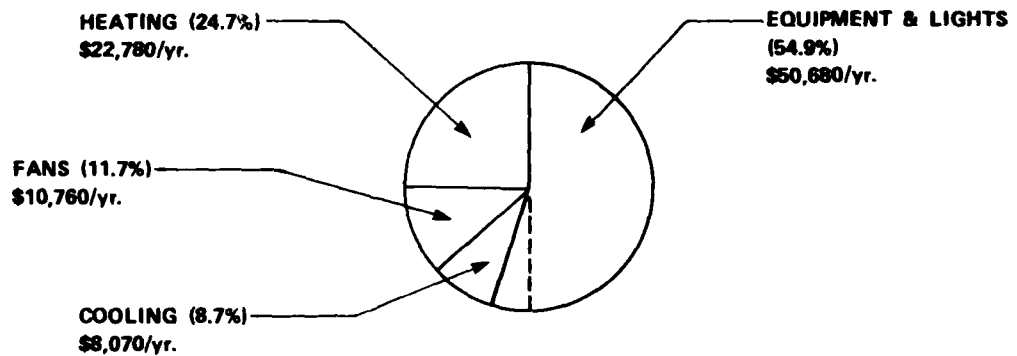


FIGURE 4
ENERGY COST PROFILE (DOLLARS)
TOTAL COST = \$92,290/yr.

3.0 MODIFICATIONS AND RECOMMENDATIONS

3.1 MODIFICATION NO. 1 - ADD INSULATION TO CEILING

During the field survey, it was observed that the only portion of the building envelope requiring thermal improvement is the space above the suspended ceiling. The exterior walls provide an overall U-Value = $0.281 \text{ BTU/hr/}^{\circ}\text{F/S.F.}$, which is lower than the maximum U-Value required by ASHRAE Std. 90-75 (Energy Conservation in New Building Design). The low U-Value is due to lack of windows on the exterior walls. However, the composite ceiling U-Value is greater than maximum required in ASHRAE Std. 90-75. The existing insulation is decayed and has settled to an average thickness of approximately 1 inch.

Adding insulation to the suspended ceiling saves energy by (1) decreasing the heat flow rate thru the ceiling during the occupied hours, and, (2) keeping the heat within the space during unit shut-down. However, adding insulation increases the quantity of heat required to protect piping in the plenum space from freezing.

The station is currently attempting to reduce energy consumption basewide by shutting the steam plant down during the evening hours. As a result of this procedure several pipes in the plenum space have frozen, fortunately with no damage to the equipment below.

Freeze-protection for the overhead piping was originally provided with steam unit heaters located in the plenum space. To correct the freezing problems the base will have to either provide continuous steam to these heaters or provide steam at a lower pressure during the evenings or install electric space heaters. During the analysis of the effects of adding insulation, the additional heat required to the plenum was deducted from the savings, but the capital costs of providing a means of freeze-protection was not included because it is an existing problem that must be remedied.

Figure 5 shows the overall effects of adding various thicknesses of insulation. Adding R-19 insulation (typically 6 inches) saves 1060 MBTU/yr or \$8,434/yr (FY 81), while adding R-30 insulation (typically 9 inches) saves 1160 MBTU/yr or \$9,131/yr (FY 81). The Economic Analysis Summary Forms show the 6 inch insulation has the best E/C ratio and pay-back period.

CAMERON STATION ENERGY AUDIT BUILDING NO. 3

ENERGY SAVINGS FROM ADDING VARIOUS
THICKNESSES OF INSULATION TO THE SUSPENDED CEILING

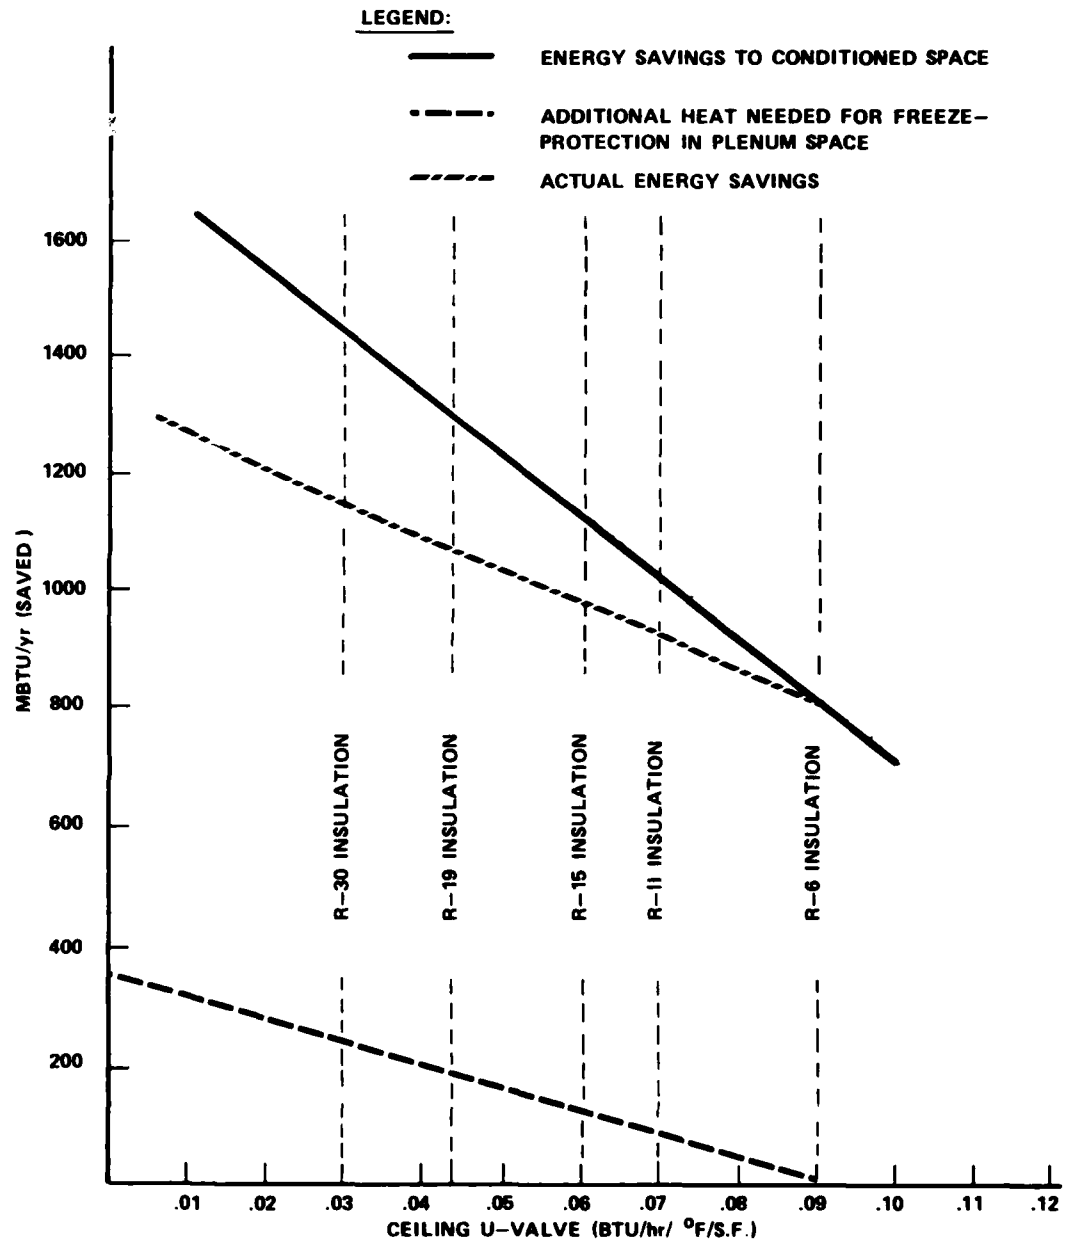


FIGURE 5

TABLE 2
ECONOMIC ANALYSIS SUMMARY

Location: Cameron Station Energy Audit, Bldg. No. 3 FY 81
Project: Modification No. 1 (Alternate C) Add 3" of Ceiling Insulation
Economic Life 25 Yrs. Date Prepared 1/8/81 Prepared by D. Studley

COSTS

1. Non-Recurring Initial Capital Costs:	
a. CWE	\$ 38,520
b. Design	\$ 2,311
c. _____	\$ _____
d. Total	\$ 40,831

BENEFITS

2. Recurring Benefit/Cost Differential Other than Energy:	
a. Annual Labor Decrease (+)/Increase (-)	\$ 0
b. Annual Material Decrease (+)/Increase (-)	\$ 0
c. Other Annual Decrease (+)/Increase (-)	\$ 0
d. Total Costs	\$ 0
e. 10% Discount Factor	\$ 0
f. Discounted Recurring Cost (d x e)	\$ 0
3. Recurring Energy Benefit/Costs:	
a. Type of Fuel: No.6 Fuel Oil	
(1) Annual Energy Decrease (+)/Increase (-)	724 MBTU/Yr.
(2) Cost per MBTU	\$ 8.53/MBTU
(3) Annual Dollar Decrease/Increase ((1)x(2))	\$ 6176/Yr.
(4) Differential Escalation Rate (8 %) Factor	20.050
(5) Discounted Dollar Decrease/Increase (3)x(4)	\$ 123,829
b. Type of Fuel: Electricity-Cooling	
(1) Annual Energy Decrease (+)/Increase (-)	81 MBTU/Yr.
(2) Cost per MBTU	\$ 3.60/MBTU
(3) Annual Dollar Decrease/Increase ((1)x(2))	\$ 292/Yr.
(4) Differential Escalation Rate (7 %) Factor	18.049
(5) Discounted Dollar Decrease/Increase ((3)x(4))	\$ 5,270
c. Type of Fuel: _____	
(1) Annual Energy Decrease (+)/Increase (-)	_____
(2) Cost per MBTU	\$ _____
(3) Annual Dollar Decrease/Increase ((1)x(2))	\$ _____
(4) Differential Escalation Rate (____ %) Factor	_____
(5) Discounted Dollar Decrease/Increase ((3)x(4))	\$ _____
d. Discounted Energy Benefits (3a(5)+3b(5)+3c(5)+3d(5))	\$ 129,099
4. Total Benefits (Sum 2f+3d)	\$ 129,099
5. Discounted Benefit/Cost Ratio (Line 4/Line 1d)	3.16
6. Total Annual Energy Savings (3a(1)+3b(1)+3c(1))	805 MBTU/Yr.
7. E/C Ratio (Line 6 ÷ Line 1a/1000)	20.9
8. Annual \$ Savings (2d+3a(3)+3b(3)+3c(3))	\$ 6,468/Yr.
9. Pay-Back Period ((Line 1a - Salvage)+Line 8)	5.96 Yr.

TABLE 3
ECONOMIC ANALYSIS SUMMARY

Location: Cameron Station Energy Audit, Bldg. No. 3 FY 81
Project: Modification No. 1 (Alternate B) Add 6" of Ceiling Insulation

Economic Life 25 Yrs. Date Prepared 1/8/81 Prepared by D. Studley

COSTS

1. Non-Recurring Initial Capital Costs:	
a. CWE	\$ 45,900
b. Design	\$ 2,754
c. _____	\$ _____
d. Total	\$ 48,654

BENEFITS

2. Recurring Benefit/Cost Differential Other than Energy:	
a. Annual Labor Decrease (+)/Increase (-)	\$ _____
b. Annual Material Decrease (+)/Increase (-)	\$ _____
c. Other Annual Decrease (+)/Increase (-)	\$ _____
d. Total Costs	\$ _____
e. 10% Discount Factor	\$ _____
f. Discounted Recurring Cost (d x e)	\$ _____
3. Recurring Energy Benefit/Costs:	
a. Type of Fuel: <u>No. 6 Fuel Oil</u>	
(1) Annual Energy Decrease (+)/Increase (-)	935 MBTU/Yr.
(2) Cost per MBTU	\$ 8.53/MBTU
(3) Annual Dollar Decrease/Increase ((1)x(2))	\$ 7,976/Yr.
(4) Differential Escalation Rate (<u>8</u> %) Factor	20.050
(5) Discounted Dollar Decrease/Increase (3)x(4)	\$ 159,919
b. Type of Fuel: <u>Electricity</u>	
(1) Annual Energy Decrease (+)/Increase (-)	125 MBTU/Yr.
(2) Cost per MBTU	\$ 3.6/MBTU
(3) Annual Dollar Decrease/Increase ((1)x(2))	\$ 458/Yr.
(4) Differential Escalation Rate (<u>7</u> %) Factor	18.049
(5) Discounted Dollar Decrease/Increase ((3)x(4))	\$ 8,266
c. Type of Fuel: _____	
(1) Annual Energy Decrease (+)/Increase (-)	\$ _____
(2) Cost per MBTU	\$ _____
(3) Annual Dollar Decrease/Increase ((1)x(2))	\$ _____
(4) Differential Escalation Rate (<u> </u> %) Factor	\$ _____
(5) Discounted Dollar Decrease/Increase ((3)x(4))	\$ _____
d. Discounted Energy Benefits (3a(5)+3b(5)+3c(5)+3d(5))	\$ 168,185
4. Total Benefits (Sum 2f+3d)	\$ 168,185
5. Discounted Benefit/Cost Ratio (Line 4/Line 1d)	3.46
6. Total Annual Energy Savings (3a(1)+3b(1)+3c(1))	1060 MBTU/Yr.
7. E/C Ratio (Line 6 ÷ Line 1a/1000)	23.1
8. Annual \$ Savings (2d+3a(3)+3b(3)+3c(3))	\$ 8,434/Yr.
9. Pay-Back Period ((Line 1a - Salvage)+Line 8)	5.44 Yr.

TABLE 4
ECONOMIC ANALYSIS SUMMARY

Location: Cameron Station Energy Audit, Bldg. No. 3 FY 81
Project: Modification No. 1 (Alternate A) Add 9" of Ceiling Insulation

Economic Life 25 Yrs. Date Prepared 1/8/81 Prepared by D. Studley

COSTS

1. Non-Recurring Initial Capital Costs:	
a. CWE	\$ 72,300
b. Design	\$ 4,338
c. _____	\$ _____
d. Total	\$ 76,638

BENEFITS

2. Recurring Benefit/Cost Differential Other than Energy:	
a. Annual Labor Decrease (+)/Increase (-)	\$ _____
b. Annual Material Decrease (+)/Increase (-)	\$ _____
c. Other Annual Decrease (+)/Increase (-)	\$ _____
d. Total Costs	\$ _____
e. 10% Discount Factor	\$ _____
f. Discounted Recurring Cost (d x e)	\$ _____
3. Recurring Energy Benefit/Costs:	
a. Type of Fuel: <u>No. 6 Fuel Oil</u>	
(1) Annual Energy Decrease (+)/Increase (-)	1005 MBTU/Yr.
(2) Cost per MBTU	\$ 8.53/MBTU
(3) Annual Dollar Decrease/Increase ((1)x(2))	\$ 8,573/Yr.
(4) Differential Escalation Rate (<u>8</u> %) Factor	20.050
(5) Discounted Dollar Decrease/Increase ((3)x(4))	\$ 171,889
b. Type of Fuel: <u>Electricity</u>	
(1) Annual Energy Decrease (+)/Increase (-)	155 MBTU/Yr.
(2) Cost per MBTU	\$ 3.6/MBTU
(3) Annual Dollar Decrease/Increase ((1)x(2))	\$ 558/Yr.
(4) Differential Escalation Rate (<u>7</u> %) Factor	18.049
(5) Discounted Dollar Decrease/Increase ((3)x(4))	\$ 10,071
c. Type of Fuel: _____	
(1) Annual Energy Decrease (+)/Increase (-)	_____
(2) Cost per MBTU	\$ _____
(3) Annual Dollar Decrease/Increase ((1)x(2))	\$ _____
(4) Differential Escalation Rate (<u> </u> %) Factor	_____
(5) Discounted Dollar Decrease/Increase ((3)x(4))	\$ _____
d. Discounted Energy Benefits (3a(5)+3b(5)+3c(5)+3d(5))	\$ 181,960
4. Total Benefits (Sum 2f+3d)	\$ 181,960
5. Discounted Benefit/Cost Ratio (Line 4/Line 1d)	2.37
6. Total Annual Energy Savings (3a(1)+3b(1)+3c(1))	1160 MBTU
7. E/C Ratio (Line 6 ÷ Line 1a/1000)	16.04
8. Annual \$ Savings (2d+3a(3)+3b(3)+3c(3))	\$ 9,131/Yr.
9. Pay-Back Period ((Line 1a - Salvage)+Line 8)	7.92

3.2 MODIFICATION NO. 2 - REPAIR ECONOMIZER CONTROLS AND REDUCE VENTILATION RATES

Many of the present economizer controls for the air handling units are faulty, out of calibration, or disconnected. The economizer cycle can provide approximately 649 MBTU/yr of free cooling. During the cooling cycle, the economizer system admits outside air when enthalpy of the outside air is lower than the enthalpy of the return air. For the purpose of analysis, (presented in Appendix A) it was assumed that the existing economizer controls are not taking advantage of 38 percent of the free cooling available or 247 MBTU/yr. This value is probably very conservative since the uncalibrated and faulty controls could be increasing the building cooling load by erroneously admitting high enthalpy outdoor air.

Reducing the quantity of outdoor ventilation air can be accomplished during the replacement of the economizer controls and operators. The minimum outdoor air flow rate is established by the position set by the damper operator. Flow variations can be achieved by adjusting the damper linkage or shifting the location of the operator. Many of the existing operators are either completely disconnected or sticky.

Since the operators do not all return to their minimum position, the air handling units are introducing more outdoor air than the design value. The estimated load for the existing ventilation rate is 1461 MBTU/yr using a value of 53,100 BTU per year per cfm. A comparison of the existing and design ventilation rates to the minimum rates set forth in ASHRAE Std. 62-73 (Standards for Natural and Mechanical Ventilation) reveals that the design value exceeds the current standard by 7210 CFM. The existing conditions exceed the current standard by 18,510 CFM. Reducing the ventilation rates to comply with today's standards (15 CFM per person) can save 983 MBTU/yr.

Replacing the economizer controls and reducing the ventilation rates can save 1230 MBTU/yr or \$9,274/yr (FY 81). The total capital investment to replace 100 percent of the economizer controls and operators is \$34,980 (FY 81) which results in a simple payback period of 3.56 years.

TABLE 5
ECONOMIC ANALYSIS SUMMARY

Location: Cameron Station Energy Audit, Bldg. No. 3 FY 81
 Project: Modification No. 2 - Replace Economizer Controls and Reduce
Ventilation
 Economic Life 15 Yrs. Date Prepared 1/12/81 Prepared by D. Studley

COSTS

1. Non-Recurring Initial Capital Costs:
 a. CWE \$ 33,000
 b. Design \$ 1,980
 c. _____ \$ _____
 d. Total \$ 34,980

BENEFITS

2. Recurring Benefit/Cost Differential Other than Energy:
 a. Annual Labor Decrease (+)/Increase (-) \$ _____
 b. Annual Material Decrease (+)/Increase (-) \$ _____
 c. Other Annual Decrease (+)/Increase (-) \$ _____
 d. Total Costs \$ _____
 e. 10% Discount Factor \$ _____
 f. Discounted Recurring Cost (d x e) \$ _____

3. Recurring Energy Benefit/Costs:
 a. Type of Fuel: Electricity-Cooling
 (1) Annual Energy Decrease (+)/Increase (-) 247 MBTU/Yr.
 (2) Cost per MBTU \$ 3.6/MBTU
 (3) Annual Dollar Decrease/Increase ((1)x(2)) \$ 889/Yr.
 (4) Differential Escalation Rate (7 %) Factor 12.278
 (5) Discounted Dollar Decrease/Increase (3)x(4) \$ 10,915
 b. Type of Fuel: No. 6 Fuel Oil
 (1) Annual Energy Decrease (+)/Increase (-) 983 MBTU/Yr.
 (2) Cost per MBTU \$ 8.53/MBTU
 (3) Annual Dollar Decrease/Increase ((1)x(2)) \$ 8,385/Yr.
 (4) Differential Escalation Rate (%) Factor 13.112
 (5) Discounted Dollar Decrease/Increase ((3)x(4)) \$ 109,944
 c. Type of Fuel: _____
 (1) Annual Energy Decrease (+)/Increase (-) _____
 (2) Cost per MBTU \$ _____
 (3) Annual Dollar Decrease/Increase ((1)x(2)) \$ _____
 (4) Differential Escalation Rate (%) Factor _____
 (5) Discounted Dollar Decrease/Increase ((3)x(4)) \$ _____
 d. Discounted Energy Benefits (3a(5)+3b(5)+3c(5)+3d(5)) \$ 120,859

4. Total Benefits (Sum 2f+3d) \$ 120,859
 5. Discounted Benefit/Cost Ratio (Line 4/Line 1d) 3.4
 6. Total Annual Energy Savings (3a(1)+3b(1)+3c(1)) 1230 MBTU/Yr.
 7. E/C Ratio (Line 6 ÷ Line 1a/1000) 37.3
 8. Annual \$ Savings (2d+3a(3)+3b(3)+3c(3)) \$ 9,274/Yr.
 9. Pay-Back Period ((Line 1a - Salvage)+Line 8) 3.56 Yr.

Replacing the economizer controls and reducing the ventilation rates can save 1230 MBTU/yr or \$9,274/yr (FY 81). The total capital investment to replace 100 percent of the economizer controls and operators is \$34,980 (FY 81) which results in a simple payback period of 3.56 years.

3.3 MODIFICATION NO. 3 - ADD SHUT-OFF DAMPER TO OUTDOOR AIR INTAKE AND CLOSE STEAM COIL ON UNIT SHUT- DOWN

Figure 6 shows the arrangement of the outdoor air intake and that the current steam coil operation allows energy to be lost by (1) venting conditioned air to the ambient during unit shut down, (increasing the infiltration rate due to thermal stack effect), and (2) venting heat extracted from the steam coil directly to the outdoors when the air handling unit is shut down. The full open steam coil wastes approximately 171 MBTU/yr. Even when steam is not available to the coil, 39 MBTU/yr is wasted through the outdoor intake due to the increased infiltration rates caused by thermal stack effect.

230 MBTU/yr can be saved by (1) adding shut-off dampers to the outdoor air intakes and, (2) adding the necessary controls to close the steam control valves on unit shut-down. The steam coil can be shut off either by adding a solenoid valve to the steam line or by adding a three-way solenoid valve to the pneumatic control line to drive the valve closed. Implementing Modification 3 will save \$1961/yr (FY 81) at a capital investment of \$12,460.

CAMERON STATION ENERGY AUDIT BUILDING NO. 3

MODIFICATION NO. 3 - ADD SHUT-OFF DAMPER TO OUTDOOR - AIR INTAKE AND CLOSE STEAM CONTROL VALVE ON UNIT SHUT-DOWN

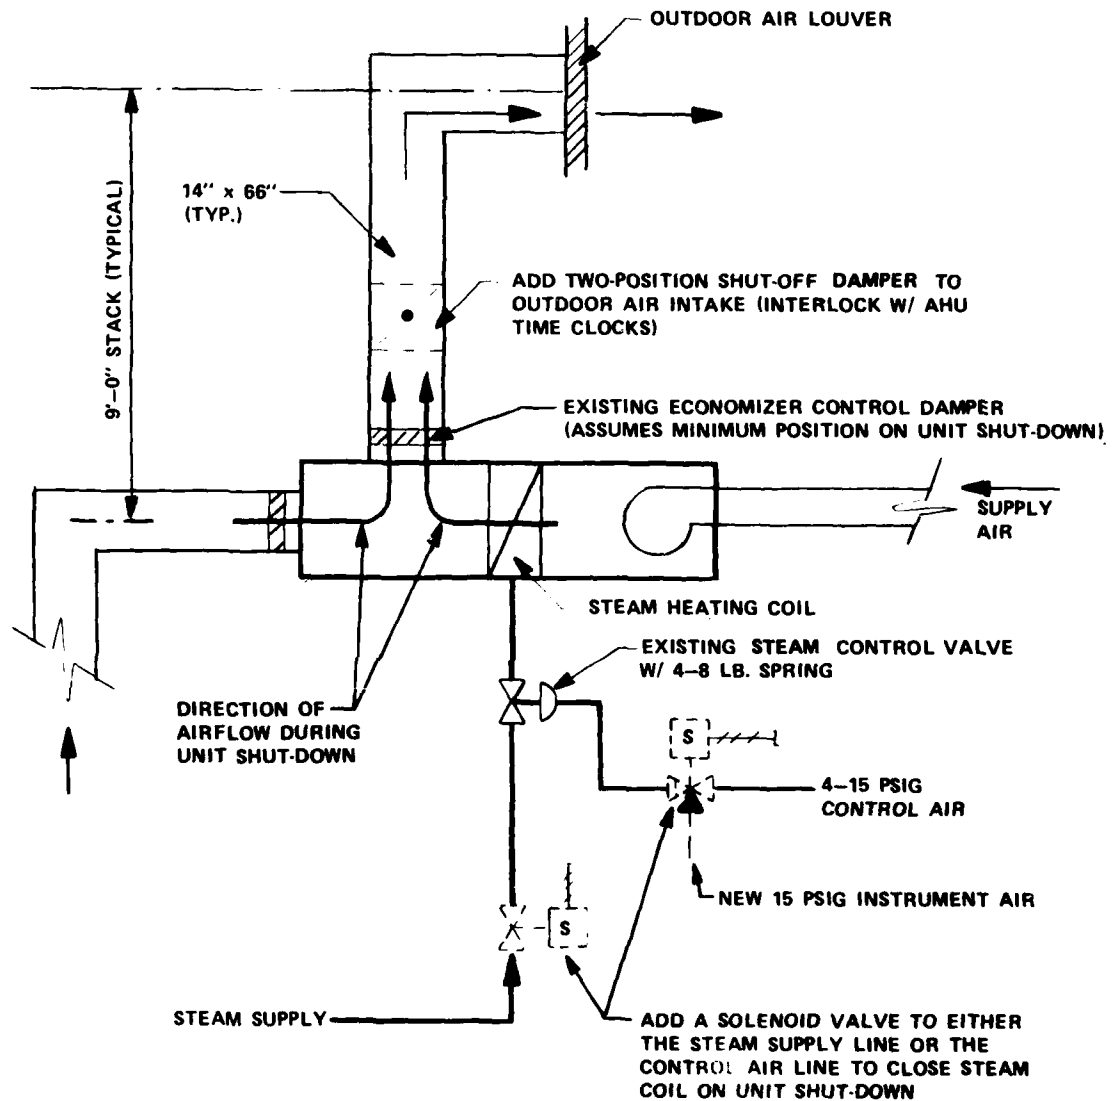


FIGURE 6

TABLE 6
ECONOMIC ANALYSIS SUMMARY

Location: Cameron Station Energy Audit Bldg. No. 3 FY 81
 Project: Modification No. 3 - Add Outdoor Air Shut-Off Damper and
Steam Isolation Valve
 Economic Life 15 Yrs. Date Prepared 1/16/81 Prepared by D. Studley

COSTS

1. Non-Recurring Initial Capital Costs:

a. CWE	\$ 11,750
b. Design	\$ 710
c. _____	\$ _____
d. Total	\$ 12,460

BENEFITS

2. Recurring Benefit/Cost Differential Other than Energy:

a. Annual Labor Decrease (+)/Increase (-)	\$ _____
b. Annual Material Decrease (+)/Increase (-)	\$ _____
c. Other Annual Decrease (+)/Increase (-)	\$ _____
d. Total Costs	\$ _____
e. 10% Discount Factor	\$ _____
f. Discounted Recurring Cost (d x e)	\$ _____

3. Recurring Energy Benefit/Costs:

a. Type of Fuel: <u>No. 6 Fuel Oil</u>	
(1) Annual Energy Decrease (+)/Increase (-)	<u>230 MBTU/Yr.</u>
(2) Cost per MBTU	<u>\$ 8.53/MBTU</u>
(3) Annual Dollar Decrease/Increase ((1)x(2))	<u>\$ 1961/Yr.</u>
(4) Differential Escalation Rate (<u>8</u> %) Factor	<u>13.112</u>
(5) Discounted Dollar Decrease/Increase (3)x(4)	<u>\$ 25,724</u>
b. Type of Fuel: _____	
(1) Annual Energy Decrease (+)/Increase (-)	\$ _____
(2) Cost per MBTU	\$ _____
(3) Annual Dollar Decrease/Increase ((1)x(2))	\$ _____
(4) Differential Escalation Rate (____ %) Factor	\$ _____
(5) Discounted Dollar Decrease/Increase ((3)x(4))	\$ _____
c. Type of Fuel: _____	
(1) Annual Energy Decrease (+)/Increase (-)	\$ _____
(2) Cost per MBTU	\$ _____
(3) Annual Dollar Decrease/Increase ((1)x(2))	\$ _____
(4) Differential Escalation Rate (____ %) Factor	\$ _____
(5) Discounted Dollar Decrease/Increase ((3)x(4))	\$ _____
d. Discounted Energy Benefits (3a(5)+3b(5)+3c(5)+3d(5))	<u>\$ 25,724</u>
4. Total Benefits (Sum 2f+3d)	<u>\$ 25,724</u>
5. Discounted Benefit/Cost Ratio (Line 4/Line 1d)	<u>2.06</u>
6. Total Annual Energy Savings (3a(1)+3b(1)+3c(1))	<u>230 MBTU/Yr.</u>
7. E/C Ratio (Line 6 ÷ Line 1a/1000)	<u>19.6</u>
8. Annual \$ Savings (2d+3a(3)+3b(3)+3c(3))	<u>\$ 1,961/Yr.</u>
9. Pay-Back Period ((Line 1a - Salvage)+Line 8)	<u>6.0 Yr.</u>

3.4 MODIFICATION NO. 4 - RESCHEDULE AHU OPERATION

Existing schedule - AHU Operation 5:00 A.M. to 5:00 P.M.

Proposed Schedule - AHU Operation 6:00 A.M. to 5:00 P.M. (Heating Season)

AHU Operation 8:00 A.M. to 5:00 P.M. (Cooling Season)

Each of the 21 air handling units have recently been modified to include a seven day time-clock to reduce fan energy. However, a large portion of the time-clocks have never been set up, thereby allowing several units to run continuously. Figure 3 shows that the fans consume 8.8 percent of the total energy costs or \$10,760/yr (FY 81). Resetting the time-clocks to their existing schedule (5:00 A.M. to 5:00 P.M.) will save an estimated 95,000 KWH/year or \$3800/yr, (FY 81).

The air handling units can be started later in the morning if insulation is added to suspended ceiling (Modification No. 1). During the heating season, the existing system requires approximately four hours to bring the space temperature up to the design temperature. The space temperature can drop as low as 50 to 52°F at 5:00 A.M. Without new insulation, heat is escaping from the building envelope at almost the same rate at which it is being applied. With new insulation, the space temperature will only drop to approximately 62-64°F at 5:00 A.M. and will rise at a greater rate due to the improved thermal resistance of the envelope. During the heating season, the units can be started by 6:00-6:30 A.M., only if new insulation is added to the suspended ceiling. During the cooling season, the units can be started at 7:30-8:00 A.M., since there is seldom a cooling load during the morning hours.

Resetting the units' start-up time to 6:00 A.M. in the winter and 8:00 A.M. in the summer will save 157 MBTU/yr and 22,400 KWH/yr or \$2950/yr, (FY 81), at an annual labor cost of 16 hours/yr and no capital investment.

3.5 MODIFICATION NO. 5 - RELOCATE MASTER THERMOSTATS

Some of the current air handling units supply air simultaneously to both interior and exterior spaces. To supplement the varying space heating loads, electric duct heaters with independent thermostat control are provided in the branches to the exterior spaces. The existing sequence of operation for the heating mode is as follows:

- a. The master thermostat, which is located in the exterior zone, modulates the steam control valve in the air handling unit to maintain the exterior space at 68°F.
- b. If the space temperature in the exterior zone falls below 66°F, the electric duct heater is energized to help satisfy the loads.

With the existing control concept, the supply air temperature to the interior zone is dictated by the losses in the exterior zone, resulting in overheated interior spaces. This deficiency can be remedied by relocating the master thermostat to an interior space and leaving the duct thermostat in the exterior space. Relocating the seven affected thermostats saves 10.5 MBTU/year at a capital investment of \$560. The following AHU's are affected by this modification; AHU No. 1, 3, 4, 6, 7, 13, and 15.

TABLE 7
ECONOMIC ANALYSIS SUMMARY

Location: Cameron Station Energy Audit Bldg. No.3 FY 81
Project: Modification No. 5 - Thermostat Relocation
Economic Life 15 Yrs. Date Prepared 1/16/81 Prepared by D. Studley

COSTS

1. Non-Recurring Initial Capital Costs:

a. CWE	\$ 560
b. Design	\$
c.	\$
d. Total	\$ 560

BENEFITS

2. Recurring Benefit/Cost Differential Other than Energy:

a. Annual Labor Decrease (+)/Increase (-)	\$
b. Annual Material Decrease (+)/Increase (-)	\$
c. Other Annual Decrease (+)/Increase (-)	\$
d. Total Costs	\$
e. 10% Discount Factor	\$
f. Discounted Recurring Cost (d x e)	\$

3. Recurring Energy Benefit/Costs:

a. Type of Fuel: <u>No. 6 Fuel Oil</u>	
(1) Annual Energy Decrease (+)/Increase (-)	<u>10.5 MBTU</u>
(2) Cost per MBTU	<u>\$ 8.53/MBTU</u>
(3) Annual Dollar Decrease/Increase ((1)x(2))	<u>\$ 90/Yr.</u>
(4) Differential Escalation Rate (<u>8</u> %) Factor	<u>13.112</u>
(5) Discounted Dollar Decrease/Increase (3)x(4)	<u>\$ 1174</u>
b. Type of Fuel:	
(1) Annual Energy Decrease (+)/Increase (-)	
(2) Cost per MBTU	\$
(3) Annual Dollar Decrease/Increase ((1)x(2))	\$
(4) Differential Escalation Rate (<u> </u> %) Factor	
(5) Discounted Dollar Decrease/Increase ((3)x(4))	\$
c. Type of Fuel:	
(1) Annual Energy Decrease (+)/Increase (-)	
(2) Cost per MBTU	\$
(3) Annual Dollar Decrease/Increase ((1)x(2))	\$
(4) Differential Escalation Rate (<u> </u> %) Factor	
(5) Discounted Dollar Decrease/Increase ((3)x(4))	\$
d. Discounted Energy Benefits (3a(5)+3b(5)+3c(5)+3d(5))	<u>\$ 1,174</u>
4. Total Benefits (Sum 2f+3d)	<u>\$ 1,174</u>
5. Discounted Benefit/Cost Ratio (Line 4/Line 1d)	<u>2.1</u>
6. Total Annual Energy Savings (3a(1)+3b(1)+3c(1))	<u>10.5 MBTU/Yr.</u>
7. E/C Ratio (Line 6 ÷ Line 1a/1000)	<u>18.8</u>
8. Annual \$ Savings (2d+3a(3)+3b(3)+3c(3))	<u>\$ 90/Yr.</u>
9. Pay-Back Period ((Line 1a - Salvage)+Line 8)	<u>6.2 Yr.</u>

4.0 BASIS FOR ANALYSIS

The following design and operating criteria has been used in the evaluation of the recommended energy conservation measures:

- 4.1 **LOAD CALCULATIONS** - Both computer analysis and hand calculations were used to determine the building heating and cooling loads. The results from both the "degree day method" and the computer simulation (DOE II) were compared to determine the possible energy savings available. Infiltration rates, U-Values and calculated procedures conform to the data presented in ASHRAE Handbook of Fundamentals.

Degree Days	4224/yr
Summer Design Temperature	78°F
Winter Design Temperature	68°F

- 4.2 **ESCALATION AND INFLATION RATES** - an inflation rate of 10 percent and escalation rates of 7 percent and 8 percent for electricity and fuel oil respectively, were used to determine the discounted benefit/cost ratios. The differential escalation rate factors are as follows:

<u>Economic Life</u>	<u>Electricity (7%)</u>	<u>Fuel Oil (8%)</u>
15 years	12.278	13.112
25 years	18.049	20.050

4.3 **FUEL AND UTILITY COSTS**

- a. The most recent purchase of No. 6 fuel oil for Cameron Station was at a cost of \$0.87 per gallon. The future price of fuel oil at the end of 1981 has been estimated to be \$0.99/gallon. Assuming an average heating value of 153,000 BTU per gallon of fuel oil and an overall efficiency of 76 percent, results in a heating cost of \$8.53 per million BTU's.
- b. Cameron Station is currently procuring their electricity from the Virginia Electric and Power Company under the MS schedule. The rate

structure consists of a \$6.22 per KW of demand charge and a 1.546¢ per KWH charge. For the analysis an average cost of 4.36¢ per KWH was used for fiscal year 1981. Cooling costs range from 0.9 KW to 1.0KW per ton of refrigeration for large centrifugal refrigeration gear, which results in a cost of \$3.60 per million BTU's of cooling.

Actual total charges for electricity are, of course, based upon a combination of charges for usage (KWH) and demand (KWD). Since Cameron Station is metered as a unit, the applicable demand charge is determined by the peak loading for the entire base. The effect of peak reduction at Building No. 3 upon the peak of the base as a whole is indeterminate. Therefore, electricity charges used in this report have been determined utilizing average demand charges for the base as a whole.

MODIFICATION NO. 1

APPENDIX A

CLIENT DOA	CALC. No. 5395-H-01
SUBJECT CAMERON STATION ENERGY AUDIT - BUILDING #3	

PROBLEM: • ANALYZE POSSIBLE ENERGY SAVINGS REALIZED BY INSULATING CEILING • INVESTIGATE EFFECTS OF VARYING THICKNESS OF INSULATION.	
CHECKER'S REMARKS:	

APPROACH/ASSUMPTIONS: • COMPARE RESULTS USING BOTH THE "DEGREE DAY" METHOD AND DOE-II COMPUTER OUTPUT. • USE "BIL METHOD" FOR FLENUM HTG. REQUIREMENTS • REMAINING ASSUMPTIONS PER CALC.	
CHECKER'S REMARKS:	

SOURCES-DATA/EQUATIONS: • DOE II - COMPUTER PROGRAM • ASHRAE SYSTEMS VOLUME 16 - ENERGY ESTIMATING	
CHECKER'S REMARKS:	

CONCLUSIONS: • SEE GRAPH FOR ENERGY SAVINGS VS. INSULATION • SEE ECONOMIC ANALYSIS SUMMARY FORMS FOR R-6, R-19, AND R-30 INSULATION. • NOTE - BEST PAY-BACK FOR R-19 INSULATION (4.93 yrs)	
CHECKER'S REMARKS:	

CALCULATED BY D. STOLEY	DATE 1/12/81
CHECKED BY Thom A. Selker	DATE 6-12-81

FD 501 (2/80)



MODIFICATION 1

Page 1 of 13

DATE 1/21/80

CLIENT DOA FILE NO. 5395 BY D. STURLEY
SUBJECT CAMERON ST. ENERGY AUDIT BLDG #3 Checked By G.A. Leiko

ANALYSIS OF CEILING INSULATIONHand Calcs.

DEGREE DAYS = 4224

$$H_L = (56^{\circ}\text{F}) (0.127) (130,000) = 924,560 \text{ OCCUPIED (12 hours)}$$

$$H_L = \frac{(48^{\circ}\text{F}) (0.127) (130,000)}{52} = \frac{792,480}{858,920} \text{ EVENINGS (12 hours)}$$

$$H_L (\text{TOTAL}) = \frac{858,920 \times 4224 \times 24 \text{ Hours}}{52^{\circ}\text{F}} = 1673 \times 10^6 \text{ MBTU/yr}$$

ADD 2" INSULATION

Overall = 0.072 (includes air space & roof)
(R-6 added)

$$H_L = 1673 \times 10^6 \times 0.072 / 0.127 = 948.9 \times 10^6 \text{ MBTU/yr}$$

SAVINGS = $724 \times 10^6 \text{ MBTU/yr}$

ADD 5" INSULATION

Overall = 0.05 (includes air space & roof)
(R-15 added)

$$H_L = 1673 \times 10^6 \times 0.05 / 0.127 = 658.7 \times 10^6 \text{ MBTU/yr}$$

SAVINGS = $1014.3 \times 10^6 \text{ MBTU/yr}$

ADD 9" INSULATION

Overall = 0.0275
(R-30 added)

$$H_L = 1673 \times 10^6 \times 0.0275 / 0.127 = 362.3 \times 10^6 \text{ MBTU/yr}$$

SAVINGS = $1310.7 \times 10^6 \text{ MBTU/yr}$

NOTE - ADDING INSULATION TO THE CEILING COULD INCREASE THE HEATING REQUIRED IN THE PLENUM FOR FREEZE PROTECTION!



MODIFICATION 1

Page 2 of 13

DATE _____

CLIENT DOA FILE NO. 5395 BY D. STURLEY
SUBJECT CAHERON ST. ENERGY AUDIT #3 Checked By G.A. Celko

ANALYSIS OF CEILING INSULATION

COMPUTER MODEL ... UTILIZE "SUM" METHOD FOR
HEATING MODE, "32HR" FOR COOLING

BASELINE CONDITION ($U_{\text{ROOF}} = 0.127$, $U_{\text{CEILING}} = 0.204$)

HEATING LOAD 2203×10^6 MBTU/YR
COOLING LOAD 2176×10^6 MBTU/YR

ADD 2" INSULATION ($U_{\text{ROOF}} = 0.072$, $U_{\text{CEILING}} = 0.09$)

		<u>SAVINGS</u>
HEATING LOAD	1353×10^6 MBTU/YR	850×10^6 BTU/YR
COOLING LOAD	2095×10^6 MBTU/YR	81×10^6 BTU/YR
		931×10^6 BTU/YR

ADD 3" INSULATION ($U_{\text{ROOF}} = 0.05$, $U_{\text{CEILING}} = 0.06$)

		<u>SAVINGS</u>
HEATING LOAD	1038×10^6 MBTU/YR	1165×10^6 BTU/YR
COOLING LOAD	2057×10^6 MBTU/YR	119×10^6 BTU/YR
		1284×10^6 BTU/YR

ADD 9" INSULATION ($U_{\text{ROOF}} = 0.0275$, $U_{\text{CEILING}} = 0.03$)

HEATING LOAD	732×10^6 MBTU/YR	1471×10^6 BTU/YR
COOLING LOAD	2021×10^6 MBTU/YR	155×10^6 BTU/YR
		1624×10^6 BTU/YR

USING THE LOWEST VALUES BETWEEN HAND : COMPUTER *

	<u>SAVINGS</u>	
ADD 2" INSULATION	805×10^6 BTU/YR	} USE VALUES TO PLOT GRAPH
ADD 3" INSULATION	1133×10^6 BTU/YR	
ADD 9" INSULATION	1446×10^6 BTU/YR	

* Hand values for heating + computer values for cooling
A-3



MOO.1

Page 3 of 13DATE 1/21/84CLIENT DOA FILE NO. 5395 BY D. STODLEYSUBJECT CAMERON ST. ENERGY AUDIT BLDG. #3 Checked By G.A. CelkoHTG. REQUIRED FOR PLENUM SPACEDESIGN TEMP. 35°F VOLUME $2,197,080 \text{ FT}^3$ AREA $= 130,000 \text{ SF}$ HEAT GAIN TO PLENUM FROM CONDITIONED SPACE
(EXISTING CONDITION)

$$U = 0.206$$

$$\Delta T_1 = 68 - 35 = 33^{\circ}\text{F} \text{ OCCUPIED}$$

$$\Delta T_2 = 64 - 35 = 29^{\circ}\text{F} \text{ EVENINGS}$$

$$\begin{aligned} Q &= U A \Delta T = 0.206 \times (33) \times (130,000) \\ &= \boxed{888,000 \text{ BTU/hr.}} \text{ OCCUPIED} \\ &= 780,000 \text{ BTU/hr} \text{ EVENINGS} \end{aligned}$$

HEAT LOSS THRU WALLSWALL AREA $= 34,500 \text{ S.F.}$

$$UA = 0.281 \times (34,500) = \boxed{9790 \text{ BTUH/}^{\circ}\text{F}}$$

HEAT LOSS THRU ROOF

$$UA = 0.49 \times (130,000) = \boxed{64,000 \text{ BTUH/}^{\circ}\text{F}}$$

HEAT GAIN TO PLENUM FROM EQUIPMENT

- STEAM PIPING - ASSUME ≈ 1500 LINEAR FT
 ΔT $75 \text{ BTUH/FT OF PIPE } (95^{\circ}\text{F SURF.})$

$$H_g = 75 \times 1500 = \boxed{112,500 \text{ BTUH}}$$

- CONDENSATE PIPING - ASSUME $1500 \text{ FT @ } 75 \text{ BTUH/FT}$

$$H_g = \boxed{112,500 \text{ BTUH}}$$

- DUCT LEAKAGE - 5% OF $137,000 \text{ CFM} = 6850 \text{ CFM}$

$$H_g = 6850 \times 1.08 \times 10^{\circ}\text{F} = \boxed{296,000 \text{ BTUH}}$$


Page 4 of 13

DATE 1/21/81

CLIENT DOA FILE NO. 5395 BY D. STOLEY

SUBJECT CAHERON STATION ENERGY ADJUST BLDG 3 Checked By G.A. Lelko

HEATING REQUIRED TO PLENUM "BIU METHOD"

OUTSIDE TEMP	HEAT LOSS THRU WALLS & ROOF	HOURS OF OCCURANCE	TOTAL YEARLY LOAD
32°F	221,460 BTU/h	542	120×10^6 BTU
27°F	590,560 BTU/h	254	150×10^6 BTU
22°F	959,660 BTU/h	138	132×10^6 BTU
17°F	1,328,760 BTU/h	54	71×10^6 BTU
12°F	1,698,000 BTU/h	17	29×10^6 BTU
7°F	2,066,960 BTU/h	2	4×10^6 BTU
		<u>1007</u>	

 506×10^6 BTU

+10% S.F. = 60×10^6 BTU $\Rightarrow$ 570×10^6 BTU

ASSUME HEAT GAINS FROM SPACE CONCURRENT
WITH 40% OF THE ABOVE HOURS.

TOTAL HOURS = $1007 \times 0.40 = 403$ HOURS

HEAT GAIN / HOUR = $1,409,000$ BTU / HR.

 $H_g = 509 \times 10^6$ BTU

NET HEATING = 0

ADD 2" INSULATION TO CEILING $U = 0.09$

 $H_g = 888,000 \times \frac{0.09}{0.206} = 384,300$ BTU/h OR $304,000$ BTU/h (LESS)

 $H_g(\text{evenings}) = 780,000 \times (1007 - 403) \times \frac{0.09}{0.206} = 206 \times 10^6$ BTU/yr

 $H_g/\text{yr} = (1,409,000 - 304,000) \times 403 + 206 \times 10^6$ BTU/yr = 570×10^6 BTU/yr

NET HEATING = 0

ADD 3" INSULATION TO CEILING

 $H_g = 888,000 \times \frac{0.06}{0.206} = 257,000$ OR $691,000$ BTU/h LESS

 $H_g(\text{evenings}) = 780,000 \times \frac{0.06}{0.206} (604) = 137 \times 10^6$ BTU/yr

 $H_g/\text{yr} = (1,409,000 - 691,000) \times 403 + 137 \times 10^6 = 450.5 \times 10^6$ BTU/yr

NET HEATING = 118.5×10^6 BTU/yr

Page 5 of 13DATE 1/21/81CLIENT DOA FILE NO. 5995 BY D. STOLEYSUBJECT CAMERON ST. ENERGY AUDIT BUILDING #3 Checked By G.A. LeikoREQUIRED HEATING TO PLENUMADD 9" OF INSULATION

$$H_1 = 888,000 \times \frac{0.03}{0.206} = 129,000 \text{ BTU/hr or } 759,000 \text{ BTU/hr LESS}$$

$$H_q(\text{EVENINGS}) = 780,000 \times \frac{0.03}{0.206} \times (604) = 69.6 \times 10^6 \text{ BTU/yr}$$

$$H_q(\text{TOTAL}) = (1409000 - 759000) \times (403) + 69.6 \times 10^6 = 262 \times 10^6 \text{ BTU/yr}$$

$$\text{NET HEATING} = 207 \times 10^6 \text{ BTU/yr}$$

ADD 7" OF INSULATION (Uceiling = 0.04)

$$H_1 = 888,000 \times \frac{0.04}{0.206} = 172,000 \text{ BTU/hr or } 716,000 \text{ BTU/hr LESS}$$

$$H_q(\text{EVENINGS}) = 780,000 \times \frac{0.04}{0.206} \times 604 = 91.5 \times 10^6 \text{ BTU/yr}$$

$$H_q(\text{TOTAL}) = (1409,000 - 716,000) \times 403 + 91.5 \times 10^6 = 279 \times 10^6 \text{ BTU/yr}$$

$$\text{NET HEATING} = 289 \times 10^6 \text{ BTU/yr}$$

ADD 6" OF INSULATION (Uceiling = 0.05)

$$H_1 = 888,000 \times \frac{0.05}{0.206} = 216,000 \text{ BTU/hr or } 672,000 \text{ BTU/hr LESS}$$

$$H_q(\text{EVENINGS}) = 780,000 \times \frac{0.05}{0.206} \times 604 = 114 \times 10^6 \text{ BTU/yr}$$

$$H_q(\text{TOTAL}) = (1409 - 672) \times 1000 (403) + 114 \times 10^6 \text{ BTU/yr} = 297 \times 10^6 \text{ BTU/yr}$$

$$\text{NET HEATING} = 271 \times 10^6 \text{ BTU/yr}$$



Page 6 of 13

DATE 1/21/88

CLIENT DOA FILE NO. 5395

BY D. STODLEY

SUBJECT CAMERON ST. ENERGY AUDIT #3

Checked By G.A. Leiko

REQUIRED HEATING TO PLENUM

A SUMMARIZED EQUATION

NET HEAT GAIN TO PLENUM = $H_q(P)$


$$H_q(P) = 570 \times 10^6 \left[\left[1.409 \times 10^6 - .888 \times 10^6 \right] \times 403 - \left[.888 \times 10^6 \times \frac{U_o}{0.206} \times 403 \right] + \right. \\ \left. - \left[.780 \times 10^6 \times \frac{U_o}{0.206} \times 604 \right] \right]$$

$$= [570 - 209] \times 10^6 + [-4024 \times 10^6 \times U_o]$$

$$= 360 \times 10^6 - 4024 \times 10^6 U_o$$

$Q = 0$ @ $U_o = 0.089$
 $Q = 360$ @ $U_o = 0$

Use Eq. to
 Plot graph

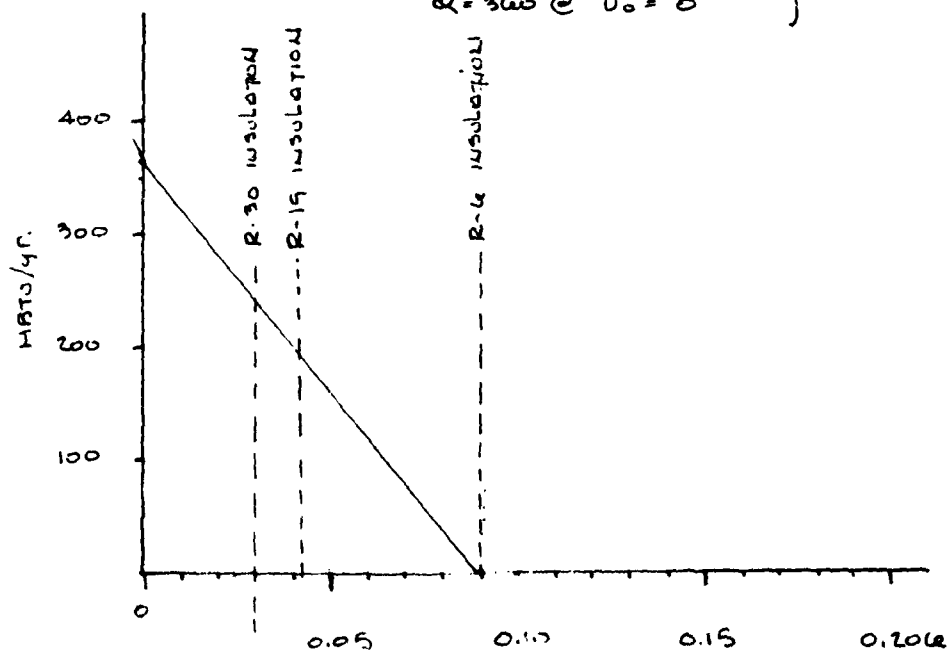

[illegible]

[illegible]

A-9

ACTIVITY AND LOCATION		NUS CORPORATION		9 OF 13	
CAMERON ST. ENERGY ADAPT Bldg. No. 3		1/21/81		D. STURLEY	
PROJECT TITLE		MODIFICATION 1. ALT. 2" 3" OF INSULATION			
ITEM DESCRIPTION	QUANTITY	MATERIAL COST		LABOR COST	
		UNIT COST	TOTAL	UNIT COST	TOTAL
- PER VENDOR CONTACTS, TOTAL					
COST, INCLUDING OVERHEAD &					
PROFIT @ \$96,000					
\$96,000					
Bare Costs:					
Contingency:					
Overhead + Profits:					
Subtotal:					
Escalation: 7% TO END OF FY 81					
Construction Budget					
Design Fee: 6%					
\$2,911					
\$40,831					



REPORT OF VISIT


DATE	Jan. 6, 1981		COMPANY	POTOMAC INSULATING CONTRACTORS	
TIME			ADDRESS	4310 - D-GRAVEL AVE.	
				ALEXANDRIA, VA.	
VENDOR REPR. SOLICITATION					
NUS VISITATION					
PR & TITLE					
PR & TITLE					
X PHONE 971-9324 (703)					
NAME OF EQUIPMENT					
R-19 - 6" "Faced" INSULATION					
R-30 - 9" "Faced" INSULATION					
CATALOG NO					
MODEL NO					
DESCRIPTION					
SIZE, DIAMETER, HEIGHT, WEIGHT, OVERALL DIMENSIONS, FLOOR SPACE REQUIRED					
NUMBER OF MAJOR DRIVERS AND HORSEPOWER, LEGS, PAD, OTHER					
SPECIAL CONDITIONS - REGULATORY, LOCAL CODES AND OTHER PROJECT UNIQUE REQUIREMENTS					
ESTIMATED COST OR QUOTE					
VENDOR DELIVERY TIME					
SOURCE INSPECTION REQUIRED					
ITEM NO. ON EQUIPMENT LIST					
PLOT PLAN					
FLOW CHARTS					
OTHER - CATALOGUE AND VENDOR DESIGN DATA					
MATTERS DISCUSSED					
Has Requested Prices For installing 130,000 S.F. OF INSULATION OVER SUSPENDED CEILING					
Prices include O & P, installed.					
6" "Faced" Batt @ \$30/S.F. installed = \$39,000.00					
9" "Faced" Batt @ \$0.47/S.F. " 2 = \$61,100.00					
3" "Faced" Batt @ \$0.15/S.F. " 2 = \$34,900.00					
NUS PERSONNEL INVOLVED					
PROJECT No 5995					
BY D. Studley					
DISTRIBUTE TO					
PURCHASING					
ESTIMATING					



REPORT OF VENDOR CONTACT

DATE <u>Jan 5th 1981</u>	COMPANY NAME <u>Baltimore Home Insulators</u>
TIME _____	ADDRESS <u>6149 Washington Blvd.</u>
VENDOR REPR SOLICITATION _____	<u>ELK RIDGE</u>
NUS VISITATION _____	REPR & TITLE <u>LARRY GOREN</u>
X PHONE <u>621-2780</u>	REPR & TITLE _____

NAME OF EQUIPMENT <u>R-19 (6") BATT INSULATION</u>
CATALOG NO _____ MODEL NO _____
DESCRIPTION <u>SIZE, DIAMETER, HEIGHT, WEIGHT, OVERALL DIMENSIONS, FLOOR SPACE REQUIRED</u>
<u>NUMBER OF MAJOR DRIVERS AND HORSEPOWER, LEGS, PAD, OTHER</u>
SPECIAL CONDITIONS - REGULATORY, LOCAL CODES AND OTHER PROJECT UNIQUE REQUIREMENTS
ESTIMATED COST OR QUOTE _____
VENDOR DELIVERY TIME _____
SOURCE INSPECTION REQUIRED _____
ITEM NO. ON EQUIPMENT LIST _____
PLOT PLAN _____ FLOW CHARTS _____
OTHER CATALOGUE AND VENDOR DESIGN DATA _____
MATTERS DISCUSSED <u>HOS REQUESTED A PRICE FOR INSTALLING 130,000 S.F.</u>
<u>OF INSULATION OVER SUSPENDED CEILING</u>
<u>R-19 INSULATION "FACED"</u>
<u>TOTAL INSTALLED COST OF 28-29 1/2¢ / S.F.</u>
NUS PERSONNEL INVOLVED _____ PROJECT NO <u>5395</u>
_____ BY <u>D. Stanley</u>
DISTRIBUTE TO _____
PURCHASING _____
ESTIMATING _____



REPORT OF VENDOR CONTACT

DATE <u>Jan 5th 1981</u>		COMPANY NAME <u>Volter Campbell Co. Inc.</u>	
TIME <u>3:00 P.M.</u>		ADDRESS <u>10721 TUCKER ST.</u>	
		<u>BELTSVILLE, MD.</u>	
VENDOR REPR SOLICITATION		REPR & TITLE <u>GEORGE JOHNSON</u>	
NUS VISITATION		REPR & TITLE _____	
☒ PHONE <u>937-5700</u>			
NAME OF EQUIPMENT <u>CERTAIN-TEED Insulation</u>			
<u>6" FOIL-BACKED R-19 INSULATION</u>			
CATALOG NO _____		MODEL NO _____	
DESCRIPTION <u>SIZE, DIAMETER, HEIGHT, WEIGHT, OVERALL DIMENSIONS, FLOOR SPACE REQUIRED,</u>			
<u>NUMBER OF MAJOR DRIVERS AND HORSEPOWER, LEGS, PAD, OTHER.</u>			
SPECIAL CONDITIONS - REGULATORY, LOCAL CODES AND OTHER PROJECT UNIQUE REQUIREMENTS.			
ESTIMATED COST OR QUOTE _____			
VENDOR DELIVERY TIME _____			
SOURCE INSPECTION REQUIRED _____			
ITEM NO ON EQUIPMENT LIST _____			
PLOT PLAN _____ FLOW CHARTS _____			
OTHER - CATALOGUE AND VENDOR DESIGN DATA.			
MATTERS DISCUSSED			
<u>BUDGET PRICE FOR 6" FOIL BACKED INSULATION (MAY'L ONLY)</u>			
<u>\$224/1000 S.F.</u>			
<u>PRICE HOLDS UP UNTIL AUGUST - 6% INCREASE</u>			
NUS PERSONNEL INVOLVED _____		PROJECT NO <u>5395</u>	
BY <u>D. STODLEY</u>			
DISTRIBUTE TO			
PURCHASING _____			
ESTIMATING _____			



REPORT OF VENDOR CONTACT

DATE <u>JAN 5th, 1981</u>	COMPANY NAME <u>AC & R INSULATION CO.</u>
TIME <u>11:30 AM.</u>	ADDRESS <u>10310 SOUTHARD DR.</u>
	<u>BELTSVILLE MD.</u>
VENDOR REPR SOLICITATION	
NUS VISITATION	REPR & TITLE <u>ED ROGERS</u>
X PHONE <u>997-4710</u>	REPR & TITLE _____

NAME OF EQUIPMENT <u>CEILING INSULATION</u>	
<u>R-19 (16") & R-30 (9")</u>	
CATALOG NO _____	MODEL NO _____
DESCRIPTION SIZE, DIAMETER, HEIGHT, WEIGHT, OVERALL DIMENSIONS, FLOOR SPACE REQUIRED	
NUMBER OF MAJOR DRIVERS AND HORSEPOWER, LEGS, PAD, OTHER	
<u>CAMERON STATION, BLDG. 3</u>	
<u>HEIGHT OF PLenum SPACE $\geq$ 8'-0"</u>	
<u>AREA OF CEILING = 129,000 S.F.</u>	
SPECIAL CONDITIONS - REGULATORY, LOCAL CODES AND OTHER PROJECT UNIQUE REQUIREMENTS	

ESTIMATED COST OR QUOTE _____	
VENDOR DELIVERY TIME _____	
SOURCE INSPECTION REQUIRED _____	
ITEM NO. ON EQUIPMENT LIST _____	
PLOT PLAN _____	FLOW CHARTS _____
OTHER - CATALOGUE AND VENDOR DESIGN DATA. _____	

MATTERS DISCUSSED <u>NUS REQUESTED A PRICE FOR INSTALLING INSULATION TO</u>	
<u>THE CAMERON STATION BLDG. #3 CEILING.</u>	
<u>THICKNESS OF INSULATION A. 2"</u>	
<u>B. 4"</u>	
<u>AREA OF INSULATION 129,000 S.F.</u>	
<u>TOTAL PRICE INCLUDING MATERIAL AND INSTALLATION & PROFIT, etc.</u>	
<u>(A). 42¢/S.F. FOR R-19 COMPLETE</u>	
<u>(B). 57¢/S.F. FOR R-30 (")</u>	

NUS PERSONNEL INVOLVED _____ PROJECT NO. <u>5395</u>	
_____ BY <u>J. STUDER</u>	

DISTRIBUTE TO	
PURCHASING _____	_____
ESTIMATING _____	_____

MODIFICATION NO. 2.

CLIENT	DOA	CALC. No.	5395-M-02
SUBJECT	CAMERON ST. ENERGY AUDIT BUILDING No. 3		

PROBLEM:	ANALYZE POSSIBLE ENERGY SAVINGS BY RESTORING ECONOMIZER CYCLE CONTROLS, ALSO ANALYZE POSSIBLE ENERGY SAVING REALIZED BY REDUCING VENTILATION RATES.
CHECKER'S REMARKS:	

APPROACH/ASSUMPTIONS:	PER CALCULATION
CHECKER'S REMARKS:	

SOURCES-DATA/EQUATIONS:	DOE-II - COMPUTER PROGRAM ASHRAE TRA 62-73 ASHRAE HB. OF FUND.
CHECKER'S REMARKS:	

CONCLUSIONS:	RESTORING ECONOMIZER CONTROLS = 247×10^6 BTU/YR REDUCING VENTILATION RATES = 983×10^6 BTU/YR TOTAL SAVINGS (#) = $8176 / 4802$ PAYBACK PERIOD = 4.04 YEARS FOR FURTHER ECON. ANALYSIS INFO. SEE ECLIP FORM.
CHECKER'S REMARKS:	

CALCULATED BY	D. STODLEY	DATE	1/12/81
CHECKED BY	A. J. KEO	DATE	8-12-81

ED 501 (2/80)

Page 1 of 7DATE 1/21/81CLIENT DOA FILE NO. 5395 BY D. STODLEYSUBJECT CAMERON STATION ENERGY AUDIT Checked By G.A. Lelko
BUILDING 3RE-ADJUST & RESTORE ECONOMIZER CYCLE

DURING THE FIELD SURVEY, IT WAS OBSERVED THAT A LARGE NO. OF THE ECONOMIZER CYCLES WERE INOPERATIVE FOR THE FOLLOWING REASONS;

(A.). TEMPERATURE CONTROLS VASTLY OUT OF CALIBRATION (VERIFIED BY TEMPERATURE INDICATORS)

(B). DAMPER OPERATORS ARE INOPERATIVE (VERIFIED BY VARYING MANUAL OVERRIDE)

THE UNITS WHICH CONTAIN FAULTY DAMPER OPERATORS ARE AS FOLLOWS;

- (1) AHU NO. 20
- (2) AHU NO. 11
- (3) AHU NO. 10
- (4) AHU NO. 19
- (5) AHU NO. 18

} $\approx$ 22.7% OF THE UNITS DAMPERS ARE INOPERATIVE

THE TEMPERATURE INDICATORS DEVIATED FROM ACTUAL TEMPERATURES (O.A.) ON THE AVERAGE FROM 20% - 30%. THE INDICATED TEMPERATURES USUALLY INDICATED AN O.A. TEMP. GREATER THAN THE ACTUAL. THIS MEANS THAT THE ECONOMIZERS ARE NOT TAKING ADVANTAGE OF THE LOWER ENTHALPY AVAILABLE IN THE O.A., AND ADMITTING HIGH ENTHALPY AIR ERONEOUSLY.

• ASSUME CONSERVATIVELY THAT THE ECONOMIZERS ARE NOT TAKING ADVANTAGE OF 20% OF THE FREE COOLING AVAILABLE.

COMBINED EFFECT (INOPERATIVE DAMPERS & MISCALIBRATION)

$$\% \text{ loss} = \left(1 - \frac{17 \text{ UNITS OPERATING @ 80\% EFFECTIVENESS}}{22 \text{ UNITS TOTAL}} \right) = \boxed{38\%}$$

Page 2 of 7DATE 1/21/81CLIENT DOA FILE NO. 5395 BY D. STUDLEYSUBJECT CAMERON ST. ENERGY AUDIT #3 Checked By G.A. Le/KoRE-ADJUST & RESTORE ECONOMIZER CYCLE

TOTAL FREE COOLING AVAILABLE.
(USING DOE II COMPUTER MODEL)

BASELINE RUN W/O ECONOMIZER = 1200.9×10^6 BTU/yr cooling
(USING THE "SUN" SYSTEM)

BASELINE RUN W/ ECONOMIZER = 551.8×10^6 BTU/yr cooling

YEARLY FREE CLG = 649×10^6 BTU/yr

YEARLY SAVINGS FOR RESTORING ECONOMIZER
= $(0.38)(649 \times 10^6) = 247 \times 10^6$ BTU/yr.

RE-ADJUSTMENT OF THE ECONOMIZER CYCLE CALL
ALSO BE UTILIZED TO REBALANCE THE OUTDOOR
AIR VENTILATION RATE

(USING DOE II)

OBJECTIVE - DETERMINE THE COST / CFM / yr OF
OUTDOOR AIR

BASE RUN - USE INFILTRATION AS O.A. AND ANALYSE
INCREASE IN YEARLY LOAD WHEN INFILTRATION
RATE DURING OCCUPIED TIMES IS VARIED

INFILTRATION = 0.162 CFM/SF. DURING 5:00 AM - 5:00 PM

INFILTRATION = 0.037 CFM/SF. DURING 5:00 PM - 5:00 AM

BASE RUN LOADS $\rightarrow 1,200.9 \times 10^6$ BTU (CLG) , 220.3×10^6 BTU (HEATING)

Page 3 of 7DATE 1/21/81

CLIENT DOA FILE NO. 5395 BY D. STURLEY
SUBJECT CAMERON STATION ENERGY AUDIT Checked By G.A. Lelko
BUILDING #3

RE-ADJUST & RESTORE ECONOMIZERREBALANCE VENTILATION RATEBASE RUU w/ 0.037 CFM INFILTRATION CONTINUOUSLOADS — 1192.9×10^6 BTU (COOLING) 1348.9×10^6 BTU (HEATING)DIFFERENCE = 8×10^6 BTU (COOLING) 854.8×10^6 BTU (HEATING)

$$\begin{aligned} \text{TOTAL CFM (DIFFERENCE)} &= 0.162 - 0.037 = 0.125 \text{ CFM/S.F.} \\ &= 0.125 \times 130,000 = 16,250 \text{ CFM} \end{aligned}$$

$$\begin{aligned} \text{COST / CFM} &= 862.8 \times 10^6 \text{ BTU / yr (SAVED)} / 16,250 \text{ CFM} \\ &= 53095 \text{ BTU / CFM (VENTILATION)} \end{aligned}$$

ESTIMATE OF THE QUANTITY OF VENTILATION AIR CO. BY
BEING INTRODUCED

- FROM THE FIELD SURVEY THE AVE. O.A. TEMP FROM INDICATORS = 45.6
- AVERAGE MIXED AIR TEMP. FROM INDICATORS = 54.3
- ACTUAL O.A. TEMP = 35°F

$$\begin{aligned} \text{ASSUME BOTH INDICATORS DEViate CONSISTANTLY} \\ \therefore \text{CORRECTED M.A. TEMP.} &= 64.3^\circ\text{F} \\ 35x + 70(1-x) &= 64.3 \\ x &= 16\% \text{ O.A.} \end{aligned}$$

USE 20% O.A. FOR EXISTING CONDITIONS
TOTAL SUPPLY AIR = 137,360 CFM
O.A. = 27,512 CFM

Page 4 of 7DATE 1/21/81CLIENT DOA FILE NO. 5395 BY D. STUPLEYSUBJECT CAMEROH ST. ENERGY AUDIT #3 Checked By G.A. LeikoREADJUST & RESTORE ECONOMIZER CYCLEREBALANCE VENTILATION RATE

$$\begin{aligned}\text{LOAD/YEAR FOR EXISTING CONDITION} \\ &= 27,512 \text{ CFM} \times 53095 \text{ BTU/CFM} \\ &= 1461 \times 10^6 \text{ BTU/YR.}\end{aligned}$$

$$\begin{aligned}\text{LOAD/YEAR FOR DESIGN CONDITION} \\ &= 14,210 \times 53095 \text{ BTU/YR.} \\ &= 861 \times 10^6 \text{ BTU/YR.}\end{aligned}$$

$$\begin{aligned}\text{SAVINGS REALIZED BY RETURNING OUTDOOR} \\ \text{AIR TO DESIGN CONDITIONS} \\ &= \boxed{600 \times 10^6 \text{ BTU/YR.}}\end{aligned}$$

MINIMUM REQUIRED AMOUNT OF VENTILATION USING
ASHRAE 62-73

$$\begin{aligned}&= 15 \text{ CFM / PERSON FOR OFFICE SPACE} \\ &= 15 \text{ CFM} \times 600 \text{ PEOPLE} = 9000 \text{ CFM}\end{aligned}$$

$$\begin{aligned}\text{LOAD/YEAR FOR 9000 CFM} \\ &= 178 \times 10^6 \text{ BTU/YR.}\end{aligned}$$

SAVINGS REALIZED BY ADJUSTING O.A.
QUANTITIES TO ASHRAE REQUIREMENTS

$$= \boxed{383 \times 10^6 \text{ BTU/YR.}}$$

$$\text{TOTAL SAVINGS} = \boxed{983 \times 10^6 \text{ BTU/YR.}}$$

COST ESTIMATE

ACTIVITY AND LOCATION		NUS CORPORATION		5 of 7	
CAMECO STATION ENERGY AUDIT BUILDING No. 3		1/21/81		D. STOOLEY	
PROJECT TITLE		STATUS OF DESIGN		DATE	
MODIFICATION No. 2 - CALIBRATE AND REPLACE ECONOMIZER CONTROLS & REWORK VENT. RATES		☐ P.D. ☐ 30% ☐ 100% ☐ FINAL ☐ Other 15% Ref.			
ITEM DESCRIPTION	QUANTITY NUMBER	UNIT	MATERIAL COST UNIT PRICE	LABOR COST UNIT PRICE	INITIAL BIDDING ESTIMATE TOTAL
• PER VENDOR CONTROLS, TOTAL COST					
TO REPLACE ALL CONTROLS (100%)					
2 \$1500 / UNIT (INCLUDING O.P.)					
• TO REDUCE VENT. RATES, LINKAGE					
HAS TO BE VARIOUS (CAN BE INCLUDED IN THE ABOVE \$1500)					
TOTAL COST = 1500 x 2 = \$3000					
Bare Costs:					
Contingency:					
Overhead + Profits:					
Subtotal:					\$33,000
Escalation: 0% - Prices For FY 81					
Construction Budget:					
Design Fee: 6%					\$1,980
					\$34,980



REPORT OF VENDOR CONTACT

DATE <u>1/12/81</u>	COMPANY NAME <u>HONEYWELL, INC.</u>
TIME _____	ADDRESS <u>1776 OLD MEADOW LN.</u>
VENDOR REPR SOLICITATION _____	<u>MCLEAN, VA. 22012</u>
NUS VISITATION _____	REPR & TITLE <u>PAUL LUOMOA</u>
PHONE <u>703-827-3010</u>	REPR & TITLE _____

NAME OF EQUIPMENT <u>ECONOMIZER CONTROLS -</u>	
CATALOG NO _____	MODEL NO _____
DESCRIPTION <u>SIZE, DIAMETER, HEIGHT, WEIGHT, OVERALL DIMENSIONS, FLOOR SPACE REQUIRED,</u>	
<u>NUMBER OF MAJOR DRIVERS AND HORSEPOWER, LEGS, PAD, OTHER</u>	
SPECIAL CONDITIONS - <u>REGULATORY, LOCAL CODES AND OTHER PROJECT UNIQUE REQUIREMENTS</u>	
ESTIMATED COST OR QUOTE _____	
VENDOR DELIVERY TIME _____	
SOURCE INSPECTION REQUIRED _____	
ITEM NO. ON EQUIPMENT LIST _____	
PLOT PLAN _____ FLOW CHARTS _____	
OTHER <u>CATALOGUE AND VENDOR DESIGN DATA</u>	
MATTERS DISCUSSED <u>NUS REQUESTED BUDGET PRICES FOR REPLACING AND</u>	
<u>EXISTING ECONOMIZER SYSTEM. REQ. REPLACEMENT = 1 OPERATOR,</u>	
<u>2 CONTROLLERS, AND BULBS @ \$100/DEVICE OR \$500/UNIT</u>	
<u>+ 200-300% FOR INSTALLATION, O.P., ETC.</u>	
<u>TOTAL COST FOR COMPLETE REPLACEMENT / UNIT</u>	
<u>= \$1000 - \$1500 (END OF B1)</u>	
<u>\$250 GOOD IF NOT ALL EQUIP HAS TO BE REPLACED</u>	
<u>(CALCULATED)</u>	
NUS PERSONNEL INVOLVED _____	PROJECT NO. <u>5395</u>
_____	BY <u>D. STURLEY</u>
DISTRIBUTE TO _____	
PURCHASING _____	
ESTIMATING _____	



REPORT OF VENDOR CONTACT

DATE <u>1/12/81</u>	COMPANY NAME <u>JOHNSON CONTROLS</u>
TIME _____	ADDRESS <u>3740 GENERAL WASHINGTON DRIVE</u> <u>ALEXANDRIA VA 22313</u>
VENDOR REPR SOLICITATION _____	REPR & TITLE <u>R. Bullock, Mgr. SALES</u>
NUS VISITATION _____	REPR & TITLE _____
PHONE <u>703-750-3230</u>	

NAME OF EQUIPMENT <u>ECONOMIZER CONTROLS</u>	
CATALOG NO _____	MODEL NO _____
DESCRIPTION <u>SIZE, DIAMETER, HEIGHT, WEIGHT, OVERALL DIMENSIONS, FLOOR SPACE REQUIRED,</u> <u>NUMBER OF MAJOR DRIVERS AND HORSEPOWER, LEGS, PAD, OTHER</u>	
SPECIAL CONDITIONS <u>REGULATORY, LOCAL CODES AND OTHER PROJECT UNIQUE REQUIREMENTS</u>	
ESTIMATED COST OR QUOTE _____	
VENDOR DELIVERY TIME _____	
SOURCE INSPECTION REQUIRED _____	
ITEM NO. ON EQUIPMENT LIST _____	
PLOT PLAN _____	FLOW CHARTS _____
OTHER <u>CATALOGUE AND VENDOR DESIGN DATA</u>	

MATTERS DISCUSSED <u>NOS REQUESTED BUDGET PRICES FOR REPLACING</u> <u>ECONOMIZER CONTROLS ON AN EXISTING SYSTEM</u> <u>≈ \$500 / UNIT MATERIAL (END OF \$1)</u> <u>≈ \$1000 TO ≈ \$1500 / UNIT TOTAL COSTS</u>	
<u>COST FOR PNEUMATIC TUBING RELOCATION ≈ \$1.50 TO \$2.00 / LIN. FT.</u> <u>FOR RETROFIT WORK</u>	

NUS PERSONNEL INVOLVED _____	PROJECT NO. <u>5395</u>
_____	BY <u>D. STUPLEY</u>

DISTRIBUTE TO	
PURCHASING _____	_____
ESTIMATING _____	_____

MODIFICATION No. 3

CLIENT DOA	CALC. No. 5395-M-03
SUBJECT CAMERON ST. ENERGY AUDIT BUILDING No. 3	

PROBLEM: ANALYSE POSSIBLE ENERGY SAVINGS REALIZED BY ADDING CLOSURE DAMPER TO OUTDOOR-AIR INTAKE & BY ADDING CONTROLS TO CLOSE STEAM COIL ON UNIT SHUT-DOWN	
CHECKER'S REMARKS:	

APPROACH/ASSUMPTIONS: U). ASSUME THERMAL STACK INCREASES OF ACROSS BUILDING WALLS ENOUGH TO INCREASE FLOW RATE BY 50% WHEN COIL IS HOT & 20% WHEN COIL IS COLD.	
CHECKER'S REMARKS:	

SOURCES-DATA/EQUATIONS: ASHRAE HB OF FUND. 72 - INFILTRATION DATA ch. 19.	
CHECKER'S REMARKS:	

CONCLUSIONS: TOTAL AMOUNT OF ENERGY WASTED THRU DEFICIENCY = 230 MBTU / yr. E/C RATIO = 19.4 PAY-BACK PERIOD = 6.00 yr.	
CHECKER'S REMARKS:	

CALCULATED BY S. Studley	DATE 1/21/81
CHECKED BY G.A. Leiko	DATE 6-12-81

ED-501 (2/80)




Page 1 of 4

DATE 1/21/81

CLIENT DOA FILE NO. 5395 BY D. STOLEY
 SUBJECT CAHERON ST. ENERGY AUDIT - BLDG. #3 Checked By CAA. WKO

MODIFICATION - ADD CLOSURE DAMPER TO OUTDOOR
 AIR INTAKE & ADD CONTROLS TO
 CLOSE STEAM VALVE ON UNIT
 SHUT-DOWN

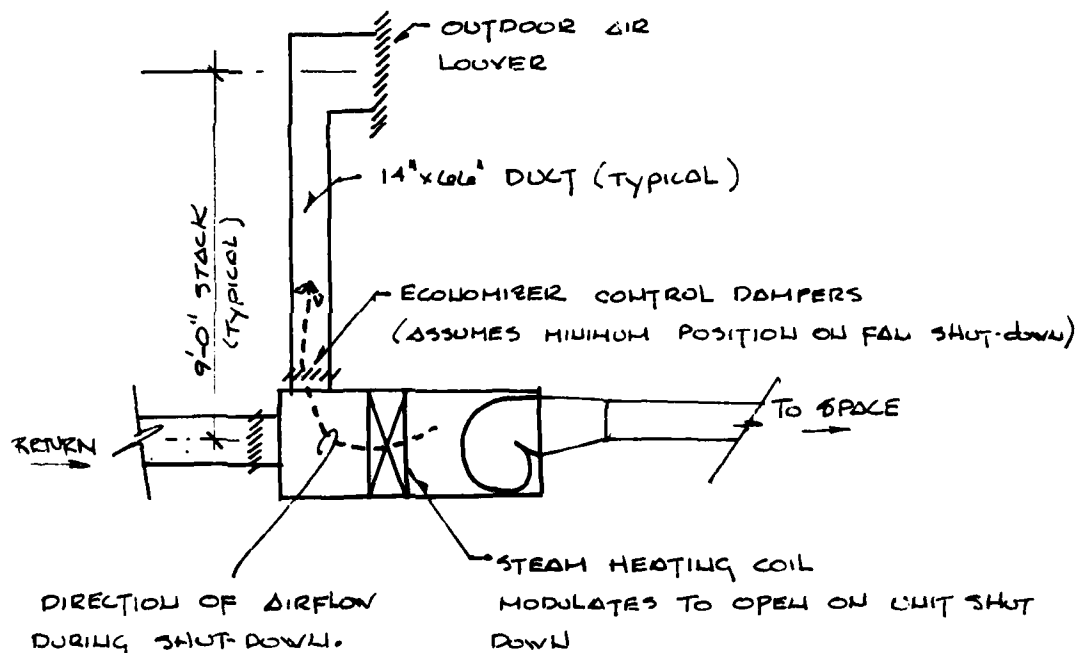

TOTAL AREA OF O.A. DUCTS -

$$\Delta = (24 \times 30) \times 2 + (14 \times 66) \times 9 + (28 \times 30) + (24 \times 40) \\ + (25 \times 72) + (20 \times 56) \times 2 + (48 \times 20) + (36 \times 30) \\ \Delta = 18,036 \text{ SQ. IN.}$$

Ave. HEIGHT OF STACK = 9'-0"

Page 2 of 4DATE 1/21/81CLIENT DOA FILE NO. 5395 BY D. STURLEYSUBJECT CONERON STATION ENERGY AUDIT Checked By G.A. LelkoADD CLOSURE DAMPERHEAT LOSS OUT O.D. INTAKE WHILE HEATING COIL
IS OPEN

$$Q = 9.4(A) \sqrt{h(T_i - t_o)} \quad \Delta \text{SHRDE H.B. OF FLUID. } 72$$

$$T_i - t_o = 180^\circ\text{F} - 70^\circ\text{F} = 110^\circ\text{F}$$

$$\Delta = 18036 / 144 = 125.25 \text{ sf.}$$

$$h = 9 \text{ ft.}$$

REDUCE Q DUE TO POOR EFFECTIVENESS OF OPG. (50%)

$$Q = 7.2(A) \sqrt{h(T_i - t_o)}$$

(use this value due to unfavorable conditions)

$$Q = 28,375 \text{ CFM} = \text{FLOW RATE TOO HIGH.}$$

- ASSUME FLOW RATE = 150% OF INFILTRATION

$$\text{OR } Q = 1.5 \times 4785 = 7180 \text{ CFM.}$$

$$\text{HEAT LOSS} = 1.08 \times 7180 \times 110^\circ\text{F} = \boxed{853,000 \text{ BTUH}}$$

[HOURS OF OPERATION, IN WHICH STEAM COIL IS
OPEN AND UNIT IS SHUT DOWN]

STEAM SYSTEM TYPICALLY OPERATES FROM 2-3 AM
TO 2-3 PM. UNIT OPERATES 5:00 AM - 5:00 PM

$$\% \text{ HRS. OF OPER.} = 2 \text{ hr./day} \times 5 \text{ day/wk} = 20 \text{ wk./yr}$$

$$= 200 \text{ Hours/yr}$$

$$\text{YEARLY ENERGY LOSS} = 200 \times 853,000 = \boxed{171 \times 10^6 \text{ BTU}}$$

FROM STEAM COIL

STACK EFFECT ALSO INCREASES INFILTRATION DUE TO
THE DIRECT ROUTE, EVEN WHEN COIL IS COLD

ASSUME 20% INCREASE IN INFILTRATION

$$\text{HEAT LOSS} = 1.08(4785 \times 0.2)(25^\circ\text{F}) = 25,840 \text{ BTUH}$$

$$\approx 108 \text{ Hours/wk} \times 20 \text{ wks/year} = \boxed{59 \times 10^6 \text{ BTU/yr}}$$

$$\boxed{\text{TOTAL} = 230 \times 10^6 \text{ BTU/yr HTG.}}$$



REPORT OF VENDOR CONTACT

DATE <u>1/8/80</u>	COMPANY NAME <u>ALEXANDER MacLEOD</u>
TIME _____	ADDRESS <u>4118 LEE Highway</u>
VENDOR REPR SOLICITATION _____	<u>ARLINGTON Va. 22207</u>
NUS VISITATION _____	REPR & TITLE <u>A. MacLEOD</u>
PHONE <u>301-773-2992</u>	REPR & TITLE _____

NAME OF EQUIPMENT <u>SHOT OF DOWPERS 16" x 160" or 14" x 160"</u>
<u>WITH ELECTRIC OPERATORS</u>
CATALOG NO _____ MODEL NO _____
DESCRIPTION <u>SIZE, DIAMETER, HEIGHT, WEIGHT, OVERALL DIMENSIONS, FLOOR SPACE REQUIRED</u>
<u>NUMBER OF MAJOR DRIVERS AND HORSEPOWER, LEGS PAD, OTHER</u>
SPECIAL CONDITIONS <u>REGULATORY, LOCAL CODES AND OTHER PROJECT UNIQUE REQUIREMENTS</u>
ESTIMATED COST OR QUOTE _____
VENDOR DELIVERY TIME _____
SOURCE INSPECTION REQUIRED _____
ITEM NO. ON EQUIPMENT LIST _____
PLOT PLAN _____ FLOW CHARTS _____
OTHER <u>CATALOGUE AND VENDOR DESIGN DATA</u>

MATTERS DISCUSSED <u>HOS REQUESTED BUDGET PRICES FOR 22</u>
<u>DOWPERS WITH OPERATORS.</u>
<u>UNIT PRICE = \$167.00 EA.</u>
<u>TOTAL PRICE = \$3677.00</u>
<u>UNIT PRICE FOR FBI = +8% = \$180.00</u>

NUS PERSONNEL INVOLVED _____	PROJECT NO. <u>3395</u>
_____	BY <u>D. STUBLEY</u>

DISTRIBUTE TO	_____
PURCHASING	_____
ESTIMATING	_____

[illegible]

MODIFICATION No. 4

CLIENT DOA	CALC. No. 5395-M-04
SUBJECT COHERON ST. ENERGY AUDIT. BUILDING No. 3	

PROBLEM:	
DETERMINE ENERGY SAVED BY RE-SCHEDULING DHU OPERATION	
EXISTING SCHEDULE = 5:00 AM - 5:00 PM	
PROPOSE SCHEDULE = 6:00 AM - 5:00 PM HEATING 8:00 AM - 3:00 PM COOLING	
CHECKER'S REMARKS:	

APPROACH/ASSUMPTIONS: PER CALC.	
CHECKER'S REMARKS:	

SOURCES-DATA/EQUATIONS:	
PER CELL.	
CHECKER'S REMARKS:	

CONCLUSIONS:

TOTAL ELECTRICAL SAVINGS = $17.2 \times 10^3 \text{ kWh/yr} \sim \$688 (\text{FY 81})$

TOTAL THERMAL SAVINGS = $121 \text{ MBTU/yr (HTG)} = \$1032$

$94 \text{ MBTU/yr (CLG)} = \$190$

TOTAL = \$1850/yr (FY 81)

CHECKER'S REMARKS:

CALCULATED BY D. STUPLEY	DATE 1/12/81
CHECKED BY /s/ A. Lalpo	DATE 6.12.81

Page 1 of 2DATE 1/21/81CLIENT DOA FILE NO. 5395BY D. STODLEYSUBJECT CAMERON STATION ENERGY AUDITChecked By Allen C. ZellerFAN SET-BACKS

(1). EXISTING CONDITIONS - Approximately 20% of
FANS ARE OPERATING CONTINUOUSLY

(2) TOTAL FAN ENERGY CONSUMPTION.

TOTAL DELIVERED $\Delta P = 137,560$ CFMAVE. S.P. = 2.75 "H₂O TOTAL

$$\text{EST. BHP} = \frac{137,560 \times 2.75}{4356 \times 0.7} = 85 \text{ HP.}$$
$$\approx 83 \text{ KW}$$

(3). YEARLY FAN ENERGY PER DESIGN OPERATION
(I.E. 5:00 AM TO 5:00 PM)

$$= 85 \text{ KW} \times \frac{12 \text{ Hr}}{\text{DAY}} \times 22 \frac{\text{day}}{\text{MONTH}} \times 12 \text{ MO.} = 269 \times 10^3 \text{ KWH/YR.}$$

ACTUAL FAN ENERGY (20% RUNNING CONTINUOUS)

$$= 85 \text{ KW} \times 0.2 \times (8760 \text{ hours} - 12 \times 22 \times 12) + 269 \times 10^3 \text{ KWH/YR.}$$
$$364 \times 10^3 \text{ KWH/YR.}$$

(4). RESTORING TIME clocks SAVE. $\frac{95 \times 10^3}{\text{KWH/YR.}} \approx 3800 \text{ (FY81)}$

(5) SAVINGS FOR 1 HOUR LATER START-UP (FAN ENERGY)
(6:00 AM TO 5:00 PM)

$$269 \times 10^3 \text{ KWH/YR} \times \frac{1 \text{ Hr}}{12 \text{ Hr}} = 22 \times 10^3 \text{ KWH/YR}$$
$$= 890 / \text{yr}$$

Page 2 of 2DATE 1/21/81CLIENT DOA FILE NO. 5395 BY D. STURLEY
SUBJECT CAMERON STATION ENERGY AUDIT Checked By A. ZelkoSUMMARY OF FAN ENERGY SAVINGS FOR OPERATING
FANS AS FOLLOWS:HEATING SEASON SCHEDULE 6:00 AM TO 5:00 PM
COOLING SEASON SCHEDULE 8:00 AM TO 5:00 PM.

FAN ENERGY SAVINGS

$$\begin{aligned} &= 22.4 \times 10^3 \text{ kWh/yr/hour} \times 2 \text{ hour} \\ &= 44.8 \times 10^3 \text{ kWh/yr} \\ &= \$1792 \quad (\text{FY81}) \end{aligned}$$

THERMAL ENERGY SAVINGS FOR FAN SET-BACKS

USING DOE II OUTPUT.

$$\begin{aligned} \text{HEATING LOAD - BASE RUN} &= 2203.7 \times 10^6 \text{ BTU/yr} \\ \text{1 hour SET-BACK} &= 2082.7 \times 10^6 \text{ BTU/yr} \end{aligned}$$

$$\begin{aligned} \text{SAVINGS (HTG.)} &= 121 \times 10^6 \text{ BTU/yr} \\ &= \$905/\text{yr} (80) \approx \$1032/\text{yr} (81) \end{aligned}$$

COOLING LOAD -

$$\begin{aligned} \text{BASE RUN} &= 1200.9 \times 10^6 \text{ BTU/yr} \\ \text{3 hour SET-BACK} &= 1164.9 \times 10^6 \text{ BTU/yr} \end{aligned}$$

$$36.0 \times 10^6 \text{ BTU/yr}$$

$$\text{SAVINGS} = \$130/\text{yr} \quad (\text{FY81})$$

$$\begin{aligned} \text{TOTAL SAVINGS} &= 95 \times 10^3 \text{ kWh (RESTORING)} = \$3800/\text{yr} \\ &22.4 \times 10^3 \text{ kWh (NEW SCHEDULE)} = \$1792/\text{yr} \\ \text{THERMAL (HTG.)} &= \$1032/\text{yr} \\ \text{THERMAL (CLG.)} &= \$130/\text{yr} \\ &\underline{\$6750/\text{yr}} \end{aligned}$$

MODIFICATION No. 5

CLIENT DOA	CALC. No. 5995-M-05
SUBJECT CAMERON STATION ENERGY AUDIT BUILDING No. 3	

PROBLEM: ANALYZE POSSIBLE ENERGY SAVINGS BY RELOCATING THERMOSTAT, RELOCATION DUE TO UNEVEN SPACE HEATING (OVER HEATING OF INTERIOR ZONES).	
CHECKER'S REMARKS:	

APPROACH/ASSUMPTIONS: 1). ONLY 10% OF EXCESS ENERGY IS DUMPED. 2). EXCESS SPACE TEMP. INCREASES HEAT FLUX THRU CEILING	
CHECKER'S REMARKS:	

SOURCES-DATA/EQUATIONS: MECHANICAL DRAWINGS	
CHECKER'S REMARKS:	

CONCLUSIONS: RELOCATING THE THERMOSTAT COULD SAVE 10.5 MBTU/YR AT A TOTAL COST OF \$540.	
CHECKER'S REMARKS:	

CALCULATED BY D. JUDLEY	DATE 11/21/81
CHECKED BY G.A. GILKE	DATE 6-12-81

ED 501 (2/80)

Page 1 of 4DATE 1/21/81CLIENT DOA FILE NO. 5395 BY D. STODLEYSUBJECT CAHERON STATION ENERGY AUDIT #3 Checked By G.A. WILCOTHERMOSTAT RELOCATION

DESCRIPTION - THE PRESENT SYSTEM PROVIDES TWO SOURCES OF HEATING FOR EACH ZONE. THE MAIN HEAT SOURCE IS SUPPLIED AT THE AIR HANDLING UNIT. ADDITIONAL HEAT IS SUPPLIED TO THE DUCT BRANCH SERVING THE PERIMETER ZONE

DEFICIENCY - BOTH THERMOSTATS CONTROLLING THE SYSTEM TEMPERATURE AND THE DUCT HEATERS ARE LOCATED IN AN EXTERIOR ROOM. THE LOGIC BEHIND THIS CONCEPT, IS TO SUPPLY ADDITIONAL HEAT TO THE EXTERIOR ROOM WHEN THE SYSTEM CAPACITY IS INADEQUATE, BUT THIS TYPE OF CONTROL SCHEME RESULTS IN SPACE TEMPERATURES EXCESSIVE IN INTERIOR SPACES.

SOLUTION - RELOCATE THERMOSTAT TO INTERIOR ZONE ; LEAVE DUCT HEATER THERMOSTAT IN EXTERIOR ZONE.

QUANTIFICATION -ANALYSIS OF AHU #6 (TYP.)TYP. LOAD FOR EXTERIOR SPACE @ 12°F OUTDOOR

SPACE RELIEVES 1.14 CFM/S.F. OR USE 120 CFM FOR 100 S.F.

$$\bullet \text{ INTERNAL} = 3.45 \text{ WATTS/S.F.} \times 3.41 \times 100 \text{ SF} = +1174 \text{ BTUH}$$

$$\bullet \text{ WALL LOAD} = 10 \times 9 \times (0.251) \times (68-12) = -1416$$

$$\bullet \text{ CEILING LOAD} = 100 \times (0.204) \times (68-35) = -679.8$$

$$\text{EXT. RM. LOAD} = -920 \text{ BTUH.}$$

A-32

Page 2 of 4DATE 1/21/81CLIENT DOA FILE NO. 3395 BY D. STUDLEYSUBJECT CAMERON ST. ENERGY AUDIT #3 Checked By G. A. VelkoTHERMOSTAT RELOCATION

WHAT Supply Air Temp. SATISFIES EXTERIOR ZONE.

$$\text{Load} = 920 \text{ BTUH.}$$

$$\text{CFM} = 120 \text{ CFM}$$

$$920 = (x - 68)(1.08)(120)$$

$$x = 75^\circ\text{F}$$

$$\Delta T = 7.1^\circ\text{F}$$

$$\text{TOTAL EXTERIOR AREA OF AHU \#6} = 2762 \text{ S.F.}$$

$$\text{TOTAL INTERIOR AREA OF AHU \#6} = 2645 \text{ S.F.}$$

HEAT LOSS OF EXTERIOR ZONE (AHU \#6)

$$Q_{\text{walls}} = (119.5 \times 9)(0.281)(54) = 16,924 \text{ BTUH}$$

$$Q_{\text{ceiling}} = (2762 \text{ S.F.})(0.206)(68-35) = 18,776 "$$

$$Q_{\text{gains}} = (2762 \text{ S.F.})(3.45)(3.41) = -32,500 "$$

$$Q_{\text{floor}} = 2 \text{ BTUH/S.F.} \times 2762 = 5524 "$$

$$\text{Load} = 8724 \text{ BTUH}$$

$$\text{DELIVERED CFM} = 2725 \text{ CFM}$$

$$\Delta T = 8724 / 2725(1.08) = 3.0^\circ\text{F}$$

HEAT LOSS OF INTERIOR ZONE

$$Q_{\text{walls}} = 0$$

$$Q_{\text{ceiling}} = 2645(0.206)(68-35) = +17,980 \text{ BTUH}$$

$$Q_{\text{floor}} = 2 \times 2645 = +5290 "$$

$$\uparrow Q_{\text{internal}} = 2645 \times 3.45 \times 3.41 = -31,100 \text{ BTUH @ } 3.45 \text{ W/S.F.}$$

$$Q_{\text{internal}} = 2645 \times 1.5 \times 3.41 = -13,530 \text{ BTUH @ } 1.5 \text{ W/S.F.}$$

$$\text{NET LOAD} = 7830 \text{ BTUH @ } 3.45 \text{ W/S.F. (Heat Gain)}$$

*USE 3.45 W/S.F.

(FROM KWH METERS)

$$+ \text{approx. 10 people} = 9830 \text{ BTUH}$$



Page 3 of 4

DATE 1/21/81

CLIENT DOA FILE NO. 5395
 SUBJECT CAWSON ST. ENERGY AUDIT #3

BY D. STUDLEY
 Checked By G.A. Zeller

THERMOSTAT RELOCATION

INTERIOR ZONE - EXCESS HEAT

INTERNAL GAIN = 7830 BTUH

DELIVERED CFM = 2190 CFM

HEAT GAIN = $2190 \times 1.08 \times 3.0^{\circ}\text{F} = 7095 \text{ BTUH}$

TOTAL = 14,835 BTUH

POSSIBLE SAVINGS (AHU #6)

- (1) 90% OF EXCESS HEAT IS RECIRCULATED, 10% IS
 LOST OR DUMPED
- (2) INCREASE HEAT FLOW RATE THRU CEILING (4°F)
- (3) 500 HOUR OCCURRENCE

HEAT WASTED = $0.1 \times 14,835 = 1,484 \text{ BTUH}$

+ $0.204 (2,643 \times 4^{\circ}\text{F}) = 2,180 \text{ BTUH}$
 3,663 BTUH

YEARLY SAVINGS = $500 \times 3,663 = 1.83 \times 10^6 \text{ BTU/yr. (AHU #6)}$
 OR 730 BTU/yr/S.F.

<u>UNIT NO.</u>	<u>INTERIOR AREA</u>	<u>x 730 BTU/yr/S.F.</u>	<u>SAVINGS</u>
AHU #4	2600 S.F.	x 730	= $1.9 \times 10^6 \text{ BTU/yr}$
AHU #1	1500 "	"	1.1 "
AHU #3	2100 "	"	1.53 "
AHU #6	2650 "	"	1.93 "
AHU #7	820 "	"	0.60 "
AHU #13	2360 "	"	1.72 "
AHU #15	2300 "	"	1.68 "

TOTAL SAVINGS = $10.9 \times 10^6 \text{ BTU/yr}$

COST ESTIMATE

ACTIVITY AND LOCATION		PROJECT TITLE		STATUS OF DESIGN		NUS CORPORATION		DATE	
CAMERON ST. ENERGY AUDIT BLDG. NO. 3		MOD. #5. RELOCATE MASTER THERMOSTAT		☐ P.D. ☐ 30% ☐ 100%	☐ FINAL ☐ OTHER (Specify)	NUS CORPORATION		Pg. 4 of 4 1/21/81 D. STABLEY	
ITEM DESCRIPTION	QUANTITY NUMBER	UNIT	MATERIAL COST		LABOR COST		ENCUMBRANCE ESTIMATE		
			UNIT PRICE	TOTAL	UNIT PRICE	TOTAL	UNIT PRICE	TOTAL	
PER VENDOR CONTACTS, COST TO									
INSTALL PNEUMATIC TUBING 2 1/2" - 2/FT									
(INCLUDING O.P.) - UTILITIES EXISTING									
TUBING AND USE \$2.00/FT									
27 UNITS @ 20 FT. @ 2.00 /FT									
= \$280									
ADD 100% FOR FIELD CONDITIONS									
= \$560									
Bare Costs:									
Contingency:									
Overhead + Profits:									
Subtotal:								\$560	
Escalation:									
Construction Budget									
Design Fee:									

APPENDIX B

CAMERON STATION ENERGY AUDIT
 DECEMBER 1980
 REPORT- SS-C ZONE MONTHLY LOADS SUMMARY FOR Z-1 IN BSYS

00E-2.0A 12/22/80 11.21.15. SDL RUN 1

MONTH	C O O L I N G				MAXIMUM COOLING LOAD (KBTU/HR)	H E A T I N G				MAXIMUM HEATING LOAD (KBTU/HR)	E L E C	
	COOLING ENERGY (MBTU)	TIME OF MAX DY HR	DRY- BULB TEMP	WET- BULB TEMP		HEATING ENERGY (MBTU)	TIME OF MAX DY HR	DRY- BULB TEMP	WET- BULB TEMP		ELEC- TRICAL ENERGY (KWH)	MAXIMUM ELEC LOAD (KW)
JAN	0.00000				0.000	-322.378	28	7	36F	35F	99184.	451.
FEB	0.00000				0.000	-189.691	25	6	40F	40F	85659.	451.
MAR	0.00000				0.000	-141.013	11	7	35F	31F	94676.	451.
APR	79.40198	24	16	88F	69F	1476.279	1	5	40F	36F	99184.	451.
MAY	180.25013	15	16	87F	72F	1651.877				0.000	99184.	451.
JUN	285.03730	18	16	94F	76F	1983.702				0.000	90167.	451.
JUL	362.02157	22	16	99F	75F	2115.838				0.000	99184.	451.
AUG	324.67035	16	16	92F	69F	1922.670				0.000	99184.	451.
SEP	241.03387	3	16	92F	73F	1826.393				0.000	90167.	451.
OCT	88.07552	9	16	73F	62F	1154.531	29	6	38F	35F	99184.	451.
NOV	0.00000				0.000	-78.283	11	5	31F	28F	90167.	451.
DEC	0.00000				0.000	-201.249	30	7	32F	30F	94676.	451.
TOTAL	1560.491					-1038.088					1140616.	
MAX					2115.838					-2751.916		451.

MODIFICATION - Using 0.06
 SYSTEM TYPE = SUM

CAMERON STATION ENERGY AUDIT
 DECEMBER 1980
 REPORT- SS-G ZONE MONTHLY LOADS SUMMARY FOR Z-1
 NUS CORPORATION
 SYSTEM SUM
 IN BSYS
 DNE-2.0A 12/22/80 11.14.34. SDL RUN 1

MONTH	C O O L I N G				MAXIMUM COOLING LOAD (KBTU/HR)	H E A T I N G				MAXIMUM HEATING LOAD (KBTU/HR)	E L E C	
	COOLING ENERGY (MBTU)	TIME OF MAX DY HR	DRY- BULB TEMP	WET- BULB TEMP		HEATING ENERGY (MBTU)	TIME OF MAX DY HR	DRY- BULB TEMP	WET- BULB TEMP		ELEC- TRICAL ENERGY (KWH)	MAXIMUM ELEC LOAD (KW)
JAN	0.00000				0.000	-396.803	28 8	36F	35F	-2829.538	99184.	451.
FEB	0.00000				0.000	-242.504	25 7	41F	40F	-2829.538	85659.	451.
MAR	0.00000				0.000	-187.766	25 5	41F	33F	-2829.538	94676.	451.
APR	65.87256	24 16	88F	69F	1425.594	-87.171	15 6	34F	29F	-2829.538	99184.	451.
MAY	160.92691	15 16	87F	72F	1623.852	0.000				0.000	99184.	451.
JUN	272.93135	18 16	94F	76F	1965.427	0.000				0.000	90167.	451.
JUL	351.53935	22 16	99F	75F	2093.361	0.000				0.000	99184.	451.
AUG	309.54203	16 16	92F	69F	1895.596	0.000				0.000	99184.	451.
SEP	224.84233	3 16	92F	73F	1789.923	0.000				0.000	90167.	451.
OCT	63.65479	9 16	73F	62F	1052.387	-58.487	29 7	40F	36F	-2829.538	99184.	451.
NOV	0.00000				0.000	-116.473	25 5	45F	39F	-2829.538	90167.	451.
DEC	0.00000				0.000	-264.259	30 7	32F	30F	-2829.538	94676.	451.
TOTAL	1449.309					-1353.463					1140616.	
MAX					2093.361					-2829.538		451.

MODIFICATION - Ueaiung = 0.09
 SYSTEM TYPE = SUM.

CAMEXON STATION ENERGY AUDIT
 DECEMBER 1980
 REPORT - SS-G ZONE MONTHLY LOADS SUMMARY FOR 7-1

NUS CORPORATION
 SYSTEM SUM

ONE-2.0A 01/02/81 15.57.42. SCL RUN 1

IN HSYS

C O O L I N G												H E A T I N G				E L E C	
MONTH	COOLING ENERGY (MBTU)	TIME OF MAX DY HR	DRY- BULB TEMP	WET- BULB TEMP	MAXIMUM COOLING LOAD (KBTU/HR)	HEATING ENERGY (MBTU)	TIME OF MAX DY HR	DRY- BULB TEMP	WET- BULB TEMP	MAXIMUM HEATING LOAD (KBTU/HR)	ELEC- TRICAL ENERGY (KWH)	MAXIMUM ELEC LOAD (KW)					
JAN	0.00000				0.000	-247.033	28 7	36F	35F	-2683.703	99184.	451.					
FEB	0.00000				0.000	-138.013	19 7	48F	40F	-2683.703	85659.	451.					
MAR	0.00000				0.000	-96.087	11 6	33F	29F	-2683.703	94676.	451.					
APR	97.83795	24 16	88F	69F	1527.127	-43.914	1 5	40F	36F	-2250.626	99184.	451.					
MAY	201.31379	15 16	87F	72F	1677.662	0.000				0.000	99184.	451.					
JUN	297.44879	18 16	94F	76F	1999.551	0.000				0.000	90167.	451.					
JUL	372.33961	22 16	99F	75F	2137.259	0.000				0.000	99184.	451.					
AUG	339.90478	1 16	90F	69F	1947.406	0.000				0.000	99184.	451.					
SEP	258.47114	3 16	92F	73F	1863.363	0.000				0.000	90167.	451.					
OCT	117.32649	9 16	73F	62F	1257.113	-25.417	29 5	39F	35F	-2377.376	99184.	451.					
NOV	0.00000				0.000	-42.528	11 5	31F	28F	-1892.352	90167.	451.					
DEC	0.00000				0.000	-138.594	30 5	32F	30F	-2683.703	94676.	451.					
TOTAL	1684.643					-731.587				-2683.703	1140616.	451.					
MAX					2137.259					-2683.703		451.					

MODIFICATION - U_{GLASS} = 0.03
 SYSTEM TYPE - SUM

CAMERON STATION ENERGY AUDIT
 DECEMBER 1980
 REPORT- SS-C ZONE MONTHLY LOADS SUMMARY FOR 2-1
 NUS CORPORATION
 SYSTEM SUM
 IN BSYS
 DNE-2.0A 12/22/80 09.40.15, SDL RUN 1

C O O L I N G						H E A T I N G						E L E C	
MONTH	COOLING ENERGY (MBTU)	TIME OF MAX DY HR	DRY- BULB TEMP	WET- BULB TEMP	MAXIMUM COOLING LOAD (KBTU/HR)	HEATING ENERGY (MBTU)	TIME OF MAX DY HR	DRY- BULB TEMP	WET- BULB TEMP	MAXIMUM HEATING LOAD (KBTU/HR)	ELEC- TRICAL ENERGY (KWH)	MAXIMUM ELEC LOAD (KW)	
JAN	0.00000				0.000	-584.862	29	6	35F	-3097.685	99184.	451.	
FEB	0.00000				0.000	-378.781	25	8	40F	-3097.685	85659.	451.	
MAR	0.00000				0.000	-314.691	25	7	38F	-3097.685	94676.	451.	
APR	42.82269	24	16	88F	69F	-153.507	15	7	35F	-3097.685	99184.	451.	
MAY	117.82697	15	16	87F	72F	0.000				0.000	99184.	451.	
JUN	241.35325	18	16	94F	76F	0.000				0.000	90167.	451.	
JUL	321.95091	22	16	99F	75F	0.000				0.000	99184.	451.	
AUG	269.59894	16	16	92F	69F	0.000				0.000	99184.	451.	
SEP	184.99686	1	16	92F	73F	0.000				0.000	90167.	451.	
OCT	22.35475	9	16	73F	62F	-119.252	29	8	39F	-3097.685	99184.	451.	
NOV	0.00000				0.000	-224.960	25	7	44F	-3097.685	90167.	451.	
DEC	0.00000				0.000	-427.662	31	5	32F	-3097.685	94676.	451.	
TOTAL	1200.900					-2203.715				-3097.685	1140616.	451.	
MAX					2021.474								

BASELINE RUN
 SYSTEM- SUM
 EXISTING CONDITIONS, U-VALUE OF CEILING = 0.204
 INFILTRATION = 0.162 CFM / SF 5:00 AM - 5:00 PM
 = 0.097 CFM / SF 5:00 PM - 5:00 AM
 HVAC EQUIP. SCHEDULE 5:00 AM - 5:00 PM.

CAMEXON STATION ENERGY AUDIT NUS CORPORATION 01/06/81 15.49.27. SCL RUN 1
 DECEMBER 1980 SYSTEM SZRM
 REPORT- SS-D PLANT MONTHLY LOADS SUMMARY FOR DEFAULT-PLANT

MONTH	C O O L I N G				MAXIMUM COOLING LOAD (KBTU/HR)	H E A T I N G				MAXIMUM HEATING LOAD (KBTU/HR)	ELEC- TRICAL ENERGY (KWH)	MAXIMUM ELEC LOAD (KW)
	COOLING ENERGY (MBTU)	TIME OF MAX DY HR	DRY- BULB TEMP	WET- BULB TEMP		HEATING ENERGY (MBTU)	TIME OF MAX DY HR	DRY- BULB TEMP	WET- BULB TEMP			
JAN	0.00000				0.000	-360.565	18 6	9F	9F	-3389.057	120466.	531.
FEB	0.00000				0.000	-193.695	20 6	25F	23F	-2999.293	104038.	531.
MAR	0.00000				0.000	-140.770	4 8	29F	25F	-2985.455	114990.	531.
APR	77.09242	26 15	74F	66F	2698.830	-55.522	15 6	34F	29F	-2928.659	120466.	531.
MAY	209.16250	14 9	73F	70F	3338.456	0.000				0.000	120466.	531.
JUN	463.48030	25 15	74F	72F	5168.567	0.000				0.000	109514.	531.
JUL	538.86212	9 7	74F	72F	5166.824	0.000				0.000	120466.	531.
AUG	421.04688	12 8	74F	70F	4537.398	0.000				0.000	120466.	531.
SEP	355.98798	4 9	74F	72F	4784.512	0.000				0.000	109514.	531.
OCT	17.57899	9 16	73F	62F	1655.672	-38.671	29 6	38F	35F	-2830.926	120466.	531.
NOV	0.00000				0.000	-85.043	11 6	31F	27F	-3003.032	109514.	531.
DEC	0.00000				0.000	-216.667	30 6	32F	29F	-2936.705	114990.	531.
TOTAL	2083.711					-1090.932					1385355.	
MAX					5168.567					-3389.057		531.

SINGLE - ROWE W/ ECONOMIZER
 MODIFIED HVAC SCHEDULE
 HEATING 6:00AM, COOLING 8:00 AM

CAMERON STATION ENERGY AUDIT
 NUS CORPORATION
 SYSTEM SZRH AND SYSTEM FPH
 REPORT- S9-D PLANT MONTHLY LOADS SUMMARY FOR PLNT-1
 01/02/81 16.24.33. SOL RUN 1

MONTH	C O O L I N G				H E A T I N G				E L E C			
	COOLING ENERGY (MBTU)	TIME OF MAX DY HR	DRY- BULB TEMP	WET- BULB TEMP	MAXIMUM COOLING LOAD (KBTU/HR)	HEATING ENERGY (MBTU)	TIME OF MAX DY HR	DRY- BULB TEMP	WET- BULB TEMP	MAXIMUM HEATING LOAD (KBTU/HR)	ELEC- TRICAL ENERGY (KWH)	MAXIMUM ELEC LOAD (KW)
JAN	0.00000				0.000	-370.028	2 5	17F	15F	-6000.628	122239	531.
FEB	0.00000				0.000	-250.981	19 5	49F	40F	-4710.977	185570.	531.
MAR	0.00000				0.000	-223.333	4 5	29F	26F	-4603.078	116683.	531.
APR	17.43875	24 17	85F	70F	983.082	-155.372	15 5	34F	30F	-4145.212	122239.	531.
MAY	55.94395	15 16	87F	72F	998.305	0.000				0.000	122239.	531.
JUN	129.39809	14 16	91F	76F	1513.683	0.000				0.000	111126.	531.
JUL	141.57809	31 16	90F	72F	1343.714	0.000				0.000	122239.	531.
AUG	124.00251	30 16	91F	73F	1431.411	0.000				0.000	122239.	531.
SEP	79.78284	13 16	88F	76F	1445.059	0.000				0.000	111126.	531.
OCT	3.73760	9 16	73F	62F	733.054	-116.148	29 5	39F	35F	-4223.414	122239.	531.
NOV	0.00000				0.000	-165.135	11 5	31F	28F	-4126.212	111126.	531.
DEC	0.00000				0.000	-275.020	30 5	32F	30F	-4398.106	116683.	531.
TOTAL	551.882				1513.683	-1558.019				-6000.628	1405750.	531.
MAX												

BASELINE RUN FOR SINGLE ZONE SYSTEM
 W/ ECONOMIZER
 SIMILAR SAVING W/ SUM RUNS FOR COMPARISON
 OF ECONOMIZER SAVINGS

MONTH	C O O L I N G				MAXIMUM COOLING LOAD (KBTU/HR)	H E A T I N G				MAXIMUM HEATING LOAD (KBTU/HR)	E L E C	
	COOLING ENERGY (MBTU)	TIME OF MAX DY HR	DRY- BULB TEMP	WET- BULB TEMP		HEATING ENERGY (MBTU)	TIME OF MAX DY HR	DRY- BULB TEMP	WET- BULB TEMP		ELEC- TRICAL ENERGY (KWH)	MAXIMUM ELEC LOAD (KW)
JAN	0.00000				0.000	-292.709	28	8	36F	35F	99184.	451.
FEB	0.00000				0.000	-168.226	25	7	41F	40F	85659.	451.
MAR	0.00000				0.000	-118.707	25	7	38F	31F	94676.	451.
APR	73.20523	24	16	88F	69F	-47.772	15	7	35F	30F	99184.	451.
MAY	179.50102	15	16	87F	72F	0.000				0.000	99184.	451.
JUN	280.74348	18	16	94F	76F	0.000				0.000	90167.	451.
JUL	355.71714	22	16	99F	75F	0.000				0.000	99184.	451.
AUG	319.95995	1	16	90F	69F	0.000				0.000	99184.	451.
SEP	238.32526	3	16	92F	73F	0.000				0.000	90167.	451.
OCT	82.40197	9	16	73F	62F	-27.572	29	7	40F	36F	99184.	451.
NOV	0.00000				0.000	-60.215	11	7	30F	27F	90167.	451.
DEC	0.00000				0.000	-176.985	30	7	32F	30F	94676.	451.
TOTAL	1529.854					-892.187					1140616.	
MAX					2173.460					-2751.916		451.

57

MODIFICATION. Cooling = 0.04 HVAC Sched.
 at 7:00 AM - 5:00 PM
 SYSTEM - SUM.

CAMELION STATION ENERGY AUDIT
 DECEMBER 1980
 REPORT- 33-C ZONE MONTHLY LOADS SUMMARY FOR 2-1
 NUS CORPORATION
 SYSTEM SUM
 IN BSYS

DOE-2.0A 12/22/80 11.23.55. SOL RUN 1

C O O L I N G													H E A T I N G													E L E C												
MONTH	COOLING ENERGY (MBTU)	TIME OF MAX DY HR	DRY- BULB TEMP	WET- BULB TEMP	MAXIMUM COOLING LOAD (KBTU/HR)	HEATING ENERGY (MBTU)	TIME OF MAX DY HR	DRY- BULB TEMP	WET- BULB TEMP	MAXIMUM HEATING LOAD (KBTU/HR)	ELEC- TRICAL ENERGY (KWH)	MAXIMUM ELEC LOAD (KW)																										
JAN	0.00000				0.000	-350.194	31	7	34F	33F	99184.	451.																										
FEB	0.00000				0.000	-235.875	26	7	53F	53F	85659.	451.																										
MAR	0.00000				0.000	-192.674	26	7	40F	36F	94676.	451.																										
APR	47.08136	30	16	79F	57F	-94.700	16	7	40F	38F	99184.	451.																										
MAY	129.13253	15	16	87F	72F	0.000				0.000	99184.	451.																										
JUN	225.64032	18	16	94F	76F	0.000				0.000	90167.	451.																										
JUL	299.95453	22	16	99F	75F	0.000				0.000	99184.	451.																										
AUG	262.41217	1	16	90F	69F	0.000				0.000	99184.	451.																										
SEP	189.52320	13	16	88F	76F	0.000				0.000	90167.	451.																										
OCT	39.14437	9	16	73F	62F	-71.559	30	7	49F	43F	99184.	451.																										
NOV	0.00000				0.000	-134.722	29	7	57F	55F	90167.	451.																										
DEC	0.00000				0.000	-269.252	31	9	32F	30F	94676.	451.																										
TOTAL	1192.896					-1348.976					1140616.																											
MAX					1620.018					-1472.113		451.																										

MODIFICATION- INFILTRATION @ 0.097 CFM / S.F.
 TO DETERMINE LOAD / CFM OF O.A.
 SYSTEM - SUM

CAMERON STATION ENERGY AUDIT
 DECEMBER 1980
 REPORT- SS-G ZONE MONTHLY LOADS SUMMARY FOR 2-1

NUS CORPORATION
 SYSTEM SUM

DOE-2.0A

12/22/80

14.02.01. SCL RUN 1

IN BSYS

C O O L I N G													H E A T I N G													E L E C												
MONTH	COOLING ENERGY (MBTU)	TIME OF MAX DY HR	DRY- BULB TEMP	WET- BULB TEMP	MAXIMUM COOLING LOAD (KBTU/HR)	HEATING ENERGY (MBTU)	TIME OF MAX DY HR	DRY- BULB TEMP	WET- BULB TEMP	MAXIMUM HEATING LOAD (KBTU/HR)	ELEC- TRICAL ENERGY (KWH)	MAXIMUM ELEC LOAD (KW)																										
JAN	0.00000				0.000	-498.387	29	8	35F	35F	99184.	451.																										
FEB	0.00000				0.000	-321.600	25	10	44F	44F	85659.	451.																										
MAR	0.00000				0.000	-259.459	25	8	38F	31F	94676.	451.																										
APR	37.33023	24	17	85F	70F	-113.458	15	9	41F	35F	99184.	451.																										
MAY	117.52396	15	16	87F	72F	0.000				0.000	99184.	451.																										
JUN	235.60573	18	16	94F	76F	0.000				0.000	90167.	451.																										
JUL	313.66563	22	16	99F	75F	0.000				0.000	99184.	451.																										
AUG	264.72144	16	16	92F	69F	0.000				0.000	99184.	451.																										
SEP	183.00495	3	16	92F	73F	0.000				0.000	90167.	451.																										
OCT	13.04426	9	16	73F	62F	-74.697	29	10	47F	42F	99184.	451.																										
NOV	0.00000				0.000	-176.463	25	9	44F	39F	90167.	451.																										
DEC	0.00000				0.000	-361.520	31	8	31F	30F	94676.	451.																										
TOTAL	1164.896					-1805.584					1140616.																											
MAX					2101.633					-3097.685		451.																										

MODIFICATION - HVAC SCHED. 8:00AM - 5:00PM
 SYSTEM - SUM.

CAMERUN STATION ENERGY AUDIT NUS CORPORATION
 DECEMBER 1980 SYSTEM SUM
 REPORT- SS-G ZONE MONTHLY LOADS SUMMARY FOR 2-1
 IN BSYS

DOE-2.0A 12/22/80 13.59.30. SDL RUN 1

C O L I N G													H E A T I N G													E L E C												
MONTH	COOLING ENERGY (MBTU)	TIME OF MAX DY HR	DRY- BULB TEMP	WET- BULB TEMP	MAXIMUM COOLING LOAD (KBTU/HR)	HEATING ENERGY (MBTU)	TIME OF MAX DY HR	DRY- BULB TEMP	WET- BULB TEMP	MAXIMUM HEATING LOAD (KBTU/HR)	ELEC- TRICAL ENERGY (KWH)	MAXIMUM ELEC LOAD (KW)																										
JAN	0.00000				0.000	-529.009	29 7	35F	35F	-3097.685	99184.	451.																										
FEB	0.00000				0.000	-342.041	25 9	43F	43F	-3097.685	85659.	451.																										
MAR	0.00000				0.000	-279.584	25 8	38F	31F	-3097.685	94676.	451.																										
APR	39.41761	24 17	85F	70F	1259.061	-128.376	15 8	38F	32F	-3097.685	99184.	451.																										
MAY	117.59557	15 16	87F	72F	1530.313	0.000				0.000	99184.	451.																										
JUN	237.52974	18 16	94F	76F	1952.072	0.000				0.000	90167.	451.																										
JUL	316.41667	22 16	99F	75F	2072.874	0.000				0.000	99184.	451.																										
AUG	266.19185	16 16	92F	69F	1835.413	0.000				0.000	99184.	451.																										
SEP	183.57694	3 16	92F	73F	1699.652	0.000				0.000	90167.	451.																										
OCT	16.61118	9 16	73F	62F	730.267	-92.103	29 9	42F	38F	-3097.685	99184.	451.																										
NOV	0.00000				0.000	-194.082	25 8	44F	39F	-3097.685	90167.	451.																										
DEC	0.00000				0.000	-384.662	31 7	31F	29F	-3097.685	94676.	451.																										
TOTAL	1177.340				2072.874	-1949.857				-3097.685	1140616.	451.																										
MAX																																						

MODIFICATION-HVAC SCHED. 7:00AM-5:00PM
 SYSTEM- SUM

CAMERON STATION ENERGY AUDIT
 DECEMBER 1980
 REPORT- SS-6 ZONE MONTHLY LOADS SUMMARY FOR 2-1
 NUS CORPORATION
 SYSTEM SUM
 IN BSYS
 DOE-2.0A 12/22/80 13.57.50. 000 JUN 1

- - - - - C O O L I N G - - - - -													- - - - - H E A T I N G - - - - -													- - - - - E L E C - - - - -												
MONTH	COOLING ENERGY (MBTU)	TIME OF MAX DY HR	DRY- BULB TEMP	WET- BULB TEMP	MAXIMUM COOLING LOAD (KBTU/HR)	HEATING ENERGY (MBTU)	TIME OF MAX DY HR	DRY- BULB TEMP	WET- BULB TEMP	MAXIMUM HEATING LOAD (KBTU/HR)	ELEC- TRICAL ENERGY (KWH)	MAXIMUM ELEC LOAD (KW)																										
JAN	0.00000				0.000	-557.862	29	7	35F	35F	99184.	451.																										
FEB	0.00000				0.000	-361.220	25	8	40F	40F	85659.	451.																										
MAR	0.00000				0.000	-297.937	25	7	38F	31F	94676.	451.																										
APR	41.21513	24	16	88F	69F	-141.691	15	7	35F	30F	99184.	451.																										
MAY	117.68603	15	16	87F	72F	0.000				0.000	99184.	451.																										
JUN	239.44532	18	16	94F	76F	0.000				0.000	90167.	451.																										
JUL	319.18033	22	16	99F	75F	0.000				0.000	99184.	451.																										
AUG	267.79778	16	16	92F	69F	0.000				0.000	99184.	451.																										
SEP	184.23225	3	16	92F	73F	0.000				0.000	90167.	451.																										
OCT	19.75329	9	16	73F	62F	-106.875	29	9	42F	38F	99184.	451.																										
NOV	0.00000				0.000	-210.281	25	7	44F	39F	90167.	451.																										
DEC	0.00000				0.000	-406.858	31	7	31F	29F	94676.	451.																										
TOTAL	1189.310					-2082.723					1180616.																											
MAX					2046.301					-3097.685		451.																										

MODIFICATION - HVAC SCHED. 6:00 AM - 5:00 PM
 SYSTEM TYPE - SUM

CAMELION STATION ENERGY AUDIT
 DECEMBER 1980
 REPORT- SS-U PLANT MONTHLY LOADS SUMMARY FOR DEFAULT-PLANT

DNE-2.0A 01/06/81 12.28.34. SOL RUN 1

MONTH	COOLING				HEATING				ELEC			
	COOLING ENERGY (MBTU)	TIME OF MAX DY HH	DRY- BULB TEMP	WET- BULB TEMP	MAXIMUM COOLING LOAD (KBTU/HR)	HEATING ENERGY (MBTU)	TIME OF MAX DY HH	DRY- BULB TEMP	WET- BULB TEMP	MAXIMUM HEATING LOAD (KBTU/HR)	ELEC- THERMAL ENERGY (KWH)	MAXIMUM ELEC LOAD (KW)
JAN	0.00000				0.000	-288.296	2 9	20F	17F	-3123.940	122239.	531.
FEB	0.00000				0.000	-151.624	4 5	45F	44F	-2739.415	105570.	531.
MAR	0.00000				0.000	-107.231	4 5	29F	26F	-3033.252	116683.	531.
APR	76.67088	26 15	74F	66F	2614.495	-43.897	15 5	34F	30F	-2555.131	122239.	531.
MAY	205.55619	14 9	73F	70F	3087.642	0.000				0.000	122239.	531.
JUN	470.43649	25 15	74F	72F	4751.419	0.000				0.000	111126.	531.
JUL	541.33182	9 7	74F	72F	4315.828	0.000				0.000	122239.	531.
AUG	421.70655	12 8	74F	70F	3969.176	0.000				0.000	122239.	531.
SEP	358.82694	4 9	74F	72F	4286.020	0.000				0.000	111126.	531.
OCT	20.33035	9 16	73F	62F	1692.035	-29.911	29 5	39F	35F	-2709.526	122239.	531.
NOV	0.00000				0.000	-60.378	11 5	31F	28F	-2539.386	111126.	531.
DEC	0.00000				0.000	-162.847	30 5	32F	30F	-3003.438	116683.	531.
TOTAL	2095.075					-844.184					1405750.	
MAX					4751.419					-3123.940		531.

SINGLE-ZONE w/ ECONOMIZER
 ROOF TREATED AS ATTIC SPACE
 MODIFIED - U_{roof} = 0.072
 3" INSULATION

C O O L I N G						H E A T I N G						E L E C		
MONTH	COOLING ENERGY (MBTU)	TIME OF MAX DY HR	DRY- BULB TEMP	WET- BULB TEMP	MAXIMUM COOLING LOAD (KBTU/HR)	HEATING ENERGY (MBTU)	TIME OF MAX DY HR	DRY- BULB TEMP	WET- BULB TEMP	MAXIMUM HEATING LOAD (KBTU/HR)	ELEC- TRICAL ENERGY (KWH)	MAXIMUM ELEC LOAD (KW)		
JAN	0.00000				0.000	-384.538	18 5	9F	8F	-3402.438	122239.	531.		
FEB	0.00000				0.000	-210.667	11 5	36F	34F	-2902.269	105570.	531.		
MAR	0.00000				0.000	-156.812	4 5	29F	26F	-2968.115	116683.	531.		
APR	77.06356	26 15	74F	66F	2689.194	-64.824	15 5	34F	30F	-2932.493	122239.	531.		
MAY	211.02245	14 9	73F	70F	3175.014	0.000				0.000	122239.	531.		
JUN	494.46156	25 15	74F	72F	4952.081	0.000				0.000	111126.	531.		
JUL	574.72640	9 7	74F	72F	4474.349	0.000				0.000	122239.	531.		
AUG	435.85897	12 8	74F	70F	4163.102	0.000				0.000	122239.	531.		
SEP	365.59173	4 9	74F	72F	4374.892	0.000				0.000	111126.	531.		
OCT	17.72863	9 16	73F	62F	1658.557	-45.515	29 6	38F	35F	-2822.709	122239.	531.		
NOV	0.00000				0.000	-97.031	11 5	31F	28F	-3007.399	111126.	531.		
DEC	0.00000				0.000	-235.271	30 5	32F	30F	-2943.771	116683.	531.		
TOTAL	2176.453					-1194.659					1405750.			
MAX					4952.081					-3402.438		531.		

BASELINE RUN FOR SINGLE-ZONE SYSTEM
 W/ ECONOMIZER
 ROOF TREATED AS AN ATTIC SPACE W/
 U = 0.127 - EXISTING CONDITION

MONTH	C O O L I N G				H E A T I N G				E L E C			
	COOLING ENERGY (MBTU)	TIME OF MAX DY HR	DRY- BULB TEMP	WET- BULB TEMP	MAXIMUM COOLING LOAD (KBTU/HR)	HEATING ENERGY (MBTU)	TIME OF MAX DY HR	DRY- BULB TEMP	WET- BULB TEMP	MAXIMUM HEATING LOAD (KBTU/HR)	ELEC- TRICAL ENERGY (KWH)	MAXIMUM ELEC LOAD (KW)
JAN	0.00000				0.000	-247.340	2 9	20F	17F	-3163.110	122239.	531.
FEB	0.00000				0.000	-125.617	19 5	49F	40F	-2651.606	105570.	531.
MAR	0.00000				0.000	-85.931	4 5	29F	26F	-2987.158	116683.	531.
APR	76.90150	26 15	74F	66F	2580.454	-35.160	15 5	34F	30F	-2271.128	122239.	531.
MAY	203.24373	14 9	73F	70F	3050.256	0.000				0.000	122239.	531.
JUN	456.54141	25 15	74F	72F	4666.713	0.000				0.000	111126.	531.
JUL	527.16493	9 7	74F	72F	4243.341	0.000				0.000	122239.	531.
AUG	415.70054	12 8	74F	70F	3878.763	0.000				0.000	122239.	531.
SEP	355.85771	12 8	74F	73F	4256.362	0.000				0.000	111126.	531.
OCT	21.68212	9 16	73F	62F	1703.636	-23.930	29 5	39F	35F	-2369.872	122239.	531.
NOV	0.00000				0.000	-48.269	11 5	31F	28F	-2174.894	111126.	531.
DEC	0.00000				0.000	-132.566	30 5	32F	30F	-2668.623	116683.	531.
TOTAL	2057.092					-698.813					1405750.	
MAX					4666.713					-3163.110		531.

SINGLE-ZONE W/ECONOMIZED
 ROOF TREATED AS ATTIC SPACE
 MODIFIED - U_{ROOF} = 0.05
 (9" INSULATION)

CAMERON STATION ENERGY AUDIT
 DECEMBER 1980
 REPORT- SS-D PLANT MONTHLY LOADS SUMMARY FOR DEFAULT-PLANT

NUS CORPORATION
 SYSTEM SZMH

DATE-2.0A 01/06/81

13.32.16. SCL RUN 1

C O O L I N G													H E A T I N G													E L E C												
MONTH	COOLING ENERGY (MBTU)	TIME OF MAX DY HR	DRY- BULB TEMP	WET- BULB TEMP	MAXIMUM COOLING LOAD (KBTU/HR)	HEATING ENERGY (MBTU)	TIME OF MAX DY HR	DRY- BULB TEMP	WET- BULB TEMP	MAXIMUM HEATING LOAD (KBTU/HR)	ELEC- TRICAL ENERGY (KWH)	MAXIMUM ELEC LOAD (KW)																										
JAN	0.00000				0.000	-203.729	2 8	19F	16F	-3178.189	122239.	531.																										
FEB	0.00000				0.000	-98.071	19 5	49F	40F	-2680.891	105570.	531.																										
MAR	0.00000				0.000	-65.879	4 5	29F	26F	-2551.643	116683.	531.																										
APR	77.01557	26 15	74F	66F	2543.489	-27.368	15 5	34F	30F	-1961.565	122239.	531.																										
MAY	200.92705	14 9	73F	70F	3011.274	0.000				0.000	122239.	531.																										
JUN	445.95273	25 15	74F	72F	4579.029	0.000				0.000	111126.	531.																										
JUL	512.91336	9 7	74F	72F	4164.703	0.000				0.000	122239.	531.																										
AUG	409.37317	12 8	74F	70F	3779.332	0.000				0.000	122239.	531.																										
SEP	351.40210	12 8	74F	73F	4255.444	0.000				0.000	111126.	531.																										
OCT	23.21325	9 16	73F	62F	1716.229	-18.698	29 5	39F	35F	-1991.037	122239.	531.																										
NOV	0.00000				0.000	-36.729	11 5	31F	28F	-1783.012	111126.	531.																										
DEC	0.00000				0.000	-101.016	30 5	32F	30F	-2249.732	116683.	531.																										
TOTAL	2020.797					-551.491					1405750.																											
MAX					4579.029					-3178.189		531.																										

SINGLE-ZONE W/ECOLONIZER
 ROOF TREATED AS ATTIC SPACE
 MODIFIED U-ROOF = 0.0275
 (9" INSULATION)

CAMELON STATION ENERGY AUDIT NUS CORPORATION 09.08.23. SDL RUN 1
 DECEMBER 1980 SYSTEM SUM
 REPORT- SS-D PLANT MONTHLY LOADS SUMMARY FOR DEFAULT-PLANT

MONTH	C O O L I N G				MAXIMUM COOLING LOAD (KBTU/HR)	H E A T I N G				MAXIMUM HEATING LOAD (KBTU/HR)	E L E C	
	COOLING ENERGY (MBTU)	TIME OF MAX DY HR	DRY- BULB TEMP	WET- BULB TEMP		HEATING ENERGY (MBTU)	TIME OF MAX DY HR	DRY- BULB TEMP	WET- BULB TEMP		ELEC- TRICAL ENERGY (KWH)	MAXIMUM ELEC LOAD (KW)
JAN	0.00000				0.000	-381.827	18	7	10F	9F	99184.	451.
FEB	0.00000				0.000	-169.573	21	7	27F	25F	85659.	451.
MAR	0.00000				0.000	-118.852	4	7	28F	24F	94676.	451.
APR	73.82524	24	16	88F	69F	-47.772	15	7	35F	30F	99184.	451.
MAY	187.31727	14	16	88F	73F	0.000				0.000	99184.	451.
JUN	370.98842	18	12	93F	77F	0.000				0.000	90167.	451.
JUL	459.00789	22	15	99F	75F	0.000				0.000	99184.	451.
AUG	360.80996	2	13	86F	67F	0.000				0.000	99184.	451.
SEP	250.65317	3	15	91F	73F	0.000				0.000	90167.	451.
OCT	82.40197	9	16	73F	62F	-27.572	29	7	40F	36F	99184.	451.
NOV	0.00000				0.000	-60.235	11	7	30F	27F	90167.	451.
DEC	0.00000				0.000	-205.710	12	7	14F	12F	94676.	451.
TOTAL	1785.004					-1011.542					1140616.	
MAX					4142.043	-5959.663						451.

MODIFICATION: Cooling = 0.06; HVAC SCHED.
 AT 7:00 AM - 5:00PM
 SYSTEM - SUM

CAMERON STATION ENERGY AUDIT NUS CORPORATION
 DECEMBER 1980 SYSTEM SUM
 REPORT- SS-D PLAN: MONTHLY LOADS SUMMARY FOR DEFAULT-PLANT

DOE-2.0A 12/22/80 11.23.55. SDL RUN 1

C O O L I N G													H E A T I N G													E L E C												
MONTH	COOLING ENERGY (MBTU)	TIME OF MAX DY HR	DRY- BULB TEMP	WET- BULB TEMP	MAXIMUM COOLING LOAD (KBTU/HR)	HEATING ENERGY (MBTU)	TIME OF MAX DY HR	DRY- BULB TEMP	WET- BULB TEMP	MAXIMUM HEATING LOAD (KBTU/HR)	ELEC- TRICAL ENERGY (KWH)	MAXIMUM ELEC LOAD (KW)																										
JAN	0.00000				0.000	-387.017	18 5	9F	8F	-3207.860	99184.	451.																										
FEB	0.00000				0.000	-235.875	26 7	53F	53F	-1472.113	85659.	451.																										
MAR	0.00000				0.000	-192.674	26 7	40F	36F	-1472.113	94676.	451.																										
APR	48.98471	29 15	75F	55F	1410.962	-94.700	16 7	40F	38F	-1472.113	99184.	451.																										
MAY	142.23646	14 16	88F	73F	2127.923	0.000				0.000	99184.	451.																										
JUN	332.93092	18 12	93F	77F	3434.644	0.000				0.000	90167.	451.																										
JUL	425.53147	16 16	84F	63F	3600.702	0.000				0.000	99184.	451.																										
AUG	318.65620	2 13	86F	67F	3619.053	0.000				0.000	99184.	451.																										
SEP	208.49165	3 15	91F	73F	2462.657	0.000				0.000	90167.	451.																										
OCT	39.14037	9 16	73F	62F	792.037	-71.559	30 7	49F	43F	-1472.113	99184.	451.																										
NOV	0.00000				0.000	-134.722	29 7	57F	55F	-1472.113	90167.	451.																										
DEC	0.00000				0.000	-272.169	13 5	20F	17F	-2053.879	94676.	451.																										
TOTAL	515.976					-1388.716					1140616.																											
MAX					3619.053					-3207.860		451.																										

MODIFICATION- INFILTRATION @ 0.037 CFM / S.F.
 TO DETERMINE LOAD / CFM OF O.D.
 SYSTEM- SUM

CAMERON STATION ENERGY AUDIT
 DECEMBER 1980
 REPORT- 99-0 PLANT MONTHLY LOADS SUMMARY FOR DEFAULT-PLANT

NUS CORPORATION
 SYSTEM SUM

DOE-2.0A

12/22/80

14.02.01. SDL RUN 1

MONTH	C O O L I N G				MAXIMUM COOLING LOAD (KBTU/HR)	H E A T I N G				MAXIMUM HEATING LOAD (KBTU/HR)	ELEC- TRICAL ENERGY (KWH)	MAXIMUM ELEC LOAD (KW)
	COOLING ENERGY (MBTU)	TIME OF MAX DY HR	DRY- BULB TEMP	WET- BULB TEMP		HEATING ENERGY (MBTU)	TIME OF MAX DY HR	DRY- BULB TEMP	WET- BULB TEMP			
JAN	0.00000				0.000	-523.900	18 8	10F	9F	-5211.271	99184.	451.
FEB	0.00000				0.000	-321.600	25 10	44F	44F	-3097.685	85659.	451.
MAR	0.00000				0.000	-259.459	25 8	38F	31F	-3097.685	94676.	451.
APR	38.98732	24 15	86F	70F	1445.354	-113.458	15 9	41F	35F	-3097.685	99184.	451.
MAY	130.14741	14 16	88F	73F	2355.995	0.000				0.000	99184.	451.
JUN	339.96335	18 12	93F	77F	3935.842	0.000				0.000	90167.	451.
JUL	434.53660	22 15	99F	75F	4164.668	0.000				0.000	99184.	451.
AUG	319.94249	2 13	86F	67F	3898.072	0.000				0.000	99184.	451.
SEP	201.60706	3 16	92F	73F	2774.131	0.000				0.000	90167.	451.
OCT	13.04426	9 16	73F	62F	675.856	-74.697	29 10	47F	42F	-3097.685	99184.	451.
NOV	0.00000				0.000	-176.463	25 9	44F	39F	-3097.685	90167.	451.
DEC	0.00000				0.000	-364.146	13 8	20F	18F	-3911.560	94676.	451.
TOTAL	1478.228					-1833.723					1140616.	
MAX					4164.668					-5211.271		451.

MODIFICATION - HVAC SCHED. 8:00 AM - 5:00 PM
 5497EM- 30M

CAMERON STATION ENERGY AUDIT NUS CORPORATION DOE-2.0A 12/22/80 13.59.30. SOL RUN 1
 DECEMBER 1980 SYSTEM SUM
 REPORT- SS-D PLANT MONTHLY LOADS SUMMARY FOR DEFAULT-PLANT

MONTH	C O O L I N G					H E A T I N G					E L E C		
	COOLING ENERGY (MBTU)	TIME OF MAX DY HR	DRY- BULB TEMP	WET- BULB TEMP	MAXIMUM COOLING LOAD (KBTU/HR)	HEATING ENERGY (MBTU)	TIME OF MAX DY HR	DRY- BULB TEMP	WET- BULB TEMP	MAXIMUM HEATING LOAD (KBTU/HR)	ELEC- TRICAL ENERGY (KWH)	MAXIMUM ELEC LOAD (KW)	
JAN	0.00000				0.000	-555.731	18 7	10F	9F	-5101.505	99184.	451.	
FEB	0.00000				0.000	-342.041	25 9	43F	43F	-3097.685	85659.	451.	
MAR	0.00000				0.000	-279.584	25 8	38F	31F	-3097.685	94676.	451.	
APR	41.11607	24 15	86F	70F	1475.880	-128.376	15 8	38F	32F	-3097.685	99184.	451.	
MAY	130.21895	14 16	88F	73F	2355.995	0.000				0.000	99184.	451.	
JUN	342.16928	18 12	93F	77F	3869.093	0.000				0.000	90167.	451.	
JUL	437.83696	22 15	99F	75F	4098.431	0.000				0.000	99184.	451.	
AUG	321.13372	2 13	86F	67F	3867.270	0.000				0.000	99184.	451.	
SEP	202.10614	3 16	92F	73F	2765.402	0.000				0.000	90167.	451.	
OCT	16.61118	9 16	73F	62F	730.267	-92.103	29 9	42F	38F	-3097.685	99184.	451.	
NOV	0.00000				0.000	-194.082	25 8	44F	39F	-3097.685	90167.	451.	
DEC	0.00000				0.000	-387.338	13 7	20F	18F	-3792.551	94676.	451.	
TOTAL	1491.192				4098.431	-1979.254				-5101.505	1140616.	451.	
MAX													

B-1-9

MODIFICATION-HVAC SCHED, 7:00 AM- 5:00 PM.
 SYSTEM- SUM

CAMERON STATION ENERGY AUDIT
 DECEMBER 1980
 REPORT- SS-D PLANT MONTHLY LOADS SUMMARY FOR DEFAULT-PLANT

NUS CORPORATION
 SYSTEM SUM

ONE-2.0A 12/22/80

13.57.54... SDL RUN 1

MONTH	C O O L I N G				MAXIMUM COOLING LOAD (KBTU/HR)	H E A T I N G				MAXIMUM HEATING LOAD (KBTU/HR)	E L E C		
	COOLING ENERGY (MBTU)	TIME OF MAX DY HR	DRY- BULB TEMP	WET- BULB TEMP		HEATING ENERGY (MBTU)	TIME OF MAX DY HR	DRY- BULB TEMP	WET- BULB TEMP		ELEC- TRICAL ENERGY (KWH)	MAXIMUM ELEC LOAD (KW)	
JAN	0.00000				0.000	-585.452	18	6	9F	9F	-4967.634	99184.	451.
FEB	0.00000				0.000	-361.220	25	8	40F	40F	-3097.685	85659.	451.
MAR	0.00000				0.000	-297.937	25	7	38F	31F	-3097.685	94676.	451.
APR	42.94402	24	15	86F	70F	-141.691	15	7	35F	30F	-3097.685	99184.	451.
MAY	130.30906	14	16	88F	73F	0.000					0.000	99184.	451.
JUN	344.58542	18	12	93F	77F	0.000					0.000	90167.	451.
JUL	441.42407	22	15	99F	75F	0.000					0.000	99184.	451.
AUG	322.60566	2	13	86F	67F	0.000					0.000	99184.	451.
SEP	202.69103	3	16	92F	73F	0.000					0.000	90167.	451.
OCT	19.75329	9	16	73F	62F	-106.875	29	9	42F	38F	-3097.685	99184.	451.
NOV	0.00000					-210.281	25	7	44F	39F	-3097.685	90167.	451.
DEC	0.00000					-409.341	13	6	21F	18F	-3705.090	94676.	451.
TOTAL	1504.313					-2112.797						1140616.	
MAX					4037.101						-4967.634		451.

MODIFICATION- HVAC SCHED. 6:00 AM-5:00 PM
 SYSTEM TYPE: SUM.

CAMERON STATION ENERGY AUDIT: NUS CORPORATION
 DECEMBER 1980 SYSTEM SUM
 REPORT- SS-O PLANT MONTHLY LOADS SUMMARY FOR DEFAULT-PLANT

DOE-2.0A 12/22/80 11.21.15. SOL RUN 1

MONTH	C O O L I N G				MAXIMUM COOLING LOAD (KBTU/HR)	H E A T I N G				MAXIMUM HEATING LOAD (KBTU/HR)	ELEC- TRICAL ENERGY (KWH)	MAXIMUM ELEC LOAD (KW)
	COOLING ENERGY (MBTU)	TIME OF MAX DY HR	DRY- BULB TEMP	WET- BULB TEMP		HEATING ENERGY (MBTU)	TIME OF MAX DY HR	DRY- BULB TEMP	WET- BULB TEMP			
JAN	0.00000				0.000	-420.323	18 5	9F	8F	-5402.523	99184.	451.
FEB	0.00000				0.000	-191.124	25 6	40F	40F	-2751.916	85659.	451.
MAR	0.00000				0.000	-141.044	4 7	28F	24F	-2754.018	94676.	451.
APR	80.02199	24 16	88F	69F	1476.279	-64.610	1 5	40F	36F	-2751.916	99184.	451.
MAY	188.04718	14 16	88F	73F	2372.914	0.000				0.000	99184.	451.
JUN	376.50468	18 12	93F	77F	3755.579	0.000				0.000	90167.	451.
JUL	467.30305	22 15	99F	75F	4018.176	0.000				0.000	99184.	451.
AUG	365.48331	2 13	86F	67F	3789.652	0.000				0.000	99184.	451.
SEP	253.26110	3 16	92F	73F	2805.317	0.000				0.000	90167.	451.
OCT	88.07552	9 16	73F	62F	1154.531	-40.863	29 6	38F	35F	-2751.916	99184.	451.
NOV	0.00000				0.000	-78.283	11 5	31F	28F	-2592.791	90167.	451.
DEC	0.00000				0.000	-233.300	13 5	20F	17F	-3934.890	94676.	451.
TOTAL	1818.697					-1169.548				-5402.523	1140616.	451.
MAX					4018.176							451.

MODIFICATION - U_{CEILING} = 0.06
 SYSTEM TYPE = SUM

CAMERON STATION ENERGY AUDIT
 DECEMBER 1980
 REPORT- 33-0 PLANT MONTHLY LOADS SUMMARY FOR DEFAULT-PLANT

DOE-2.0A 12/22/80 11.14.34, 8DL RUN 1

NUS CORPORATION
 SYSTEM SUM

MONTH	C O O L I N G					H E A T I N G					E L E C	
	COOLING ENERGY (MBTU)	TIME OF MAX DY HR	DRY- BULB TEMP	WET- BULB TEMP	MAXIMUM COOLING LOAD (KBTU/HR)	HEATING ENERGY (MBTU)	TIME OF MAX DY HR	DRY- BULB TEMP	WET- BULB TEMP	MAXIMUM HEATING LOAD (KBTU/HR)	ELEC- TRICAL ENERGY (KWH)	MAXIMUM ELEC LOAD (KW)
JAN	0.0000				0.000	-470.305	18	5	9F	6F	99184.	451.
FEB	0.0000				0.000	-242.504	25	7	41F	40F	85659.	451.
MAR	0.0000				0.000	-187.766	25	5	41F	33F	94676.	451.
APR	66.62032	29	15	75F	55F	-87.171	15	6	34F	29F	99184.	451.
MAY	169.88793	14	16	88F	73F	0.000				0.000	99184.	451.
JUN	367.85590	18	12	93F	77F	0.000				0.000	90167.	451.
JUL	461.06538	22	15	99F	75F	0.000				0.000	99184.	451.
AUG	353.55661	2	13	86F	67F	0.000				0.000	99184.	451.
SEP	238.44557	3	16	92F	73F	0.000				0.000	90167.	451.
OCT	63.65479	9	16	73F	62F	-50.487	29	7	40F	36F	99184.	451.
NOV	0.00000				0.000	-116.473	25	5	45F	39F	90167.	451.
DEC	0.00000				0.000	-284.792	13	5	20F	17F	94676.	451.
	-----				-----	-----				-----	-----	-----
TOTAL	1721.086					-1447.498					1140616.	
MAX					4008.123					-5363.694		451.

B-22

MODIFICATION - U_{clw} = 0.09
 SYSTEM TYPE = SUM

CAMERON STATION ENERGY AUDIT NJS CORPORATION 01/02/81 15.57.42. SCL RUN 1
 DECEMBER 1980 SYSTEM SUM
 REPORT- 55-0 PLANT MONTHLY LOADS SUMMARY FOR DEFAULT-PLANT

MONTH	C O O L I N G				H E A T I N G				E L E C			
	COOLING ENERGY (MBTU)	TIME OF MAX DY HR	DRY- BULB TEMP	WET- BULB TEMP	MAXIMUM COOLING LOAD (KBTU/HR)	HEATING ENERGY (MBTU)	TIME OF MAX DY HR	DRY- BULB TEMP	WET- BULB TEMP	MAXIMUM HEATING LOAD (KBTU/HR)	ELEC- TRICAL ENERGY (KWH)	MAXIMUM ELEC LOAD (KW)
JAN	0.00000				0.000	-376.171	18 5	9F	AF	-5319.554	99184.	451.
FEB	0.00000				0.000	-145.169	19 7	48F	40F	-2683.703	85659.	451.
MAR	0.00000				0.000	-97.722	4 7	28F	24F	-2981.416	94676.	451.
APR	98.35645	24 16	88F	69F	1527.127	-43.914	1 5	40F	36F	-2250.626	99184.	451.
MAY	208.05123	14 16	88F	73F	2372.788	0.000				0.000	99184.	451.
JUN	385.76235	18 12	93F	77F	3758.484	0.000				0.000	90167.	451.
JUL	473.65393	22 15	99F	75F	4028.667	0.000				0.000	99184.	451.
AUG	377.86118	2 13	86F	67F	3783.049	0.000				0.000	99184.	451.
SEP	269.39957	3 16	92F	73F	2820.112	0.000				0.000	90167.	451.
OCT	117.32649	9 16	73F	62F	1257.113	-25.417	29 5	39F	35F	-2377.376	99184.	451.
NOV	0.00000				0.000	-43.585	11 5	31F	28F	-1892.352	90167.	451.
DEC	0.00000				0.000	-182.951	13 5	20F	17F	-3876.241	94676.	451.
TOTAL	1930.411				4028.667	-914.928				-5319.554	1140616.	451.
MAX												

MODIFICATION - U_{air} = 0.03
 SYSTEM TYPE = SUM

CAMERON STATION ENERGY AUDIT
 DECEMBER 1980
 REPORT- SS-D PLANT MONTHLY LOADS SUMMARY FOR DEFAULT-PLANT

DOE-2.0A 12/22/80 09.40.15, SCL RUN 1

NUS CORPORATION
 SYSTEM SUM

C O O L I N G				H E A T I N G				E L E C				
MONTH	COOLING ENERGY (MBTU)	TIME OF MAX DY HR	DRY- BULB TEMP	WET- BULB TEMP	MAXIMUM COOLING LOAD (KBTU/MR)	HEATING ENERGY (MBTU)	TIME OF MAX DY HR	DRY- BULB TEMP	WET- BULB TEMP	MAXIMUM HEATING LOAD (KBTU/MR)	ELEC- TRICAL ENERGY (KWH)	MAXIMUM ELEC LOAD (KW)
JAN	0.00000				0.000	-612.713	18 5	9F	8F	-4737.166	99184.	451.
FEB	0.00000				0.000	-378.781	25 8	40F	40F	-3097.685	85659.	451.
MAR	0.00000				0.000	-314.691	25 7	38F	31F	-3097.685	94676.	451.
APR	44.57278	24 15	86F	70F	1511.469	-153.507	15 7	35F	30F	-3097.685	99184.	451.
MAY	130.44567	14 16	88F	73F	2355.403	0.000				0.000	99184.	451.
JUN	347.12604	18 12	93F	77F	3740.297	0.000				0.000	90167.	451.
JUL	445.30675	22 15	99F	75F	3981.433	0.000				0.000	99184.	451.
AUG	324.34345	2 13	86F	67F	3808.774	0.000				0.000	99184.	451.
SEP	203.37852	3 16	92F	73F	2749.533	0.000				0.000	90167.	451.
OCT	22.35475	9 16	73F	62F	792.778	-119.252	29 8	39F	35F	-3097.685	99184.	451.
NOV	0.00000				0.000	-224.960	25 7	44F	39F	-3097.685	90167.	451.
DEC	0.00000				0.000	-429.758	13 5	20F	17F	-3643.114	94676.	451.
TOTAL	1517.528					-2233.663					1140616.	
MAX					3981.433					-4737.166		451.

BASELINE RUN (SUM)

EXISTING CONDITIONS, U-Value Ceiling = 0.206
 INFILTRATION = 0.162 CFM/3F. 9:00 AM - 5:00 PM
 = 0.037 CFM/3F. 9:00 PM - 5:00 AM
 HVAC EQUIP. SCHEDULE = 9:00 AM - 5:00 PM

US Military Academy
ATTN: Dept of Mechanics
West Point, NY 10996

US Military Academy
ATTN: Library
West Point, NY 10996

HQDA (DALO-TSE-F)
WASH DC 20314

HQDA (DAEN-ASI-L) (2)
WASH DC 20314

HQDA (DAEN-MPO-B)
WASH DC 20314

HQDA (DAEN-MPR-A)
WASH DC 20314

HQDA (DAEN-MPO-U)
WASH DC 20314

HQDA (DAEN-MPZ-A)
WASH DC 20314

HQDA (DAEN-MPZ-E)
WASH DC 20314

HQDA (DAEN-MPZ-G)
WASH DC 20314

HQDA (DAEN-RDM)
WASH DC 20314

HQDA (DAEN-RDL)
WASH DC 20314

Director, USA-WES
ATTN: Library
P.O. Box 631
Vicksburg, MS 39181

Commander, TRADOC
Office of the Engineer
ATTN: ATEN
Ft. Monroe, VA 23651

Commander, TRADOC
Office of the Engineer
ATTN: ATEN-FE-U
Ft Monroe, VA 23651

AF Civil Engr Center/XRL
Tyndall AFB, FL 32401

Naval Facilities Engr Command
ATTN: Code 04
200 Stovall St.
Alexandria, VA 22332

Defense Documentation Center
ATTN: TCA (12)
Cameron Station
Alexandria, VA 22314

Commander and Director
USA Cold Regions Research Engineering
Laboratory
Hanover, NH 03755

FORSCOM
ATTN: AFEN
Ft McPherson, GA 30330

FORSCOM
ATTN: AFEN-FE
Ft McPherson, GA 30330

Officer-in-Charge
Civil Engineering Laboratory
Naval Construction Battalion Center
ATTN: Library (Code L08A)
Port Hueneme, CA 93043

Commander and Director
USA Construction Engineering
Research Laboratory
P.O. Box 4005
Champaign, IL 61820

Commanding General, 3d USA
ATTN: Engineer
Ft. McPherson, GA 30330

Commanding General, 5th USA
ATTN: Engineer
Ft Sam Houston, TX 78234

AFCE Center
Tyndall AFB, FL 32403

Commander, DARCOM
Director, Installation
and Services
5001 Eisenhower Ave.
Alexandria, VA 22333

Commander, DARCOM
ATTN: Chief, Engineering Div.
5001 Eisenhower Ave
Alexandria, VA 22333

Air Force Weapons Lab/AFWL/DE
Chief, Civil Engineering
Research Division
Kirtland AFB, NM 87117

Strategic Air Command
ATTN: DSC/CE (DEEE)
Offutt AFB, NE 68112

Headquarters USAF
Directorate of Civil Engineering
AF/PREES
Bolling AFB, Washington, DC 20333

Strategic Air Command
Engineering
ATTN: Ed Morgan
Offutt AFB, NE 68113

USAF Institute of Technology
AFIT/DED
Wright Patterson AFB, OH 45433

Air Force Weapons Lab
Technical Library (DOUL)
Kirtland AFB, NM 87117

Chief, Naval Facilities
Engineer Command
ATTN: Chief Engineer
Department of the Navy
Washington, DC 20350

Commander
Naval Facilities Engineering Cmd
200 Stovall St
Alexandria, VA 22332

Commander
Naval Facilities Engr Cmd
Western Division
Box 727
San Bruno, CA 94066

Civil Engineering Center
ATTN: Moreell Library
Port Hueneme, CA 93043

Commandant of the Marine Corps
HQ, US Marine Corps
Washington, DC 20380

National Bureau of Standards (4)
Materials & Composites Section
Center for Building Technology
Washington, DC 20234

Assistant Chief of Engineer
Rm 1E 668, Pentagon
Washington, DC 20310

The Army Library (ANRAL-R)
ATTN: Army Studies Section
Room 1A 518, The Pentagon
Washington, DC 20310

Commander-in-Chief
USA, Europe
ATTN: AEAEN
APO New York, NY 09403

DIST 2

Commander
USA Foreign Science and
Technology Center
220 8th St. N.E.
Charlottesville, VA 22901

Commander
USA Science & Technology
Information Team, Europe
APO New York, NY 09710

Commander
USA Science & Technology
Center - Far East Office
APO San Francisco, CA 96328

Commanding General
USA Engineer Command, Europe
APO New York, NY 09403

Deputy Chief of Staff
for Logistics
US Army, The Pentagon
Washington, DC 20310

Commander, TRADOC
Office of the Engineer
ATTN: Chief, Facilities
Engineering Division
Ft Monroe, VA 23651

Commanding General
USA Forces Command
Office of the Engineer
(AFEN-FES)
Ft McPherson, GA 30330

Commanding General
USA Forces Command
ATTN: Chief, Facilities
Engineering Division
Ft McPherson, GA 30330

Commanding General, 1st USA
ATTN: Engineer
Ft George G. Meade, MD 20755

Commander
USA Support Command, Hawaii
Fort Shafter, HI 96858

Commander
Eighth US Army
APO San Francisco 96301

Commander
US Army Facility Engineer
Activity - Korea
APO San Francisco 96301

Commander
US Army, Japan
APO San Francisco, CA 96343

Facilities Engineer
Fort Belvoir
Fort Belvoir, VA 22060

Facilities Engineer
Fort Benning
Fort Benning, GA 31905

Facilities Engineer
Fort Bliss
Fort Bliss, TX 79916

Facilities Engineer
Carlisle Barracks
Carlisle Barracks, PA 17013

Facilities Engineer
Fort Chaffee
Fort Chaffee, AR 72902

Facilities Engineer
Fort Dix
Fort Dix, NJ 08640

Facilities Engineer
Fort Eustis
Fort Eustis, VA 23604

Facilities Engineer
Fort Gordon
Fort Gordon, GA 30905

Facilities Engineer
Fort Hamilton
Fort Hamilton, NY 11252

Facilities Engineer
Fort A P Hill
Bowling Green, VA 22427

Facilities Engineer
Fort Jackson
Fort Jackson, SC 29207

Facilities Engineer
Fort Knox
Fort Knox, KY 40121

Facilities Engineer
Fort Lee
Fort Lee, VA 23801

Facilities Engineer
Fort McClellan
Fort McClellan, AL 36201

Facilities Engineer
Fort Monroe
Fort Monroe, VA 23651

Facilities Engineer
Presidio of Monterey
Presidio of Monterey, CA 93940

Facilities Engineer
Fort Pickett
Blackstone, VA 23824

Facilities Engineer
Fort Rucker
Fort Rucker, AL 36362

Facilities Engineer
Fort Sill
Fort Sill, OK 73503

Facilities Engineer
Fort Story
Fort Story, VA 23459

Facilities Engineer
Kansas Army Ammunition Plant
Parsons, KS 67357

Facilities Engineer
Lone Star Army Ammunition Plant
Texarkana, TX 75501

Facilities Engineer
Picatinny Arsenal
Dover, NJ 07801

Facilities Engineer
Louisiana Army Ammunition Plant
Shreveport, LA 71130

Facilities Engineer
Milan Army Ammunition Plant
Milan, TN 38358

Facilities Engineer
Pine Bluff Arsenal
Pine Bluff, AR 71601

Facilities Engineer
Radford Army Ammunition Plant
Radford, VA 24141

Facilities Engineer
Rock Island Arsenal
Rock Island, IL 61201

Facilities Engineer
Rocky Mountain Arsenal
Denver, CO 80340

Facilities Engineer
Scranton Army Ammunition Plant
156 Cedar Avenue
Scranton, PA 18503

Facilities Engineer
Tobyhanna Army Depot
Tobyhanna, PA 18466

Facilities Engineer
Tooele Army Depot
Tooele, UT 84074

Facilities Engineer
Arlington Hall Station
400 Arlington Blvd
Arlington, VA 22212

Facilities Engineer
Cameron Station, Bldg 17
5010 Duke Street
Alexandria, VA 22314

Facilities Engineer
Sunny Point Military Ocean Terminal
Southport, NC 28461

Facilities Engineer
US Military Academy
West Point Reservation
West Point, NY 10996

Facilities Engineer
Fort Ritchie
Fort Ritchie, MD 21719

Facilities Engineer
Army Materials & Mechanics
Research Center
Watertown, MA 02172

Facilities Engineer
Ballistics Missile Advanced
Technology Center
P.O. Box 1500
Huntsville, AL 35807

Facilities Engineer
Fort Wainwright
172d Infantry Brigade
Fort Wainwright, AK 99703

Facilities Engineer
Fort Greely
Fort Greely, AK 98733

Facilities Engineer
Fort Richardson
Fort Richardson, AK 99505

Facilities Engineer
Harry Diamond Laboratories
2800 Powder Mill Rd
Adelphi, MD 20783

Facilities Engineer
Fort Missoula
Missoula, MT 59801

Facilities Engineer
New Cumberland Army Depot
New Cumberland, PA 17070

Facilities Engineer
Oakland Army Base
Oakland, CA 94626

Facilities Engineer
Vint Hill Farms Station
Warrentown, VA 22186

Facilities Engineer
Twin Cities Army Ammunition Plant
New Brighton, MN 55112

Facilities Engineer
Volunteer Army Ammunition Plant
Chattanooga, TN 37401

Facilities Engineer
Watervliet Arsenal
Watervliet, NY 12189

Facilities Engineer
St Louis Area Support Center
Granite City, IL 62040

Facilities Engineer
Fort Mormouth
Fort Mormouth, NJ 07703

Facilities Engineer
Redstone Arsenal
Redstone Arsenal, AL 35809

Facilities Engineer
Detroit Arsenal
Warren, MI 48039

Facilities Engineer
Aberdeen Proving Ground
Aberdeen Proving Ground, MD 21005

Facilities Engineer
Jefferson Proving Ground
Madison, IN 47250

Facilities Engineer
Dugway Proving Ground
Dugway, UT 84022

Facilities Engineer
Fort McCoy
Sparta, WI 54656

Facilities Engineer
White Sands Missile Range
White Sands Missile Range, NM 88002

Facilities Engineer
Yuma Proving Ground
Yuma, AZ 85364

Facilities Engineer
Natick Research & Dev Ctr
Kansas St.
Natick, MA 01760

Facilities Engineer
Fort Bragg
Fort Bragg, NC 28307

Facilities Engineer
Fort Campbell
Fort Campbell, KY 42223

Facilities Engineer
Fort Carson
Fort Carson, CO 80913

Facilities Engineer
Fort Drum
Watertown, NY 13601

Facilities Engineer
Fort Hood
Fort Hood, TX 76544

Facilities Engineer
Fort Indiantown Gap
Annville, PA 17003

Facilities Engineer
Fort Lewis
Fort Lewis, WA 98433

Facilities Engineer
Fort MacArthur
Fort MacArthur, CA 90731

Facilities Engineer
Fort McPherson
Fort McPherson, GA 30330

Facilities Engineer
Fort George G. Meade
Fort George G. Meade, MD 20755

Facilities Engineer
Fort Polk
Fort Polk, LA 71459

Facilities Engineer
Fort Riley
Fort Riley, KS 66442

Facilities Engineer
Fort Stewart
Fort Stewart, GA 31312

Facilities Engineer
Indiana Army Ammunition Plant
Charlestown, IN 47111

Facilities Engineer
Joliet Army Ammunition Plant
Joliet, IL 60436

Facilities Engineer
Anniston Army Depot
Anniston, AL 36201

AD-A108 046

NUS CORP ROCKVILLE MD
CAMERON STATION ENERGY AUDIT BUILDING NUMBER 3.(U)
JUL 81 D A STUDLEY

F/G 13/1

UNCLASSIFIED

USAFESA-T-2105

DACA31-80-D-0019
NL

2

AD-A108 046




END

DATE

FILED

1 82

DTIC



MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

Facilities Engineer
Corpus Christi Army Depot
Corpus Christi, TX 78419

Facilities Engineer
Red River Army Depot
Texarkana, TX 75501

Facilities Engineer
Sacramento Army Depot
Sacramento, CA 95813

Facilities Engineer
Sharpe Army Depot
Lathrop, CA 95330

Facilities Engineer
Seneca Army Depot
Romulus, NY 14541

Facilities Engineer
Fort Ord
Fort Ord, CA 93941

Facilities Engineer
Presidio of San Francisco
Presidio of San Francisco, CA 94129

Facilities Engineer
Fort Sheridan
Fort Sheridan, IL 60037

Facilities Engineer
Holston Army Ammunition Plant
Kingsport, TN 37662

Facilities Engineer
Baltimore Output
Baltimore, MD 21222

Facilities Engineer
Bayonne Military Ocean Terminal
Bayonne, NJ 07002

Facilities Engineer
Bay Area Military Ocean Terminal
Oakland, CA 94626

Facilities Engineer
Gulf Output
New Orleans, LA 70146

Facilities Engineer
Fort Huachuca
Fort Huachuca, AZ 86513

Facilities Engineer
Letterkenny Army Depot
Chambersburg, PA 17201

Facilities Engineer
Michigan Army Missile Plant
Warren, MI 48089

COL E.C. Lussier
Fitzsimons Army Med Center
ATTN: HSF-DFE
Denver, CO 80240

US Army Engr Dist, New York
ATTN: NAME - E
26 Federal Plaza
New York, NY 10017

USA Engr Dist, Baltimore
ATTN: Chief, Engr Div
P.O. Box 1715
Baltimore, MD 212

USA Engr Dist, Charleston
ATTN: Chief, Engr Div
P.O. Box 919
Charleston, SC 29402

USA Engr Dist, Detroit
P.O. Box 1027
Detroit, MI 48231

USA Engr Dist, Kansas City
ATTN: Chief, Engr Div
700 Federal Office Bldg.
601 E. 12th St
Kansas City, MO 64106

USA Engr Dist, Omaha
ATTN: Chief, Engr Div
7410 USOP and Courthouse
215 N. 17th St
Omaha, NE 68102

USA Engr Dist, Fort Worth
ATTN: Chief, SWFED-D
P.O. Box 17300
Fort Worth, TX 76102

USA Engr Dist, Sacramento
ATTN: Chief, SPKED-D
650 Capitol Mall
Sacramento, CA 95814

USA Engr Dist, Far East
ATTN: Chief, Engr Div
APO San Francisco, CA 96301

USA Engr Dist, Japan
APO San Francisco, CA 96343

USA Engr Div, Europe
European Div, Corps of Engineers
APO New York, NY 09757

USA Engr Div, North Atlantic
ATTN: Chief, NADEN-T
90 Church St.
New York, NY 10007

USA Engr Div, South Atlantic
ATTN: Chief, SAEN-TE
510 Title Bldg
30 Pryor St, SW
Atlanta, GA 30303

USA Engr Dist, Mobile
ATTN: Chief, SAMEN-C
P.O. Box 2288
Mobile, AL 36601

USA Engr Dist, Louisville
ATTN: Chief, Engr Div
P.O. Box 59
Louisville, KY 40201

USA Engr Div, Norfolk
ATTN: Chief, NAOEN-D
803 Front Street
Norfolk, VA 23510

USA Engr Div, Missouri River
ATTN: Chief, Engr Div
P.O. Box 103 Downtown Station
Omaha, NE 68101

USA Engr Div, South Pacific
ATTN: Chief, SPDED-TG
630 Sansome St, Rm 1216
San Francisco, CA 94111

USA Engr Div, Huntsville
ATTN: Chief, HNDED-ME
P.O. Box 1600 West Station
Huntsville, AL 35807

USA Engr Div, Ohio River
ATTN: Chief, Engr Div
P.O. Box 1159
Cincinnati, Ohio 45201

USA Engr Div, North Central
ATTN: Chief, Engr Div
536 S. Clark St.
Chicago, IL 60605

USA Engr Div, Southwestern
ATTN: Chief, SWDED-TM
Main Tower Bldg, 1200 Main St
Dallas, TX 75202

USA Engr Dist, Savannah
ATTN: Chief, SASAS-L
P.O. Box 889
Savannah, GA 31402

Commander
US Army Facilities Engineering
Support Agency
Support Detachment II
Fort Gillem, GA 30050

Commander
US Army Facilities Engr Spt Agency
ATTN: MAJ Brisbane
Support Detachment III
P.O. Box 6550
Fort Bliss, TX 79916

NCOIC
US Army Facilities Engr Spt Agency
Support Detachment III
ATTN: FESA-III-SI
P.O. Box 3031
Fort Sill, OK 73503

NCOIC
US Army Facilities Engr Spt Agency
Support Detachment III
ATTN: FESA-III-PR
P.O. Box 29704
Presidio of San Francisco, CA 94129

NCOIC
US Army Facilities Engr Spt Agency
ATTN: FESA-III-CA
Post Locator
Fort Carson, CO 80913

Commander/CPT Ryan
US Army Facilities Engr Spt Agency
Support Detachment IV
P.O. Box 300
Fort Monmouth, NJ 07703

NCOIC
US Army Facilities Engr Spt Agency
ATTN: FESA-IV-MU
P.O. Box 300
Fort Monmouth, NJ 07703

NCOIC
US Army Facilities Engr Spt Agency
Support Detachment IV
ATTN: FESA-IV-ST
Stewart Army Subpost
Newburgh, New York 12250

NCOIC
US Army Facilities Engineering
Support Agency
Support Detachment II
ATTN: FESA-II-JA
Fort Jackson, SC 29207

NCOIC
US Army Facilities Engr Spt Agency
Support Detachment II
ATTN: FESA-II-BE
P.O. Box 2207
Fort Benning GA 31905

NCOIC
US Army Facilities Engr Spt Agency
Support Detachment II
ATTN: FESA-II-KN
Fort Knox, KY 40121

Naval Facilities Engineering and
Energy Programs Branch, Code 1023
Hoffmann Bldg. 2, (Mr. John Hughes)
Stovall Street
Alexandria, VA 22332

Commander
US Army Facilities Engineering
Support Agency
FE Support Detachment I
APO New York, NY 09081

Navy Energy Office
ATTN: W.R. Mitchum
Washington DC 20350

David C. Hall
Energy Projects Officer
Dept. of the Air Force
Sacramento Air Logistics Center (AFLC)
2852 ABG/DEE
McClellan, CA 95652

USA Engineer District, Chicago
219 S. Dearborn Street
ATTN: District Engineer
Chicago, IL 60604

Directorate of Facilities Engineer
Energy Environmental & Self Help Center
Fort Campbell, KY 42223

Commander and Director
Construction Engineering Research
Laboratory
ATTN: COL Circeo
P.O. Box 4005
Champaign, IL 61820

Mr. Ray Heller
Engineering Services Branch
DFAE, Bldg. 1950
Fort Sill, OK 73503

Commander-in-Chief
HQ, USAEUR
ATTN: AEAEN-EH-U
APO New York 09403

HQ AFESC/RDVA
ATTN: Mr. Hathaway
Tyndall AFB, FL 32403

Commander and Director
Construction Engineering Research Lab
ATTN: Library
P.O. Box 4005
Champaign, IL 61820

HQ, 5th Signal Command
Office of the Engineer
APO New York 09056

HQ, Us Military Community Activity,
Heilbronn
Director of Engineering & Housing
ATTN: Rodger D. Romans
APO New York 09176

Commanding General
HQ USATC and Fort Leonard Wood
ATTN: Facility Engineer
Fort Leonard Wood, MO 65473

SSG Ruiz Burgos Andres
D.F.E., HHC HQ Omd 193d Inf
BDE
Ft. Clayton, C/Z

Energy/Environmental Office
ATTN: David R. Nichols
USMCA-NBG (DEH)
APO New York 09696

Commander
535th Engineer Detachment
P.O. Box 300
Fort Monmouth, NJ 07703

NCOIC
535th Engineer Detachment, Team A
ATTN: SFC Prenger
P.O. Box 224
Fort Knox, KY 40121

NCOIC
535th Engineer Detachment, Team B
ATTN: SP6 Cathers
P.O. Box 300
Fort Monmouth, NJ 07703

NCOIC
535th Engineer Detachment, Team C
ATTN: SFC Jackson
P.O. Box 4301
Fort Eustis, VA 23604

NCOIC
535th Engineer Detachment, Team D
ATTN: SFC Hughes
Stewart Army Subpost
Newburg, New York 12550

Commander
Persidio of San Francisco,
California
ATTN: AFZM-DI/Mr. Prugh
San Francisco, CA 94129

Facilities Engineer
Corpus Christi Army Depot
ATTN: Mr. Joseph Canpu/Stop 24
Corpus Christi, TX 78419

Walter Reed Army Medical Center
ATTN: KHSWS-E/James Prince
6825 16th St., NW
Washington, DC 20012

Commanding Officer
Installations and Services Activity
ATTN: DRCIS-RI-IB
Rock Island Arsenal
Rock Island, IL 61299

Commanding Officer
Northern Division Naval
Facilities Engineering Command
Code 102 (Mr. E.F. Humm)
Naval Base
Philadelphia, PA 19112

Commander, US Army Facilities Engineering
Support Agency
Support Detachment I
APO New York 09081

HQ, USA Health Services Cmd
Bldg. 2792
ATTN: HSLO-F
Fort Sam Houston, TX 78234

HQDA
(DAEN-MPE-E)
WASH DC 20314

Commanding Officer
Northern Division Naval
Facilities Engineering Command
Code 10
Naval Base, Building 77
Philadelphia, PA 19112

Facilities Engineer
Fort Leavenworth
Fort Leavenworth, KS 66027

Facilities Engineer
Fort Benjamin Harrison
Fort Benjamin Harrison, IN 46216

Office of the A&E
ATTN: MAJ Johnson
Camp Ripley
Little Falls, MN 56345

Commander
US Army Garrison
ATTN: HSD-FE
Fort Detrick, MD 21701

AFESC/DEB
ATTN: Mr. Fred Beason
Tyndall AFB, FL 32403

Mr. David White
Defense Audit Service
888 North Sepulveda Blvd.
Suite 610
El Segundo, CA 90245

Facilities Engineer
Bldg. 308
Fort Myer, VA 22211

NAVFAC
ATTN: John Zekan
Code 0833 Hoffmann Building
200 Stovall Street
Alexandria, VA 22332

HQ, USASCH
Director Engineering & Housing
Fort Shafter, HI 96858

HQ, WESTCOM
ATTN: APEN-CE
Fort Shafter, HI 96858

Headquarters US Army Materiel Development
& Readiness Command
ATTN: Energy Office, DRCIS-C
Alexandria, VA 22333

One Stop Coordinator
Army Corps of Engineers
ATTN: ORNED-D (Connie Flatt)
P.O. Box 1070
Nashville, TN 37202

Solar Energy Research Institute
1617 Cole Boulevard
Golden, CO 80401

American Telephone & Telegraph Co.
ATTN: Kenneth T. Risberg
222 Mt. Airy Road, Rm 192B5
Basking Ridge, NJ 07920

LCDR D. J. Clark
Navy Material Command
Code 08E
Washington, DC 20360

Office of Secretary of Defense
Installations & Housing
ATTN: Mr. Millard Carr
WASH DC 20301

Commandant (G-ECV-2/65)
ATTN: LTC Peck
US Coast Guard HQTRS
2100 2nd St. SW
WASH DC 20593

HQ AFESC/DEB
ATTN: COL. William R. Gaddie
Tyndall AFB, FL 32403

DIST 12