

AD 608691


500 RR 5, 3-62

RR-5, March 1962

1281-2

COPY	OF	
HARD COPY	\$.	2.00
MICROFICHE	\$.	0.50

36p




ELECTRO-OPTICAL SYSTEMS, INC. RESEARCH REPORT

A PROBLEM IN TURBULENT REACTING GAS DYNAMICS-Saul Feldman

ARCHIVE COPY

LOAN COPY ONLY
PROPERTY OF
TECHNICAL LIBRARY BL 7120

DDC
RECEIVED
DEC 8 1964
DDC-IRA C

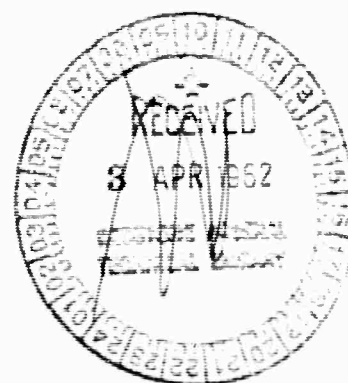

Copy No. 473-2

DISCLAIMER NOTICE

THIS DOCUMENT IS THE BEST
QUALITY AVAILABLE.

COPY FURNISHED CONTAINED
A SIGNIFICANT NUMBER OF
PAGES WHICH DO NOT
REPRODUCE LEGIBLY.

65
EOS Research Report No. 5, March 1962,

A PROBLEM IN TURBULENT REACTING GAS DYNAMICS - Saul Feldman



ELECTRO-OPTICAL SYSTEMS, INC. Pasadena, California

ABSTRACT

The case of a streamtube of cold gas going through a strong normal shock wave is treated. Chemical reaction is allowed to occur downstream of the shock, where the pressure and the distribution of certain turbulent correlation functions are prescribed as a function of distance. It is shown that the turbulence modifies the flow field mainly through the effects it has on the reaction rates leading to a hotter gas than if just the mean values of the thermodynamic functions for the turbulent flow were considered. The Gibbs[†] function for the fluid is also modified by the turbulent fluctuations, thus leading to different final equilibrium conditions.

This work was sponsored by the Advanced Research Projects Agency, Washington, D. C., under ARPA order 203-61, monitored by the Army Ordnance Missile Command, Huntsville, Alabama, under Contract DA-04-495-ORD-3245.

TABLE OF CONTENTS

	Page
1. Introduction	1
2. Effect of Turbulence on the Conservation Equations of a Reacting Fluid	2
2.1 The Conservation Equations	2
2.2 The Chemical Kinetic Equations	5
3. Estimates for the Correlation Functions Based on Some Experimental Data	13
3.1 Measurements in the Boundary Layer	13
3.2 Measurements in Turbulent Jets	13
3.3 Measurements in Wakes	13
3.3.1 Incompressible Wakes	13
3.3.2 Compressible Wakes	14
4. Further Simplification of the Equations for a Turbulent Reacting Gas Flow	19
5. Discussion of Numerical Results	23
6. Concluding Remarks	27
References	29

LIST OF FIGURES

Fig. 1	Wake Behind Blunt Body at Hypersonic Speeds (Ref. 3).	16
Fig. 2	Temperature Ratio of Centerline - to Edge Values for Turbulent Wakes.	16
Fig. 3	Assumed Distribution of Density in a "Turbulent" Gas.	16
Fig. 4	Temperature and Atom Mass Fraction Distribution on Axial Streamtube. Laminar Flow for Two Spheres.	25
Fig. 5	Temperature Distribution on Axial Streamtube. A Comparison Between Laminar and Turbulent Flow. Sphere of 5 Inch Radius.	25
Fig. 6	Atom Mass Fraction Distribution on Axial Streamline. Sphere of 5 Inch Radius.	26
Fig. 7	Density Ratio Distribution on Axial Streamtube. Sphere of 5 Inch Radius.	26
Fig. 8	Temperature Distribution on Axial Streamtube. A Comparison Between Laminar and Turbulent Flow. Sphere of 0.5 Inch Radius.	28
Fig. 9	Atom Mass Fraction Distribution on Axial Streamline. Sphere of 0.5 Inch Radius.	28
Fig. 10	Density Ratio Distribution on Axial Streamtube. Sphere of 0.5 Inch Radius.	28

1. INTRODUCTION

The present work was motivated by an attempt to find theoretical explanations of the observable phenomena regarding trails left in the atmosphere by objects flying through it at hypersonic speeds.

In the case of equilibrium flow, it has been shown by the author (1)³ and others (2) that for laminar flow, the trails left by blunt objects could be miles long depending on the detector used by the observer. It was also recognized (1), and recently quantitatively substantiated by Lees and Hromas (3), that when the trails become turbulent, the cooling occurs much more rapidly than in the laminar diffusion case. It is also known that when certain metallic pellets are fired at high speed or when small meteors disintegrate in the atmosphere, they leave luminous trails which sometimes are longer than estimated from the laminar or turbulent thermodynamic equilibrium models (for pure air, for example) studied in the already mentioned references. This effect has been easily "explained away" in the past by saying that the ablation products contaminate the high temperature air, thus leading to large increases in radiation.

Although the foregoing explanation may be the correct one in many physical situations of interest, the question was investigated by the author, sometime ago, regarding the possibility of the existence of a new effect caused by the possible non-linear interaction of the turbulent oscillations (in a compressible reacting fluid) with the reaction rates themselves. Could this interaction affect the rate of cooling of the turbulent wake of a blunt-nosed body? The answer turned out to be in the affirmative, but the effect was a function of the magnitude of the oscillating quantities relative to their mean values. Some of these quantities have been measured in relatively low speed flows, and for those cases, they are of

³ Numbers in parentheses denote references at the end of this paper.

small magnitude. However, Slattery and Clay (4) have recently shown experimentally that the oscillations in hypervelocity wakes can be large. It was this last result that motivated the present quantitative study.

2. EFFECT OF TURBULENCE ON THE CONSERVATION EQUATIONS OF A REACTING FLUID

In order to bring to the forefront the coupling of the turbulence with the chemical kinetics, we will neglect all normal gradients when compared with the ones in the direction of motion. Thus, Reynolds and viscous stresses and laminar and turbulent conduction disappear from the continuity, momentum and energy equation. In general, this is a very important restriction, but is not important for the purpose of this paper. The problem will thus be reduced to the inviscid adiabatic flow in a streamtube, with a prescribed pressure as a function of distance. However, the conservation equations, so drastically simplified, contain quantities which are in general functions of time. When mean values in time are taken, certain correlation functions appear. The most important effect, however, occurs in regard to the modification of the chemical kinetic rates.

2.1 The Conservation Equations

The conservation equations for a compressible reacting fluid with no normal gradients subject to a prescribed pressure gradient will be written. The reason for treating essentially the case of a streamtube which is subject to a given pressure distribution, is that it is the simplest case that could be considered in which the main features of a hypersonic wake of a blunt body can be kept in the problem: the strong pressure gradients which govern the chemical kinetics of the problem. This streamtube could be interpreted as the first approximation to the center streamtube of a turbulent reacting wake. In order to keep the problem simple, the analysis will be restricted to a diatomic gas which can dissociate and recombine. Let any scalar quantity time varying

quantity $\tilde{q}$ be decomposed into $q+q'$, where q represents the time averaged value and q' is the time dependent part. Also, let bars over a quantity denote a time average taken at a given point in space and will be used only when its deletion may lead to ambiguity. The equations for the mean quantities in one-dimensional flow are given below (5)

Momentum:
$$\rho u \frac{du}{dx} + \overline{\rho' u'} \frac{du}{dx} = -\frac{d}{dx} \left(p + \overline{\rho u'^2} + u \overline{\rho' u'} + \overline{\rho' u'^2} \right) \quad [1]$$

where u , p , ρ and T denote, respectively, the time averaged values of velocity, pressure, density and temperature, $\overline{u'^2}$ is the Reynolds stress in the x-direction, s denotes axial distance, non-dimensionalized for example with respect to body radius r_n ; i.e. $s = x/r_n$; R is undissociated (cold) gas constant, the primes denote time varying quantities, and the bars denote time averages at a fixed position in space. The subscript ∞ denotes values of the quantities in the undisturbed gas ahead of the projectile. Our streamtube will consist, at the extreme left, of the free-stream gas which first goes through a normal shock wave (discontinuous) across which no chemical reaction takes place. Downstream of the shock wave, chemical reaction is allowed to proceed with a prescribed pressure history which can be approximately prescribed a priori for a particular body shape because, for our purpose, it is not a sufficiently sensitive function of the reaction rates.

Continuity:
$$\frac{A_\infty}{A} = \frac{\rho u}{\rho_\infty u_\infty} \left(1 + \frac{\overline{\rho' u'}}{\rho u} \right) \quad [2]$$

where A denotes the cross section of the streamtube, and the subscript ∞ denotes free stream conditions.

$$\begin{aligned} \text{Energy: } \frac{d}{dx} \left[\rho u \left(h + \frac{u^2}{2} \right) \right] + \frac{d}{dx} \left[\rho u h \left(\frac{\overline{p'h'}}{\rho h} + \frac{\overline{p'u'}}{\rho u} + \frac{\overline{u'h'}}{uh} + \frac{\overline{p'u'h'}}{\rho u h} \right) \right] = \\ = \frac{1}{2} \frac{d}{dx} \left\{ \rho u^3 \left[3 \left(\frac{\overline{p'u'}}{\rho u} + \frac{\overline{u'^2}}{u^2} + \frac{\overline{p'u'^2}}{\rho u^2} \right) + \frac{\overline{p'u'^3}}{\rho u^3} + \frac{\overline{u'^3}}{u^3} \right] \right\} \quad [3] \end{aligned}$$

where h denotes enthalpy.

From statistical mechanics, if it is assumed that the vibrational energy is always in equilibrium with the translational energy (i.e. vibrational excitation rates are infinitely fast), and this is not a significant restriction for the present purpose, the enthalpy of a dissociated diatomic gas can be written as a function of temperature and atomic mass fraction y , as

$$\begin{aligned} \frac{h}{RT_\infty} = \frac{T}{T_\infty} \left\{ \left[\left(5 + \frac{\alpha}{T} \right) y + \left(\frac{7}{2} + \beta \right) (1-y) \right] + y \left(\frac{3}{2} - \beta \right) \frac{\overline{y'T'}}{yT} \right. \\ \left. - (1-y) \beta^2 \left[\exp(\theta_v/T) \right] \left[1 + \frac{1}{2} \frac{\theta_v}{T} - \beta \exp(\theta_v/T) \right] \frac{\overline{T'^2}}{T^2} \right\} \quad [4] \end{aligned}$$

where θ_v is the vibrational constant of the molecule and $\alpha = 59,365^\circ\text{K}$

$$\beta = \frac{\theta_v/T}{\exp(\theta_v/T) - 1}$$

$$\text{State: } \frac{p/p_\infty}{\frac{\rho}{\rho_\infty} \frac{T}{T_\infty}} = (1+y) \left(1 + \frac{\overline{p'T'}}{\rho T} \right) + \frac{\overline{p'y'}}{\rho y} + \frac{\overline{y'T'}}{yT} + \frac{\overline{p'y'T'}}{\rho yT} \quad [5]$$

$$\text{Chemical Kinetics: } \frac{u_\infty}{r_n} \frac{u}{u_\infty} \frac{dy}{ds} = \frac{I_d}{W} - \frac{I_r}{W^2} \quad [6]$$

where I_d and I_r stand, respectively, for the dissociation and recombination terms in the kinetic equation, and W is the atomic weight of the chemical species. The novel results that will be presented, will depend heavily on Eq. 6 which will be derived in detail in the next section.

The unknowns are A , u , p , y and T as functions of s , as well as all the correlation functions. These will have to be specified as a function of s and will be discussed in Section 3.

2.2 The Chemical Kinetic Equations

There is no particular virtue in writing what follows in general form for any diatomic molecule. If done in general, some of the expressions will become too lengthy and cumbersome. Any reader interested in using the present approach for his particular reaction will certainly want to rederive all the expressions on his own. Thus, we will specialize all the following discussion to oxygen as a typical component of air.

Consider the reaction



where the third body M , could either be O or O_2 . The k 's are the reaction rate constants. Let a superscript on them indicate the type of third body under consideration, and also let $[O]$ denote the instantaneous concentration of oxygen atoms in moles/cm³, the reaction rate can be expressed as

$$\frac{d[O]}{dt} = -2k_r^O [O]^3 - 2k_r^{O_2} [O]^2 [O_2] + 2k_d^O [O_2][O] + 2k_d^{O_2} [O_2]^2 \quad [8]$$

The concentrations can be written in terms of mass fractions as

$$\begin{aligned} [O] \frac{\text{moles}}{\text{cm}^3} &= \frac{\rho(\text{gm/cm}^3)}{W(\text{gm/mole})} y, \\ [O_2] &= \frac{\rho}{2W} (1-y), \end{aligned} \quad [9]$$

where $W=16$ gm/mole and ρ is the density of the gas mixture.

From Ref. (6)

$$\left. \begin{aligned} k_d^{O_2} &= 9k_d, \quad k_d^O = 25k_d, \\ \text{where} \\ k_d &= 3.6 \times 10^{18} T^{-1} \exp\left(-\frac{59,365}{T}\right) \frac{\text{cm}^3}{\text{mole sec}}, \end{aligned} \right\} [10]$$

and T is in $^{\circ}\text{K}$. We also know, from theoretical chemical kinetics, within the restriction that a Boltzmann distribution exists at the non-equilibrium temperature, that

$$\frac{k_d}{k_r} = \frac{k_d^{O_2}}{k_r^{O_2}} = \frac{k_d^O}{k_r^O} = K_c(T), \quad [11]$$

where $K_c(T)$ is the equilibrium constant. For the temperatures that occur in oxygen when flying up to velocities of about 23,000 ft/sec, K_c is given from statistical mechanics by

$$K_c(T) = 2.93 \times 10^{-2} T^{1/2} (1 - e^{-\frac{2273.8}{T}}) \left[\frac{\left(5 + 3e^{-\frac{228}{T}} + e^{-\frac{325.9}{T}}\right)^2}{3 + 2.027e^{-\frac{11,392}{T}}} \right] e^{-\frac{59,365}{T}} \frac{\text{moles}}{\text{cm}^3} \quad [12]$$

In the range between 3000°K and 8000°K , the above expression can be approximated, with less than 10% error (6) by

$$K_c(T) = 1.2 \times 10^3 T^{-1/2} \exp\left(-\frac{59,000}{T}\right) \frac{\text{moles}}{\text{cm}^3}. \quad [13]$$

Thus, from Eqs. 10, 11, and 13

$$\left. \begin{aligned} k_r^0 &= 9k_r, \quad k_r^0 = 25k_r \quad \text{and} \\ k_r &= 3 \times 10^{15} T^{-1/2} \frac{\text{cm}^6}{\text{mole}^2 \text{ sec}} \end{aligned} \right\} \quad [14]$$

Inserting Eqs. 9, 10 and 14 into 8 yields

$$\frac{d\tilde{y}}{dt} = \tilde{k}_d \tilde{p} \frac{1-\tilde{y}}{W} (20.5 \tilde{y} + 4.5) - \tilde{k}_r \frac{\tilde{p}^2}{W^2} \tilde{y}^2 (41\tilde{y} + 9), \quad [15]$$

where the tilde has been added to emphasize that the quantities are, in the case of turbulent flow, composed of a time averaged and an oscillating value.

Rewriting Eq. 15 in terms of mean and time dependent quantities gives

$$\begin{aligned} \frac{dy}{dt} + \frac{dy'}{dt} &= \frac{1}{W} (k_d + k_d') (p + p') (1 - y - y') [20.5 (y + y') + 4.5] \\ &\quad - \frac{(k_r + k_r')}{W^2} (p + p')^2 (y + y')^2 [41(y + y') + 9] \end{aligned} \quad [16]$$

where we have used the fact that

$$\overline{y'}(t) = 0, \left(\frac{dy'}{dt} \right) = 0, \quad \text{and} \quad \tilde{y}(t) = \bar{y}(t) = \bar{y}(t) = y(t).$$

Carrying out the operations in Eq. 16, taking time averages, and considering that the time average of a primed quantity or its derivative is zero, leads to

$$\frac{dy}{dt} = \frac{I_d}{W} - \frac{I_r}{W^2}, \quad [17]$$

where

$$\begin{aligned}
I_d = & (4.5 + 20.5y)(1-y)(\rho k_d + \overline{\rho' k'_d}) + \overline{\rho y' k'_d} (16 - 41y) + k_d \overline{\rho' y'} (16 - 41y) \\
& - 20.5 \rho k_d \overline{y'^2} + \overline{\rho' y' k'_d} (16 - 41y) - 20.5 (\overline{\rho y'^2 k'_d} + k_d \overline{y'^2 \rho'}) - 20.5 \overline{y'^2 \rho' k'_d},
\end{aligned}
\tag{18}$$

$$\begin{aligned}
I_r = & P k_r \rho^2 y^2 + \left[2(Q+9) k_r \rho y \overline{\rho' y'} + 2P \rho y^2 \overline{\rho' k'_r} + (Q+9) \rho^2 y \overline{y' k'_r} + P k_r y^2 \overline{\rho'^2} + Q k_r \rho^2 \overline{y'^2} \right] \\
& + \left[(Q+9) k_r y \overline{\rho'^2 y'} + 2Q k_r \rho y \overline{y'^2 \rho'} + 2(Q+9) \rho y \overline{\rho' y' k'_r} + P y^2 \overline{k'_r \rho'^2} + Q \rho^2 \overline{k'_r y'^2} + 41 k_r \rho^2 \overline{y'^3} \right] \\
& + \left[Q k_r \rho^2 \overline{y'^2} + 2P y \overline{\rho'^2 y' k'_r} + 2Q \rho y \overline{\rho' k'_r} + 41 y^2 \overline{k'_r y' \rho'^2} + 82 k_r \rho y \overline{y'^3 \rho'} + 41 \rho^2 \overline{y'^3 k'_r} \right] \\
& + \left[Q k'_r \rho'^2 \overline{y'^2} + 82 \rho y \overline{y'^3 k'_r \rho'} + 41 k_r y \overline{y'^3 \rho'^2} \right] + 41 \overline{k'_r \rho'^2 y'^3},
\end{aligned}
\tag{19}$$

$$\begin{aligned}
P &= 41y + 9, \\
Q &= 123y + 9.
\end{aligned}
\tag{20}$$

The first term in Eqs. 18 and 19 is the usual one that appears when the flow is laminar. Without having any experimental information on the behavior of the correlation functions that appear in these equations, it could be conceivable that the term I_d which in laminar flow is the contribution to the net rate due to dissociation may here become a recombination term. A similar comment could be made about I_r . When such a thing happens, the phenomenological approach that led to stating the chemical kinetics in the form of Eq. 8 may require modification. Equation 18 contains up to fourth order correlations while Eq. 19 contains up to the sixth order. It should be noted that in deriving Eqs. 18 and

19 no terms were neglected, and that no restrictive assumption was made regarding the size of primed quantities relative to the corresponding mean values (i.e. ρ'/ρ).

In order to reduce Eqs. 18 and 19 to a tractable form, it will be necessary to derive expressions or evaluate the correlation functions that appear. Very few correlations higher than the second have been made in turbulent fluid mechanics which are applicable to the present problem. If the oscillating quantities are small compared to their respective mean values, correlations higher than the second will not be of importance. In the case of hypervelocity wakes Slattery and Clay (4) show that $(\overline{\rho'^2})^{1/2}/\rho \approx 0.5$, which is far from small. However, in order to make the problem tractable, it will be assumed in the present paper that only second order correlations are of importance. After obtaining numerical results based on this assumption, they will be examined and evaluated in terms of it. From Eqs. 18 and 19 the second order correlations required are

$$\overline{y'^2}, \overline{\rho'y'}, \overline{\rho'k'_d}, \overline{y'k'_d}, \overline{\rho'k'_r}, \text{ and } \overline{y'k'_r}. \quad [21]$$

These functions should be expressed in terms of $\overline{\rho'^2}$, $\overline{\rho'T'}$, and $\overline{T'^2}$. It will then be necessary to expand each of the prime quantities in Eq. 21 in ρ' and T' , take products and then time averages.

From the perfect gas law

$$p+p' = R(\rho+\rho')(T+T')(1+y+y') \quad [22a]$$

or

$$p+p' = R[\rho T + (\rho T)'] (1+y+y') \quad [22b]$$

Since the perturbation pressure will depend on the square of the perturbation velocity, it will be assumed, as a first approximation, that $p' = 0$. A discussion of this point is given by Kistler, with regard to compressible boundary layer work, in Ref. 7, p. 295. Simultaneous measurements of all the oscillating quantities in Eq. 22 have not been made, even when $y+y' = 0$.

Some pressure measurements made in boundary layers by different investigations for various flow conditions are briefly reported by Willmarth in (Ref. 8, p.112) from which

$$\left(\frac{\overline{p'^2}}{p}\right)^{1/2} \leq 10^{-2} \frac{\gamma}{2} M^2, \quad [23]$$

where γ is the ratio of specific heats, and M is the Mach number of the flow external to the boundary layer. In order to apply this result to a turbulent wake, it is thought that the significant Mach number should be based on the velocity defect across the turbulent core of the wake. Thus, for a blunt object Eq. 22 will approximately be reduced to $\left(\frac{\overline{p'^2}}{p}\right)^{1/2} \leq 10^{-2}$.

Setting $p'=0$ in Eq. 22a and solving for y' gives

$$y' = \frac{(1+\gamma) \frac{\overline{p'T'}}{\rho T} + \frac{\overline{y'T'}}{T} + \frac{\overline{p'y'}}{\rho} + \frac{\overline{p'y'T'}}{\rho T} - (1+\gamma) \left(\frac{\overline{p'}}{\rho} + \frac{\overline{T'}}{T} + \frac{\overline{p'T'}}{\rho T} \right)}{1 + \frac{\overline{p'}}{\rho} + \frac{\overline{T'}}{T} + \frac{\overline{p'T'}}{\rho T}}, \quad [24a]$$

or, if using Eq. 22b

$$y' = \frac{\frac{(\overline{pT})' y'}{\rho T} - (1+\gamma) \frac{(\overline{pT})'}{\rho T}}{1 + \frac{(\overline{pT})'}{\rho T}}. \quad [24b]$$

The time averaged terms that appear in Eqs. 24a and b are of higher order than the others, and can therefore be neglected. In order to end up with oscillating quantities of a single variable in each term, and since the oscillating products are such that are not any easier to measure than the single quantities, we will expand the last term in parenthesis and the denominator of Eq. 24a into a power series of $\overline{p'}/\rho$ and $\overline{T'}/T$. When the same is done for k'_d and k'_r the results are

$$\left. \begin{aligned}
 y' &= -(1+y) \left[\frac{\rho'}{\rho} + \frac{T'}{T} + 0 \left(\frac{\rho' T'}{\rho T} \right) \right] \\
 k_d' &= k_d \left[\left(\frac{\alpha}{T} - m \right) \frac{T'}{T} + 0 \left(\frac{T'^2}{T^2} \right) \right], \text{ and} \\
 k_r' &= k_r \left[-n \frac{T'}{T} + 0 \left(\frac{T'^2}{T^2} \right) \right].
 \end{aligned} \right\} \quad [25]$$

Taking the products necessary to construct the expressions in Eq. 21, and averaging in time yields

$$\left. \begin{aligned}
 \overline{y'^2} &= (1+y)^2 \left(\frac{\overline{\rho'^2}}{\rho^2} + 2 \frac{\overline{\rho' T'}}{\rho T} + \frac{\overline{T'^2}}{T^2} \right) + \text{triple correlations} \\
 \overline{\rho' y'} &= -(1+y) \rho \left(\frac{\overline{\rho'^2}}{\rho^2} + \frac{\overline{\rho' T'}}{\rho T} \right) + \text{triple correlations} \\
 \overline{\rho' k_d'} &= \rho k_d q \frac{\overline{\rho' T'}}{\rho T} + \text{triple correlations} \\
 \overline{y' k_d'} &= -(1+y) k_d q \left(\frac{\overline{\rho' T'}}{\rho T} + \frac{\overline{T'^2}}{T^2} \right) + \text{triple correlations} \\
 \overline{\rho' k_r'} &= -\rho k_r n \frac{\overline{\rho' T'}}{\rho T} + \text{triple correlations} \\
 \overline{y' k_r'} &= (1+y) k_r n \left(\frac{\overline{\rho' T'}}{\rho T} + \frac{\overline{T'^2}}{T^2} \right) + \text{triple correlations}
 \end{aligned} \right\} \quad [26]$$

$$q = \frac{59.365}{T} - 1$$

Inserting Eqs. 26 into Eqs. 18 and 19 yields, after dropping third and higher order correlations,

$$I_d = \rho_{\infty} \frac{\rho}{\rho_{\infty}} k_d \left\{ f_1 - f_2 \frac{\overline{T'^2}}{T^2} - f_3 \frac{\overline{\rho'^2}}{\rho^2} + f_4 \frac{\overline{\rho' T'}}{\rho T} \right\}, \quad [27]$$

where

$$\left. \begin{aligned} f_1 &= (4.5 + 20.5y)(1-y), \\ f_2 &= (1+y) \left[q(16-41y) + 20.5(1+y) \right], \\ f_3 &= (1+y)(36.5 - 20.5y), \\ f_4 &= (4.5 + 20.5y)(1-y) - q(1+y) \left[q(16-41y) + 57 \right], \end{aligned} \right\} \quad [28]$$

and

$$I_r = \rho_{\infty}^2 \left(\frac{\rho}{\rho_{\infty}} \right)^2 k_r \left\{ g_1 + g_2 \frac{\overline{T'^2}}{T^2} + g_3 \frac{\overline{\rho'^2}}{\rho^2} + g_4 \frac{\overline{\rho' T'}}{\rho T} \right\} \quad [29]$$

where

$$\left. \begin{aligned} g_1 &= (41y + 9)y^2, \\ g_2 &= 3(1+y) \left[\frac{1}{2} (41y+6)y + (41y+3)(1+y) \right], \\ g_3 &= y \left\{ (41y+9)y + 3(1+y) \left[(41y+3) \frac{(1+y)}{y} - 2(41y-6) \right] \right\}, \\ g_4 &= -\frac{9}{2} (41y+6)(1+y)y + 2 \left[3 (41y+3)(1+y)^2 - \frac{1}{2} (41y+9)y^2 \right]. \end{aligned} \right\} \quad [30]$$

It should be pointed out that f_1 and g_1 , in Eqs. 28 and 30, are the usual terms that appear in the chemical kinetic equations when there is no turbulence. The remaining f 's and g 's can be interpreted as influence coefficients of the correlation functions on the reaction rates.

We will discuss next how to arrive at some reasonable values for

the correlation functions necessary to solve the problem.

3. ESTIMATES OF THE CORRELATION FUNCTIONS BASED ON SOME EXPERIMENTAL DATA

There are many different correlation functions that appeared in the foregoing discussion. Only few of them have ever been measured regardless of the fluid mechanical problem under discussion. Therefore, based on whatever experimental data are available, we will have to at least evaluate the order of magnitude of the functions involved. In order to do this in a reasonable manner, we will quickly and superficially review in what follows some of the typical values of certain correlation functions that have been measured in different flow problems, i.e. boundary layers, jets and wakes.

3.1 Measurements in the Boundary Layer

Typical measurements are those presented by Klebanoff(9) of the

$(\overline{u'^2})^{1/2}/u \leq 10^{-1}$ in incompressible boundary layers; those of Kistler(7) of $(\overline{T'^2})^{1/2}/T \leq 10^{-1}$, $(\overline{u'^2})^{1/2}/u \leq 9 \times 10^{-2}$, $\overline{T'u'}/T_u \approx -7 \times 10^{-3}$, $(\overline{\rho u'})/\rho u \leq 0.14$ in compressible boundary layers between mach numbers of 1.72 and 4.67 where the stagnation temperature was 300°K.

3.2 Measurements in Turbulent Jets

Data for incompressible jets can be found in Townsend's book (10).

The maximum disturbances occur near the center of the jet and gives

$(\overline{u'^2})^{1/2}/u \leq 0.15$, $\overline{u'v'}/u^2 \leq .008$. Corrsin and Uberoi (11) measured for a heated jet $(\overline{T'^2})^{1/2}/T \leq 10^{-1}$.

3.3 Measurements in Wakes

3.3.1 Incompressible Wakes

For incompressible wakes flows Townsend shows that

$(\overline{u'^2})^{1/2}/u \leq .04$, $-\overline{u'v'}/u^2 \leq .006$.

3.3.2 Compressible Wakes

Demetriades (12) measured $(\overline{\rho u})' / \rho u \approx 0.40$ in the wake of a cylinder at free stream mach number of 5.8 and Reynolds numbers between 18,500 and 48,500. Slattery and Clay (4) have taken schlieren photographs of the wake left behind a spherical projectile of 1/2 inch in diameter flying at 8370 ft/sec in air at a pressure of 30 mm of mercury. They took densitometer tracings of the negative at several portions downstream of the projectile and derived from them the density fluctuations as given in the following table:

x/d	10	50	400	800
$(\overline{\rho'^2})^{1/2} / \rho$	0.05	0.25	0.90	0.50

The fluctuations in density can be seen to be quite large, and they are the first experimentally derived values obtained at hypervelocities. These values should be compared with $\overline{\rho' u'} / \rho u \approx 0.4$ obtained by Demetriades (11). Most of the oscillation of the mass flow correlation must be due to the oscillation in density, because if it were due to the oscillation in velocity, the kinetic energy invested in the turbulence would be prohibitively large. Before use is made of a high value for the density fluctuation, an attempt will next be made of explaining why such a value, although high, could be justified in the case of hypersonic wakes.

Consider the wake of a hypervelocity sphere (Fig. 1) that has a turbulent wake. Lees and Hromas (3) have analyzed, in some detail, the behavior of such a turbulent wake in equilibrium flow. Within the turbulent core, one would expect to have eddies of various temperatures. The range of temperature variation of the eddies would be between the low temperature in the inviscid flow at the turbulent edge and the highest value in the turbulent core. Hromas (13) has given the author some of his calculations for a turbulent trail of a sphere of 1/2 inch in diameter, flying at sea level at 9500 ft/sec. At this velocity there are no chemical reactions and the enthalpy on the center line h_o , of the trail divided by the edge value h_f , is equal to the corresponding temperature ratio, T_o / T_f .

For a blunt body, close to the wake's neck, T_o/T_f should be near unity; very far downstream, when all the gas has cooled, $T_o/T_f \rightarrow 1$. In between, the outer inviscid wake cools rapidly and this ratio should have a peak. Fig. 2 shows this ratio for two bodies under different flight conditions.

We will use the 9500 ft/sec curve to arrive at some conclusions regarding the turbulence structure necessary to make possible a value of $(\overline{\rho'^2})^{1/2}/\bar{\rho} \approx 0.5$, as obtained by Slattery and Clay (4). Let us assume that in the turbulent core we have a mixture composed of lumps of hot and cold gas, which if no radial gradients of pressure allowed, represent spots of low and high density gas. Let ρ_c, ρ_h and $\bar{\rho}$ represent respectively the density of the cold gas, the hot gas and the mean value. We will assume that the structure is periodic in space with a period of length L . We will neglect that the gas may be reacting chemically. Thus

$$\frac{\rho_c}{\rho_h} = \frac{T_h}{T_c} = \tau_1 \quad [31]$$

The magnitude of the temperature T_c for the cold gas would not be lower (although it may be higher) than T_f , the temperature at the edge of the turbulent wake. T_h would be higher than the mean temperature calculated, for example, by Lees and Hromas. Thus, τ_1 would be approximately given by

$$\tau_1 = T_o/T_f \quad [32]$$

Let the value of the square of the density fluctuation be given by

$$\frac{\overline{\rho'^2}}{\bar{\rho}^2} = \tau_2, \quad [33]$$

where the total density $\tilde{\rho}$ is given by $\tilde{\rho} = \rho + \rho'$, and the density structure is assumed to be as shown in Fig. 3. For that structure, the mean

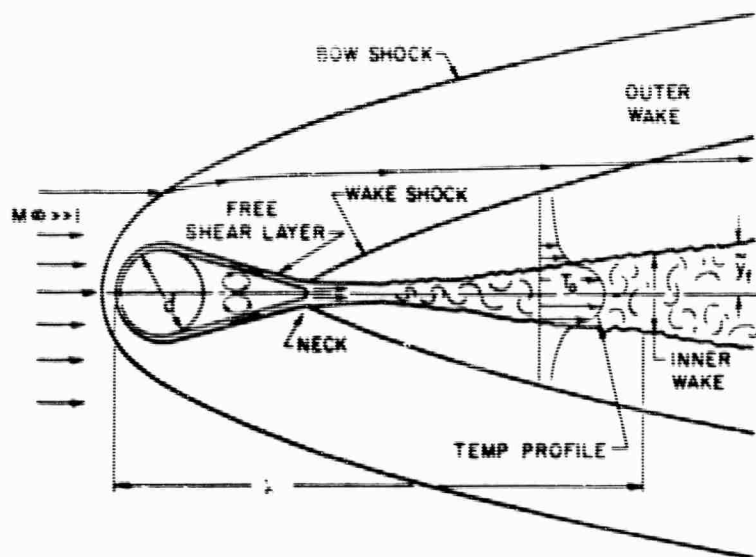


FIG. 1
WAKE BEHIND BLUNT BODY AT
HYPERSONIC SPEEDS (Ref. 3)

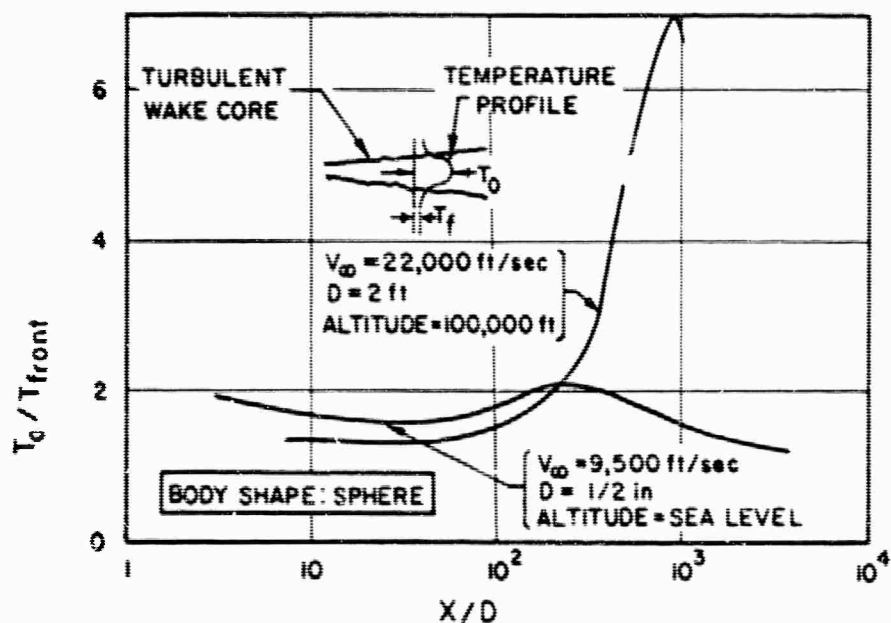


FIG. 2
TEMPERATURE RATIO OF CENTERLINE -
TO EDGE VALUES FOR TURBULENT WAKES

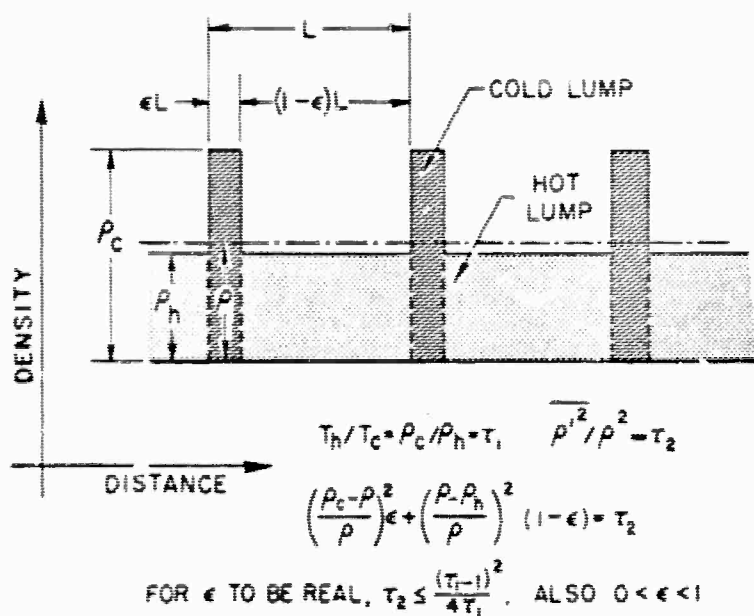


FIG. 3
ASSUMED DISTRIBUTION OF DENSITY
IN A "TURBULENT" GAS

density is given by

$$(\rho_c - \rho) \epsilon = (\rho - \rho_h) (1 - \epsilon),$$

or

$$\frac{\rho}{\rho_h} = 1 + (\tau_1 - 1) \epsilon, \quad [34]$$

where ϵ is defined in Fig. 3.

Interpreting Eq. 34 for the structure of Fig. 3, gives

$$\left(\frac{\rho_c - \rho}{\rho} \right)^2 \epsilon + \left(\frac{\rho - \rho_h}{\rho} \right)^2 (1 - \epsilon) = \tau_2,$$

which can be rewritten as

$$\left[\left(\tau_1 \frac{\rho_h}{\rho} - 1 \right)^2 - \left(1 - \frac{\rho_h}{\rho} \right)^2 \right] \epsilon + \left(1 - \frac{\rho_h}{\rho} \right)^2 = \tau_2. \quad [35]$$

We would like to ask now, that if one specifies a value of τ_1 (obtained from Lees and Hromas's calculations) and τ_2 (obtained from Slattery and Clay's measurements), is there any hope to find a value of ϵ , from Eqs. 34 and 35, that would make physical sense for the model of Fig. 3. Physical sense means that the value of ϵ satisfies

$$0 < \epsilon < 1 \quad [36]$$

and even more, ϵ should be small compared to unity; that is, only less than half of the mixture should be cold gas.

If the value of ρ_h/ρ from Eq. 34 is used in Eq. 35, solving for ϵ leads to

$$\epsilon = \frac{-(2\tau_2 - w) w \pm \sqrt{(2\tau_2 - w)^2 w^2 - 4(\tau_2 + 1)\tau_2 w^2}}{2(\tau_2 + 1)w^2}, \quad [37]$$

where

$$w = \tau_1 - 1. \quad [38]$$

In order for ϵ to be real, the discriminant has to be positive or zero.

Thus,

$$(2\tau_2 - w)^2 - 4(\tau_2 + 1)\tau_2 \geq 0,$$

$$\text{or } \tau_2 \leq \frac{(\tau_1 - 1)^2}{4\tau_1} \quad [39]$$

It should be noted that for $\tau_1 \gg 1$, $\tau_2 \leq \tau_1/4$ or $(\rho'^2)^{1/2}/\rho \leq \sqrt{\tau_1}/2$.

In the present case (Fig. 2) at 800 diameters downstream from the pellet at 9500 ft/sec, $\tau_1 = 1.66$, thus giving from (39) $\tau_2 \leq 0.0658$. Slattery and Clay give $(\rho'^2)^{1/2}/\rho \approx 0.5$ which is equivalent to $\tau_2 = 0.25$. Thus, our model of Fig. 3 cannot be even approximately correct if Slattery and Clay's measurement is right. Although the details of the model of Fig. 3 are certainly incorrect when compared with real turbulence, the magnitude of the mean values we compute from it cannot be radically wrong. Thus, it would be interesting to determine the value of ϵ that Eq. 37 would yield if τ_2 were less than 0.0658. Let, for example, $\tau_2 = 0.04$, which corresponds to $(\rho'^2)^{1/2}/\rho = 0.2$ instead of 0.5. From Eq. 37 two values of ϵ can be found: either $\epsilon = 0.68$ or $\epsilon = 0.15$. These values lead, from Eq. 34 respectively to either $\rho/\rho_h = 1.41$ or $\rho/\rho_h = 1.09$. Thus, according to the previous discussion, we will choose $\epsilon = 0.15$ and $\rho/\rho_h = 1.09$ as a physically reasonable combination. We, therefore, conclude that either Slattery and Clay's measured value is too high in order to be physically realizable, or that Lees and Hromas's (3) calculations don't give the true temperature ratio in the turbulent wake.

In order to further examine whether the idealization of Fig. 3 leads to meaningful results, we have used the data of Fig. 2 for the 22,000 ft/sec, 2 ft. sphere about 600 diameter downstream, at which point $\tau_1 = 6$. From Eq. 39

$$\sqrt{\tau_2} = (\rho'^2)^{1/2}/\rho \leq 1.02. \quad [40]$$

Thus, taking $\tau_2 = 1$ and using Eqs. 37 and 34 yields

$$\begin{aligned} \epsilon_1 &= 0.16, & \rho_1 &= 1.64, \\ \epsilon_2 &= 0.08, & \rho_2 &= 1.32. \end{aligned} \quad [41]$$

where the subscripts 1 and 2 denote the two possible solutions of the problem. Both values of ϵ and ρ , particularly the second ones, are reasonable because such values should be physically realizable.

4. FURTHER SIMPLIFICATION OF THE EQUATIONS FOR A TURBULENT REACTING GAS FLOW.

Before using the conservation equation to do numerical calculations, it will be necessary to specify the correlation functions that appear in Eqs. 1 thru 6. In order for these equations to be consistent with Eq. 6 (where the correlations higher than the second were assumed small), the last term in the right hand member of Eqs. 1 and 5 should be left out, as well as the last three in the right hand member of Eq. 3. The last term of the left hand member of 3 should also be left out. Since little is known about the functional dependence of the correlation functions, their derivatives with respect to x (or s) could be left out. When this is done, the equations reduce to

$$\text{Momentum:} \quad \frac{dV}{ds} = \frac{\frac{RT_\infty}{u_\infty^2} \frac{d(p/p_\infty)}{ds}}{V(p/p_\infty)(1 + \rho' u' / \rho u)}, \quad [42]$$

$$\text{where} \quad V = u/u_\infty, \quad [43]$$

$$\text{Continuity:} \quad \frac{A_\infty}{A} = \frac{\rho u}{\rho_\infty u_\infty} \left(1 + \frac{\rho' u'}{\rho u} \right), \quad [44]$$

$$\text{Energy:} \quad \frac{h}{RT_\infty} = \frac{u_\infty^2}{2RT_\infty} \left[1 - \left(\frac{u}{u_\infty} \right)^2 \right] + \frac{h_\infty}{RT_\infty}, \quad [45]$$

$$\begin{aligned} \text{Statistical} \\ \text{Mechanics:} \quad \frac{h}{RT_\infty} = \frac{T}{T_\infty} \left\{ \left[\left(5 + \frac{\alpha}{T} \right) y + \left(\frac{7}{2} + \beta \right) (1-y) \right] + y \left(\frac{3}{2} - \beta \right) \frac{y' T'}{y T} \right. \\ \left. - (1-y) \beta^2 \left[\exp(\theta_v/T) \right] \left[1 + \frac{1}{2} \frac{\theta_v}{T} - \beta \exp(\theta_v/T) \right] \right\} \frac{T^2}{T_\infty^2} \end{aligned} \quad [46]$$

where

$$\frac{\overline{y'T'}}{yT} = -\frac{1+y}{y} \left(\frac{\overline{p'T'}}{\overline{pT}} + \frac{\overline{T'^2}}{T^2} \right) \quad [47]$$

and

$$\beta = \frac{\theta_v/T}{\left[\exp(\theta_v/T) - 1 \right]} \quad [48]$$

State:

$$\frac{\rho}{\rho_\infty} = \frac{p}{p_\infty} \left\{ \left(\frac{T}{T_\infty} \right) \left[(1+y) \left(1 + \frac{\overline{p'T'}}{\overline{pT}} \right) + \frac{\overline{p'y'}}{\overline{py}} + \frac{\overline{y'T'}}{yT} \right] \right\}^{-1} \quad [49]$$

Chemical
Kinetics:

$$\frac{u_\infty}{r_n} v \frac{dy}{ds} = \frac{I_d}{W} - \frac{I_r}{W^2} \quad [50]$$

The magnitude of the term $\overline{p'u'}/\rho u$ in Eqs. 42 and 44 could be, according to the data presented in Section 3.1, of the order of 0.15. Thus, neglecting such a term in those equations would introduce an error of about 15% in the momentum equation.

From an inspection of the other foregoing equations and Eqs. 27 thru 30, it can be concluded that the reaction rate equations are much more sensitive, for a given value of the correlation functions, than the other conservation equations. Thus, as a first attempt at obtaining some numerical results, the correlation functions were only included in Eq. 50. After numerical results were thus obtained, a check was made of the importance of some of the terms left out, which will be discussed later.

When the correlations are neglected, Eqs. 45 and 46 can be equated and solved for y

$$y = \frac{\frac{u_{\infty}^2}{2RT_{\infty}} (1 - V^2) + \frac{h_{\infty}}{RT_{\infty}} - \frac{T}{T_{\infty}} \left(3.5 + \frac{\theta_v/T}{\exp \theta_v/T - 1} \right)}{\frac{T}{T_{\infty}} \left(1.5 + \frac{59365}{T} - \frac{\theta_v/T}{\exp \theta_v/T - 1} \right)} \quad [51]$$

Differentiation of Eq. 51 with respect to s , insertion of Eqs. 42 and 50 lead to

$$\frac{dT}{ds} = \frac{T_{\infty} \left[\frac{d(p/p_{\infty})}{ds} / p/p_{\infty} \right] - \left[1.5 T + 59,365 - \frac{2274}{(\exp 2274/T) - 1} \right] \left(\frac{r_n}{u_{\infty} V} \right) \left(\frac{I_1}{W} - \frac{I_2}{W^2} \right)}{1.5y + 3.5 + (1-y) \left(\frac{2274}{T} \right)^2 \left\{ \frac{\exp 2274/T}{[(\exp 2274/T) - 1]^2} \right\}} \quad [52]$$

In order to solve the differential equations 42 and 52 it is necessary to prescribe the pressure on the streamtube as a function of s . Since we are interested in a blunt body, we will prescribe a Newtonian pressure distribution on the nose as

$$\frac{p}{p_{\infty}} = \frac{p_s}{p_{\infty}} \cos^2 s, \quad 0 \leq s \leq 0.96 (-55^\circ) \quad [53]$$

where the subscript s denotes stagnation conditions. Let p_{sh} denote pressure at 90° away from the stagnation point, then the pressure can be expressed (14) as

$$\frac{p}{p_{\infty}} = \left[\frac{1}{1 + 2 \left(s - \frac{\pi}{2} \right)} \right] \frac{p_{sh}}{p_{\infty}} + \left[\frac{1}{1 + \frac{1}{2 \left(s - \frac{\pi}{2} \right)}} \right] \frac{p_{sh}}{p_{\infty}}, \quad s \geq \frac{\pi}{2} \quad [54]$$

where p_{sh} can be determined (15) from

$$\frac{p_{sh}}{p_{\infty}} = 1 + \left(0.045 - \frac{0.827}{M_{\infty}^2} \right) \frac{p_s}{p_{\infty}}, \quad [55]$$

where M_{∞} is the free stream Mach number. Between 55° and 90° the pressure can be fitted with an expression of the form

$$\frac{p}{p_{\infty}} = as^2 + bs + c, \quad 0.96 \leq s \leq \frac{\pi}{2} \quad [56]$$

where

$$a = 1.2823 \frac{p_s}{p_{\infty}} - 16.379 \frac{p_{sh}}{p_{\infty}},$$

$$b = -3.7837 \frac{p_s}{p_{\infty}} + 43.090 \frac{p_{sh}}{p_{\infty}}, \quad [57]$$

$$c = 2.7795 \frac{p_s}{p_{\infty}} - 26.271 \frac{p_{sh}}{p_{\infty}}.$$

The necessary pressure derivatives are

$$\frac{d(p/p_{\infty})}{ds} = - \frac{p_s}{p_{\infty}} \sin 2s, \quad 0 \leq s \leq 0.96 \quad [58]$$

$$= 2as + b, \quad 0.96 \leq s \leq \frac{\pi}{2} \quad [59]$$

$$= \frac{2 p_{sh}/p_{\infty}}{\left[1 + 2 \left(s - \frac{\pi}{2} \right)^2 \right]} \left\{ \left[\frac{2 \left(s - \frac{\pi}{2} \right)}{1 + 2 \left(s - \frac{\pi}{2} \right)^2} \right]^{(p_{sh}/p_{\infty} - 1)} - 1 \right\} \quad s > \frac{\pi}{2} \quad [60]$$

Finally, the correlation functions necessary in Eqs. 27 and 29 are $\overline{T'^2}/T^2$, $\overline{\rho'^2}/\rho^2$ and $\overline{\rho'T'}/\rho T$. The calculations will be made for the case where the streamtube has no turbulence from $s=0$ to $s=3$, it builds up linearly with distance until it reaches $s=4$ (i.e. in one radius) to a value that stays constant with s (Fig. 4), i.e.

$$\overline{T'^2}/T^2 = \overline{\rho'^2}/\rho^2 = \overline{\rho'T'}/\rho T = 0 \quad \text{for } 0 \leq s \leq 3 \quad [61]$$

$$\left. \begin{aligned} \frac{\overline{T'^2}}{T^2} &= a_1 \frac{s-s_1}{s_2-s_1}, \\ \frac{\overline{\rho'^2}}{\rho^2} &= a_2 \frac{s-s_1}{s_2-s_1}, \\ \frac{\overline{\rho'T'}}{\rho T} &= a_3 \frac{s-s_1}{s_2-s_1}, \end{aligned} \right\} \quad s_1 \leq s \leq s_2 \quad [62]$$

where $s_1 = 3$ and $s_2 = 4$,

$$\overline{T'^2}/T^2 = a_1, \quad \overline{\rho'^2}/\rho^2 = a_2 \quad \text{and} \quad \overline{\rho'T'}/\rho T = a_3 \quad s > s_2 \quad [63]$$

5. DISCUSSION OF NUMERICAL RESULTS.

Before deciding what values of a_1 , a_2 and a_3 should have in the calculations, it is important to realize some of the restrictions that have to be imposed.

Only a_2 has been measured (4). Thus the other a 's have to be conjectured. a_1 and a_2 are positive definite. In a non-reacting gas, $y = \text{constant}$ and if in Eq. 22 a $\rho' = 0$, $\rho'T'$ would always be a negative quantity, and further more would be zero. However, in our calculations $\overline{\rho'T'}$ was assumed to be negative or zero. No calculations were made for

$\rho'T'$ positive. It also follows, from the non-reacting case, that $a_1 = a_2$. Various other relative values of a_1 and a_2 were used also.

A physically impossible combination of a 's manifests itself in an obvious way by I_d becoming negative. I_d or I_r both have to be positive at all times.

If the a 's are kept smaller than 10^{-2} , the present problem as treated herein is approximately correct. For larger values of the a 's the triple and higher order correlation terms, which have been left in the calculation, become important. These could be kept, but the difficulty is to prescribe reasonable values to them in a particular calculation, since not only have they not been measured, but it may be impossible to do so.

Fig. 4 shows the temperature T and atomic oxygen mass fraction y , along a streamtube as a function of downstream distance measured from the normal shock non-dimensionalized with respect to nose radius. Two spheres have been used, one of 1/2 inch radius and the other of 5 inches, flying at 20,000 ft/sec in an oxygen atmosphere where density is 10^{-2} the normal value. When $x/r_n = 0$, the temperature reaches a high value while $y=0$. After dissociation the temperature drops and y builds up. Fig. 4 shows the history of the flow for $s > 10^{-2}$. It can be seen that for large values of s , after the pressure has long ago reached the free-stream value, the variables reach a constant equilibrium value. The reason for the equilibrium state for each sphere is not the same is due to different entropies of the flow in each case: for the smaller sphere the flow is further out of equilibrium during the expansion process, thus leading to a larger entropy in the final state, which represents a higher final temperature.

It should be noted that the final equilibrium state will be affected by the presence of turbulence. This can be clearly seen from the reaction rate equations when they go to equilibrium. One other way of looking at this fact is that the turbulence terms modify Gibbs' function, which when minimized, leads to a different equilibrium condition.

Figs. 5 through 7 present some of the results obtained for the case

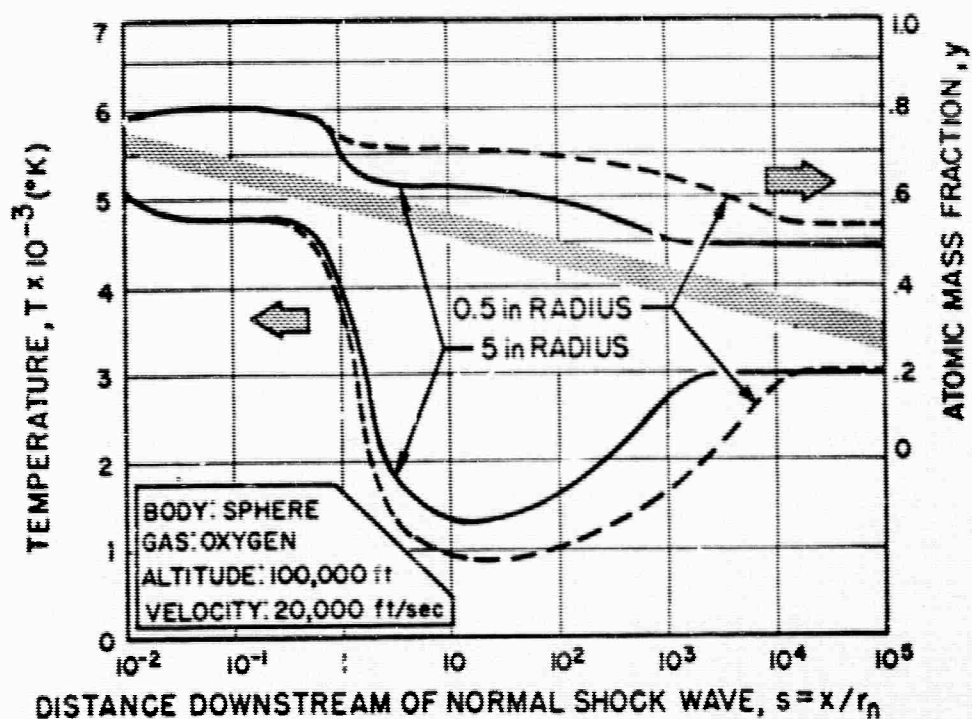


FIG. 4 TEMPERATURE AND ATOM MASS FRACTION DISTRIBUTION ON AXIAL STREAMTUBE. LAMINAR FLOW FOR TWO SPHERES.

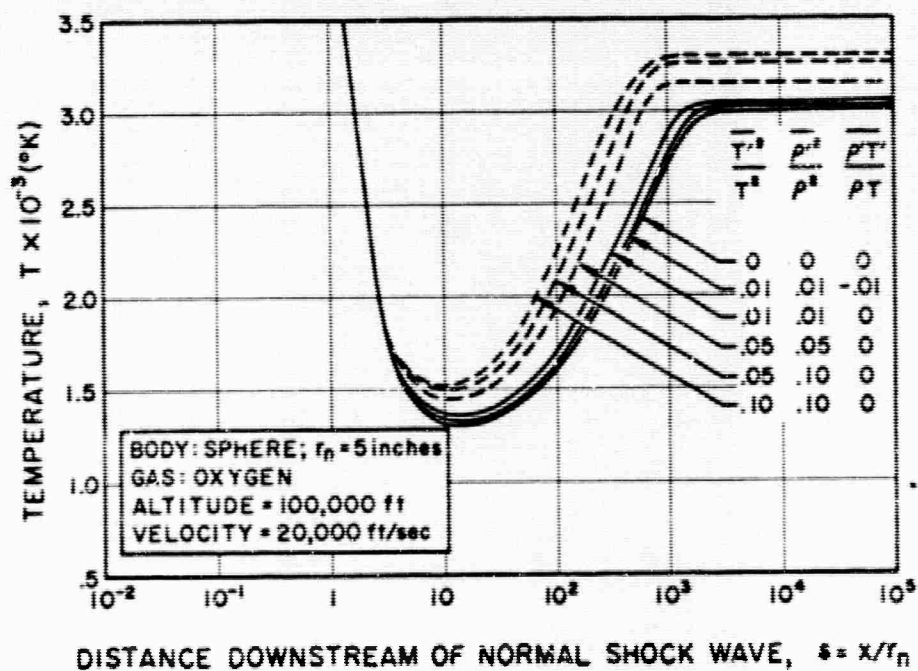


FIG. 5 TEMPERATURE DISTRIBUTION ON AXIAL STREAMTUBE. A COMPARISON BETWEEN LAMINAR AND TURBULENT FLOW. SPHERE OF 5 INCH RADIUS.

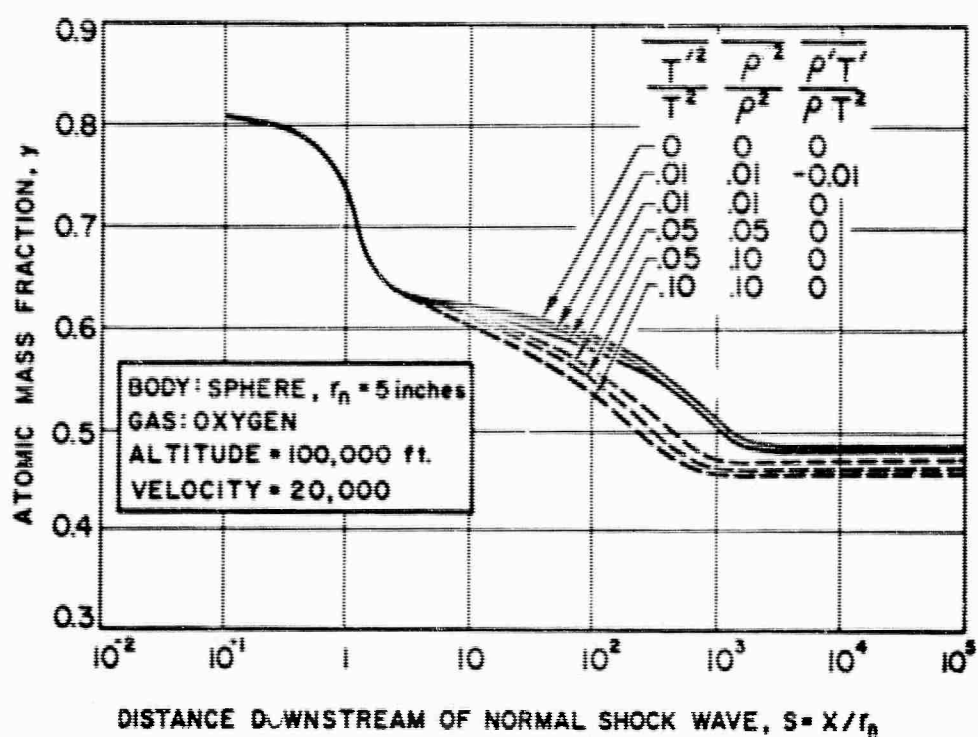


FIG. 6 ATOM MASS FRACTION DISTRIBUTION ON AXIAL STREAMLINE. SPHERE OF 5 INCH RADIUS.

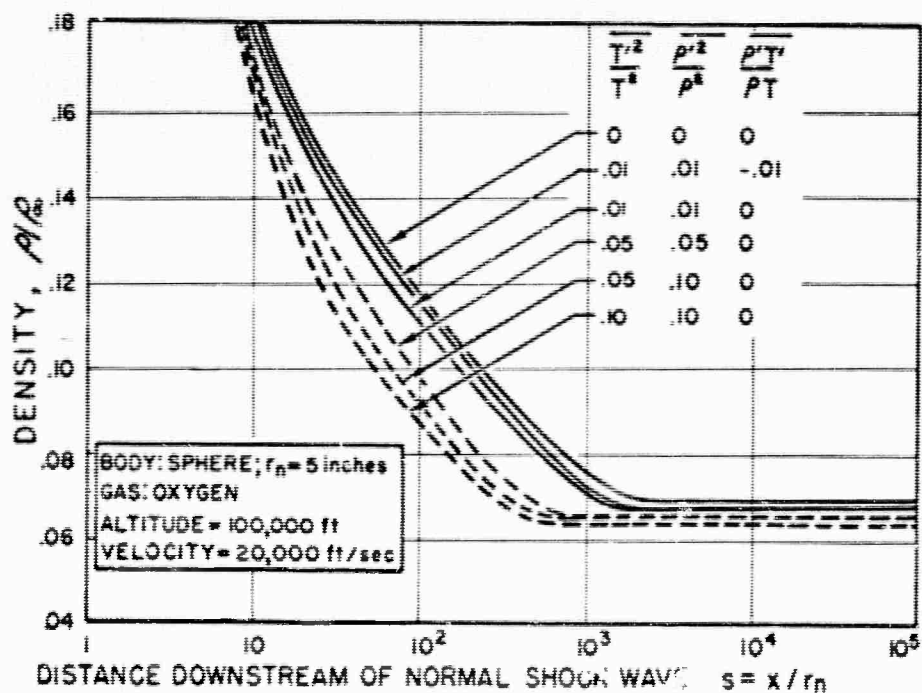


FIG. 7 DENSITY RATIO DISTRIBUTION ON AXIAL STREAMTUBE. SPHERE OF 5 INCH RADIUS

$r_n = 5$ inches. In these figures the curves should be compared with the non-turbulent results. The solid curves are to be trusted, while the dashed ones cannot be proven to be correct. However, the fact that they form a reasonable family is meaningful. In Fig. 5 for example it should be noted that although the final equilibrium temperature is increased by at most 300°K when the flow is turbulent, between $s = 10^3$, the increase can be near 1000°K . This hotter wake could then lead to significantly more radiation. Using the data of these figures, it is possible to calculate the absolute magnitude of the radiation for the different assumed situations. Such results would be more sensitive to the turbulence than the temperature variations.

Figs. 8 through 10 give similar results for the case where the sphere nose radius is $1/2$ inch. It can be shown that if the correlations neglected in Eqs. 42 to 49 were included in the calculations, higher temperatures would ensue.

6. CONCLUDING REMARKS

From the foregoing results it can be said that turbulent chemical reacting flows under the conditions studied can lead to flow fields, which at any given station are of a higher temperature than without turbulence. The fact that, in hypervelocity wakes, the mean values of the turbulent correlations can be large, leads to the possibility of significant effects, although we have not proven this with all the necessary rigor. The surface has just been scratched and much work remains to be done.



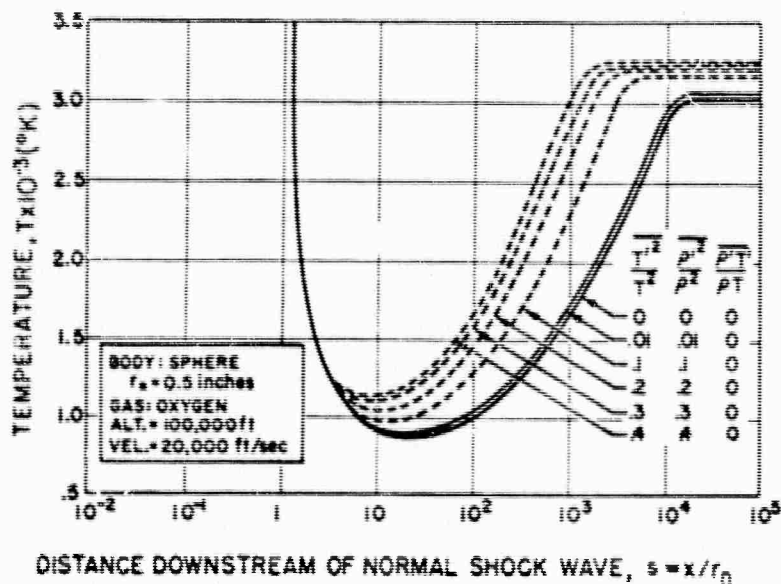


FIG. 9

ATOM MASS FRACTION DISTRIBUTION ON AXIAL STREAMLINE. SPHERE OF 0.5 INCH RADIUS.

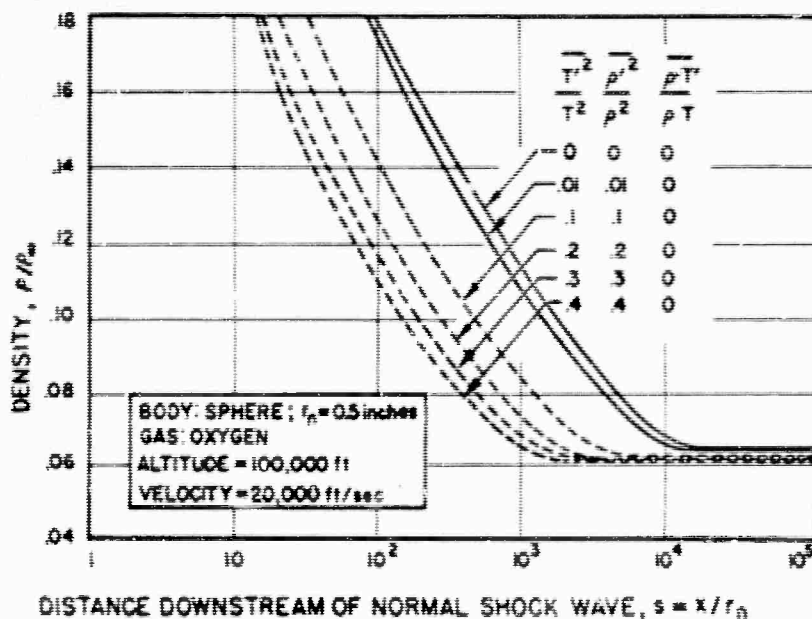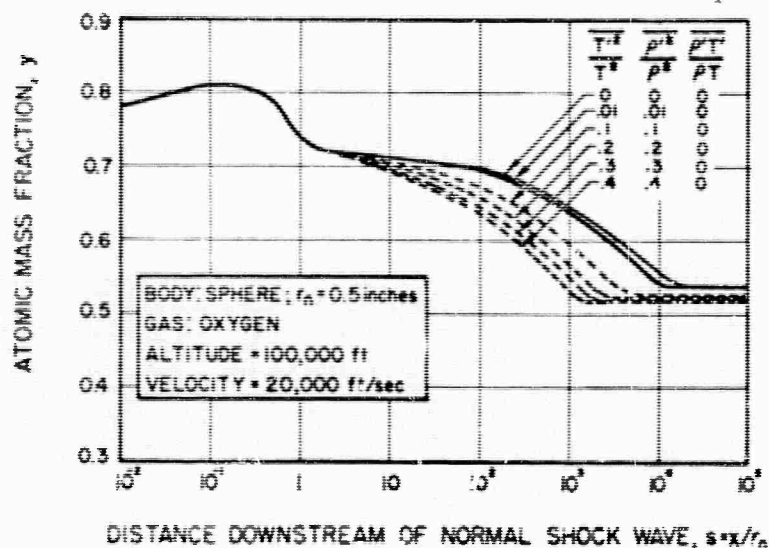

References

1. Feldman, S., "On Trails of Axisymmetric Hypersonic Blunt Bodies Flying Through the Atmosphere", J. Aerospace Sci., 28, 433-499, 1961.
2. Goulard, R. and Goulard, M., "The Aerothermodynamics of Reentry Trails", Presented at ARS Semi-annual Meeting, Los Angeles, May 9-12, 1960.
3. Lees, L. and Hromas, L., "Turbulent Diffusion in the Wake of a Blunt-Nosed Body at Hypersonic Speeds", Space Technology Laboratories, Inc., Aerodynamics Department Report No. 50, July, 1961, Los Angeles, California.
4. Slattery, R. E. and Clay, W. G., "Experimental Measurement of Turbulence, Transition, Motion, Statistics, and Gross Radial Growth Behind Hypervelocity Objects", Lincoln Laboratory, Massachusetts Institute of Technology; To be published.
5. Van Driest, E. R., "Turbulent Boundary Layer in Compressible Fluids", J. Aerospace Sci., 18, 145-161, 1951.
6. Wray, Kurt L., "Chemical Kinetics of High Temperature Air", ARS International Hypersonic Conference, Aug. 16-18, 1961, M.I.T., Cambridge, Massachusetts.
7. Kistler, Alan L., "Fluctuation Measurements in a Supersonic Turbulent Boundary Layer", Physics of Fluids, 2, 290-296, 1959.
8. Willmarth, W. W., "Statistical Properties of the Pressure Field in a Turbulent Boundary Layer", Conference on Acoustical Fatigue, Annandale, Minn., Sept. 29 - Oct. 2, 1959. Also USAF, WADC TR 59-676, 109-127, March, 1961.
9. Klebanoff, P. S., "NACA TN 3178", Washington, 1954. Also see Hinze, J. O., "Turbulence", McGraw-Hill Book Co., Inc. New York, p.488.
10. Townsend, A. A., "The Structure of Turbulent Shear Flow", Cambridge University Press, 1956, p. 179.
11. Corrsin, S. and Uberoi, M. S., "Further Experiments on the Flow and Heat Transfer in a Heated Turbulent Jet", NACA TN 1865, Washington, April, 1949.
12. Demetriades, A., "Some Hot-Wire Anemometer Measurements in a Hypersonic Wake", Proceedings of the 1961 Heat Transfer and Fluid Mechanics Institute, Stanford University Press, pp. 1-9.

References (cont'd)

13. Private Communication
14. Mueller, J. N., Close, W. H., and Henderson, A., "An Investigation of Induced Pressure Phenomena on Axially Symmetric, Flow-Aligned, Cylindrical Models Equipped with Different Nose Shapes at Free-Stream Mach Numbers from 15.6 to 21 in Helium", NASA TN D-373 Washington, May, 1960.
15. Wagner, R. D., "Some Aspects of the Modified Newtonian and Prandtl-Heyer Expansion Method for Axisymmetric Blunt Bodies at Zero Angle of Attack", Inst. of Aerospace Sci., 26, 851-852, 1959.

DISTRIBUTION LIST

Research on Base Flow and Wakes

ELECTRO-OPTICAL SYSTEMS, INC.

U.S. Army Ordnance Tech. Intel. Agency Arlington Hall Station Arlington 12, Virginia ATTN: ORDLI	1	Commanding Officer U.S. Army Signal R and D Laboratory Fort Monmouth, New Jersey ATTN: SIGRA/SL-ENP	1
Commanding General Army Ballistic Missile Agency Redstone Arsenal, Alabama ATTN: Technical Documents Library	1	Commanding Officer U.S. Army Signal Missile Support Agency ATTN: SIGWS-MM-1 White Sands Missile Range, New Mexico	1
Commanding Officer USA SMSA, ATTN: MEW White Sands Missile Range, New Mexico	1	Department of Army Office Chief of Ordnance ATTN: ORDTU Technical Section Pentagon Washington 25, D.C.	1
ASD (ASRNRS-3) Wright-Patterson AFB, Ohio ATTN: Mr. A. M. Prettyman	1	Air Force Cambridge Research Laboratories Scientific Library, CRREL, Stop 29 Laurence G. Hanscom Field Bedford, Massachusetts	1
RADC (RALS) Griffiss Air Force Base, New York	1	HQ BSD (AFSC) AF Unit Post Office Los Angeles 45, California ATTN: BSRVD	1
Aeronutronic ATTN: L. H. Linder, Manager Technical Information Services Ford Road Newport Beach, California	1	Aerojet-General Corporation P.O. Box 296 Azusa, California ATTN: Technical Library	1
Armour Research Foundation Fluids Dynamics and Propulsion Research Division Hydro-Dynamics Section 10 West 35th Street Chicago 16, Illinois	1	Aerospace Corp 2400 E. El Segundo Blvd. El Segundo, California ATTN: Manager of Penetration Aids	2
Bendix Systems Division Flight Sciences Department Ann Arbor, Michigan	1	Ballistic Research Laboratories Aberdeen Proving Ground, Maryland ATTN: C. H. Murphy	1
Barnes Engineering Company 30 Commerce Road Stamford, Connecticut ATTN: H. W. Yates	1	Commanding Officer Ballistics Research Laboratories ATTN: Dr. B. J. Karpov Aberdeen Proving Ground, Maryland	1

DISTRIBUTION LIST - Research on Base Flow and Wakes (cont)

Cornell Aeronautical Laboratory, Inc. P.O. Box 235 Buffalo 21, New York ATTN: Dr. G. A. R. Graham, Assistant Head, Applied Physics Department 1	Cornell Aeronautical Laboratory, Inc. P.O. Box 235 Buffalo 21, New York ATTN: Dr. W. H. Wurster, Aerodynamic Research Department 1
Convair A Division of General Dynamics Corp. San Diego Division San Diego 12, California ATTN: Mr. K. G. Blair, Chief Librarian Mail Zone 6-157, for A. Green 1	Central Intelligence Agency 2430 E. Street N.W. ATTN: OCR Standard Distribution Washington 25, D.C. 3
Commanding Officer Diamond Ordnance Fuze Laboratories Washington 25, D.C. ATTN: ORDTL 012 1	Geophysics Corporation of America Burlington Road Bedford, Massachusetts 1
General Electric Company, MSVD Documents Library Re-Entry Physics Library Unit 3198 Chestnut Street Room 3446 Philadelphia 1, Pa. ATTN: Mr. Lawrence I. Chaseen Manager-MSVD Library 1	Jet Propulsion Laboratory 4800 Oak Grove Drive Pasadena, California ATTN: Library 1
Laboratories for Applied Sciences University of Chicago Museum of Science and Industry Chicago 37, Illinois ATTN: Library, E-190 1	Commander, U.S. Naval Ordnance Laboratory White Oak, Silver Spring, Maryland ATTN: Eva Liberman, Librarian 1
Applied Physics Laboratory ATTN: Mr. A. C. Schultheis 8621 Georgia Avenue Silver Spring, Maryland 1	Lincoln Laboratory P.O. Box 73 Lexington 73, Massachusetts ATTN: Dr. Pippert, Group 312 Electromagnetics 1
Director, U.S. Naval Research Laboratory ATTN: Code 2027 Washington 25, D.C. 1	Chief of Naval Operations Department of the Navy ATTN: OP-07T10 Washington 25, D.C. 1
The RAND Corporation 1700 Main Street Santa Monica, California ATTN: Library (Aero-Astronautics) 1	The RAND Corporation 1700 Main Street Santa Monica, California ATTN: Library (Electronics) 1
	Radio Corporation of America Missile and Surface Radar Division Moorestown, New Jersey ATTN: Mr. Ralph W. Barnes, Bldg. 108-113 1

DISTRIBUTION LIST - Research on Base Flow and Wakes (cont)

Stanford Research Institute Communication and Propagation Laboratory Menlo Park, California ATTN: Mr. Ray L. Leadabrand, Head Propagation Group	2	Sylvania Electronic Systems Applied Research Laboratory 100 First Avenue Waltham, Massachusetts ATTN: R. V. Row	1
Space Technology Laboratories 2400 E. El Segundo Blvd. El Segundo, California ATTN: Mr. Jack Maxey	1	The Warner and Swasey Company Control Instrument Division 32-16 Downing Street Flushing 54, New York	1
Institute of Science and Technology The University of Michigan P.O. Box 618 Ann Arbor, Michigan ATTN: BAMIRAC Library	1	Canadian Armament Research and Development Establishment ATTN: U.S. Army Liaison Officer P.O. Box 1427 Quebec, P.Q. Canada	1
Brown Engineering Company, Inc. Huntsville, Alabama - P.O. Box 917 ATTN: Techn. Library	1	Commander Army Rocket and Guided Missile Agency Redstone Arsenal, Alabama ATTN: Technical Library	1
AVCO-Everett Research Laboratory 2385 Revere Beach Parkway Everett 49, Massachusetts	1	Battelle Memorial Institute 505 King Avenue Columbus, Ohio ATTN: Battelle-Defender	1
Commanding Officer Army Rocket and Guided Missile Agency ATTN: ORDXR-RMR Redstone Arsenal, Alabama	1	Bell Telephone Laboratories ATTN: C. E. Paul Whippany, New Jersey	1
Bell Telephone Laboratories ATTN: C. W. Hoover Whippany, New Jersey	1	Bell Telephone Laboratories ATTN: John McCarthy Whippany, New Jersey	1