

AD 609449

NOLTR 64-146

INITIATION OF EXPLOSIVES BY EXPLODING
WIRES

V. EFFECT OF WIRE MATERIAL ON THE
INITIATION OF PETN BY EXPLODING WIRES

2	3	R
WIRE	\$2.00	
MICROFICHE	\$0.50	

49P

NOL

26 OCTOBER 1964

UNITED STATES NAVAL ORDNANCE LABORATORY, WHITE OAK, MARYLAND

NOLTR 64-146

ARCHIVE COPY

INITIATION OF EXPLOSIVES BY EXPLODING WIRES
V. EFFECT OF WIRE MATERIAL ON THE INITIATION
OF PETN BY EXPLODING WIRES

By Howard S. Leopold

ABSTRACT: Aluminum, gold, platinum, and tungsten wires were investigated to determine the effect of the wire material on the initiation of PETN by exploding wires. The wires were exploded by a one microfarad capacitor charged to 2000 volts. The results indicate that favorable wire materials are those into which energy is deposited at a rapid rate. They also have low boiling points and low heats of vaporization. Heat of oxidation of the wire material plays only a minor role. Different wire materials have different optimum lengths for effecting detonation.

PUBLISHED DECEMBER 1064

EXPLOSION DYNAMICS DIVISION
EXPLOSIONS RESEARCH DEPARTMENT
U. S. NAVAL ORDNANCE LABORATORY
WHITE OAK, MARYLAND

NOLTR 64-146

26 October 1964


INITIATION OF EXPLOSIVES BY EXPLODING WIRES
V. EFFECT OF WIRE MATERIAL ON THE INITIATION OF PETN
BY EXPLODING WIRES

This report is Part V of an investigation concerning the initiation of explosives by exploding wires. The work was performed under Task RUME-4E000/212-1/F008-11, Problem No. 019, Analysis of Explosive Initiation.

The results should be of interest to personnel engaged in initiation research and design of exploding bridgewire ordnance systems. The data and conclusions are for information only and are not intended as a basis for action.

The identification of commercial materials implies no criticism or endorsement of these products by the Naval Ordnance Laboratory.

R. E. ODENING
Captain, USN
Commander



C. J. ARONSON
By direction

CONTENTS

	Page
INTRODUCTION	1
ELECTRICAL CIRCUITRY	1
TEST PROCEDURE	2
EXPERIMENTAL RESULTS	2
DISCUSSION	4
CONCLUSION	6
REFERENCES	8

ILLUSTRATIONS

Figure		Page
1	Test Circuit	9
2	Current Waveforms for Various Lengths of 2-Mil Diameter Gold Wire	10
3	Current Waveforms for Various Lengths of 2-Mil Diameter Aluminum Wire	11
4	Current Waveforms for Various Lengths of 2-Mil Diameter Platinum Wire	12
5	Current Waveforms for Various Lengths of 2-Mil Diameter Tungsten Wire	13
6	Voltage Waveforms for Various Lengths of 2-Mil Diameter Gold Wire	14
7	Voltage Waveforms for Various Lengths of 2-Mil Diameter Aluminum Wire	15
8	Voltage Waveforms for Various Lengths of 2-Mil Diameter Platinum Wire	16
9	Voltage Waveforms for Various Lengths of 2-Mil Diameter Tungsten Wire	17
10	Resistance as a Function of Time for Various Lengths of 2-Mil Diameter Gold Wire	18
11	Resistance as a Function of Time for Various Lengths of 2-Mil Diameter Aluminum Wire	19
12	Resistance as a Function of Time for Various Lengths of 2-Mil Diameter Platinum Wire	20
13	Resistance as a Function of Time for Various Lengths of 2-Mil Diameter Tungsten Wire	21

ILLUSTRATIONS (Cont'd)

Figure		Page
14	Power Input vs Time for Various Lengths of 2-Mil Diameter Gold Wire	22
15	Power Input vs Time for Various Lengths of 2-Mil Diameter Aluminum Wire	23
16	Power Input vs Time for Various Lengths of 2-Mil Diameter Platinum Wire	24
17	Power Input vs Time for Various Lengths of 2-Mil Diameter Tungsten Wire	25
18	Peak Power and Peak Power per unit Length as a Function of Wire Length	26
19	Energy Deposition vs Time for Various Length Gold Wires	27
20	Energy Deposition vs Time for Various Length Aluminum Wires	28
21	Energy Deposition vs Time for Various Length Platinum Wires	29
22	Energy Deposition vs Time for Various Length Tungsten Wires	30
23	Energy Deposition Profiles for Various Length Gold Wires	31
24	Energy Deposition Profiles for Various Length Aluminum Wires	32
25	Energy Deposition Profiles for Various Length Platinum Wires	33
26	Energy Deposition Profiles for Various Length Tungsten Wires	34
27	Energy Density at Burst and One Microsecond After Burst as a Function of Wire Length	35
28	Plasma Expansion in Air for Different Wire Materials	36
29	Smear Camera Record and Oscillogram for 0.200-inch Length Gold Wire	37

Tables

Table		Page
1.	Effect of Bridgewire Length (Gold, 2-Mil Diameter) on Detonation of PETN at Various Loading Densities	38
2.	Effect of Bridgewire Length (Aluminum, 2-Mil Diameter) on Detonation of PETN at Various Loading Densities	39
3.	Effect of Bridgewire Length (Platinum, 2-Mil Diameter) on Detonation of PETN at Various Loading Densities	40
4.	Effect of Bridgewire Length (Tungsten, 2-Mil Diameter) on Detonation of PETN at Various Loading Densities	41

INTRODUCTION

1. This report is the fifth in a series describing experimental results obtained from an investigation on exploding bridgewires. Previous investigations^{1,2,3,4} have shown that the firing circuit inductance and resistance should be kept to practical minimums, that there is an optimum bridgewire diameter for effecting detonation of PETN when the bridgewire length and circuit parameters are fixed, that there is an optimum bridgewire length when the bridgewire diameter and circuit parameters are fixed.

2. This phase of the investigation was concerned with determining the effect of the wire material on the growth of explosion of PETN. The choice of the wire material in an EBW will depend on both practical considerations and on the intrinsic properties of the wire material. Practical considerations would include mechanical strength, ease of attachment and corrosion resistance. Intrinsic properties of importance might include specific resistance, thermal coefficient of resistivity, density, specific heat, melting point, heat of fusion, boiling point, and heat of vaporization. The importance of the intrinsic properties was not known. Platinum was used to start the investigation because it was known that platinum would meet the practical considerations. Platinum, tungsten, and nickel-chromium alloy are mentioned as desirable wire materials in U. S. Patent 3,040,660, which appears to be the original patent on exploding bridgewire initiators.* In this report aluminum, gold, and tungsten wires are compared to platinum for their ability to detonate PETN.

ELECTRICAL CIRCUITRY

A typical exploding bridgewire firing circuit used in ordnance consists of a one microfarad capacitor charged to 2000 volts. The energy in the capacitor is discharged into the wire through a switch. The test circuit used for this investigation is shown in Figure 1. It is similar to the previous test circuits described in the earlier reports. The electrical parameters for the test circuit are:

$$\begin{aligned} C &= 0.97 \text{ microfarad} \\ L &= 0.58 \text{ microhenry} \\ R &= 0.35 \text{ ohm} \\ V_0 &= 2000 \text{ volts} \end{aligned}$$

* U. S. Patent 3,040,660 by Lawrence H. Johnston, Patented June 26, 1962, Filed Nov. 8, 1944.

The methods used for determining the circuit parameters are given in Reference 1 and 2.

TEST PROCEDURE

Various lengths of the four bridgewire materials tested were compared for their ability to detonate PETN. A 2-mil diameter wire was used for each material. The four wire materials were examined in a series of test shots with wire lengths ranging from 0.0125 to 0.400 inch. The probability of detonating PETN was gradually decreased in each series, by increasing the loading density of the PETN. This approach eliminated the necessity for changes in the electrical parameters. This method was used to determine the most advantageous wire material and its optimum length. The test fixture and experimental methods described in Reference 1, were used for observing the growth of explosion.

Current and voltage waveforms were examined to help interpret the experimental results. The voltage was corrected for the inductive component, and the corrected voltage used to calculate the derived resistance, power, and energy values. The vigor of the plasma expansion of the four bridgewire materials when flush mounted was also examined with a high speed smear camera.

EXPERIMENTAL RESULTS

An examination of Tables 1, 2, 3, and 4 shows, that based on the ability to detonate PETN under increasingly difficult conditions, gold is the best of the materials tested. Aluminum, platinum, and tungsten followed in that order. The tables also indicate the optimum wire length for detonating PETN for each material. These optimum lengths are as follows:

Gold	-	0.075
Aluminum	-	0.075
Platinum	-	0.050
Tungsten	-	0.025

They are indicated by a black dot in the figures. Various electrical and physical attributes of the different wire materials were then examined.

Examination of the current waveforms in Figures 2, 3, 4, and 5 show the shorter wires, to have the highest current density at time of burst. The shorter the wire, the more nearly contiguous the resurge is with the initial current pulse. For all four materials 0.200 inch and longer lengths give definite current dwells. Platinum and tungsten show wider burst current dispersions for the various length wires than aluminum or gold.

Comparison of Figures 6, 7, 8, and 9 show gold to have the highest peak voltage of the four materials, followed by aluminum, platinum, and tungsten. The highest peak voltage was observed with the 0.400 inch length gold wire (not plotted). This wire had a peak voltage of approximately 6700 volts, or over three times the original capacitor voltage. A gold wire length of 0.075 inch, which appears to be the optimum length for effecting detonation, gives a peak voltage of 3600 volts. These voltages are indicative of the extreme voltage that the electrical insulation must be capable of handling using the experimental parameters of a one microfarad capacitor charged to 2000 volts. Examination of the voltage waveforms in Figures 8 and 9 show that platinum and tungsten wires give definite vaporization plateaus. The waveforms for tungsten show a peculiar dip in the vaporization plateau.

The resistance curves for aluminum and gold, Figures 10 and 11, show a fairly smooth rapid rise of the wire resistance with time. The longer the wire, the higher the peak resistance for the range tested. The resistance curves for platinum and tungsten, Figures 12 and 13, show a definite resistance plateau before the peak resistance is reached. The resistance of tungsten decreases during the first half of the vaporization plateau. The dynamic resistance values for the four test materials do not differ greatly for comparative lengths.

A comparison of the power curves in Figures 14, 15, 16, and 17 reveals that in general energy is deposited most rapidly in gold followed by aluminum, platinum, and tungsten. The peak power spikes are much narrower for aluminum and gold than for platinum and tungsten. For all four materials the peak power per unit length increases with decreasing length. See Figure 18. The highest peak power value is observed to occur at a length which is longer than the optimum length for effecting detonation.

If the energy deposition is examined, Figures 19, 20, 21, and 22, one observes with all four materials that energy deposition is initially slightly faster with the longer wires. This is due to the higher initial resistance of the bridgewire. The optimum length for each material absorbs approximately one joule of energy or slightly more than 50% of the energy originally stored in the capacitor. Energy deposition into the longer wires effectively stops with the onset of a definite dwell. For all four materials, the shorter wires received more energy than necessary for complete vaporization at a time of burst. It was possible to vaporize longer wires of aluminum and gold than of platinum or tungsten under comparable conditions of diameter and electrical input.

The results also confirm previous observations that the wire does not have to completely vaporize at burst to effect detonation. Figures 23, 24, 25, and 26 show the energy profiles for selected times during the normal period of importance. Comparison of the energy density on a volume basis in Figure 27 shows that the shorter lengths have a higher energy density.

The plasma expansion in air of each of the four materials was examined for the 75-mil length. Figure 28 is a distance-time plot of the plasma expansion. Aluminum and gold give the most vigorous expansions, indistinguishable in strength, followed by platinum, and then tungsten. The vigor of the plasma expansion appears to be related to the excess energy deposited above that required for vaporization.

The 0.200 inch length gold wire gave a different type of growth to detonation than previously observed. Figure 29 shows that there is a definite prolongation of the reaction before the detonation wave is apparent photographically. The incipient conditions necessary for formation of a detonation wave are evidently established in the period up to time of burst since electrical energy input ceases at burst with the formation of a definite dwell period. Detonation commenced 1.35 to 1.40 microseconds after burst approximately 1.6 mm from the wire. Normally, detonation was seen to commence approximately 1.0 microsecond after burst about 1.0 mm from the wire. The initial reaction does not emit light of sufficient intensity to register on the film even with the use of maximum exposure conditions.

DISCUSSION

The investigation shows that the intrinsic properties of the wire material play an important role in determining whether or not detonation is effected. Russian investigators^{5,6} in the mid 1950's found that certain groups of wire materials had similar characteristics. Silver, gold, aluminum, and copper wire oscillograms were found to have marked similarities. Iron, tungsten, molybdenum, and platinum had analogous oscillograms with different characteristics from the first group. Webb et al⁷ have proposed that the wire materials can be classified into two phenomenological categories:

- Class I low boiling point, low heat of vaporization
- Class II high boiling point, high heat of vaporization

Aluminum and gold, which fall into Class I, were found to effect detonation in PETN under more unfavorable conditions

than platinum or tungsten, which are Class II materials. It appears that for the parameter magnitudes used, the heat capacity effect of the wire material is important. The use of wire materials with low boiling points and heats of vaporization will result in a greater energy transfer to the explosive. It is, however, conceivable for special cases, that Class II materials might be preferable for initiators where a higher firing energy threshold is desired.

The ability to effect detonation under increasingly unfavorable conditions appears to depend not only on the heat capacity effect of the wire, but upon the rate of energy deposition. Scherrer⁸ has shown, assuming the exploding wire is a blackbody, that

$$T = \left(\frac{P}{\sigma A} \right)^{1/4}$$


where T = wire temperature in °K, P = electrical power into wire in watts, σ = Stefan-Boltzman constant, and A = area of wire exploding surface.

Since the explosive decomposition has an Arrhenius dependence upon temperature, conditions favoring a high temperature will be more favorable for effecting detonation. The peak power levels for the Class I materials (aluminum, gold) were observed to be higher than those of the Class II materials (platinum, tungsten) over most of the bridgewire length range tested. The power level appears to be related to the energy needed for vaporization since materials with a relatively high energy requirement possess a definite vaporization plateau which in effect lowers the power input before bridgewire burst. The slight superiority of gold over aluminum is believed due to the higher rate of energy deposition in gold even though less energy is required to vaporize the aluminum.

It was previously observed with platinum wire that there was an optimum platinum bridgewire length for effecting detonation in PETN. The aluminum, gold, and tungsten results confirm that an optimum bridgewire length exists. The optimum length varies with the wire material. Materials from Class II appear to have shorter optimum lengths than those from Class I. This can be partially attributed to the heat capacity of the wire material.

Explosions of gold and platinum in air produce an aerosol which consists of metallic rather than oxide particles.⁹ Aluminum and tungsten wires form oxides upon explosion. However, each is the poorer material in its respective class in effecting detonation in PETN. This indicates that heat

of oxidation plays a relatively minor role, if any. Assuming the eventual formation of Al_2O_3 , aluminum has a high heat of oxidation amounting, for a 0.075-inch length wire, to approximately 20% of the electrical energy deposition. However, it has been reported that Al_2O_3 apparently does not exist in the vapor state.¹⁰ The oxidation of aluminum in the gaseous phase is assumed to occur according to the following reaction:¹¹



High pressures will tend to force the reaction to the right, but high temperature will reverse the reaction. It is quite probable the high temperature effect predominates during the wire explosion, delaying the eventual heat of oxidation contribution.

With gold wire, growth to detonation can occur even with cessation of the electrical energy input just after the time of wire burst. The wire length (0.200 inch) giving this effect fails quickly as PETN density is increased. Previously it had been found with certain platinum wires, that a sustained electrical input after burst was favorable for the growth of detonation and that wires with current pulse cessation failed to effect detonation. This illustrates the more favorable qualities of a Class I material. This phenomenon will be investigated further. Experiments are also continuing on the wire material effect. Different wire materials are being evaluated to observe if they conform to the extrapolations made from the first four materials described in this report.

The vigor of the plasma expansion in air seems to correlate well with the ability to detonate PETN. As shown earlier, the vigor of the plasma expansion appears to be related to the excess energy deposited above that required for vaporization. This excess energy will go into further heating of the vapor, shock, and kinetic energy forms resulting in a greater energy transfer to the explosive and the envelopment of a greater number of PETN crystals.

CONCLUSION

1. The existence of an optimum wire material for effecting detonation is highly dependent upon a low energy requirement for complete vaporization. This appears to be related also to the rate of energy deposition since materials with relatively high energy requirement exhibit lower peak powers.

2. Different wire materials have different optimum lengths for effecting detonation. Aluminum and gold (Class I) have longer optimum lengths than platinum and tungsten (Class II).

3. Aluminum and gold (Class I) give more vigorous explosions than platinum or tungsten (Class II).

4. Heat of oxidation of the wire material appears to play a relatively minor role in effecting detonation.

REFERENCES

1. Leopold, H., "Initiation of Explosives by Exploding Wires. I Effect of Circuit Inductance on the Initiation of PETN by Exploding Wires," NOLTR 63-159.
2. Leopold, H., "Initiation of Explosives by Exploding Wires. II Effect of Circuit Resistance on the Initiation of PETN by Exploding Wires," NOLTR 63-244.
3. Leopold, H., "Initiation of Explosives by Exploding Wires. III Effect of Wire Diameter on the Initiation of PETN by Exploding Wires," NOLTR 64-2.
4. Leopold, H., "Initiation of Explosives by Exploding Wires. IV Effect of Wire Length on the Initiation of PETN by Exploding Wires," NOLTR 64-61.
5. Bondarenko, V. V., Kvartskhavo, I. F., Pliutto, A. A., and Chernov, A. A., "Resistance of Metals at High Current Densities," Soviet Physics JETP 1, No. 2, Sept. 1955.
6. Kvartskhavo, I. F., Pliutto, A. A., Chernov, A. A., and Bondarenko, V. V., "Electrical Explosion of Metal Wires," Soviet Physics JETP 3, No. 1, Aug. 1956.
7. Webb, F. H., Jr., Hilton, H. H., Levine, P. H., Tollestrup, A. V., "The Electrical and Optical Properties of Rapidly Exploded Wires," Vol II, W. G. Chace and H. K. Moore (eds.), Plenum Press, New York, 1962, p. 37.
8. Scherrer, V. E., "The NRL-AFSWP Exploded Wire Research Program," Vol I, W. G. Chace and H. K. Moore (eds.), Plenum Press, New York, 1959, p. 118.
9. Karioris, F. G., Fish, B. R., and Royster, G. W., Jr., "Aerosols from Exploding Wires," Vol II, W. G. Chace and H. K. Moore (eds.), Plenum Press, New York, 1962, p. 299.
10. Cook, M. A., Filler, A. S., Keyes, R. T., Partridge, W. W., and Ursenbach, W. O., "Aluminized Explosives," J. Phys. Chem., 61, 189 (1957).
11. Conway, J., "The Thermodynamics of the Oxidation of Aluminum at High Temperature," Third Progress Report on Office of Naval Research High Temperature Project (Contract N9-onr-87300), Research Institute of Temple University, Dec. 1950.

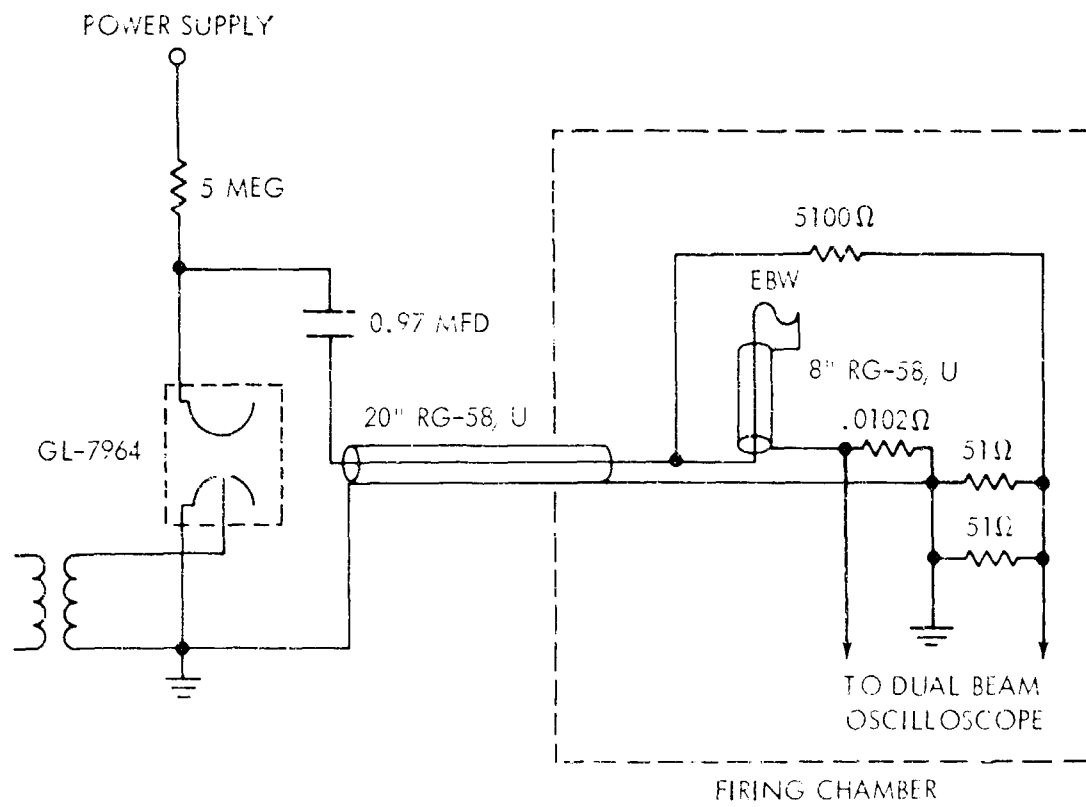


FIG. 1 TEST CIRCUIT

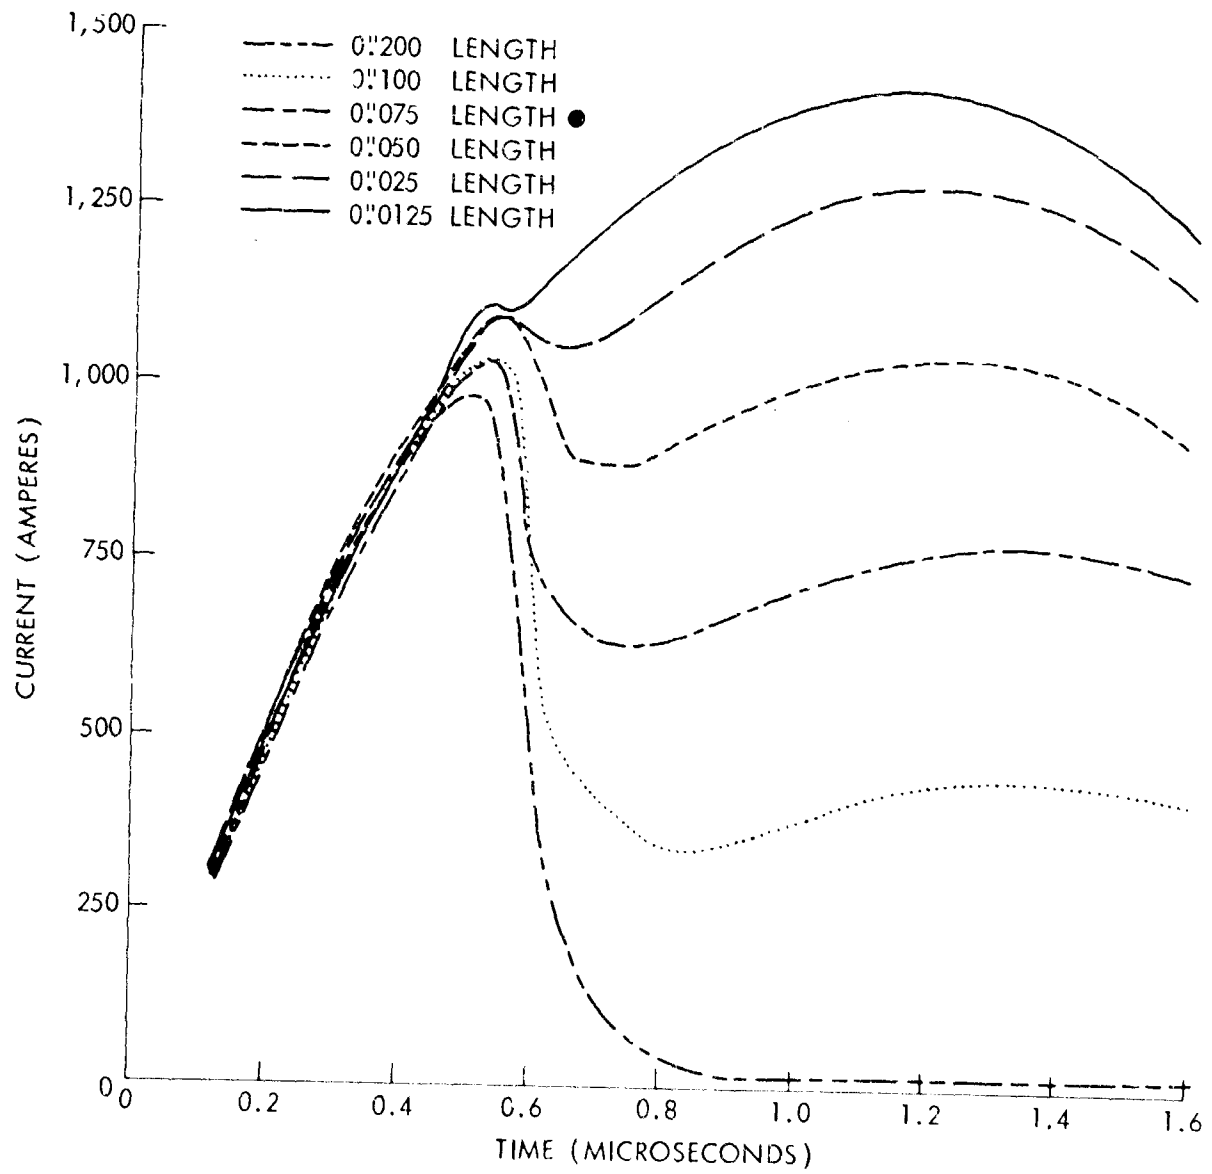


FIG. 2 CURRENT WAVEFORMS FOR VARIOUS LENGTHS OF 2-MIL DIAMETER GOLD WIRE

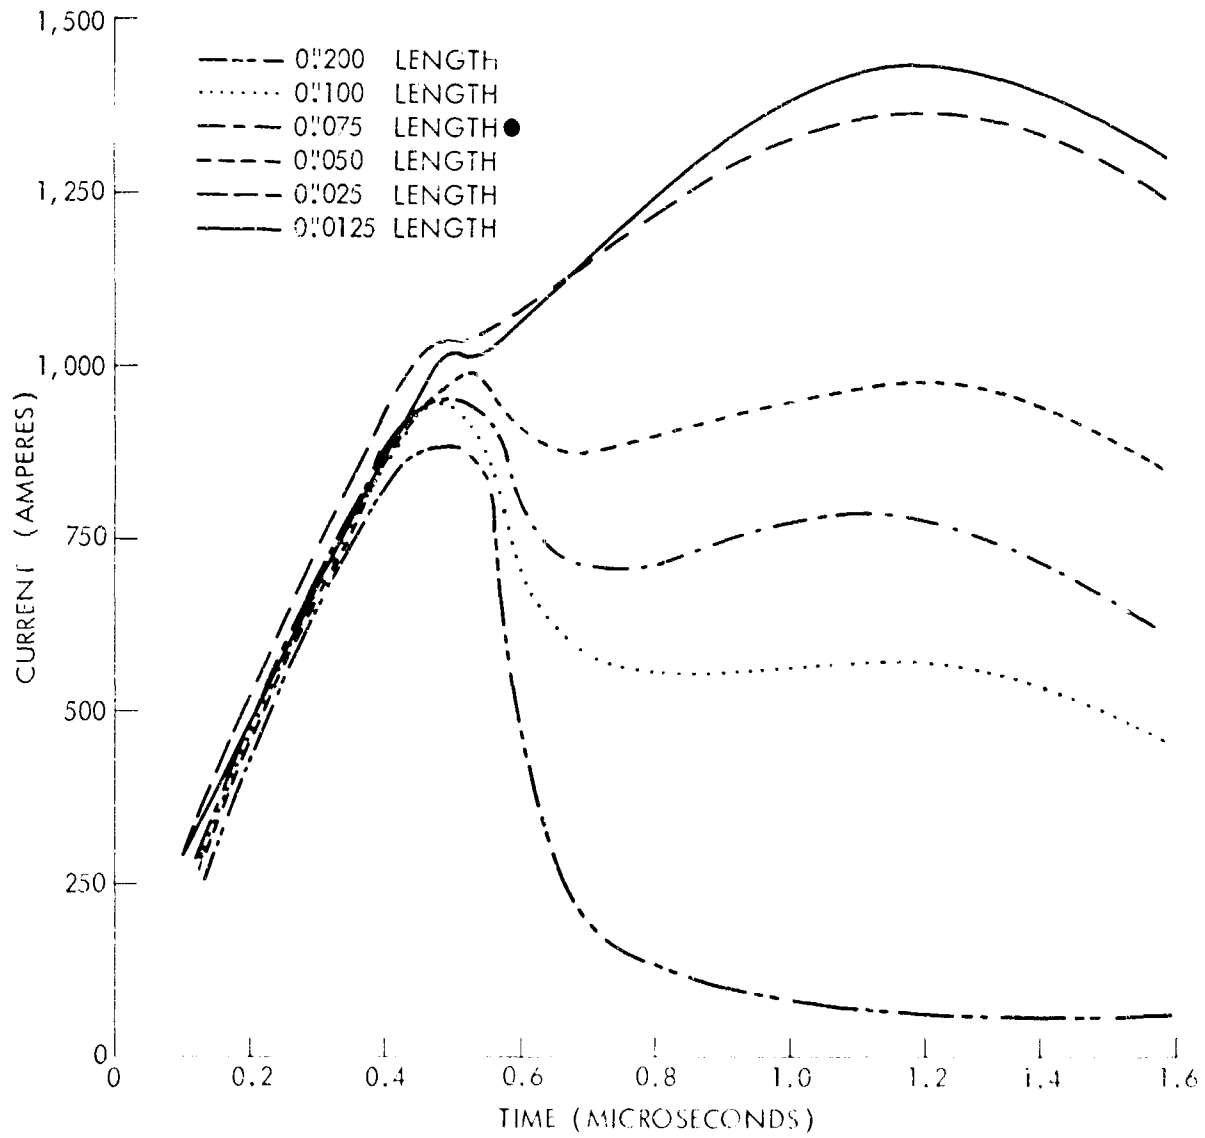


FIG. 3 CURRENT WAVEFORMS FOR VARIOUS LENGTHS OF 2-MIL DIAMETER ALUMINUM WIRE

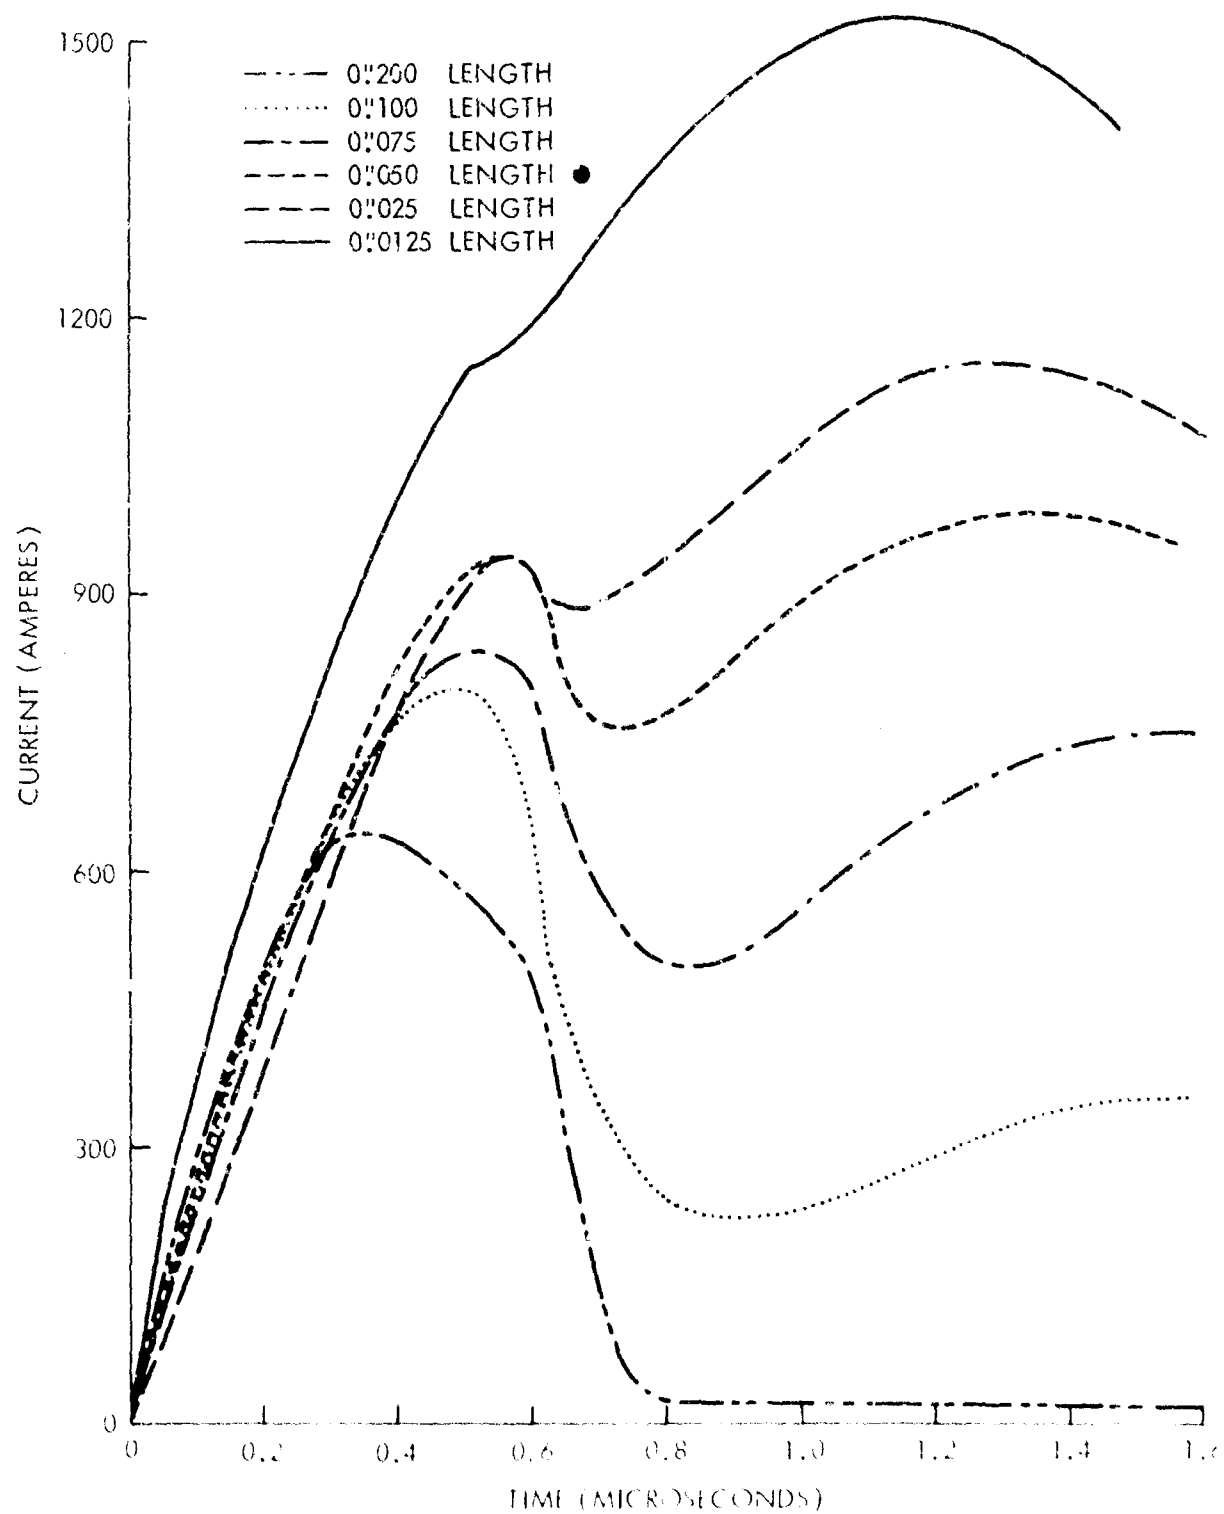


FIG. 4 CURRENT WAVEFORMS FOR VARIOUS LENGTHS OF 2-MIL DIAMETER PLATINUM WIRE

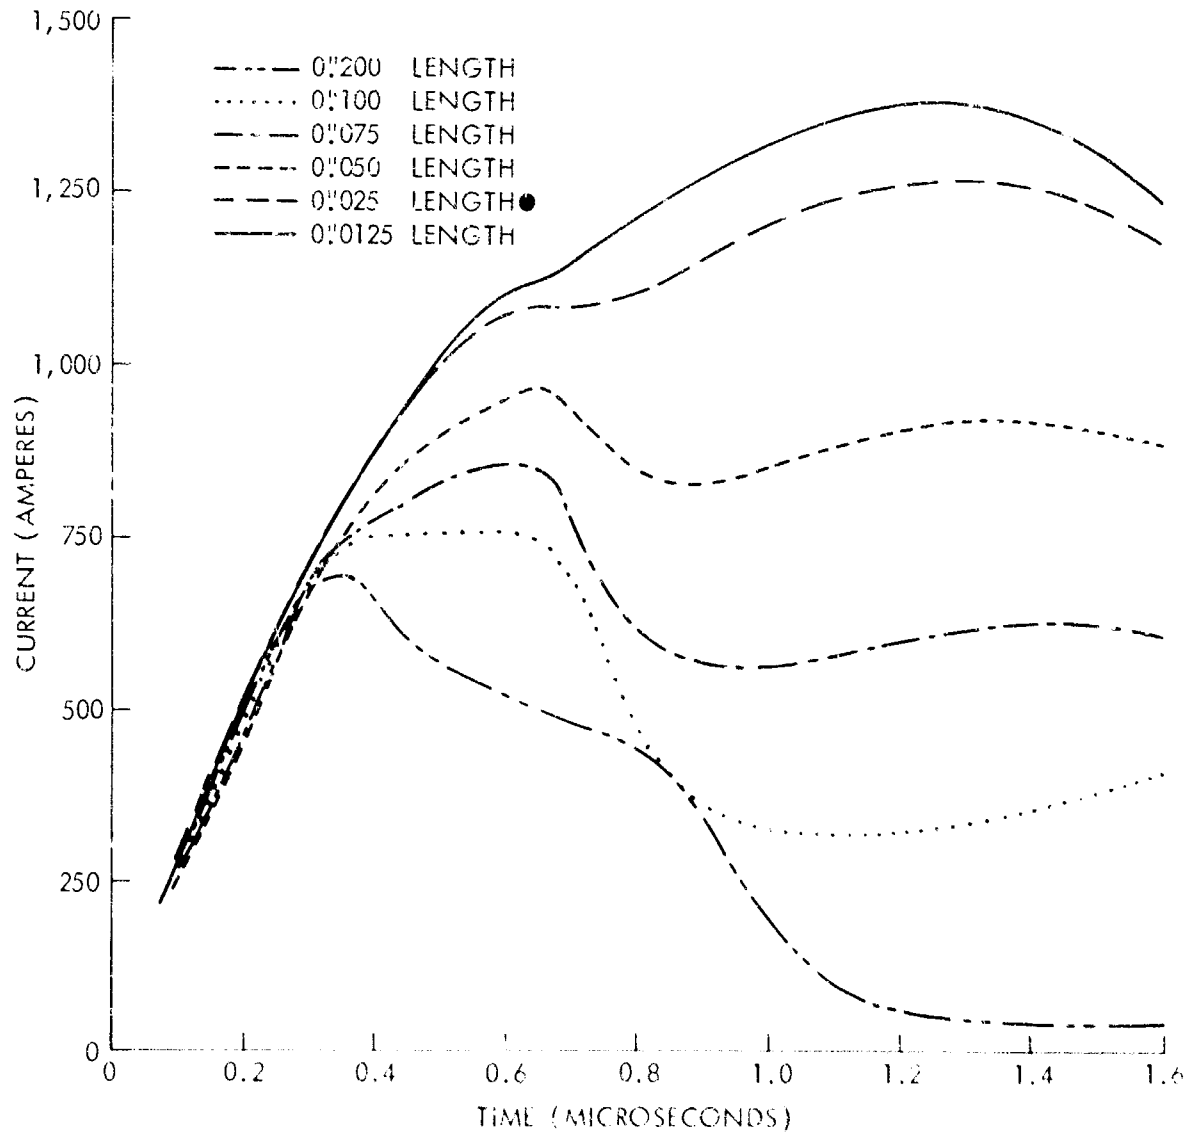


FIG. 5 CURRENT WAVEFORMS FOR VARIOUS LENGTHS OF 2-MIL DIAMETER TUNGSTEN WIRE

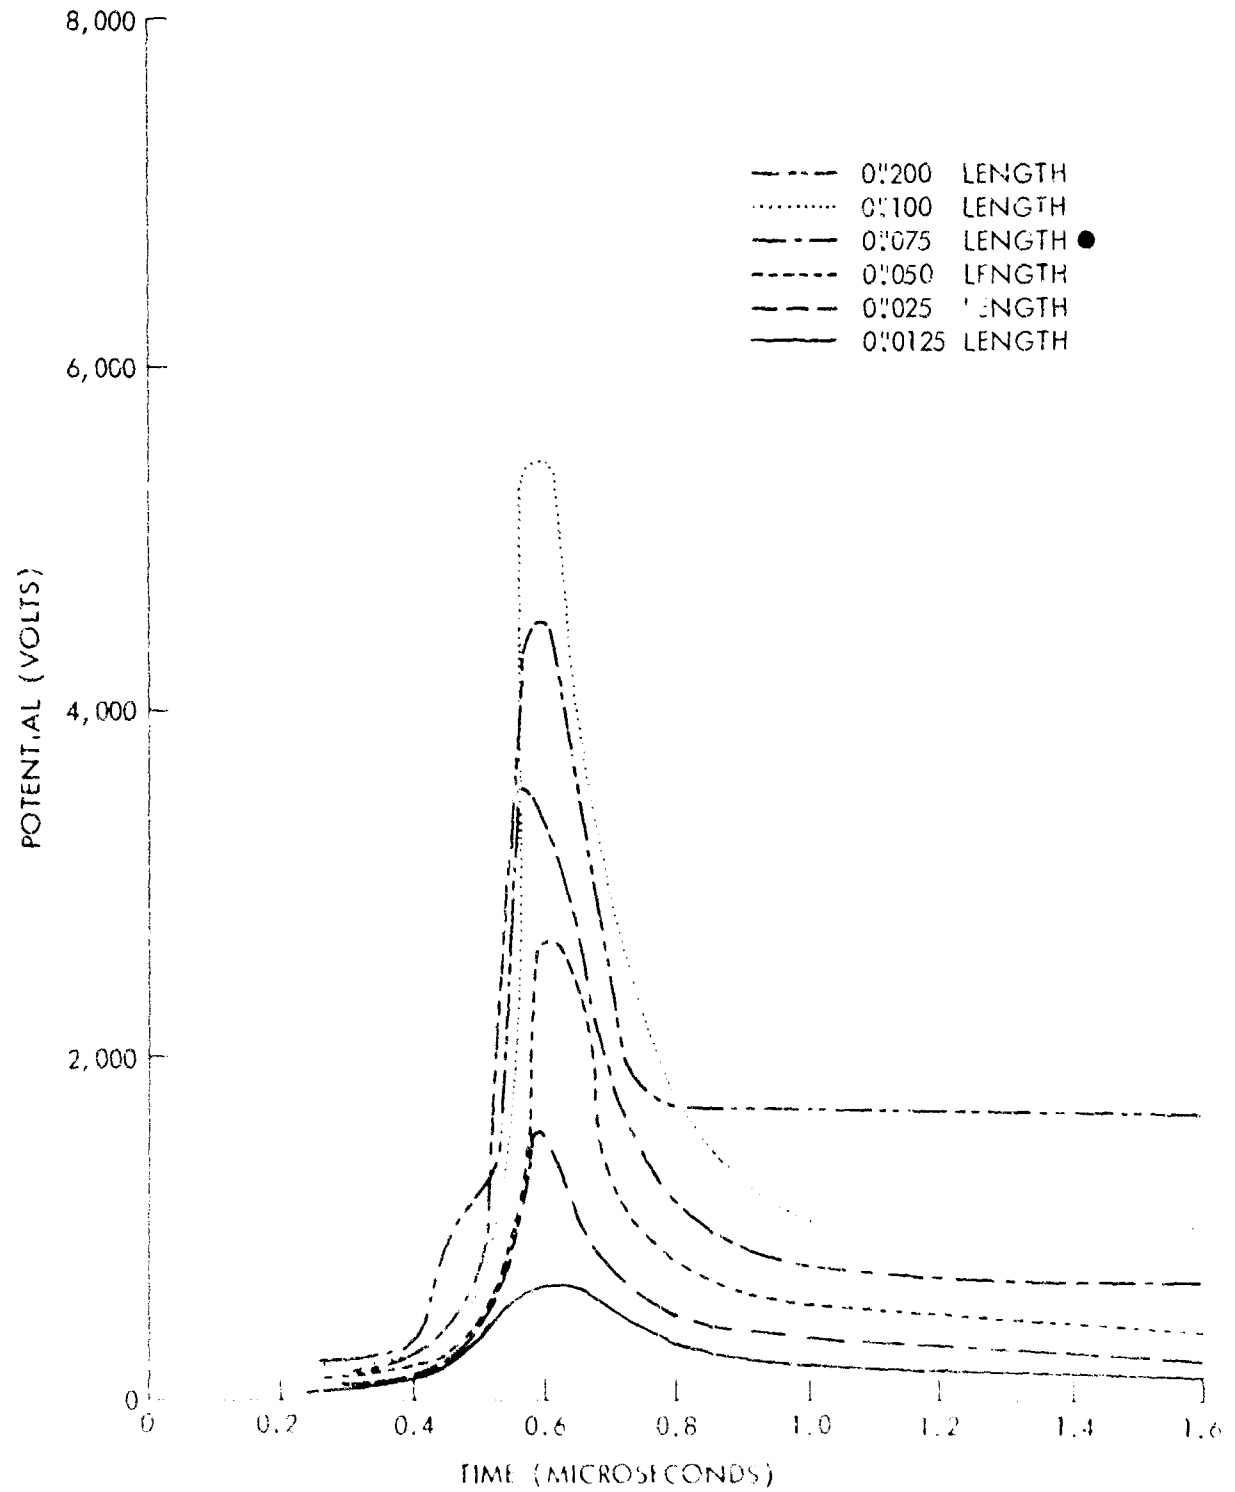


FIG. 6 VOLTAGE WAVEFORMS FOR VARIOUS LENGTH OF 2-MIL DIAMETER GOLD WIRE

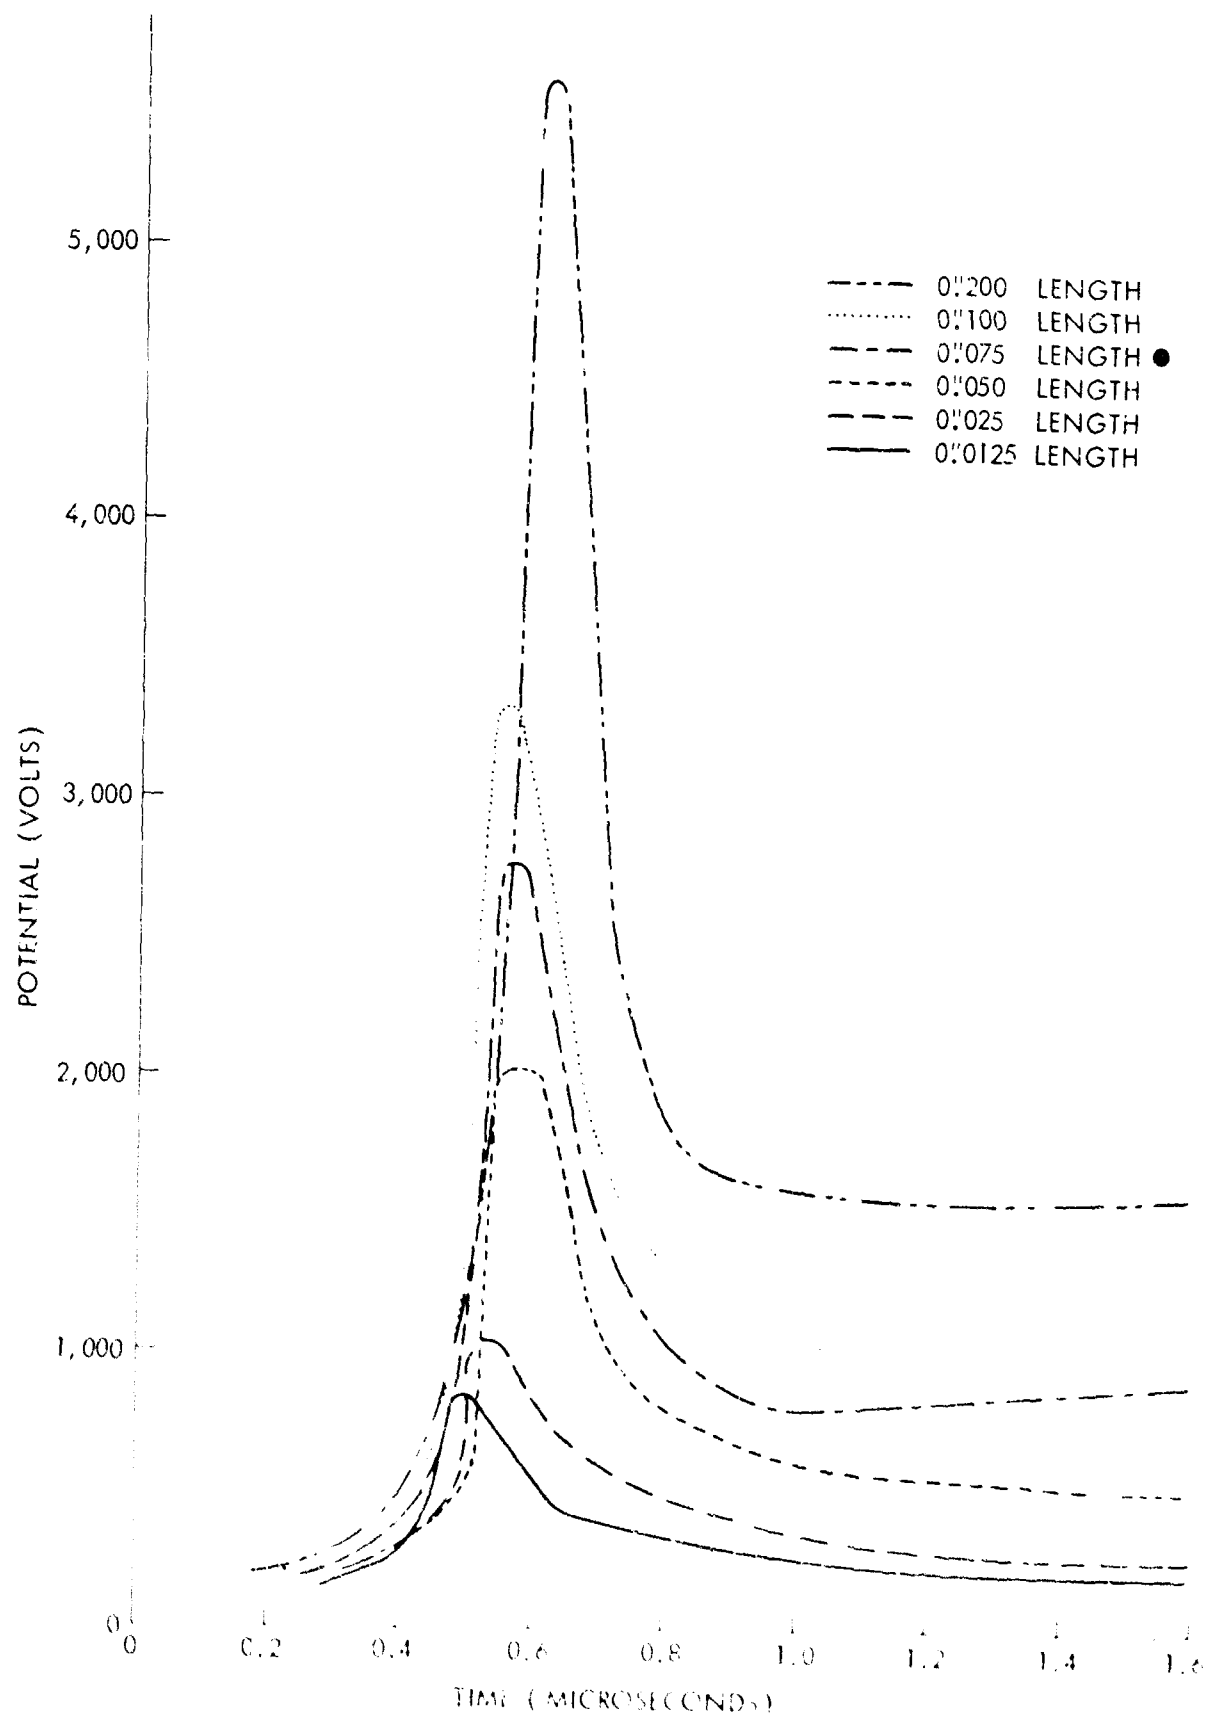


FIG. 7 VOLTAGE WAVEFORMS FOR VARIOUS LENGTHS OF 2-MIL DIAMETER ALUMINUM WIRE

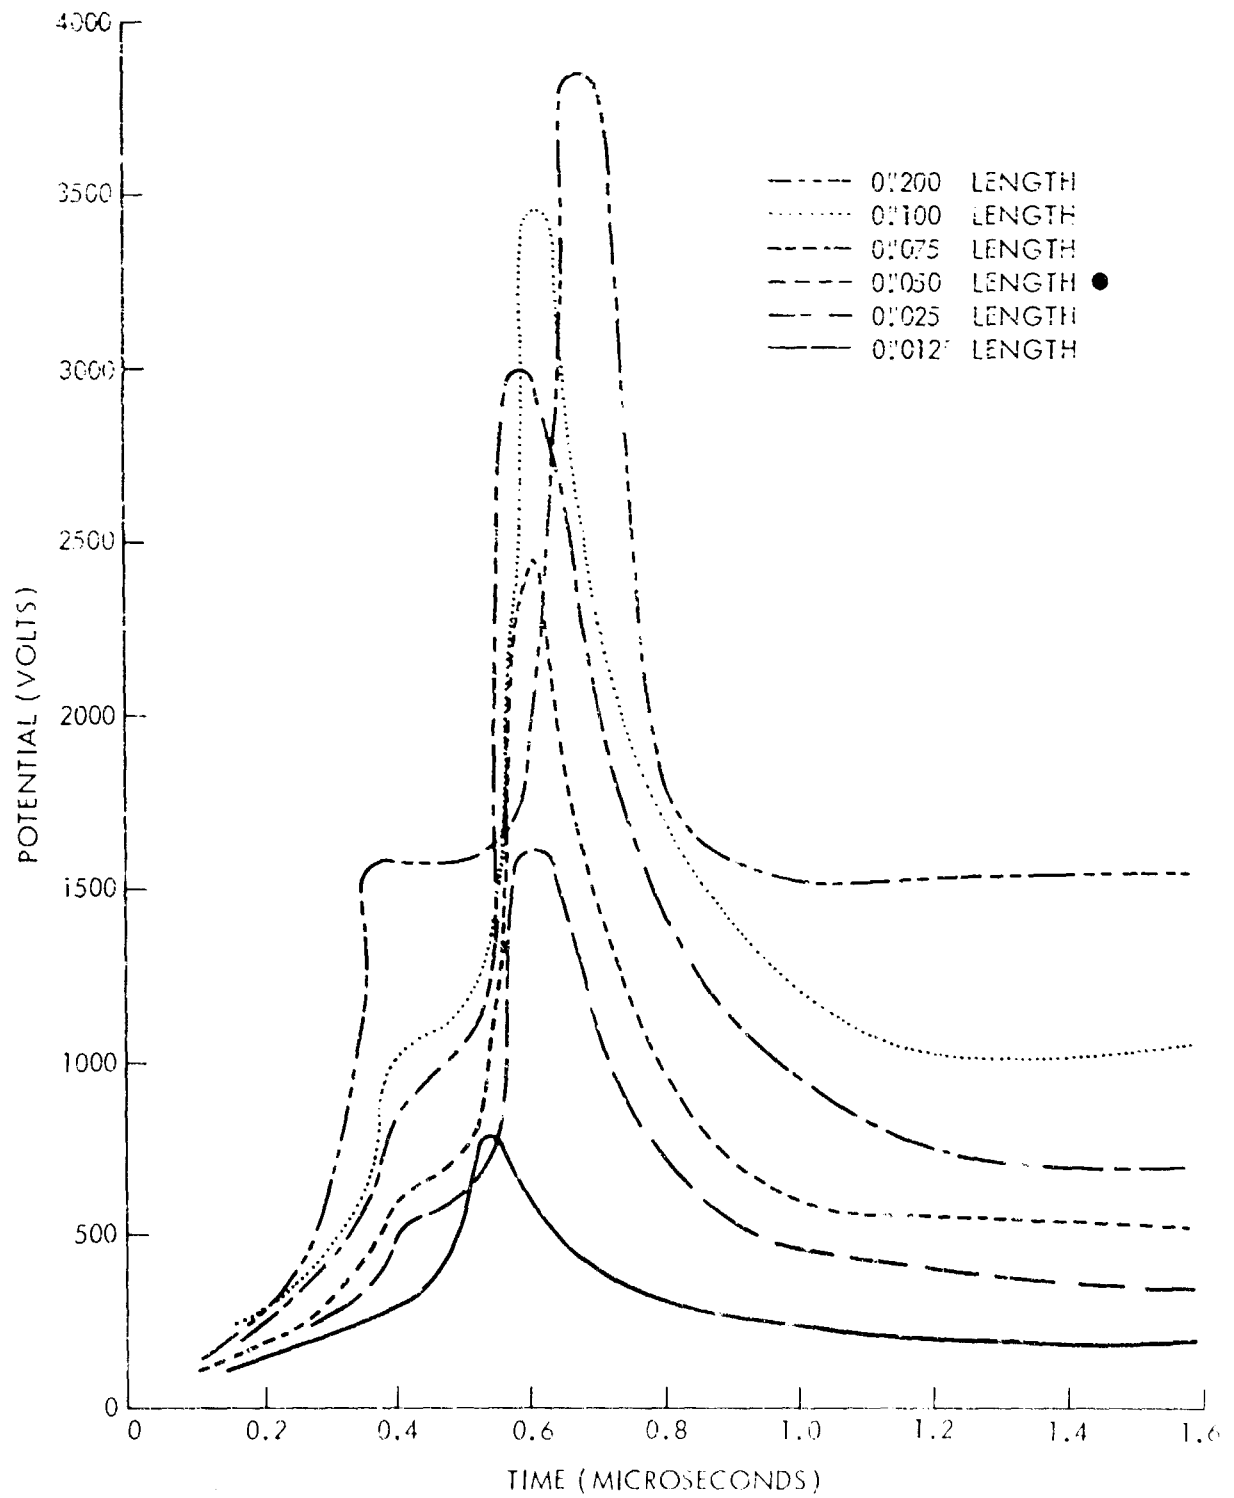


FIG. 8 VOLTAGE WAVEFORMS FOR VARIOUS LENGTHS OF 2-MIL DIAMETER PLATINUM WIRE

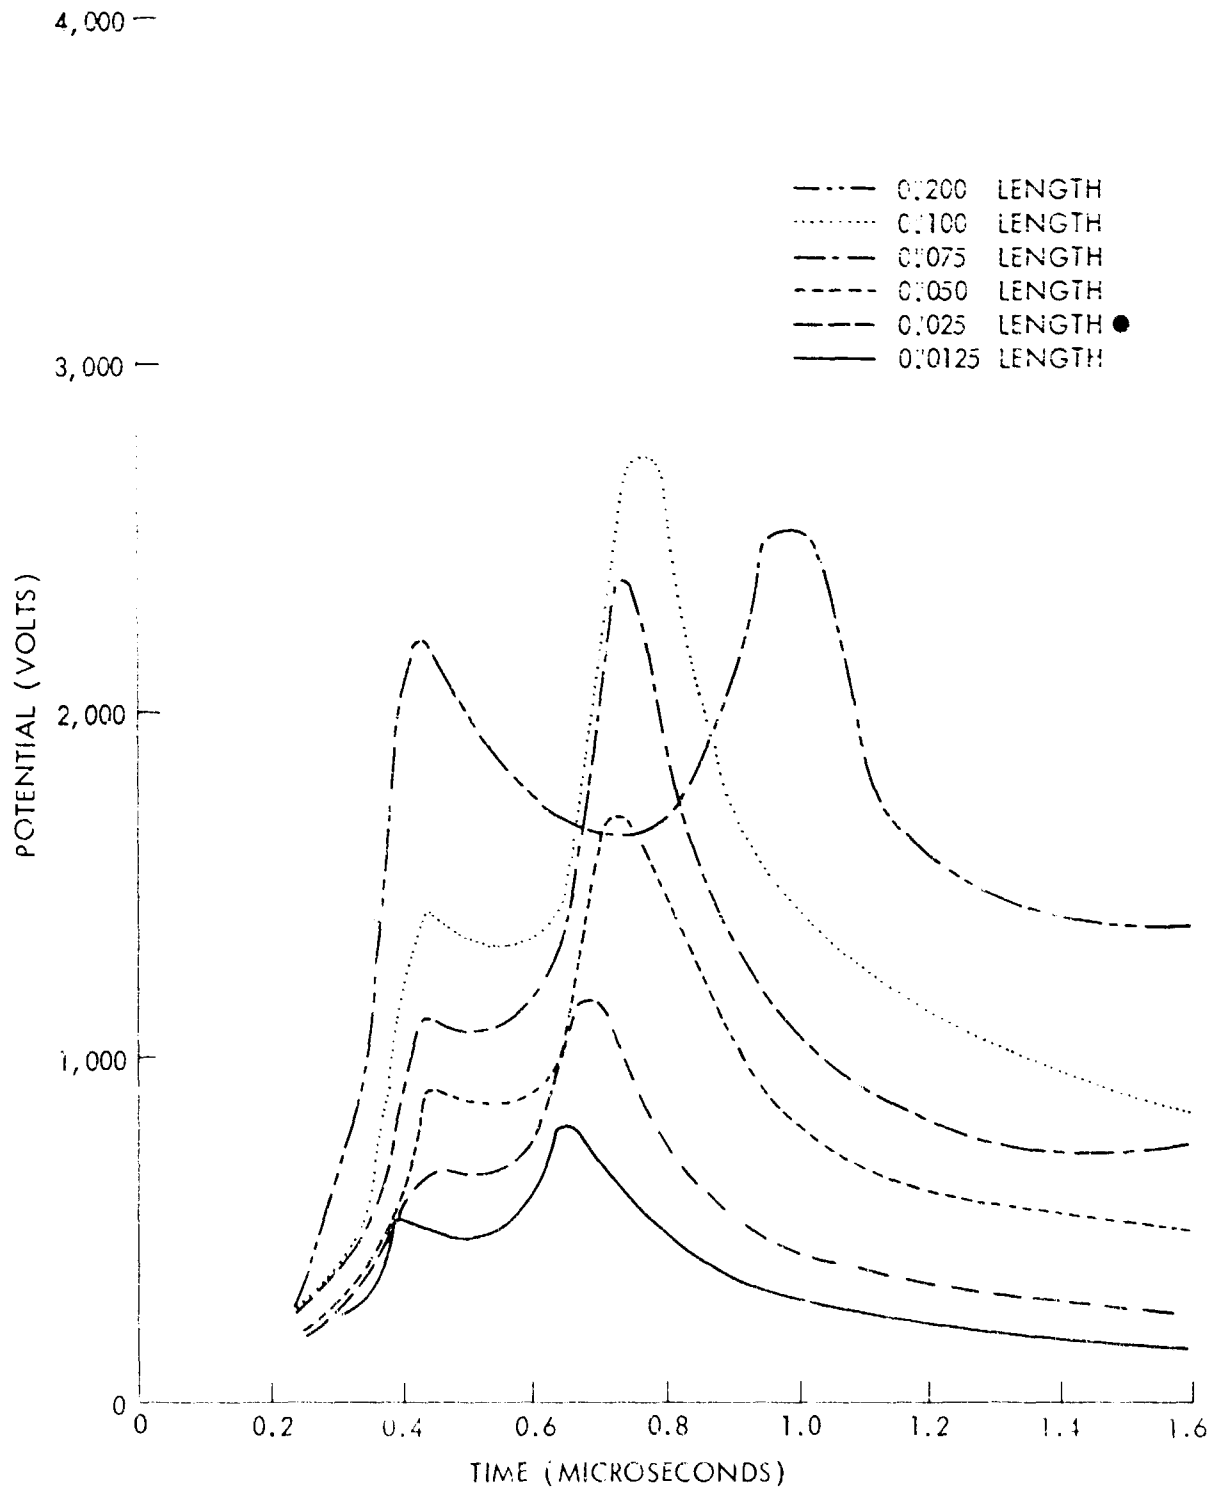


FIG. 9 VOLTAGE WAVEFORMS FOR VARIOUS LENGTHS OF 2-MIL. DIAMETER TUNGSTEN WIRE

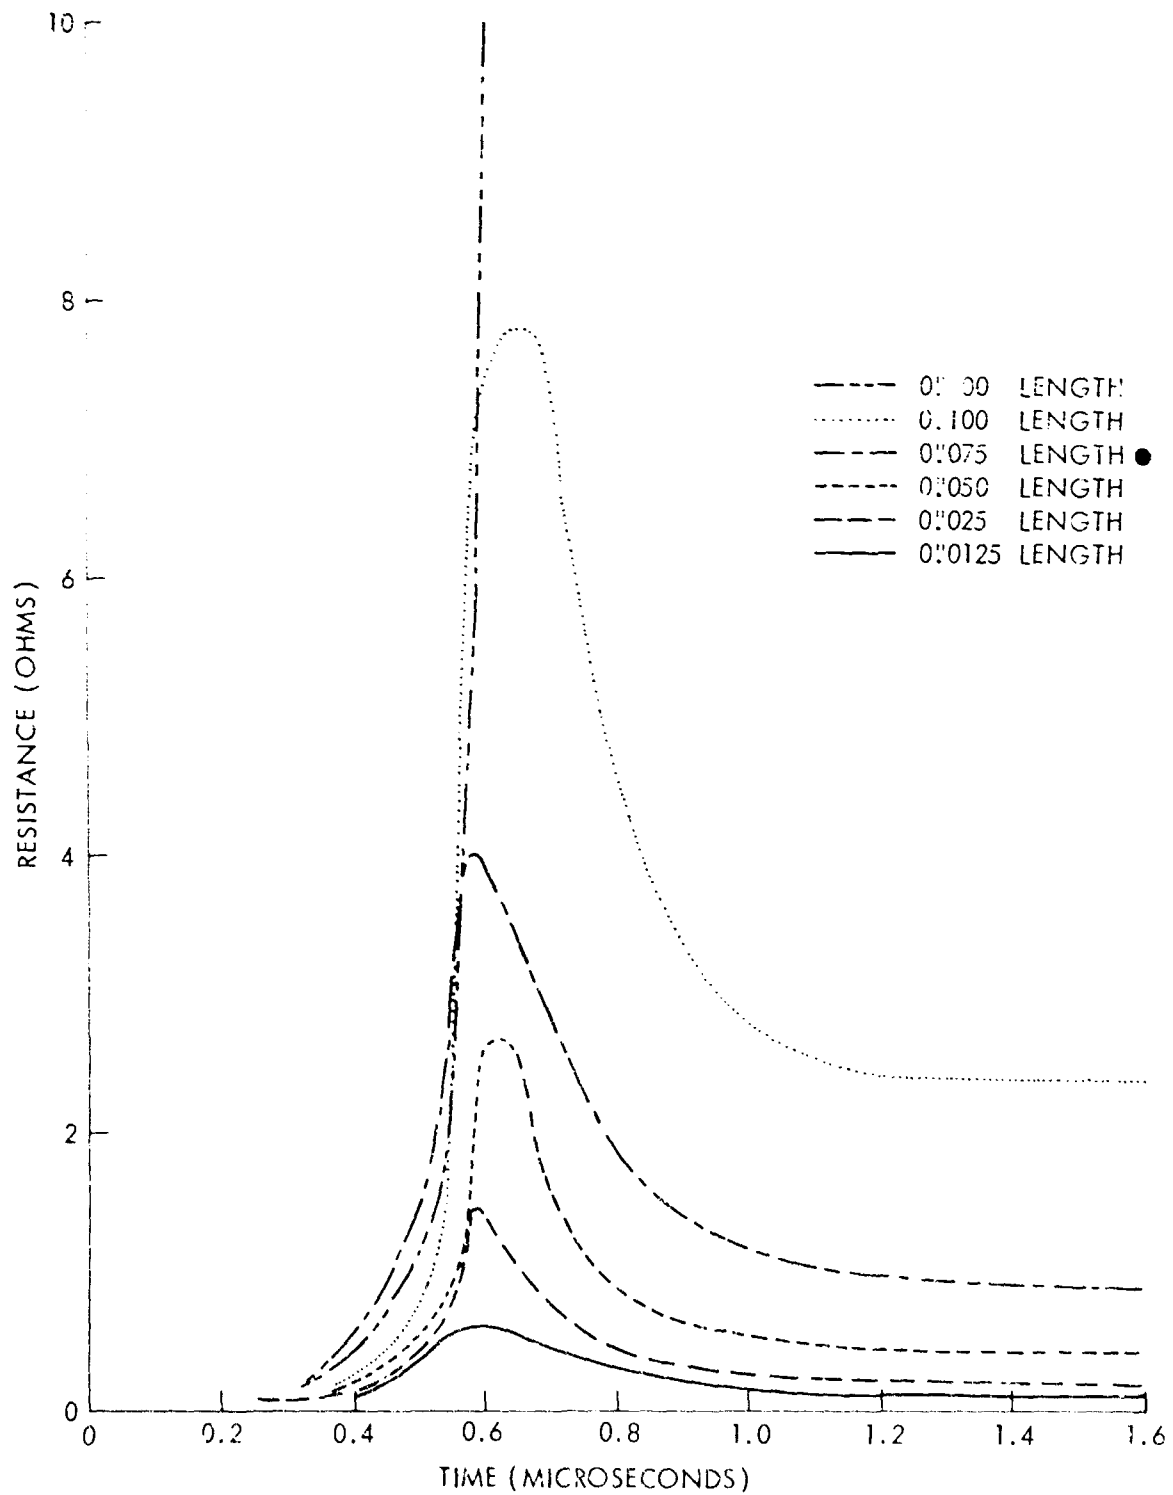


FIG. 10 RESISTANCE AS A FUNCTION OF TIME FOR VARIOUS LENGTHS OF 2-MIL DIAMETER GOLD WIRE

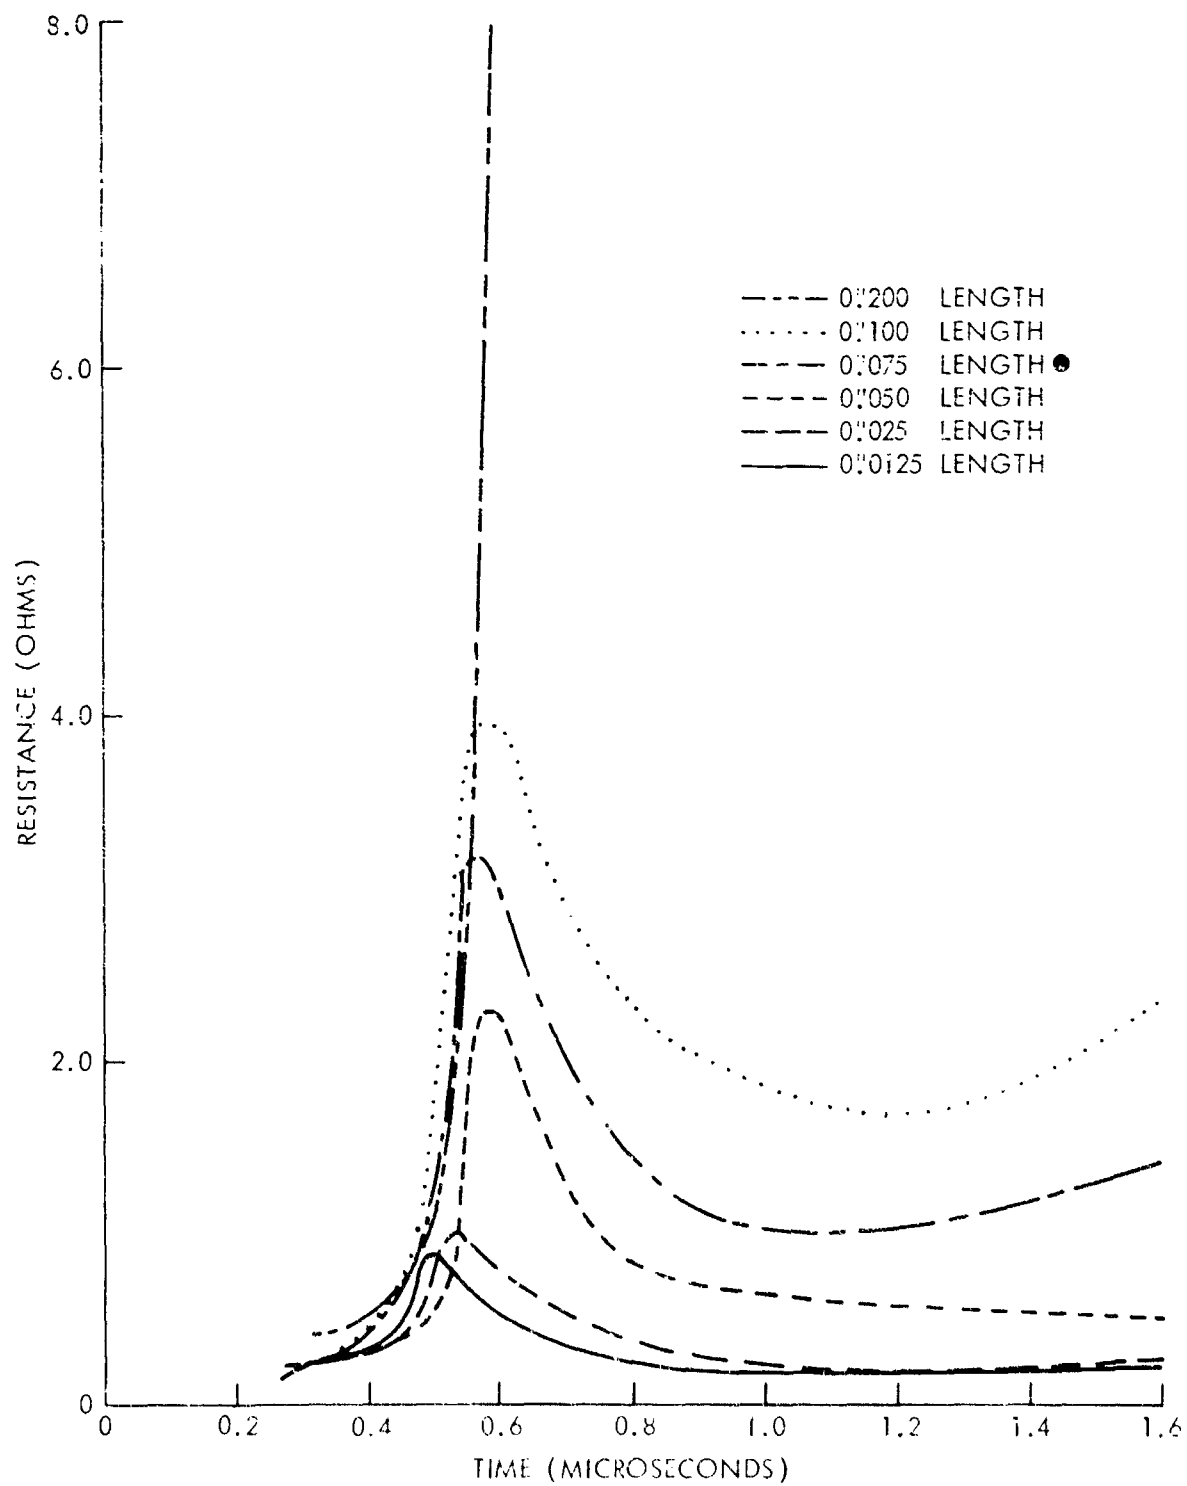


FIG. 11 RESISTANCE AS A FUNCTION OF TIME FOR VARIOUS LENGTHS OF 2-MIL DIAMETER ALUMINUM WIRE

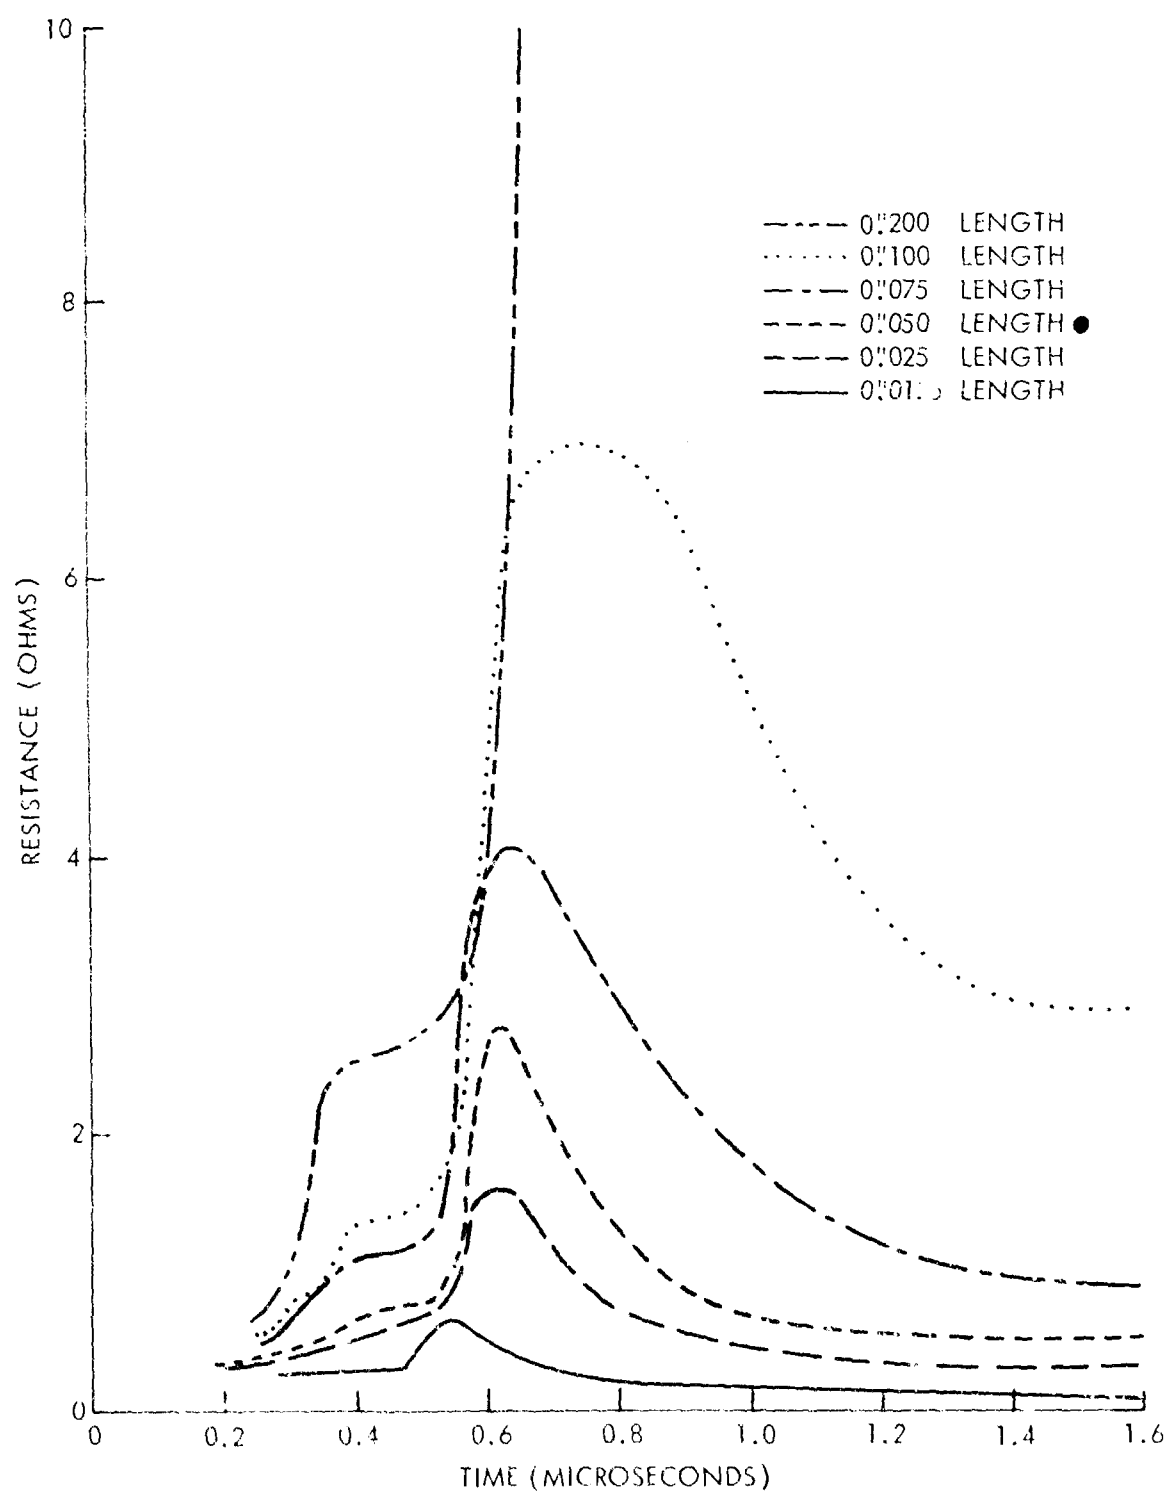


FIG. 12 RESISTANCE AS A FUNCTION OF TIME FOR VARIOUS LENGTHS OF 2-MIL DIAMETER PLATINUM WIRE

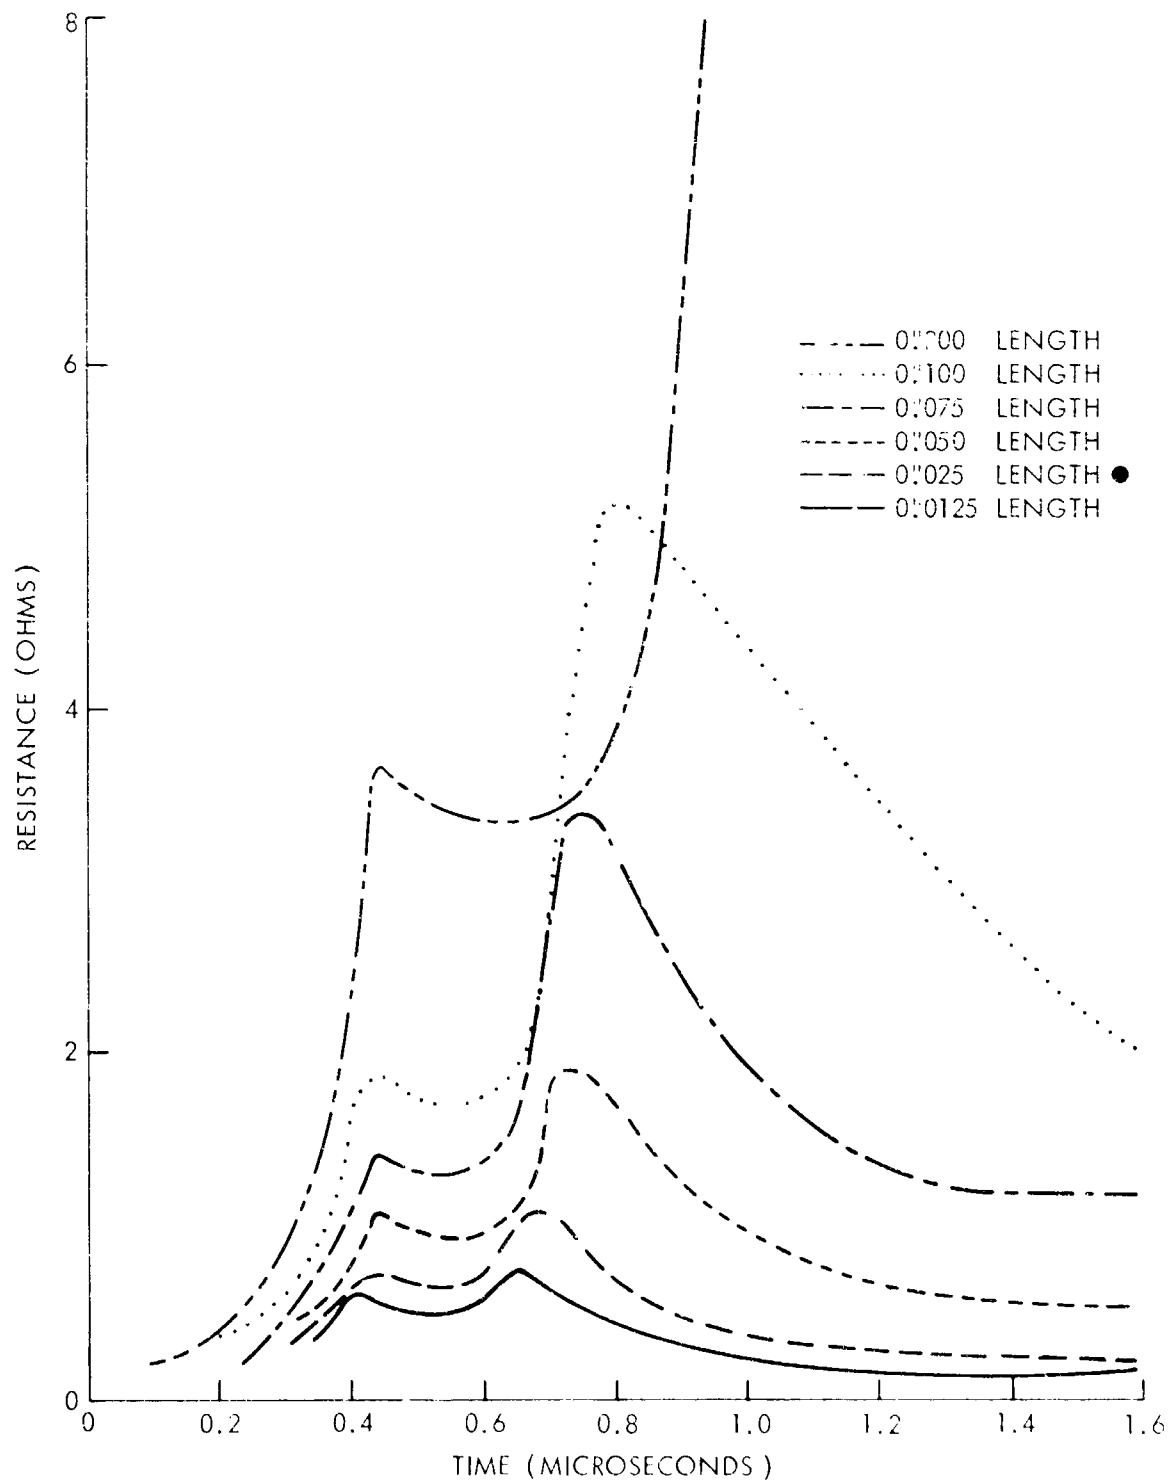


FIG. 13 RESISTANCE AS A FUNCTION OF TIME FOR VARIOUS LENGTHS OF 2-MIL DIAMETER TUNGSTEN WIRE

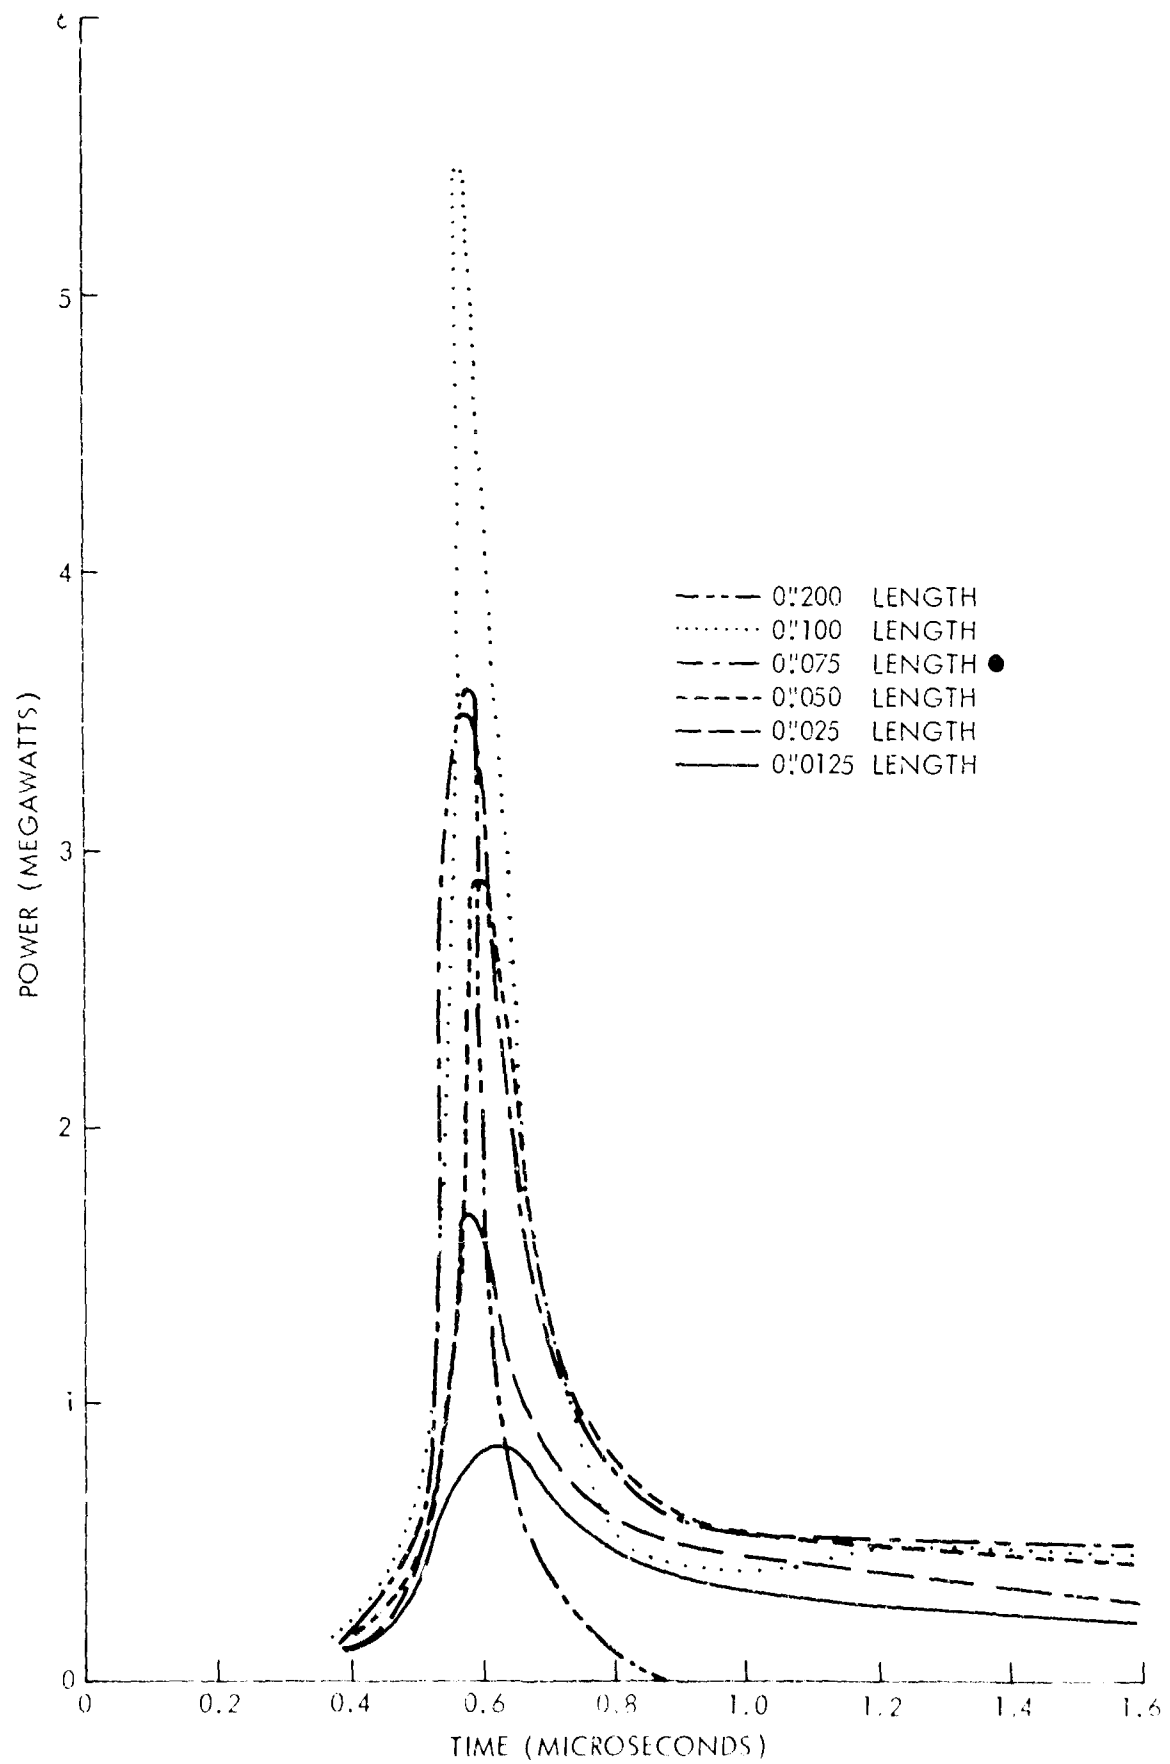


FIG. 14 POWER INPUT VS. TIME FOR VARIOUS LENGTHS OF 2-MIL DIAMETER GOLD WIRE

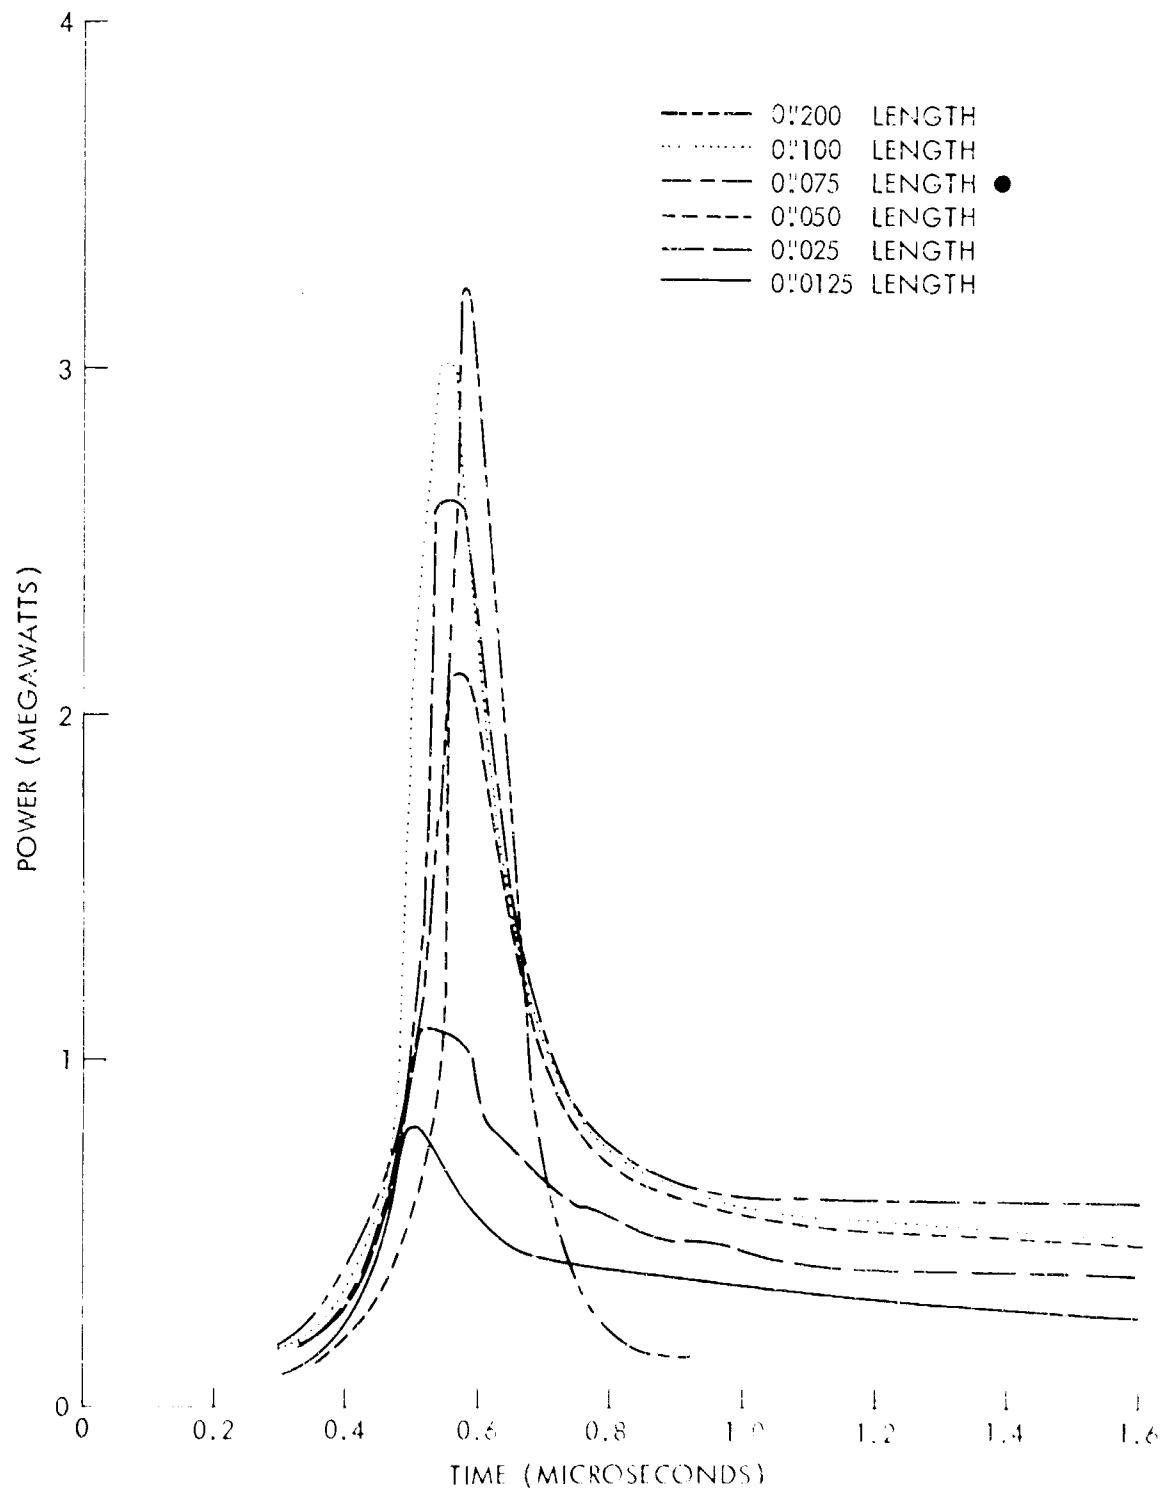


FIG. 15 POWER INPUT VS. TIME FOR VARIOUS LENGTHS OF 2-MIL DIAMETER ALUMINUM WIRE

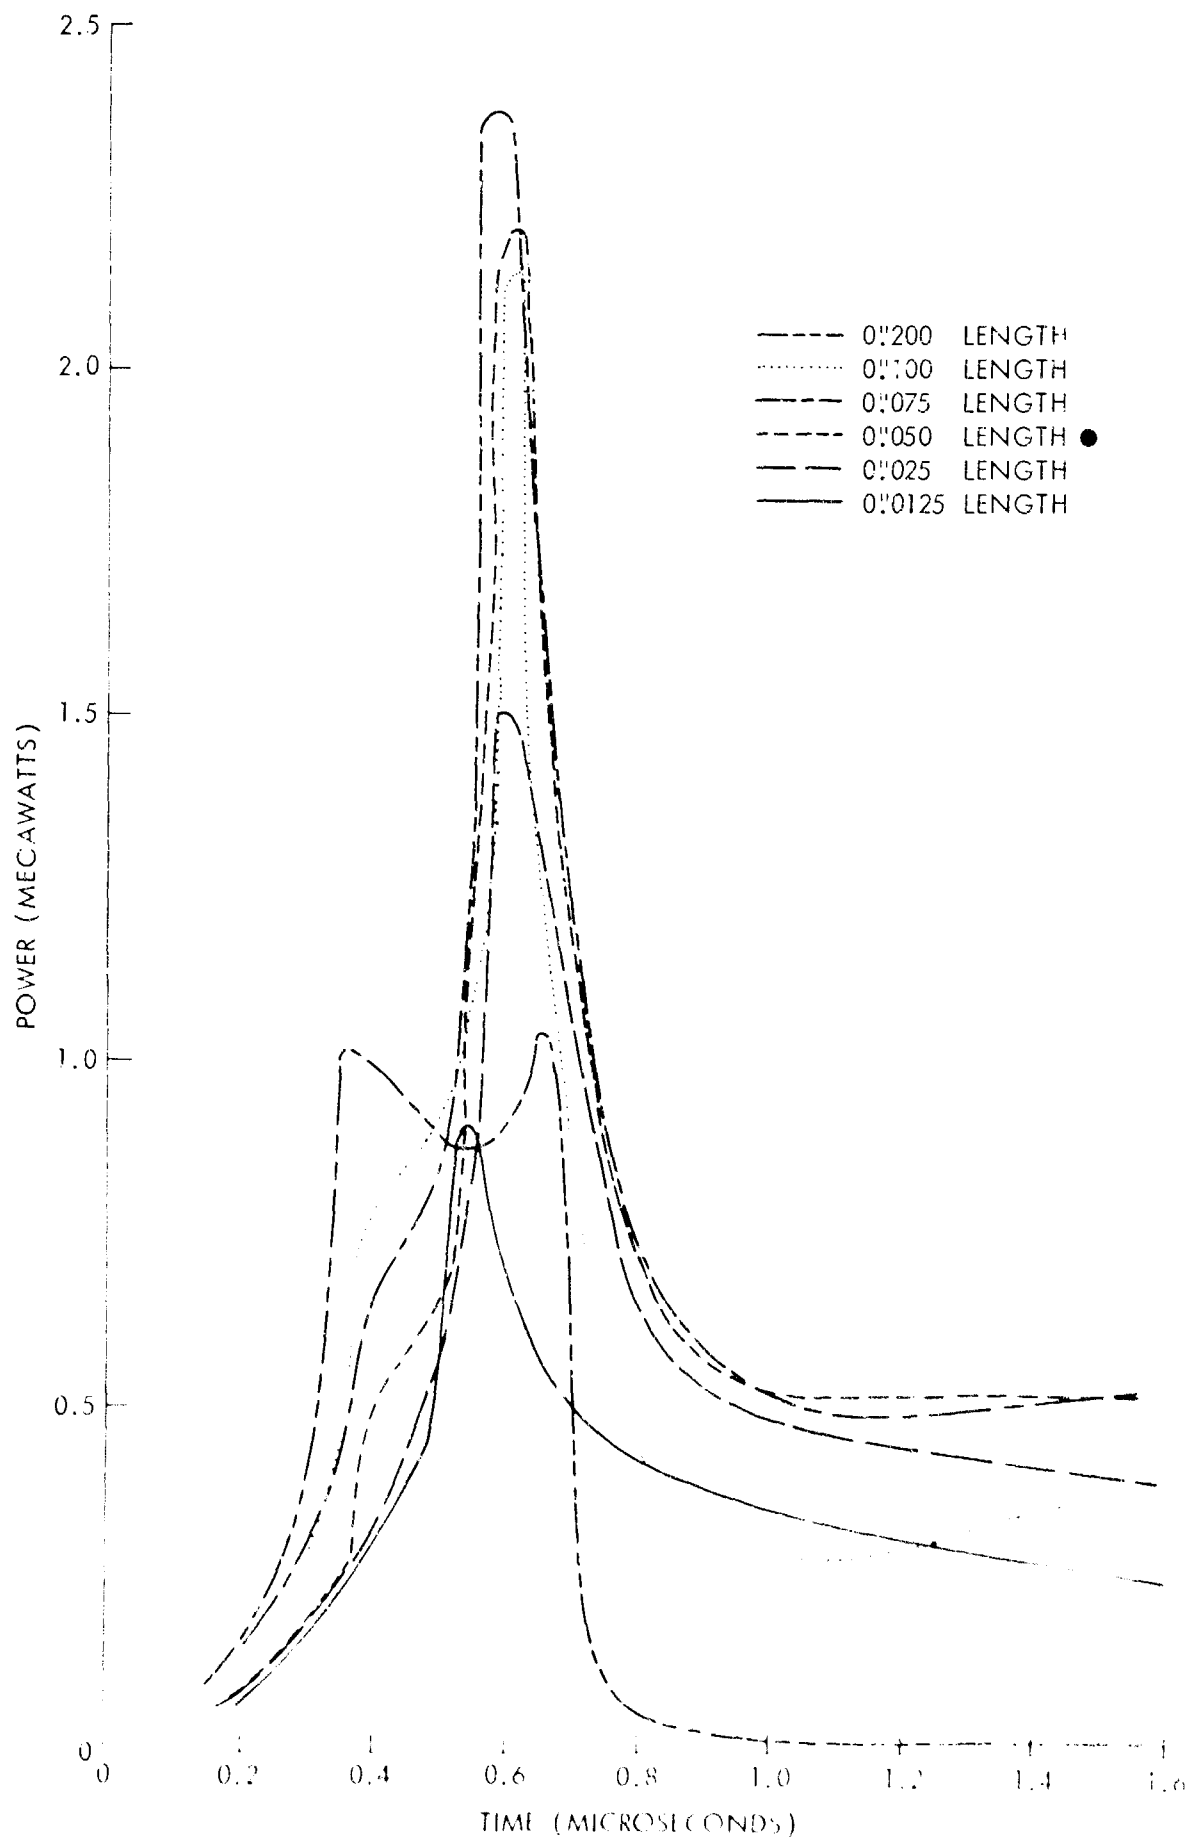


FIG. 16 POWER INPUT VS. TIME FOR VARIOUS LENGTHS OF 2-MIL DIAMETER PLATINUM WIRE

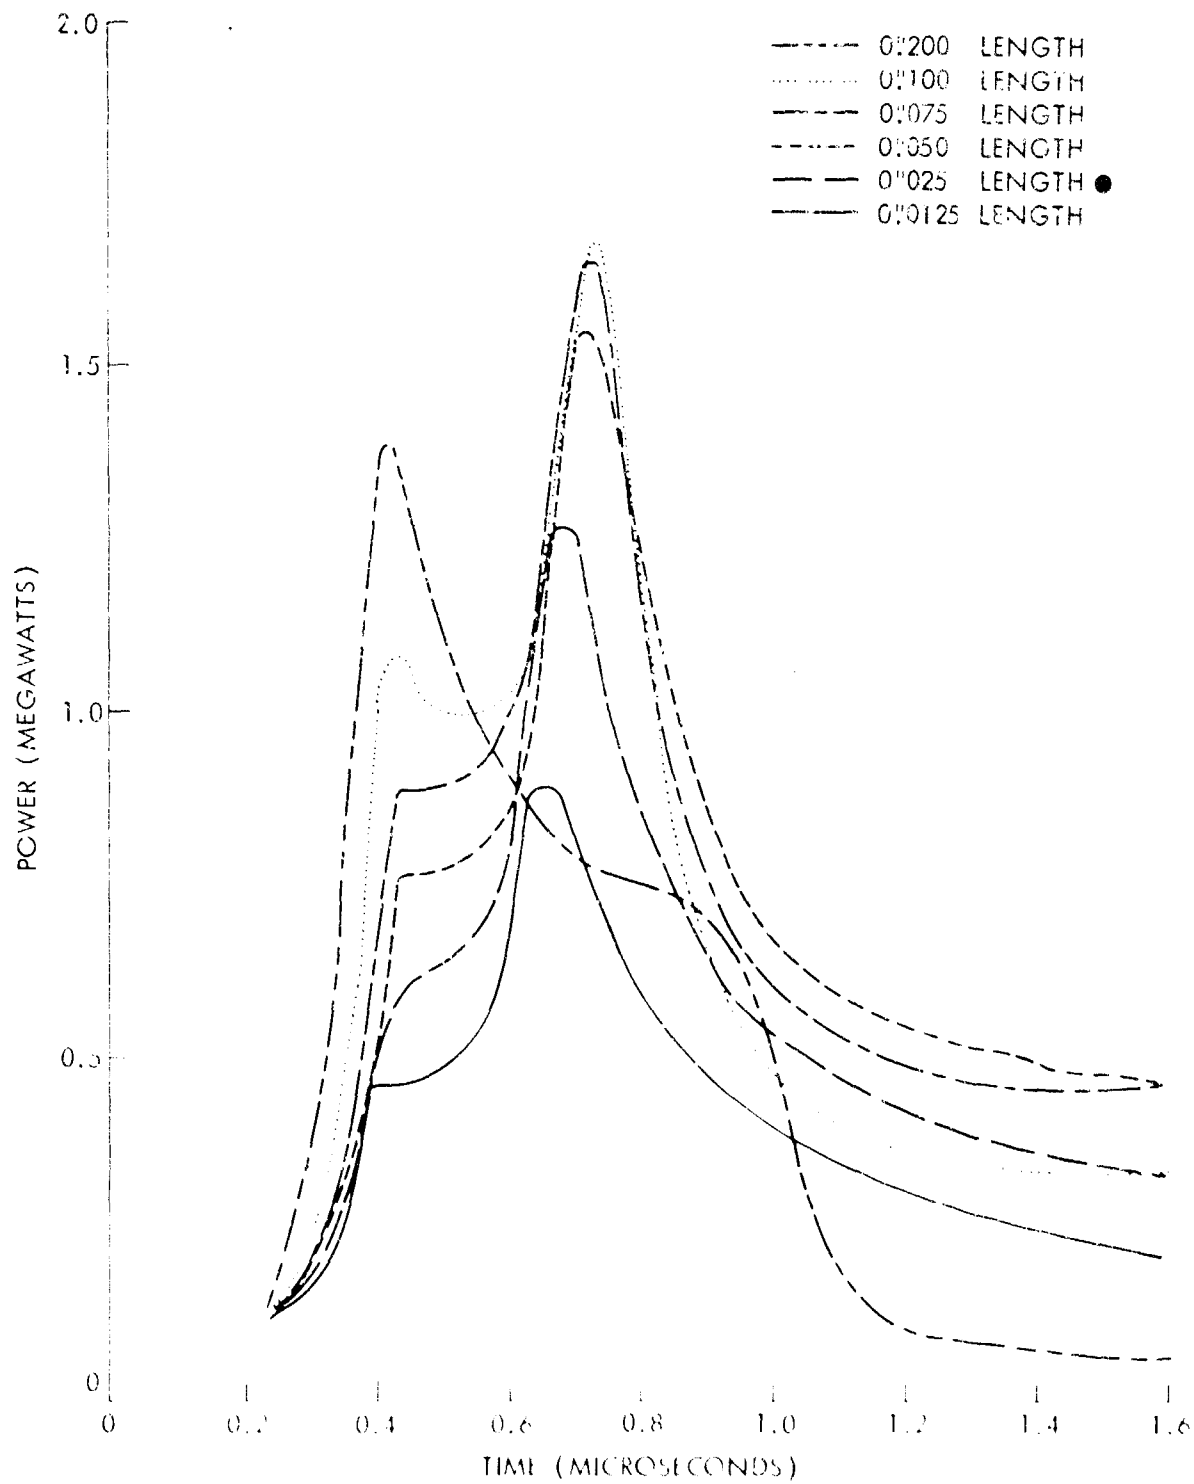


FIG. 17 POWER INPUT VS. TIME FOR VARIOUS LENGTHS OF 2-MIL DIAMETER TUNGSTEN WIRE

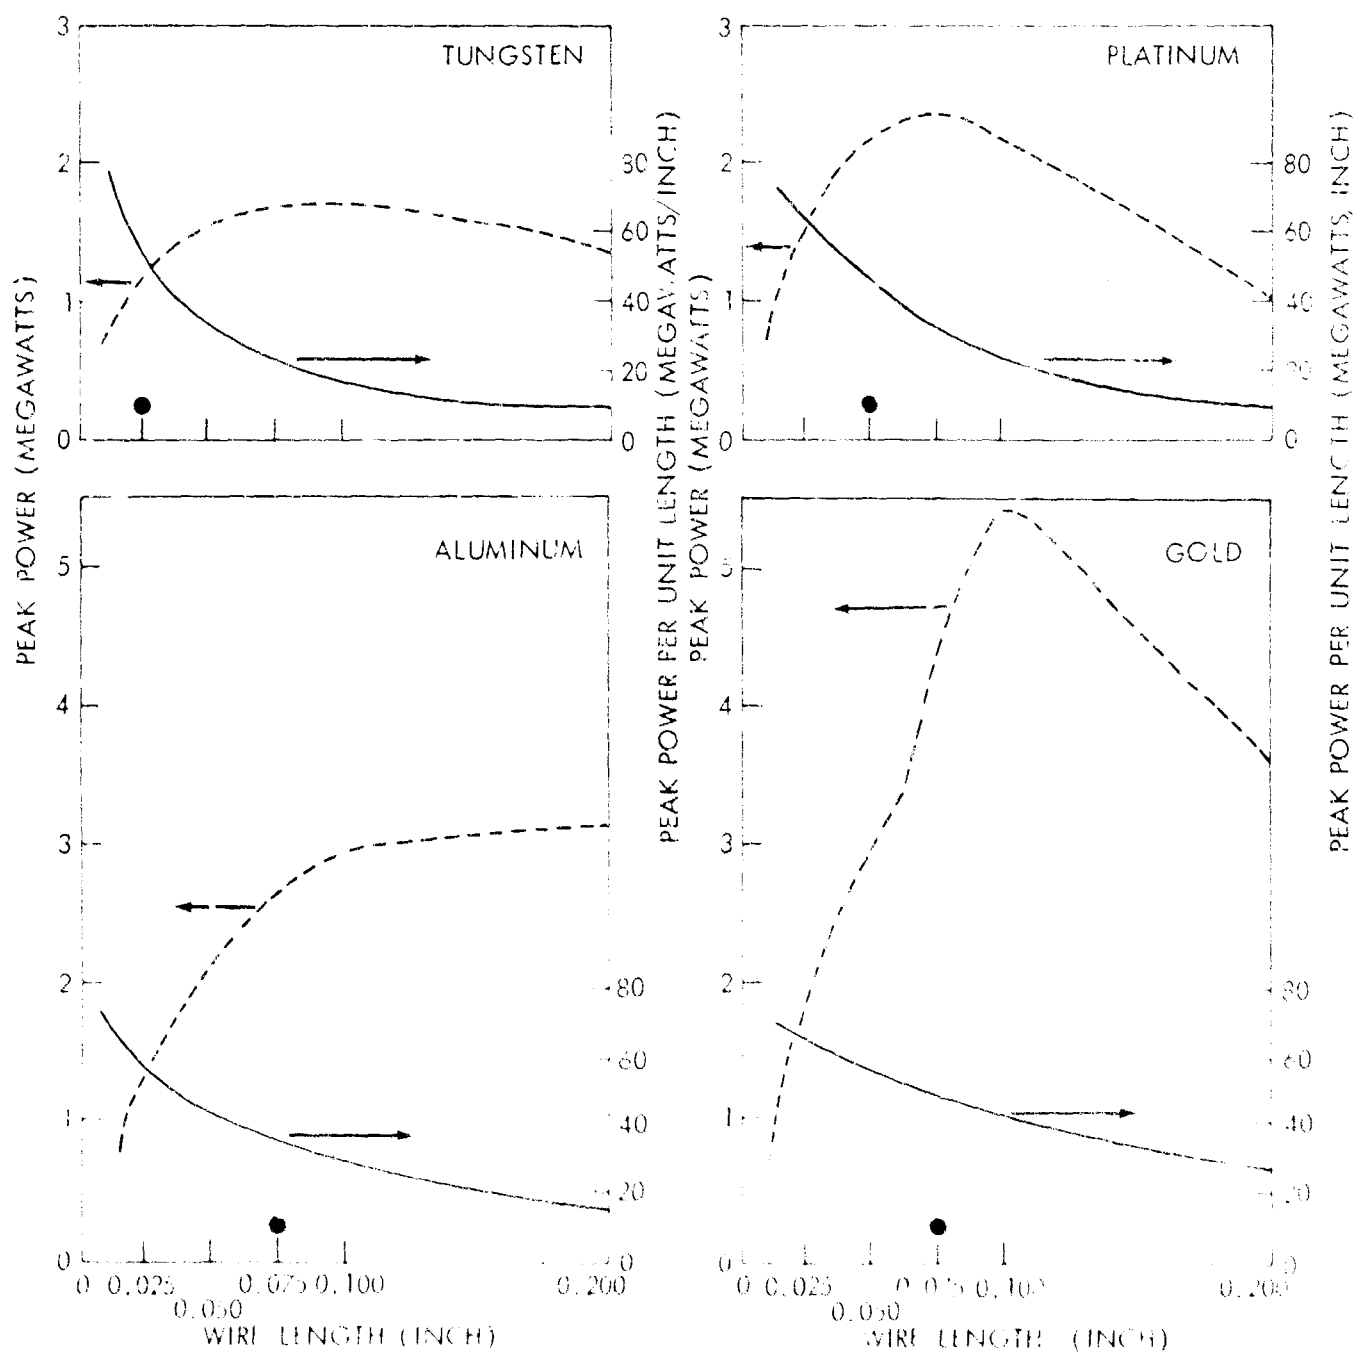


FIG. 18 PEAK POWER AND PEAK POWER PER UNIT LENGTH AS A FUNCTION OF WIRE LENGTH

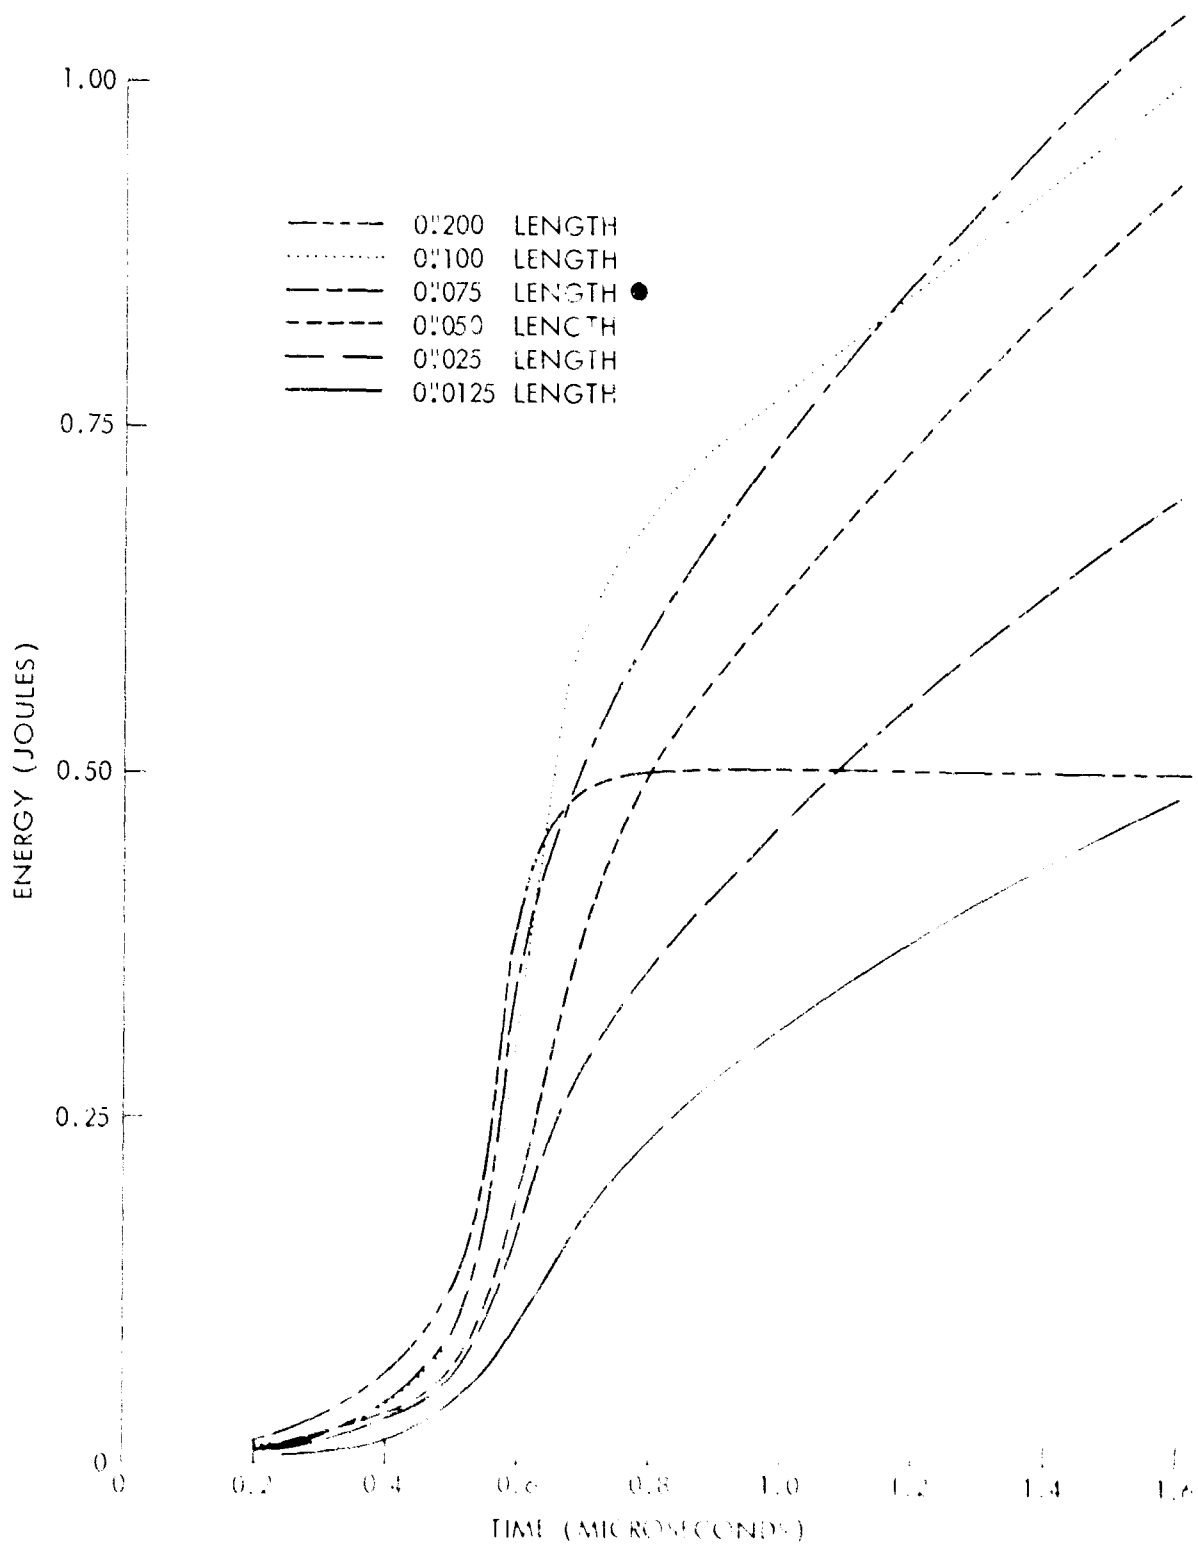


FIG. 12 ENERGY DEPOSITION VS. TIME FOR VARIOUS LENGTH GOLD WIRES

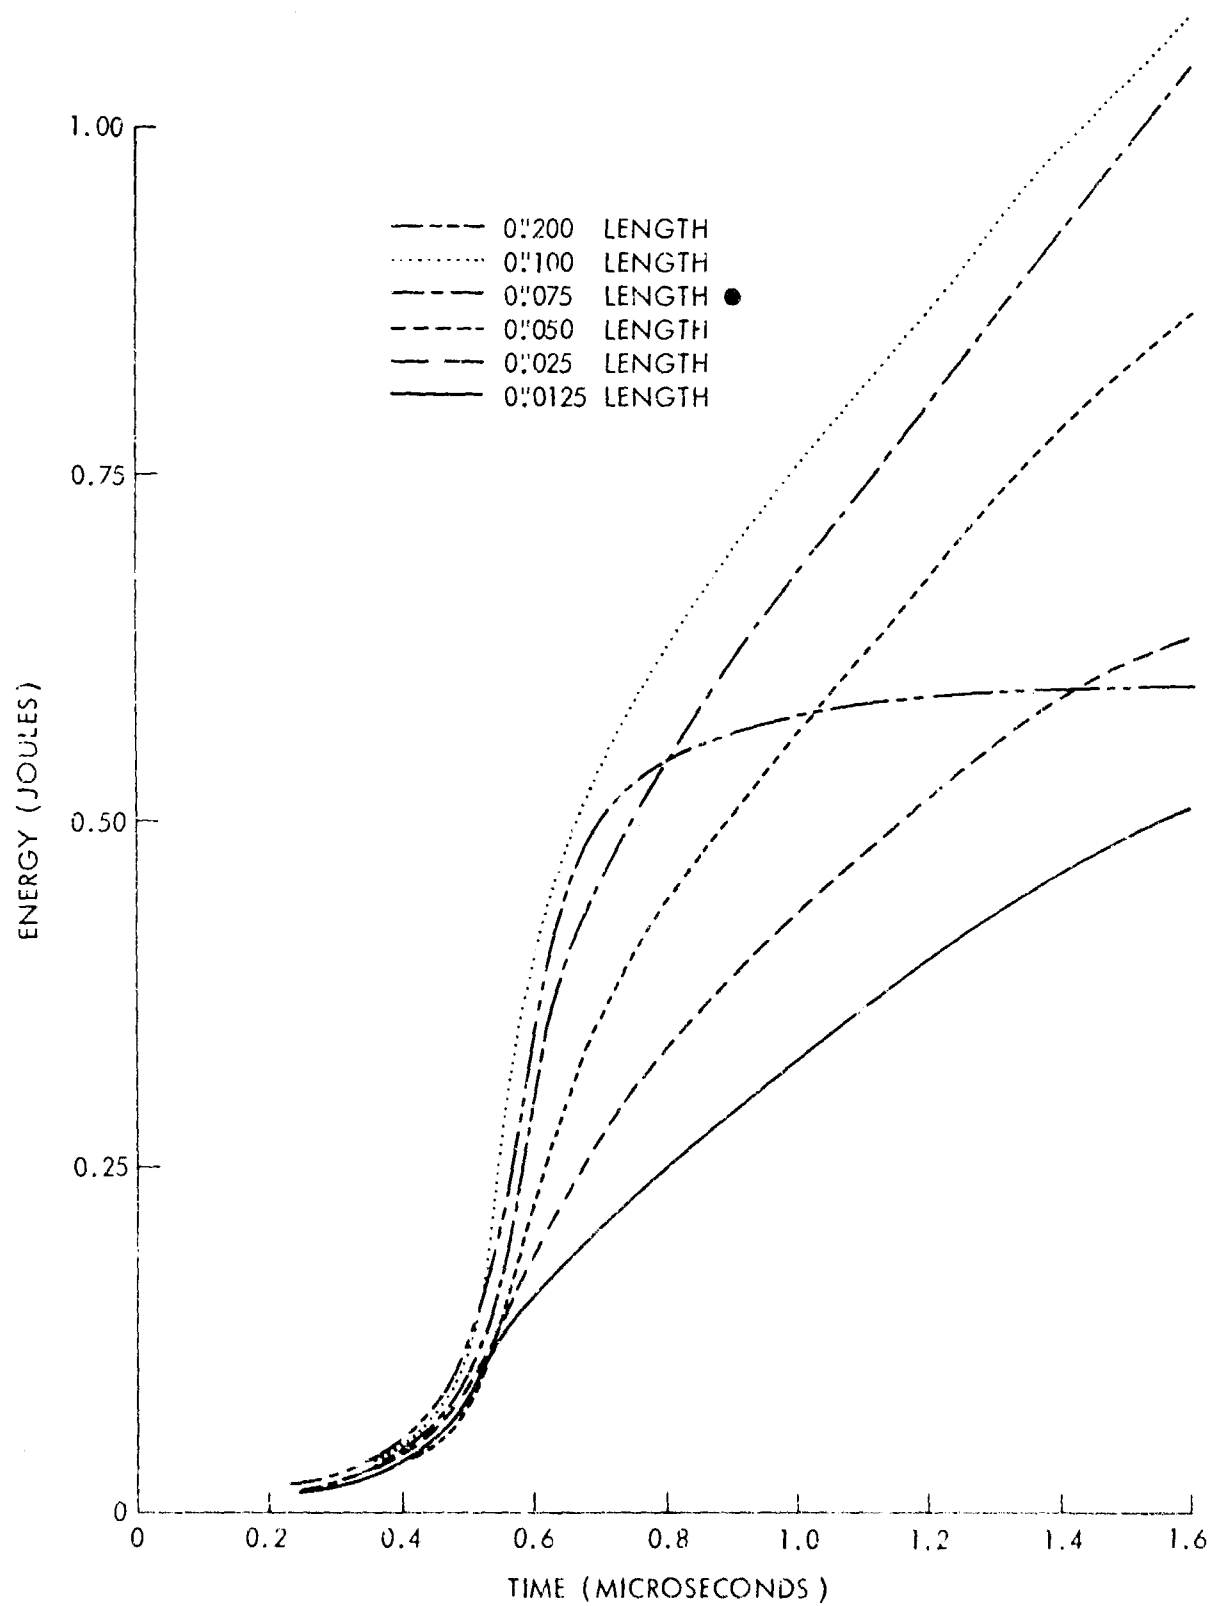


FIG. 20 ENERGY DEPOSITION VS. TIME FOR VARIOUS LENGTH ALUMINUM WIRES

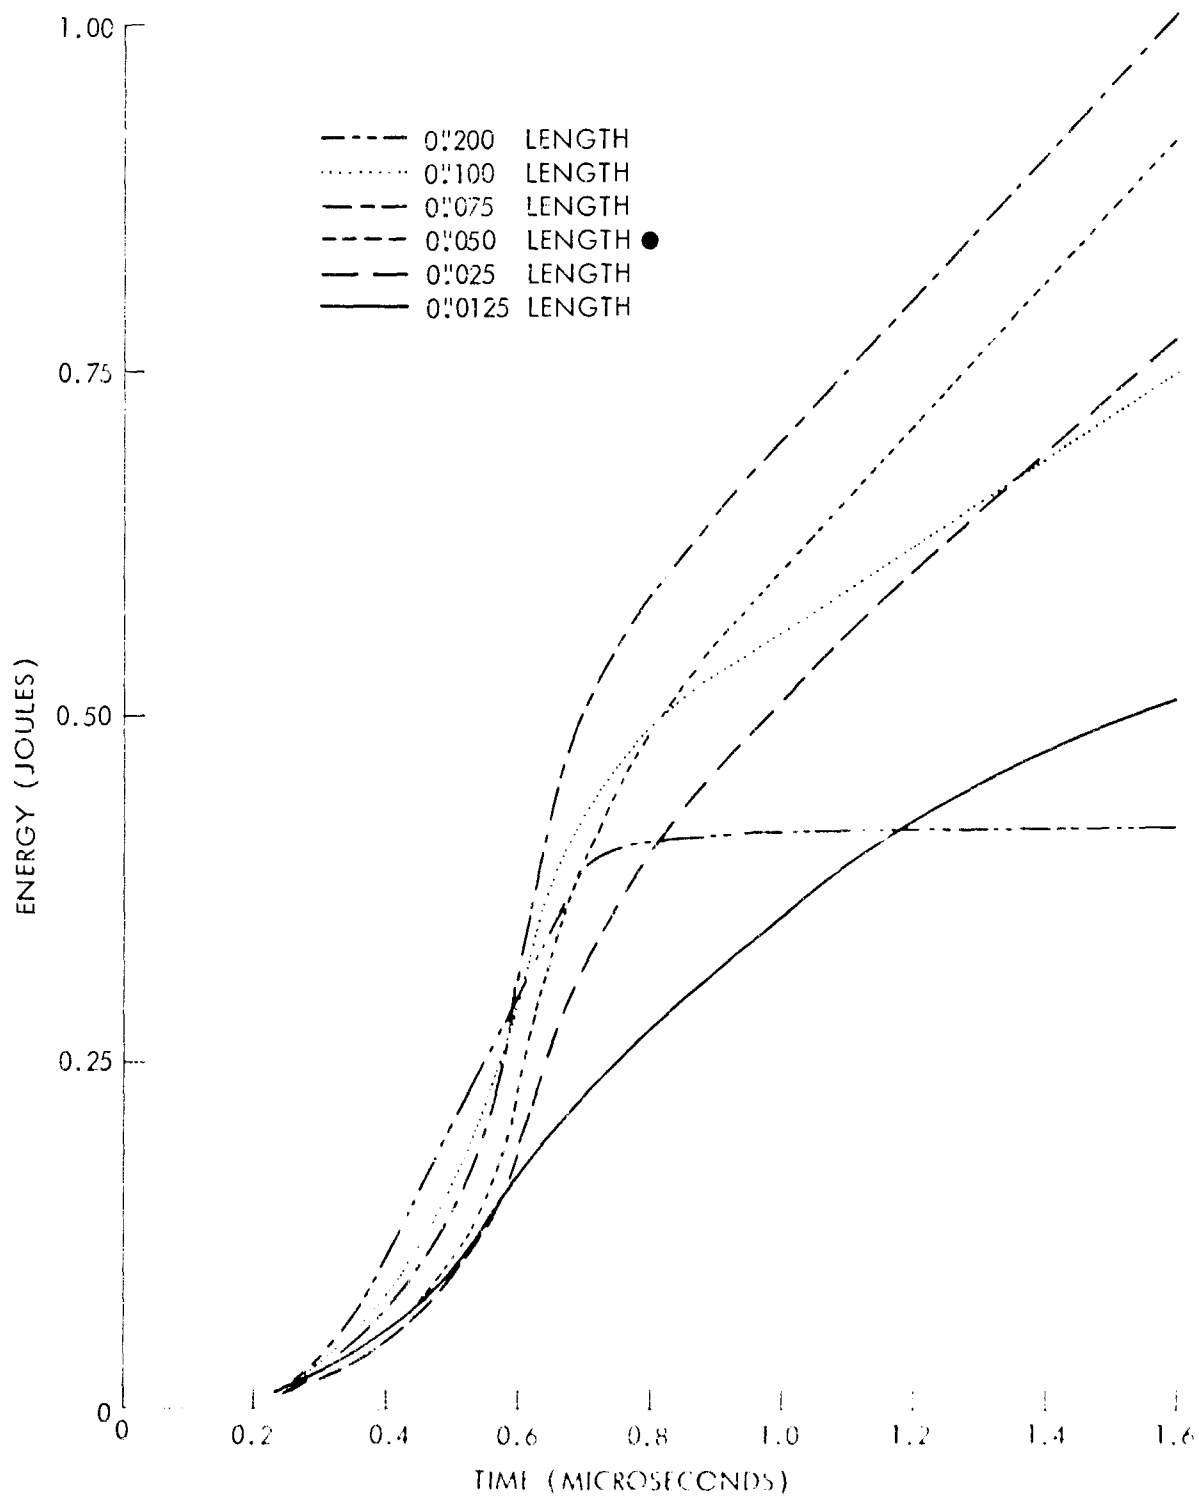


FIG. 21 ENERGY DEPOSITION VS. TIME FOR VARIOUS LENGTH PLATINUM WIRES

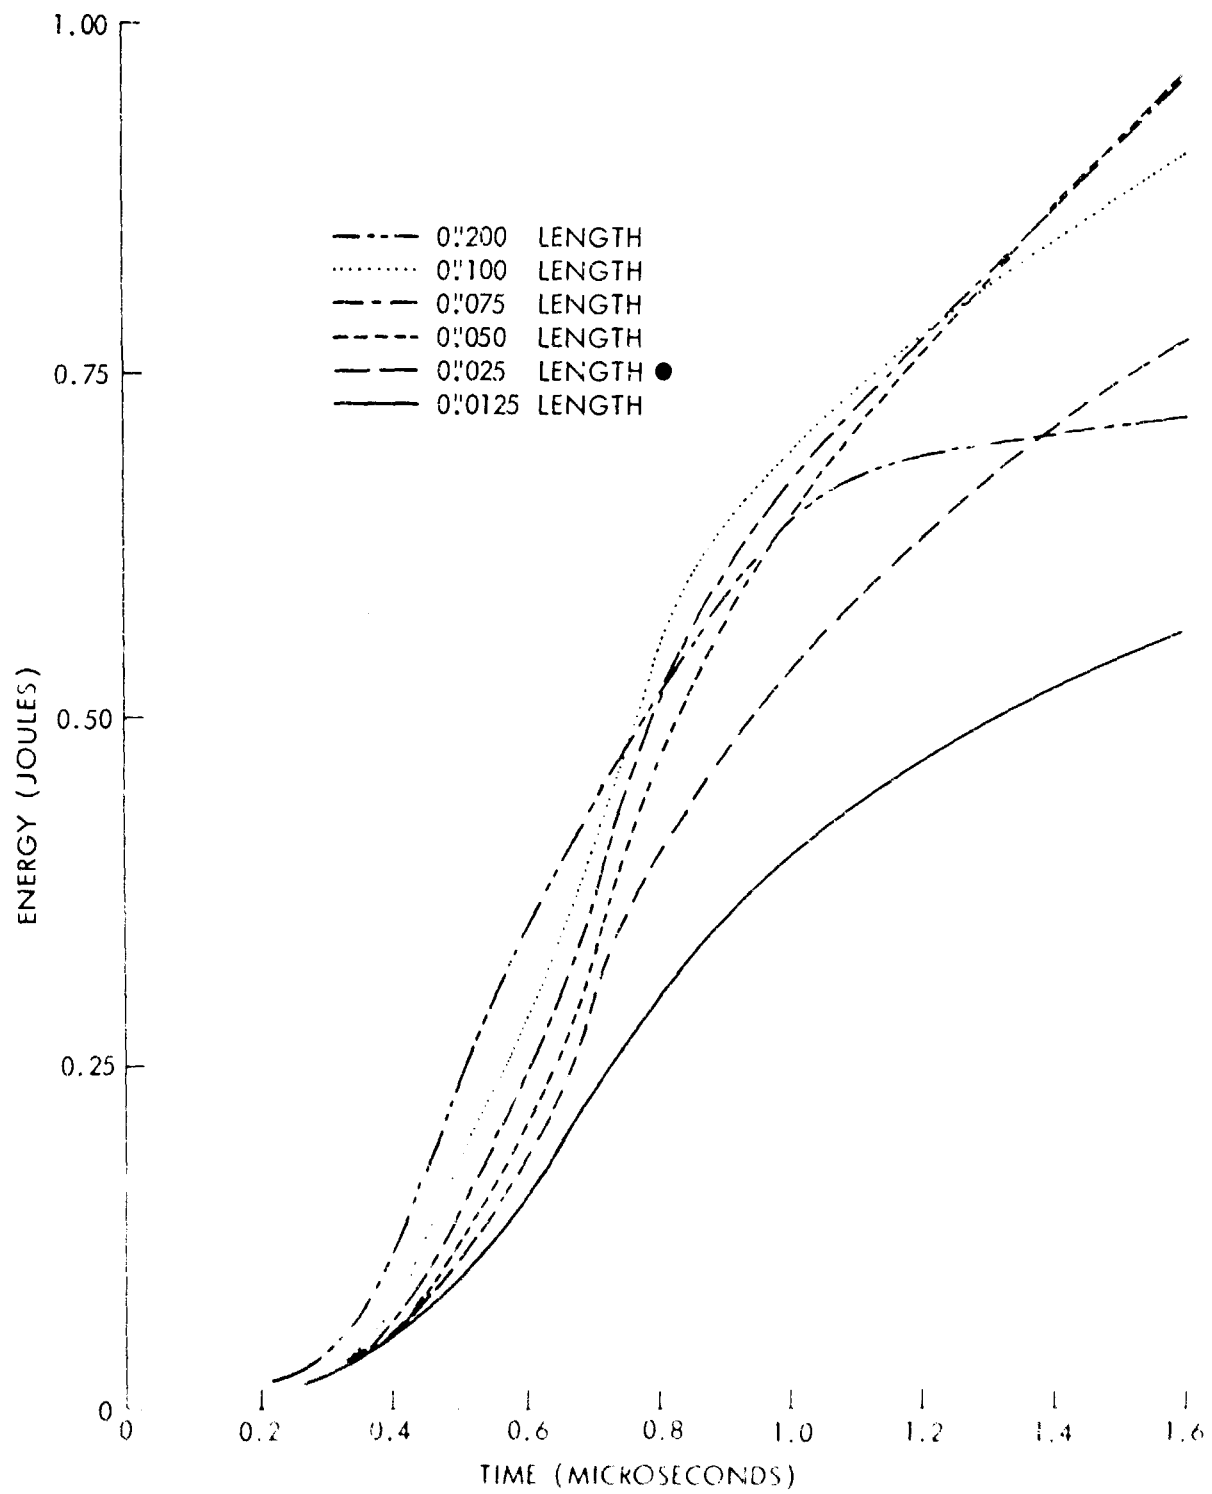


FIG. 22 ENERGY DEPOSITION VS. TIME FOR VARIOUS LENGTH TUNGSTEN WIRES

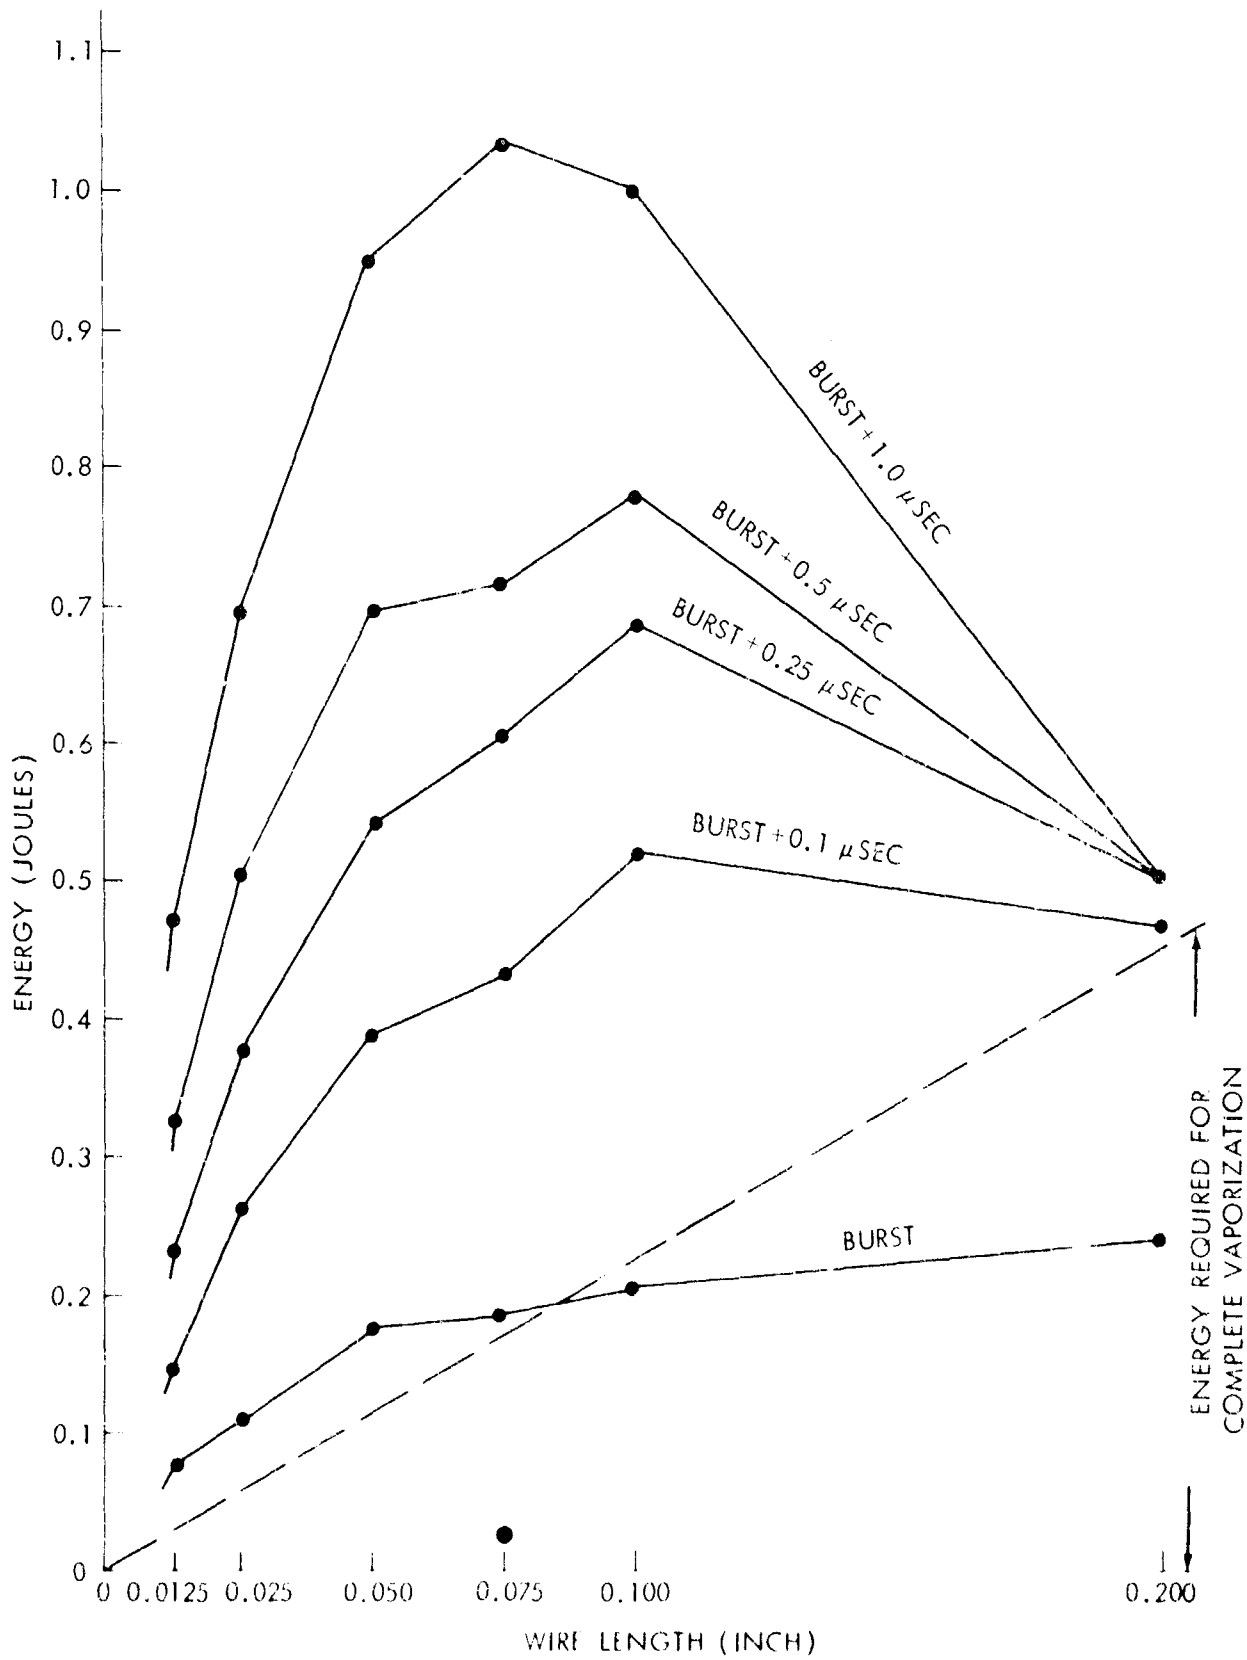


FIG. 23 ENERGY DEPOSITION PROFILES FOR VARIOUS LENGTH GOLD WIRES

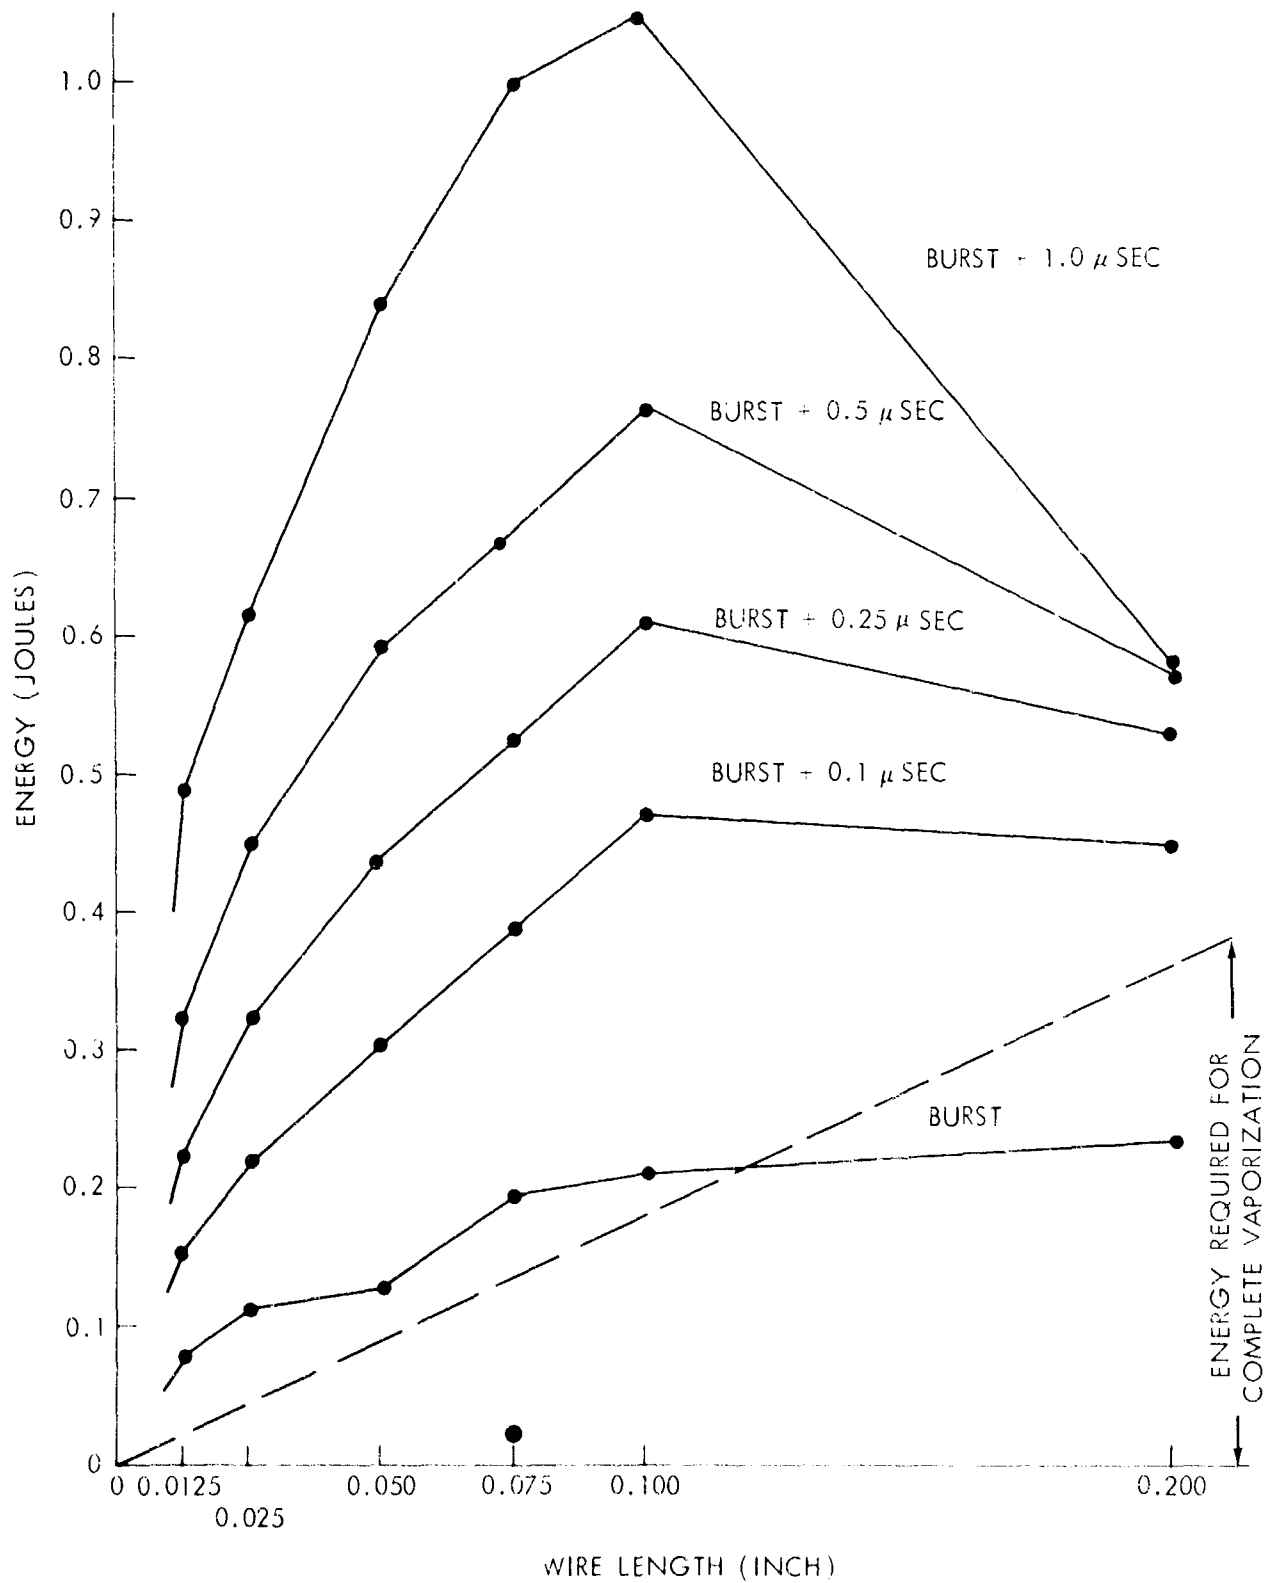


FIG. 24 ENERGY DEPOSITION PROFILES FOR VARIOUS LENGTH ALUMINUM WIRES

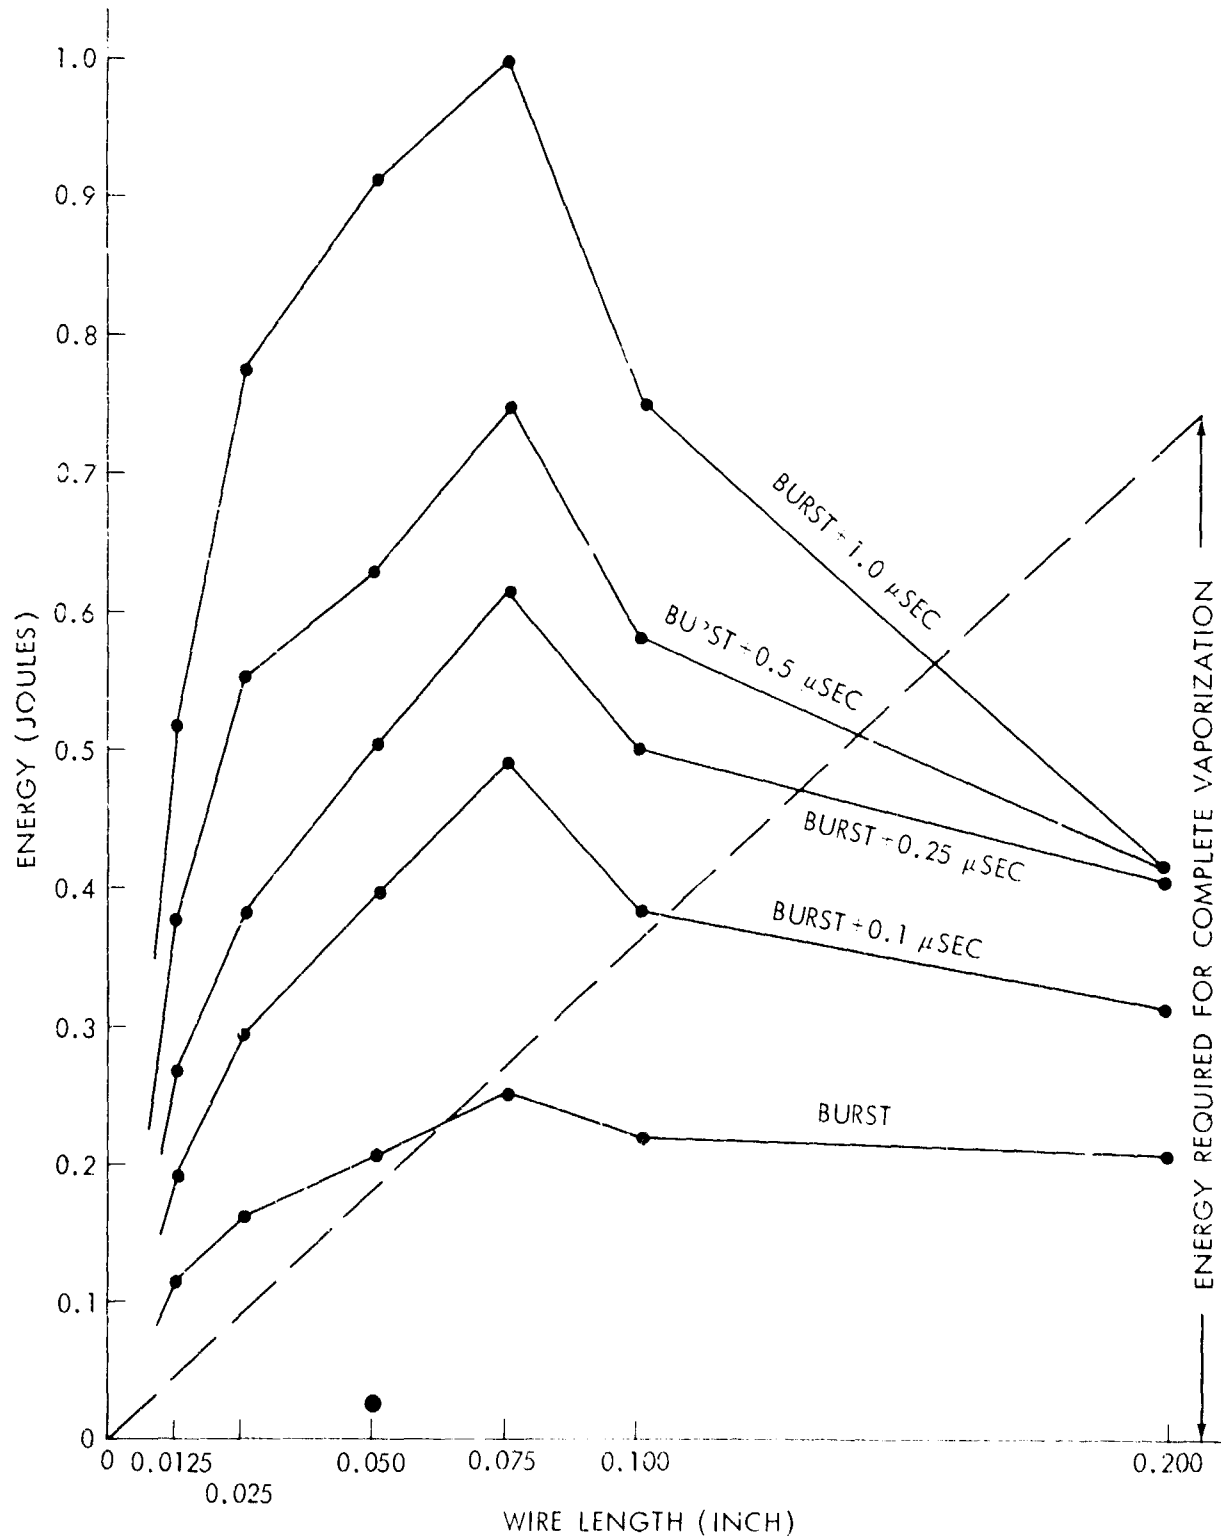


FIG. 25 ENERGY DEPOSITION PROFILES FOR VARIOUS LENGTH PLATINUM WIRES

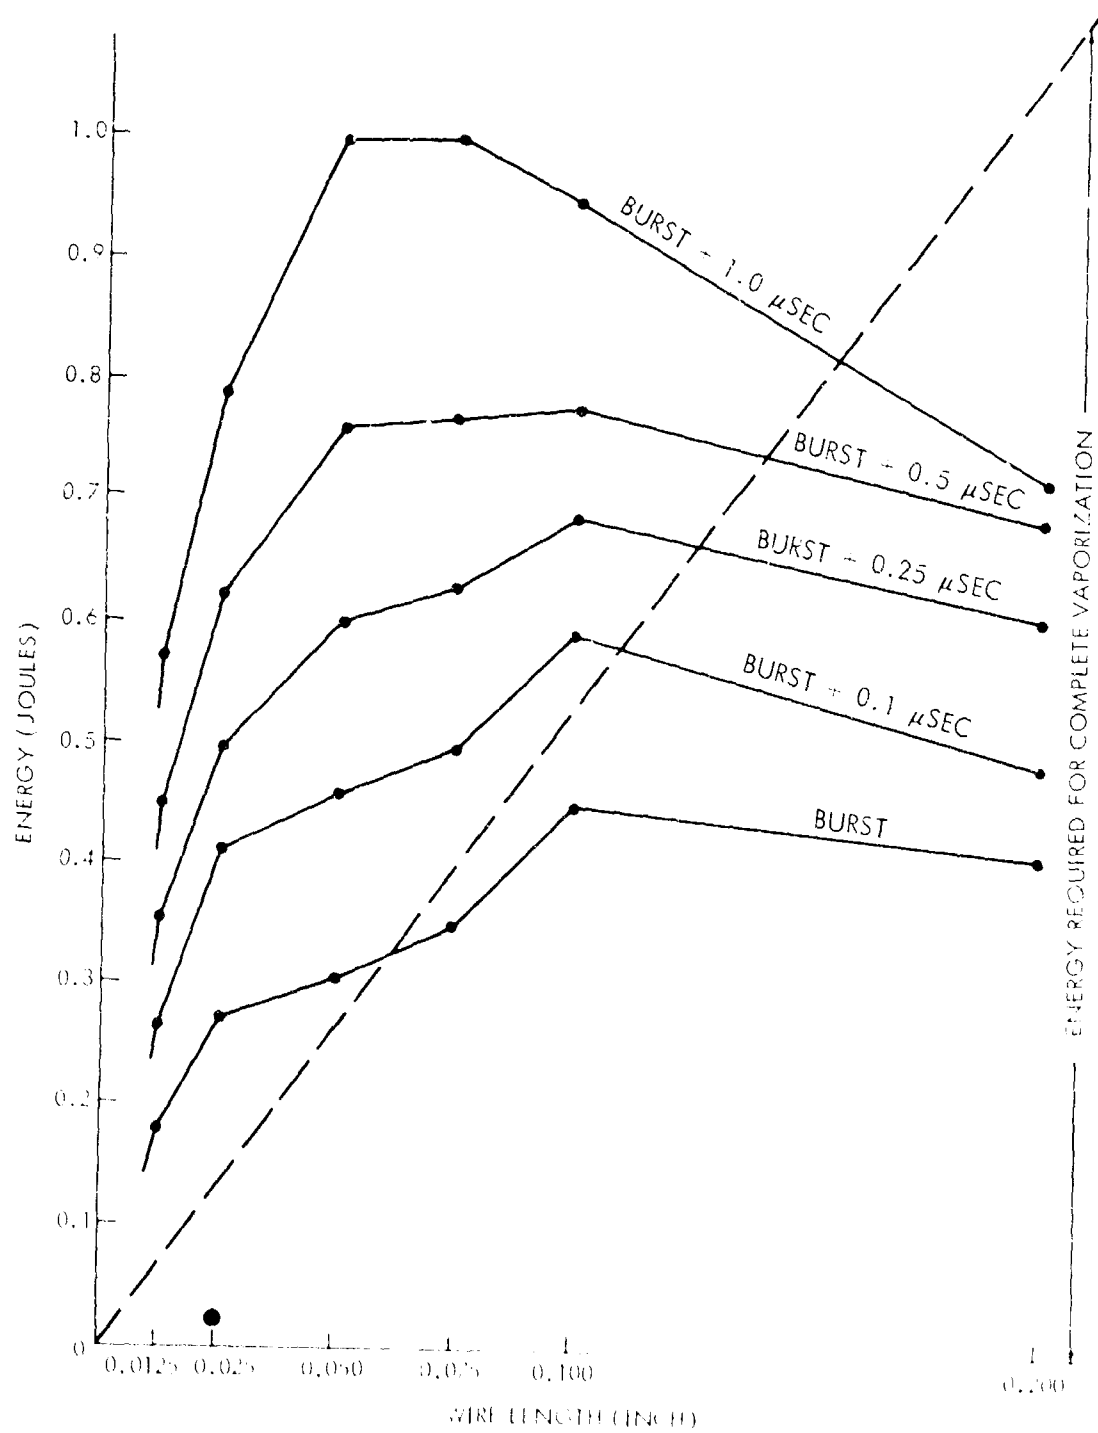


FIG. 26 ENERGY DEPOSITION PROFILES FOR VARIOUS LENGTH TUNGSTEN WIRES

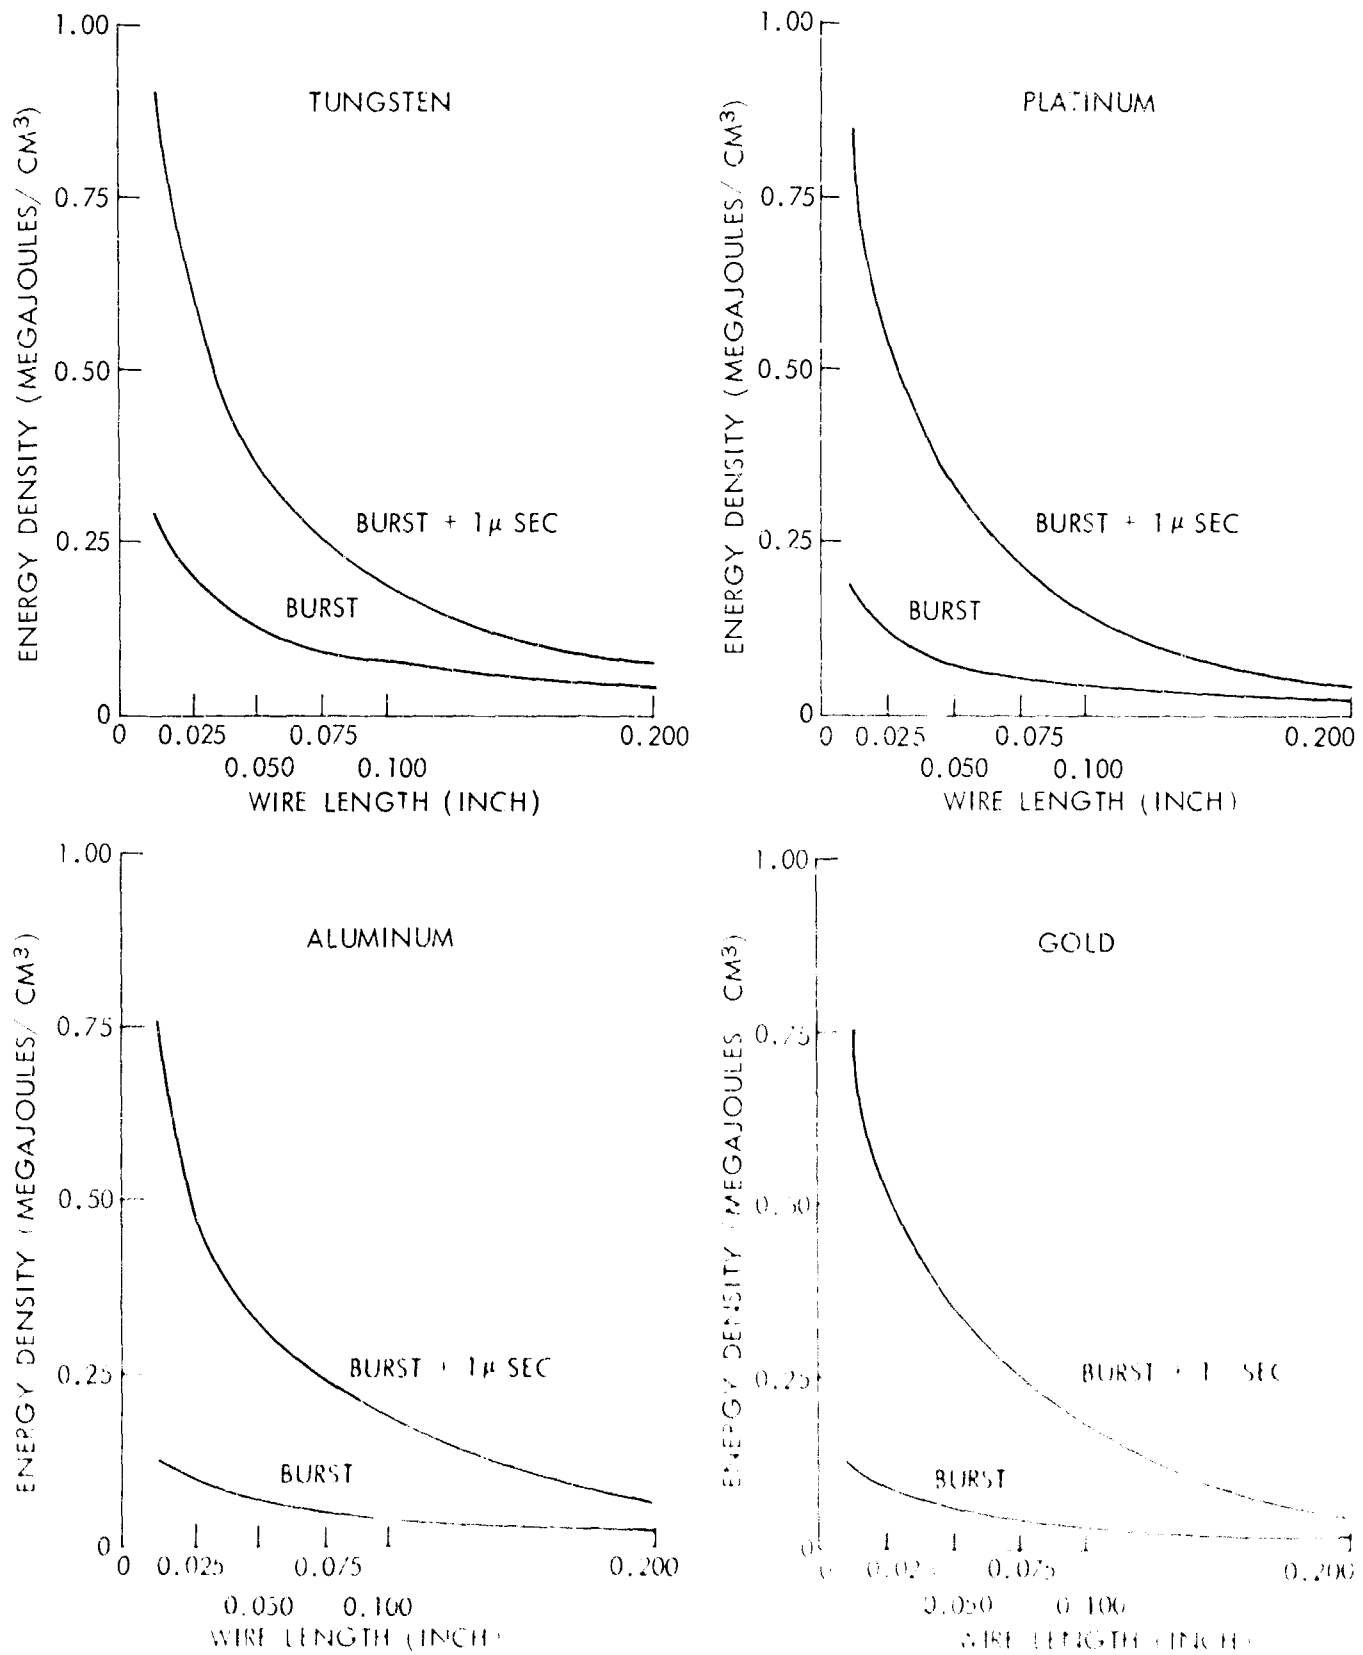


FIG. 2. ENERGY DENSITY AT BURST AND ONE MICROSECOND AFTER BURST AS A FUNCTION OF WIRE LENGTH

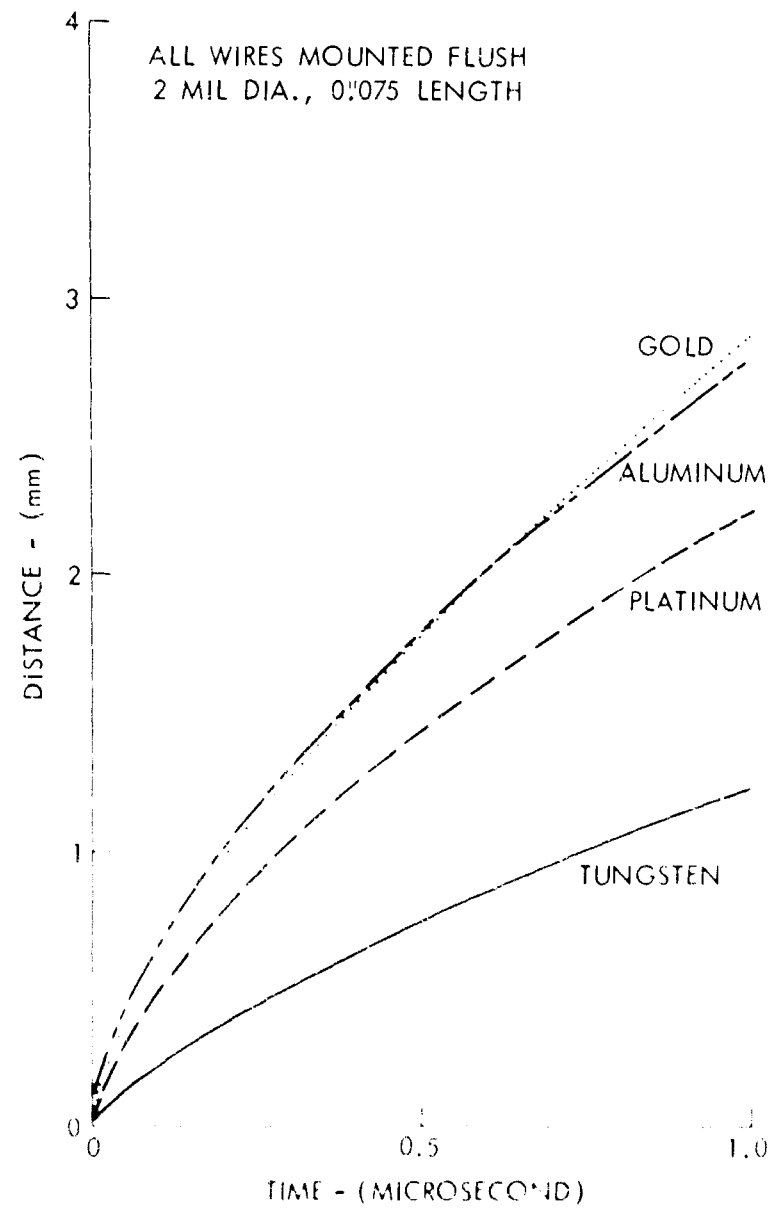


FIG. 28. PLASMA EXPANSION IN AIR FOR DIFFERENT WIRE MATERIALS

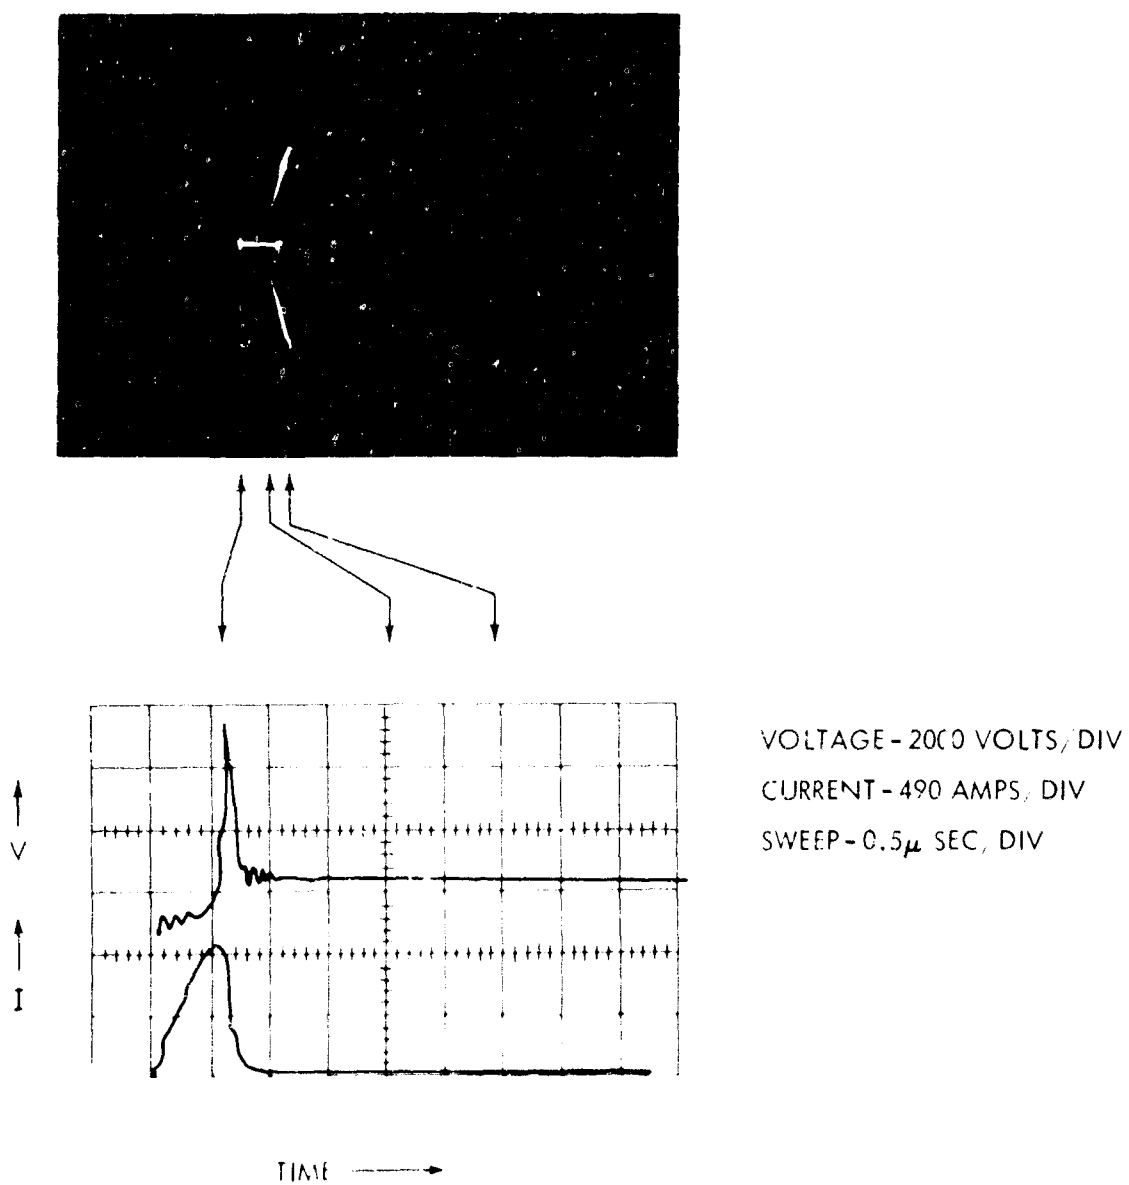


FIG. 29 - SMEAR CAMERA RECORD AND OSCILLOGRAM
 FOR 0.200 INCH LENGTH GOLD WIRE

TABLE 1 Effect of Bridgewire Length (Gold, 2-mil Diameter) on Detonation of PETN at Various Loading Densities

Bridgewire Length (inch)	Density of PETN g/cm ³									
	1.0		1.1		1.15		1.175		1.2	
	D	L	D	L	D	L	D	L	D	L
0.0125	2	0	0	2						
0.025	2	0	2	0	2	0	2	0	1 ^a	0
0.050	2	0	2	0	2	0	2	0	2	0
0.075	2	0	2	0	2	0	2	0	2	0
0.100	2	0	2	0	1	1	0	2		
0.200	2	0	1	1	0	2				
0.400	0	2								

^a One unsymmetrical growth to detonation

D = Detonation

L = Low order

TABLE 2 Effect of Bridgewire Length (Aluminum, 2-mil Diameter)
on Detonation of PETN at Various Loading Densities

Bridgewire Length (inch)	Density of PETN g/cm ³											
	1.0		1.1		1.15		1.175		1.2		1.225	
	D	L	D	L	D	L	D	L	D	L	D	L
0.0125	2	0	2	0	0	2						
0.025	2	0	2	0	2	0	2 ^a	0	0	2		
0.050	2	0	2	0	2	0	2	0	0	2	0	2
0.075	2	0	2	0	2	0	2	0	1	1	0	2
0.100	2	0	2	0	2	0	0	2				
0.200	2	0	1	1	0	2						
0.400	1	1	0	2								

^aOne unsymmetrical growth to detonation

D = Detonation

L = Low order

TABLE 3 Effect of Bridgewire Length (Platinum, 2-mil Diameter)
on Detonation of PETN at Various Loading Densities

Bridgewire Length (inch)	Density of PETN g/cm^3											
	1.0		1.1		1.125		1.15		1.175			
	D	L	D	L	D	L	D	L	D	L	D	L
0.0125	2	0	2	0	1 ^a	4	0	5				
0.025	2	0	2	0	3	2	3 ^b	2	0	2		
0.050	2	0	2	0	5	0	3	2	0	2		
0.075	2	0	2	0	4	1	0	5				
0.100	2	0	0	2								
0.200	0	2										

^a One unsymmetrical growth to detonation

^b Two unsymmetrical growths to detonation

D = Detonation

L = Low order

TABLE 4 Effect of Bridgewire Length (Tungsten, 2-mil Diameter)
on Detonation of PETN at Various Loading Densities

Bridgewire Length (inch)	Density of PETN g/cm ³									
	1.0		1.1		1.125		1.15			
	D	L	D	L	D	L	D	L	D	L
0.0125	2	0	0	2						
0.025	2	0	2	0	2 ^a	0	0	2		
0.050	2	0	2 ^a	0	0	2				
0.075	2	0	1 ^a	1	0	2				
0.100	2	0	0	2						
0.200	0	2								

^a One unsymmetrical growth to detonation

D = Detonation

L = Low order

DISTRIBUTION

Chief, Bureau of Naval Weapons
Department of the Navy
Washington 25, D. C. 20360

DLI-3
RRRE-5
RUME-11
RUME-32
RMMO-5
RREN-32

108

4
1
1
1
1
1

Director
Special Projects Office
Department of the Navy
Washington 25, D. C. 20360
SP-20

1

Superintendent
Naval Post Graduate School
Monterey, California

1

Office of Naval Research
Department of the Navy
Washington 25, D. C. 20360

Commander
U. S. Naval Ordnance Test Station
China Lake, California
Code 556
Technical Library

Director
Naval Research Laboratory
Washington 25, D. C.
Technical Information Section

Commander
U. S. Naval Weapons Laboratory
Dahlgren, Virginia
Technical Library
Weapons Laboratory
Terminal Ballistics Laboratory
Code WHR

2
1
1
1

Office of Technical Services
Department of Commerce
Washington 25, D. C.

100

	Copies
Commanding Officer & Director David Taylor Model Basin Underwater Explosion Research Department Code 780 Portsmouth, Virginia	2
Commanding Officer U. S. Naval Weapons Station Yorktown, Virginia R & D Division	2
Commanding Officer U. S. Naval Ordnance Laboratory Corona, California Attn: R. Hillyer	2
Commanding Officer U. S. Naval Propellant Plant Indian Head, Maryland Technical Library	1
Commanding Officer U. S. Naval Ordnance Plant Macon, Georgia	1
Commanding Officer Naval Ammunition Depot Crane, Indiana	1
Commanding Officer U. S. Naval Ammunition Depot Navy Number Six Six (66) c/o Fleet Post Office San Francisco, California Quality Evaluation Laboratory	1
Commanding Officer U. S. Naval Ammunition Depot Concord, California Quality Evaluation Laboratory	1
Commanding Officer U. S. Naval Underwater Ordnance Station Newport, Rhode Island	1
Commanding Officer U. S. Naval Weapons Evaluation Facility Kirtland Air Force Base Albuquerque, New Mexico	1

Copies

Commanding Officer U. S. Naval Explosive Ordnance Disposal Facility Indian Head, Maryland Library Division	1
Army Material Command Department of the Army Washington 25, D. C. R & D Division	1
Commander Army Rocket & Guided Missile Agency Redstone Arsenal, Huntsville, Alabama ORDXR-RH	1
Commanding Officer U. S. Army Missile Command Redstone Arsenal, Alabama R. Betts	1
Commanding Officer Picatinny Arsenal Dover, New Jersey 07801	
SMUPA-W	1
SMUPA-G	1
SMUPA-V	1
SMUPA-VL	1
SMUPA-VE	1
SMUPA-VC	1
SMUPA-DD	1
SMUPA-DR	1
SMUPA-DR-4	1
SMUPA-DW	1
SMUPA-TX	1
SMUPA-TW	1
Commanding Officer Harry Diamond Laboratory Connecticut Ave & Van Ness St., N. W. Washington 25, D. C.	
Ordnance Development Lab	1
M. Lipnick (Code 005)	1
Commanding Officer Office of Ordnance Research Box CM Duke Station Durham, North Carolina	1

Copies

U. S. Army Engineer Research and Development Laboratories Ft. Belvoir, Virginia 22060 (STINFO Branch)	2
Commanding General Aberdeen Proving Ground Aberdeen, Maryland Attn: BRL	1
Technical Library	1
Commanding General Redstone Arsenal Huntsville, Alabama Technical Library	1
Commanding General Frankford Arsenal Philadelphia 37, Pa. Library	1
Chief of Staff U. S. Air Force Washington 25, D. C. AFORD-AR	1
Commander Wright Air Development Center Wright-Patterson Air Force Base, Ohio 45433 WWAD	1 2
APGC(PGTRI Technical Library) Eglin Air Force Base, Florida 32542	1
Commanding General Air Force Systems Command Andrews Air Force Base Camp Springs, Maryland	1
Commander Air Force Cambridge Research Center L. G. Hanscom Field Bedford, Massachusetts	1
Director Applied Physics Laboratory John Hopkins University 8621 Georgia Avenue Silver Spring, Maryland	2

Copies

Atomic Energy Commission
Washington 25, D. C.
DMA

1

Director
U. S. Bureau of Mines
Division of Explosive Technology
4800 Forbes Street
Pittsburgh 13, Pennsylvania
Dr. R. W. Van Dolah

1

Defense Documentation Center
Cameron Station
Alexandria, Virginia
TIPCR

20

National Aeronautics & Space Admin.
Goddard Space Flight Center
Greenbelt, Maryland

1

Lawrence Radiation Laboratory
University of California
P. O. Box 808
Livermore, California
Technical Information Division
Dr. M. Wilkins
Dr. J. Kury

1

1

1

Director
Los Alamos Scientific Laboratory
P. O. Box 1663
Los Alamos, New Mexico
Library
GMX-7

1

1

Sandia Corporation
P. O. Box 969
Livermore, California

1

Sandia Corporation
P. O. Box 5400
Albuquerque, New Mexico 87115

1

The Franklin Institute
20th & Benjamin Franklin Parkway
Philadelphia 3, Pennsylvania
(Mr. Gunther Cohn)

1

Aerojet-General Corporation
Ordnance Division
Downey, California, Attn: Dr. H. Fisher

1

	Copies
Alleghaney Ballistics Laboratory Cumberland, Maryland	1
Flare-Northern Division Atlantic Research Corporation 19701 W. Goodvale Road Saugus, California	1
Atlas Powder Company Tamaqua, Pennsylvania Attn: Mr. B. Gay, Valley Forge, Pa.	1
Atlantic Research Corporation Flare-Northern Division P. O. Box 175 West Hanover, Massachusetts Mr. J. A. Smith. Sec. Off.	1
Bermite Powder Company Saugus, California Attn: Mr. L. LoFiego	1
Hercules Powder Company Port Ewen, New York C. Wood G. Scherer	1 1
Martin Company Armament Section Orlando, Florida M. Hedges	1
Thiokol Chemical Corporation Redstone Arsenal Huntsville, Alabama	1
Stanford Research Institute Poulter Laboratories Menlo Park, California	1
Thiokol Chemical Corporation Hunter-Bristol Division Bristol, Pennsylvania	1
McCormick Selph Association Hollister Airport Hollister, California	1

	Copies
Librascope Division 670 Arques Avenue Sunnyvale, California Attn: Mr. T. Parker	1
Lockheed Aircraft Corporation P. O. Box 504 Sunnyvale, California	1
Beckman & Whitley Research and Development Division 993 San Carlos Avenue San Carlos, California	1
General Laboratory Associates 17 E. Railroad Street Norwich, N. Y.	1
National Aeronautics & Space Administration Manned Spacecraft Center Houston, Texas Attn: Mr. W. H. Simmons Mr. M. Falbo	1 1
R. H. Stresau Laboratory Spooner, Wisconsin	1
Special Devices Incorporated 16830 W. Placerita Canyon Road Newhall, California	1
Hi-Shear Corporation 2600 W. 247th Street Torrance, California	1
Unidynamics Universal Match Corp. P.O. Box 2990 Phoenix, Arizona	1
Atlas Chemical Industries, Inc. Valley Forge Industrial Park Valley Forge, Pennsylvania 19481	1
McDonnell Aircraft Corporation P. O. Box 516 St. Louis, Missouri Attn: Mr. V. Drexelius	1