

NOLC REPORT 638

7 FEBRUARY 1966

NOLC REPORT 638

BROAD-BAND VLF TRANSMITTING TERMINATED DIPOLE

E. W. SEELEY

RESEARCH DEPARTMENT

CLASSIFIED
FOR FURNISHING TO THE
TECHNICAL INFORMATION

Hardcopy Microfiche

\$1.00 \$6.50 22.00

ARCHIVE COPY

Code 1

DDC
MAR 17 1966
DDC-IRA F

Distribution of this document
is unlimited.



NAVAL ORDNANCE LABORATORY CORONA
CORONA, CALIFORNIA

NAVAL ORDNANCE LABORATORY CORONA

E. B. JARMAN, CAPT., USN
Commanding Officer

F. S. ATCHISON, Ph. D.
Technical Director

FOREWORD

The work described in this report was performed during FY 1966 under the sponsorship of the Defense Communications Agency, MIPR No. 43-4-104, Job Order 455601, and the Office of Naval Research (Code 418), Purchase Order 6-0081.

C. J. HUMPHREYS
Head, Research Department

ABSTRACT

The need is cited for an efficient, easily constructed broad-band VLF transmitting antenna for ionospheric and other research. A multiconductor horizontal dipole is investigated experimentally and theoretically. The radiated E-field equations are derived for the terminated dipole, and field-strength measurements made out to 1400 km confirm the equations. Two such dipoles (a 5-conductor over soil of 16 mmho/m conductivity, and another with 10 conductors over a lava bed of 0.8 mmho/m conductivity) were constructed in the California desert. Measurements made yielded design data: impedance measurements to obtain propagation constants, bandwidth, attenuation per unit length, and mutual and characteristic impedances. Methods of improving efficiency of the horizontal dipole are discussed.

CONTENTS

	<u>Page</u>
Introduction	1
Radiated Fields	1
Antenna Patterns	4
Field-Site Antenna	5
Lava-Bed Antenna	5
Improvement of Antenna Bandwidth and Efficiency	7
Parallel Conductors	8
Multiple Conductors	8
Ground-Level Conductor	8
Capacitance Loading	8
Conclusions	9

7 March 1966

ERRATA

NOIC Report 638, BROAD-BAND VLF TRANSMITTING TERMINATED DIPOLE, by E. W. Seeley, Research Department, Naval Ordnance Laboratory, Corona, California, 7 February 1966.

Use pen and ink to make the following corrections.

<u>Page</u>	<u>Correction</u>
Abstract.	In sixth line, change "5-conductor" to read "10-conductor." In seventh line, change "10 conductors" to read "5 conductors."
5, LAVA-BED ANTENNA	In second line, change "0.80/m" to read "0.8 mmho/m."
8, MULTIPLE CONDUCTORS . .	Change third sentence to read "Measurements of the radiated field strength of five conductors at 123 km range showed that the efficiency was five times that of the single conductor, with the same input power."

INTRODUCTION

An efficient, easily constructed broad-band VLF antenna is needed for (1) ionospheric physics research; (2) VLF propagation studies such as vertical and oblique sounding of the ionosphere, where it is important to transmit, nearly simultaneously, frequencies across the VLF band; (3) world-wide communication; and (4) world-wide time standard.

There are, at present, no very efficient broad-band VLF antennas; the most efficient are the Navy communications antennas. These are large, top-loaded monopoles, which at best are 50 percent efficient, have a very narrow (0.4 percent) bandwidth, and cost approximately \$100 million each. Obviously, the cost places such antennas out of reach of the low-budget experimenter.

This report discusses a horizontal dipole antenna that is easily constructed and can be made very broad-band and moderately efficient. Some experiments performed with an antenna of this type are described in subsequent paragraphs.

RADIATED FIELDS

The field radiated by a conductor in free space, with uniform current distribution along its incremental length, is

$$E_h = j \frac{60\pi(I\ell)}{R\lambda} \sin \phi \quad (1)$$

where

E_h = horizontally polarized E-field

I = antenna current

ℓ = unit length

R = range

λ = wavelength

ϕ = angle from conductor axis

With the conductor brought down to a practical operating height, the radiated field must be modified by the earth's reflection coefficient.¹ In the elevation plane

$$E_h = j \frac{60\pi}{R\lambda} (Il) \left(\frac{2u}{u + \sin \phi} \right) \sin \phi \quad (2)$$

where

$$u = \sqrt{\frac{\omega \epsilon_0}{j\sigma}}$$

in which ϵ_0 is the dielectric constant of free space and σ is the conductivity of the soil.

For an antenna of finite length the propagation constants of the conductor over earth must be considered. The incremental current moment Il is summed over the antenna length, L , by

$$(Il) = -I_{in} \left[\frac{e^{-\alpha L} \frac{e^{-j(\beta_1 - \beta \cos \phi)L}}{\alpha + j(\beta_1 - \beta \cos \phi)} - 1 \right] \quad (3)$$

where

α = antenna attenuation

$\beta = \frac{2\pi}{\lambda}$ free-space phase constant

$\beta_1 = \frac{2\pi}{(v/c)\lambda}$ antenna phase constant

In the term

$$\beta_1 = \frac{2\pi}{(v/c)\lambda}$$

v = wave velocity along antenna

c = wave velocity in free space

¹Golden, R. M., R. S. MacMillan, and W. V. T. Rusch, "A VLF Antenna for Generating a Horizontally Polarized Radiation Field," Technical Report No. 2, Contract AF 18(600)1552, California Institute of Technology (10 July 1957). Wait, J. R., "The Electromagnetic Fields of a Horizontal Dipole in the Presence of a Conducting Half-Space," Can. J. Phys., Vol. 39 (1961), pp. 1017-28.

Therefore

$$E_h = -j \frac{120\pi I_{in} U \sin \phi}{R\lambda(U + \sin \phi)} \left[\frac{e^{-\alpha L} e^{-j(\beta_1 - \beta \cos \phi)L}}{\alpha + j(\beta_1 - \beta \cos \phi)} - 1 \right] \quad (4)$$

is the radiated field in the elevation plane from a conductor over the ground, end-fed, and terminated in its characteristic impedance.

A dipole may be formed with two such conductors laid in opposite directions from the feed point. An extra term must be added to Eq. 4 for the radiated field

$$E_h = -j \frac{120\pi I_{in} U \sin \phi}{R\lambda(U + \sin \phi)} \left[\frac{e^{-\alpha L} e^{-j(\beta_1 - \beta \cos \phi)L}}{\alpha + j(\beta_1 - \beta \cos \phi)} - 1 \right. \\ \left. + \frac{e^{-\alpha L} e^{-j(\beta_1 + \beta \cos \phi)L}}{\alpha + j(\beta_1 + \beta \cos \phi)} - 1 \right] \quad (5)$$

This horizontally polarized radiated field, commonly called the sky wave, is zero in the horizontal plane. The vertically polarized ground wave present in the horizontal plane can be derived in a similar manner; however, the reflection coefficient term is just $2U$ in the case of the ground wave and maximum radiation is off the end of the conductor.

Therefore, the radiated field for an end-fed antenna is

$$E_v = -j \frac{120\pi I_{in} U}{R\lambda} \cos \theta \left[\frac{e^{-\alpha L} e^{-jL(\beta_1 - \beta \cos \theta)}}{\alpha + j(\beta_1 - \beta \cos \theta)} - 1 \right] \quad (6)$$

For a dipole terminated in its characteristic impedance the ground-wave field is

$$E_v = -j \frac{120\pi I_{in} U \cos \theta}{R\lambda} \left[\frac{e^{-\alpha L} e^{-jL(\beta_1 - \beta \cos \theta)}}{\alpha + j(\beta_1 - \beta \cos \theta)} - 1 \right. \\ \left. + \frac{e^{-\alpha L} e^{-jL(\beta_1 + \beta \cos \theta)}}{\alpha + j(\beta_1 + \beta \cos \theta)} - 1 \right] \quad (7)$$

ANTENNA PATTERNS

The above equations were programmed for the computer and several patterns, normalized to $120\pi l/R$, were computed for specific antennas. Figure 1 shows the shape of the elevation pattern of a terminated dipole 10 km in length that will be constructed on the Island of Hawaii for long-range propagation measurements. Figure 2 gives the azimuth pattern of that antenna, and Table 1 lists its propagation constants.

TABLE 1. Propagation Constants
for Island Dipole

$f(\text{kc})$	$\sigma(\mathcal{U}/\text{m})$	$\frac{v}{c}$
10	0.4×10^{-3}	0.6
20	0.43×10^{-3}	0.6
30	0.50×10^{-3}	0.6

The elevation and azimuth patterns of an end-fed dipole antenna laid on a lava bed in the California desert are given in Figs. 3 and 4, respectively. Table 2 contains the measured propagation constants and soil conductivity.

TABLE 2. Propagation Constants
for Desert Dipole

$f(\text{kc})$	$\sigma(\mathcal{U}/\text{m})$	$\frac{v}{c}$
10.9	0.8×10^{-3}	0.72
20.6	0.9×10^{-3}	0.73
32.7	1.0×10^{-3}	0.76

FIELD-SITE ANTENNA

When study of the problem of radiating VLF was first begun, measurements were made on a short dipole (2 km long) lying on the ground near the California desert NOLC field site. Impedance and radiation measurements were made to determine certain parameters of horizontal dipoles located on or near the ground. In general, the efficiency was found to be very low—on the order of a few thousandths of a percent—compared with that of a perfect monopole, but the efficiency was increased about 10 times when 10 dipoles were laid parallel. Mutual impedance between conductors tends to reduce the overall antenna efficiency. Mutual impedance measurements indicated only a few ohms when the dipoles were about 100 ft apart (Fig. 5).

The grounded antenna propagation constants were determined to be approximately 5 percent loss/km, and v/c of 0.5; the latter increased to 0.63 when the antenna was elevated 6 in. The characteristic impedance for a single-conductor antenna was approximately 300 Ω when lying on the ground; because of low mutual impedance Z_m , the impedance decreased linearly when additional dipoles were connected in parallel. The ground conductivity σ was determined to be 16 mmho/m, which is disadvantageous for the horizontal dipole.

LAVA-BED ANTENNA

Conductivity measurements were made on a lava bed 15 mi. north of the NOLC field site and the σ was 20 times lower (0.8 Ω /m) than at the field site. A five-conductor antenna 4.4 km long was constructed on the lava bed. Mutual-impedance measurements were made and it was determined that the conductors should be placed 500 ft apart to minimize mutual impedance to a few ohms/km.

Impedance measurements over the VLF band gave the propagation constants needed to compute the radiated field patterns. The characteristic impedance was about 320 Ω when the conductor was on the lava and 500 Ω when it was elevated 4 ft. The wave velocity along the antenna was 0.43c when the antenna was down, and 0.74c when elevated.

Current attenuation along the elevated antenna was determined to be approximately 50 percent less than when it was lying on the ground (see Fig. 6).

Radiated field strengths during daylight hours were measured off the end of the antenna at approximately 100 km intervals to a total range of 1400 km (Fig. 7). The signals were measured at the maximum range of 1400 km by using an audio-amplifier driver applying 300 w into the

antenna. The usual interference between the ground wave and sky wave that causes a null at 200-300 km range is changed somewhat by the sky wave leaning toward the horizon at the higher VLF frequencies. A deep interference null at 300 km is evident in the 10.9 kc propagation curve; at the 20.6 and 32.7 kc frequencies, the nulls have been displaced to a higher range.

The equations derived earlier in this report were used to compute the ground-wave field strength at 43 km range, where the ground wave was predominant. It is noted from Table 3 that the computed values are in close agreement with the measured values.

TABLE 3. Radiated Field Strength
of Lava-Bed Antenna

Antenna Radiation	f(kc)	Theoretical ($\mu\text{v/m}$)	Measured ($\mu\text{v/m}$)
Ground Wave (43 km range)	10.9	60	68.6
	20.6	139	148
	32.7	248	220
Sky Wave (1400 km range)	10.9	1.76	1.3
	20.6	3.96	4.0
	32.7	6.96	2.0

The sky-wave field strengths at 1400 km range were computed; as might be expected, the equations do not hold for great distances. However, close agreement exists between theoretical and measured field strengths at the lower range of VLF frequencies, but not at the higher.

In Table 4, the field strengths of four antennas, including the lava-bed dipole, are compared with those of a perfect quarter-wave monopole to determine the comparative efficiency of the lava-bed dipole. The power radiated by a perfect $\lambda/4$ monopole is

$$P_r = \left(\frac{E_v R}{9500} \right)^2$$

where E_v is measured in $\mu\text{v/m}$ and R in km.

TABLE 4. Lava-Bed Antenna Efficiency

Antenna	f(kc)	σ (Measured Ω/m)	η (percent)
Desert Floor: 2 km length, 10 conductors, center fed, $h = 0.15$ m	30.5	1.6×10^{-2}	0.0023
Desert Lava Bed: 4.4 km length, 5 conductors, end fed, $h = 1.2$ m	10.9	7×10^{-4}	0.031
	20.6	8×10^{-4}	0.15
	32.7	9×10^{-4}	0.35
Hawaiian: 10 km length, 6 conductors, center fed, $h = 0$	10.9	4×10^{-4}	0.225
	20.6	4.3×10^{-4}	1.42
	32.7	4.8×10^{-4}	5.09
Sierra Nevadas: 10 km length, 6 conductors, center fed, $h = 0$	10.9	0.79×10^{-4}	1.14
	20.6	1.10×10^{-4}	5.55
	32.7	1.37×10^{-4}	17.80

The Hawaiian Island dipole is being built for use in the VLF propagation study program when 10 frequencies over the VLF band will be transmitted almost simultaneously. The increase in efficiency of this and the antenna in the Sierra Nevada Mountains near Courtright Lake (east of Fresno, California) is attributed to the lower soil conductivity (σ) and the longer antenna lengths, as compared with the lava-bed measurements.

IMPROVEMENT OF ANTENNA BANDWIDTH AND EFFICIENCY

In addition to locating the antenna over an area of the lowest possible soil conductivity and terminating it in its characteristic impedance for broad bandwidth, other methods are available for improving its efficiency.

PARALLEL CONDUCTORS

For a given input power, the antenna current can be increased only by lowering the input impedance—in this case, the antenna's characteristic impedance Z_0 . This can be accomplished effectively by using parallel conductors, but only if the spacing between the conductors is sufficient to minimize mutual resistance. At VLF, this spacing is 100 to 1000 ft, depending upon soil conductivity—the lower the σ , the greater must be the spacing to maintain Z_m below a few ohms/km. When the conductor is elevated slightly, Z_m is greatly reduced (Fig. 5).

MULTIPLE CONDUCTORS

The advantage of using multiple parallel conductors is shown in Fig. 8, which shows the input impedance Z_{in} of a single conductor compared with that of five conductors. The Z_{in} of the latter is one-fifth that of the single conductor. Measurements showed that the radiated field strength of five conductors at 123 km range was five times that of the single conductor, with the same input power. Although increasing the number of conductors increases the antenna efficiency, diminishing returns may be expected when using more than 10 conductors because of the large amount of wire required.

GROUND-LEVEL CONDUCTOR

Another method of increasing antenna efficiency is to lay the conductor along the ground—thereby increasing the conductor-to-ground capacitance and lowering the Z_0 . In an experiment with a single conductor 4.4 km long laid on the lava bed, the radiation efficiency at 30 kc was one and one-half times greater than when the conductor was elevated 4 ft. For the latter, the $500 \Omega Z_0$ was more than one and one-half times the $320 \Omega Z_0$ of the conductor on the ground.

The current attenuation is greater when the antenna is on the ground; however, for an antenna 4 to 5 km in length the efficiency increase resulting from the lower Z_0 is much greater than the efficiency loss caused by the lowering of the average antenna current. For very long conductors, a limit to the gain in efficiency of the ground-level antenna is reached at the high end of the VLF band. In any case, the antenna usually must be elevated to prevent animals from damaging the conductors.

CAPACITANCE LOADING

Another method of increasing efficiency is by loading the conductor with capacitors in series; because

$$Z_o = \sqrt{\frac{L}{C}}$$

this will reduce conductor inductance and lower Z_o . Although this method has not been investigated fully, it is likely that the limiting factor may be a reduction in bandwidth.

Large bandwidth possibly may be obtained by the stagger-tuning of multiconductor dipoles of varied lengths. However, in locations where the soil conductivity is very low, it may be difficult to ground the antenna in its characteristic impedance.

CONCLUSIONS

The horizontal dipole, with modifications recommended in this report, is a useful VLF transmitting antenna for research in ionospheric physics, world-wide navigation systems, world-wide time standard system, and the like. Such an antenna is easily constructed and can be made very broad-band and reasonably efficient.

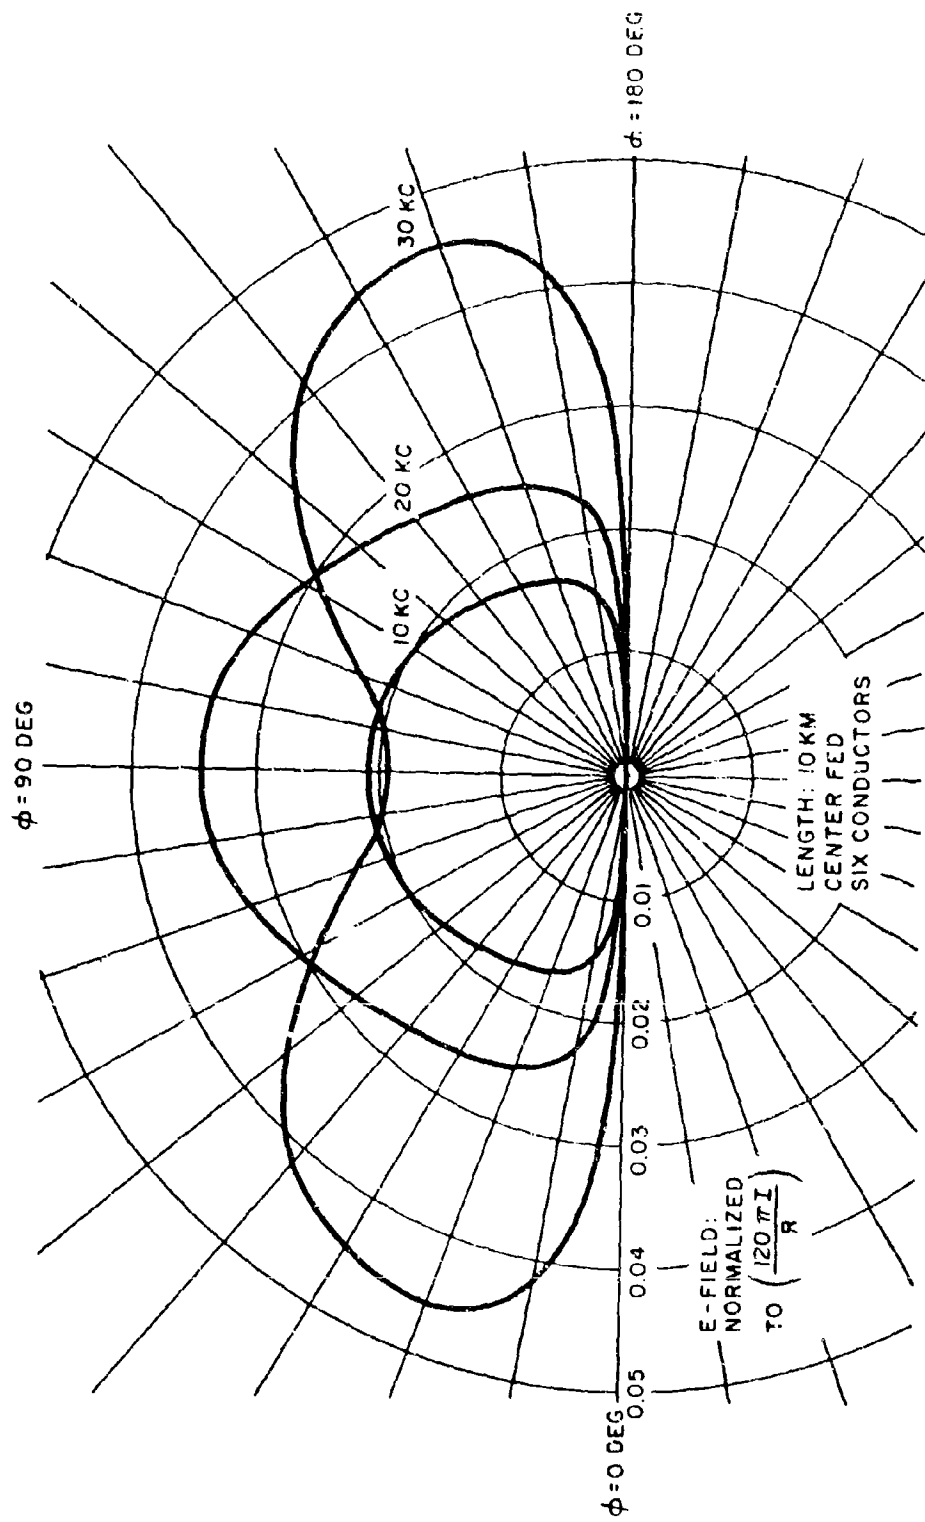


FIGURE 1. Elevation Pattern for Hawaiian Island Dipole

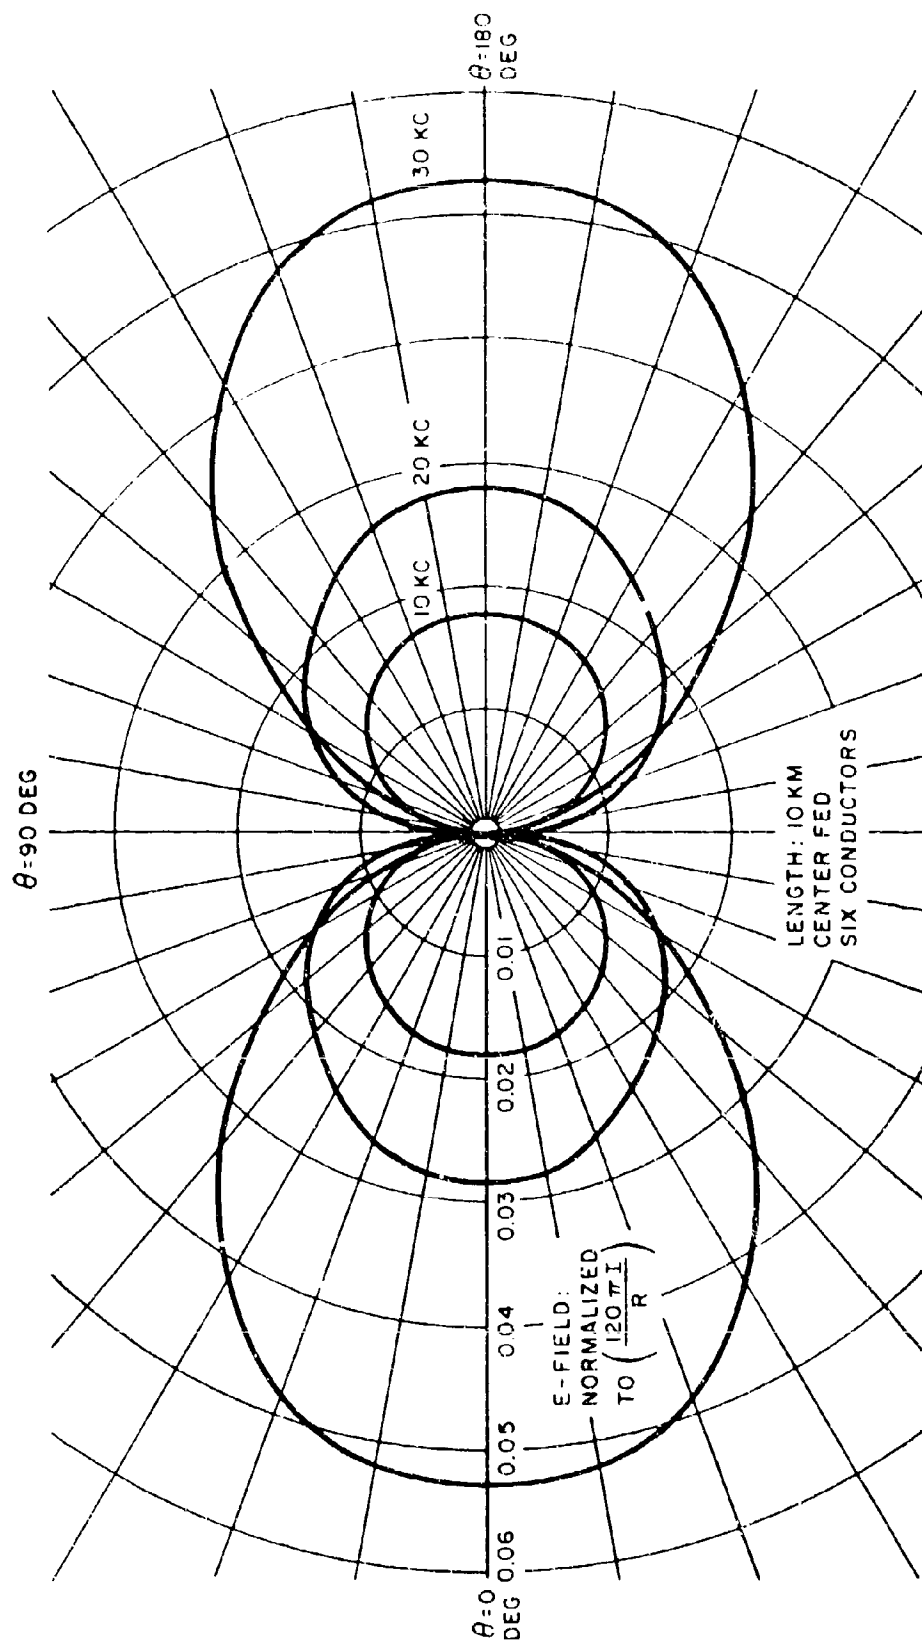


FIGURE 2. Azimuth Pattern for Hawaiian Island Dipole

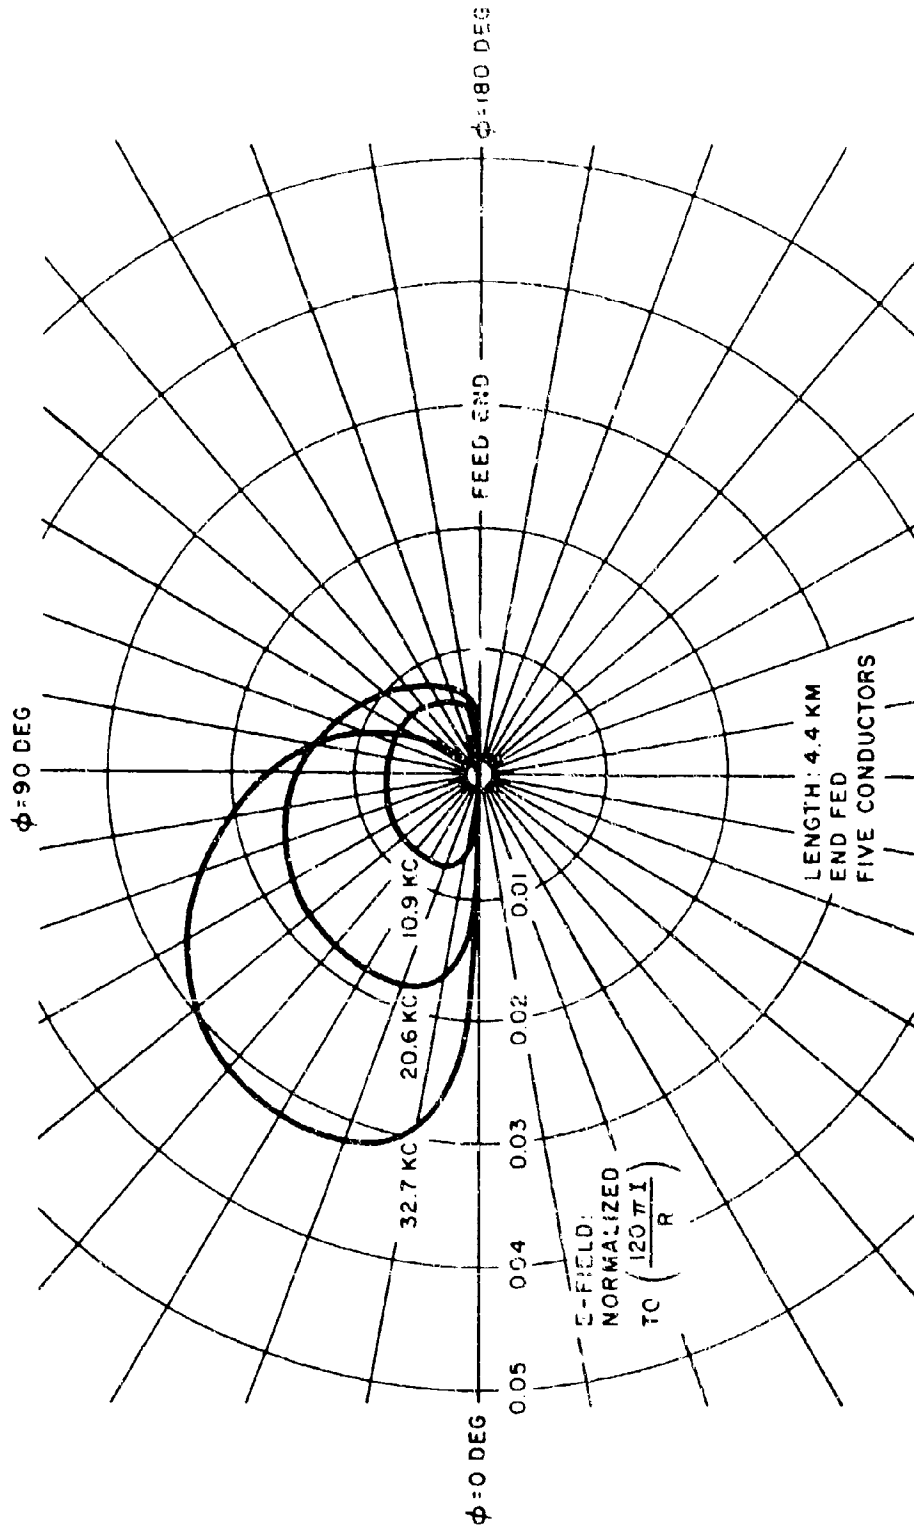


FIGURE 3. Elevation Pattern for Lava-Bed Antenna

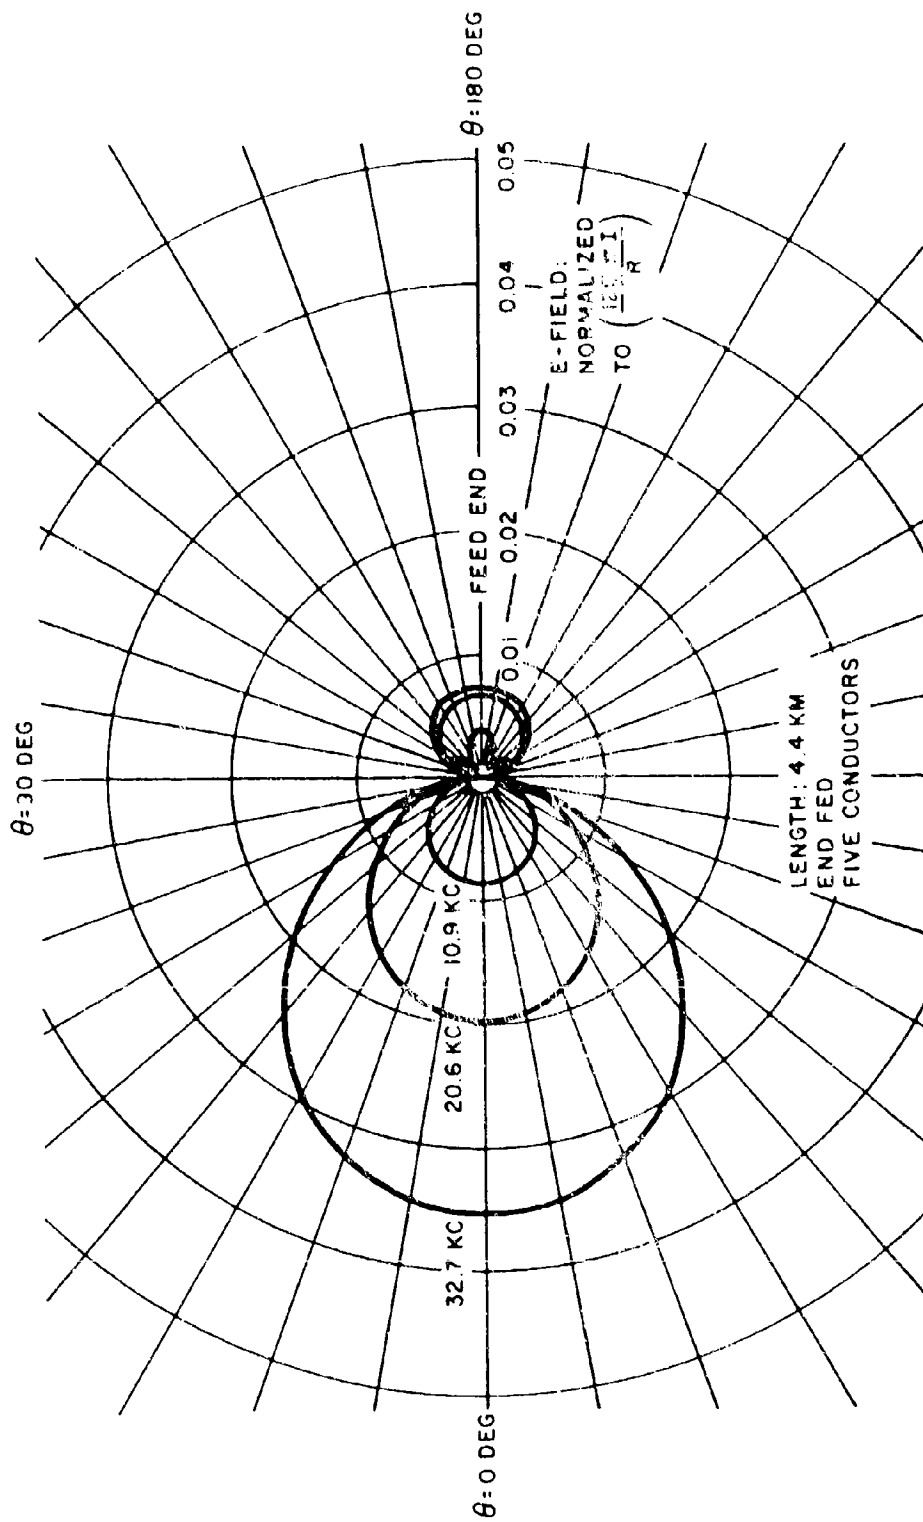


FIGURE 4. Azimuth Pattern for Lava-Bed Antenna

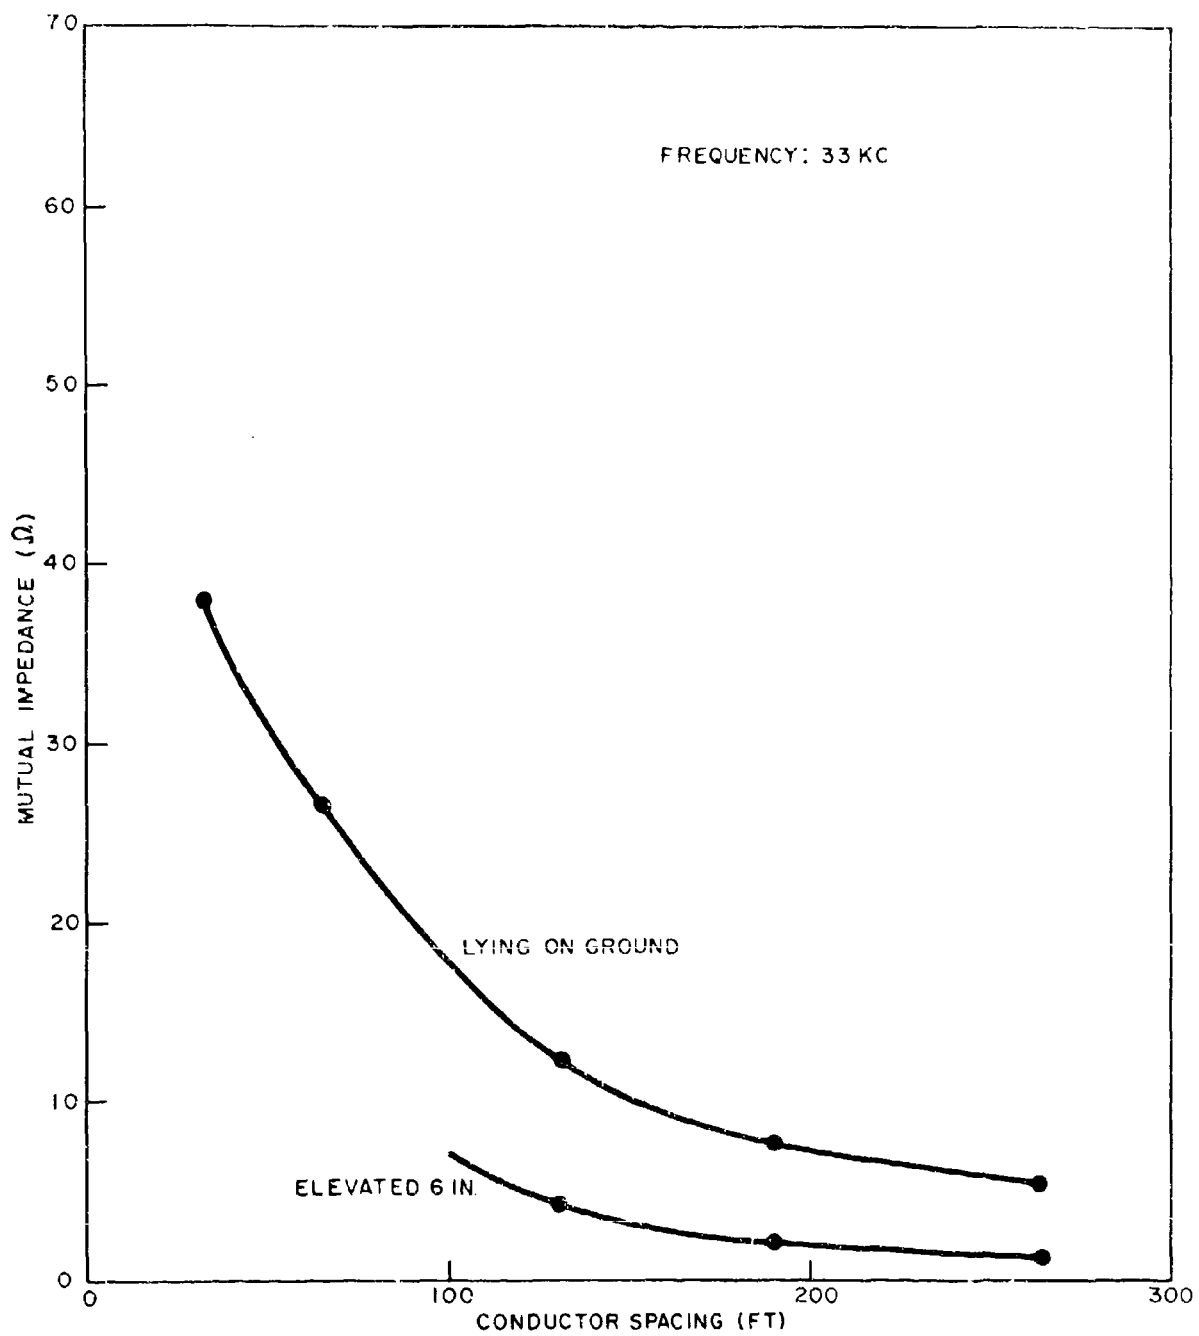


FIGURE 5. Mutual Impedance of Two-Conductor Dipole

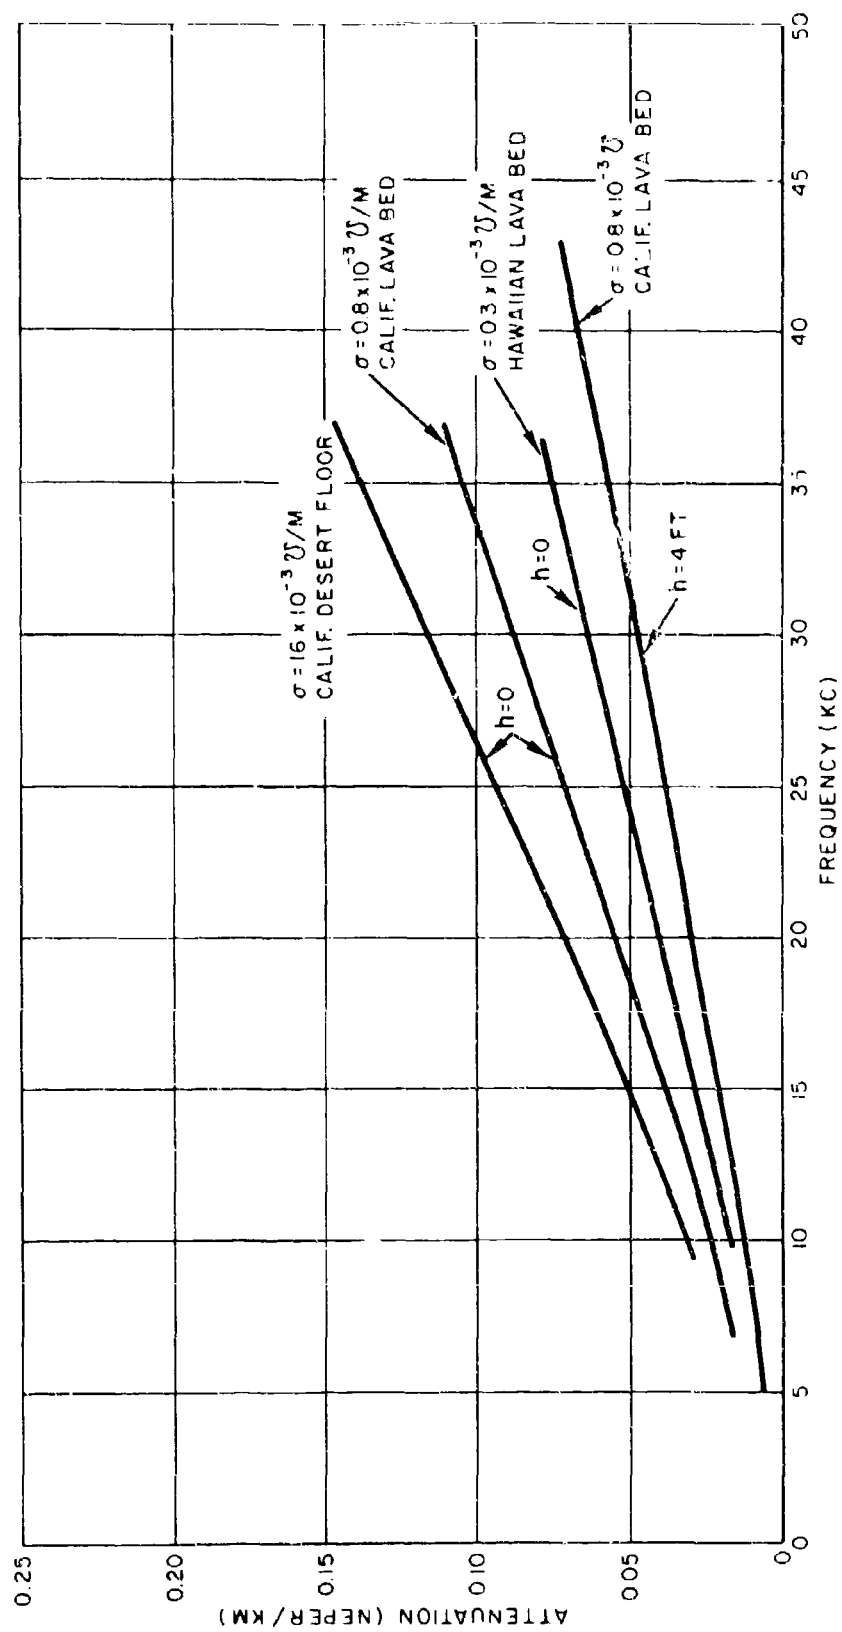


FIGURE 6. Horizontal Conductor Attenuation

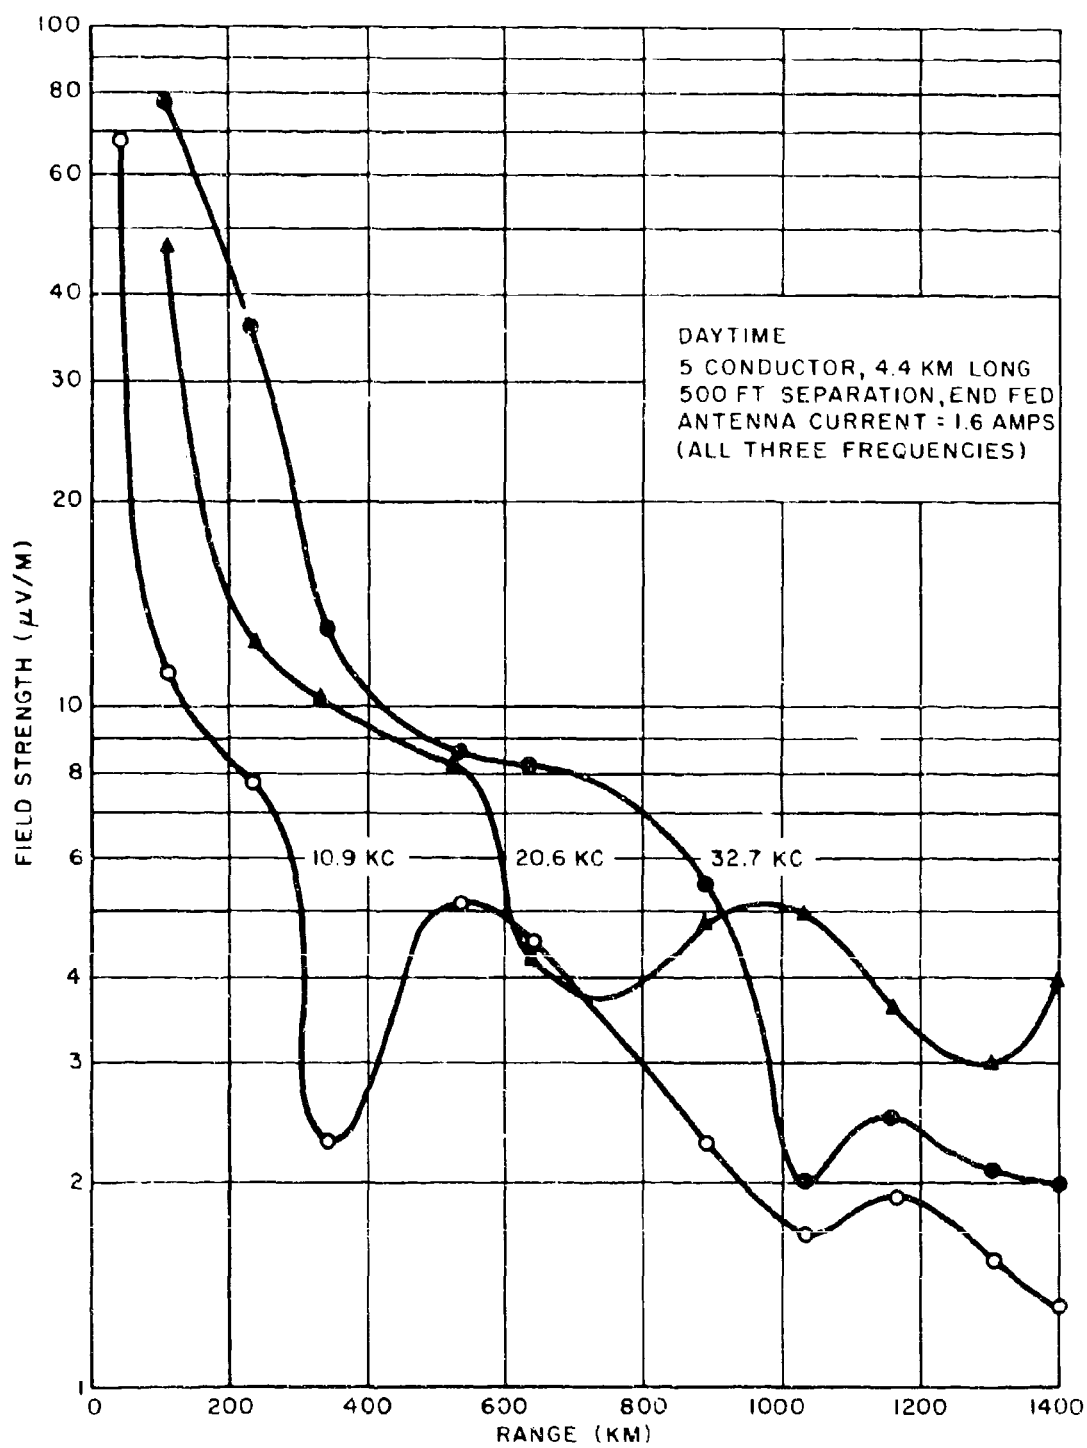


FIGURE 7. Propagated Field Strength of Lava-Bed Antenna

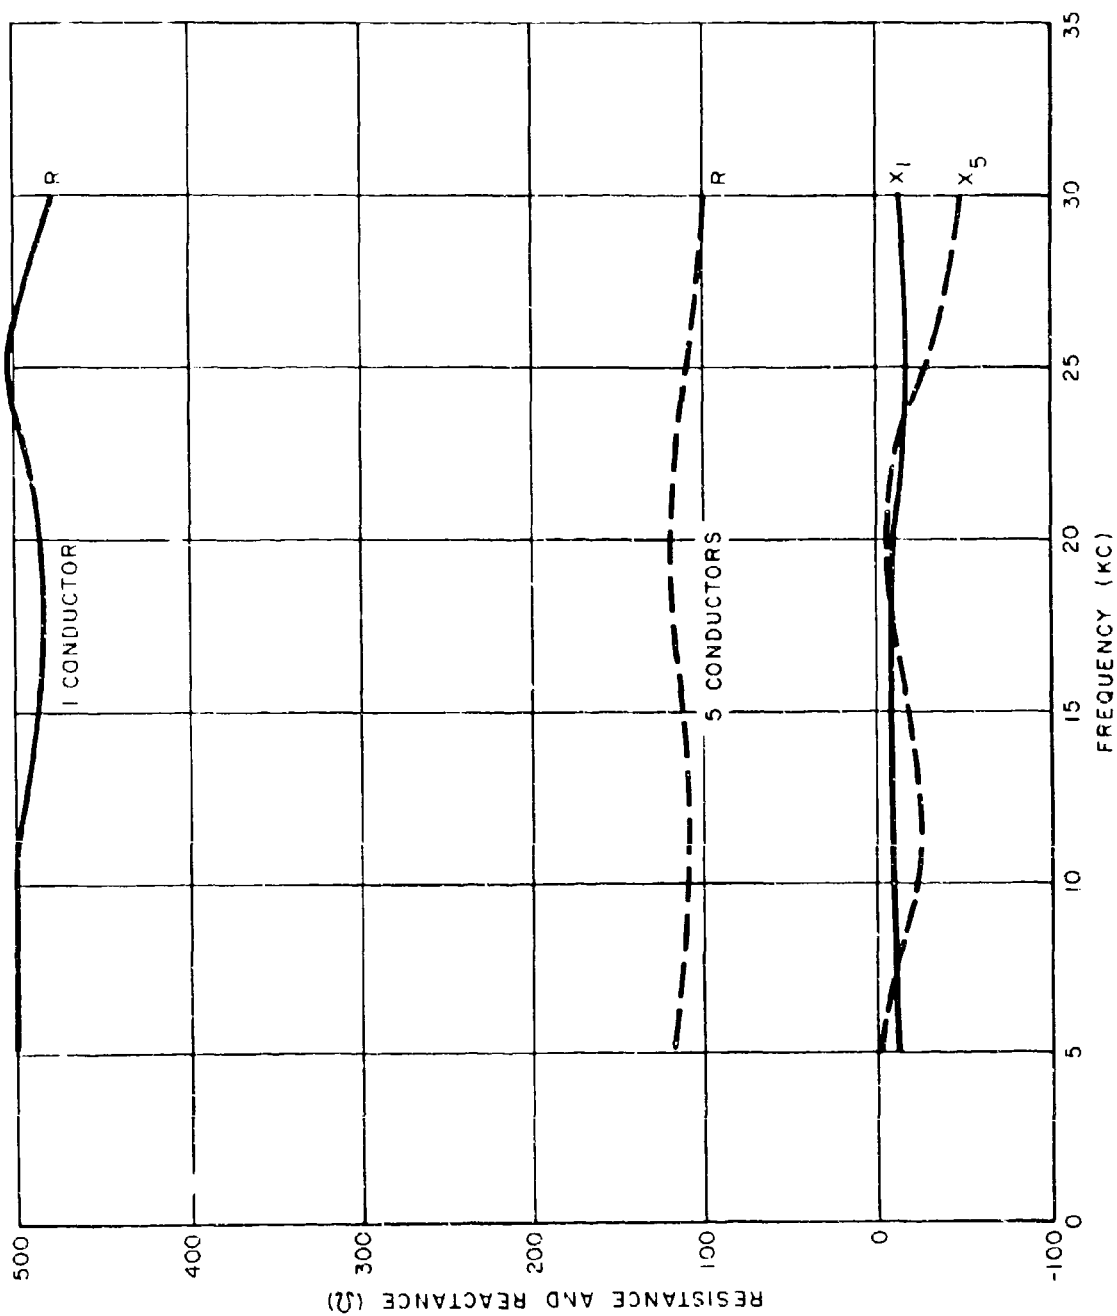


FIGURE 8. Resistance and Reactance of Lava-Bed Antenna

DOCUMENT CONTROL DATA - R&D

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

1 ORIGINATING ACTIVITY (Corporate author) Naval Ordnance Laboratory Corona, California		2a REPORT SECURITY CLASSIFICATION UNCLASSIFIED	
		2b GROUP	
3 REPORT TITLE BROAD-BAND VLF TRANSMITTING TERMINATED DIPOLE			
4 DESCRIPTIVE NOTES (Type of report and inclusive dates) Research			
5 AUTHOR(S) (Last name, first name, initial) Seeley, Elwin W.			
6 REPORT DATE 7 February 1966		7a TOTAL NO OF PAGES 20	7b NO OF REFS 2
8a CONTRACT OR GRANT NO		9a ORIGINATOR'S REPORT NUMBER(S) NOLC 638	
b PROJECT NO DCA MIPR No. 43-4-104 and c ONR-418 P.O. 6-0081 d		9b OTHER REPORT NO(S) (Any other numbers that may be assigned this report)	
10 AVAILABILITY/LIMITATION NOTICES Distribution of this document is unlimited			
11 SUPPLEMENTARY NOTES		12 SPONSORING MILITARY ACTIVITY Defense Communications Agency	
13 ABSTRACT The need is cited for an efficient, easily constructed broad-band VLF transmitting antenna for ionospheric and other research. A multiconductor horizontal dipole is investigated experimentally and theoretically. The radiated E-field equations are derived for the terminated dipole, and field-strength measurements made out to 1400 km confirm the equations. Two such dipoles (a 5-conductor over soil of 16 mmho/m conductivity, and another with 10 conductors over a lava bed of 0.8 mmho/m conductivity) were constructed in the California desert. Measurements made yielded design data: impedance measurements to obtain propagation constants; bandwidth; attenuation per unit length, and mutual and characteristic impedances. Methods of improving efficiency of the horizontal dipole are discussed.			

14	KEY WORDS	LINK A		LINK B		LINK C	
		ROLE	WT	ROLE	WT	ROLE	WT
VLF Antenna Transmitting Broad-band Dipole							

INSTRUCTIONS

1. **ORIGINATING ACTIVITY:** Enter the name and address of the contractor, subcontractor, grantee, Department of Defense activity or other organization (*corporate author*) issuing the report.

2a. **REPORT SECURITY CLASSIFICATION:** Enter the overall security classification of the report. Indicate whether "Restricted Data" is included. Marking is to be in accordance with appropriate security regulations.

2b. **GROUP:** Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forces Industrial Manual. Enter the group number. Also, when applicable, show that optional markings have been used for Group 3 and Group 4 as authorized.

3. **REPORT TITLE:** Enter the complete report title in all capital letters. Titles in all cases should be unclassified. If a meaningful title cannot be selected without classification, show title classification in all capitals in parenthesis immediately following the title.

4. **DESCRIPTIVE NOTES:** If appropriate, enter the type of report, e.g., interim, progress, summary, annual, or final. Give the inclusive dates when a specific reporting period is covered.

5. **AUTHOR(S):** Enter the name(s) of author(s) as shown on or in the report. Enter last name, first name, middle initial. If military, show rank and branch of service. The name of the principal author is an absolute minimum requirement.

6. **REPORT DATE:** Enter the date of the report as day, month, year, or month, year. If more than one date appears on the report, use date of publication.

7a. **TOTAL NUMBER OF PAGES:** The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.

7b. **NUMBER OF REFERENCES:** Enter the total number of references cited in the report.

8a. **CONTRACT OR GRANT NUMBER:** If appropriate, enter the applicable number of the contract or grant under which the report was written.

8b, 8c, & 8d. **PROJECT NUMBER:** Enter the appropriate military department identification, such as project number, subproject number, system numbers, task number, etc.

9a. **ORIGINATOR'S REPORT NUMBER(S):** Enter the official report number by which the document will be identified and controlled by the originating activity. This number must be unique to this report.

9b. **OTHER REPORT NUMBER(S):** If the report has been assigned any other report numbers (either by the originator or by the sponsor), also enter this number(s).

10. **AVAILABILITY LIMITATION NOTICES:** Enter any limitations on further dissemination of the report, other than those

imposed by security classification, using standard statements such as:

- (1) "Qualified requesters may obtain copies of this report from DDC."
- (2) "Foreign announcement and dissemination of this report by DDC is not authorized."
- (3) "U. S. Government agencies may obtain copies of this report directly from DDC. Other qualified DDC users shall request through _____."
- (4) "U. S. military agencies may obtain copies of this report directly from DDC. Other qualified users shall request through _____."
- (5) "All distribution of this report is controlled. Qualified DDC users shall request through _____."

If the report has been furnished to the Office of Technical Services, Department of Commerce, for sale to the public, indicate this fact and enter the price, if known.

11. **SUPPLEMENTARY NOTES:** Use for additional explanatory notes.

12. **SPONSORING MILITARY ACTIVITY:** Enter the name of the departmental project office or laboratory sponsoring (paying for) the research and development. Include address.

13. **ABSTRACT:** Enter an abstract giving a brief and factual summary of the document indicative of the report, even though it may also appear elsewhere in the body of the technical report. If additional space is required, a continuation sheet shall be attached.

It is highly desirable that the abstract of classified reports be unclassified. Each paragraph of the abstract shall end with an indication of the military security classification of the information in the paragraph, represented as (TS), (S), (C), or (U).

There is no limitation on the length of the abstract. However, the suggested length is from 150 to 225 words.

14. **KEY WORDS:** Key words are technically meaningful terms or short phrases that characterize a report and may be used as index entries for cataloging the report. Key words must be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location, may be used as key words but will be followed by an indication of technical context. The assignment of links, roles, and weights is optional.