

AD



Research and Development Technical Report
ECOM-0226-3

AD 665381

TRANSVERSE-WAVE HIGH-POWER TUBE

QUARTERLY REPORT NO. 3

By

C. BURTON CRUMLY and ROY A. LARSEN

JANUARY 1968

ECOM

UNITED STATES ARMY ELECTRONICS COMMAND • FORT MONMOUTH, N.J.
CONTRACT DAAB07-67-C-0226

ZENITH RADIO RESEARCH CORP.

DISTRIBUTION STATEMENT

This document has been approved for public release and sale; its distribution is unlimited.

Reproduced by the
CLEARINGHOUSE
for Federal Scientific & Technical
Information Springfield Va. 22151

Reports Control Symbol
OSD-1366

TECHNICAL REPORT ECOM-0226-3

January 1968

TRANSVERSE-WAVE HIGH-POWER TUBE

THIRD QUARTERLY REPORT

1 July 1967 - 31 September 1967

Report No. 8

Contract No. DAAB07-67-C-0226

DA Project No. 1H6-22001-A-055-04-82

Prepared By

C. Burton Crumly and Roy A. Larsen

Zenith Radio Research Corporation

Menlo Park, California

For

U.S. Army Electronics Command, Fort Monmouth, New Jersey 07703

DISTRIBUTION STATEMENT

This document has been approved for public release and sale; its distribution is unlimited.

ABSTRACT

Research and development work is described on a traveling-wave power amplifier tube employing transverse-wave interaction between the negative synchronous wave and a circuit wave on a balanced structure. The theoretical advantage in this arrangement is the possibility of high-power amplification with high overall efficiency, due to the lack of longitudinal or transverse velocity modulation in the spent beam.

Final assembly of the first tube is described along with the difficulties encountered.

Processing is also described and the tube is shown mounted on the vacuum station.

TABLE OF CONTENTS

<u>Section</u>		<u>Page</u>
	Abstract	i
	Table of Contents	ii
	List of Illustrations	iii
1	Statement of Problem	1
2	Background	1
3	Tube Assembly	1
4	Tube Processing	2
5	Conclusions	2
6	Future Plans	2

LIST OF ILLUSTRATIONS

<u>Fig. No.</u>		<u>Page</u>
1	Prototype Transverse-Wave Tube Mounted On Vacuum Station	3
2	Close-up View of Vacuum Station Mounting	4

1. STATEMENT OF PROBLEM

The purpose of this program is to conduct research and development of a theoretical and experimental nature, on a transverse-wave high-power amplifier tube in accordance with U. S. Army Electronics Command, Electron Tubes Division Technical Guideline No. MW-52A dated 28 June 1966, entitled "Cyclotron and Synchronous Wave Devices Investigation."

The first task of this program is to complete and test an experimental model to confirm the feasibility of the device and to demonstrate its ability to meet the performance goals. These are 1 kw of rf power at a depressed collector efficiency of at least 60% and with at least 20 db of saturated gain. This work will be performed at S-band.

Performance of the first model will help determine subsequent design and the feasibility of extending the design to X-band at a 10 kw level of power.

2. BACKGROUND

Design corrections were instituted during the previous period. This included changing the electro-formed waveguide sections to brazed assemblies of stainless steel and changing the window frame design. These units were completed and final assembly was initiated.

X-band calculations indicated that the gun requirements are reasonable and that the X-band circuit can be of a practical size.

3. TUBE ASSEMBLY

All of the work performed during this quarter was devoted to the final assembly of the prototype tube. Major difficulty was encountered with the waveguide windows and a further design modification was necessary before it was possible to complete the collector and gun assemblies and cycle them through the bake-out temperature range. The design change consisted primarily of making the kovar window frame an integral part of the waveguide and moving the window location away from the heliarc joint.

No difficulty was encountered in the stacking of the 1100-piece circuit section. Also the attenuator sections were easily situated. Further, the circuit stack was successfully sintered and placed in its stainless steel housing.

In general, heliarcing of the various sections of the tube proceeded as expected except in the region of the window. This difficulty was alleviated in the design modification mentioned previously.

4. TUBE PROCESSING

It required a little over one week to process the tube. It was discovered at tip-off that a leak had developed in a kovar-to-stainless steel seal; also the input window developed a leak. These were patched by using glyptal and the tube was reprocessed.

The tip-off was unsuccessful because the tool malfunctioned. It was necessary to put a new tubulation on the tube and go through the process cycle again. Figures 1 and 2 show the tube on the vacuum station prior to tip-off. A new tip-off tool was obtained and this time the procedure was successful. The tube is now under test.

5. CONCLUSIONS

The tube assembly was more difficult than had been anticipated. With the design changes that have been incorporated, and the experience that has been gained, the assembly of subsequent models should be much easier.

Processing was less time consuming than had been expected with the exception of the problems caused by the leak in the seal and the window and malfunctioning tip-off tool.

6. FUTURE PLANS

The subsequent quarter will be devoted to the testing and evaluation of the prototype tube.

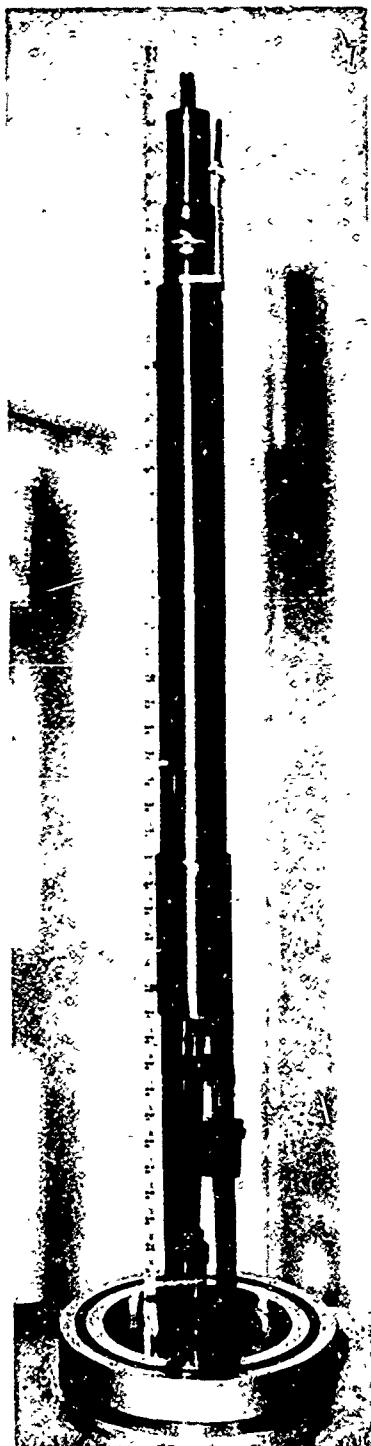


Fig. 1--Prototype transverse-wave tube mounted
on vacuum station



Fig. 2--Close-up view of vacuum station mounting.

Security Classification

DOCUMENT CONTROL DATA - R&D		
(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)		
1. ORIGINATING ACTIVITY (Corporate author) Zenith Radio Research Corporation 4040 Campbell Avenue Menlo Park, California 94025		2a. REPORT SECURITY CLASSIFICATION Unclassified
		2b. GROUP
3. REPORT TITLE TRANSVERSE-WAVE HIGH-POWER TUBE		
4. DESCRIPTIVE NOTES (Type of report and inclusive dates) Third Quarterly Report - 1 July 1967 - 31 September 1967		
5. AUTHOR(S) (Last name, first name, initial) C. Burton Crumly and Roy A. Larsen		
6. REPORT DATE January 1968	7a. TOTAL NO. OF PAGES 4	7b. NO. OF REFS
8a. CONTRACT OR GRANT NO. DAAB07-67-C-0226	8a. ORIGINATOR'S REPORT NUMBER(S)	
b. PROJECT NO. 1H6-22001-A-055-04		
c.	8b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report)	
d.	ECOM-0226-3	
10. AVAILABILITY/LIMITATION NOTICES This document has been approved for public release and sale; its distribution is unlimited.		
11. SUPPLEMENTARY NOTES	12. SPONSORING MILITARY ACTIVITY U. S. Army Electronics Command Fort Monmouth, New Jersey 07703 Attn: AMSEL-KL-TM	
13. ABSTRACT Research and development work is described on a traveling-wave power amplifier tube employing transverse-wave interaction between the negative synchronous wave and a circuit wave on a balanced structure. The theoretical advantage in this arrangement is the possibility of high-power amplification with high overall efficiency, due to the lack of longitudinal or transverse velocity modulation in the spent beam. Final assembly of the first tube is described along with the difficulties encountered. Processing is also described and the tube is shown mounted on the vacuum station.		

Security Classification

14. KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
Transverse-Wave Tube Traveling-Wave Tube High Power High Efficiency Depressed Collector Transverse-Wave Interaction Negative Synchronous Wave						

INSTRUCTIONS

1. **ORIGINATING ACTIVITY:** Enter the name and address of the contractor, subcontractor, grantee, Department of Defense activity or other organization (*corporate author*) issuing the report.

2a. **REPORT SECURITY CLASSIFICATION:** Enter the overall security classification of the report. Indicate whether "Restricted Data" is included. Marking is to be in accordance with appropriate security regulations.

2b. **GROUP:** Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forces Industrial Manual. Enter the group number. Also, when applicable, show that optional markings have been used for Group 3 and Group 4 as authorized.

3. **REPORT TITLE:** Enter the complete report title in all capital letters. Titles in all cases should be unclassified. If a meaningful title cannot be selected without classification, show title classification in all capitals in parenthesis immediately following the title.

4. **DESCRIPTIVE NOTES:** If appropriate, enter the type of report, e.g., interim, progress, summary, annual, or final. Give the inclusive dates when a specific reporting period is covered.

5. **AUTHOR(S):** Enter the name(s) of author(s) as shown on or in the report. Enter last name, first name, middle initial. If military, show rank and branch of service. The name of the principal author is an absolute minimum requirement.

6. **REPORT DATE:** Enter the date of the report as day, month, year; or month, year. If more than one date appears on the report, use date of publication.

7a. **TOTAL NUMBER OF PAGES:** The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.

7b. **NUMBER OF REFERENCES:** Enter the total number of references cited in the report.

8a. **CONTRACT OR GRANT NUMBER:** If appropriate, enter the applicable number of the contract or grant under which the report was written.

8b, 8c, & 8d. **PROJECT NUMBER:** Enter the appropriate military department identification, such as project number, subproject number, system numbers, task number, etc.

9a. **ORIGINATOR'S REPORT NUMBER(S):** Enter the official report number by which the document will be identified and controlled by the originating activity. This number must be unique to this report.

9b. **OTHER REPORT NUMBER(S):** If the report has been assigned any other report numbers (*either by the originator or by the sponsor*), also enter this number(s).

10. **AVAILABILITY/LIMITATION NOTICES:** Enter any limitations on further dissemination of the report, other than those imposed by security classification, using standard statements such as:

- (1) "Qualified requesters may obtain copies of this report from DDC."
- (2) "Foreign announcement and dissemination of this report by DDC is not authorized."
- (3) "U. S. Government agencies may obtain copies of this report directly from DDC. Other qualified DDC users shall request through _____."
- (4) "U. S. military agencies may obtain copies of this report directly from DDC. Other qualified users shall request through _____."
- (5) "All distribution of this report is controlled. Qualified DDC users shall request through _____."

If the report has been furnished to the Office of Technical Services, Department of Commerce, for sale to the public, indicate this fact and enter the price, if known.

11. **SUPPLEMENTARY NOTES:** Use for additional explanatory notes.

12. **SPONSORING MILITARY ACTIVITY:** Enter the name of the departmental project office or laboratory sponsoring (*paying for*) the research and development. Include address.

13. **ABSTRACT:** Enter an abstract giving a brief and factual summary of the document indicative of the report, even though it may also appear elsewhere in the body of the technical report. If additional space is required, a continuation sheet shall be attached.

It is highly desirable that the abstract of classified reports be unclassified. Each paragraph of the abstract shall end with an indication of the military security classification of the information in the paragraph, represented as (TS), (S), (C), or (U).

There is no limitation on the length of the abstract. However, the suggested length is from 150 to 225 words.

14. **KEY WORDS:** Key words are technically meaningful terms or short phrases that characterize a report and may be used as index entries for cataloging the report. Key words must be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location, may be used as key words but will be followed by an indication of technical context. The assignment of links, rules, and weights is optional.