

AD 69 3611

# FOREIGN TECHNOLOGY DIVISION



ON THE STARTING OF SUPERSONIC NOZZLES WITH THE AID OF  
CYLINDRICAL DIFFUSERS

by

V. Ye. Davidson and N. A. Chukhalo



D D C  
RECEIVED  
OCT 1 1969

Distribution of this document is unlimited. It may be released to the Clearinghouse, Department of Commerce, for sale to the general public.

Reproduced by the  
**CLEARINGHOUSE**  
for Federal Scientific & Technical  
Information Springfield Va. 22151

FTD-HT-23-142-69

## EDITED TRANSLATION

ON THE STARTING OF SUPERSONIC NOZZLES WITH  
THE AID OF CYLINDRICAL DIFFUSERS

By: V. Ye. Davidson and N. A. Chukhalo

English pages: 5

Source: Gidraeromekhanika (Hydroaeromechanics),  
No. 7, 1968, pp. 33-36.

Translated by: E. Harter/TDBRO-2

FTD-HT-23-142-69

Date 18 June 1969

THIS TRANSLATION IS A REPRODUCTION OF THE ORIGINAL FOREIGN TEXT EXCEPT FOR MINOR TYPICAL OR GRAMMATICAL CORRECTIONS. STATEMENTS OR OPINIONS EXPRESSED HEREIN ARE THOSE OF THE SOURCE AND DO NOT NECESSARILY EXPRESS THE POSITION OR OPINION OF THE FOREIGN TECHNOLOGY DIVISION.

PREPARED BY:  
TRANSLATION DIVISION  
FOREIGN TECHNOLOGY DIVISION  
OS-APR, ONR

61-ACCESSION NO.		66-DOCUMENT LOC		62-TITLE		63-SUBJECT AREA		64-AUTHOR/CO-AUTHORS		65-DATE OF INFO	
TT9000976				SUPERSONIC NOZZLES WITH THE AID OF CYLINDRICAL DIFFUSERS		20		DAVIDSON; V. YE.; 16-CHUKHALO, N. A.		1968	
62-SECURITY AND DOWNGRADING INFORMATION		63-SOURCE		64-CONTROL MARKINGS		65-PROJECT NO.		66-DOCUMENT NO.		67-HEADER CLAIM	
UNCL, O		GIDROAEROMEKHANIKA (RUSSIAN)		NONE		72301-78		FTD-HT-23-142-69			
68-REEL FRAME NO.		69-CHANGES		70-SECURITY MARKS		71-CLASSIFICATION		72-NO. OF PAGES		73-REVISION FREE	
1889 0829				UR		NONE		5			
69-CONTRACT NO.		70-REF ACQ. NO.		71-PUBLICATION DATE		72-TRANSLATION		73-ACQUISITION NO.			
65-AT8025406		94-06				NONE					
66-STEP NO.		67-ABSTRACT		68-ABSTRACT		69-ABSTRACT		70-ABSTRACT		71-ABSTRACT	
02-UR/3207/68/C00/007/0033/0036											
<p>(U) The efficiency of short cylindrical diffusers was experimentally investigated in a supersonic wind tunnel provided with exchangeable nozzles with a conical supersonic section designed for M equals 2; 2.5; 3.0; 3.5; 4.0; and 5.0 and a half cone angle of alpha equals 8 degrees for all M numbers. The diffuser lengths varied from one to eight calibers of the nozzle exit cross sections. Compressed nitrogen was used as the working substance. A graph of the ratio of the aerodynamic stagnation pressure during startup of a nozzle with diffusers to the relative diffuser length showed the advantage of using diffusers at higher nozzle M values. A diffuser length of up to 3-4 nozzle calibers practically exhausts the possibility of decreasing the starting pressure of nozzles with calculated M values of less than 3. Diffuser lengths up to 6-7 calibers are expedient on nozzles for nearly hypersonic M values. Sufficiently long cylindrical diffusers have an efficiency of 0.75-0.85. Diagrams are presented for selecting minimum diffuser lengths in the range of M equals 2-5. The experiments revealed that the maximum rarefaction attainable with cylindrical diffusers at the nozzle exit section during discharge into a normal atmosphere is 0.04 atm. Orig. art. has: 4 figures.</p>											

APPC

FOR USE ONLY

FOR USE ONLY

ON THE STARTING OF SUPERSONIC NOZZLES WITH THE AID OF  
CYLINDRICAL DIFFUSERS

V. Ye. Davidson and N. A. Chukhalo  
(Dnepropetrovsk University)

To obtain systematic data on the effectiveness of short cylindrical diffusers we performed experiments on a small-sized short-term supersonic tube. Compressed nitrogen was used as the working substance. On the tube there were exchangeable nozzles with a conical supersonic part for Mach numbers 2.0, 2.5, 3.0, 3.5, 4.0, and 5.0 with a cone half-angle  $\alpha = 8^\circ$  for all Mach numbers.

Experiments were performed with diffusers whose length varied from one to eight diameters of the exit section of the nozzles. The results given in the article are valid for the case where the ratio of the diameter of the diffuser to the diameter of the exit section of the nozzle  $D_d/D_s$  is equal to 1.01.

The diffusers were designed from plexiglas. On the inner surface of the models before the tests a layer of mastic was applied, which made it possible to follow the shocks visually and to fix the moment of the start of the nozzle (exit of the shock beyond the edge of the nozzle) and the movement of the shock along the diffuser. The pressures in the prechamber of the tube at the nozzle edge and at a number of points along the diffuser were measured by photographing

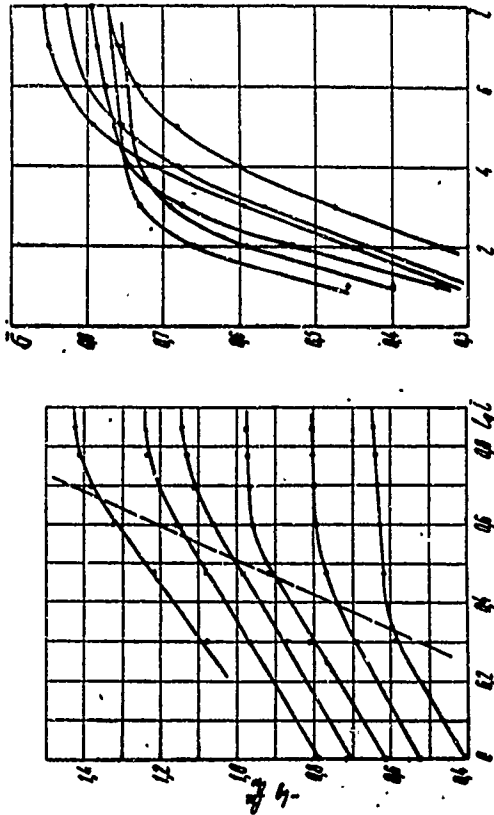


Fig. 1.

Fig. 2.

Fig. 1. Dependence of  $(P_{oz}/P_{or})$  on  $\bar{l}$ :  
 ○ - M = 2; △ - M = 2.5; □ - M = 3; ▽ - M = 3.5; × - M = 4;  
 ● - M = 5.

Fig. 2. Dependence of the coefficient  $\bar{\sigma}$  on  $\bar{l}$ :  
 ○ - M = 2; △ - M = 2.5; □ - M = 3; ▽ - M = 3.5; × - M = 4;  
 ● - M = 5.

manometers and vacuum gauges. The results of the experiments are shown in Figs. 1-4.

Figure 1 shows the dependence of the stagnation pressure  $P_{oz}$  at which the nozzles start with the diffusers, on the relative length of the diffusers  $\bar{l} = l/D_d$ , where  $l$  is the length of the diffuser. For clear representation of the pressure,  $P_{oz}$  is referred to the computed pressure  $P_{or}$  necessary for starting a nozzle without the diffuser. The pressures in the external medium are assumed in both cases to be identical. The dependence is given in logarithmic coordinates. The dashed line shows the limit of effectiveness of the use of cylindrical diffusers. By limit of effectiveness we mean a straight line running

through the points in which the ratio  $\frac{P_{02} i + 1}{P_{01} \text{ or } i}$  amounts to no less than 0.95 with an increase in  $lg \bar{L}$  by 0.1.

From the graph we can see that the advantages of the use of diffusers are greater, the higher the Mach number of the nozzles. An increase in the length of the diffuser to three or four diameters practically exhausts the possibility of lowering the pressure of the start of the nozzles with calculated Mach numbers less than 3. For nozzles with Mach numbers close to hypersonic it is expedient to lengthen the diffusers to six or seven diameters.

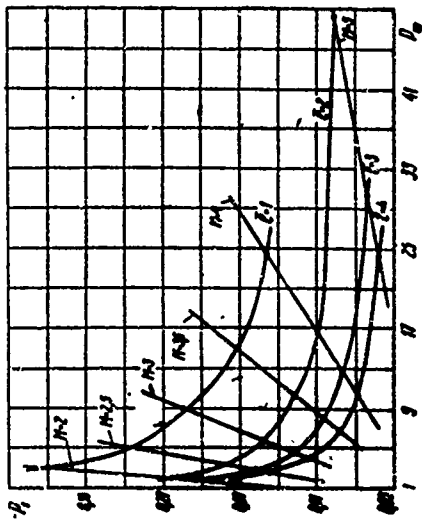


Fig. 3. Diagram for selecting the minimum diffuser lengths.

It is known that pressure recovery in a supersonic diffuser is ordinarily calculated by substituting the actual system of shocks by one normal shock. On the graphs of Fig. 2 the stagnation pressure recovery factor obtained by us experimentally in the diffusers  $\sigma_d = P_a/P_{02}$  is referred to the recovery factor in the normal shock:

\*Fundamentals of Gas Dynamics, edited by H. Emmons, Izd-vo inostr. lit., Moscow, 1954.

$$\sigma_{d, \text{calc}} = \frac{P_{02}}{P_{01}} = \frac{\left(\frac{k+1}{2} M_1^2\right)^{\frac{k-1}{k+1}} \left(\frac{2k}{k+1} M_1^2 - \frac{k-1}{k+1}\right)^{\frac{k-1}{k+1}}}{\left(1 + \frac{k-1}{2} M_1^2\right)^{\frac{k-1}{k+1}}}$$

Here  $P_a$  is the pressure in the external medium and  $P_{01}$  and  $P_{02}$  are the stagnation pressures ahead of and beyond the shock. We will call the value  $\bar{\sigma} = \sigma_d/\sigma_{d, \text{calc}}$  the diffuser efficiency. As is seen, cylindrical diffusers of sufficient length have an efficiency of the order of 0.75-0.85.

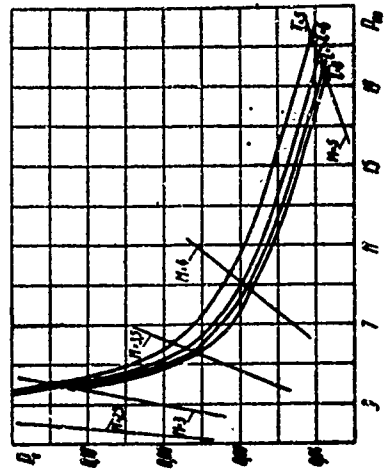


Fig. 4. Diagram for selecting minimum diffuser length.

Selection of the minimally permissible length of the diffusers in the range of Mach numbers  $M = 2-5$  can be done from Figs. 3 and 4. We constructed, in axes  $P_{02}$  and  $P_{01}$ , where  $P_{01}$  is the pressure on the edge of the started nozzle, curves of the dependences  $P_{01} = f(P_{02})$  with given lengths of the diffuser at different Mach numbers, to which there correspond the straight lines  $\pi = P_{01}/P_{02} = \text{const}$ . After we have set the calculated Mach number of the nozzle for which the diffuser is selected it is necessary to construct, through the coordinate origin (Figs. 3 and 4), a straight line at angle  $\phi = \arctg \pi(M)$  to the axis of the abscissa. In Figs. 3 and 4 several such straight lines are constructed. Then, depending on whether there is given the necessary pressure of the start or the necessary expansion at the edge of the

nozzle, we erect a perpendicular to the axis of the abscissa or the axis of the ordinate at the point with the given value for  $P_{02}$  or  $P_1$  to intersection with the straight line  $\phi = \arctg \pi(M)$ . If the point of intersection lies between the curves  $\bar{I} = 1$  and  $\bar{I} = 1 + 1$ , then for finding  $\bar{I}_{\min}$  we can interpolate between 1 and  $1 + 1$  or, to guarantee the start of the nozzle, take  $\bar{I}_{\min} = \bar{I}_{1+1}$ .

For Mach numbers up to 5 the maximum expansion at the nozzle edge, obtainable with the aid of cylindrical diffusers with outflow into normal atmosphere, as experiment shows, amounts to 0.04 atm(abs).

DISTRIBUTION LIST

Organization	Nr. Cvs.	Organization	Nr. Cvs.
<b>AIR FORCE</b>			
Hq USAF	2	DDC	20
ACIC (ACDEL-7)	1	C072 CDC INLAND COMBAT	1
AFCLR (CRKLR)	2	C513 Picatinny Arsenal	1
ARL (ARB) WP,AFB	1	C523 Harry Diamond Lab	1
ETAC (MAC)	1	C525 Aberdeen Pz	1
Hq AFSC	1	C535 Aviation Mat Comd	1
AEDC (AEV)	1	C619 MID Redstone	1
AFETR (EYH)	1	D153 Pac Mal Range	1
AFRPL (RPI)	1	H521 Hq USAREUR - UIIC	1
AFML (WLF)	1		
ASD (ASFS)	9		
FDCC (1)	1		
ESD (ESY/ESDT)	1		
SAMSO (SMFA)	1		
FTD	3		
TDRAE	(2)		
ATD	(1)		
PNS	(1)		
TDBAS-2	10	<b>OTHER GOVERNMENT AGENCIES</b>	
TDBID-2	2	AEC (Tenn)	2
TDBR	1	AEC (Wash)	2
TDCS	1	NAFEC	1
TDF (PRE)	10	NASA (ATSS-T)	1
PAA	(1)		
PD	(1)		
PRE	(1)		
PT	(1)		
PTA	(1)		
PAI	(1)		
PM6	(1)		
PM9	(1)		
PM12	(1)		
PM13	(1)		
TDRM	(1)		
PMP/1	(1)		
PMP/S	(1)		
TDPTA	(1)		
PTASH	(1)		
PTASP	(1)		
PTAST	(1)		
		<b>DISTRIBUTION TO BE MADE BY</b>	
		DIA (DIACC-3)	23
		B154 DIAST-1 Data Base	
		B162 DIAST-2D	
		B737 DIAAP-10A	
		B768 OACSI - USAITAG	
		D008 U.S. Navy (STIC)	
		D220 ONR	
		P055 CIA/OCR/SD (5)	
		P090 NSA (GREF/CIB) (6)	