

AD 710592

VIBROSCOPIC DENIER DETERMINATION FOR HIGH MODULUS FIBERS

WALTER H. GLOOR


TECHNICAL REPORT AFML-TR-70-151

JUNE 1970

This document has been approved for public release and sale;
its distribution is unlimited.

Reproduced by the
CLEARINGHOUSE
for Federal Scientific & Technical
Information Springfield Va 22151

AIR FORCE MATERIALS LABORATORY
AIR FORCE SYSTEMS COMMAND
WRIGHT-PATTERSON AIR FORCE BASE, OHIO

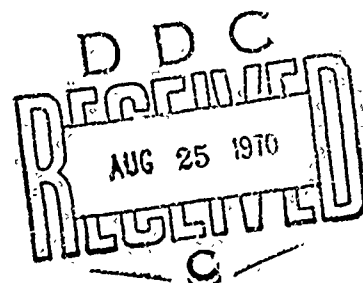

NOTICE

When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This document has been approved for public release and sale; its distribution is unlimited.

ACCESSION FOR	
CFSTI	WHITE SECTION ☒
DDC	DIFF SECTION ☐
UNCLASSIFIED	☐
JUSTIFICATION	
BY	
DISTRIBUTION/AVAILABILITY CODES	
DIST.	AVAIL. 284/α SPECIAL

Copies of this report should not be returned unless return is required by security considerations, contractual obligations, or notice on a specific document.

VIBROSCOPIC DENIER DETERMINATION FOR HIGH MODULUS FIBERS

WALTER H. GLOOR

*Fibrous Materials Branch
Nonmetallic Materials Division*

Distribution of this document is unlimited.

FOREWORD

This report was prepared by the Fibrous Materials Branch, Nonmetallic Materials Division, Air Force Materials Laboratory. It was initiated under Project 7320, "Fibrous Materials for Decelerators and Structures", Task 732001, "Organic and Inorganic Fibers", with Walter H. Gloor as Project Scientist.

This report was released by the author in April 1970.

This technical report has been reviewed and is approved.



JACK H. ROSS

Chief, Fibrous Materials Branch
Nonmetallic Materials Division
Air Force Materials Laboratory

ABSTRACT

Determination of fiber linear density by vibroscopic (vibrating string) techniques requires a correction for specimen stiffness when applied to fine diameter, high modulus fibers. The magnitude of this correction is discussed, together with the factors from which it arises and methods of calculation.

I. INTRODUCTION

Tensile characterization of filamentary materials necessitates determination of some measure of fiber size. Commonly employed size measures are diameter, cross-sectional area, and denier, and these are normally determined through relatively straight forward microscopic, planimetric, or analytical balance techniques. Filament denier for very small fibers (less than 1 mil diameter) is difficult to determine by direct weighing because of the small weights and/or long lengths involved. An approximation can be obtained for those fibers which are part of a multifilament yarn by dividing yarn denier by filament count. Fiber-to-fiber nonuniformity, however, introduces uncertainties. Microscopic diameter measurements are applicable only to circular or near-circular fibers. Planimetry using photomicrographs obtained from mounted cross-sections has the inherent undesirable feature of averaging fiber areas which may be different from those later selected for tensile testing.

II. DISCUSSION

Based on the above considerations, the vibroscopic technique for single fiber denier measurement is attractive in many instances*. In it, an oscillatory force is applied to a filament under tension and the frequency varied until resonance is achieved. Fiber linear density (denier) can then be calculated from the observed values of frequency, tension, fiber length, and other parameters, if certain assumptions are made. The major assumptions are:

- a) Uniform linear density along the fiber.
- b) The moment of inertia of the fiber about its neutral axis approximates that of a right circular cylinder of equal cross-sectional area.
- c) The fiber oscillates as a perfectly flexible string.

Assumptions (a) and (b) normally present no problem; errors introduced because of these for the majority of fibers of interest are relatively minor. Errors arising from the fiber's nonconformance with assumption (c), however, are not necessarily negligible.

Fiber linear density (density x cross-sectional area) is calculated from vibroscope test conditions and results from the following equation:

$$\rho A = \frac{T}{4l^2 f^2} \quad (1)$$

in which ρ , A , T , l and f represent density, area, tensioning force, fiber length, and resonant frequency, respectively, in consistent units. The resonant frequency used normally is the fundamental for the system in question. Equation (1) is for the ideal case in which the three assumptions listed above are valid. Corrections for nonconformance with assumption (c) are a function of both fiber area and Young's modulus. It is not intended to derive the pertinent basic relationships here; the reader is referred to the above mentioned journal article and any complete mechanics text. For organic textile fibers of conventional diameters, the calculated "stiffness correction factors" normally do not exceed 3% and often are much lower.

Recently, considerable attention has been paid to the mechanical characterization of graphite fibers of very high Young's modulus and in extremely fine diameters. Deviation from assumption (c) was therefore re-examined since the vibroscopic technique is used by some investigators for measurement of graphite fiber denier.

*The Vibroscopic Method for Determination of Fiber Cross-sectional Area", D. J. Montgomery and W. T. Milloway, Textile Research Journal, Vol. XXII, No. 11, November 1952, p. 729.

Applying a correction factor for specimen stiffness results in Equation (1) taking the form:

$$\rho A = (1 + \Delta) \left(\frac{T}{4l^2 f^2} \right) \quad (2)$$

in which

$$\Delta = 2a + 5.47a^2 \quad (3)$$

and

$$a = \frac{4EI}{l^2 T} \quad (4)$$

where l and T are as previously defined, E is Young's modulus and I is the moment of inertia of the fiber about its neutral axis.

Typical conditions for graphite fiber vibroscopy involve a 2 cm. gage length and tensioning force supplied by a 20 mgm. weight. Equation (4) then reduces to

$$a = 0.0848E^{1/2}d^2 \quad (5)$$

in which E is in $\text{psi} \times 10^{-6}$ and d (fiber diameter) is in mils.

Combining Equations (2), (3) and (5), and introducing the necessary proportionality constants, results in

$$\text{Denier} = (1 + 0.1696E^{1/2}d^2 + .0393Ed^4) \frac{1.103}{f^2} \quad (6)$$

where f is the fundamental resonant frequency in Kc /Sec, using a 2 cm. fiber and 20 mgm. tensioning weight.

Equation (6) is not directly solvable for denier, however, since diameter and denier are related through density, and the calculation of E from tensile test data is dependent on denier. Iterative procedures can be employed. Also, in many instances, sufficiently close approximations for E and d are known prior to testing to allow calculation of an accurate correction factor (parenthetical expression in Equation (6)).

Figure 1 shows graphically the relationship between correction factor, fiber diameter, and fiber modulus. As an example, for a 6-micron fiber of 75 million psi modulus, the denier correction factor is approximately 9%. That is, the parenthetical expression in Equation (6) is 1.09.

III. SUMMARY

Denier determinations on the high-modulus graphite fibers of current interest will be low by approximately 5 to 15% unless corrected for stiffness. A correction factor based on fiber diameter and modulus can be determined and applied in a relatively straightforward manner.

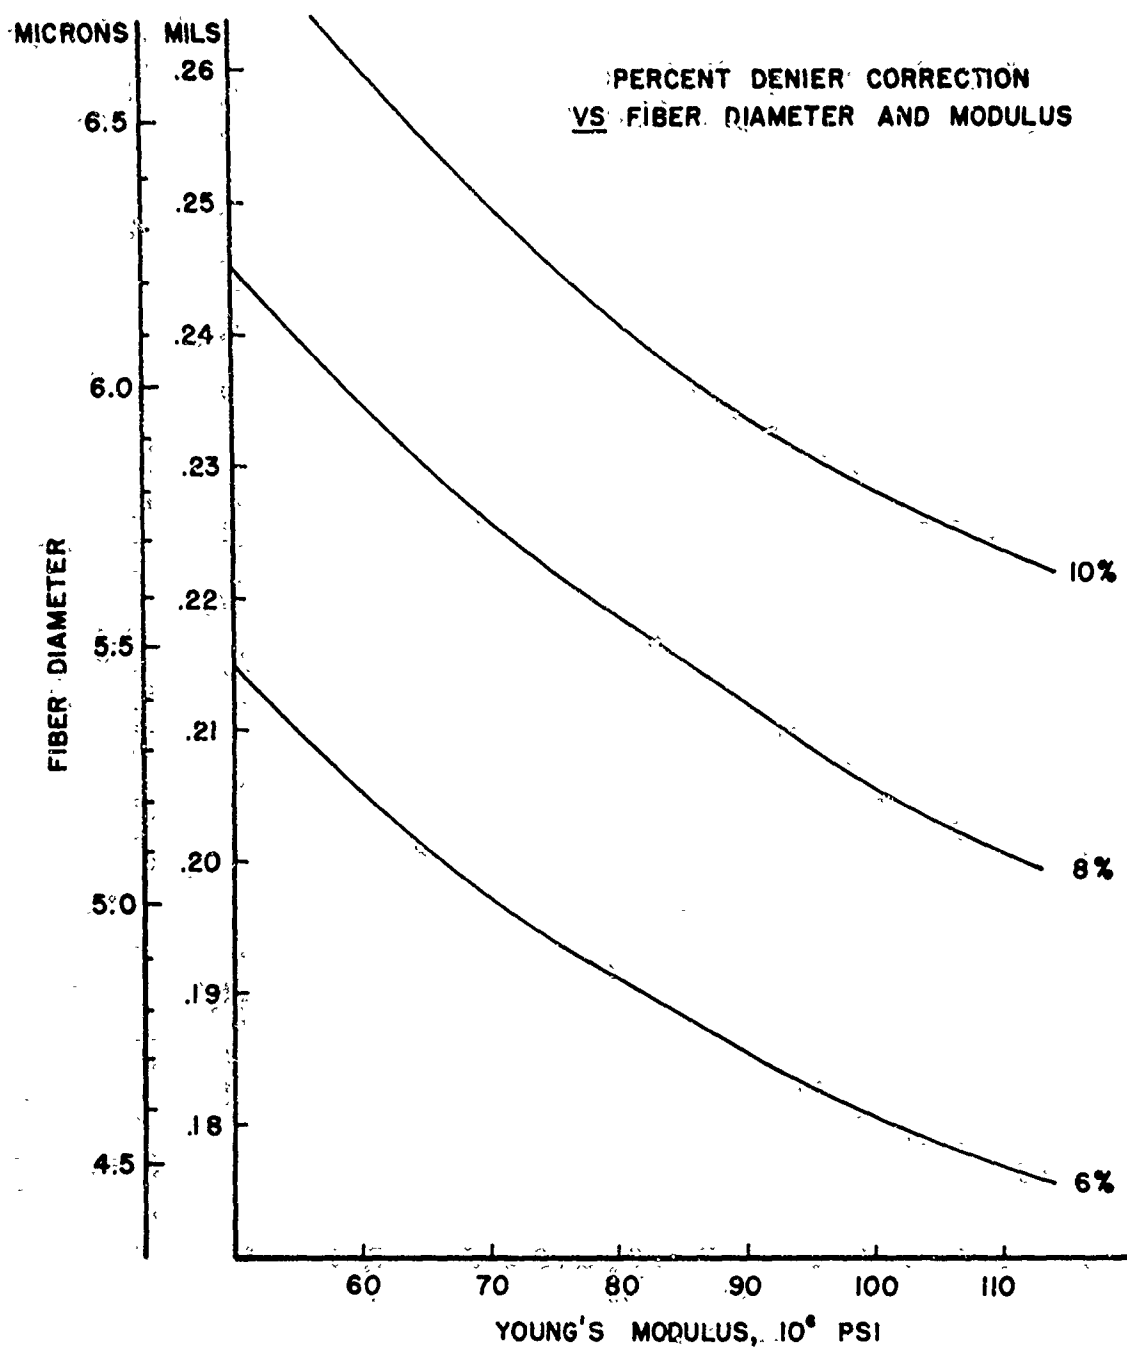


FIGURE 1

UNCLASSIFIED

Security Classification

DOCUMENT CONTROL DATA - R&D		
(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)		
1. ORIGINATING ACTIVITY (Corporate author)		2a. REPORT SECURITY CLASSIFICATION
Air Force Materials Laboratory Wright-Patterson Air Force Base, Ohio 45433		2b. GROUP
3. REPORT TITLE		
Vibrosopic Denier Determination for High Modulus Fibers		
4. DESCRIPTIVE NOTES (Type of: and inclusive dates)		
Technical Report; March-April 1970		
5. AUTHOR(S) (Last name, first name, initial)		
Gloor, Walter H.		
6. REPORT DATE	7a. TOTAL NO. OF PAGES	7b. NO. OF REFS
May 1970		
8a. CONTRACT OR GRANT NO.	9a. ORIGINATOR'S REPORT NUMBER(S)	
b. PROJECT NO. 7320		
c. Task No. 732001	9b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report)	
d.		
10. AVAILABILITY/LIMITATION NOTICES		
This document has been approved for public release and sale; its distribution is unlimited.		
11. SUPPLEMENTARY NOTES		12. SPONSORING MILITARY ACTIVITY
✓		Air Force Materials Laboratory Wright-Patterson Air Force Base, Ohio 45433
13. ABSTRACT		
Determination of fiber linear density by vibrosopic (vibrating string) techniques requires a correction for specimen stiffness when applied to fine diameter, high modulus fibers. The magnitude of this correction is discussed, together with the factors from which it arises and methods of calculation.		

DD FORM 1473
1 JAN 64

UNCLASSIFIED

Security Classification

UNCLASSIFIED

Security Classification

14. KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
Denier						
Vibroscope						
Diameter						
Modulus						
Graphite						

INSTRUCTIONS

1. **ORIGINATING ACTIVITY:** Enter the name and address of the contractor, subcontractor, grantee, Department of Defense activity or other organization (*corporate author*) issuing the report.

2a. **REPORT SECURITY CLASSIFICATION:** Enter the overall security classification of the report. Indicate whether "Restricted Data" is included. Marking is to be in accordance with appropriate security regulations.

2b. **GROUP:** Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forces Industrial Manual. Enter the group number. Also, when applicable, show that optional markings have been used for Group 3 and Group 4 as authorized.

3. **REPORT TITLE:** Enter the complete report title in all capital letters. Titles in all cases should be unclassified. If a meaningful title cannot be selected without classification, show title classification in all capitals in parenthesis immediately following the title.

4. **DESCRIPTIVE NOTES:** If appropriate, enter the type of report, e.g., interim, progress, summary, annual, or final. Give the inclusive dates when a specific reporting period is covered.

5. **AUTHOR(S):** Enter the name(s) of author(s) as shown on or in the report. Enter last name, first name, middle initial. If military, show rank and branch of service. The name of the principal author is an absolute minimum requirement.

6. **REPORT DATE:** Enter the date of the report as day, month, year; or month, year. If more than one date appears on the report, use date of publication.

7a. **TOTAL NUMBER OF PAGES:** The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.

7b. **NUMBER OF REFERENCES:** Enter the total number of references cited in the report.

8a. **CONTRACT OR GRANT NUMBER:** If appropriate, enter the applicable number of the contract or grant under which the report was written.

8b, 8c, & 8d. **PROJECT NUMBER:** Enter the appropriate military department identification, such as project number, subproject number, system numbers, task number, etc.

9a. **ORIGINATOR'S REPORT NUMBER(S):** Enter the official report number by which the document will be identified and controlled by the originating activity. This number must be unique to this report.

9b. **OTHER REPORT NUMBER(S):** If the report has been assigned any other report numbers (either by the originator or by the sponsor), also enter this number(s).

10. **AVAILABILITY/LIMITATION NOTICE:** Enter any limitations on further dissemination of the report, other than those

imposed by security classification, using standard statements such as:

- (1) "Qualified requesters may obtain copies of this report from DDC."
- (2) "Foreign announcement and dissemination of this report by DDC is not authorized."
- (3) "U. S. Government agencies may obtain copies of this report directly from DDC. Other qualified DDC users shall request through _____."
- (4) "U. S. military agencies may obtain copies of this report directly from DDC. Other qualified users shall request through _____."
- (5) "All distribution of this report is controlled. Qualified DDC users shall request through _____."

If the report has been furnished to the Office of Technical Services, Department of Commerce, for sale to the public, indicate this fact and enter the price, if known.

11. **SUPPLEMENTARY NOTES:** Use for additional explanatory notes.

12. **SPONSORING MILITARY ACTIVITY:** Enter the name of the departmental project office or laboratory sponsoring (paying for) the research and development. Include address.

13. **ABSTRACT:** Enter an abstract giving a brief and factual summary of the document indicative of the report, even though it may also appear elsewhere in the body of the technical report. If additional space is required, a continuation sheet shall be attached.

It is highly desirable that the abstract of classified reports be unclassified. Each paragraph of the abstract shall end with an indication of the military security classification of the information in the paragraph, represented as (TS), (S), (C), or (U).

There is no limitation on the length of the abstract. However, the suggested length is from 150 to 225 words.

14. **KEY WORDS:** Key words are technically meaningful terms or short phrases that characterize a report and may be used as index entries for cataloging the report. Key words must be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location, may be used as key words but will be followed by an indication of technical context. The assignment of links, rules, and weights is optional.

UNCLASSIFIED

Security Classification