

AD-741849

SECURITY



Get AD#



Reproduced by
NATIONAL TECHNICAL
INFORMATION SERVICE
Springfield, Va 22151

מכון הנדסה אווירונאוטית
המכון לטכנולוגיה ארצית

TECHNION — ISRAEL INSTITUTE OF TECHNOLOGY

DEPARTMENT OF AERONAUTICAL ENGINEERING

HAIFA, ISRAEL

Reproduced by
NATIONAL TECHNICAL
INFORMATION SERVICE
Springfield, Va 22151

DDC
RECEIVED
MAY 16 1972
REGISTRATION
C

34

EC

Security Classification

DOCUMENT CONTROL DATA

(Security classification of title, body, and abstract are to be shown in this section when the overall report is classified)

1. ORIGINATING ACTIVITY (Corporate and)		2. REPORT SECURITY CLASSIFICATION	
Technion Research and Development Foundation, Haifa, Israel		UNCLASSIFIED	
3. REPORT TITLE			
ON THE BUCKLING AND POSTBUCKLING OF CIRCULAR ARCHES AND RINGS.			
4. DESCRIPTIVE NOTES (Type of report and inclusive dates)			
INTERIM			
5. AUTHOR(S) (Last name, first name, initial)			
Dym L. Clive			
6. REPORT DATE	7a. TOTAL NO. OF PAGES	7b. NO. OF PAGES	
August 1971	34	15	
8a. CONTRACT OR GRANT NO.	9a. ORIGINATOR'S REPORT NUMBER(S)		
F 61052-69-C-0040	TAE Report No. 133		
b. PROJECT NO.	9b. OTHER REPORT NUMBERS (any other numbers that may be assigned this report)		
c.			
d.			
10. AVAILABILITY/LIMITATION NOTICES			
This document has been approved for publish release and sale; Its distribution is unlimited.			
11. SUPPLEMENTARY NOTES		12. SPONSORING MILITARY ACTIVITY	
		Air Force Office of Scientific Research (JREM) 1400, Wilson Blvd., Arlington, Va. 22203	

13. ABSTRACT

This paper treats the buckling and postbuckling behavior of circular arches and rings under constant directional pressure. New exact and approximate solutions are given for the linearized eigenvalue problem. It is clearly demonstrated that the assumption of inextensibility is quite reasonable for the asymmetric buckling of steeper arches and of rings. Asymptotic analyses of early postbuckling behavior are given, based on the theory of Koiter and the formalism of Budiansky and Hutchinson. The postbuckling behavior is shown to be stable, and unaffected by the assumption of inextensibility.

Security Classification

14	KEY WORDS	LINK A		LINK B		LINK C	
		ROLE	WT	ROLE	WT	ROLE	WT
	1. Buckling and Postbuckling. 2. Circular Arches and Rings. 3. Imperfection sensitivity.						

INSTRUCTIONS

1. **ORIGINATING ACTIVITY:** Enter the name and address of the contractor, subcontractor, grantee, Department of Defense activity or other organization (corporate author) issuing the report.

2a. **REPORT SECURITY CLASSIFICATION:** Enter the overall security classification of the report. Indicate whether "Restricted Data" is included. Marking is to be in accordance with appropriate security regulations.

2b. **GROUP:** Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forces Industrial Manual. Enter the group number. Also, when applicable, show that optional markings have been used for Group 3 and Group 4 as authorized.

3. **REPORT TITLE:** Enter the complete report title in all capital letters. Titles in all cases should be unclassified. If a meaningful title cannot be selected without classification, show title classification in all capitals in parenthesis immediately following the title.

4. **DESCRIPTIVE NOTES:** If appropriate, enter the type of report, e.g., interim, progress, summary, annual, or final. Give the inclusive dates when a specific reporting period is covered.

5. **AUTHOR(S):** Enter the name(s) of author(s) as shown on or in the report. Enter last name, first name, middle initial. If military, show rank and branch of service. The name of the principal author is an absolute minimum requirement.

6. **REPORT DATE:** Enter the date of the report as day, month, year, or month, year. If more than one date appears on the report, use date of publication.

7a. **TOTAL NUMBER OF PAGES:** The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.

7b. **NUMBER OF REFERENCES:** Enter the total number of references cited in the report.

8a. **CONTRACT OR GRANT NUMBER:** If appropriate, enter the applicable number of the contract or grant under which the report was written.

8b, 8c, & 8d. **PROJECT NUMBER:** Enter the appropriate military department identification, such as project number, subproject number, system numbers, task number, etc.

9a. **ORIGINATOR'S REPORT NUMBER(S):** Enter the official report number by which the document will be identified and controlled by the originating activity. This number must be unique to this report.

9b. **OTHER REPORT NUMBER(S):** If the report has been assigned any other report numbers (either by the originator or by the sponsor), also enter this number(s).

10. **AVAILABILITY/LIMITATION NOTICES:** Enter any limitations on further dissemination of the report, other than those

imposed by security classification, using standard statements such as:

- (1) "Qualified requesters may obtain copies of this report from DDC."
- (2) "Foreign announcement and dissemination of this report by DDC is not authorized."
- (3) "U. S. Government agencies may obtain copies of this report directly from DDC. Other qualified DDC users shall request through _____."
- (4) "U. S. military agencies may obtain copies of this report directly from DDC. Other qualified users shall request through _____."
- (5) "All distribution of this report is controlled. Qualified DDC users shall request through _____."

If the report has been furnished to the Office of Technical Services, Department of Commerce, for sale to the public, indicate this fact and enter the price, if known.

11. **SUPPLEMENTARY NOTES:** Use for additional explanatory notes.

12. **SPONSORING MILITARY ACTIVITY:** Enter the name of the departmental project office or laboratory sponsoring (paying for) the research and development. Include address.

13. **ABSTRACT:** Enter an abstract giving a brief and factual summary of the document indicative of the report, even though it may also appear elsewhere in the body of the technical report. If additional space is required, a continuation sheet shall be attached.

It is highly desirable that the abstract of classified reports be unclassified. Each paragraph of the abstract shall end with an indication of the military security classification of the information in the paragraph, represented as (TS), (S), (C), or (U).

There is no limitation on the length of the abstract. However, the suggested length is from 150 to 225 words.

14. **KEY WORDS:** Key words are technically meaningful terms or short phrases that characterize a report and may be used as index entries for cataloging the report. Key words must be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location, may be used as key words but will be followed by an indication of technical context. The assignment of links, rules, and weights is optional.

F61052-69-C-0040

SR 5

AUGUST 1971

SCIENTIFIC REPORT No. 5.


ON THE BUCKLING AND POSTBUCKLING OF CIRCULAR ARCHES
AND RINGS.

by

CLIVE L. DYM^{*}

Department of Aeronautical Engineering
Technion - Israel Institute of Technology,
Haifa, Israel.

T.A.E. REPORT No.133



This document has been approved for public release and sale, its distribution is unlimited.

The research reported in this document has been sponsored in part by the Air Force Office of Scientific Research, through the European Office of Aerospace Research, United States Air Force, under Contract F61052-69-C-0040.

* On leave from Carnegie-Mellon University, Pittsburgh, Pa., U.S.A.

TABLE OF CONTENTS

	<u>PAGE No.</u>
ABSTRACT	I
NOMENCLATURE	II - III
1. Introduction	1 - 2
2. General Equations	3 - 5
3. Linearized (Buckling) Solutions	6 - 9
4. Postbuckling: The Budiansky-Hutchinson Approach	10 - 16
5. Postbuckling: Koiter's Approach	17 - 23
6. Discussion and Conclusions	24 - 26
ACKNOWLEDGEMENT	26
REFERENCES	27 - 28
TABLE 1	28
FIGURE 1	

ABSTRACT

This paper treats the buckling and postbuckling behavior of circular arches and rings under constant directional pressure. New exact and approximate solutions are given for the linearized eigenvalue problem. It is clearly demonstrated that the assumption of inextensibility is quite reasonable for the asymmetric buckling of steeper arches and of rings. Asymptotic analyses of early postbuckling behavior are given, based on the theory of Koiter and the formalism of Budiansky and Hutchinson. The postbuckling behavior is shown to be stable, and unaffected by the assumption of inextensibility.

NOMENCLATURE

a, b, a', b'	perturbation solution parameters defined by Eqs. (40) and (37)
A, A_i	displacement coefficients, dimensionless
A^*	displacement coefficient, dimensional
$\underline{A}$	displacement coefficient ($= \frac{A^* \epsilon}{h}$)
e, e_i	extensional strain
E	Young's modulus
h	arch thickness
H	thickness parameter
I	moment of inertia
K, K_i	curvature, dimensionless
L_i	differential operators
M, M_i	moment resultant, dimensionless
N, N_i	stress resultant, dimensionless
P^λ, P_m^λ	potential energy functionals
q	load per unit length of arch
Q	extensibility parameter defined by Eq. (16)
R	arch radius
S_i	nonlinear extensional strain
v, v_i	tangential displacement, dimensionless
w, w_i	tangential displacement, dimensionless

α	half angle of arch vertex
δ	first order variation
ϵ	porturbation parameter
ϕ	arch coordinate
λ	arch loading, dimensionless
X, X_i	rotation of normal to arch centerlines, dimensionless

1. INTRODUCTION

This paper treats the buckling and the postbuckling behavior of pinned arches, under constant directional ("dead") pressure, where the arch radius of curvature is a constant. A linearized treatment of this problem has been given by Chwalla and Kollbrunner [1]^{*}, who assumed that the arch was inextensible during buckling. Kämmer [2] has shown that extensibility did not have a great effect on the buckling loads, a result confirmed by the present study. Also, Lévy [3] and Carrier [4] have given "closed form" solutions for the postbuckling of inextensional circular rings in terms of (implicit) elliptical integrals. It is also worth noting the recent contribution of Singer and Babcock [5], who discuss the relationship of semi-circular arches under dead pressure to that of complete rings, pointing out the need to account for rigid body displacements.

The present work treats the linearized buckling problem both exactly, within the framework of ring theory, accounting for extensibility, and approximately, extending Levy's approximation for rings to arches of various vertex angles. A qualitative measure of the midplane extension is also provided from the new exact solution.

Two asymptotic analyses of the early postbuckling behavior are presented, both based on the theory advanced by Koiter [6]. The first makes use of the formalism expounded by Budiansky and Hutchinson [7,8,9], and is carried

* Numbers in brackets refer to entries in the list of References.

out to include terms in the displacement expansion of order ϵ^2 , where ϵ is the small buckling deflection parameter. It is shown that the post-buckling behavior of the arch following asymmetric buckling is stable, and it is not appreciably effected, qualitatively or quantitatively, by the inextensibility assumption. Further, it is shown that the inclusion of the second order terms in the displacements has no appreciable effect on the quantitative outcome.

Finally an analysis based directly on Koiter's approach is presented, also accurate in the displacement expansion to order ϵ^2 . ~~The results are identical, for this problem, to those obtained using the Budiansky-~~ Hutchinson formalism, and serve to confirm the idea that (at least for "simple" problems) accurate quantitative information can be obtained using only the buckling mode shapes in the postbuckling analysis. Koiter has previously considered the elastica [6], and a two-bar frame [10] using only the buckling mode, while Haftka and Nachbar [11] have compared results of a "one-term" solution with an exact solution, and the comparison was quite good.

2. GENERAL EQUATIONS

The equations used to describe the arch behavior are those of ring theory, which are also a one-dimensional subset of the nonlinear shell equations of Sander [12]. In dimensionless form they appear as follows.

The stress and moment resultants are

$$N = \frac{1}{H} \left(e + \frac{1}{2} \chi^2 \right) \quad (1a)$$

$$M = - \frac{d\chi}{d\phi} \quad (1b)$$

where e and χ are the linear in-plane strain and the rotation, respectively, which when expressed in terms of a tangential displacement v and a radial displacement w take the form

$$e = \frac{dv}{d\phi} - w, \quad \chi = \frac{dw}{d\phi} + v \quad (2)$$

The displacements and the circumferential arch coordinate ϕ have been nondimensionalized with respect to the arch radius R , while the stress and moment resultants have been rendered dimensionless by dividing by (EI/R^2) and (EI/R) , respectively. This results in the thickness ratio being introduced in equation (1a), i.e.,

$$H = \frac{1}{12} \left(\frac{h}{R} \right)^2 \quad (3)$$

Further, a dimensionless applied loading λ will be defined as

$$\lambda = \frac{qR^3}{EI} \quad (4)$$

where q is the load (uniform here) per unit length of arch. The geometry

is pictured in Figure 1.

Now the (dimensionless) total potential energy of the transversely loaded arch may be written down as

$$P^\lambda = \frac{2R}{EI} (U + V)$$

$$= \frac{1}{H} \int_{-\alpha}^{\alpha} \left(e + \frac{1}{2} x^2 \right)^2 d\phi + \int_{-\alpha}^{\alpha} \left(\frac{dx}{d\phi} \right)^2 d\phi - 2\lambda \int_{-\alpha}^{\alpha} w d\phi \quad (5)$$

In equation (5) the first integral represents the (linear and nonlinear) strain energy of middle surface extension, the second integral is the bending contribution to the energy, while the final term is the potential of the applied load.

From equation (5) one can deduce the potential energy corresponding to the linearized buckling problem (See Eqns. (47) of Section 5), denoted here as P_2^λ :

$$P_2^\lambda = \frac{1}{H} \int_{-\alpha}^{\alpha} e_1^2 d\phi + \int_{-\alpha}^{\alpha} \left(\frac{dx_1}{d\phi} \right)^2 d\phi - \lambda \int_{-\alpha}^{\alpha} x_1^2 d\phi. \quad (6)$$

The subscript one will, throughout this paper, denote a buckling displacement or stress quantity. The Euler-Lagrange equations of the quadratic functional (6) are straightforwardly obtained as

$$L_1 w_1 + L_2 v_1 = 0 \quad (7a)$$

$$L_3 w_1 + L_1 v_1 = 0 \quad (7b)$$

where the L_i are the differential operators

$$\begin{aligned}
 L_1 &= \frac{d^3}{d\phi^3} - (1 - \lambda H) \frac{d}{d\phi} \\
 L_2 &= (1 + H) \frac{d^2}{d\phi^2} + \lambda H \\
 L_3 &= H \frac{d^4}{d\phi^4} + \lambda H \frac{d^2}{d\phi^2} + 1
 \end{aligned}
 \tag{8}$$

It is immediately of interest to note that equations (7) can be uncoupled to yield a single equation in v_1 , or the identical equation in w_1 alone. Furthermore, that single equation is identically that given by Chwalla and Kollbrunner[1], which they derived by assuming inextensibility in the buckling state, i.e., $e_1 = 0$. That equation is, obtained here with no assumption regarding the extensibility;

$$(L_3 L_2 - L_1^2) v_1 = v_1^{iv} + (2 + \lambda) v_1^{iiv} + (1 + 2\lambda) v_1^{iii} + \lambda v_1 = 0
 \tag{9}$$

The prime superscripts in equation (9) correspond to differentiation with respect to the arch coordinate. The question of inextensibility will be raised again in the sequel.

For completeness the natural (in terms of stress resultants) and geometric boundary conditions for the linearized problem are also noted:

$$\begin{aligned}
 \text{Either } N_1 - M_1 &= 0 & \text{or } v_1 & \text{ is prescribed} \\
 \text{Either } \frac{dM_1}{d\phi} - \lambda x_1 &= 0 & \text{or } w_1 & \text{ is prescribed} \\
 \text{Either } M_1 &= 0 & \text{or } \frac{dw_1}{d\phi} & \text{ is prescribed}
 \end{aligned}
 \tag{10}$$

The boundary conditions are applied at $\phi = \pm \alpha$, where 2α is the arch vertex angle (Figure 1). Results for the complete ring are obtained by setting $\alpha = \frac{\pi}{2}$ [5].

3. LINEARIZED (BUCKLING) SOLUTIONS

A solution to the eigenvalue problem represented by the differential equation (9) has been given by Chwalla and Kollbrunner [1] for a simply supported arch, using the boundary conditions (reflecting the inextensibility condition)

$$v_1 = v_1' = v_1''' = 0 \quad \text{at} \quad \phi = \pm \alpha \quad (11)$$

Some of the resulting eigenvalues, corresponding to a solution that is asymmetric with respect to $\phi = 0$, are shown in Table 1.

An approximate solution for a semi-circular arch ($-\pi/2 \leq \phi \leq \pi/2$) has been given by Lévy [3], and recently it has been generalized by Babcock and Singer [5] to properly account for the vanishing of the displacement v_1 at the arch ends. This approximation, which assumes an incompressible arch, is here generalized for arbitrary vertex angle 2α , to take the form:

$$w_1 = A \sin \frac{\pi\phi}{\alpha}, \quad v_1 = -\frac{\alpha A}{\pi} (1 + \cos \frac{\pi\phi}{\alpha}) \quad (12)$$

It is easily verified that the solution (12) satisfies the inextensible pin conditions at $\phi = \pm \alpha$. Then the linearized potential energy (6) can be easily converted into a Rayleigh Quotient to obtain (inextensible) approximate critical loads, i.e.,

$$\lambda_{cz} = \frac{\frac{\alpha}{2} \int_{-\alpha}^{\alpha} \left(\frac{dw_1}{d\phi} \right)^2 d\phi}{\frac{\alpha}{2} \int_{-\alpha}^{\alpha} w_1^2 d\phi} \quad (13)$$

Substitution of the assumptions (12) into the quotient (13) yields

$$\lambda_{cr} = \frac{\frac{\pi^2}{2} \left(\frac{\pi^2}{2} - 1 \right)^2}{2 + \left(\frac{\pi^2}{2} - 1 \right)^2} \quad (14)$$

Some numerical values of λ_{cr} are given in Table 1. The agreement is obviously quite good. Also, it is noted here that for the case $\alpha = \pi/2$, i.e., a complete ring, the mode shape represented by Eqs. (12) has been shown to be essentially identical to that obtained by Chwalla and Kollbrunner in their analysis [5].

Finally, in an attempt to assess the effect of the inextensibility assumption on the buckling load (see the work of Kammel [2]) and to lay the groundwork for the study of the effects of inextensibility on the post-buckling behavior, an exact solution to the differential equations (7) and the boundary conditions (10) is now given. The asymmetric solution to equations (7) is*

$$w_1^E = A_1 \sin \sqrt{\lambda} \phi + A_2 \sin \phi + A_3 \phi \cos \phi \quad (15)$$

$$v_1^E = -\frac{A_1}{\sqrt{\lambda}} \cos \sqrt{\lambda} \phi + (QA_3 - A_2) \cos \phi + A_3 \phi \sin \phi$$

where

$$Q = \frac{1 + H(\lambda - 1)}{1 - H(\lambda - 1)} \quad (16)$$

and the A_i are constants, determined to within an arbitrary factor by satisfaction of boundary conditions.

* This solution is not valid for $\lambda = 1$. However for $0 \leq \phi \leq \pi/2$, this is of no concern here, as $\lambda \geq 3$.

Using the results (15), the exact in-plane strain and rotation formulae (for buckling) can be written as:

$$e_1^E = (1 - Q) A_3 \sin \phi \quad (17a)$$

$$\chi_1^E = \left(\sqrt{\lambda} - \frac{1}{\sqrt{\lambda}}\right) A_1 \cos \sqrt{\lambda} \phi + (1 + Q) A_3 \cos \phi \quad (17b)$$

The eigenvalues (buckling loads) are obtained after satisfying the following boundary conditions:

$$w_1^E = v_1^E = 0, \quad M_1^E = -\frac{d\chi_1^E}{d\phi} = 0 \quad \text{at } \phi = \pm \alpha. \quad (18)$$

The resulting transcendental equation from which the buckling load is calculated is found to be:

$$\sqrt{\lambda} \tan \sqrt{\lambda} \alpha = \frac{(1 + Q) \sin^2 \alpha}{(1 + 2Q - \lambda Q) \sin \alpha \cos \alpha + \alpha(1 - \lambda)} \quad (19)$$

For the sake of comparison, the eigenvalue equation obtained by Chwalla and Kollbrunner is also given.

$$\sqrt{\lambda} \tan \sqrt{\lambda} \alpha = \frac{2 \sin^2 \alpha}{(3 - \lambda) \sin \alpha \cos \alpha + \alpha(1 - \lambda)} \quad (20)$$

It is seen that Eqs. (19) and (20) are identical when $Q = 1$, which corresponds to inextensional deformation (Eq. (17a)). Numerical values for the buckling pressures given by Eq. (19) are presented in Table 1, and again the agreement is excellent.

It is worth noting at this juncture a few features of the extensional strain e_1^E resulting from the exact solution. First, considering the coefficient on the right hand side of Eq. (17a), and the definition of Q (Eq. (16)), it can be seen that

$$1 - Q \approx - \frac{2H(\lambda - 1)}{1 - H(\lambda - 1)} \sim H \ll 1. \quad (21)$$

proportional to the square of the thickness-to-radius of the arch, and is thus quite small.

Secondly, it can be observed from Eq. (17a) that the extensional strain is an odd function of the arch coordinate, i.e.,

$$e_1^E(-\phi) = -e_1^E(\phi) \quad (22)$$

Also, it turns out that there exists another uncoupling of the exact differential equations (7) that yields the result

$$\frac{d^2 e_1^E}{d\phi^2} + e_1^E = 0 \quad (23)$$

Thus, in addition to the odd function represented by the sinusoid already obtained, there is another solution to the equations for which $w_1(\phi)$ and $e_1^E(\phi)$ are even functions of ϕ , the latter being a cosinusoid. This solution is not considered at all in the present work as attention is restricted only to arches steep enough for asymmetric(bifurcation) buckling to take place.

4. POSTBUCKLING: THE BUDIANSKY-HUTCHINSON APPROACH

In this section the early postbuckling behavior of the arch will be obtained, following the asymptotic analysis outlined in the very lucid exposition of Budiansky [9]. As with the buckling analysis, only asymmetric buckling of steeper arches is considered here. For very shallow arches symmetric buckling can take place at lower pressures [13]. However this snap type of buckling cannot be analysed with the Koiter theory. The starting point is the virtual work (or variational) statement of the full nonlinear problem:

$$\int_{-\alpha}^{\alpha} [N \delta e + N\chi \delta \chi + M \delta K - \lambda \delta w] d\phi = 0 \quad (24)$$

In addition to the nomenclature defined in the previous section, the curvature K has been introduced in Eq. (24). Then

$$M = K = - \frac{dx}{d\phi} \quad (25)$$

The variational equation (24) must hold for any kinematically consistent set of displacement variations δv and δw , with corresponding strain field variations δe , $\delta \chi$ and δK .

The following expansions are now introduced:

$$v = \lambda v_0 + \epsilon v_1 + \epsilon^2 v_2 + \dots$$

$$w = \lambda w_0 + \epsilon w_1 + \epsilon^2 w_2 + \dots$$

$$e = \lambda e_0 + \epsilon e_1 + \epsilon^2 e_2 + \dots$$

$$\chi = \lambda \chi_0 + \epsilon \chi_1 + \epsilon^2 \chi_2 + \dots$$

$$K = \epsilon K_1 + \epsilon^2 K_2 + \dots$$

$$\begin{aligned} N &= -N_0 + \epsilon N_1 + \epsilon^2 N_2 + \dots \\ M &= \epsilon M_1 + \epsilon^2 M_2 \end{aligned} \quad (26)$$

Here ϵ is a small parameter such that when $\epsilon \rightarrow 0$, then $\lambda \rightarrow \lambda_{cr}$, the biturcation buckling pressure. The curvature and moment expansions begin with terms of order ϵ to denote that the pre-buckling state (zeroth order terms in Eqs. (26)) is a membrane state. In fact, as it is easily demonstrated that a nonlinear membrane state cannot exist for this problem, the quantity χ_0 shall be henceforth taken as zero, and thus only a linear membrane pre-buckling state is considered.

For the "unvaried" quantities in Eq. (24) the expansions (26) are substituted. After rearrangement by increasing powers of ϵ , the following new variational equation results:

$$\begin{aligned} & \int_{-\alpha}^{\alpha} [-N_0 \delta e - \lambda \delta w] d\phi \\ & + \epsilon \int_{-\alpha}^{\alpha} [N_1 \delta e + M_1 \delta K - N_0 \chi_1 \delta \chi] d\phi \\ & + \epsilon^2 \int_{-\alpha}^{\alpha} [N_2 \delta e + M_2 \delta K + (N_1 \chi_1 + N_0 \chi_2) \delta \chi] d\phi \\ & + \epsilon^3 \int_{-\alpha}^{\alpha} [N_3 \delta e + M_3 \delta K + (N_1 \chi_2 + N_2 \chi_1 + N_0 \chi_3) \delta \chi] d\phi \\ & + \dots = 0. \end{aligned} \quad (27)$$

The pre-buckling state is defined by the vanishing of the zeroth order variation. After a simple calculation that state is found to be

$$N_0 = \lambda, \quad e_0 = -H, \quad w_0 = H, \quad v_0 = 0 \quad (25)$$

With the vanishing of the zeroth order term in Eq. (27), an ϵ may be divided through, and thus the buckling state itself is now found to be, recalling that $\epsilon \rightarrow 0$ implies $\lambda \rightarrow \lambda_{cr}$:

$$\int_{-\alpha}^{\alpha} [N_1 \delta e + M_1 \delta K - \lambda_{cr} X_1 \delta X] d\phi = 0 \quad (29)$$

The Euler-Lagrange equations of this variational equation are:

$$\frac{dN_1}{d\phi} + \lambda_{cr} X_1 - \frac{dM_1}{d\phi} = 0 \quad (30a)$$

$$N_1 - \lambda_{cr} \frac{dX_1}{d\phi} + \frac{d^2 M_1}{d\phi^2} = 0 \quad (30b)$$

Expressed in terms of displacements, Eqs. (30) are identical to the linearized equations (7) given earlier.

It was pointed out earlier that the set of displacement variations constantly alluded to need only be kinematically consistent, and since the buckling displacements most surely are such a set, they can be appropriately inserted into Eq. (29) to yield the Rayleigh Quotient (Budiansky's "energy equation") for the critical load,

$$\lambda_{cr} = \frac{\int_{-\alpha}^{\alpha} (N_1 e_1 + M_1 K_1) d\phi}{\int_{-\alpha}^{\alpha} (X_1)^2 d\phi} \quad (31)$$

The same substitution in the more complete variational statement (27) must be equally valid, and noting the quotient (31), it is found that

$$\begin{aligned}
 & (\lambda_{cr} - \lambda) \int_{-\alpha}^{\alpha} x_1^2 d\phi \\
 & + \epsilon \int_{-\alpha}^{\alpha} [N_2 e_1 + M_2 K_1 + N_1 x_1^2 - \lambda x_1 x_2] d\phi \\
 & + \epsilon^2 \int_{-\alpha}^{\alpha} [N_3 e_1 + M_3 K_1 + N_1 x_1 x_2 + N_2 x_1^2 - \lambda x_1 x_3] d\phi = 0
 \end{aligned} \tag{32}$$

At this point the relationship between $(\lambda - \lambda_{cr})$ appears to be taking shape. However, it appears that equations of the third order will have to be solved in order to obtain the coefficient of ϵ^2 above. In order to avoid this difficulty, an orthogonality condition is introduced as follows^{*}:

$$\int_{-\alpha}^{\alpha} [N_1 e_m + M_1 K_m] d\phi = 0; \quad m=2,3,4,\dots \tag{33}$$

It follows from Eqs. (33) and (29), since the m^{th} order mode shapes must be kinematically admissible, that

$$\int_{-\alpha}^{\alpha} x_1 x_m d\phi = 0; \quad m = 2,3,4,\dots \tag{34}$$

In order to apply the orthogonality condition (33) and its consequence (34) successfully, the following consequences of constitutive linearity and geometric nonlinearity must be noted:

* The precise meaning of this orthogonality condition has not been established and is the subject of some discussion; see Reissner [14].

$$\begin{aligned}
 N_2 e_1 &= N_2 S_1 = N_1 S_2 = N_1 (e_2 + \frac{1}{2} X_1^2); \\
 N_3 e_1 &= N_3 S_1 = N_1 S_3 = N_1 (e_3 + X_1 X_2); \\
 M_2 K_1 &= M_1 K_2; \quad M_3 K_1 = M_1 K_3;
 \end{aligned}
 \tag{35}$$

In Eqs. (35), S_i has been used to denote the total nonlinear strain of order ϵ^i , which is made up in part of lower order terms due to the geometric nonlinearity. Then noting Eqs. (35), (33) and (34), the variational equation (32) can be put into the very simple form:

$$\lambda = \lambda_{cr} + a'\epsilon + b'\epsilon^2 + \dots
 \tag{36}$$

where

$$a' = \frac{2}{3} \frac{\int_{-\alpha}^{\alpha} N_1 X_1^2 d\phi}{\int_{-\alpha}^{\alpha} X_1^2 d\phi}
 \tag{37a}$$

$$b' = \frac{\int_{-\alpha}^{\alpha} [2N_1 X_1 X_2 + N_2 X_1^2] d\phi}{\int_{-\alpha}^{\alpha} X_1^2 d\phi}
 \tag{37b}$$

Since

$$N_1 = \frac{1}{H} S_1 = \frac{1}{H} \epsilon_1; \quad N_2 = \frac{1}{H} S_2 = \frac{1}{H} (e_2 + \frac{1}{2} X_1^2)
 \tag{38}$$

the result (36) can be written in its final form:

$$\frac{\lambda}{\lambda_{cr}} = 1 + a\epsilon + b\epsilon^2 + \dots
 \tag{39}$$

where

$$a = \frac{a'}{\lambda_{cr}} = \frac{3}{2H\lambda_{cr}} \frac{\int_{-\alpha}^{\alpha} e_1 X_1^2 d\phi}{\int_{-\alpha}^{\alpha} X_1^2 d\phi}
 \tag{40a}$$

$$b = \frac{b'}{\lambda_{cr}} = \frac{1}{H\lambda_{cr}} \frac{\int_{-a}^a [2e_1 x_1 x_2 + e_2 x_1^2 + \frac{1}{2} x_1^4] d\phi}{\int_{-a}^a x_1^2 d\phi} \quad (40b)$$

Recall that according to the theory, if $a \neq 0$, then the structure will be in an unstable state in the postbuckling range, and it will also be imperfection sensitive. If $a = 0$, $b \neq 0$, then the postbuckling stability and the imperfection sensitivity vary as the arithmetic sign of b .

In the present result it appears at first glance that the existence of a stable or unstable equilibrium state in the postbuckling range depends on whether or not inextensibility is assumed. For from equation (40a), if $e_1(\phi)$ is non-zero, then the coefficient a might be. However, recalling Eq. (22), it is clear that the coefficient in question will always vanish for asymmetric buckling! Thus the exclusion (or inclusion) of the arch extensibility can at best only influence the quantitative nature of the postbuckling equilibrium state, and not its qualitative nature.

It has already been shown that for asymmetric buckling the buckling extensibility e_1 is quite small in magnitude, with no appreciable effect on the buckling load. With this in mind, as well as the discussion of the previous paragraph, it seems quite reasonable to stipulate that

$$e_1 = 0 \quad \text{and} \quad e_2 = 0 \quad (41)$$

In this instance the coefficient b reduces to

$$b = \frac{1}{2H\lambda_{cr}} \cdot \frac{\int_{-a}^a x_1^4 d\phi}{\int_{-a}^a x_1^2 d\phi} \quad (42)$$

Using the excellent approximate solution (12), with its critical load defined by Eq. (14), it is then a straightforward matter to calculate the postbuckling relationship:

$$\lambda = \lambda_{cr} + (12) \left(\frac{\alpha^2}{\pi^2} \right) \frac{[1 + 3 \left(\frac{\pi^2}{2} - 1 \right) + \frac{3}{8} \left(\frac{\pi^2}{2} - 1 \right)^2]}{[2 + \left(\frac{\pi^2}{2} - 1 \right)^2]} \left(\frac{\epsilon A^*}{h} \right)^2 \quad (43)$$

(In writing this result cognizance has been taken of the fact that the coefficient A in Eq. (12) was nondimensionalized with respect to the radius R , i.e. $A = \frac{A^*}{R}$, and of the definition (3)).

It is clear from Eq. (43) that $\lambda \geq \lambda_{cr}$, and thus the postbuckling behavior is always stable, and that the arch (or ring if $\alpha = \frac{\pi}{2}$) will not be sensitive to imperfections in its behavior.

5. POSTBUCKLING: KOITER'S APPROACH

In order to examine the stability of the bifurcation point and of the postbuckling behavior using Koiter's approach directly, the total potential energy is first divided into the prebuckling contributions, and into the terms due to the buckling and postbuckling behavior. If the prebuckling behavior is again linearized, the "expansions" (44) are now introduced, i.e., let

$$\begin{aligned} e &= \lambda e_0 + e \\ w &= \lambda w_0 + w \\ \chi &= \chi \end{aligned} \tag{44}$$

Substituting these expansions into the energy functional (5) yields

$$\begin{aligned} \frac{2R}{EI} (U + V) &= \frac{1}{H} \int_{-\alpha}^{\alpha} (\lambda^2 e_0^2 - 2\lambda^2 w_0) d\phi \\ &+ \frac{1}{H} \int_{-\alpha}^{\alpha} (2\lambda e_0 e - 2\lambda w_0 w) d\phi \\ &+ \frac{1}{H} \int_{-\alpha}^{\alpha} [e^2 + \lambda e_0 \chi^2 + e \chi^2 + \frac{1}{4} \chi^4] d\phi \\ &+ \int_{-\alpha}^{\alpha} \left(\frac{d\chi}{d\phi} \right)^2 d\phi \end{aligned} \tag{45}$$

In view of the prebuckling results obtained earlier, the total potential energy due to deformation beyond the prebuckling state can be written as

$$P^\lambda = \frac{2R}{EI} (U + V) + 2\alpha H \lambda^2 = P_1^\lambda + P_2^\lambda + P_3^\lambda + P_4^\lambda \quad (46)$$

where

$$P_1^\lambda = -2\lambda \int_{-\alpha}^{\alpha} (e + w) d\phi \quad (47a)$$

$$P_2^\lambda = \frac{1}{H} \int_{-\alpha}^{\alpha} e^2 d\phi - \lambda \int_{-\alpha}^{\alpha} \chi^2 d\phi + \int_{-\alpha}^{\alpha} \left(\frac{d\chi}{d\phi}\right)^2 d\phi \quad (47b)$$

$$P_3^\lambda = \frac{1}{H} \int_{-\alpha}^{\alpha} e \chi^2 d\phi \quad (47c)$$

$$P_4^\lambda = \frac{1}{4H} \int_{-\alpha}^{\alpha} \chi^4 d\phi \quad (47d)$$

Now, by the definition of $e(\phi)$ it is clear that

$$P_1^\lambda = -2\lambda \int_{-\alpha}^{\alpha} \left(\frac{dv}{d\phi} - w + w\right) d\phi = -2\lambda [v(\alpha) - v(-\alpha)] \quad (48)$$

Hence, for a supported arch, $P_1^\lambda \equiv 0$. Thus the potential energy change during and after buckling is simply

$$P^\lambda = P_2^\lambda + P_3^\lambda + P_4^\lambda \quad (49)$$

where P_2^λ , P_3^λ and P_4^λ are given by equations (47b, c, d).

Recall that the behavior of interest takes place at loads very close to $\lambda = \lambda_{cr}$, the buckling load. Thus, to a first approximation the energy functionals (47) can be expanded in Taylor series about the point $\lambda = \lambda_{cr}$. As P_3^λ , P_4^λ do not (for this problem) explicitly depend on λ , they appear only as constants, while

$$\begin{aligned} P_2^\lambda &= P_2^\lambda \Big|_{\lambda=\lambda_{cr}} + (\lambda - \lambda_{cr}) \frac{dP_2^\lambda}{d\lambda} \Big|_{\lambda=\lambda_{cr}} + \dots \\ &= P_2 + (\lambda - \lambda_{cr}) P_2' + \dots \end{aligned} \quad (50)$$

where

$$P_2 = \frac{1}{H} \int_{-\alpha}^{\alpha} e^2 d\phi - \lambda_{cr} \int_{-\alpha}^{\alpha} \chi^2 d\phi + \int_{-\alpha}^{\alpha} \left(\frac{d\chi}{d\phi} \right)^2 d\phi \quad (51a)$$

$$P'_2 = - \int_{-\alpha}^{\alpha} \chi^2 d\phi \quad (51b)$$

Then the total energy change is

$$P^\lambda = P_2 + (\lambda - \lambda_{cr}) P'_2 + P_3 + P_4 \quad (52)$$

where $P_3 = P_3^\lambda$ and $P_4 = P_4^\lambda$.

Now the following displacement and strain expansions are introduced:

$$w = \epsilon w_1 + \epsilon^2 w_2 + \dots$$

$$v = \epsilon v_1 + \epsilon^2 v_2 + \dots$$

$$e = \epsilon e_1 + \epsilon^2 e_2 + \dots$$

$$\chi = \epsilon \chi_1 + \epsilon^2 \chi_2 + \dots$$

(53)

where ϵ is the same small parameter used previously. Introduction of the expansions (53) into the energy functionals yields, to order ϵ^4 :

$$\begin{aligned} P_2 = & \epsilon^2 \left\{ \frac{1}{H} \int_{-\alpha}^{\alpha} e_1^2 d\phi - \lambda_{cr} \int_{-\alpha}^{\alpha} \chi_1^2 d\phi + \int_{-\alpha}^{\alpha} \left(\frac{d\chi_1}{d\phi} \right)^2 d\phi \right\} \\ & + 2\epsilon^3 \left\{ \frac{1}{H} \int_{-\alpha}^{\alpha} e_1 e_2 d\phi - \lambda_{cr} \int_{-\alpha}^{\alpha} \chi_1 \chi_2 d\phi + \int_{-\alpha}^{\alpha} \frac{d\chi_1}{d\phi} \frac{d\chi_2}{d\phi} d\phi \right\} \\ & + \epsilon^4 \left\{ \frac{1}{H} \int_{-\alpha}^{\alpha} (e_2^2 + 2e_1 e_3) d\phi - \lambda v \int_{-\alpha}^{\alpha} (\chi_2^2 + 2\chi_1 \chi_3) d\phi \right. \\ & \left. + \int_{-\alpha}^{\alpha} \left[\left(\frac{d\chi_2}{d\phi} \right)^2 + 2 \frac{d\chi_1}{d\phi} \frac{d\chi_3}{d\phi} \right] d\phi \right\} \end{aligned} \quad (54a)$$

$$P_2' = -\epsilon^2 \int_{-\alpha}^{\alpha} x_1^2 d\phi - 2\epsilon^3 \int_{-\alpha}^{\alpha} x_1 x_2 d\phi - \epsilon^4 \int_{-\alpha}^{\alpha} [x_2^2 + 2x_1 x_3] d\phi \quad (54b)$$

$$P_3 = \epsilon^3 \frac{1}{H} \int_{-\alpha}^{\alpha} e_1 x_1^2 d\phi + \epsilon^4 \frac{1}{H} \int_{-\alpha}^{\alpha} [e_2 x_1^2 + 2e_1 x_1 x_2] d\phi \quad (54c)$$

$$P_4 = \epsilon^4 \frac{1}{4H} \int_{-\alpha}^{\alpha} x_1^4 d\phi \quad (54d)$$

Then the same orthogonality conditions applied in the Budiansky-Hutchinson formalism are applied again (written entirely in terms of kinematic quantities) to the functionals (54). These functionals are then greatly simplified and take the form:

$$P_2 = \epsilon^2 \left\{ \frac{1}{H} \int_{-\alpha}^{\alpha} e_1^2 d\phi - \lambda_{cr} \int_{-\alpha}^{\alpha} x_1^2 d\phi + \int_{-\alpha}^{\alpha} \left(\frac{dx_1}{d\phi} \right)^2 d\phi \right\} \\ + \epsilon^4 \left\{ \frac{1}{H} \int_{-\alpha}^{\alpha} e_2^2 d\phi - \lambda_{cr} \int_{-\alpha}^{\alpha} x_2^2 d\phi + \int_{-\alpha}^{\alpha} \left(\frac{dx_2}{d\phi} \right)^2 d\phi \right\}. \quad (55a)$$

$$P_2' = -\epsilon^2 \int_{-\alpha}^{\alpha} x_1^2 d\phi - \epsilon^4 \int_{-\alpha}^{\alpha} x_2^2 d\phi \quad (55b)$$

$$P_3 = \epsilon^3 \frac{1}{H} \int_{-\alpha}^{\alpha} e_1 x_1^2 d\phi \\ + \epsilon^4 \frac{1}{H} \int_{-\alpha}^{\alpha} [e_2 x_1^2 + 2e_1 x_1 x_2] d\phi \quad (55c)$$

$$P_4 = \epsilon^4 \frac{1}{4H} \int_{-\alpha}^{\alpha} x_1^4 d\phi \quad (55d)$$

Note that the term of order ϵ^2 in P_2 is simply the Rayleigh quotient, and thus it vanishes identically. Further, the term of order ϵ^4 in P_2' will be multiplied by $(\lambda - \lambda_{cr})$ according to equation (52).

Since it is expected that for this problem that $(\lambda - \lambda_{cr})$ will be of order ϵ^2 , the term of order ϵ^4 in P_2' may be deleted as being of higher order. Thus the final form of the energy change is:

$$\begin{aligned} F = & -\epsilon^2(\lambda - \lambda_{cr}) \int_{-\alpha}^{\alpha} x_1^2 d\phi + \epsilon^3 \frac{1}{H} \int_{-\alpha}^{\alpha} e_1 x_1^2 d\phi \\ & + \epsilon^4 \left\{ \frac{1}{H} \int_{-\alpha}^{\alpha} [e_2 x_1^2 + 2e_1 x_1 x_2 + \frac{1}{4} x_1^4] d\phi \right. \\ & \left. + \frac{1}{H} \int_{-\alpha}^{\alpha} e_2^2 d\phi - \lambda_{cr} \int_{-\alpha}^{\alpha} x_2^2 d\phi + \int_{-\alpha}^{\alpha} \left(\frac{dx_2}{d\phi} \right)^2 d\phi \right\} \end{aligned} \quad (56)$$

The resemblance between the present approach and the Budiansky-Hutchinson approach is now more visible. However, it appears that there will be some difference due to the term

$$P_2[w_2, v_2] = \frac{1}{H} \int_{-\alpha}^{\alpha} e_2^2 d\phi - \lambda_{cr} \int_{-\alpha}^{\alpha} x_2^2 d\phi + \int_{-\alpha}^{\alpha} \left(\frac{dx_2}{d\phi} \right)^2 d\phi, \quad (57)$$

in the expression of order ϵ^4 in Eq. (56). Terms of this type do appear consistently in Koiter's original analysis (see, for example, Section 3² of Ref. [6].), although they do not appear in analyses using the Budiansky-Hutchinson formalism (see, for example, Ref. [9].). For the present work, under the well established assumption of inextensibility, the terms $P_2[w_2, v_2]$ will be shown to yield no contribution to the result, and the results will be identical to those already obtained.

The second order displacements, v_2 and w_2 , are obtained as the solution of the variational equation

$$\delta \left\{ \frac{1}{H} \int_{-\alpha}^{\alpha} e^2 d\phi - \lambda_{cr} \int_{-\alpha}^{\alpha} x_2^2 d\phi + \int_{-\alpha}^{\alpha} \left(\frac{dx_2}{d\phi} \right)^2 d\phi \right. \\ \left. + \frac{1}{H} \int_{-\alpha}^{\alpha} [e_2 x_1^2 + 2e_1 x_1 x_2 + \frac{1}{4} x_1^4] d\phi \right\} = 0 \quad (58)$$

In carrying out this variation all terms of first order are of course considered as known or given quantities. If inextensibility of the arch is assumed, $e_1 = e_2 = 0$, then the variational equation is just

$$\delta \left\{ \int_{-\alpha}^{\alpha} \left(\frac{dx_2}{d\phi} \right)^2 d\phi - \lambda_{cr} \int_{-\alpha}^{\alpha} x_2^2 d\phi \right\} = 0 \quad (59)$$

Thus the variational equation leads to set of homogeneous equations that can have only a trivial solution*. Hence, for the inextensible arch, it is possible to take as solutions for the second order displacements the trivial ones, i.e.,

$$w_2 = v_2 = 0 \quad (60)$$

Hence the energy functional reduces to (recalling $e_1 = 0$ again):

$$P^\lambda = -e^2 (\lambda - \lambda_{cr}) \int_{-\alpha}^{\alpha} x_2^2 d\phi + \frac{e^4}{4H} \int_{-\alpha}^{\alpha} x_1^4 d\phi \quad (61)$$

Using the approximate solution (12), with $A = \lambda^*/R$, it is a straightforward matter to compute the energy change P^λ as

$$P^\lambda = \left(\frac{e\lambda^*}{R} \right)^2 \frac{\alpha^3}{\pi^2} \left[2 + \left(\frac{\pi^2}{2} - 1 \right)^2 \right] (\lambda_{cr} - \lambda) + \left(\frac{e\lambda^*}{R} \right)^4 \frac{\alpha^5}{2\pi^4} \left[\frac{3}{8} \left(\frac{\pi^2}{2} - 1 \right)^2 + 3 \left(\frac{\pi^2}{2} - 1 \right) + 1 \right] \quad (62)$$

* A solution linearly dependent on the buckling solution is ruled out by the orthogonality condition.

At the critical load, $\lambda = \lambda_{cr}$, it is seen that $\delta P^\lambda = 0$, and thus the bifurcation (critical) state is itself stable. The initial postbuckling load-deflection relationship is determined by the condition*

$$\frac{dP^\lambda}{d(\epsilon A^*)} = 0 \quad (63)$$

from which it follows that

$$\lambda = \lambda_{cr} + (12) \frac{a^2}{\pi^2} \frac{\left[1 + 3\left(\frac{r}{a} - 1\right) + \frac{3}{8}\left(\frac{r}{a} - 1\right)^2\right]}{2 + \left(\frac{r}{a} - 1\right)^2} \left(\frac{A^*}{h}\right)^2 \quad (64)$$

This is exactly the result (43) obtained previously.

* This is an approximation to $\delta P^\lambda = 0$

6. DISCUSSION AND CONCLUSIONS

The present paper has considered the buckling and postbuckling behavior of circular arches (and rings) under constant directional loading. For arches steep enough so that asymmetric bifurcation buckling is critical, it has been demonstrated that the arch inextensibility is a negligible quantity in magnitude, in its effect on the buckling load, and in its effect on initial postbuckling behavior. In addition an approximate solution for the linearized eigenvalue problem was presented that duplicated almost precisely the buckling pressures obtained from the exact solution.

The numerical results for the eigenvalue problem as solved by Chwalla and Kollbrunner and as given by the present approximate and exact solutions have been given in Table 1. It is worth pointing out that the approximate (inextensible) eigenvalues are always greater than or equal to Chwalla and Kollbrunner's (inextensible) results, in accord with Rayleigh's Principle. The results when the extensibility is accounted for are always less than the inextensible results. This is in direct contrast to the analysis of K  mmel [2] which indicated that the buckling pressures would increase if extensibility were accounted for*. As it has already been pointed out, the

* Singer and Babcock [5] have already pointed out that K  mmel's result was also erroneous in arriving at the coefficient $\lambda_{cr} = 4$ for constant directional pressure, assuming inextensible deformations.

differential equation solved by Chwalla and Kollbrunner, assuming inextensibility, is identical to that solved here, without that assumption. The difference is in the boundary conditions, where the inextensibility assumption provides less freedom (greater stiffness). Hence it is quite proper that the inextensible eigenvalues be upper bounds to the (freer) extensible eigenvalues.

It is also worth pointing out that the results given in Table 1 for the Chwalla-Kollbrunner eigenvalues are not precisely those given in the original paper [1]. Rather they were calculated (using a digital computer) directly from the transcendental equation (20). There are some discrepancies, although they are very small. For example:

	<u>Chwalla and Kollbrunner [1]</u>	<u>Chwalla and Kollbrunner Eq. (20) - Digital Computer</u>
$\alpha = \frac{\pi}{3}$	8.725	8.727
$\alpha = \frac{\pi}{2}$	3.265	3.271

It is easily verified that the original Chwalla and Kollbrunner results satisfy Eq. (20) to within the precision of limited-accuracy trigonometric tables and slide rule accuracy that must have governed calculations in the early 1930's.

The postbuckling behavior for the constant-directionally arches and rings has been shown to be quite stable, and thus imperfection sensitivity is not an issue here. Also it has been shown, under the reasonable assumption of inextensible buckling and postbuckling deformation, that the second order displacement solution does not change the results that would be obtained if only first order (buckling) displacements were used in the calculations.

Finally it has been shown that, for the special circumstances of this problem, the approach of Koiter as originally given and the variation proposed by Budiansky and Hutchinson lead to identical results.

ACKNOWLEDGEMENTS

The author is grateful for the partial financial support offered by Carnegie-Mellon University that made his visit to the Technion possible.

It is also a great pleasure to thank Professor Josef Singer for arranging the visit, and Professors Singer and Menachem Baruch for many helpful and informative discussions and critiques.

REFERENCES

1. Chwalla, E., and Kollbrunner, C.F., " Beiträge zum Knickproblem des Bogenträgers und des Rahmens", Stahlbau, Vol. 11, No. 10, May 1938, pp. 73-78.
2. Kammel, G., "Der Einfluss der Längsdehnung auf die elastische Stabilität geschlossener Kreisringe", Acta Mechanica, Vol. 4, 1967, pp.34-42.
3. Lévy, M., "Memoire sur un nouveau cas integrable du probleme de l'elastique et l'une de ses applications", Journal de Mathematiques pures et Appliquees, Liouville, Series 3, Vol. 10, 1884, pp.5-42.
4. Carrier, G.F., " On the Buckling of Elastic Rings", Journal of Mathematics and Physics, Vol. 26, 1947, pp. 94-103.
5. Singer, J., and Babcock, C.D., " On the Buckling of Rings under Constant Directional and Centrally Directed Pressure", Journal of Applied Mechanics, Vol. 37, No. 1, March 1970, pp. 215-218.
6. Koiter, W.T., " Over de stabiliteit van het elastisch evenwicht" ("On the Stability of Elastic Equilibrium"). Thesis, Delft, S.J. Paris, Amsterdam, 1945. English translation issued as NASA TT F-10,833,1967.
7. Budiansky, B., and Hutchinson, J.W., "Dynamic Buckling of Imperfection - Sensitive Structures", Proceedings of the XI International Congress of Applied Mechanics, H. Gortler, Ed., Springer Verlag, New-York, 1964, pp.636-651.
8. Budiansky, B., "Dynamic Buckling of Elastic Structures: Criteria and Estimates," Proceedings, International Conference on Dynamic Stability of Structures, Pergamon, New York, 1966, pp.83-106.

9. Budiansky, B., "Post-Buckling Behavior of Cylinders in Torsion", Theory of Thin Shells, F.L. Niordson, Ed., Springer Verlag, Berlin, 1969.
10. Koiter, W.T., " Post-Buckling Analysis of a Simple Two-Bar Frame", Recent Progress in Applied Mechanics, Almquist and Wiksell, Stockholm, 1966, pp.337-354.
11. Haftka, R., and Nachbar, W., "Post-Buckling Analysis of an Elastically-Restrained Column," International Journal of Solids and Structures, Vol. 6, No. 7, 1970, pp.1433-1449.
12. Sanders, J.L., "Non-Linear Theories for Thin Shells", Quarterly of Applied Mathematics, Vol. 21, No. 1 , 1963, pp. 21-36.
13. Schreyer, H.L., and Masur, E.F., "Buckling of Shallow Arches", Journal of the Engineering Mechanics Division, ASCE, Vol. 92, No. EM4, August 1966, pp.1-19.
14. Reissner, E., " A Note on Postbuckling Behavior of Pressurized Shallow Spherical Shells", Journal of Applied Mechanics, Vol. 37, No. 2, June 1970, pp.533-534.
15. Roorda, J., "The Buckling Behavior of Imperfect Structural Systems", Journal of Mechanics and Physics of Solids, Vol. 13, 1965, pp.267-280.

TABLE 1 : ASYMMETRIC BUCKLING PRESSURES FOR CIRCULAR ARCHES; $\lambda = qR^3/EI$.

	Solution of Chwalla and Kollbrunner Eq. (20)	Present Approximation Eq. (14)	Present Exact Result Eq. (19) (h/R = 1/10)
$\frac{\pi}{10}$	99.979598	99.979598	99.979541
$\frac{\pi}{8}$	63.967766	63.967766	63.967676
$\frac{\pi}{6}$	35.941318	35.941320	35.941151
$\frac{\pi}{4}$	15.859006	15.859031	15.858590
$\frac{\pi}{2}$	3.271245	3.272727	3.269233

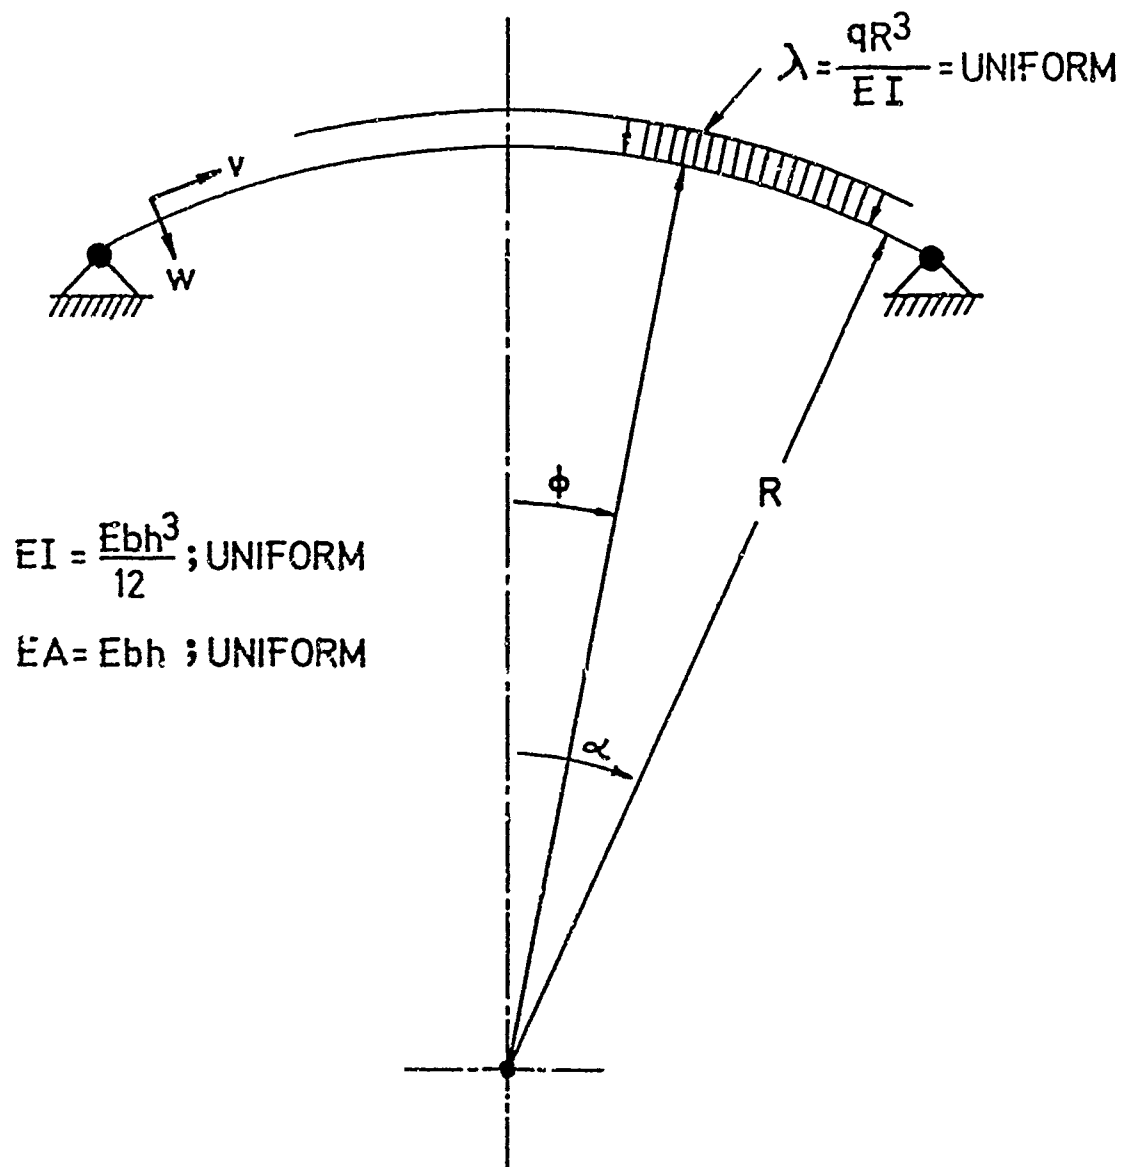


FIGURE. 1 ARCH GEOMETRY AND LOADING