

AD-750 564

DETERMINATION OF AERODYNAMIC DRAG FROM
RADAR DATA

Robert F. Lieske, et al

Ballistic Reseach Laboratories

Prepared for:

Army Materiel Command

August 1972

DISTRIBUTED BY:

NTIS

National Technical Information Service
U. S. DEPARTMENT OF COMMERCE
5285 Port Royal Road, Springfield Va. 22151

AD 750564

BRL MR 2210

BRL

AD

MEMORANDUM REPORT NO. 2210

DETERMINATION OF AERODYNAMIC DRAG FROM RADAR DATA

by

Robert F. Lieske
Antoinette M. MacKenzie

August 1972

DDC
RECEIVED
OCT 30 1972
RECEIVED
B

Approved for public release; distribution unlimited.

Reproduced by
NATIONAL TECHNICAL
INFORMATION SERVICE
U S Department of Commerce
Springfield VA 22151

U.S. ARMY ABERDEEN RESEARCH AND DEVELOPMENT CENTER
BALLISTIC RESEARCH LABORATORIES
ABERDEEN PROVING GROUND, MARYLAND

26R

Destroy this report when it is no longer needed.
Do not return it to the originator.

Secondary distribution of this report by originating or
sponsoring activity is prohibited.

Additional copies of this report may be purchased from
the U.S. Department of Commerce, National Technical
Information Service, Springfield, Virginia 22151

ACCESSION FOR	
NTIS	White Section - <input checked="" type="checkbox"/>
D.C.	Chief Section <input type="checkbox"/>
UNCLASSIFIED	<input type="checkbox"/>
JUSTIFICATION	
BY	
DISTRIBUTION/AVAILABILITY CODES	
REG.	A/AIL. AND/OR SPECIAL
A	

The findings in this report are not to be construed as
an official Department of the Army position, unless
so designated by other authorized documents.

Unclassified

Security Classification

DOCUMENT CONTROL DATA - R & D

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

1. ORIGINATING ACTIVITY (Corporate author) US Army Aberdeen Research and Development Center Ballistic Research Laboratories Aberdeen Proving Ground, Maryland 21005		2a. REPORT SECURITY CLASSIFICATION Unclassified	
		2b. GROUP	
3. REPORT TITLE DETERMINATION OF AERODYNAMIC DRAG FROM RADAR DATA			
4. DESCRIPTIVE NOTES (Type of report and inclusive dates)			
5. AUTHOR(S) (First name, middle initial, last name) Robert F. Lieske and Antoinette M. MacKenzie			
6. REPORT DATE August 1972		7a. TOTAL NO. OF PAGES 35	7b. NO. OF REFS 2
8a. CONTRACT OR GRANT NO.		8b. ORIGINATOR'S REPORT NUMBER(S)	
a. PROJECT NO. RDT&E Project No. 1T562603A041		BRL MEMORANDUM REPORT NO. 2210	
c.		8c. OTHER REPORT NO(S) (Any other numbers that may be assigned this report)	
d.			
10. DISTRIBUTION STATEMENT Approved for public release; distribution unlimited.			
11. SUPPLEMENTARY NOTES		12. SPONSORING MILITARY ACTIVITY Commanding General U.S. Army Materiel Command Washington, DC 20315	
13. ABSTRACT A method for utilizing point position radar data to determine the aerodynamic drag of a projectile is described. Proof of the method's validity and feasibility is represented by results obtained with flight test data taken for a range firing of the 155mm howitzer with the M107 projectile. Details of illustrations in this document may be better studied on microfiche.			

DD FORM 1473

REPLACES DD FORM 1473, 1 JAN 62, WHICH IS OBSOLETE FOR ARMY USE.

Unclassified

Security Classification

I-A

Unclassified

Security Classification

14 KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
Radar Data Drag Coefficient Flight Test Data						

Unclassified

Security Classification

I-B

BALLISTIC RESEARCH LABORATORIES

MEMORANDUM REPORT NO. 2210

AUGUST 1972

DETERMINATION OF AERODYNAMIC DRAG FROM RADAR DATA

**Robert F. Lieske
Antoinette M. MacKenzie**

Exterior Ballistics Laboratory

Approved for public release; distribution unlimited.

RDT&E Project No. 1T562603A041

ABERDEEN PROVING GROUND, MARYLAND

Best Available Copy

BALLISTIC RESEARCH LABORATORIES

MEMORANDUM REPORT NO. 2210

RFLieske/AMMacKenzie/mjm
Aberdeen Proving Ground, Md.
August 1972

DETERMINATION OF AERODYNAMIC DRAG FROM RADAR DATA

ABSTRACT

A method for utilizing point position radar data to determine the aerodynamic drag of a projectile is described. Proof of the method's validity and feasibility is represented by results obtained with flight test data taken for a range firing of the 155mm howitzer with the M107 projectile.

TABLE OF CONTENTS

	Page
ABSTRACT	3
LIST OF FIGURES	7
LIST OF SYMBOLS	9
I. INTRODUCTION	11
II. TEST PROGRAM	11
III. REDUCTION OF FLIGHT TEST DATA	12
IV. COMPUTATION OF DRAG COEFFICIENT (C_D)	13
V. RESULTS	14
VI. CONCLUSION	16
FIGURES	17
REFERENCES	31
DISTRIBUTION LIST	33

LIST OF FIGURES

Figure	Radar FPS 16	Page
1.	Aerodynamic Drag Coefficient (C_D) vs Mach No., for All Charges and QE's	17
2.	Subsonic Drag Coefficient (C_D) vs Yaw Squared, for All Charges and QE's	18
3.	Aerodynamic Drag Coefficient (C_D) vs Mach No., for Charges 5 and 7, QE = 300 mils.	19
4.	Aerodynamic Drag Coefficient (C_D) vs Mach No., for Charges 2, 5, and 7, QE = 700 mils.	20
5.	Aerodynamic Drag Coefficient (C_D) vs Mach No., for Charges 5 and 7, QE = 1120 mils.	21
6.	Aerodynamic Drag Coefficient (C_D) vs Mach No., for Charge 5, QE = 300 mils	22
7.	Aerodynamic Drag Coefficient (C_D) vs Mach No., for Charge 7, QE = 300 mils	23
8.	Aerodynamic Drag Coefficient (C_D) vs Mach No., for Charge 2, QE = 700 mils	24
9.	Aerodynamic Drag Coefficient (C_D) vs Mach No., for Charge 5, QE = 700 mils	25
10.	Aerodynamic Drag Coefficient (C_D) vs Mach No., for Charge 7, QE = 700 mils	26
11.	Aerodynamic Drag Coefficient (C_D) vs Mach No., for Charge 5, QE = 1120 mils.	27
12.	Aerodynamic Drag Coefficient (C_D) vs Mach No., for Charge 7, QE = 1120 mils.	28

LIST OF FIGURES (Continued)

Figure		Page
	Radar MPS 19	
13.	Aerodynamic Drag Coefficient (C_D) vs Mach No., for All Charges and QE's	29
	Radar MOD II	
14.	Aerodynamic Drag Coefficient (C_D) vs Mach No., for All Charges and QE's	30

LIST OF SYMBOLS

d	reference diameter of projectile [m]
\vec{g}	acceleration vector due to gravity [m/sec ²]
g_0	acceleration due to gravity (surface) [m/sec ²]
m	weight of projectile [kg]
r	distance between center of earth and projectile [m]
\vec{u}	velocity of projectile with respect to ground [m/sec]
\ddot{u}	acceleration of projectile with respect to ground [m/sec ²]
\vec{v}	velocity of projectile with respect to air [m/sec]
\vec{w}	velocity of air with respect to ground [m/sec]
Az	azimuth of line of fire (clockwise from north) [deg]
C_D	effective drag force coefficient
L	latitude of launch point [deg]
R	radius of earth [m]
\vec{X}	position of projectile with respect to ground fixed coordinate system [m]
Ω	angular velocity of the earth [rad/sec]
$\vec{\Lambda}$	Coriolis acceleration due to rotation of the earth [m/sec ²]
ρ	air density as a function of height [kg/m ³]
QE	quadrant elevation [mils]

I. INTRODUCTION

The differential equations for the motion of a projectile are the primary tools used in the preparation of Firing Tables. These equations require two basic kinds of input data: aerodynamic coefficients (determined from aerodynamic spark ranges or wind tunnels) and ballistic data (obtained from large scale range firings). The possibility of obtaining both the aerodynamic coefficients and the ballistic data from a single large scale range firing has been discussed by those who prepare Firing Tables ever since the availability of tracking radars on many of our national firing ranges.

Of importance in utilizing radar data to obtain information for the preparation of Firing Tables are the determination of suitable radars and the development of suitable analysis methods. The Ballistic Research Laboratories has been investigating these areas using data supplied by the following radars at Wallops Island, Virginia: Spandar, FPS 16, MPS 19 and MOD II. For detailed descriptions of these radars see Reference 1.*

This report describes a method of utilizing point position radar data in the determination of aerodynamic drag², the most important of the aerodynamic coefficients used in the preparation of Firing Tables. Also included are the results obtained when this method was applied to FPS 16 radar data from a firing of the 155mm M107 projectile.

II. TEST PROGRAM

A test program totaling 28 rounds, distributed as shown, was fired at Wallops Island to provide radar tracking data for a series of trajectories which included a typical sample of launch angles and initial

*References appear on page 31.

velocities. Two projectiles were fired at each of nine charge and quadrant elevation combinations. One projectile at each combination was fired on one day while the second projectile at each combination was fired on another day to obtain weapon, atmospheric and radar day to day variations. In addition, a single group of 10 rounds was fired, as rapidly as possible, at charge 7 and 700 mils quadrant elevation to provide a large amount of data on a single occasion under similar meteorological and test conditions.

Distribution of Rounds Fired

Quadrant Elevation-mils		300	700	1120
Charge (No.)	Muzzle Velocity (mps)			
2	235	2	2	2
5	372	2	2	2
7	564	2	2, 10	2

Four radars, the FPS 16, MPS 19, Spandar and MOD II, were used to track the test rounds, producing time-space histories of each projectile's flight. Additional data recorded for each round were weight and muzzle velocity, the latter being obtained by smear camera. Meteorological measurements, comprising winds and atmospheric conditions, were taken throughout the time of the firing.

III. REDUCTION OF FLIGHT TEST DATA

At Wallops Island, radar data consisting of slant range, elevation angle and azimuth angle are recorded on digital tape. The first step in the actual radar reduction program is the application of the appropriate trigonometric transformations to convert the data to range, height and deflection referenced to the gun coordinates and firing azimuth. These values are then smoothed, employing for the purpose a moving arc

technique that uses the method of least squares to fit a second-degree polynomial to the data in every 7.5 seconds span along the trajectory. The polynomial is evaluated at the midpoint of each section, and the first and second derivatives are computed at this time to obtain the velocity (\vec{u}) and acceleration ($\vec{\dot{u}}$) vectors.

IV. COMPUTATION OF DRAG COEFFICIENT (C_D)

The frame of reference for all vectors to be presented is a ground-fixed, right-handed Cartesian coordinate system with unit vectors ($\vec{1}, \vec{2}, \vec{3}$). Define the $\vec{2}$ axis to be parallel to the vector \vec{g} at the origin and in the opposite direction.

The mass of the projectile, the atmospheric conditions existing at the time of the firing and the reduced radar data for the round provide the necessary inputs to the equation for determination of the drag coefficient (C_D). C_D is obtained by an inverse solution of the point-mass differential equations of motion.

$$C_D = -\frac{[(u_1 - w_1)(\dot{u}_1 - g_1 - \Lambda_1) + u_2(\dot{u}_2 - g_2 - \Lambda_2) + (u_3 - w_3)(\dot{u}_3 - g_3 - \Lambda_3)]}{8m/\pi\rho d^2 v^3}$$

The acceleration due to gravity (\vec{g}) is

$$\vec{g} = (-g_0 R^2/r^3) \begin{bmatrix} X_1 \\ X_2 + R \\ X_3 \end{bmatrix}$$

where $r = [X_1^2 + (X_2 + R)^2 + X_3^2]^{\frac{1}{2}}$.

The Coriolis acceleration ($\vec{\Lambda}$) due to rotation of the earth is expressed by

$$\vec{\Lambda} = \begin{bmatrix} -\lambda_1 u_2 - \lambda_2 u_3 \\ \lambda_1 u_1 + \lambda_3 u_3 \\ \lambda_2 u_1 - \lambda_3 u_2 \end{bmatrix}$$

For the northern hemisphere the λ 's are defined by the following equations (for the southern hemisphere replace L by -L).

$$\lambda_1 = 2 \Omega \cos L \sin Az$$

$$\lambda_2 = 2 \Omega \sin L$$

$$\lambda_3 = 2 \Omega \cos L \cos Az$$

V. RESULTS

For the purpose of this report the FPS 16 was the only radar that produced acceptable results over the Mach number region of interest. Spandar locked-on very late in the flights it tracked, yielding too few data for a complete analysis. The MPS 19 and MOD II which are the least precise radars¹ gave inadequate results using this method of analysis.

All of the data collected by the FPS 16 radar were reduced and used in the computation of aerodynamic drag. The resultant drag coefficients have been grouped according to various combinations of quadrant elevation and charge and are presented in graphical form as a function of Mach number. Values lying outside the limits of any one graph are plotted along the edges and bear the following identification \square . Figure 1 is a plot of the drag coefficients obtained for all charges and quadrant elevations. As shown by the graph, the curve formed by these computed values closely follows the aerodynamic spark range curve representing the expected performance of the M107 round.

The increase in drag noticeable in the lower Mach number region of the plot is probably due either to a combination of the yaw of repose and the precessional and nutational yawing motion or to the yaw of repose alone. Figure 2 shows the subsonic values of the drag coefficient for Mach numbers less than .8. The drag coefficient is plotted against

computed values of the yaw of repose squared as defined in the modified point mass trajectory model.³ To determine the change in drag due to yaw a least squares procedure was used to fit these data as a linear function of yaw squared. The resulting curve also shows good agreement with the aerodynamic spark range curve.

Figures 3, 4 and 5 are plots of the aerodynamic drag coefficients found at each of the quadrant elevations fired, irrespective of charge. Figures 3 and 4 appear to indicate that at the lower elevations there is little if any increase in drag due to the yaw of repose, while at the highest elevation, Figure 5, the increase is considerable. The remaining Figures 6 through 12 present the drag coefficients at each elevation and charge. Figures 6 and 7 are plots for a quadrant elevation of 300 mils at charges 5 and 7. In Figures 8, 9 and 10, quadrant elevation is 700 mils at charges 2, 5 and 7. Finally, Figures 11 and 12 have a quadrant elevation of 1120 mils at charges 5 and 7. The three plots at charge 7 are in good agreement, and the three plots at charge 5 with only the highest quadrant elevation having a large amount of data also indicate good agreement.

Figures 13 and 14 are plots of the drag coefficients calculated for all charges and quadrant elevations for the MPS 19 and MOD II radars, respectively. Both graphs indicate that meaningful results cannot be obtained from these radar data by the method discussed in this report.

VI. CONCLUSION

On the basis of the above study it has been established that it is feasible by a polynomial smoothing and differentiation method to obtain aerodynamic drag force values from flight test data recorded by a radar with the precision of the FPS 16. Assuming a computed yaw of repose as defined in the modified point mass trajectory model³, the aerodynamic change in drag due to yaw can also be determined. Also, it can be concluded that, on the average, the drag results obtained from radar data agree well with the drag results from ballistic range firings.

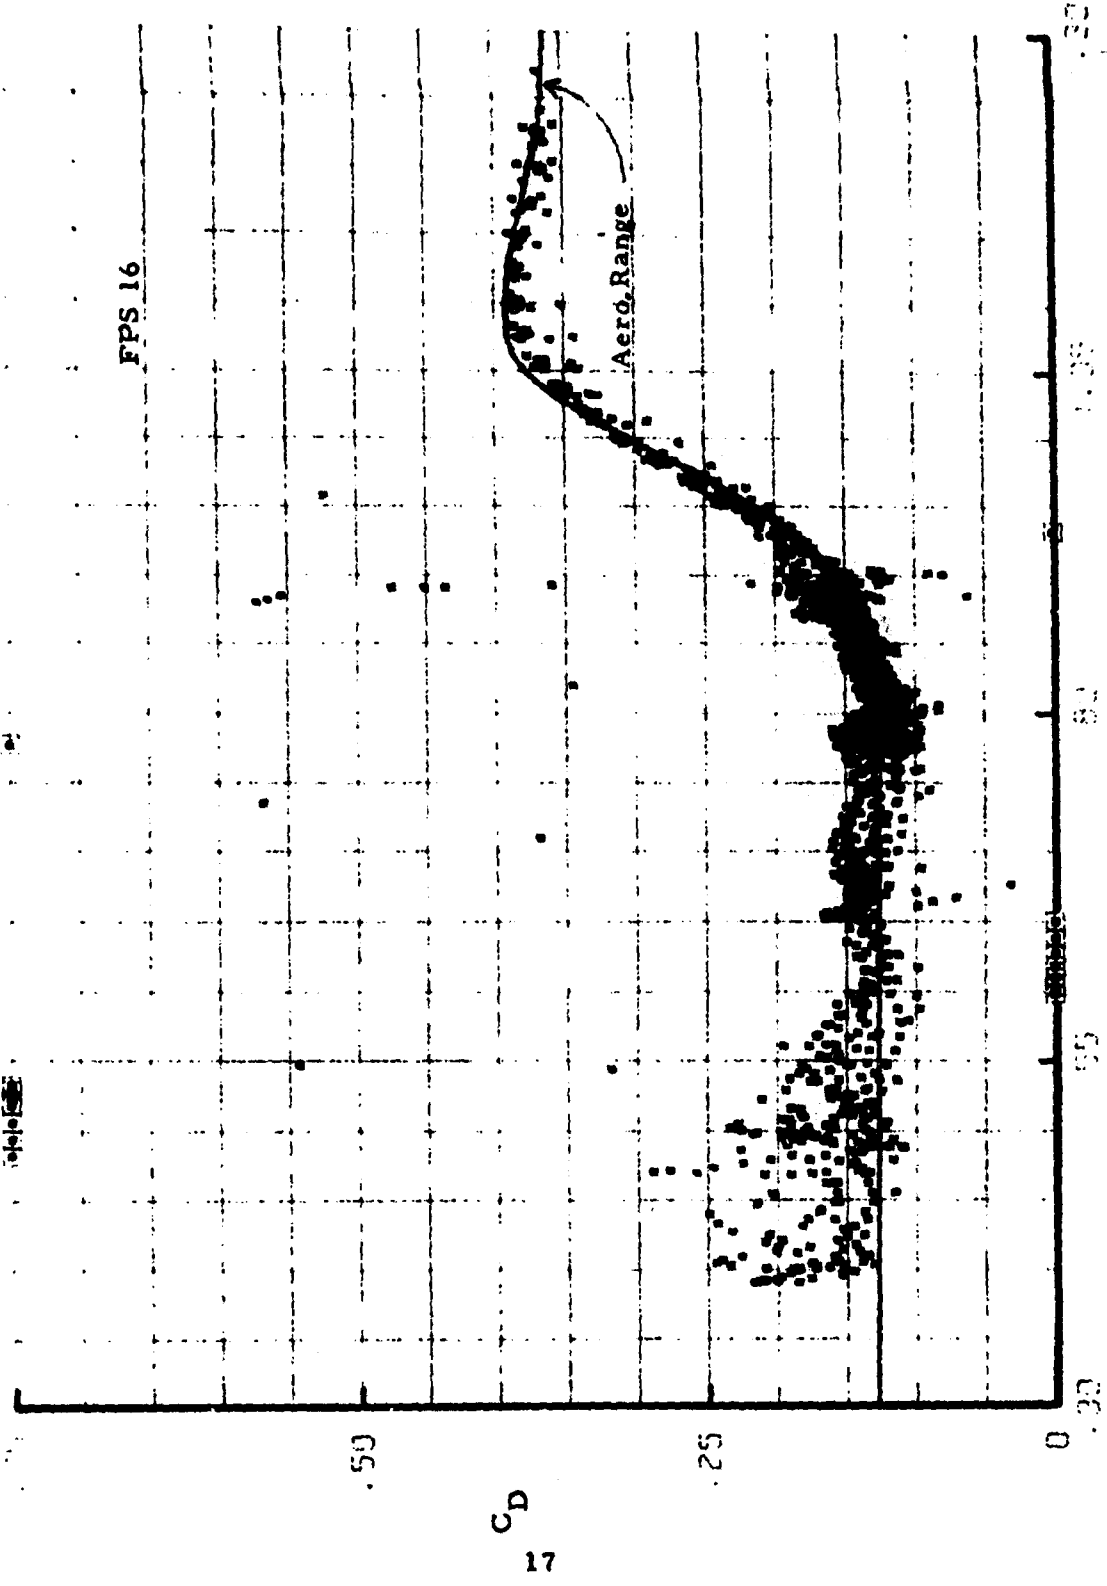


Figure 1. Aerodynamic Drag Coefficient (C_D) vs Mach No.,
for All Charges and QE's

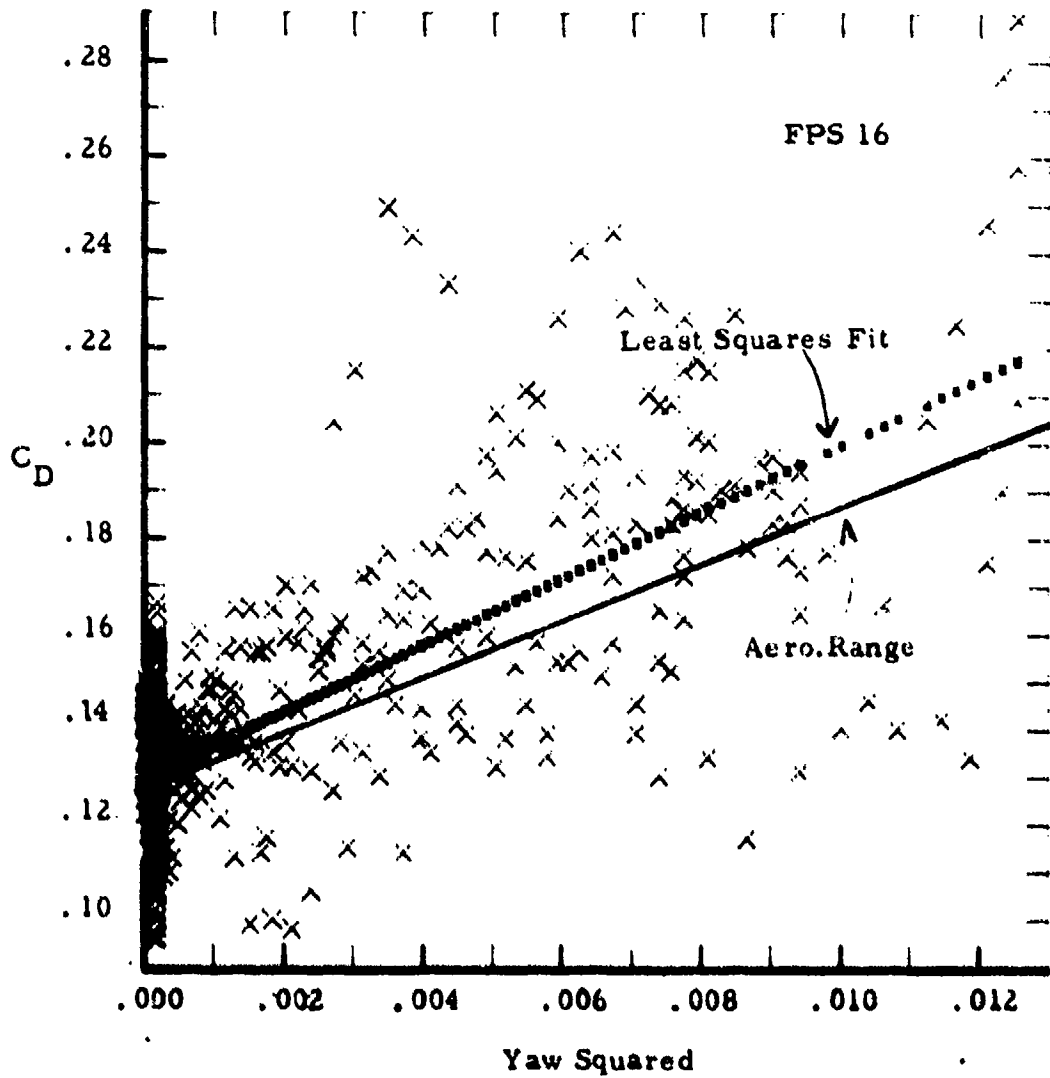


Figure 2. Subsonic Drag Coefficient (C_D) vs Yaw Squared,
for All Charges and QE's

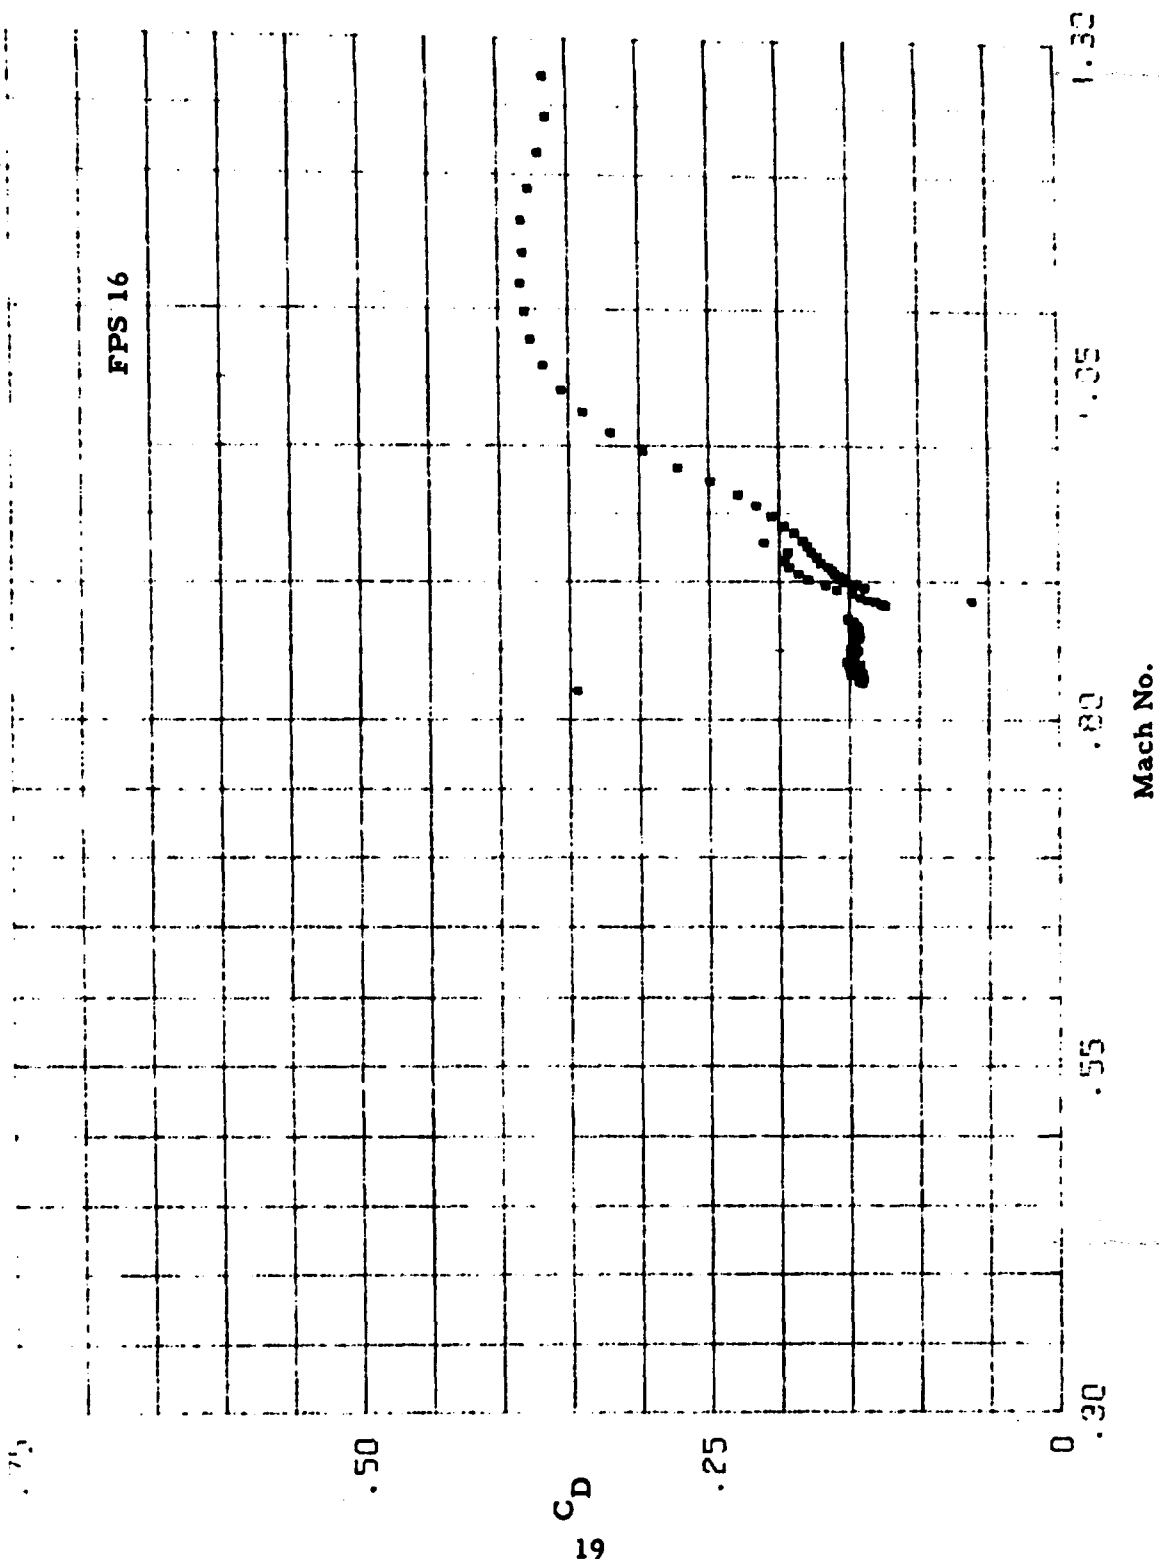


Figure 3. Aerodynamic Drag Coefficient (C_D) vs Mach No.,
for Charges 5 and 7, QE = 300 mils

FPS 16

C_D
19

Mach No.

FPS 16

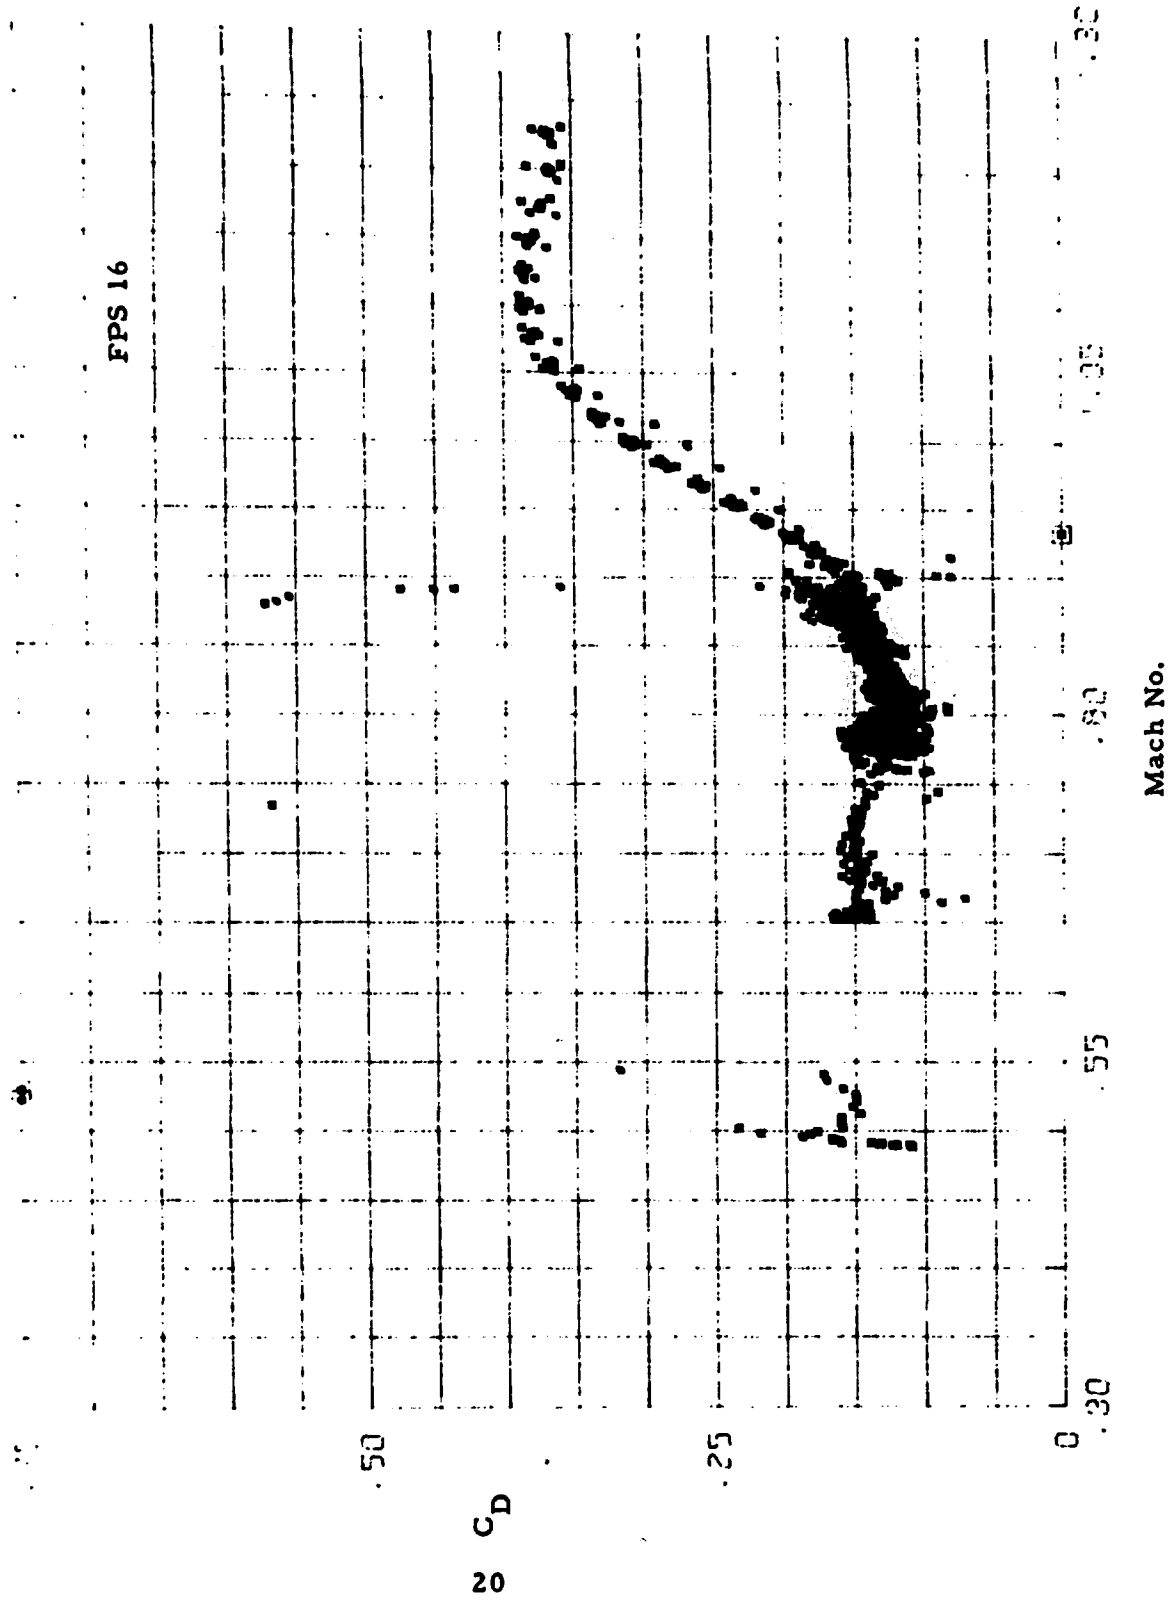


Figure 4. Aerodynamic Drag Coefficient (C_D) vs Mach No.,
for Charges 2, 5 and 7, QE = 700 mils

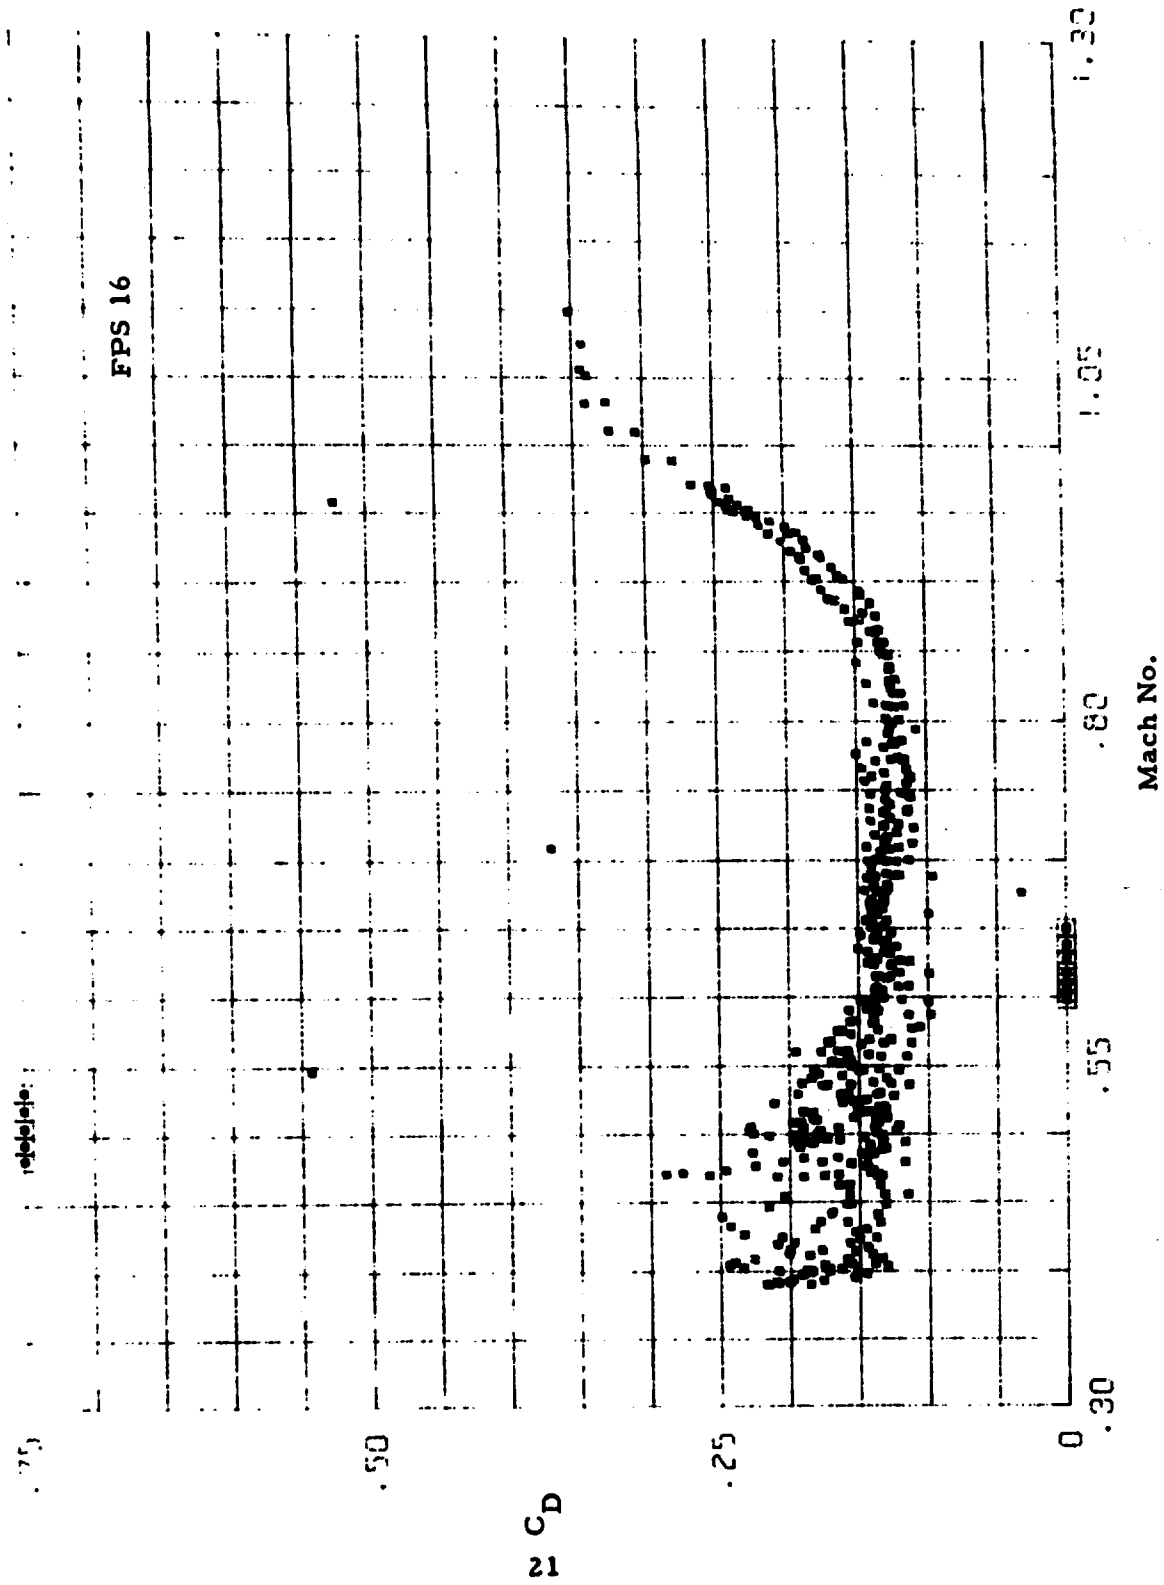


Figure 5. Aerodynamic Drag Coefficient (C_D) vs Mach No.,
for Charges 5 and 7, QE = 1120 mils

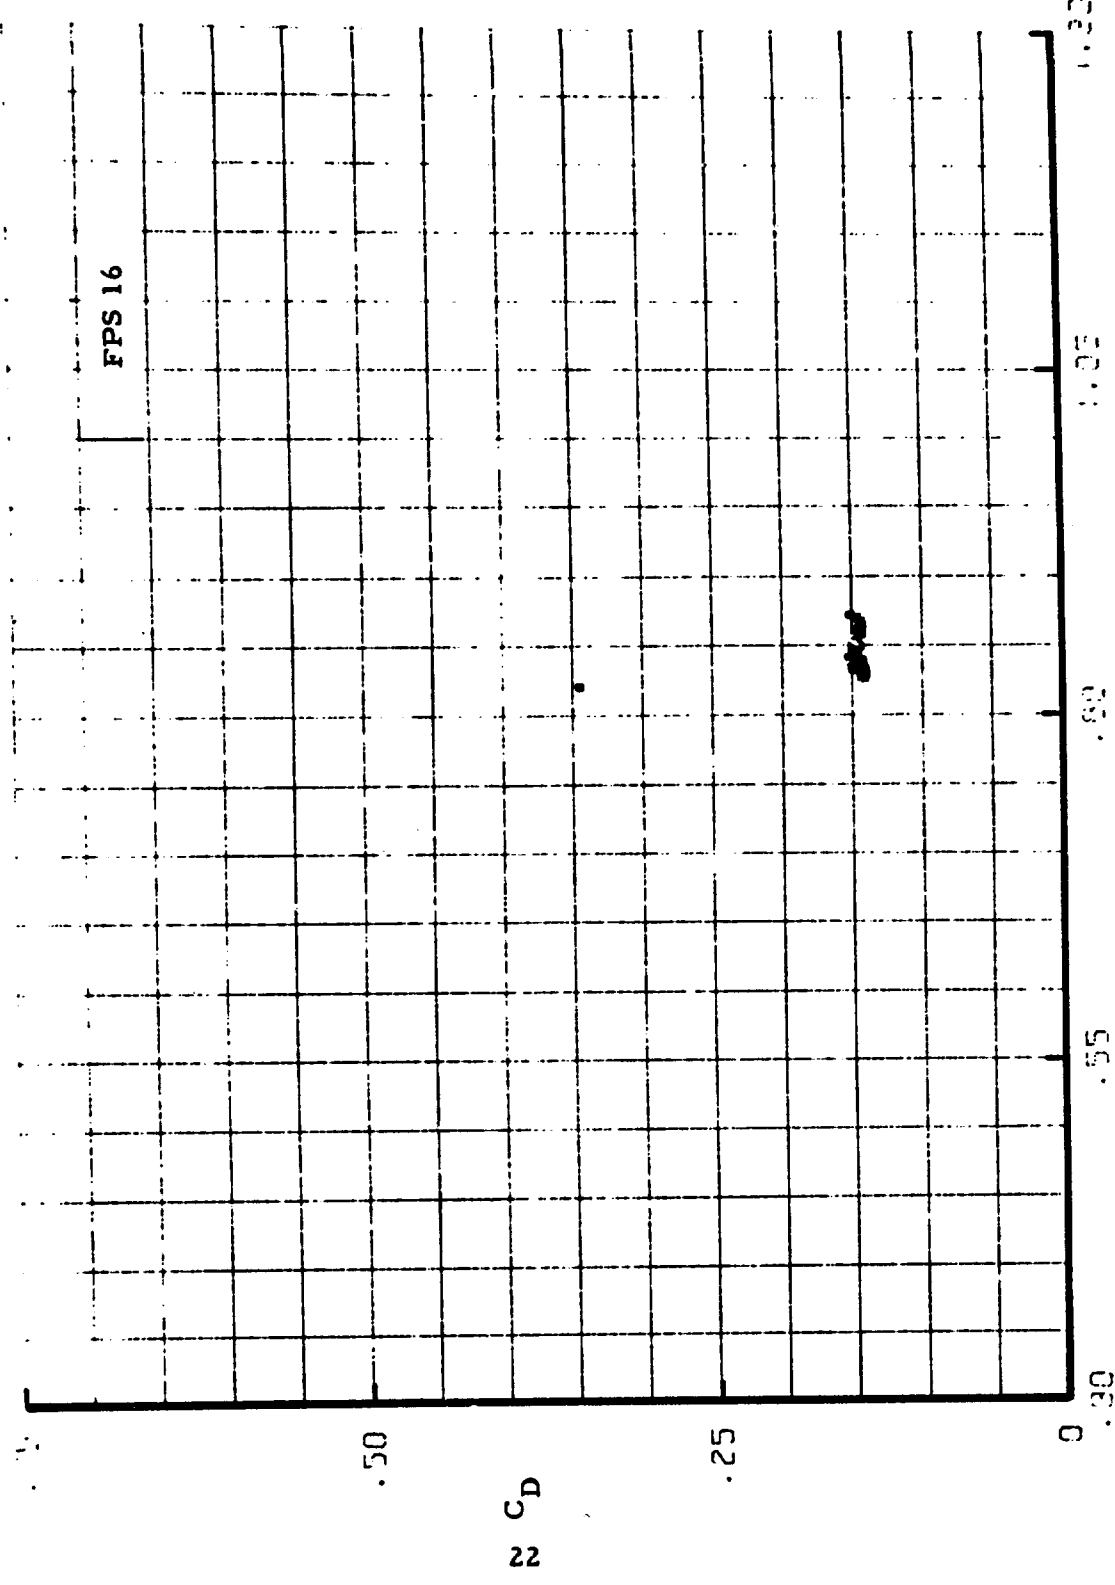


Figure 6. Aerodynamic Drag Coefficient (C_D) vs Mach No.,
for Charge 5, QE = 300 mils

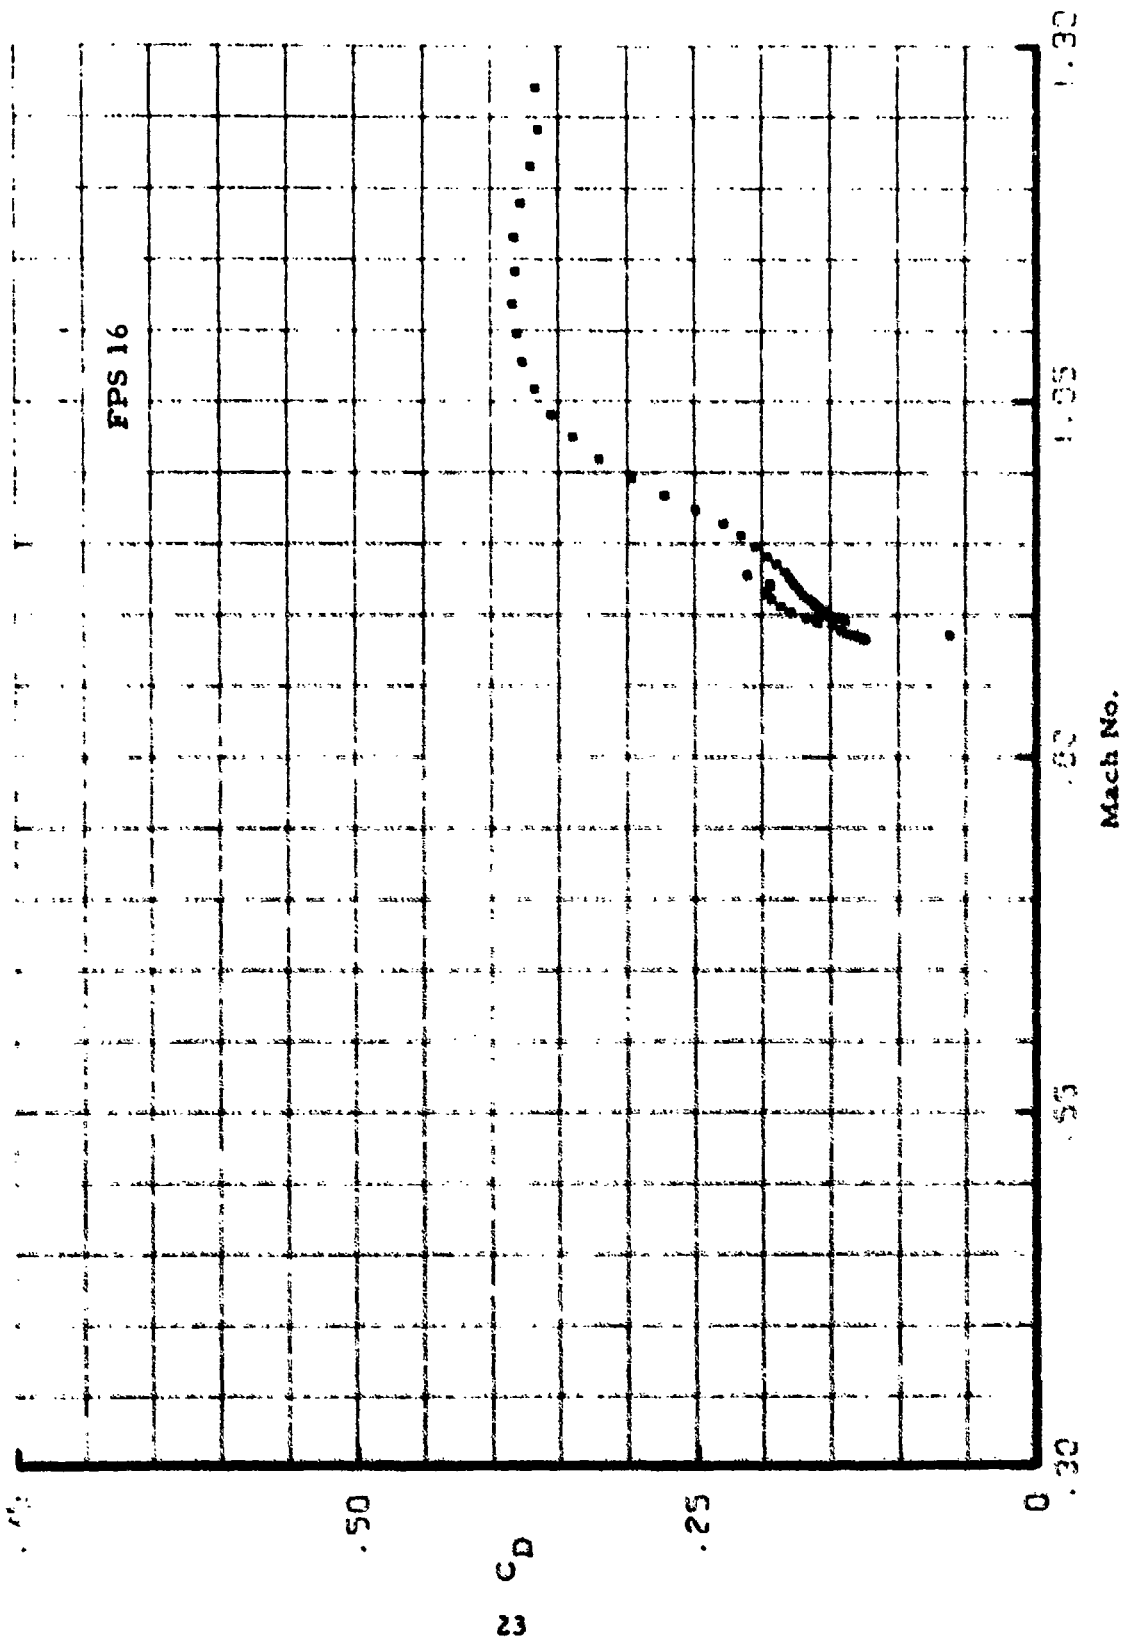


Figure 7. Aerodynamic Drag Coefficient (C_D) vs Mach No.,
for Charge 7, QE = 300 mils

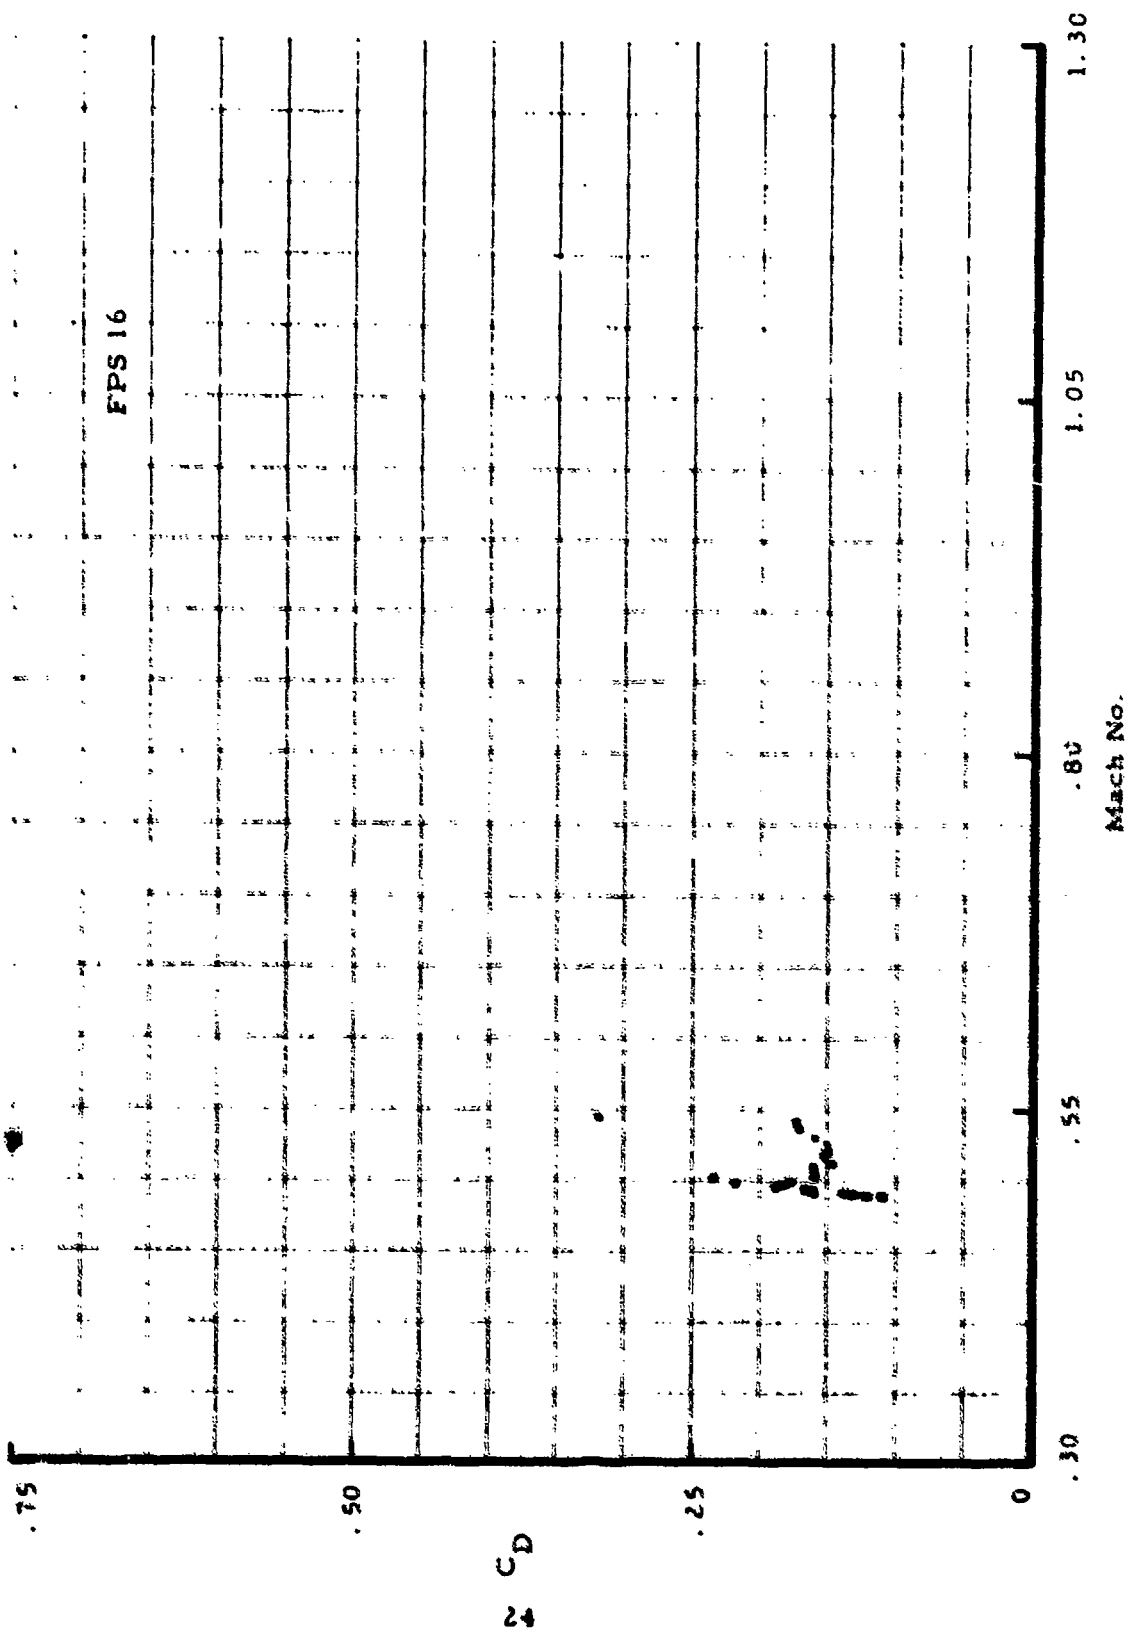


Figure 8. Anrodynamic Drag Coefficient (C_D) vs Mach No.,
for Charge 2, QE = 700 mils

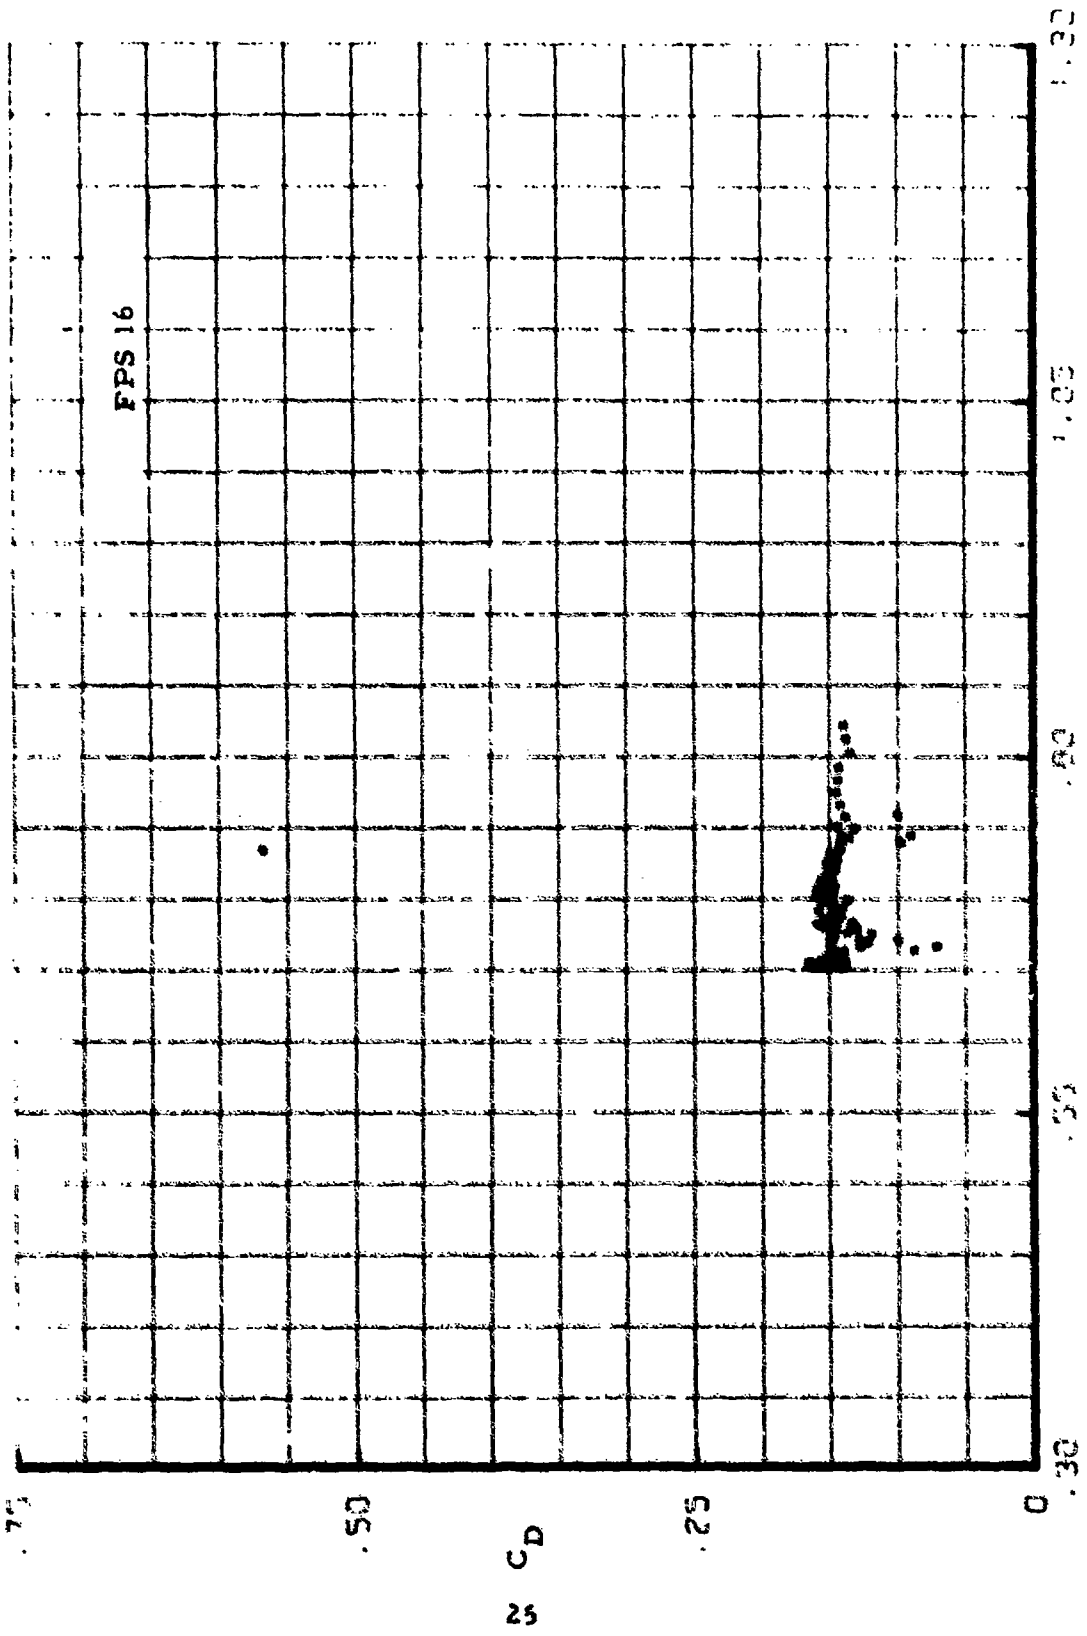


Figure 9. Aerodynamic Drag Coefficient (C_D) vs Mach No.,
for Charge 5, QE = 700 mils

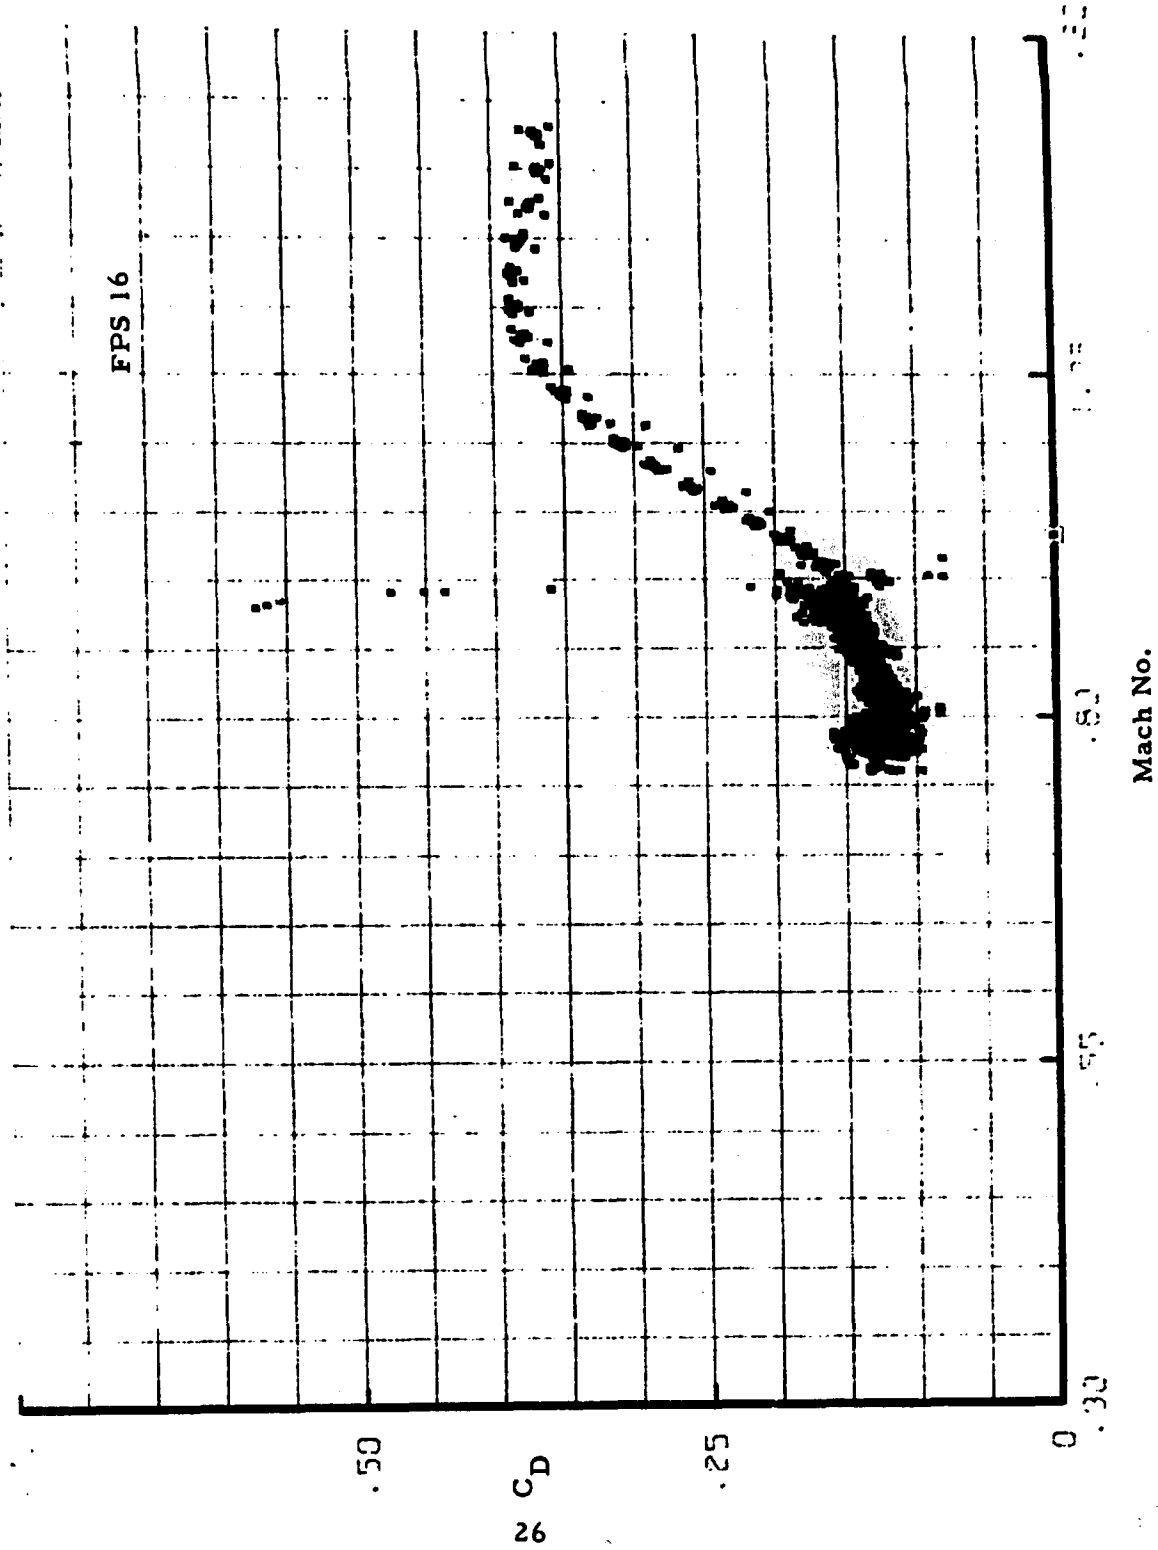


Figure 10. Aerodynamic Drag Coefficient (C_D) vs Mach No.,
for Charge 7, QE = 700 mils

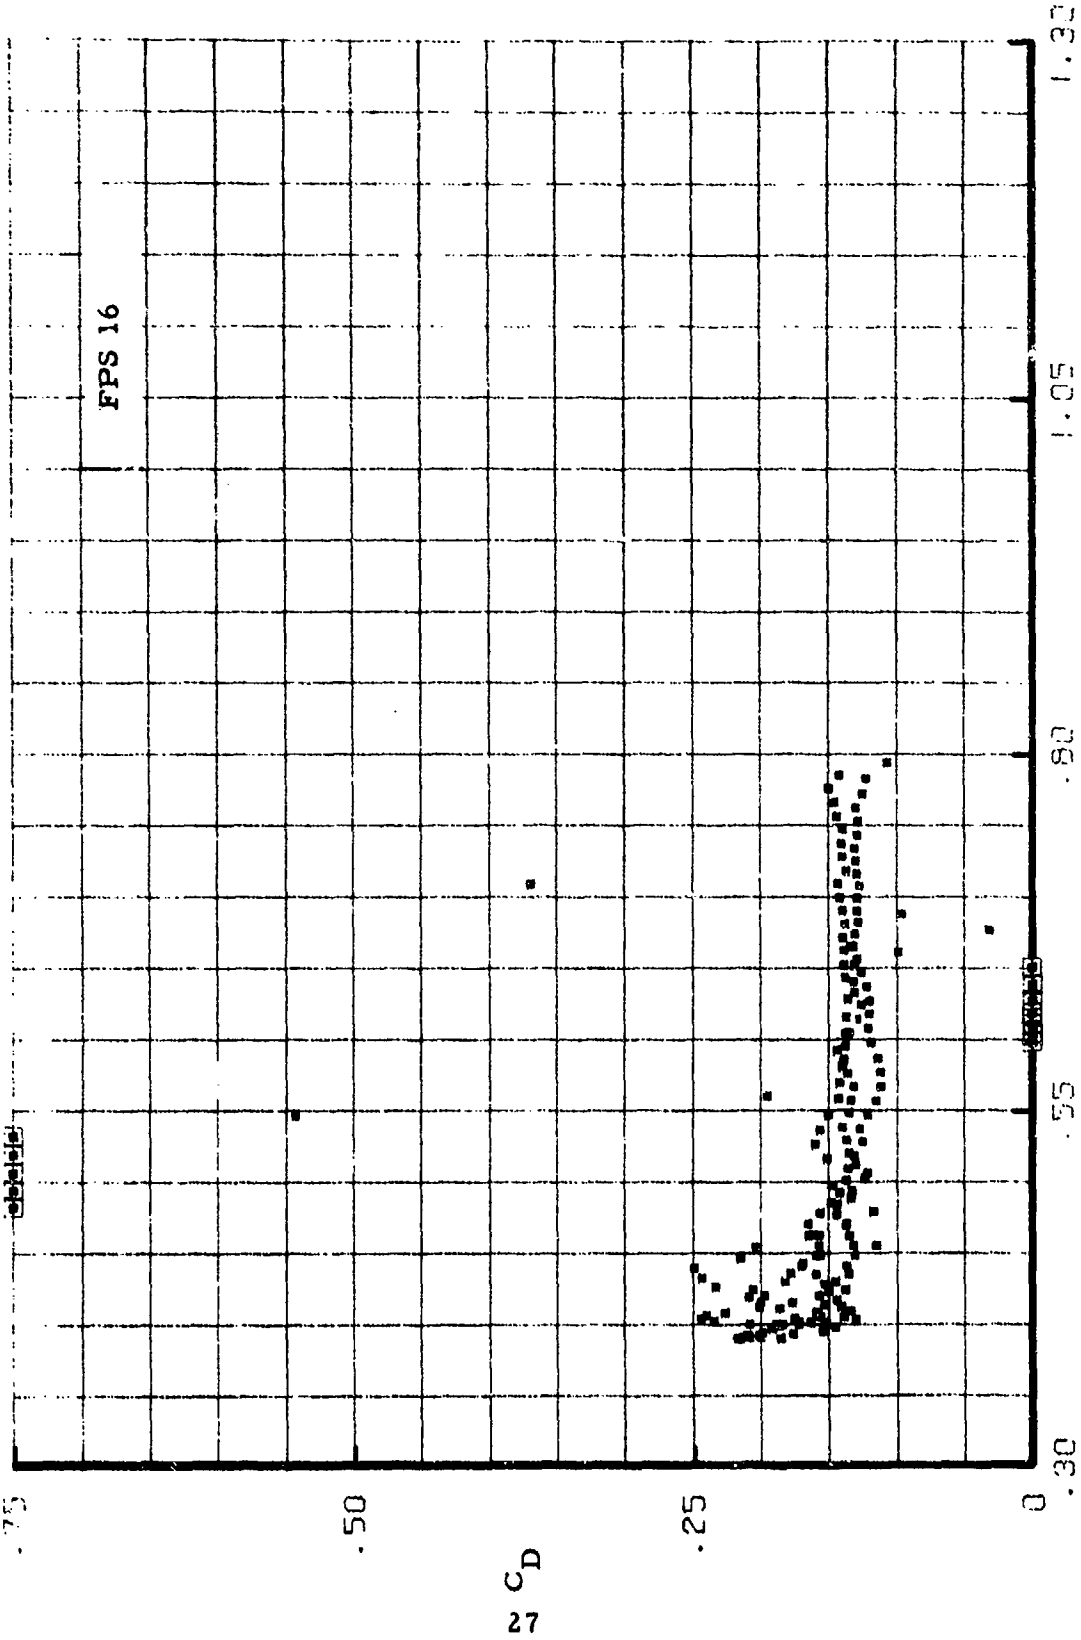


Figure 11. Aerodynamic Drag Coefficient (C_D) vs Mach No.,
for Charge 5, QE = 1120 mils

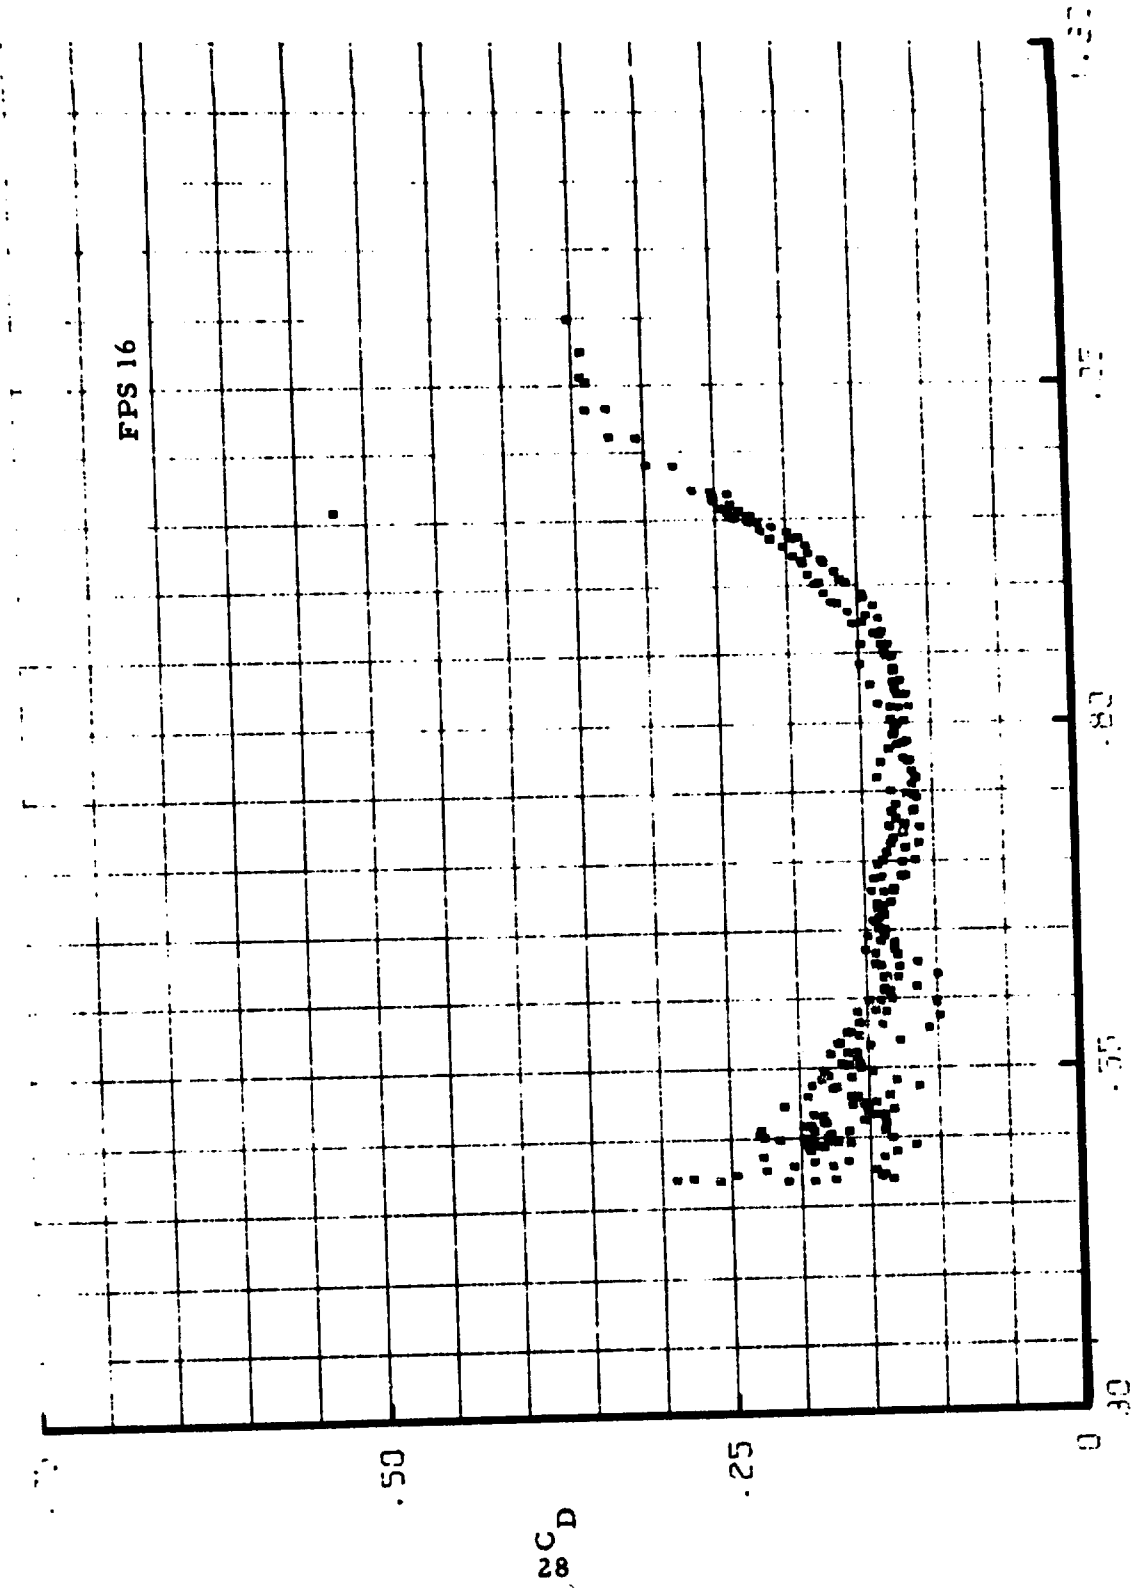


Figure 12. Aerodynamic Drag Coefficient (C_D) vs Mach No.,
for Charge 7, QE = 1120 mils

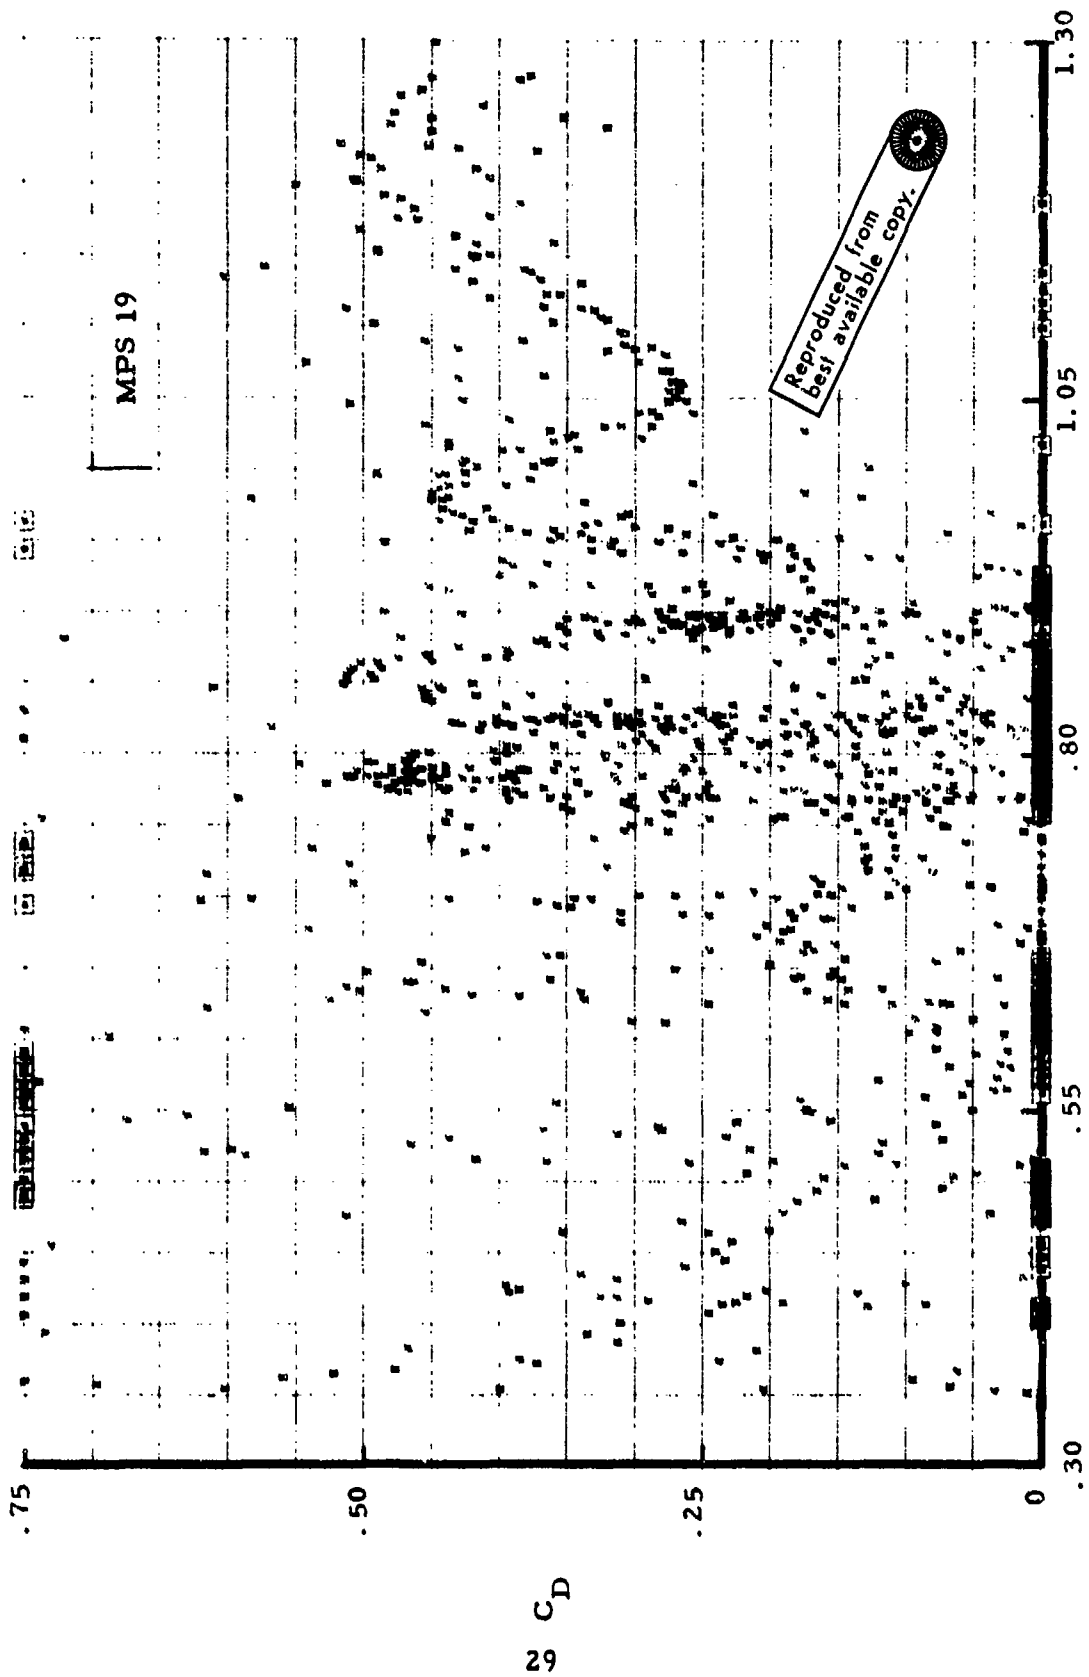


Figure 13. Aerodynamic Drag Coefficient (C_D) vs Mach No.,
for All Charges and QE's

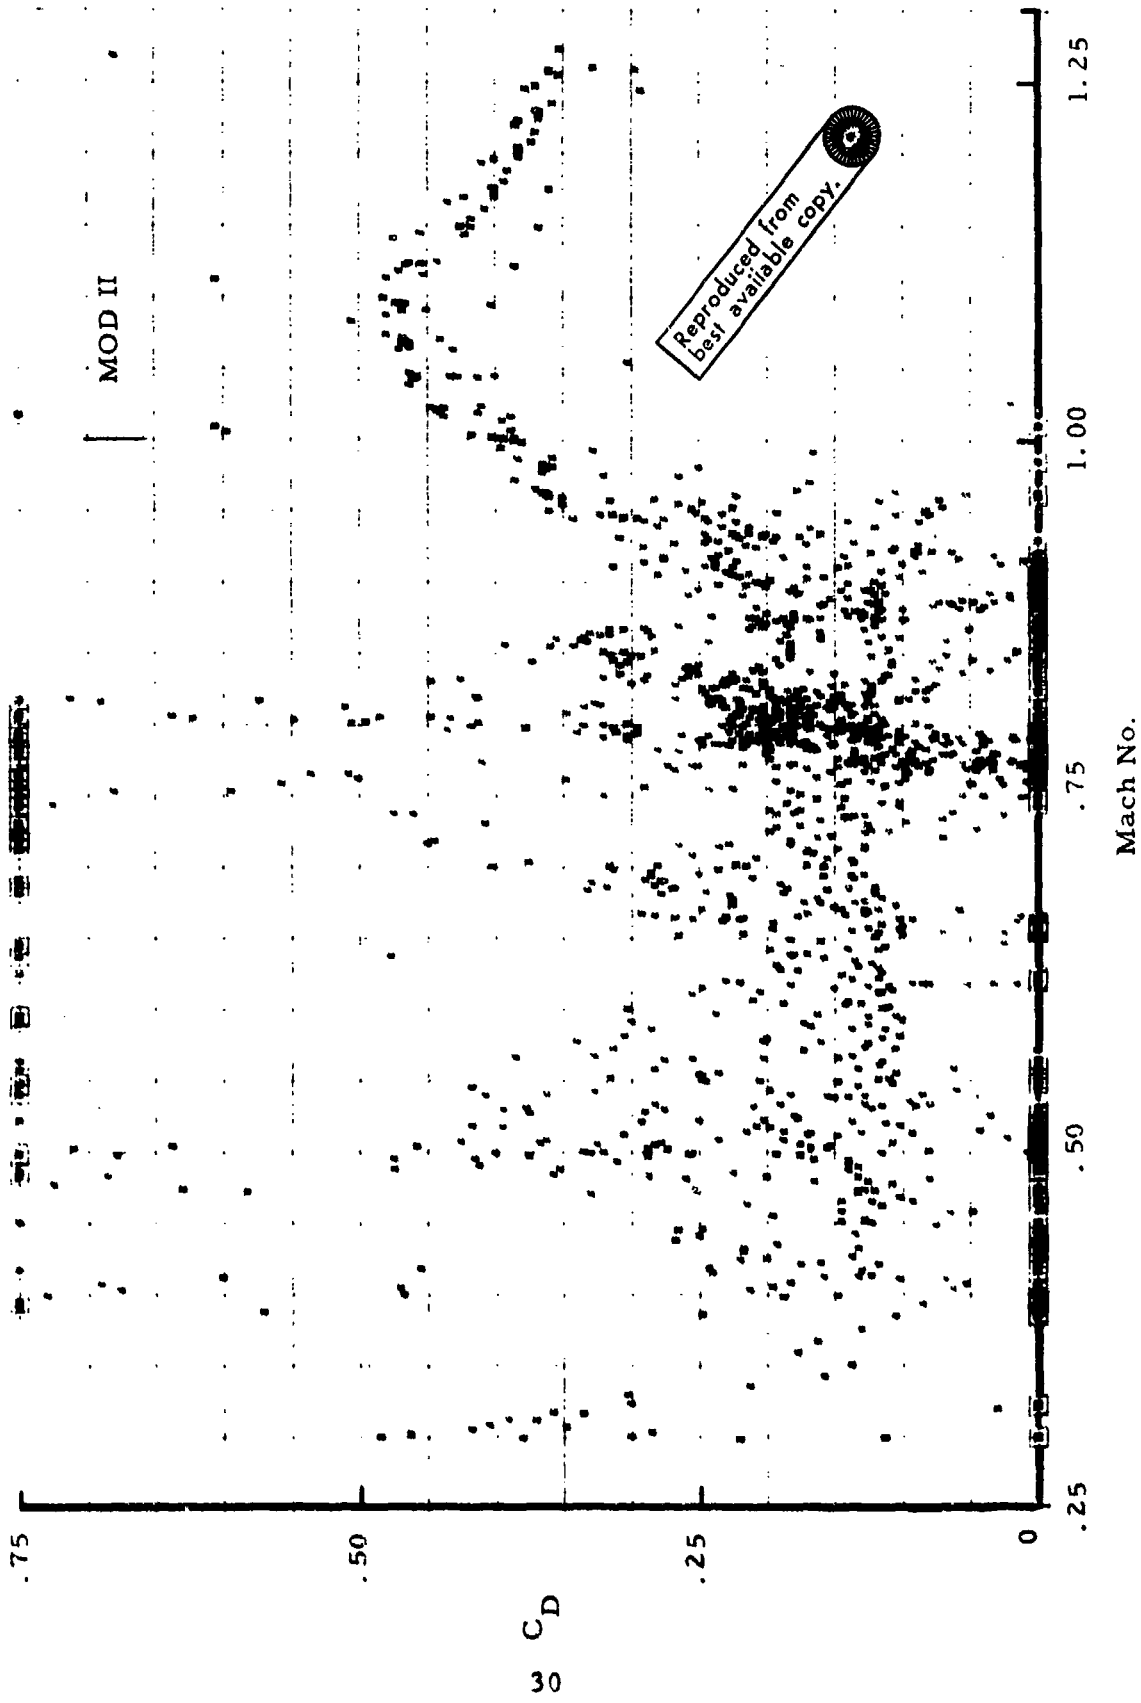


Figure 14. Aerodynamic Drag Coefficient (C_D) vs Mach No.,
for All Charges and QE's

REFERENCES

1. Wallops Station, Radar Information Handbook, NASA.
2. R. F. Lieske and J. W. Kochenderfer, "Determination of Performance Parameters for Fin-Stabilized Free-Flight Missiles," Ballistic Research Laboratories Report No. 1349, AD 809790, December 1966.
3. R. F. Lieske and M. L. Reiter, "Equations of Motion for a Modified Point Mass Trajectory," Ballistic Research Laboratories Report No. 1314, AD 485869, March 1966.