

AD-764 226

AN AURAL DETECTION MODEL

Donald C. Taylor, et al

Army Missile Command
Redstone Arsenal, Alabama

May 1973

DISTRIBUTED BY:

NTIS

National Technical Information Service
U. S. DEPARTMENT OF COMMERCE
5285 Port Royal Road, Springfield Va. 22151

764226

CONFIDENTIAL REPORT

764226

AN AURAL DETECTION MODEL

Donald C. Taylor
Arthur C. Pao

May 1972

Approved for public release; distribution is unlimited.


U.S. ARMY MISSILE COMMAND

Redstone Arsenal, Alabama

NOT FOR OFFICIAL
INFO. USE ONLY

D D C

APR 1972

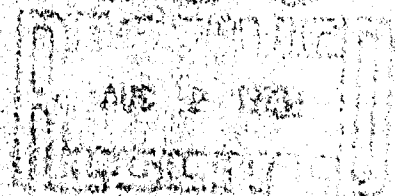

Best Available Copy

DESTROY THIS REPORT WHEN IT IS NO LONGER NEEDED. DO NOT
RETURN IT TO THE ORIGINATOR.

THE FIGURES IN THIS REPORT ARE NOT TO BE CONSIDERED AS AN
OFFICIAL DEPARTMENT OF THE ARMY POSITION UNLESS SO SPECI-
FICALLY STATED BY OTHER AUTHORIZED DOCUMENTS.

USE OF TRADE NAMES OR MANUFACTURER'S IDENTIFICATION DOES NOT CONSTITUTE AN OFFICIAL ENDORSEMENT OR APPROVAL OF THE USE OF SUCH COMMERICAL PRODUCT OR OF THE TRADE.

Best Available Copy

UNCLASSIFIED

Security Classification

DOCUMENT CONTROL DATA - R & D

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

1. ORIGINATING ACTIVITY (Corporate author) Aeroballistics Directorate US Army Missile Research Development US Army Missile Command Redstone Arsenal, Alabama 35809		2a. REPORT SECURITY CLASSIFICATION Unclassified	
3. REPORT TITLE AN AURAL DETECTION MODEL		2b. GROUP NA	
4. DESCRIPTIVE NOTES (Type of report and inclusive dates) Technical Report			
5. AUTHOR(S) (First name, middle initial, last name) Donald C. Taylor Arthur C. Poe			
6. REPORT DATE May 1973		7a. TOTAL NO. OF PAGES 38-53	7b. NO. OF PAGES 5
8a. CONTRACT OR GRANT NO. A. PROJECT NO. (DA) 1X264306D646 AMC Management Structure Code No. 634306.55.04600 4		8b. ORIGINATOR'S REPORT NUMBER(S) RD-73-11 9b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report) AD	
10. DISTRIBUTION STATEMENT Approved for public release; distribution unlimited.			
11. SUPPLEMENTARY NOTES None		12. SPONSORING MILITARY ACTIVITY Same as No. 1	
13. ABSTRACT This report describes an aural detection model for detection of low flying aircraft. It incorporates ambient sound pressure levels, weather conditions (including wind effects), and attenuations of the signal along the flight path, and allows target signatures to be inputted as measured at aspect angles. The output of the model includes a probability of detection versus time together with all pertinent conditions at time of detection.			

DD FORM 1473
1 NOV 66REPLACES DD FORM 1473, 1 JAN 64, WHICH IS
OBSOLETE FOR ARMY USE.

UNCLASSIFIED

Security Classification

UNCLASSIFIED

Security Classification

14.	KEY WORDS	LINK A		LINK B		LINK C	
		ROLE	WT	ROLE	WT	ROLE	WT
	Aural detection model Sound pressure levels Probability of detection Time of detection						

UNCLASSIFIED

Security Classification

CONTENTS

	Page
1. Introduction	1
2. Prediction Procedure	1
3. Hearing and Detection.	6
4. Summary.	8
Appendix A. WIND-SOUND ANGLE (PHI).	27
Appendix B. COMPUTER PROGRAM.	29
REFERENCES.	51

ACKNOWLEDGMENTS

Our sincere appreciation goes to Mr. Maurice E. Graham for his time and patience on the programming of the model, to Mr. Emory Steedley also on the programming of the model, to Mr. Ronald Halahan of the Army Materiel Systems Analysis Agency (AMSAA) on his suggestions of procedures, to Mr. William H. Cox, who took time from regular duties to explain acoustical theory, to Dr. Thomas Cullinane of the University of Alabama, Huntsville, for reviewing and commenting on drafts of the report, and to Mr. John W. Wallace for his assistance on the arranging and writing of this report.

1. Introduction

This report describes a mathematical model to calculate aural detection of low flying aircraft. Instead of trying to modify an existing model computer program [1], it was decided to construct a new program based on an 8-step method [2,3]. Guidelines were to develop a model with one observer and one aircraft.

The main purpose of the new model program (Figure 1) is to compute the probability of aural detection with time. Aural detection is based on an incremental change in loudness level above the ambient level. The loudness level is a method of analysis for complex sound by relative judgments to a 1000-hertz tone. The units of loudness and loudness level are sones and phons, respectively, and will be described further in Section 3.

One item of concern in the model is in the human detection portion. The data used to simulate human detection were based upon two subjects. If available, better data should be incorporated into the model to give a truer representation of a human observer.

2. Prediction Procedure

In predicting the noise level which will be received by the observer on the ground from an airborne source, it is necessary to know the following:

- a) The sound pressure level (SPL) at a known reference distance from the source
- b) The distance from the source to the point of observation on the ground.
- c) The sound-propagation characteristics of the atmosphere along the path between the source and the ground point [2].

When measuring the sound signature of the aircraft at a known distance, the distance should be close to the aircraft to limit atmospheric effects on the propagation of the sound. Aircraft sounds are directional and must be treated as such when taking measurements at a known reference distance [2]. The SPL at the observer is calculated by:

$$\text{SPL} = \text{SPL}_o - 20 \log_{10} \left(\frac{d}{d_o} \right) - A$$

dB re 0.0002 dyne/cm² (1)

where

SPL_0 = reference sound pressure level (dB)

d_0 = distance from source at which reference level is measured

d = distance from source to observer

A = total attenuation (dB) over distance $d - d_0$.

The term, $20 \log_{10}(d/d_0)$, in Equation (1) is the reduction in SPL due to spherical divergence of the sound wave in spreading outward from the source, commonly referred to as "inverse square law attenuation." It is equivalent to a 6-decibel reduction in SPL for each successive doubling of distance from the source [2].

Total attenuation, A , is determined by three types of attenuation constants: (a) atmospheric absorption due to humidity, (b) atmospheric absorption in excess of humidity, in particular scattering of sound waves due to inhomogeneity and turbulence in the atmosphere, and (c) attenuation due to terrain absorption.

$$A = A_H + A_O + A_T \quad (2)$$

where

A_H = atmospheric absorption due to humidity

A_O = residual attenuation (atmospheric absorption in excess of humidity attenuation)

A_T = terrain absorption.

Humidity attenuation, A_H , can be calculated by the formula expressed as an attenuation coefficient, a_H , in decibels/1000 feet [2]:

$$A_H = a_H (d - d_0) \quad (3)$$

where

$$a_H = 0.1 f (T + 45) / [(f/n^2) + (h^2/f)]$$

d, d_0 = slant distance (1000 feet)

f = geometric mean frequency of an octave band (kilocycles)

T = temperature ($^{\circ}F$).

Charts of a_H plotted against absolute humidity and temperature for various octave frequency bands are given in Figure 2 [2].

A_0 , residual attenuation, is due principally to the scattering effects of air turbulence. Calculation of A_0 depends on whether the observer is in a sound shadow. The shadow region is due to upward refracted sound rays and corresponds to a region in which sound is highly attenuated. This refraction is due to a decrease in sound velocity with increasing altitude. To calculate whether shadow formation has occurred, the following procedure is followed. The sound velocity in a given horizontal direction in the atmosphere depends on the temperature and on the vector addition of the component of wind velocity in that direction. The sound velocity, c , is given by the expression:

$$c = c_T + c_W \quad (4)$$

where

c_T = the sound velocity determined by temperature at the given point

$$c_W = W_{30} \cos (\epsilon) \quad (5)$$

W_{30} = the wind speed at 30 feet height

ϵ = the wind sound angle (Appendix A)

$$W_{30} = \frac{W_z}{1 + 0.27 \log_{10} \left(\frac{z}{30} \right)} \text{ mph} \quad (6)$$

W_z = the known wind magnitude at height, z .

Sound propagation in directions for which c_w is positive is referred to as "downwind" propagation and "upwind" propagation for negative c_w .

When the variation of c_T and c_w with height is such that the net sound velocity, c , decreases with height, sound rays will be refracted upward as shown in Figure 3. To determine if the observer is in a sound shadow, use Figure 4 to find R_o , the horizontal distance from source to shadow boundary. This calls for the calculation of the logarithmic gradient, B , defined by:

$$B = B_T + B_w \quad (7)$$

where

$$B_T = 4 K \times 10^{-4} \quad (8)$$

$$K = \frac{T - T_o}{\log_{10} \left(\frac{z}{z_o} \right)} \quad (9)$$

where

T, T_o = temperature at target and observer

z, z_o = height of target and observer

$$B_w = 1.5 W_{30} \cos (\phi) \times 10^{-4} \quad (10)$$

If the horizontal distance from source to receiver, r , is greater than $3 R_o$, the observation point will be in a sound shadow. The calculation of A_o when the observer is in a sound shadow follows. For wind sound angles between 110 and 150 degrees, use a value of 30 decibels for residual attenuation, A_o . Otherwise, determine A_o at the distance, R_o , by Figure 5 (the curves have been extrapolated by the user for more versatile range requirements) and add an amount delta A_o , given by:

$$\Delta A_o = \left[(r - R_o)(30 - A_o) \right] 2 R_o \quad (11)$$

Average values of residual attenuation, A_o , due to turbulence outside a sound shadow are plotted in Figure 5. Weather variables affect the estimation of residual attenuation for source elevation angles less than 2 degrees for all frequency bands and for elevation angles between 2 and 10 degrees for the 75-to 150-hertz band. Therefore, under these conditions average residual attenuation must be corrected by the formula:

$$A_o = \bar{A}_o - 0.3 b_T (\Delta T + 4.5) + 0.12 b_W (W_{30} - 9.5) \quad (12)$$

where

A_o = predicted value of attenuation

$\bar{A}_o$ = average value given by curves of Figure 5.

ΔT = temperature gradient ($^{\circ}F/1000$ feet)

$$\Delta T = 2 (T_5 - T_{500})$$

where

T_5 = known temperature at 5 feet height

T_{500} = temperature at 500 feet.

The coefficients, b_T and b_W , are given by Table 1. The temperature gradient, ΔT , is taken as positive when temperature at 5 feet is higher than that at 500 feet [2].

A_T allows the introduction of four types of terrain conditions for simulation: (1) open area, (2) 18-inch grass, (3) lightly treed, and (4) forest. Terrain absorption is dependent upon elevation angle, range, and frequency. The farther downrange and the smaller the elevation angle, the higher the absorption. Figure 6 and Table 2 show percent of terrain absorption coefficient versus elevation angle where 100-percent terrain absorption attenuation corresponds to 0-degree elevation angle. To utilize Figure 6 and Table 2, read a percentage factor from Figure 6 then multiply this factor by the appropriate terrain coefficient of Table 2. The corrected coefficient will be in terms of decibels/1000 feet [1].

3. Hearing and Detection

Noises differ in intensity at different frequencies. In aural detection one must consider: (a) ambient noise level, (b) signal embedded in the ambient level, and (c) the sensitivity of the ear to (a) and (b). One must compute the probability of detecting an incremental intensity level as the signal comes into the ambient level. To approach the problem in the above fashion, loudness levels have to be calculated: (a) loudness level of ambient alone and (b) loudness level when a signal has been added to the ambient level. Loudness levels pertain to the magnitude of the auditory sensation that a person experiences and should not be confused with other distinguishing characteristics of sound (pitch, penetrating or dull, etc.). Loudness and loudness levels are distinguished and measured in terms of sones and phons, respectively. Acousticians have chosen a 1000-hertz tone for the standard reference of the phon and sone. The phon level of an unknown sound is the SPL of a 1000-hertz tone that has been judged by listeners to equal the loudness of the unknown sound. The sone is the loudness adjudged to a 40-decibel, 1000-hertz tone [4]. One sone equals 40 phons (Fig. 8) and is related by the equation:

$$\log_{10} N = 0.03 L_n - 1.2 \quad (13)$$

where N is the loudness (sones) and L_n is the loudness level (phons). With the method of calculating loudness in sones available, the stage is set to calculate probability of detection:

- a) To calculate loudness of background alone (sones):
 - 1) Calculate SPL in each octave band
 - 2) Convert to sones in each octave band
 - 3) Multiply all except the maximum sone value found by 0.3
 - 4) Convert to phons by Equation (13) (this will put the loudness level in terms of decibels of a 1000-hertz tone).
- b) To calculate loudness of signal plus ambient:
 - 1) Calculate SPL of signal plus ambient in each octave band (this involves changing both signal and ambient to microbars, summing, and converting the sum back to decibels)
 - 2) Convert to sones in each band using Figure 8.

- 3) Multiply all except the maximum sone value found by 0.3
- 4) Convert to phons by Equation (13).

These calculations will give decibel intensity values of sounds in terms of a 1000-hertz tone. Thus, the delta decibel value above the ambient loudness level can be calculated (Table 3). Using the Quantal Theory of Discrimination for detection of an incremental decibel when the increments are added to a continuous stimulus [5], it has been found that the listener finds it difficult to distinguish one-quantum changes in the stimulus from the changes which are constantly occurring. The difference reported 50 percent of the time is equivalent to 1.5 times the quantal increment (decibels). A difference reported 100 percent of the time corresponds to 2.0 times the quantum increment [5]. Table 4 shows the mean quantum increment for two persons in decibels as a function of sensation level. The sensation level used is the ambient loudness level. A normal distribution is used to find a probability of detecting a delta decibel increment. It is divided into 12 regions using the mean and standard deviations of Table 4. These data were plotted and smoothed out to give a more uniform curve. The standard deviations are based on the smoothed data. The regions correspond to the proportion of the listening population assumed to have that quantal increment.

A weighting factor (Table 5) describes a probability of an individual being in the region. Using the mean and standard deviations of Table 4, calculate the quantum increment of the midpoint of each of the 12 regions. To calculate the probability P , let

$$R' = \begin{cases} 1 & \text{if } R \text{ is less than or equal to } 1 \\ R & \text{if } R \text{ is between } 1 \text{ and } 2 \\ 2 & \text{if } R \text{ is greater than or equal to } 2 \end{cases} \quad (14)$$

then

$$P = R' - 1 \quad (15)$$

Starting at the left of the distribution multiply each probability by the corresponding weighting factor given in Table 5, and sum up:

$$\text{Probability}_{\text{total}} = \sum_{i=1}^{12} (P_i \times \text{weighting factor, } i) \quad (16)$$

4. Summary

In predicting the SPL that will be received by the observer on the ground due to an airborne source, several factors must be considered. Step 1 is the target signature measured at a known reference distance at aspect angles around the aircraft. Conditions which must be known include: (a) temperature at observer along with a temperature gradient, (b) wind velocity vector at a known height, (c) the type of terrain (there are four types available for simulation in the model), (d) relative humidity, and (e) the target flight path. To estimate the SPL received by the observer, attenuation along the acoustic path must be accounted for. There are three types of attenuations in the model: (a) attenuation due to atmospheric absorption due to humidity, (b) attenuation due to terrain absorption, and (c) attenuation due to atmospheric absorption in excess of humidity, usually referred to as residual attenuation. In determining the value of residual attenuation one must consider if the observer is in a sound shadow. Shadow formation is due to upward refraction of sound rays, causing a highly attenuated region where detection is poor at best. The refraction is due to wind and temperature effects.

At this point the estimated SPL's of the ambient and signal received by the observer are known in the octave bands. The number of decibels of ambient plus signal is combined in each octave band by conversion of microbars, summing the two, and converting the sum back to decibels. The loudness in sones of ambient and ambient plus signal can be obtained at this stage by a simple mathematical procedure and the use of a table. The transformation from sones to phons is obtained by an equation. Since phons are equal to decibels of a 1000-hertz tone, the delta decibel can be calculated. Using the delta decibel and a derived normal distribution, a probability of aural detection is obtained.

TABLE 1. COEFFICIENTS FOR PREDICTION OF ATTENUATION OF A_0
DUE TO TURBULENCE

Source Elevation (deg)	Distance from Source (ft)	Frequency Band (Hz)									
		75 to 150		150 to 300		300 to 600		600 to 1200		1200 to 2400	
		b_T	b_W	b_T	b_W	b_T	b_W	b_T	b_W	b_T	b_W
2	1000	-2.5	4.8	-1.2	1.2	0.0	0.0	-0.5	2.6	-1.2	0.4
	2000	-1.5	4.4	-1.2	1.3	0.9	0.0	-0.6	3.9	-1.4	0.0
	3000			-1.2	0.0	1.7	0.0	-1.1	4.4		
	4000							-2.0	4.0		
5	1000	-0.7	2.4	*	*	*	*	*	*	*	*
	2000	-1.0	1.5	*	*	*	*	*	*	*	*
10	1000	1.2	-1.7	*	*	*	*	*	*	*	*
	2000	0.2	-1.6	*	*	*	*	*	*	*	*

*No significant correlation.

TABLE 2 TERRAIN ATTENUATION COEFFICIENT (dB/1000 FEET)
AT ZERO ELEVATION ANGLE

Terrain	Octave	75	150	300	600	1200	2400
		150	300	600	1200	2400	
Open area		2.3	5.5	6.5	6.5	6.5	
18-in. grass		4.0	9.6	10.8	10.8	10.8	
Lightly treed		6.0	9.0	12.0	15.0	18.0	
Forest		10.0	13.0	16.0	24.0	35.0	

TABLE 3. EXAMPLE OF THE PREDICTION OF LOUDNESS LEVEL*

	Frequency Bands (Hz)				
	75 to 150	150 to 300	300 to 600	600 to 1200	1200 to 2400
<u>SPL</u>					
Signal	40.0	35.0	50.0	45.0	55.0
Ambient	35.0	40.0	45.0	45.0	50.0
Signal + Ambient	41.19	41.19	51.19	48.0	56.19
<u>Sones</u>					
Signal	0.16	0.38	2.2	1.5	3.4 max
Signal + Ambient	0.18	0.62	2.3	1.8	3.6 max
Predicted loudness in sones of signal: $0.3 (0.16 + 0.38 + 2.2 + 1.5) + 3.4 = 4.672$					
Predicted loudness in sones of signal + ambient: $0.3 (0.18 + 0.62 + 2.3 + 1.8) + 3.6 = 5.07$					
Conversion of signal from sones to phons: $(1.2 + \log_{10} 4.67)/0.03 = 62.31$ phons					
Conversion of signal + ambient from sones to phons: $(1.2 + \log_{10} 5.07)/0.03 = 63.50$ phons					
delta dB = (phons of signal + ambient) - (phons of signal alone)					
	63.50		62.51		= 1.19

*The sones values were estimated from the nomogram of Figure 8.

TABLE 4. QUANTAL INCREMENTS IN DECIBELS AS A FUNCTION
OF SENSATION LEVEL

Sensation Level (dB)	Test Data Quantal Increment (dB)		Assumed Standard Deviation (dB)	Assumed Mean (dB)
	Subject 1	Subject 2		
3	2.37	2.37	--	--
5	2.21	1.51	0.115	1.625
10	0.81	0.81	0.040	0.80
12	0.67	0.61	0.03	0.65
15	0.58	0.45	0.025	0.495
20	0.33	0.37	0.025	0.365
25	0.31	0.37	0.025	0.315
32	0.27	0.27	0.025	0.295
35	0.27	0.34	0.025	0.295
45	0.29	0.30	0.025	0.295
52	0.27	0.31	0.025	0.295
55	0.27	0.34	0.025	0.295
70	0.27	0.32	0.025	0.295
82	0.22	0.32	0.035	0.285
85	0.22	0.33	0.040	0.280
100	0.19	0.27	0.040	0.230

TABLE 5. WEIGHTING FACTORS

Example: Sensation level = 82 dB Mean = 0.285 Standard Deviation = 0.035 Calculated delta dB = 0.27 1. Set up distribution in one-half standard deviations (12 regions) 2. Assign weighting factors 3. Calculate midpoints of the intervals 4. Set up ratios 5. Check to see that the ratios do not exceed 2.0 or are below 1.0 6. Subtract 1.0 from each ratio to get P. 7. Multiply by weighting factors 8. Sum up					
Region No.	Region Midpoint	Quantals Ratio (R)	P_i	Weighting Factor (W_i)	Weighting Factor $\times P_i$
1	0.1875	1.44	0.44	0.005	0.0022
2	0.20625	1.31	0.31	0.017	0.00527
3	0.22375	1.21	0.21	0.044	0.00924
4	0.24125	1.12	0.12	0.092	0.01104
5	0.25875	1.05	0.05	0.150	0.00075
6	0.27625	0.977	0.00	0.192	0.0
7	0.29375	0.919	0.00	0.192	0.0
8	0.31125	0.867	0.00	0.150	0.0
9	0.32875	0.821	0.00	0.092	0.0
10	0.34625	0.779	0.00	0.044	0.0
11	0.36375	0.742	0.00	0.017	0.0
12	0.38125	0.708	0.00	0.005	0.0
				$\sum (W_i \times P_i) = 0.02886^*$	

*Probability of detection.

TABLE 5. CONTINUED

Example:

Sensation level = 35 dB
 Mean = 0.295
 Standard Deviation = 0.025
 Calculated delta dB = 0.46

1. Set up distribution in one-half standard deviations (12 regions)
2. Assign weighting factors
3. Calculate midpoints of the intervals
4. Set up ratios
5. Check to see that the ratios do not exceed 2.0 or are below 1.0
6. Subtract 1.0 from each ratio to get P.
7. Multiply by weighting factors
8. Sum up

Region No.	Region Midpoint	Quantals Ratio (R)	P_i	Weighting Factor (W_i)	Weighting Factor $\times P_i$
1	0.22625	2.033149	1.0	0.005	0.005
2	0.23875	1.92670	0.9267	0.017	0.01575
3	0.25125	1.8308	0.8308	0.044	0.0365
4	0.26375	1.744	0.7440	0.092	0.06844
5	0.27625	1.665	0.6650	0.150	0.09975
6	0.28875	1.593	0.5930	0.192	0.113856
7	0.30125	1.5269	0.5269	0.192	0.1011648
8	0.31375	1.46613	0.4661	0.150	0.069915
9	0.32625	1.4099	0.4099	0.092	0.0377108
10	0.33875	1.3579	0.3579	0.044	0.0157476
11	0.35125	1.309	0.3090	0.017	0.005253
12	0.36375	1.2646	0.2646	0.005	0.001325
				$\Sigma (W_i \times P_i) = 0.570410^*$	

* Probability of detection.

TABLE 5. CONCLUDED

Example:			
Sensation level	= 20 dB	1.	Set up distribution in one-half
Mean	= 0.025		standard deviations (12 regions)
Standard deviations	= 0.025	2.	Assign weighting factors
Calculated delta dB	= 0.50	3.	Calculate midpoints of the intervals
		4.	Set up ratios
		5.	Check to see that the ratios do not exceed 2.0 or are below 1.0
		6.	Subtract 1.0 from each ratio to get P.
		7.	Multiply by weighting factors
		8.	Sum up

Region No.	Region Midpoint	Quantals Ratio (R)	P_i	Weighting Factor (W_i)	Weighting Factor $\times P_i$
1	0.29625	1.6877	0.6877	0.005	0.0034385
2	0.30875	1.6194	0.6194	0.017	0.0105298
3	0.32125	1.5564	0.5564	0.044	0.0244816
4	0.33375	1.498	0.4980	0.092	0.459816
5	0.34625	1.444	0.4440	0.150	0.0666
6	0.35875	1.3937	0.3937	0.192	0.07559
7	0.37125	1.3468	0.3468	0.192	0.0881568
8	0.38375	1.3029	0.3029	0.150	0.045435
9	0.39625	1.2618	0.2618	0.092	0.0240856
10	0.40875	1.2232	0.2232	0.044	0.0098208
11	0.42125	1.1869	0.1869	0.017	0.0031773
12	0.43375	1.1527	0.1527	0.055	0.0007635
				$\sum (W_i \times P_i) = 0.3678949^*$	

*Probability of detection.

NOTE: The weighting factor is the probability that an observer chosen at random will be in that interval. The ratio is the number of quantals. 1.0 quantal represents 0-percent detection, 1.5 quantals represent 50-percent detection, and 2.0 quantals represent 100-percent detection. The total probability of detection is then the summation over the 12 regions of weighting times probability.

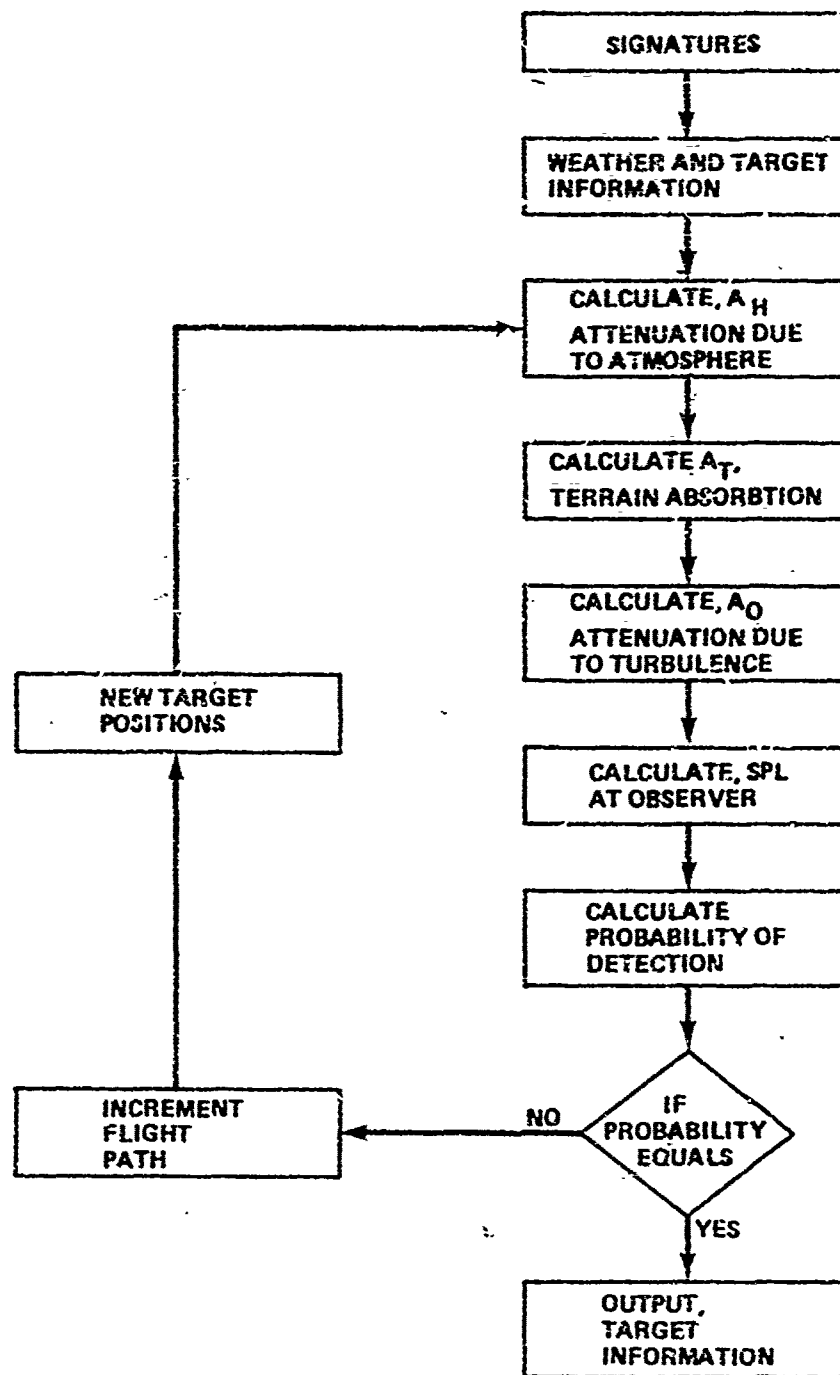


Figure 1. General flow diagram of the aural detection model.

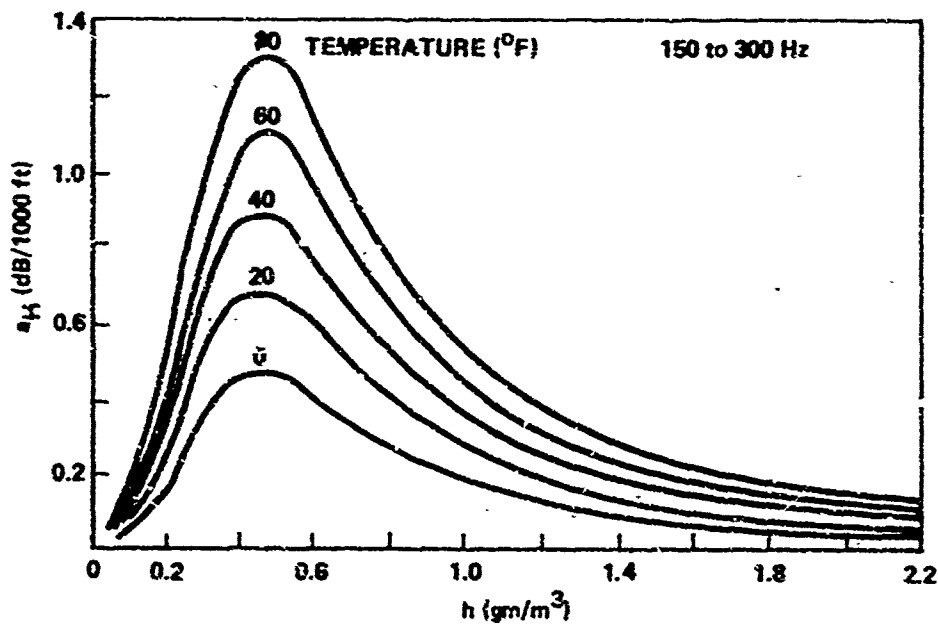
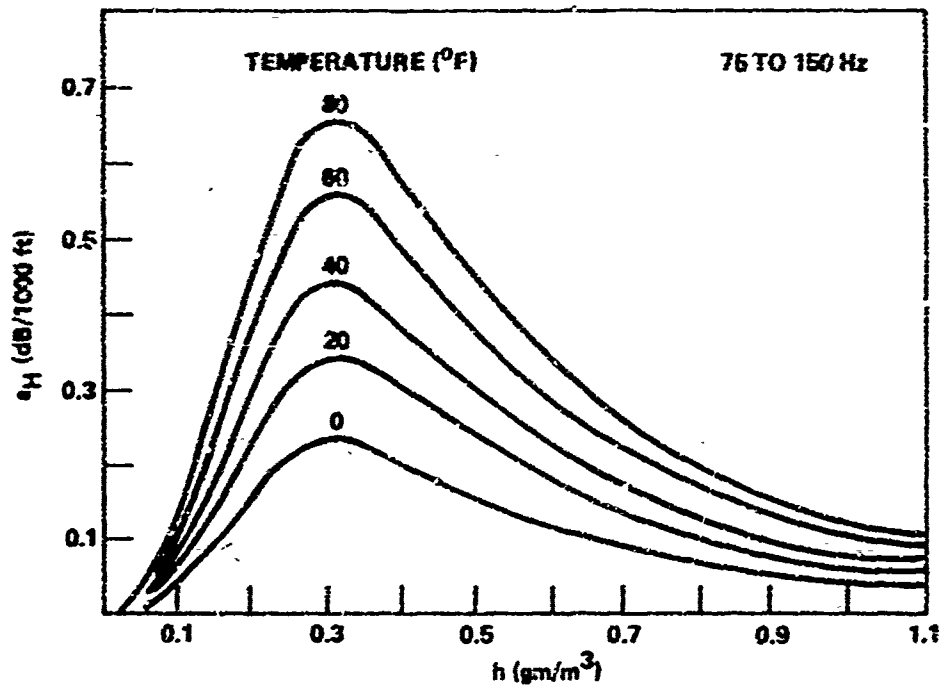


Figure 2. Relation of humidity attenuation coefficient to temperature and absolute humidity, h .

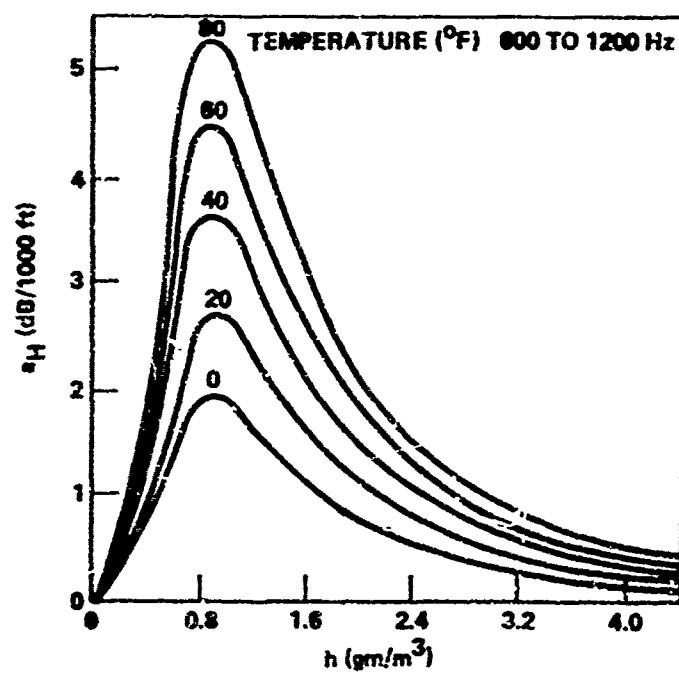
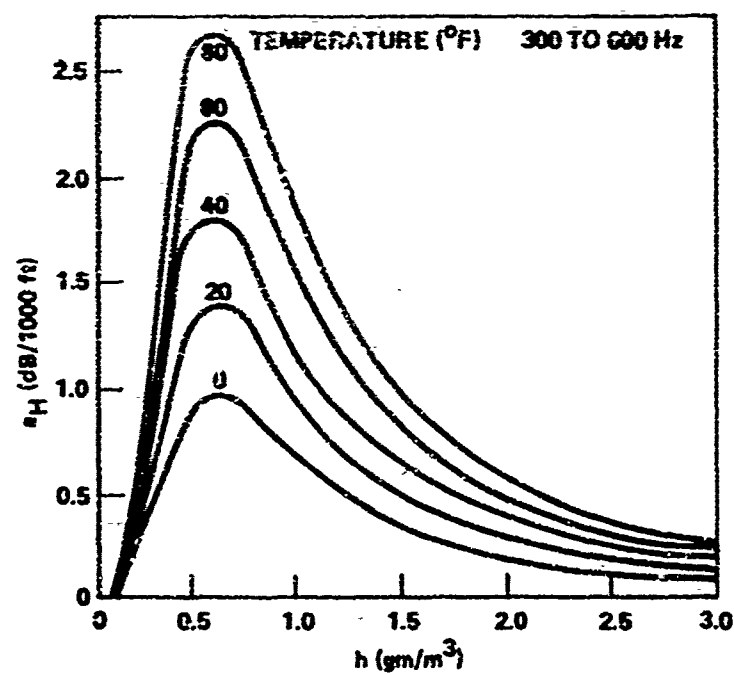


Figure 2. Continued

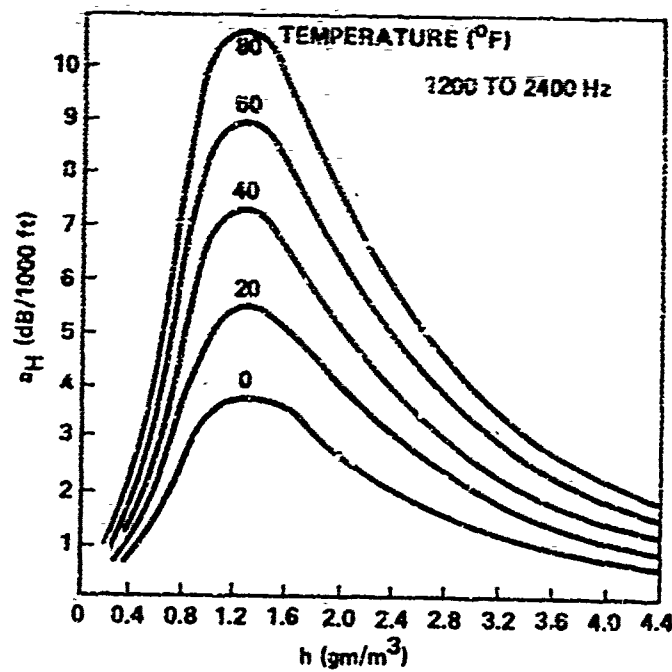


Figure 2. Concluded

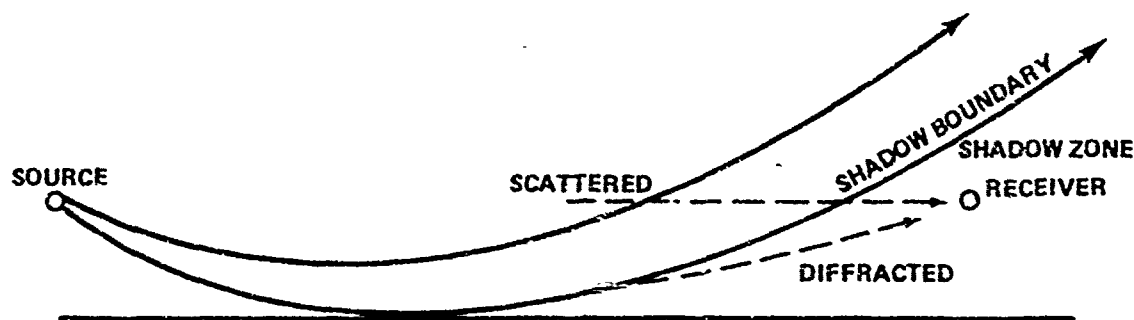


Figure 3. Diffraction and scattering of sound into shadow zone.

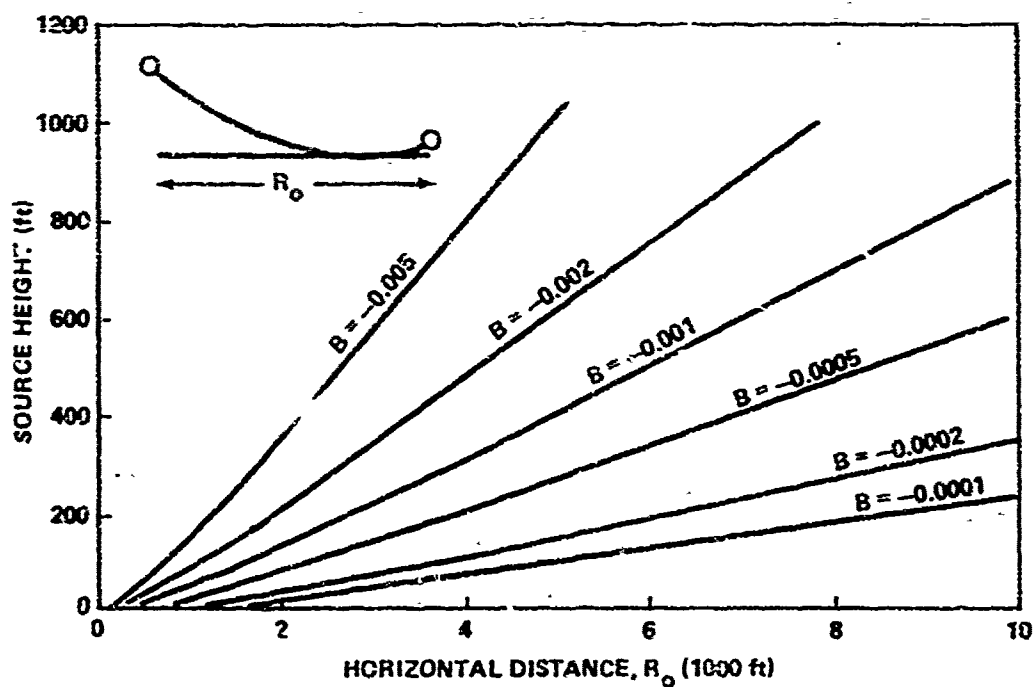


Figure 4. Horizontal distance, R_o , from source to shadow boundary as a function of source height and logarithmic sound velocity gradient, B . Height of observation point is 5 feet.

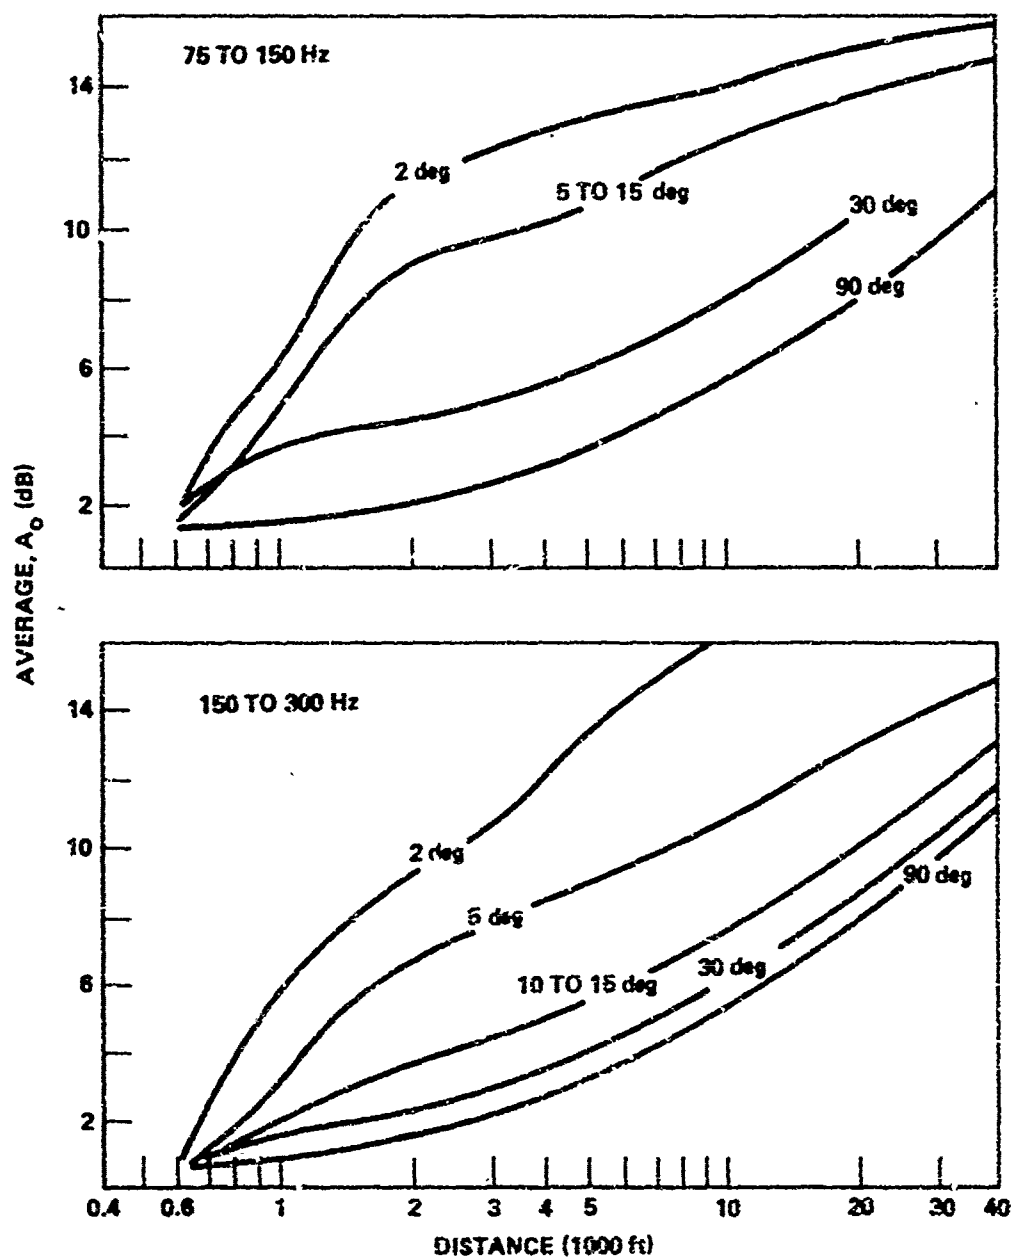


Figure 5. Average residual attenuation due to turbulence as a function of distance from source and source elevation angle.

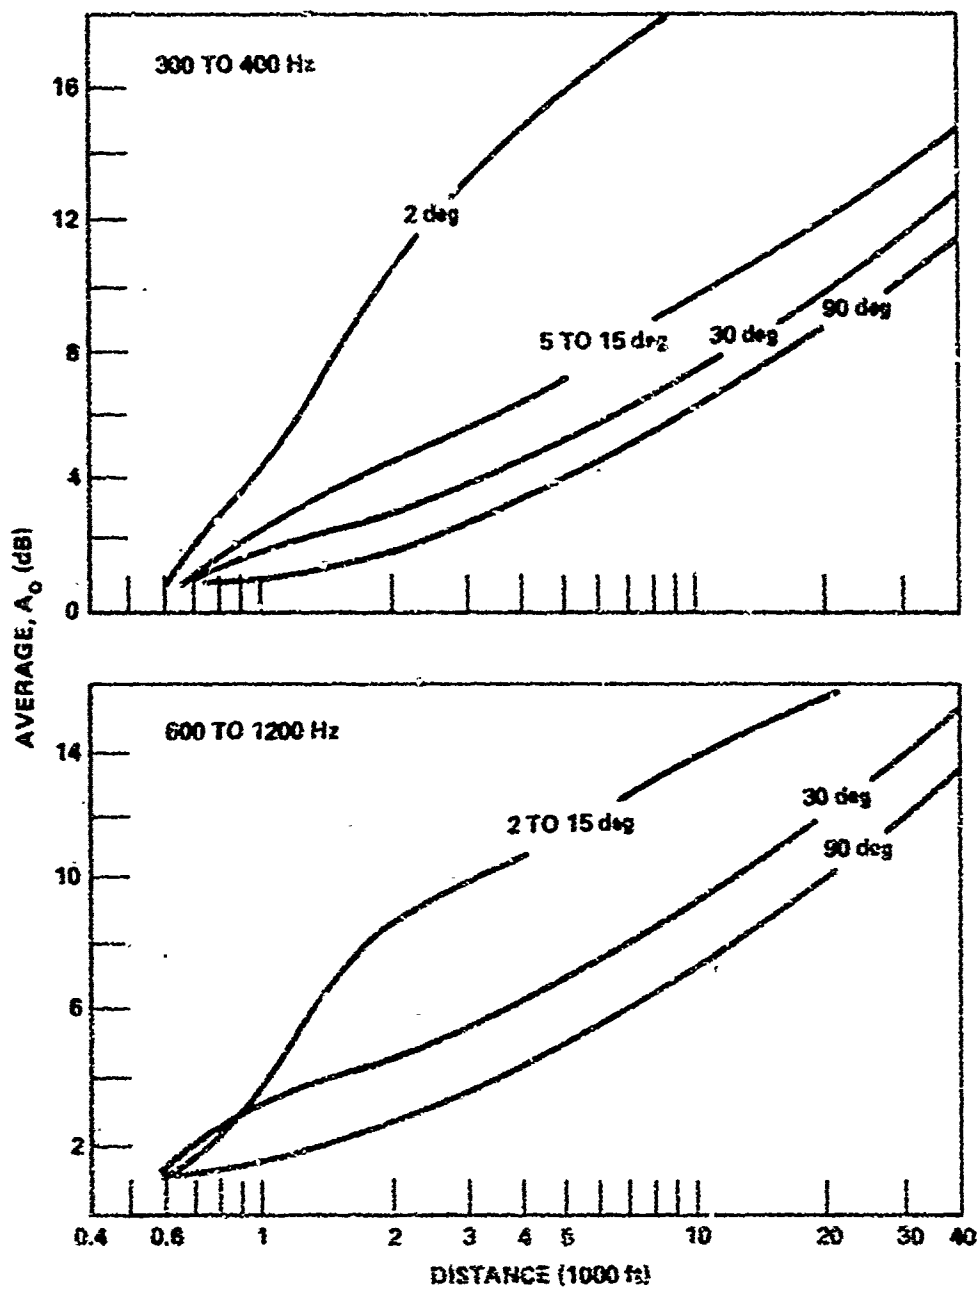


Figure 5. Continued

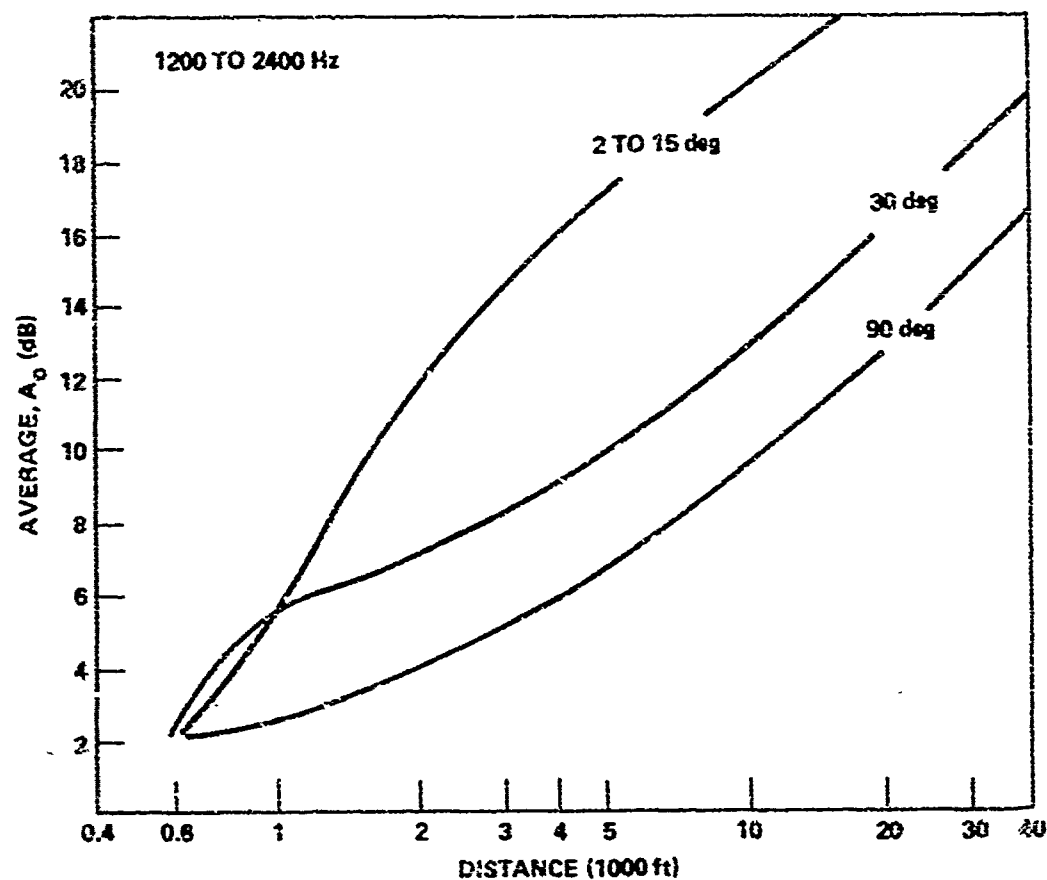


Figure 5. Concluded

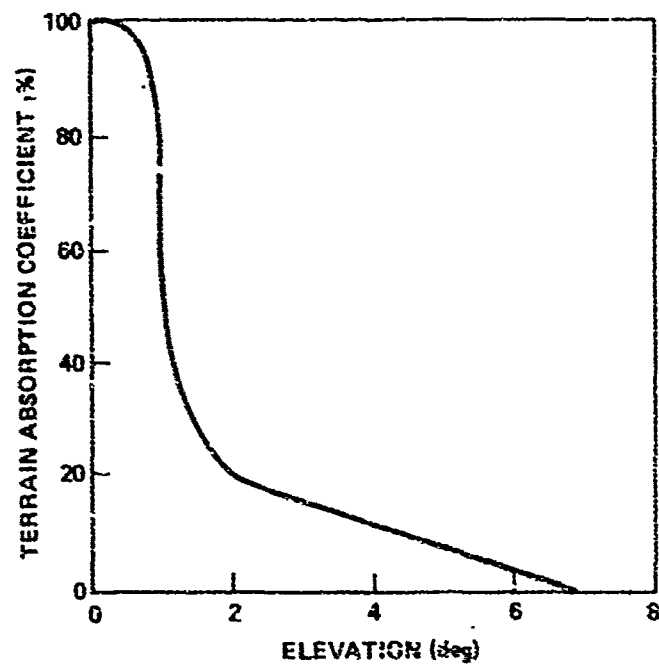


Figure 6. Terrain absorption coefficient versus elevation angle.

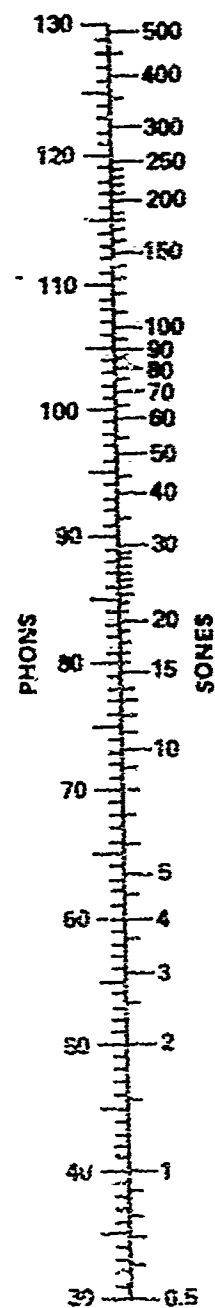
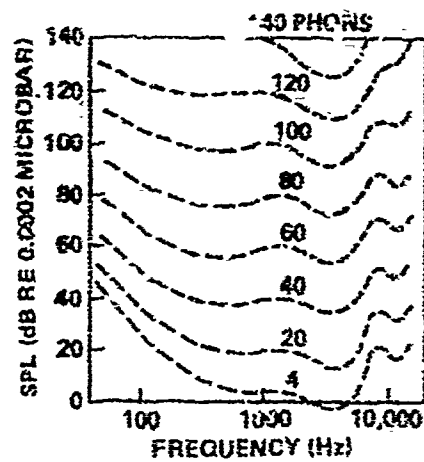


Figure 7. Equal-loudness-level contours.

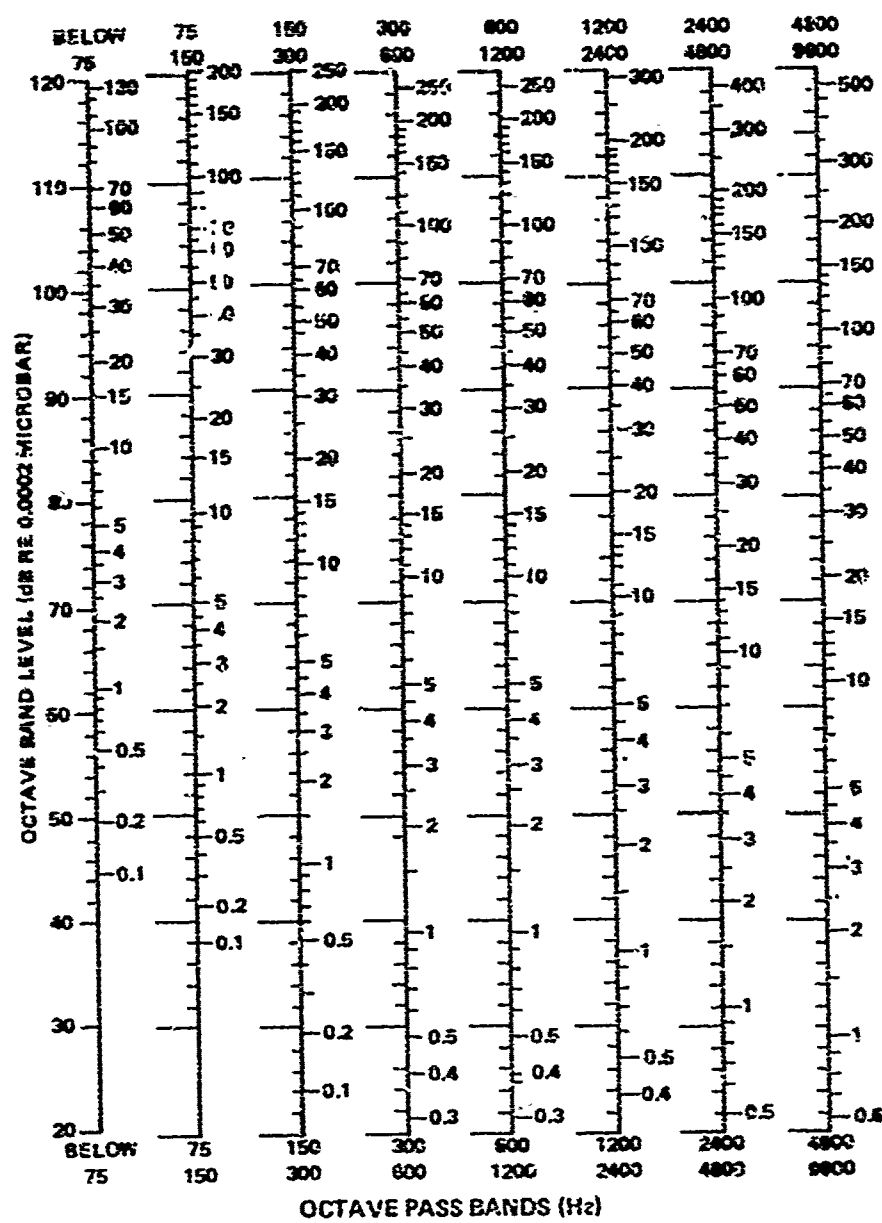


Figure 8. SPL to sones [4].

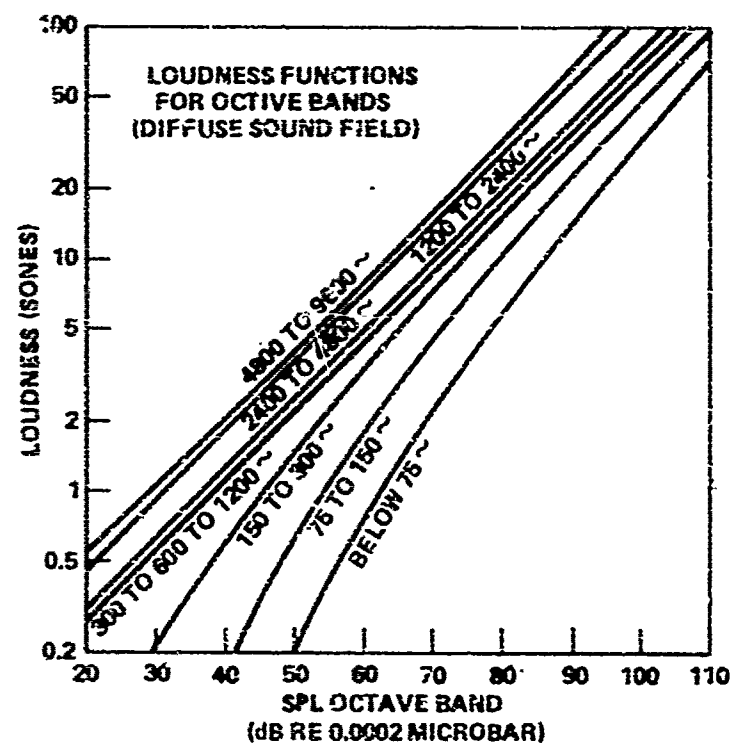



Figure 8. Concluded

Appendix A. WIND-SOUND ANGLE (PHI)

The figures and tables in this report contain an explanation on the calculation of the wind-sound angle, phi, a critical angle in the determination of the shadow region. All tables and graphs used in the model are included in this report.

Procedure:

- 1) Express the wind vector, $\vec{W}$, with magnitude, M , and direction wano (wind angle measured clockwise from the Y-positive axis-north).
- 2) Express the sound vector, $\vec{S}$, in terms of direction of sound propagation from source to observer.
- 3) Change the two vectors to unit vectors and take their dot product.
- 4) Take the arc cosine of the dot product to find the wind-sound angle, phi.

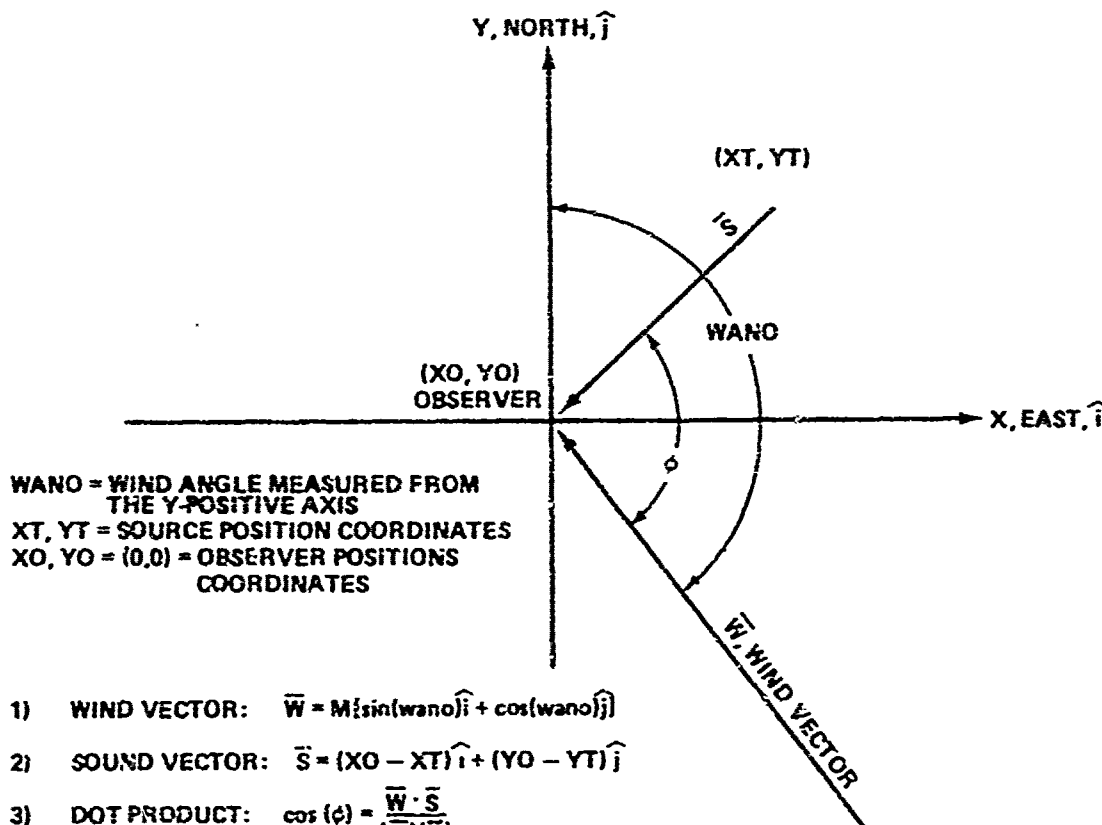

- 1) WIND VECTOR: $\vec{W} = M[\sin(\text{wano})\hat{i} + \cos(\text{wano})\hat{j}]$
- 2) SOUND VECTOR: $\vec{S} = (XO - XT)\hat{i} + (YO - YT)\hat{j}$
- 3) DOT PRODUCT: $\cos(\phi) = \frac{\vec{W} \cdot \vec{S}}{|\vec{W}| |\vec{S}|}$
- 4) THE WIND-SOUND ANGLE, ϕ : $\phi = \arccos \left[\frac{\vec{W} \cdot \vec{S}}{|\vec{W}| |\vec{S}|} \right]$

Appendix B. COMPUTER PROGRAM

The main program acts as a calling program and an output program, and few calculations are carried on in this part. Most of the critical task calculations are carried on in the subroutines. There is a great deal of data in terms of arrays representing either graphs or tables, and a large percentage of the data is read in by assignment statements. Besides data representing graphs and tables, there are also certain inputs to describe the conditions for detection:

- 1) DELTAT - value of the temperature gradient (constant- $^{\circ}\text{F}/1000$ feet)
- 2) T0 - temperature on the ground
- 3) T - temperature at height of target
- 4) DT - delta time - time incremental value
- 5) WANO - wind angle measured from the north direction (y-positive)
- 6) FEET - height where WIND is measured (not lower than 3 feet)
- 7) WIND - wind magnitude at height FEET
- 8) RH - relative humidity
- 9) L - picks out terrain type (4 types are available)
- 10) XT - x-coordinate of target position
- 11) YT - y-coordinate of target position
- 12) ZT - z-coordinate of target position
- 13) VX - x-coordinate of target vector velocity
- 14) VY - y-coordinate of target vector velocity
- 15) VZ - z-coordinate of target vector velocity
- 16) AX - x-component of target vector acceleration
- 17) AY - y-component of target vector acceleration
- 18) AZ - z-component of target vector acceleration.

Discretion should be used when inputting target positions because there is a time limit on the flight path. This time limit could be changed but, in its present form, 120 seconds is the time limit for the aircraft to fly into detection range. This is true because the aircraft does not necessarily have to fly into detection range. If it does not, the probability of aural detection will not reach 1.0, and the output along with this probability will be "AIRCRAFT DID NOT FLY WITHIN DETECTION RANGE." Therefore this time limit, which is changeable, is a fact that must be remembered when inputting initial conditions.

There are 19 subprograms in the model plus a plotting routine. Such a large number is used because the programmer preferred an uncluttered main program and an orderly assignment of tasks to a subprogram instead of grouping several tasks to one subroutine. The following is a list of the subroutines used and an explanation of their function:

<u>Subroutine</u>	<u>Called From</u>	<u>Function or Contribution</u>
ACCIML	MAIN	Calculates loudness (sones)
ALPH	MAIN	Calculates atmospheric attenuation
ALPHO	SHADOW	Calculates residual attenuation
ALOCAT	MAIN	Allows aspect angles (signatures)
AVEAO	ALPHO	Locates the value of residual attenuation
DEEBEE	ACCIML	Calculates probability
DINT	ALPH	Mathematical subroutine
DVDINT	ALPH	Mathematical subroutine
FLIGHT	MAIN	Calculates new target positions
FIG	ALPHO	Calculates whether an observer is in a sound shadow
INTEP	FIG	Interpolates
INTERP	AVEAO	Interpolates
ORDER	ACCIML	Ranks orders
RELPOS	MAIN	Calculates elevation angle, azimuth angle, and range
SHADOW	MAIN	Calculates by calling other subroutines, residual attenuation
TAB	FUNCTION	Allows a 4-dimensioned array
TABLE1	ALPHO	Table look-up
VEG	MAIN	Calculates terrain absorption
WEED	MAIN	Calculates phi, the wind-sound angle, W_{30} , magnitude of wind at 30 feet.

Several subroutines were used from an existing model [1]. The program will accept target signatures for five frequency bands that are critical ones for an airborne source. These frequency bands are: 75 to 150, 150 to 300, 300 to 600, 600 to 1200, and 1200 to 2400 hertz. The frequencies used in calculations are the geometric mean frequencies of the bands. Velocity and acceleration units are divided into vector

components. Therefore the signs of the velocity and acceleration components must be remembered in relation with the observer. If the target is at positive position coordinates, negative velocity coordinates must be inputted for the aircraft to fly over the observer. The same applies to acceleration coordinates also. Figure B-1 shows how the geometry of the program is set up.

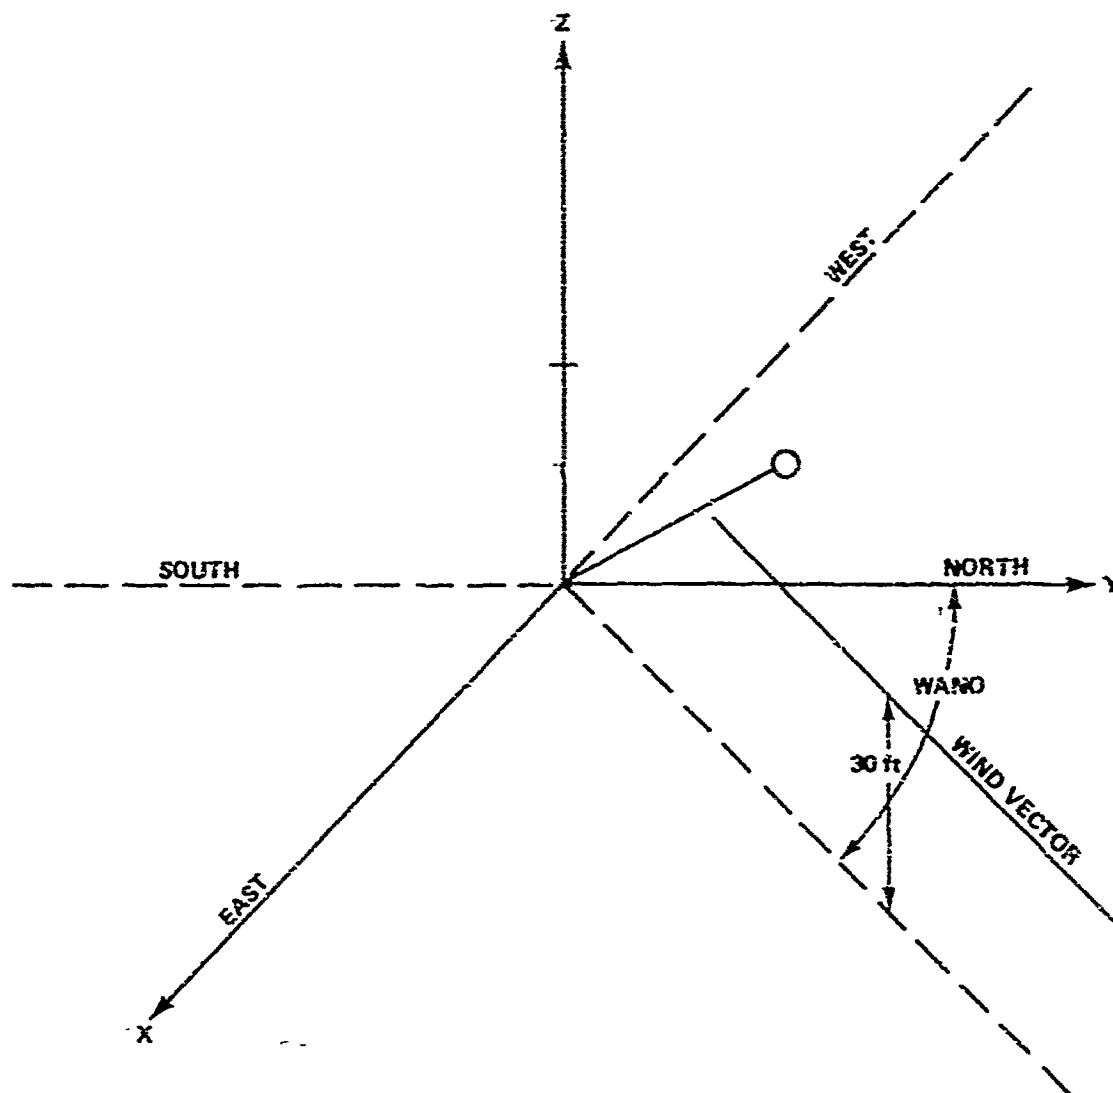


Figure B-1. Geometry of model - ϕ is the wind-sound angle at height 30 feet. Consider the wind angle $wand$ as the angle of the wind vector with the Y-axis. Y-axis corresponds to north, X-axis east-west, etc.


```

21 FORMAT(SF10.0)
22 FORMAT(4F10.0)
  DO 50 K=1,5
    ZTAR(K)=500.*K
  DO 50 J=1,6
    YTAR(J)=3280.84*(J-1)
  DO 50 I=1,8
    XTAR(I)=3280.84*(I-1)
  XT=XTAR(I)
  YT=YTAR(J)
  ZT=ZTAR(K)
  CALL WHOLE
50 CONTINUE
  STOP
  END
  SUBROUTINE WHOLE
    DIMENSION FO(5),A(5,17,6),SPL(5),SPLS(5),AO(5),AT(5),AH(5),AA(5)
    DIMENSION DELAD(5)
    COMMON ZAA(8),SIG(5,10,8),AMB(5),DO(10),C(6),EL(6),YX(17),KK
    COMMON FIGS(6,6),Z(6),AC(5,4),E(4),EE(4),SONES(5,11),XTER,DELTAT,T
    COMMON TO,PIE,WAND,WIND,FEET,PH,AX,AY,AZ,XT,YT,ZT,VX,VY,VZ
    COMMON/DIMCON/TARDIM (120)
    TIME=0.
    DT=1.
    L=0
    F=53.
    DO 1 I=1,5
      F=2.0*F
    1 FO(I)=F
  C  OBSERVER AND TARGET INFORMATION
    XO=0.
    YO=0.
    ZO=5.
  C
  C  CALCULATE ATTENUATION DUE TO HUMIDITY
  C
    CALL ALPH(RH,T,AH,FO)
    DO 55 I=1,5
      DO 55 J=1,17
        DO 55 M=1,6
          55 A(I,J,M)=0.
          A(1,1,1)=1.5
          A(1,2,1)=3.3
          A(1,1,2)=1.5
          A(1,1,3)=1.5
          A(1,1,4)=1.5
          A(1,8,1)=12.8
          A(1,9,1)=13.3
          A(1,10,1)=13.6
          A(1,11,1)=13.8
          A(1,12,1)=13.9
          A(1,13,1)=14.0
          A(1,14,1)=14.0
          A(1,15,1)=15.1
          A(1,16,1)=15.5
          A(1,17,1)=15.8
          A(1,10,2)=A(1,10,3)=A(1,10,4)=11.4
          A(1,11,2)=A(1,11,3)=A(1,11,4)=11.9
          A(1,12,2)=A(1,12,3)=A(1,12,4)=12.0
          A(1,13,2)=A(1,13,3)=A(1,13,4)=12.3
          A(1,14,2)=A(1,14,3)=A(1,14,4)=12.4
          A(1,15,2)=A(1,15,3)=A(1,15,4)=14.0
          A(1,16,2)=A(1,16,3)=A(1,16,4)=14.5
          A(1,17,2)=A(1,17,3)=A(1,17,4)=14.8

```

$A(2,1,1)=A(2,1,2)=.7$
 $A(2,2,1)=2.5$
 $A(2,2,2)=1.1$
 $A(2,1,3)=A(2,1,4)=.7$
 $A(2,2,3)=A(2,2,4)=.9$
 $A(2,1,5)=A(2,1,6)=.7$
 $A(2,2,6)=.8$
 $A(2,10,1)=14.2$
 $A(2,11,1)=15.0$
 $A(2,12,1)=15.6$
 $A(2,13,1)=15.8$
 $A(2,14,1)=16.0$
 $A(2,15,1)=17.0$
 $A(2,16,1)=17.3$
 $A(2,17,1)=17.5$
 $A(2,10,2)=9.4$
 $A(2,11,2)=10.0$
 $A(2,12,2)=10.2$
 $A(2,13,2)=10.4$
 $A(2,14,2)=10.5$
 $A(2,15,2)=12.9$
 $A(2,16,2)=14.0$
 $A(2,17,2)=14.8$
 $A(2,10,3)=A(2,10,4)=6.2$
 $A(2,11,3)=A(2,11,4)=5.7$
 $A(2,12,3)=A(2,12,4)=7.0$
 $A(2,13,3)=A(2,13,4)=7.4$
 $A(2,14,3)=A(2,14,4)=7.6$
 $A(2,15,3)=A(2,15,4)=10.1$
 $A(2,16,3)=A(2,16,4)=12.0$
 $A(2,17,3)=A(2,17,4)=13.0$
 $A(2,10,5)=4.8$
 $A(2,11,5)=5.3$
 $A(2,13,5)=6.0$
 $A(2,14,5)=6.1$
 $A(2,15,5)=8.8$
 $A(2,16,5)=10.3$
 $A(2,17,5)=11.8$
 $A(2,12,5)=5.8$
 $A(2,10,6)=4.0$
 $A(2,11,6)=4.4$
 $A(2,12,6)=5.0$
 $A(2,13,6)=5.2$
 $A(2,14,6)=5.3$
 $A(2,15,6)=8.0$
 $A(2,16,6)=9.8$
 $A(2,17,6)=11.0$
 $A(3,10,1)=16.4$
 $A(3,11,1)=17.2$
 $A(3,12,1)=18.0$
 $A(3,13,1)=18.2$
 $A(3,14,1)=18.4$
 $A(3,15,1)=19.3$
 $A(3,16,1)=20.0$
 $A(3,17,1)=21.0$
 $A(3,10,2)=A(3,10,3)=A(3,10,4)=8.0$
 $A(3,11,2)=A(3,11,3)=A(3,11,4)=8.4$
 $A(3,12,2)=A(3,12,3)=A(3,12,4)=9.0$
 $A(3,13,2)=A(3,13,3)=A(3,13,4)=9.6$
 $A(3,14,2)=A(3,14,3)=A(3,14,4)=10.0$
 $A(3,15,2)=A(3,15,3)=A(3,15,4)=12.0$
 $A(3,16,2)=A(3,16,3)=A(3,16,4)=14.0$
 $A(3,17,2)=A(3,17,3)=A(3,17,4)=14.8$

$A(3,10,5)=5.9$
 $A(3,11,5)=6.3$
 $A(3,12,5)=6.3$
 $A(3,13,5)=7.2$
 $A(3,14,5)=7.7$
 $A(3,15,5)=9.8$
 $A(3,16,5)=11.8$
 $A(3,17,5)=12.4$
 $A(3,10,6)=4.8$
 $A(3,11,6)=5.2$
 $A(3,12,6)=5.8$
 $A(3,13,6)=6.0$
 $A(3,14,6)=6.3$
 $A(3,15,6)=9.0$
 $A(3,16,6)=10.2$
 $A(3,17,6)=11.8$
 $A(4,10,1)=A(4,10,2)=A(4,10,3)=A(4,10,4)=12.0$
 $A(4,11,1)=A(4,11,2)=A(4,11,3)=A(4,11,4)=12.6$
 $A(4,12,1)=A(4,12,2)=A(4,12,3)=A(4,12,4)=13.3$
 $A(4,13,1)=A(4,13,2)=A(4,13,3)=A(4,13,4)=13.8$
 $A(4,14,1)=A(4,14,2)=A(4,14,3)=A(4,14,4)=14.0$
 $A(4,15,1)=A(4,15,2)=A(4,15,3)=A(4,15,4)=15.8$
 $A(4,16,1)=A(4,16,2)=A(4,16,3)=A(4,16,4)=16.7$
 $A(4,17,1)=A(4,17,2)=A(4,17,3)=A(4,17,4)=17.0$
 $A(4,10,5)=7.8$
 $A(4,11,5)=8.0$
 $A(4,12,5)=8.2$
 $A(4,13,5)=8.9$
 $A(4,14,5)=9.8$
 $A(4,15,5)=12.0$
 $A(4,16,5)=13.0$
 $A(4,17,5)=14.5$
 $A(4,10,6)=5.4$
 $A(4,11,6)=6.2$
 $A(4,12,6)=6.4$
 $A(4,13,6)=7.0$
 $A(4,14,6)=7.4$
 $A(4,15,6)=10.0$
 $A(4,16,6)=11.8$
 $A(4,17,6)=12.8$
 $A(5,11,1)=A(5,11,2)=A(5,11,3)=A(5,11,4)=18.5$
 $A(5,12,1)=A(5,12,2)=A(5,12,3)=A(5,12,4)=19.3$
 $A(5,13,1)=A(5,13,2)=A(5,13,3)=A(5,13,4)=19.8$
 $A(5,14,1)=A(5,14,2)=A(5,14,3)=A(5,14,4)=20.1$
 $A(5,15,1)=A(5,15,2)=A(5,15,3)=A(5,15,4)=23.5$
 $A(5,16,1)=A(5,16,2)=A(5,16,3)=A(5,16,4)=24.0$
 $A(5,17,1)=A(5,17,2)=A(5,17,3)=A(5,17,4)=25.0$
 $A(5,11,5)=11.4$
 $A(5,12,5)=12.0$
 $A(5,13,5)=12.6$
 $A(5,14,5)=13.0$
 $A(5,15,5)=16.3$
 $A(5,16,5)=18.4$
 $A(5,17,5)=20.0$
 $A(5,11,6)=8.0$
 $A(5,12,6)=8.8$
 $A(5,13,6)=9.2$
 $A(5,14,6)=9.8$
 $A(5,15,6)=13.0$
 $A(5,16,6)=15.2$
 $A(5,17,6)=16.0$
 $A(1,3,1)=4.8$
 $A(1,4,1)=5.25$

$A(1,5,1)=6.1$
 $A(1,6,1)=11.3$
 $A(1,7,1)=12.0$
 $A(1,2,2)=2.5$
 $A(1,3,2)=3.0$
 $A(1,4,2)=3.8$
 $A(1,5,2)=4.5$
 $A(1,6,2)=9.0$
 $A(1,7,2)=9.9$
 $A(1,8,2)=10.25$
 $A(1,9,2)=10.8$
 $A(1,2,3)=2.5$
 $A(1,3,3)=3.0$
 $A(1,4,3)=3.8$
 $A(1,5,3)=4.5$
 $A(1,6,3)=9.0$
 $A(1,7,3)=9.9$
 $A(1,8,3)=10.25$
 $A(1,9,3)=10.8$
 $A(1,5,4)=3.9$
 $A(1,6,4)=4.5$
 $A(1,7,4)=5.0$
 $A(1,8,4)=5.5$
 $A(1,9,4)=6.0$
 $A(1,10,4)=6.25$
 $A(1,1,5)=1.5$
 $A(1,2,5)=1.6$
 $A(1,3,5)=1.7$
 $A(1,4,5)=1.7$
 $A(1,5,5)=1.8$
 $A(1,6,5)=2.0$
 $A(1,7,5)=2.6$
 $A(1,8,5)=3.2$
 $A(1,9,5)=3.8$
 $A(2,3,1)=4.0$
 $A(2,4,1)=4.8$
 $A(2,5,1)=5.9$
 $A(2,6,1)=9.2$
 $A(2,7,1)=10.6$
 $A(2,8,1)=12.0$
 $A(2,9,1)=13.2$
 $A(2,3,4)=1.0$
 $A(2,4,4)=1.5$
 $A(2,5,4)=1.7$
 $A(2,6,4)=2.5$
 $A(2,7,4)=3.2$
 $A(2,8,4)=3.9$
 $A(2,9,4)=4.2$
 $A(2,3,2)=2.0$
 $A(2,4,2)=2.35$
 $A(2,5,2)=3.0$
 $A(2,6,2)=6.9$
 $A(2,7,2)=7.7$
 $A(2,8,2)=8.25$
 $A(2,9,2)=8.9$
 $A(2,1,5)=.8$
 $A(2,2,5)=.9$
 $A(2,3,5)=1.0$
 $A(2,4,5)=1.0$
 $A(2,5,5)=1.0$
 $A(2,6,5)=1.7$
 $A(2,7,5)=2.4$
 $A(2,8,5)=3.0$

$A(2,9,5)=3.65$
 $A(2,3,3)=1.0$
 $A(2,4,3)=1.5$
 $A(2,5,3)=2.0$
 $A(2,6,3)=3.8$
 $A(2,7,3)=4.5$
 $A(2,8,3)=5.2$
 $A(2,9,3)=5.8$
 $A(3,1,1)=.8$
 $A(3,2,1)=2.2$
 $A(3,3,1)=3.3$
 $A(3,4,1)=4.0$
 $A(3,5,1)=4.6$
 $A(3,6,1)=10.5$
 $A(3,7,1)=13.4$
 $A(3,8,1)=15.0$
 $A(3,9,1)=16.0$
 $A(3,6,4)=3.1$
 $A(3,7,4)=4.0$
 $A(3,8,4)=4.8$
 $A(3,9,4)=5.4$
 $A(3,1,5)=.8$
 $A(3,2,5)=.8$
 $A(3,3,5)=.9$
 $A(3,4,5)=1.0$
 $A(3,5,5)=1.0$
 $A(3,6,5)=2.0$
 $A(3,7,5)=3.0$
 $A(3,8,5)=3.8$
 $A(3,9,5)=4.3$
 $A(3,1,2)=.8$
 $A(3,2,2)=1.0$
 $A(3,3,2)=2.0$
 $A(3,4,2)=2.4$
 $A(3,5,2)=2.6$
 $A(3,6,2)=4.8$
 $A(3,7,2)=6.0$
 $A(3,8,2)=6.8$
 $A(3,9,2)=7.4$
 $A(3,1,4)=.8$
 $A(3,2,4)=1.0$
 $A(3,3,4)=1.2$
 $A(3,4,4)=1.8$
 $A(3,5,4)=2.0$
 $A(4,5,1)=4.0$
 $A(4,6,1)=9.0$
 $A(4,7,1)=10.$
 $A(4,8,1)=11.0$
 $A(4,9,1)=11.6$
 $A(4,5,4)=3.6$
 $A(4,6,4)=5.0$
 $A(4,7,4)=5.9$
 $A(4,8,4)=6.5$
 $A(4,9,4)=7.3$
 $A(4,5,2)=4.0$
 $A(4,6,2)=9.0$
 $A(4,7,2)=10.0$
 $A(4,8,2)=11.0$
 $A(4,9,2)=11.6$
 $A(4,5,5)=1.8$
 $A(4,6,5)=2.8$
 $A(4,7,5)=3.9$
 $A(4,8,5)=4.6$

```

A(4,9,5)=5.4
A(4,5,3)=4.0
A(4,6,3)=9.0
A(4,7,3)=10.0
A(4,8,3)=11.0
A(4,9,3)=11.6
A(5,1,1)=A(5,1,2)=A(5,1,3)=2.0
A(5,2,1)=A(5,2,2)=A(5,2,3)=3.0
A(5,3,1)=A(5,3,2)=A(5,3,3)=4.0
A(5,4,1)=A(5,4,2)=A(5,4,3)=4.6
A(5,5,1)=A(5,5,2)=A(5,5,3)=5.5
A(5,6,1)=A(5,6,2)=A(5,6,3)=12.4
A(5,7,1)=A(5,7,2)=A(5,7,3)=14.8
A(5,8,1)=A(5,8,2)=A(5,8,3)=16.0
A(5,9,1)=A(5,9,2)=A(5,9,3)=16.4
A(5,10,1)=A(5,10,2)=A(5,10,3)=18.0
A(5,5,4)=5.8
A(5,6,4)=7.0
A(5,7,4)=8.2
A(5,8,4)=9.3
A(5,9,4)=10.0
A(5,10,4)=10.8
A(5,1,5)=2.0
A(5,2,5)=2.2
A(5,3,5)=2.4
A(5,4,5)=2.6
A(5,5,5)=2.8
A(5,6,5)=4.0
A(5,7,5)=5.2
A(5,8,5)=6.0
A(5,9,5)=6.8
A(5,10,5)=7.4
KKK=0
M=0
C   STARTING POINT
WRITE (6,802) XT,YT,ZT
2   TIME=TIME+DT
CALL WEEDSWANQ,WIND,FEET,XT,YT,ZT,XO,YO,ZO,PHI,W30)
CALL RELPOS(XO,YO,ZO,XT,YT,ZT,ZA,RETA,D,VX,VY,VZ)
IF (RETA.LT.2.)GOTO 45
C   *****
C   CALCULATE ATTENUATION DUE TO TERRAIN TYPE
K=KTER
CALL VEG(RETA,D,AT,KVAC,E,EE)
C   *****
XX=XT-XO
C   *****
C   CALCULATE ATTENUATION DUE TO TURBELENCE
CALL SHJOW(XA,A,RETA,EL,D,DELTA,T,T,YO,FIGS,AD-PHI-W30,XT,YT,ZT,XO
1,YO,ZO,YX,C)
C   *****
IF (A0(1).EQ.(-1.))GOTO 45
DO 3 I=1,5
3   AA(I)=AH(I)*(D-DO(KK1))/1000.+A0(I)+AT(I)
DO 90 I=1,5
CA: L ALOCAT(I,KK,SIG,ZA,ZAA,REWARD)
SPLS(I)=REWARD-20.*ALOG10(D/DO(KK))+3.-AA(I)
90 CONTINUE
C   *****
C   COMBINE SPL WITH AMBIENT
C   *****
DO 1000 I=1,5
SPL(I)=10.*(SPLS(I)/10.)*10.*(AMB(I)/10.)
SPL(I)=10.*ALOG10(SPL(I))

```

```

1000 CONTINUE
C
C   CALCULATE PROBABILITY
C   CALL ACCUML(SPL,AMB,SONFS,VALUF,ABC)
C
  IF(ABC.FQ.0.)GOTO 45
  L=L+1
35 IF(L/61*L.FQ.L)WRITE (6,800)
  IF(L/61*L.FQ.L)L=0
  WRITE (6,23) TIME, VALUE
  IF(VALUE.GE.,999999999)GOTO 19
45 CALL FLIGHT(AX,AY,AZ,VX,VY,VZ,XT,YT,ZT,DT)
  IF(TIME.GE.120.)GOTO 50
  GOTO 2
19 CALL RELPOS(XG,YG,ZG,XT,YT,ZT,ZA,BETA,D,VX,VY,VZ)
  NKK=2
  WRITE (6,28)
  WRITE (6,73) XT,YT,ZT
  WRITE (6,74) BETA
  WRITE (6,400) ZA
  WRITE (6,70) W30,PHI,TIME
  WRITE (6,100)
  K=KTER
  IF(K.FQ.1)WRITE (6,75)
  IF(K.EQ.2)WRITE (6,76)
  IF(K.FQ.3)WRITE (6,77)
  IF(K.FQ.4)WRITE (6,78)
  WRITE (6,14) (FQ(I),AH(I),AC(I),AT(I),I=1,5)
  WRITE (6,100)
  WRITE (6,16) (FQ(J),AA(J),SPLS(J),AMB(J),J=1,5)
  WRITE (6,29) D
  WRITE (6,100)
  XD=XT
  YD=YT
  ZD=ZT
  VS=1080.*SQRT((T+459.)/ (TG+459.))
  DELAY=D/VS
  CALL FLIGHT(AX,AY,AZ,VX,VY,VZ,XD,YD,ZD,DELAY)
  CALL RELPOS(XG,YG,ZG,XD,YD,ZD,ZA,BETA,D,VX,VY,VZ)
  WRITE (6,801) DELAY,D
  DT=4.
  TIME=TIME+DT
  CALL FLIGHT(AX,AY,AZ,VX,VY,VZ,XT,YT,ZT,DT)
  CALL RELPOS(XG,YG,ZG,XT,YT,ZT,ZA,BETA,D,VX,VY,VZ)
  WRITE (6,100)
  WRITE (6,73) XT,YT,ZT
  WRITE (6,74) BETA
  WRITE (6,400) ZA
  WRITE (6,15) TIME,D
50 CONTINUE
  IF(KKK.EQ.0)WRITE (6,200)
C
14 FORMAT(1X,6H FREQ=,F10.2,2X,4H AH=,F8.3,12H DB/1000, FT,2X,4H AO=,
  6F8.3,2X,4H AT=,F8.3)
15 FORMAT(1X,35H VISUAL DETECTION OF TARGET AT TIME=F8.2,9H AT RANGE,
  6F10.2)
16 FORMAT(1X,6H FREQ=,F10.2,2X,19H TOTAL ATTENUATION=,F8.3,2X,5H SPL=
  6,F10.3,2X,9H AMBIENT=,F10.3)
23 FORMAT(1X,F7.2,11X,F10.5)
28 FORMAT(1H1)
24 FORMAT(1X,31H OBSERVER HEARS TARGET AT RANGE,F10.2)
70 FORMAT(1X,5H W30=,F6.2,5H PHI=,F6.2,6H TIME=,F6.2)
73 FORMAT(1X,4H XT=,F8.2,4H YT=,F8.2,4H ZT=,F8.2)

```

```

74 FORMAT(1X,6H BETA=,F6.2)
75 FORMAT(1X,18H TERRAIN-OPEN AREA)
76 FORMAT(1X,22H TERRAIN-18 INCH GRASS)
77 FORMAT(1X,22H TERRAIN-LIGHTLY TREED)
78 FORMAT(1X,15H TERRAIN-FOREST)
100 FORMAT(1X,///)
200 FORMAT(1X,42H AIRCRAFT DID NOT FLY WITHIN HEARING RANGE)
400 FORMAT(1X,15H AZIMUTH ANGLE=,F10.2)
800 FORMAT(1H1,7X,5H TIME,5X,34H PROBABILITY OF AUDITORY DETECTION)
801 FORMAT(1X,14H DELAY TIME IS, F4.0,32H SECONDS, TARGET IS NOW AT RAN
96F,F9.2)
802 FORMAT(1H1,2X,5H TIME,5X,34H PROBABILITY OF AUDITORY DETECTION,10X
6.15H STARTING POINT,3X,4H XT=,F8.2,4H YT=,F8.2,4H ZT=,F8.2)

```

C

```

RETURN
END
SUBROUTINE ACCUHL(SPL,AMB,SONES,PROB,ARC)
DIMENSION SONES(5,11),SPL(5),AMB(5),S(5),SS(5),DEC(11)
DATA DEC/20.,30.,40.,50.,60.,70.,80.,90.,100.,110.,120./
ARC=1.
SAMB=SNL=0.
DO 15 I=1,5
K=0
IF(SPL(I).LT.20..OR.SPL(I).GT.120.)GOTO 20
DO 15 J=1,10
IF(SPL(I).GE.DEC(J).AND.SPL(I).LT.DEC(J+1))GOTO 10
GOTO 15
10 S(I)=(SPL(I)-DEC(J))/(DEC(J+1)-DEC(J))*(SONES(I,J+1)-SONES(I,J))
S=SONES(I,J)
15 CONTINUE
CALL ORDER(S)
GOTO 25
20 ARC=0.
RETURN
25 CONTINUE
DO 35 I=1,5
IF(AMB(I).LT.20..OR.AMB(I).GT.120.)GOTO 20
DO 35 J=1,10
IF(AMB(I).GE.DEC(J).AND.AMB(I).LT.DEC(J+1))GOTO 30
GOTO 35
30 SS(I)=(AMB(I)-DEC(J))/(DEC(J+1)-DEC(J))*(SONES(I,J+1)-SONES(I,J))
S=SONES(I,J)
35 CONTINUE
CALL ORDER(SS)
DO 40 I=1,5
SAMB=SS(I)+SAMB
SNL=S(I)+SNL
40 CONTINUE
CALL DEGREE(SNL,SAMB,PROB,ARC)
RETURN
END
SUBROUTINE ALPH(RH,T,AM,FO)
DIMENSION P(17,11),W(17,11),FO(S),AM(S),TT(17),FI(S)
BC=20.0
DO 1 I=1,17
TT(I)=BB
1 BR=BB+5.0
DO 2 I=1,17
R/I,1)=.1
R/I,2)=.15
R/I,3)=.2
R/I,4)=.3
R/I,5)=.4

```

$R(1,6)=.5$
 $R(1,7)=.6$
 $R(1,8)=.7$
 $R(1,9)=.8$
 $R(1,10)=.9$
 $R(1,11)=1.0$
 $U(1,1)=.3$
 $W(1,2)=.42$
 $W(1,3)=.57$
 $W(1,4)=.85$
 $W(1,5)=1.125$
 $W(1,6)=1.4$
 $W(1,7)=1.7$
 $W(1,8)=1.9$
 $W(1,9)=2.125$
 $W(1,10)=2.5$
 $W(1,11)=2.7$
 $W(2,1)=.36$
 $W(2,2)=.53$
 $W(2,3)=.7$
 $W(2,4)=1.1$
 $W(2,5)=1.45$
 $W(2,6)=1.70$
 $W(2,7)=2.1$
 $W(2,8)=2.48$
 $W(2,9)=2.80$
 $W(2,10)=3.1$
 $W(2,11)=3.5$
 $W(3,1)=.46$
 $W(3,2)=.68$
 $W(3,3)=.80$
 $W(3,4)=1.3$
 $W(3,5)=1.75$
 $W(3,6)=2.1$
 $W(3,7)=2.6$
 $W(3,8)=3.05$
 $W(3,9)=3.5$
 $W(3,10)=3.9$
 $W(3,11)=4.3$
 $W(4,1)=.55$
 $W(4,2)=.81$
 $W(4,3)=1.1$
 $W(4,4)=1.6$
 $W(4,5)=2.07$
 $W(4,6)=2.7$
 $W(4,7)=3.3$
 $W(4,8)=3.8$
 $W(4,9)=4.2$
 $W(4,10)=4.6$
 $W(4,11)=5.2$
 $W(5,1)=.67$
 $W(5,2)=.98$
 $W(5,3)=1.3$
 $W(5,4)=1.9$
 $W(5,5)=2.6$
 $W(5,6)=3.2$
 $W(5,7)=3.9$
 $W(5,8)=4.5$
 $W(5,9)=5.1$
 $W(5,10)=5.9$
 $W(5,11)=6.4$
 $W(6,1)=.8$
 $W(6,2)=1.2$

$W(6,3)=1.55$
 $W(6,4)=2.4$
 $W(6,5)=3.2$
 $W(6,6)=3.9$
 $W(6,7)=4.8$
 $W(6,8)=5.5$
 $W(6,9)=6.2$
 $W(6,10)=7.0$
 $W(6,11)=7.8$
 $W(7,1)=.94$
 $W(7,2)=1.4$
 $W(7,3)=1.8$
 $W(7,4)=2.8$
 $W(7,5)=3.7$
 $W(7,6)=4.7$
 $W(7,7)=5.5$
 $W(7,8)=6.5$
 $W(7,9)=7.5$
 $W(7,10)=8.4$
 $W(7,11)=9.1$
 $W(8,1)=1.2$
 $W(8,2)=1.65$
 $W(8,3)=2.2$
 $W(8,4)=3.4$
 $W(8,5)=4.5$
 $W(8,6)=5.5$
 $W(8,7)=6.6$
 $W(8,8)=7.8$
 $W(8,9)=9.0$
 $W(8,10)=10.0$
 $W(8,11)=11.0$
 $W(9,1)=1.3$
 $W(9,2)=1.9$
 $W(9,3)=2.6$
 $W(9,4)=3.9$
 $W(9,5)=5.2$
 $W(9,6)=6.5$
 $W(9,7)=7.9$
 $W(9,8)=9.1$
 $W(9,9)=10.5$
 $W(9,10)=12.0$
 $W(9,11)=13.0$
 $W(10,1)=1.6$
 $W(10,2)=2.4$
 $W(10,3)=3.1$
 $W(10,4)=4.8$
 $W(10,5)=6.2$
 $W(10,6)=7.9$
 $W(10,7)=9.2$
 $W(10,8)=11.0$
 $W(10,9)=12.5$
 $W(10,10)=14.0$
 $W(10,11)=15.5$
 $W(11,1)=1.8$
 $W(11,2)=2.7$
 $W(11,3)=3.6$
 $W(11,4)=5.5$
 $W(11,5)=7.3$
 $W(11,6)=9.0$
 $W(11,7)=11.2$
 $W(11,8)=12.7$
 $W(11,9)=14.5$
 $W(11,10)=16.0$

$W(11,11)=18.0$
 $W(12,1)=2.3$
 $W(12,2)=3.3$
 $W(12,3)=4.3$
 $W(12,4)=6.5$
 $W(12,5)=8.7$
 $W(12,6)=11.2$
 $W(12,7)=13.0$
 $W(12,8)=15.5$
 $W(12,9)=17.7$
 $W(12,10)=19.0$
 $W(12,11)=21.0$
 $W(13,1)=2.55$
 $W(13,2)=3.8$
 $W(13,3)=5.0$
 $W(13,4)=7.5$
 $W(13,5)=10.0$
 $W(13,6)=12.5$
 $W(13,7)=15.0$
 $W(13,8)=17.5$
 $W(13,9)=20.0$
 $W(13,10)=22.5$
 $W(13,11)=25.0$
 $W(14,1)=3.0$
 $W(14,2)=4.5$
 $W(14,3)=5.9$
 $W(14,4)=8.9$
 $W(14,5)=12.0$
 $W(14,6)=14.5$
 $W(14,7)=17.5$
 $W(14,8)=20.5$
 $W(14,9)=23.5$
 $W(14,10)=26.5$
 $W(14,11)=29.5$
 $W(15,1)=3.4$
 $W(15,2)=5.0$
 $W(15,3)=6.7$
 $W(15,4)=10.0$
 $W(15,5)=13.5$
 $W(15,6)=17.0$
 $W(15,7)=20.0$
 $W(15,8)=23.0$
 $W(15,9)=27.0$
 $W(15,10)=30.0$
 $W(15,11)=33.0$
 $W(16,1)=4.0$
 $W(16,2)=5.9$
 $W(16,3)=7.9$
 $W(16,4)=12.0$
 $W(16,5)=16.0$
 $W(16,6)=19.5$
 $W(16,7)=24.0$
 $W(16,8)=28.0$
 $W(16,9)=32.0$
 $W(16,10)=35.0$
 $W(16,11)=38.0$
 $W(17,1)=4.5$
 $W(17,2)=6.8$
 $W(17,3)=9.0$
 $W(17,4)=13.5$
 $W(17,5)=18.0$
 $W(17,6)=23.0$
 $W(17,7)=27.5$

```

W(17,8)=32.0
W(17,9)=36.0
W(17,10)=41.0
W(17,11)=45.0
CALL DINT (R,W,TT,17,11,T,RH,WW)
DO 50 K=1,5
F1(K)=FC(K)/1000.
AH(K)=(1.1*F1(K)*(T+45.))/((F1(K)/WW**2)+((WW**2)/F1(K)))
50 CONTINUE
RETURN
END
SUBROUTINE ALPHO(XX,A,BETA,EL,D,DELTAT,T,TO,ZO,ZT,FIG5,AO,YX,Z,PHI
6,B,C,W30,XT,YT,XO,YO)
DIMENSION Z(6),C(6),FIG5(6,6),EL(6),YX(17),A(5,17,6)
DIMENSION SIG(5,10,8),AMB(5),AO(5),DELADD(5),AH(5),DO(10),AA(5)
COMMON/DIMCOM/TABDIM (120)
50 FORMAT(57H OBSERVER IS IN THE SHADOW REGION AT THE GIVEN TIME BELO
6W)
R=SQRT((XT-XO)**2+(YT-YO)**2)
5 CONTINUE
JJ=1
IF(BETA.LT.2.)GOTO 30
IF(BETA.GT.2.)GOTO 10
IF(BETA.GT.2..AND.BETA.LT.10.)GOTO 15
GOTO 20
10 DO 11 I=1,5
NN=I
CALL AVEAO(XX,A,BETA,EL,D,NN,AOBAR,YX)
CALL TABLE1(I,D,BETA,BRT,BRW)
IF(BRT.EQ.1.0.OR.AOBAR.FQ.0.)GOTO 20
AO(1)=AOBAR-.3*BRT*(DELTAT+4.5)+.12*BRW*(W30-9.5)
11 CONTINUE
15 NN=1
CALL AVEAO(X7,A,BETA,EL,D,NN,AOBAR,YX)
CALL TABLE1(1,D,BETA,BRT,BRW)
IF(BRT.FQ.1.0.OR.AOBAR.FQ.0.)GOTO 20
AO(1)=AOBAR-.3*BRT*(DELTAT+4.5)+.12*BRW*(W30-9.5)
JJ=2
20 DO 22 J=JJ,5
NN=J
CALL AVEAO(XX,A,BETA,EL,D,NN,AOBAR,YX)
IF(AOBAR.EQ.0.)GOTO 30
AO(J)=AOBAR
22 CONTINUE
RETURN
ENTRY AL
JJ=1
R=SQRT((XT-XO)**2+(YT-YO)**2)
CALL FIG/B,C,ZT,Z,PO,FIG5)
IF(RQ.EQ.0.)GOTO 5
IF(R.LE.R0)GOTO 5
IF(R.GE.3.*R0)GOTO 25
GOTO 27
25 IF(PHI.LT.110..OR.PHI.GT.150.)GOTO 27
WRITE (6,50)
DO 26 I=1,5
AO(I)=30.
26 CONTINUE
29 CONTINUE
RETURN
27 DO 28 II=1,5
NY=II
CALL AVEAO(XX,A,BETA,EL,D,NN,AOBAR,YX)

```

```

      IF (AORAR.EQ.0.) GOTO 30
      AO(II)=AORAR
      DELADO(II)=(R-RO)*(30.-40(II))/(2.*RO)
28  AO(II)=AO(II)+DELADO(II)
      WRITE (6,50)
      RETURN
30  AO(1)=-1.
      IF (O.LT.6000.) GOTO 35
      RETURN
35  DO 40 I=1,5
40  AO(I)=0.
      RETURN
      END
      SUBROUTINE ALOCAT(I, KK, SIG, ZA, ZAA, REWARD)
      DIMENSION SIG(5,10,8), ZAA(8)
      IF (ZA.GT.180.) ZA=360.-ZA
      DO 5 N=1,4
      IF (ZA.GE.ZAA(N).AND.ZA.LT.ZAA(N+1)) KKK=N
5  CONTINUE
      IF (ZA.EQ.180.) KKK=4
      REWARD=((ZA-ZAA(KKK))/(ZAA(KKK+1)-ZAA(KKK)))*(SIG(I, KKK, KKK))-SIG(
      I, KKK, KKK)+SIG(I, KKK, KKK)
      RETURN
      END
      SUBROUTINE AVEAO(XX, A, BETA, EL, D, NN, AORAR, YX)
      DIMENSION EL(6), YX(17), A(5,17,6)
      IF (D.LT.4000.) GOTO 20
      IF (BETA.LT.EL(1)) GOTO 20
      DO 10 N=1,5
      I=N
      IF (BETA.GE.EL(N).AND.BETA.LT.EL(N+1)) GOTO 30
7  CONTINUE
      IF (BETA.EQ.EL(6)) GOTO 30
20  CONTINUE
      AORAR=0.
      RETURN
30  OK=D/1000.
      DO 40 K=1,15
      J=K
      IF (OK.GE.YX(K).AND.OK.LT.YX(K+1)) GOTO 50
40  CONTINUE
      IF (OK.EQ.YX(16)) GOTO 50
      GOTO 20
50  CALL INTERP(OK, I, J, A, NN, BETA, EL, VALUE, YX)
      AORAR=VALUE
      RETURN
      END
      SUBROUTINE DEFREE(SNL, SAMB, PROB, ARC)
      DIMENSION SL(19), Q11(19), Q12(19)
      DIMENSION P(12), BAND(13), BANMID(12), PD(12)
      DATA SL/10.,15.,20.,25.,30.,35.,40.,45.,50.,55.,60.,65.,70.,75.,80
      1.,85.,90.,95.,100./
      DATA Q11/.76.,.47.,.34.,.29.,.27.,.27.,.27.,.27.,.27.,.27.,.27.,.26.,.2
      25.,.24.,.22.,.20.,.19/
      DATA Q12/.84.,.52.,.40.,.34.,.32.,.32.,.32.,.32.,.32.,.32.,.32.,.32.,.
      332.,.32.,.31.,.29.,.27/
      DATA P/.005.,.017.,.044.,.092.,.150.,.192.,.192.,.150.,.092.,.044.,.017.,.005
      6/
      PRGB=0.
      IF (SAMB.LE.0..OR.SNL.LF.0.) GOTO 25
      TAMR=(ALOG10(SAMR)+1.2)/0.03
      SSS=(ALOG10(SNL)+1.2)/0.03
      IF (TAMR.LT.15..OR.SSS.LT.15.) GOTO 25

```

```

K=0
DO 1 I=1,18
IF (TAMB.GE.SL(I).AND.TAMB.LT.SL(I+1))K=I
1 CONTINUE
IF (K.FQ.0)GOTO 5
XBAR1=(Q11(K)+Q12(K))/2.
XBAR2=(Q11(K+1)+Q12(K+1))/2.
XBAR=((TAMB-SL(K))/(SL(K+1)-SL(K)))*(XBAR2-XBAR1)+XBAR1
A=((TAMB-SL(K))/(SL(K+1)-SL(K)))*(Q11(K+1)-Q11(K))+Q11(K)
B=((TAMB-SL(K))/(SL(K+1)-SL(K)))*(Q12(K+1)-Q12(K))+Q12(K)
SIGMA=SQRT((A-XBAR)**2+(B-XBAR)**2)
BAND(I)=XBAR-3.*SIGMA
DO 2 I=2,13
2 BAND(I)=BAND(I-1)+SIGMA/2.
DO 3 I=1,12
3 BANMID(I)=(BAND(I)+BAND(I+1))/2.
DELTA=SSS-TAMB
DO 4 I=1,12
PD(I)=(DELTA/BANMID(I))-1.
IF (PD(I).LT.0.)PD(I)=0.0
IF (PD(I).GT.1.0)PD(I)=1.0
4 PROB=PD(I)*P(I)+PROB
IF (PROB.LE.0.)PROB=C.
RETURN
25 PROB=0.
RETURN
5 ARC=0.
RETURN
END
SUBROUTINE DINT (R,W,TT,I,J,T,RH,WW)
DIMENSION R(I,J), W(I,J), TT(I), X(100), Y(100)
C
C R(I,J) CONTAINS INDEPENDENT VARIABLES. VALUES MUST
C HAVE SMALLEST VALUE AT J=1
C W(I,J) CONTAINS DEPENDENT VARIABLES
C TT(I) IS THE PARAMETER THAT DETERMINES WHICH OF THE
C I TH CURVE OF R(I,J) AND W(I,J) TO CONSIDER
C T IS THE KNOWN PARAMETER VALUE
C RH IS THE KNOWN INDEPENDENT VARIABLE
C WW IS THE DEPENDENT VALUE TO BE SOLVED
C
IF (TT(I)-T)1,3,2
1 IF (T-TT(I))9,6,5
2 WRITE (6,17)
3 DO 4 II=1,J
X(II)=R(1,II)
4 Y(II)=W(1,II)
GOTO 8
5 WRITE (6,18)
6 DO 7 II=1,J
X(II)=R(I,II)
7 Y(II)=W(I,II)
8 CALL DVDINT (RH,WW,X,Y,J,2)
RETURN
9 L=2
10 IF (TT(L)-T)11,12,14
11 L=L+1
GOTO 10
12 DO 13 II=1,J
X(II)=R(L,II)
13 Y(II)=W(L,II)
GOTO 8
14 LL=L-1

```

```

      DO 15 II=1,J
      X(II)=R(LL,II)
15  Y(II)=W(LL,II)
      CALL DVDINT (RH,ZZ,X,Y,J,2)
      DO 16 II=1,J
      X(II)=R(L,II)
16  Y(II)=W(L,II)
      CALL DVDINT (RH,ZZ,X,Y,J,2)
      WH=Z*(ZZ-Z)*(T-TT(LL))/(TT(L)-TT(LL))
      RETURN
17  FORMAT(20H VALUE OF T TO SMALL)
18  FORMAT(20H VALUE OF T TO LARGE)
      END
      SUBROUTINE DVDINT (X,FX,XT,FT,NP,ND)
      DIMENSION XT(NP), FT(NP), TT(16)
      N=ND
      N1=(N-1)/2
      N2=N/2
      N3=NP-N2+1
      IF (NP-N) 18,1,1
1  N4=N1+2
      IF (XT(1)-XT(2)) 2,26,19
2  CONTINUE
      IF (X-2.*XT(1)+XT(2)) 15,15,3
3  IF (X-2.*XT(NP)+XT(NP-1)) 4,4,15
4  IF (NP.LT.10) GOTO 6
      N5=NP-N
5  N5=N5/2
      N6=N4+N5
      IF (XT(N6).LT.X) N4=N6
      IF (N5.GT.1) GOTO 5
6  IF (X-XT(N4)) 9,7,7
7  IF (N4-N3) 8,9,8
8  N4=N4+1
      GOTO 6
9  N4=N4-1
      N5=N4-N1
      DO 10 I=1,N
      TT(I)=FT(N5)
10 N5=N5+1
      L=(N+1)/2
      TD=TT(L)
      N6=N4
      N7=N4+1
      JU=1
      N2=N-1
      UN=1.0
      DO 14 J=1,N2
      N5=N4-N1
      N3=N-J
      DO 11 I=1,N3
      N8=N5+J
      TT(I)=(TT(I+1)-TT(I))/(XT(N8)-XT(N5))
11 N5=N5+1
      GOTO (12,13), JU
12 UN=UN*(X-XT(N6))
      JU=2
      N6=N6+1
      GOTO 14
13 UN=UN*(X-XT(N7))
      JU=1
      N7=N7+1
      L=L-1

```

```

14 TR=TR+UN*TT(L)
   FX=TP
   RETURN
15 IF (X-XT(1))16.16.17
16 TR=FT(1)
   FX=TP
   RETURN
17 TR=FT(NP)
   FX=TP
   RETURN
18 WRITE (6,27) NP,ND
   GOTO 15
19 IF (X-2.*XT(1)+XT(2))20.15.15
20 IF (X-2.*XT(NP)+XT(NP-1))15.21.21
21 IF (NP.LT.10)GOTO 23
   N5=NP-N
22 N5=N5/2
   N6=N4+N5
   IF (XT(N6).GT.X)N4=N6
   IF (N5.GT.1)GOTO 22
23 IF (X-XT(N4))24.24.9
24 IF (N4-N3)25.9.25
25 N4=N4+1
   GOTO 23
26 WRITE (6,28) XT(1)
   GOTO 15
C
27 FORMAT(21H TABLE TOO SMALL NP= ,I5.6H ND= ,I5.2X.6HDVDINT)
28 FORMAT(23H CONSTANT TABLE XT(1)= ,E14.7.2X.6HDVDINT)
   END
SUBROUTINE FLIGHT (AX,AY,AZ,VX,VY,VZ,XT,YT,ZT,DT)
  VX=VX+AX*DT
  VY=VY+AY*DT
  VZ=VZ+AZ*DT
  XT=XT+VX*DT
  YT=YT+VY*DT
  ZT=ZT+VZ*DT
  RETURN
END
SUBROUTINE FIG (B,C,ZT,Z,VALUE,FIG5)
  DIMENSION Z(6),FIG5(6.6),C(6)
  B=ABS(B)
  I=0
  DO 15 N=1,5
    IF (B.GE.C(N).AND.B.LT.C(N+1))I=N
15 CONTINUE
    IF (I.EQ.0)GOTO 20
    GOTO 30
20 CONTINUE
    GOTO 37
30 J=0
    DO 35 K=1,5
      IF (ZT.GE.Z(K).AND.ZT.LT.Z(K+1))J=K
35 CONTINUE
      IF (J.EQ.0)GOTO 20
      CALL INTER (FIG5,ZO,Z,B,C,J,I,VALUE),RETURNS(36,37)
36 RETURN
37 VALUE=0.
   RETURN
   END

```

```

SUBROUTINE INTERP(FIG5,Z0,Z,B,C,J,I,VALUE),RETURNS(M,N)
DIMENSION FIG5(6,6),C(6),Z(6)
IF (FIG5(J+1,I+1).EQ.0.)GOTO 20
IF (FIG5(J+1,I).EQ.0.)GOTO 20
SH1=FIG5(J,I+1)
SH2=FIG5(J,I)
SH3=FIG5(J+1,I+1)
SH4=FIG5(J+1,I)
B1=C(I)
B2=C(I+1)
Z1=Z(J)
Z2=Z(J+1)
B=ARS(B)
SHA=SH1+((SH2-SH1)/(B2-B1))*(B-B1)
SHB=SH3+((SH4-SH3)/(B2-B1))*(B-B1)
VALUE=(Z0/(Z1+Z2))* (SHB-SHA)+SH1
VALUE=VALUE*1000.
RETURN N
20 CONTINUE
VALUE=0.
RETURN M
END
SUBROUTINE INTERP (XX,I,J,A,N,HFTA,EL,VALUE,YX)
DIMENSION A(5,17,6),YX(17),EL(6)
IF (A(N,J+1,I+1).EQ.0.)GOTO 20
AVE=A(N,J,I)+((A(N,J+1,I)-A(N,J,I))/(YX(J+1)-YX(J)))*(XX-YX(J))
FVA=A(N,J,I+1)+((A(N,J+1,I+1)-A(N,J,I+1))/(YX(J+1)-YX(J)))*(XX-YX(
1J))
VALUE=((BETA-EL(I))/(EL(I+1)-EL(I)))*(AVE-FVA)+EVA
RETURN
20 CONTINUE
VALUE=0.
RETURN
END
SUBROUTINE ORDER (X)
DIMENSION X(5)
KK=1
DO 10 J=1,4
L=5-J
DO 10 K=1,L
IF (X(K)-X(K+1))10,10,6
6 IF (X(KK).LE.X(K))KK=K
10 CONTINUE
DO 20 JJ=1,5
IF (JJ.EQ.KK)GOTO 20
X(JJ)=X(JJ)*0.3
20 CONTINUE
RETURN
END
SUBROUTINE RELPOS(X,Y,Z,XT,YT,ZT,AX,BETA,D,VX,VY,VZ)
PIE=3.141593
XX=XT-X
YY=YT-Y
ZZ=ZT-Z
D=SQRT(XX**2+YY**2+ZZ**2)
VV=SQRT(VX**2+VY**2+VZ**2)
TT=SQRT(XT**2+YT**2+ZT**2)
IF (VV.EQ.0..OR.TT.EQ.0.)GOTO 30
AX=ACOS((VX*XT+VY*YT+VZ*ZT)/(VV*TT))
50 CONTINUE
BETA=ASIN(ZZ/D)
GOTO 15
30 AX=0.

```

```

21 IF(D.NE.0.)GOTO 50
   BETA=PIE/2.
15 CONTINUE
   RFTA=BETA*57.2957
   AX=AX*57.2957
   IF(XT.EQ.0..AND.YT.EQ.0.)WPITF (6,16)
16 FORMAT(16H TARGET OVERHEAD)
   RETURN
END
SUBROUTINE SHADOW(XX,A,BETA,EL,D,DELTAT,T,TO,FIGS,AO,PHI,W30,XT,YT
1,ZT,XO,YO,ZO,YX,C)
  DIMENSION Z(6),C(6),FIGS(6,6),EL(6),YX(17),A(5,17,6)
  DIMENSION SIG(5,10,8),AMB(5),AO(5),DELA0(5),AH(5),DO(10),AA(5)
  COMMON/DIMCOM/TABDIM (120)
  SK=(T-TO)/ALOG10(ZT/ZO)
  BT=4.*SK*(1./10.**4)
  RW=1.5*W30*COS(PHI/57.2957)*(1./10.**4)
  B=BT+RW
  CW=W30*COS(PHI/57.2957)
  IF(CW.GT.0.)GOTO 20
  IF(CW.EQ.0..AND.BT.LT.0.)GOTO 10
  IF(CW.LT.0.)GOTO 10
  GOTO 20
C   NO SHADOW REGION
10 CALL ALPHO(XX,A,BETA,FL,D,DELTAT,T,TO,ZO,ZT,FIGS,AO,YX,Z,PHI,B,C,W
630,XT,YT,XO,YO)
  RETURN
20 IF(RW.EQ.(-BT))GOTO 21
  GOTO 22
21 XXX=(-BT)/(1.5*W30*(1./10.**4))
  IF(XXX.GT.1.0.OR.XXX.LT.-1.0)GOTO 10
  PHIC=ACOS(XXX)
  PHIC=PHIC*57.2957
  IF(PHIC.LT.90..AND.PHIC.GT.270.)GOTO 10
  IF((PHI-PHIC).LT.60.)GOTO 10
22 CONTINUE
  IF(ARS(B).GT.C(6).OR,ARS(B).LT.C(1))GOTO 10
  CALL AL(XX,A,BETA,FL,D,DELTAT,T,TO,ZO,ZT,FIGS,AO,YX,Z,PHI,B,C,W30,
6XT,YT,XO,YO)
  RETURN
END
FUNCTION TAB(I,J,K,L)
  COMMON/PICOM/TABDIM (120)
  FUNCTIONAL FOR COMPUTING MULTIPLY OR N INDICES
  INDEX=I+5*(J-1+4*(K-1+3*(L-1)))
  TAB=TABDIM(INDEX)
C   I-INNER MOST INDEX---5 IS ITS NUMBER
C   J-NEXT INDEX---4 IS ITS NUMBER
C   K-NEXT INDEX---3 IS ITS NUMBER
C   L-OUTERMOST INDEX---IS COMPUTED
  RETURN
END
SUBROUTINE TABLE(N,D,BETA,RBT,BRW)
  COMMON/DIMCOM/TABDIM (120)
  IF(BETA.LT.2.)J=0
  IF(BETA.GE.2..AND.BETA.LT.3.)J=1
  IF(BETA.GE.3..AND.BETA.LT.5.)J=2
  IF(BETA.GE.5..AND.BETA.LT.7.5)J=2
  IF(BETA.GE.7.5..AND.BETA.LT.10.5)J=3
  IF(J.EQ.0)GOTO 50
  GOTO 55
50 CONTINUE
  RBT=1.0

```

```

RETURN
55 I=0
IF (D.GE.1000..AND.D.LT.1500.) I=1
IF (D.GE.1500..AND.D.LT.2000.) I=2
IF (D.GE.2000..AND.D.LT.2500.) I=2
IF (D.GE.2500..AND.D.LT.3000.) I=3
IF (D.GE.3000..AND.D.LT.3500.) I=3
IF (D.GE.3500..AND.D.LT.4000.) I=4
IF (I.EQ.0) GOTO 50
BBT=TAB(N,I,J)
BBW=TAB(N,I,J,2)
IF (TAB(N,I,J,1).EQ.1.0) GOTO 50
RETURN
END
SUBROUTINE VEG(BETA,D,AT,N,AC,E,EE)
DIMENSION AT(5),AC(5,4),E(4),EE(4)
IF (BETA.GT.E(4)) GOTO 15
NN=0
DO 10 I=1,3
IF (BETA.GE.E(I).AND.BETA.LT.E(I+1)) NN=I
10 CONTINUE
IF (NN.EQ.0) GOTO 15
C=((BETA-E(NN))/(E(NN+1)-E(NN)))*(EE(NN+1)-EE(NN))+EE(NN)
GOTO 20
15 C=0.
20 DO 30 I=1,5
30 AT(I)=AC(I,N)*C*(D/1000.)
RETURN
END
SUBROUTINE WEED(WANO,WIND,FEET,XT,YT,ZT,X,Y,Z,PHI,W30)
DATA A/57.2957/
W30=WIND/(1.+ .27*ALOG10(FEET/30.))
WX=SIN(WANO/A)
WY=COS(WANO/A)
DOT=WX*(X-XT)+WY*(Y-YT)
R=SQRT((XT-X)**2+(YT-Y)**2+(ZT-Z)**2)
PHI=ACOS(DOT/R)*A
RETURN
END

```

59.0	80.0	87.0	85.0	82.0	77.0	77.0	75.0
97.0	92.0	90.0	88.0	85.0	75.0	66.0	63.0
50.0	55.0	50.0	47.0	45.0	45.0	45.0	35.0
110.0	108.0	110.0	112.0	105.0	100.0	90.0	80.0
59.0	67.0	68.0	70.0	62.0	62.0	63.0	57.0
100.	100.	100.	100.	100.	100.	100.	100.
100.	100.	100.	100.	100.	100.	100.	100.
100.	100.	100.	100.	100.	100.	100.	100.
100.	100.	100.	100.	100.	100.	100.	100.
100.	100.	100.	100.	100.	100.	100.	100.

63.3	61.0	64.0	58.0	30.0			
35.	37.	40.	41.	38.			
0.	45.	90.	135.	180.	225.	270.	360.
.0001	.0002	.0005	.001	.002	.005		
2.	5.	10.	15.	30.	90.		
.6	.7	.8	.9	1.0	2.0	3.0	4.0
5.0	6.0	7.0	8.0	9.0	10.0	20.0	30.0
40.0							
1.	6.7						
.8	6.45						
.6	4.	7.	10.				
.4	2.8	5.0	7.0	7.0	9.0		
.15	2.0	3.6	5.0	6.4	7.8		
0.	1.3	2.3	3.2	4.1	5.0		
0.	200.	400.	600.	800.	1000.		

SDON

TASDIH(1)=-2.5,	-1.2,	0.0,	-0.5,	-1.2,
-1.5,	-1.2,	0.9,	-0.6,	-1.4,
1.0,	-1.2,	1.7,	-1.1,	1.0,
1.0,	1.0,	1.0,	-2.0,	1.0,
-0.7,	1.0,	1.0,	1.0,	1.0,
-1.0,	1.0,	1.0,	1.0,	1.0,
1.0,	1.0,	1.0,	1.0,	1.0,
1.0,	1.0,	1.0,	1.0,	1.0,
1.2,	1.0,	1.0,	1.0,	1.0,
0.2,	1.0,	1.0,	1.0,	1.0,
1.0,	1.0,	1.0,	1.0,	1.0,
1.0,	1.0,	1.0,	1.0,	1.0,
4.8,	1.2,	0.0,	2.6,	0.4,
4.4,	1.3,	0.0,	3.9,	0.0,
1.0,	0.0,	0.0,	4.4,	1.0,
1.0,	1.0,	1.0,	4.0,	1.0,
2.4,	1.0,	1.0,	1.0,	1.0,
1.5,	1.0,	1.0,	1.0,	1.0,
1.0,	1.0,	1.0,	1.0,	1.0,
1.0,	1.0,	1.0,	1.0,	1.0,
-1.7,	1.0,	1.0,	1.0,	1.0,
-1.6,	1.0,	1.0,	1.0,	1.0,
1.0,	1.0,	1.0,	1.0,	1.0,
1.0,	1.0,	1.0,	1.0,	1.0,

S

2.3	5.5	6.5	6.5	4.5
4.0	9.6	10.8	10.8	10.8
6.0	9.0	12.0	15.0	18.0
10.0	13.0	16.0	24.0	35.0
0.	2.	4.	6.	
1.0	.20	.12	.03	
0.	0.	.28	.28	.30
0.	.22	.54	.55	.62
.15	.60	1.1	1.1	1.3
.65	1.5	2.2	2.2	2.48
1.9	3.6	4.4	4.4	4.8
5.0	7.7	8.8	8.8	9.8
12.0	15.2	17.5	17.5	20.0
24.0	32.0	34.6	34.6	40.0
48.0	63.0	69.6	69.6	78.0
97.0	125.0	135.0	135.0	158.0
195.0	250.0	260.0	260.0	310.0

REFERENCES

1. Halahan, Ronald A., An Aural Detection Model for Low Flying Aircraft, AMSAA Technical Report No. 60, May 1972.
2. Sabine, H. J., Sound Propagation Near the Earth's Surface as Influenced by Weather Conditions, WADC Technical Report No. 57-353, Part IV, January 1961.
3. Sabine, H. J., Karplus, H. B., and Burkhard, M. D., Sound Propagation Near the Earth's Surface as Influenced by Weather Conditions, WADC Technical Report No. 57-353, Part II, December 1960.
4. Harris, C. M., Handbook of Noise Control, "The Loudness of Sounds," Chapter 5, McGraw-Hill Book Company, 1957.
5. Miller, George A., "Sensitivity to Changes in the Intensity of White Noise and Its Relation to Masking and Loudness," Journal of the Acoustical Society of America, Vol. 19, No. 4, March 1947.