

UNCLASSIFIED

AD NUMBER

AD805290

LIMITATION CHANGES

TO:

Approved for public release; distribution is unlimited.

FROM:

Distribution authorized to U.S. Gov't. agencies and their contractors;
Administrative/Operational Use; SEP 1966. Other requests shall be referred to Air Force Flight Dynamics Lab., Wright-Patterson AFB, OH 45433.

AUTHORITY

AFFDL ltr 29 Dec 1971

THIS PAGE IS UNCLASSIFIED

AFFDL-TR-68-43
PART IX

805290

AIRCRAFT GROUND-FLOTATION INVESTIGATION

PART IX — DATA REPORT ON TEST SECTION 8

A. RUTLEDGE and W. HILL, JR.

U. S. ARMY ENGINEER WATERWAYS EXPERIMENT STATION

TECHNICAL REPORT AFFDL-TR-68-43, PART IX

SEPTEMBER 1968

This document is subject to special export controls and each transmittal to foreign governments or foreign nationals may be made only with prior approval of the Air Force Flight Dynamics Laboratory (FDFM), Wright-Patterson AFB, Ohio, 45433.

AIR FORCE FLIGHT DYNAMICS LABORATORY
RESEARCH AND TECHNOLOGY DIVISION
AIR FORCE SYSTEMS COMMAND
WRIGHT-PATTERSON AIR FORCE BASE, OHIO

AIRCRAFT GROUND-FLOTATION INVESTIGATION

PART IX — DATA REPORT ON TEST SECTION 8

A. RUTLEDGE and W. HILL, JR.

This document is subject to special export controls and each transmittal to foreign governments or foreign nationals may be made only with prior approval of the Air Force Flight Dynamics Laboratory (FFDL), Wright-Patterson AFB, Ohio, 45433.

FOREWORD

The investigation described herein constitutes one phase of studies conducted during 1964 and 1965 at the U. S. Army Engineer Waterways Experiment Station (WES) under U. S. Air Force Project No. 410-A, MIPR No. AS-4-177, "Development of Landing Gear Design Criteria for the CX-HLS Aircraft." (The CX-HLS is now designated C-5A.) This program was sponsored and directed by the Landing Gear Group, Air Force Flight Dynamics Laboratory, Research and Technology Division, Mr. R. J. Parker, Project Engineer.

These tests were conducted by personnel of the WES Flexible Pavement Branch, Soils Division, under the general supervision of Messrs. W. J. Turnbull, A. A. Maxwell, and R. G. Ahlvin and the direct supervision of Mr. D. N. Brown. Other personnel actively engaged in this study were Messrs. C. D. Burns, D. M. Ladd, W. N. Brabston, H. H. Ulery, Jr., A. J. Smith, Jr., W. J. Hill, Jr., and A. H. Rutledge. This report was prepared by Messrs. Rutledge and Hill.

Directors of WES during the conduct of this investigation and preparation of this report were Col. Alex G. Sutton, Jr., CE, and Col. John R. Oswalt, Jr., CE. Technical Director was Mr. J. B. Tiffany.

Publication of this technical documentary report does not constitute Air Force approval of the report's findings or conclusions. It is published only for the exchange and stimulation of ideas.



KENNERLY H. DIGGES
Chief, Mechanical Branch
Vehicle Equipment Division
AF Flight Dynamics Laboratory

ABSTRACT

This data report describes work undertaken as part of an overall program to develop ground-flotation criteria for the C-5A aircraft. A test section was constructed to a width adequate for four unsurfaced test lanes. One of these lanes had not failed at a high coverage level; therefore, traffic was suspended and recommenced with an increased tire inflation pressure giving a total of five test lanes in this group. Traffic was applied to all test lanes using the same single-wheel tracking assembly with 25,000-lb load, with only the tire inflation pressure varied. The wheel assembly consisted of a single 25.00x23, 30-ply aircraft tire with inflation pressures of 25, 40, 60, 80, and 100 psi for different test lanes.

The information reported herein includes layout of the test lanes, tire characteristics, tire-print dimensions, and data collected on soil strengths, surface deformations and deflections, and drawbar pull. The traffic-coverage level is given at which each test lane was considered failed.

CONTENTS

	<u>Page</u>
SECTION I: INTRODUCTION	1
SECTION II: DESCRIPTION OF TEST SECTION AND LOAD VEHICLE.	2
Description of Test Section.	2
Load Vehicle	2
SECTION III: APPLICATION OF TRAFFIC, FAILURE CRITERIA, AND DATA COLLECTED	3
Application of Traffic	3
Failure Criteria and Data Collected.	3
SECTION IV: BEHAVIOR OF LANES UNDER TRAFFIC AND TEST RESULTS.	5
Lane 17.	5
Lane 17A	5
Lane 18.	6
Lane 19.	7
Lane 20.	8
SECTION V: PRINCIPAL FINDINGS	9

ILLUSTRATIONS AND TABLES

<u>Figure</u>	<u>Page</u>
1. Test load vehicle	13
2. Lane 17 prior to traffic	13
3. Lane 17, general view showing transverse straightedge measurement at 200 coverages when traffic was suspended (no failure)	14
4. Lane 17A, general view showing transverse straightedge measurement at 8 passes (failure; approximately 3 coverages)	14
5. Lane 18 prior to traffic	15
6. Lane 18, general view showing transverse straightedge measurement at 30 coverages (failure)	15
7. Lane 19 prior to traffic	16
8. Lane 19, general view at 150 coverages (failure)	16
9. Lane 20 prior to traffic	17
10. Lane 20, general view showing transverse straightedge measurement at 20 coverages (failure)	17
11. Layout of Test Section 8 and summary of test results	18
12. Tire-print dimensions and tire characteristics	19
13. Traffic distribution patterns	20
14. Average cross-sectional deformations	21
15. Permanent profile deformations	22
16. Average total soil deflections	23

Table

1. Summary of Traffic Data, Test Section 8	11
2. Summary of CBR, Density, and Water Content Data, Test Section 8	12

SUMMARY

Tests on Section 8 are one phase of a comprehensive research program to develop ground-flotation criteria for heavy cargo-type aircraft. Test Section 8 initially consisted of four similar traffic lanes (lanes 17, 18, 19, and 20) all of which were unsurfaced and constructed to approximately the same subgrade CBR value (figure 11).

The same single-wheel tracking assembly loaded to 25,000 lb was applied to each test lane with only the tire inflation pressure varied. A 25.00x28, 30-ply aircraft tire was used on the load vehicle. Tire-print dimensions and pertinent tire characteristics are given in figure 12 for each inflation pressure used. When trafficking lane 17 to a high coverage level with the designated tire inflation pressure produced no significant damage to the test surface, the lane was redesignated 17A and the tire pressure increased for trafficking the lane to failure. Each lane, with the exception of lane 17, was trafficked with the 25,000-lb load and designated tire inflation pressure until failure occurred in accordance with the criteria set forth in Part I of this report. Data were recorded at intervals throughout testing to give a behavior history of each lane.

Using the same test load and wheel assembly over similar traffic lanes with only the tire inflation pressure varied, a comparison of trafficking effects was obtained for the five tire pressures tested. Basic performance data are summarized in the following paragraphs.

Lane 17

Lane 17 was trafficked with a tire having an inflation pressure of 25 psi. The lane was still in a good condition when traffic was suspended at 200 coverages (figure 3). The rated CBR for the lane was 3.9.

Lane 17A

Lane 17, after suspension of traffic at 200 coverages, was redesignated 17A for trafficking with the tire inflation pressure increased

to 100 psi. Lane 17A was considered failed due to excessive transverse differential deformations after eight passes (approximately 3 coverages) of the load vehicle (figure 4). The rated CBR for the lane was 3.9.

Lane 18

Lane 18 was trafficked with a tire having an inflation pressure of 60 psi. The lane was considered failed due to excessive transverse differential deformations at 30 coverages (figure 6). The rated CBR for the lane was 4.6.

Lane 19

Lane 19 was trafficked with a tire having an inflation pressure of 40 psi. The lane was considered failed due to excessive transverse differential deformations at 150 coverages (figure 8). The rated CBR for the lane was 4.7.

Lane 20

Lane 20 was trafficked with a tire having an inflation pressure of 80 psi. The lane was considered failed due to excessive transverse differential deformations at 20 coverages (figure 10). The rated CBR for the lane was 5.0.

AIRCRAFT GROUND-FLOTATION INVESTIGATION

PART IX DATA REPORT ON TEST SECTION 8

SECTION I: INTRODUCTION

The investigation reported herein is one phase of a comprehensive research program being conducted at the U. S. Army Engineer Waterways Experiment Station (WES), Vicksburg, Miss., as part of U. S. Air Force Project No. 410-A, MIPR No. AS-4-177, to develop ground-flotation criteria for the C-5A, a heavy cargo-type aircraft. Specifically, the tests reported herein were conducted to determine the effect of tire inflation pressure of single-wheel landing-gear assemblies on unsurfaced soils under identical conditions of loading.

Prosecution of this investigation consisted of constructing similar test lanes and subjecting them to traffic of a 25,000-lb single-wheel load, with the tire inflation pressure varied for each lane. This report presents a description of the test section and wheel assembly, and gives results of traffic. Equipment used, types of data and method of recording them, and general test criteria are summarized herein and further explained and illustrated in Part I of this report.

SECTION II: DESCRIPTION OF TEST SECTION AND LOAD VEHICLE

Description of Test Section

Test Section 8 (figure 11) was constructed within a roofed area in order to allow control of the subgrade CBR (California Bearing Ratio) in the test lanes. Section 8 was located on the same site as Test Sections 7, 5, and 3 in this series; the construction is described in Part IV. The underlying subgrade was undisturbed by the prior tests on the site so that in construction of Section 8 only the upper 18 in. of soil was excavated. The excavated area was backfilled to the original grade level with a heavy clay soil (buckshot; classified as CH according to the Unified Soil Classification System, MIL-STD-619). The fill material was a local clay with a plastic limit of 27, liquid limit of 58, and plasticity index of 31. Gradation and classification data for the subgrade material are given in Part I.

Four unsurfaced traffic lanes having approximately the same subgrade CBR values were constructed in the test section. (One test lane did not fail at a high coverage level, and traffic was suspended and recommenced with a different tire inflation pressure. The lane was renumbered, thereby giving a total of five test lanes on the section.)

Load Vehicle

The load vehicle used for trafficking test lanes in Section 8 is shown in figure 1. Load cart construction, details of linkage between the load compartment and prime mover, and method of applying load are explained in Part I. For trafficking lanes 17, 17A, 18, 19, and 20, a 25,000-lb single-wheel load was used with the tracking tire inflated to 25, 100, 60, 40, and 80 psi, respectively. A 25.00x28, 30-ply aircraft tire was used on the assembly. Tire-print dimensions and pertinent tire characteristics are shown in figure 12.

SECTION III: APPLICATION OF TRAFFIC, FAILURE CRITERIA, AND DATA COLLECTED

Application of Traffic

Traffic was applied to the test lanes in a nonuniform pattern with intensity of traffic being varied within each lane to produce three zones of approximately 100, 80, and 20 percent traffic coverage. Traffic so distributed within a traffic lane simulates as nearly as feasible the bell-shaped traffic distribution curve which results from the wander of aircraft from the lane center line. The coverage levels referred to in the tables and text of this data report are the total number of coverages applied to the 100 percent coverage zone. The corresponding number of coverages applied to the outer traffic zones is proportional to the percentage factor for the respective zones, as shown in figure 13.

Failure Criteria and Data Collected

Failure criteria used in this investigation and descriptive terms used in presentation and discussion of data in all parts of this series are presented in Part I. A general outline of types of data collected is given in the following paragraphs. Details on apparatus and procedure for obtaining specific measurements are given in Part I.

CBR, water content, and dry density

CBR, water content, and dry density of the subgrade were measured for each test lane prior to application of traffic, at intermediate coverage levels, and at failure or suspension of traffic if no failure condition was reached. After traffic was concluded on a lane, a measure of subgrade strength termed "rated CBR" was determined. Rated CBR is generally the average CBR value obtained from all the determinations made in the top 12 in. of soil during the test life of a lane. In certain instances, extreme or irregular values may be ignored if the analyst decides that they are not properly representative.

Surface roughness, or differential deformation

Surface roughness, or differential deformation, measurements were made using a 10-ft straightedge at various traffic-coverage levels on each lane. Rut depths were also measured.

Deformations

Deformations, defined as permanent cumulative surface changes in

cross section or profile of a lane, were charted by means of level readings at pertinent traffic-coverage levels.

Deflection

Deflection of the test surface under an individual static load of the tracking assembly was measured at various traffic-coverage levels. Level readings on the lane surface on each side of the load wheel and on a pin and cap device directly beneath the load wheel provided deflection data. Both total (for a single loading) and elastic (recoverable) deflections were measured.

Rolling resistance

Rolling resistance, or drawbar pull, measurements were performed with the load vehicle over each test lane at designated coverage levels. Three types of drawbar measurements were taken: (a) maximum force required to overcome static inertia and commence forward movement of the load cart, termed "initial DBP"; (b) average force required to maintain a constant speed once the load vehicle is in motion, termed "rolling DBP"; and (c) maximum force obtained during the constant speed run, termed "peak DBP."

SECTION IV: BEHAVIOR OF LANES UNDER TRAFFIC AND TEST RESULTS

Lane 17

Behavior of lane under traffic

Figure 2 shows lane 17 prior to traffic. The lane held up well under traffic, and no signs of failure were evident when traffic was suspended at 200 coverages (figure 3). The rated CBR for the lane was 3.9.

Test results

Results of trafficking lane 17 are summarized in table 1. Soil test data are given in table 2. The following information was obtained from traffic tests on lane 17.

- a. Roughness. Table 1 shows the development of small differential deformations during testing. When traffic was suspended at 200 coverages, the average transverse differential deformation was 1.29 in. No significant rutting was noted in the lane.
- b. Deformation. Figure 14 shows average cross-section deformations at 20 and 200 coverages. Profile plots are shown in figure 15 for the same coverage levels. The profile plots illustrate the general settlement along the lane length.
- c. Deflection. Average total soil deflections measured at 0, 20, and 200 coverages are shown in figure 16. Deflections increased consistently with traffic coverages. As shown in table 1, elastic soil deflections showed a similar increase.
- d. Rolling resistance. Drawbar pull values are given in table 1. Highest values were recorded during 0-coverage measurements except for rolling drawbar pull which increased slightly with traffic.

Lane 17A

Behavior of lane under traffic

Since lane 17 was essentially undamaged after 200 coverages, the lane was redesignated 17A for further trafficking with tire inflation pressure increased from 25 psi to 100 psi.

Lane 17A prior to trafficking with a tire inflated to 100 psi is shown in figure 3. Severe damage to the lane surface occurred during

preliminary passes of the load vehicle in the process of recording drawbar and deflection data. The lane was considered failed due to excessive transverse differential deformations after eight passes (approximately 3 coverages; figure 4). The rated CBR for the lane was 3.9.

Test results

The effect on the lane surface of preliminary passes of the load vehicle is shown in table 1. Soil test data given in table 2 for lane 17 at 200 coverages also apply to lane 17A at the 0-coverage level. Table 1 shows drawbar pull values for the load vehicle operated over an asphalt-paved strip for comparison with drawbar pull values recorded on the test lane. The following information was obtained from traffic tests on lane 17A.

- a. Roughness. Table 1 shows the differential deformations and ruts that developed with a few passes of the load vehicle. Average transverse and diagonal differential deformations reached 3.43 and 3.50 in., respectively, at eight passes. Rut depths averaged 2.0 in.
- b. Deformation. Figure 14 shows average cross-section deformations at eight passes of the load vehicle. A profile plot in figure 15 shows the highly irregular surface that developed along the length of the lane.
- c. Deflection. Average total soil deflection at eight passes is shown in figure 16. Elastic soil deflection was 0.8 in. (see table 1).
- d. Rolling resistance. Drawbar pull values at 0 coverages are given in table 1.

Lane 18

Behavior of lane under traffic

Figure 5 shows lane 18 prior to traffic. The lane was considered failed at 30 coverages due to excessive differential deformations and rutting (figure 6). The rated CBR for the lane was 4.6.

Test results

Results of trafficking lane 18 are summarized in table 1. Soil test data are given in table 2. Table 1 contains drawbar pull values for the load vehicle operated over an asphalt-paved strip for comparison with drawbar values recorded on the test lane. The following information was obtained from traffic tests on lane 18.

- a. Roughness. Table 1 shows the progressive development of differential deformations and rut depths with trafficking. A large increase in rut depth occurred between 20 and 30 coverages with an average value of 4.62 in. at failure.
- b. Deformation. Figure 14 shows average cross-section deformations at 20 and 30 coverages. The badly rutted area near the lane center line is evident. Profile deformations at 20 and 30 coverages in figure 15 show progressive settlement along the lane center line.
- c. Deflection. Average total soil deflections at 0, 20, and 30 coverages are shown in figure 16. Consistent increases in total deflection occurred with increased coverages. Elastic soil deflections (see table 1) increased steadily with trafficking and measured 2.1 in. at 30 coverages.
- d. Rolling resistance. Drawbar pull values are given in table 1. Rolling drawbar pull values decreased slightly during the final 10 coverages while increases were measured for initial and peak drawbar pull.

Lane 19

Behavior of lane under traffic

Figure 7 shows lane 19 prior to traffic. The lane sustained traffic to the 150-coverage level when it was considered failed due to excessive differential deformations (figure 8). The rated CBR for the lane was 4.7.

Test results

Results of trafficking lane 19 are summarized in table 1. Soil test data are given in table 2. Table 1 contains drawbar pull values for the load vehicle operated over an asphalt-paved strip for comparison with drawbar values recorded on the test lane. The following information was obtained from traffic tests on lane 19.

- a. Roughness. Table 1 shows the progressive development of differential deformations and rut depths with trafficking. Transverse and diagonal differential deformations were primary contributors to lane roughness as rut depths did not exceed 2.0 in. at failure.
- b. Deformation. Figure 14 shows average cross-section deformations at 20 and 150 coverages. Profile deformations at the same coverage levels are presented in figure 15 and show the longitudinal settlement that accompanied trafficking.

- c. Deflection. Average total soil deflections at 0, 20, and 150 coverages are shown in figure 16. Small but consistent increases in total deflection were measured at higher traffic coverages. Elastic soil deflections (shown in table 1) were essentially unchanged with trafficking.
- d. Rolling resistance. Drawbar pull values are given in table 1. Rolling and peak drawbar values were unchanged with trafficking and initial drawbar pull varied only slightly, registering a minimum at 150 coverages.

Lane 20

Behavior of lane under traffic

Figure 9 shows lane 20 prior to traffic. The lane deformed readily under traffic and was considered failed due to excessive differential deformations at 20 coverages (figure 10). The rated CBR for the lane was 5.0.

Test results

Results of trafficking lane 20 are summarized in table 1. Soil test data are given in table 2. Table 1 contains drawbar pull values for the load vehicle operated over an asphalt-paved strip for comparison with drawbar values recorded on the test lane. The following information was obtained from traffic tests on lane 20.

- a. Roughness. Table 1 shows the differential deformations and rut depths measured at 20 coverages. Transverse and diagonal differential deformations were severe and constituted the principal factors in failure of the lane. Rut depths did not exceed 3.0 in. at failure.
- b. Deformation. Figure 14 which shows average cross-section deformations at 20 coverages illustrates the severe deformation at the center line of the cross section. The center-line profile deformation plot shown in figure 15 reflects the longitudinal settlement that occurred with trafficking.
- c. Deflection. Average total soil deflections at 0 and 20 coverages are shown in figure 16. Total deflection at 20 coverages was greatest with an average of 1.9 in. Elastic soil deflections increased significantly from 0.5 in. at 0 coverages to 1.2 in. at 20 coverages (see table 1).
- d. Rolling resistance. Drawbar pull values, presented in table 1, showed little change with trafficking.

SECTION V: PRINCIPAL FINDINGS

From the foregoing discussion, the principal findings relating test load, wheel assembly, tire inflation pressure, subgrade CBR, and traffic coverages are as follows:

<u>Load, Wheel Assembly, and Tire Pressure</u>	<u>Rated Subgrade CBR*</u>	<u>Coverages At Failure</u>
25,000-lb load; single-wheel assembly; 25.00x28, 30-ply tire at 25-psi inflation pressure	3.9	No failure at 200 coverages; traffic suspended
25,000-lb load; single-wheel assembly; 25.00x28, 30-ply tire at 100-psi inflation pressure	3.9	8 passes (approximately 3 coverages)
25,000-lb load; single-wheel assembly; 25.00x28, 30-ply tire at 60-psi inflation pressure	4.6	30
25,000-lb load; single-wheel assembly; 25.00x28, 30-ply tire at 40-psi inflation pressure	4.7	150
25,000-lb load; single-wheel assembly; 25.00x28, 30-ply tire at 80-psi inflation pressure	5.0	20

* All test lanes were unsurfaced.

TABLE 1
SUMMARY OF TRAFFIC DATA, TEST SECTION 8

Test Lane	Tire Inflation Pressure (psi)	Rated CBR	Traffic Coverages	Differential Deformation (in.)						Rotting (in.)		Drawbar Pull (kips)		Subgrade Deflection at Center Line of Assembly (in.)		Remarks	
				Longitudinal		Transverse		Diagonal		Max	Avg	Initial	Peak	Rolling	Total		Elastic
				Max	Avg	Max	Avg	Max	Avg								
17	25	3.9	0	--	--	--	--	--	--	--	4.6	3.2	0.7	0.4	0.3	Traffic suspended at 200 coverages; no failure	
			20	0.75	0.60	1.38	1.19	1.25	1.16	--	3.5	0.8	0.3	0.6	0.4		
			200	1.13	0.91	1.38	1.29	1.50	1.25	--	3.5	1.7	0.9	0.8	0.6		
Asphalt strip	25	--	--	--	--	--	--	--	--	--	2.2	--	--	--	--		
17A	100	3.9	0	--	--	--	--	--	--	--	5.2	3.6	1.6	2.2	0.8	Lane failed due to excessive transverse differential deformation at 8 passes (approximately 3 coverages)	
			8 passes	1.13	0.60	3.75	3.43	4.00	3.50	2.00	--	--	--	--	--		
Asphalt strip	100	--	--	--	--	--	--	--	--	--	3.3	2.5	0.2	--	--		
18	60	4.6	0	--	--	--	--	--	--	--	4.2	2.4	1.2	0.7	0.7	Lane failed due to excessive transverse differential deformation at 30 coverages	
			20	0.38	0.28	4.13	2.88	4.00	3.07	2.50	4.1	2.4	1.6	2.1	1.2		
			30	0.75	0.63	5.00	4.25	4.75	4.47	5.50	6.3	3.1	1.3	2.8	2.1		
Asphalt strip	60	--	--	--	--	--	--	--	--	--	5.3	3.7	1.2	--	--		
19	40	4.7	0	--	--	--	--	--	--	--	3.8	3.1	0.7	1.0	0.6	Lane failed due to excessive transverse differential deformation at 150 coverages	
			20	0.88	0.47	3.00	2.44	2.98	2.44	1.38	4.4	3.2	0.7	1.1	0.6		
			150	2.50	2.00	5.50	4.88	6.50	5.69	2.00	3.4	3.1	0.7	1.2	0.7		
Asphalt strip	40	--	--	--	--	--	--	--	--	--	2.5	1.5	0.5	--	--		
20	30	5.0	0	--	--	--	--	--	--	--	4.6	3.7	1.5	1.4	0.5	Lane failed due to excessive transverse differential deformation at 20 coverages	
			20	0.50	0.47	8.75	6.75	6.36	6.91	3.00	4.5	3.1	1.3	1.9	1.2		
Asphalt strip	30	--	--	--	--	--	--	--	--	--	2.9	1.7	0.5	--	--		

Note: A 25-kip load on a single-wheel assembly was used for trafficking all test lanes. In all tests, 25.00x28, 30-ply tires were used. All test lanes were uncurfaced.

TABLE 2

SUMMARY OF CBR, DENSITY, AND WATER CONTENT DATA, TEST SECTION 8

<u>Lane No.*</u>	<u>Traffic Coverages</u>	<u>Depth (in.)</u>	<u>CBR</u>	<u>Water Content (%)</u>	<u>Dry Density (lb/cu ft)</u>	
17	0	0	4.0	27.6	91.9	
		6	4.1	28.4	93.8	
		12	3.5	28.4	90.2	
		18	3.1	29.1	89.4	
	200	0	3.0	28.3	91.9	
		6	5.3	27.0	93.8	
		12	3.6	27.0	91.2	
		18	2.6	29.3	90.1	
	17A	200	Same values as measured for Lane 17			
	18	0	0	4.0	27.6	91.9
6			4.1	28.4	93.8	
12			3.5	28.4	90.2	
18			3.1	29.1	89.4	
30		0	5.1	28.3	92.1	
		6	5.7	28.1	93.0	
		12	5.2	28.0	90.8	
		18	2.9	31.8	87.0	
19		0	0	3.4	27.9	92.1
			6	5.1	26.5	92.3
	12		5.7	27.4	91.8	
	18		3.6	28.4	91.3	
	150	0	4.5	27.4	92.9	
		6	4.6	27.1	92.4	
		12	4.6	27.1	92.0	
		18	2.2	32.2	85.3	
	20	0	0	3.4	27.9	92.1
			6	5.1	26.5	92.3
12			5.7	27.4	91.8	
18			5.6	28.4	91.3	
20		0	4.4	28.5	92.6	
		6	5.5	27.1	94.5	
		12	5.9	27.8	90.9	
		18	1.8	32.4	87.1	

Note: Coverage-failure information given in remarks column in table 1.

* All test lanes were unsurfaced. Subgrade material was heavy clay (buckshot; classified as CH).



Figure 1. Test load vehicle

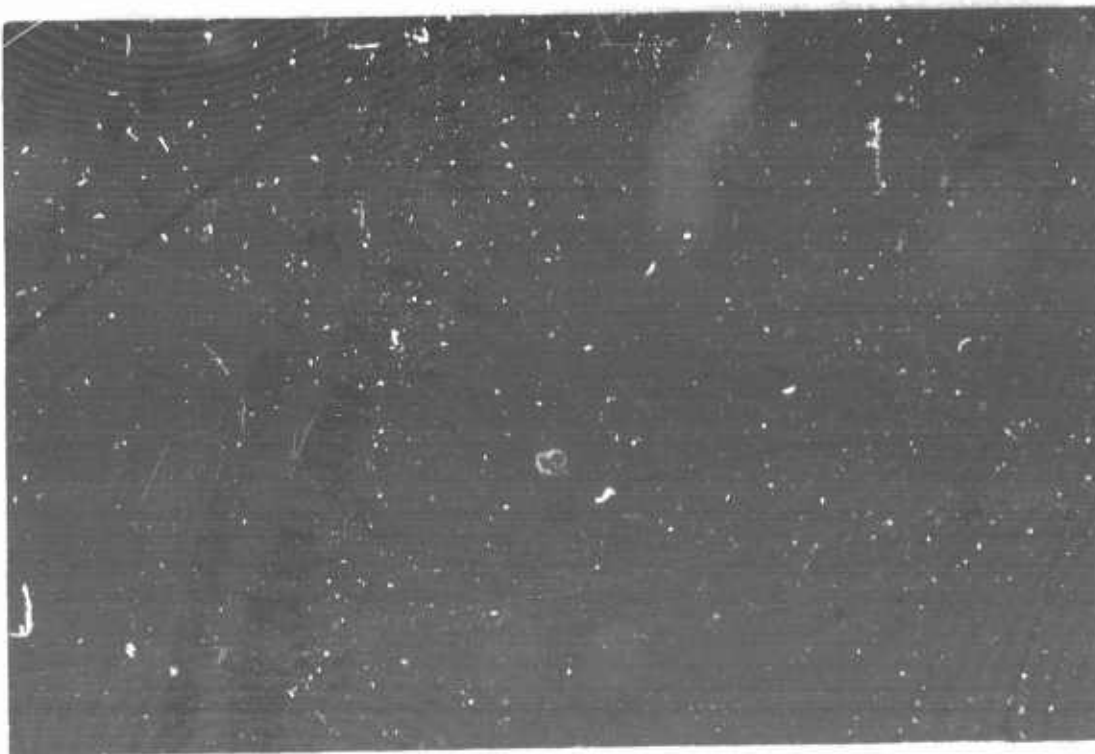


Figure 2. Lane 17 prior to traffic

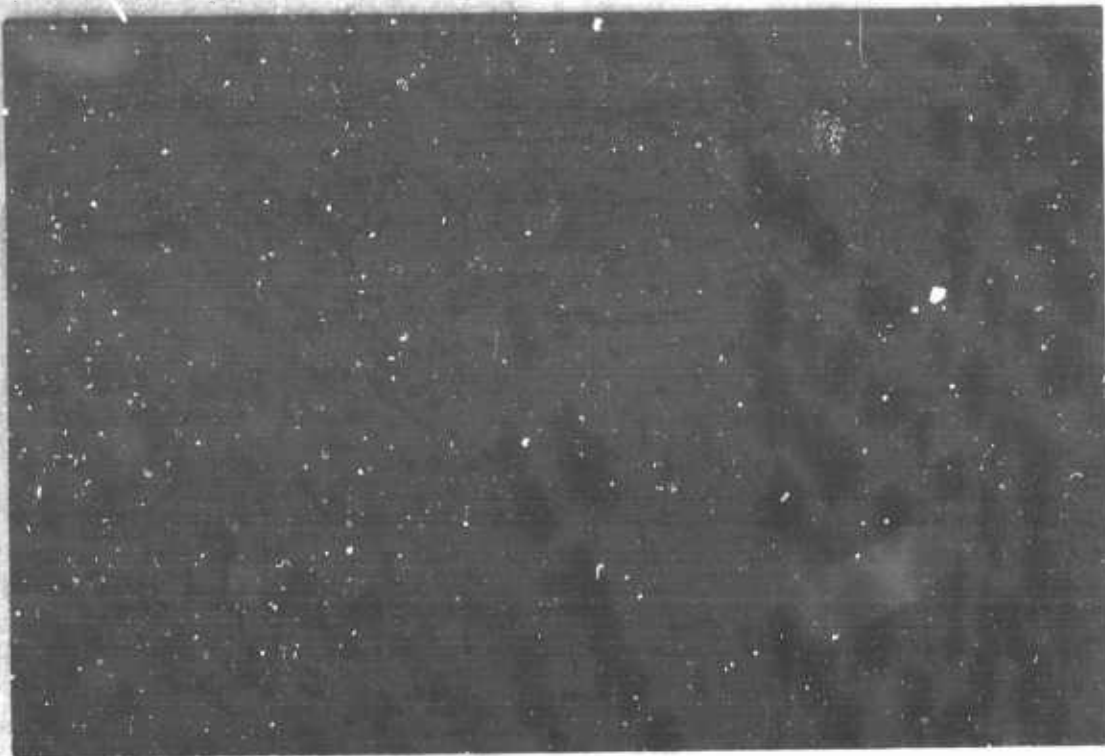


Figure 3. Lane 17, general view showing transverse straightedge measurement at 200 coverages when traffic was suspended (no failure)



Figure 4. Lane 17A, general view showing transverse straightedge measurement at 8 passes (failure; approximately 3 coverages)



Figure 5. Lane 18 prior to traffic



Figure 6. Lane 18, general view showing transverse straightedge measurement at 30 coverages (failure)



Figure 7. Lane 19 prior to traffic

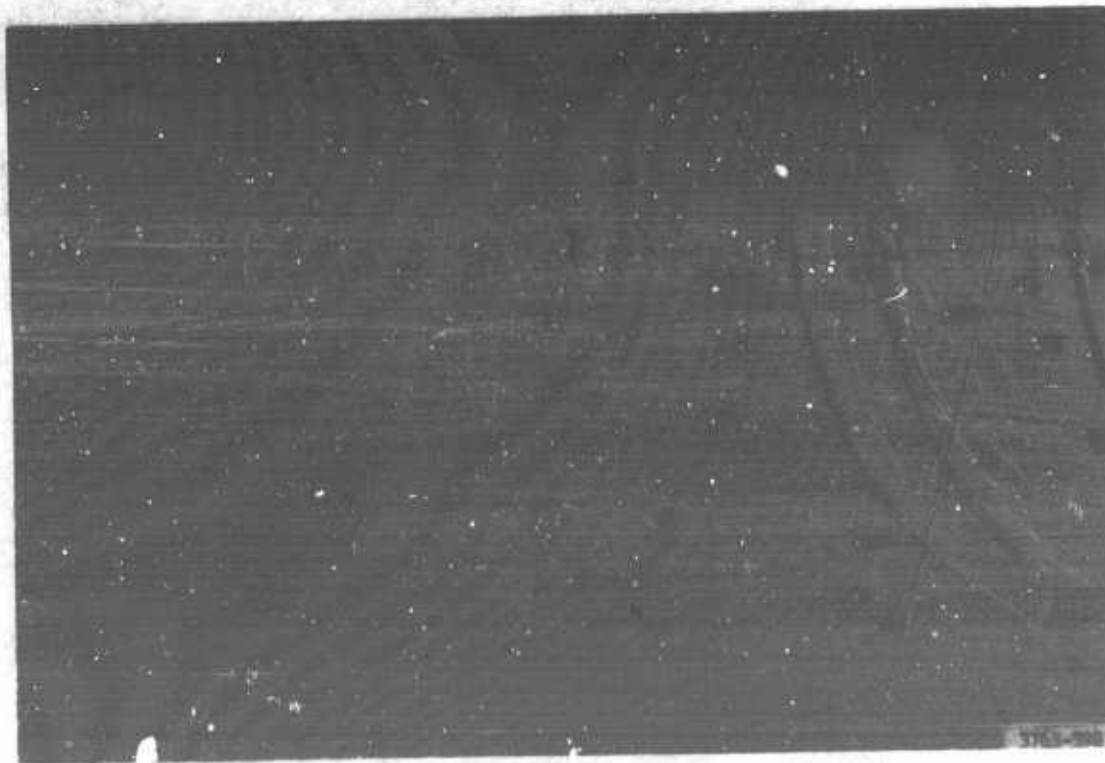


Figure 8. Lane 19, general view at 150 coverages (failure)

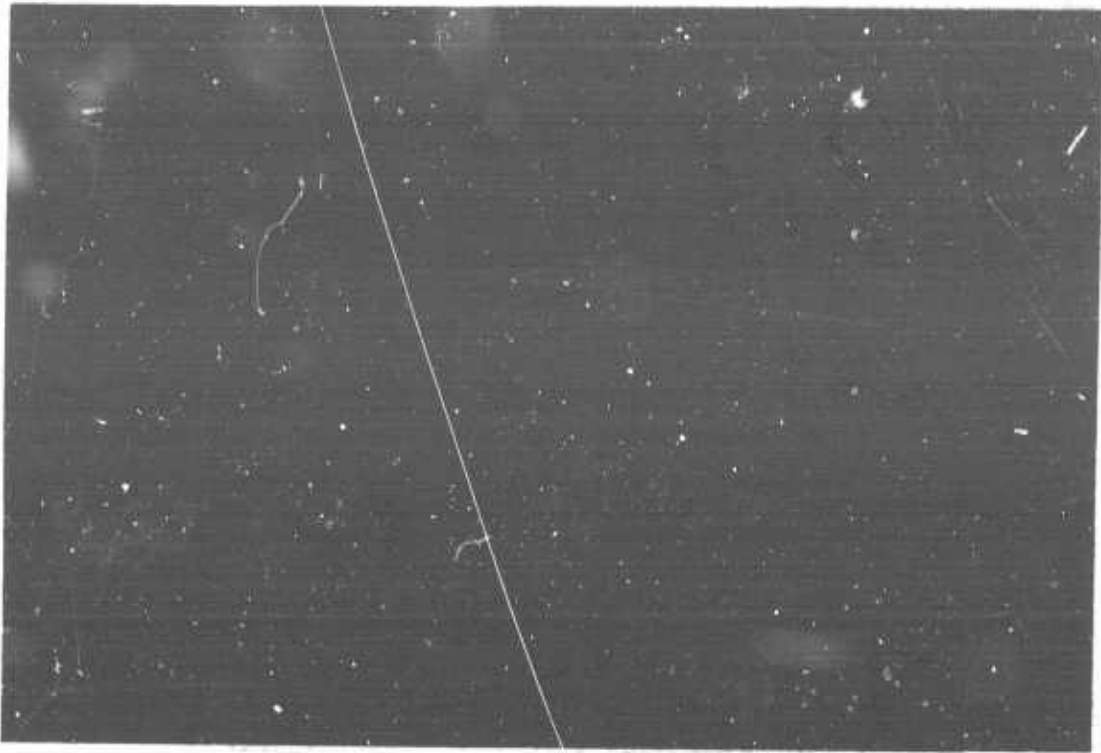


Figure 9. Lane 20 prior to traffic

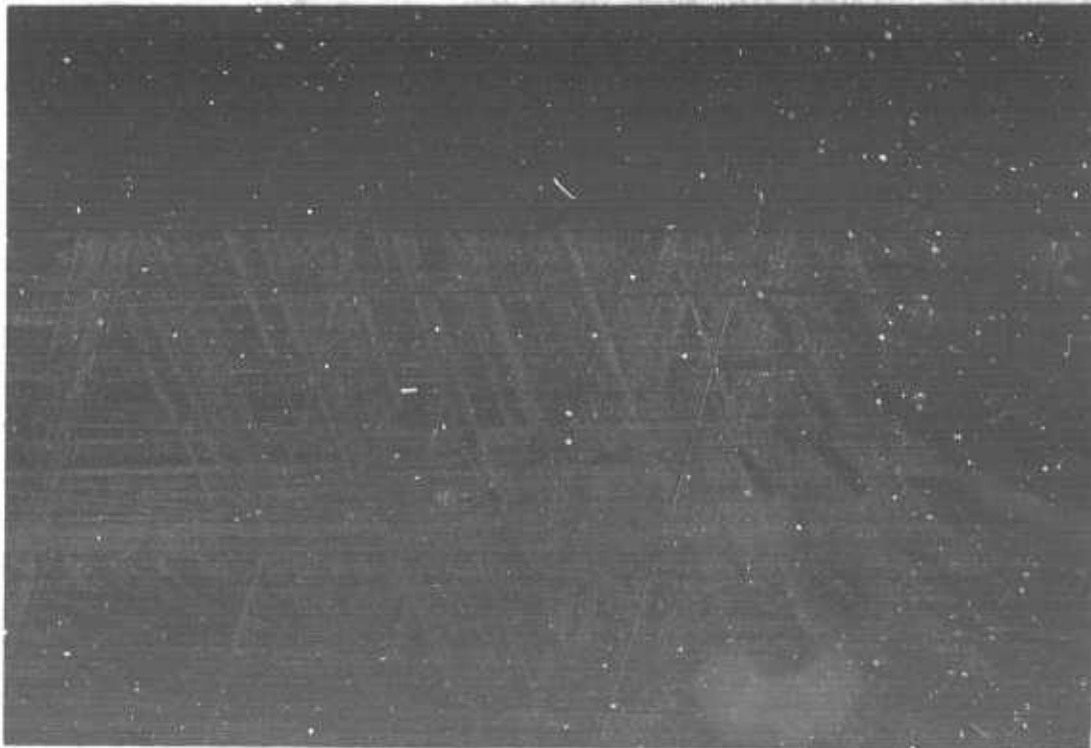


Figure 10. Lane 20, general view showing transverse straightedge measurement at 20 coverages (failure)

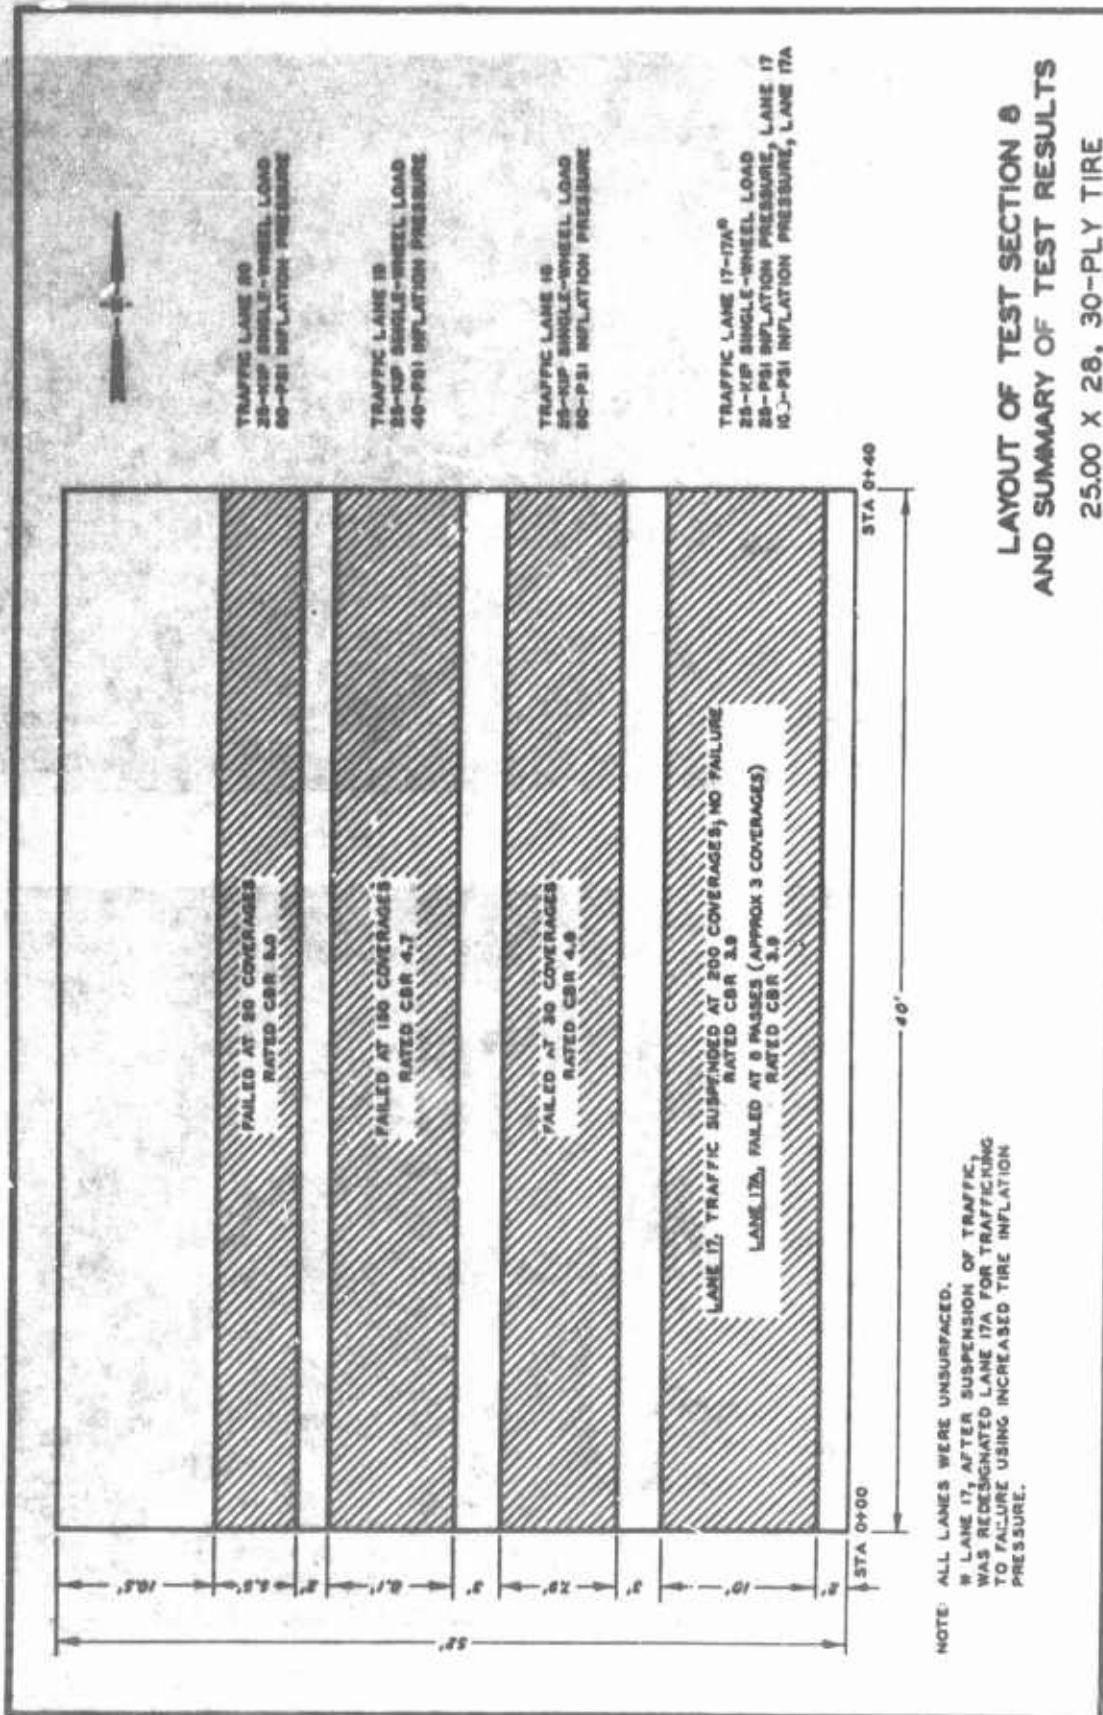


Figure 11



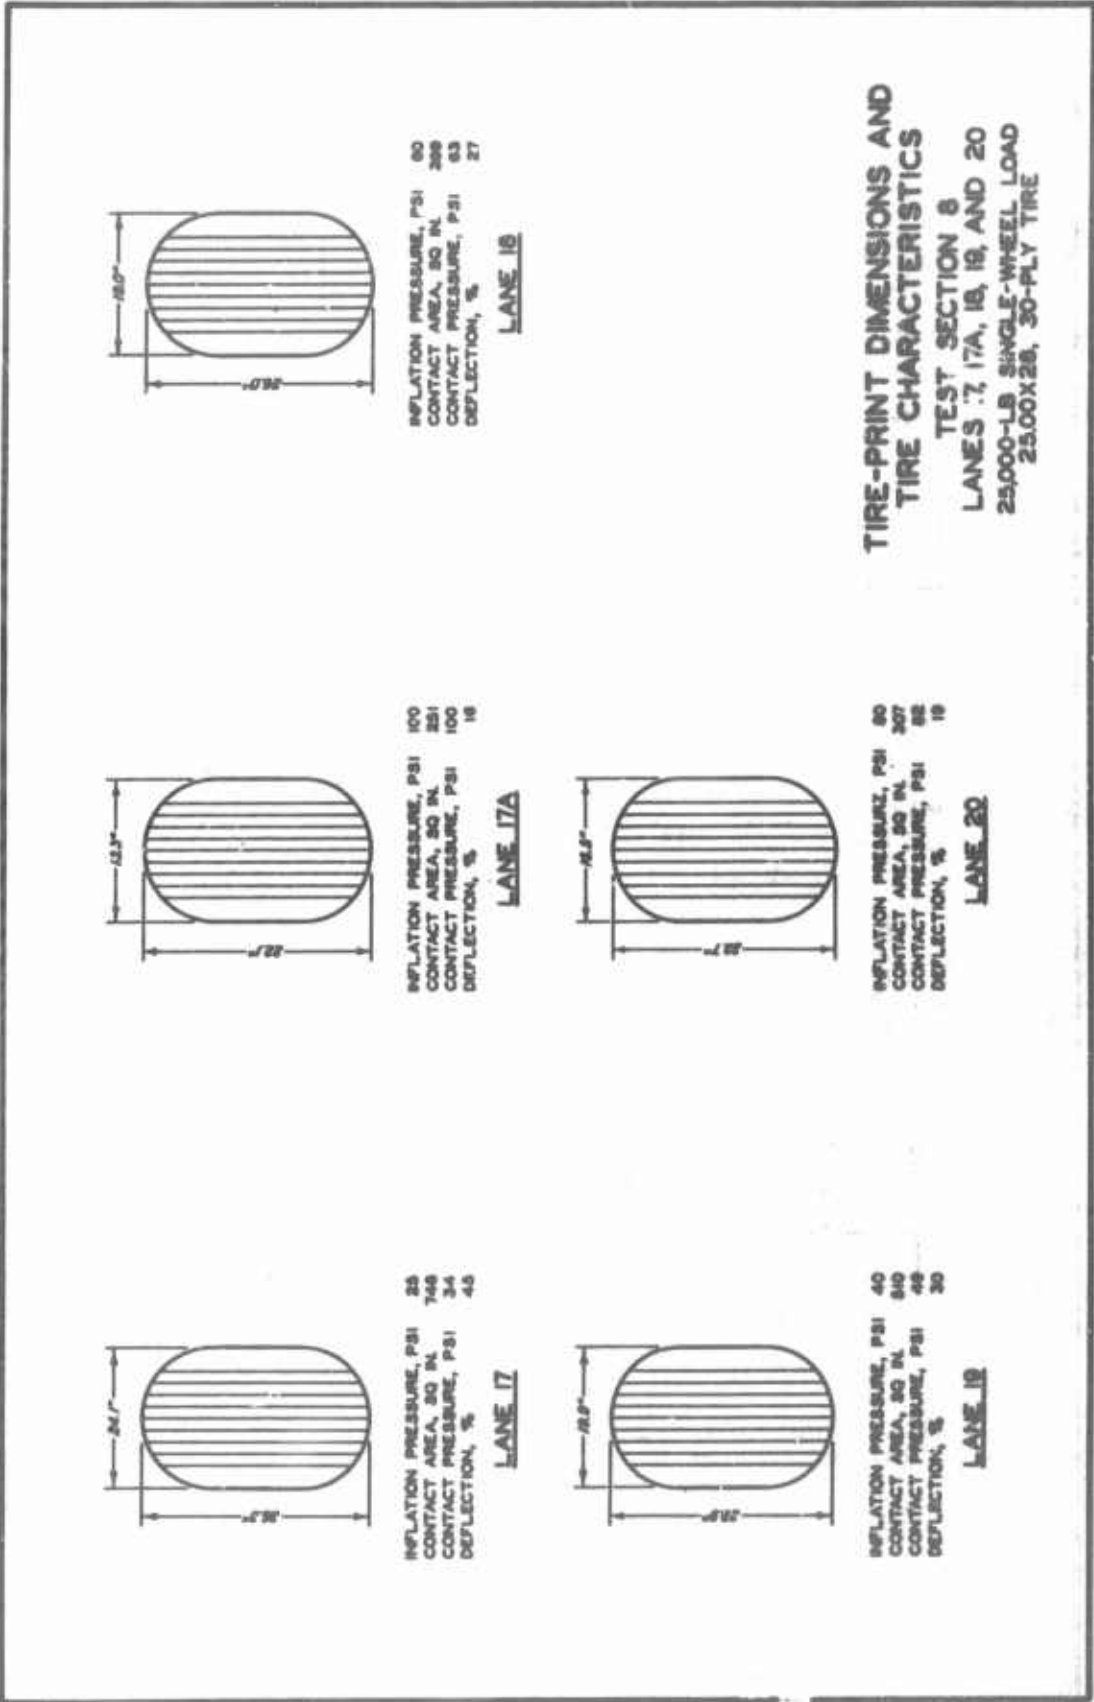



Figure 12

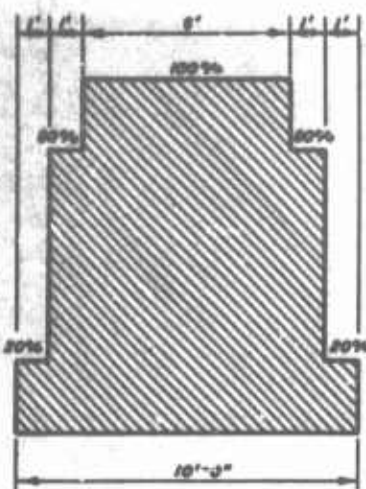


LANE 17-17A

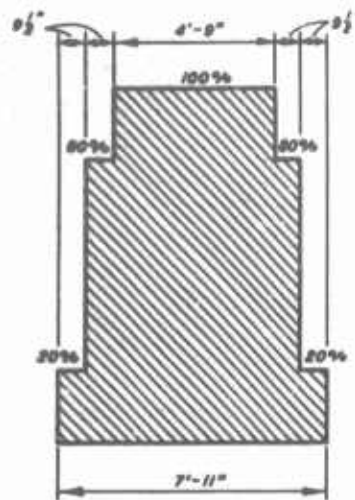

LANE 18

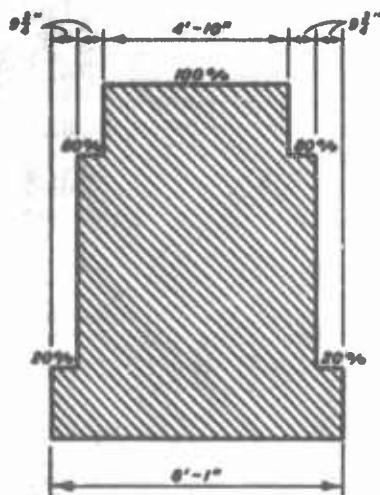

LANE 19

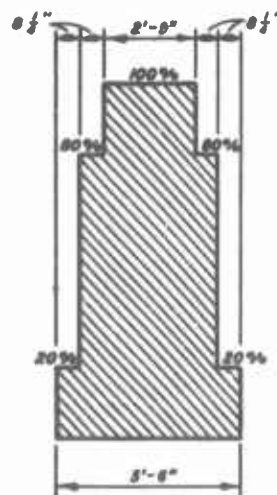

LANE 20

NOTE: PERCENTAGE FIGURES SHOW PERCENT OF TOTAL COVERAGES.

TRAFFIC DISTRIBUTION PATTERNS

TEST SECTION 8

LANES 17-17A, 18, 19, AND 20

Figure 13

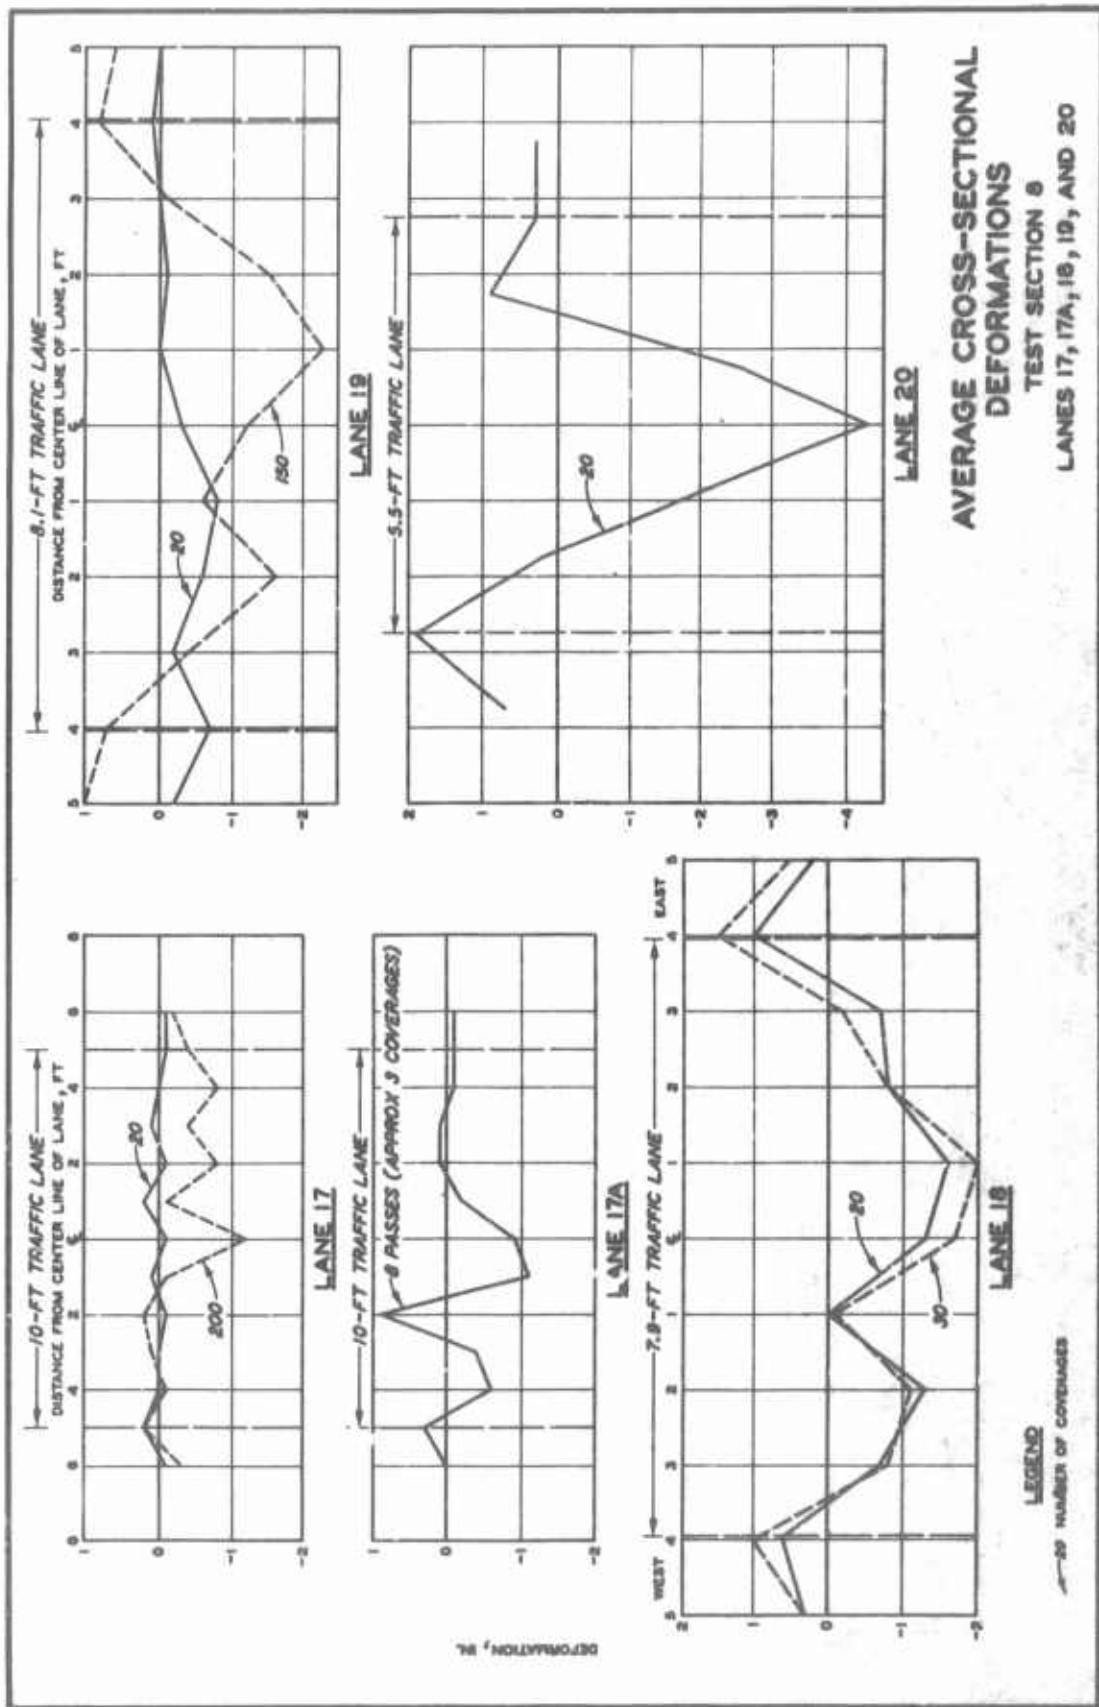


Figure 14

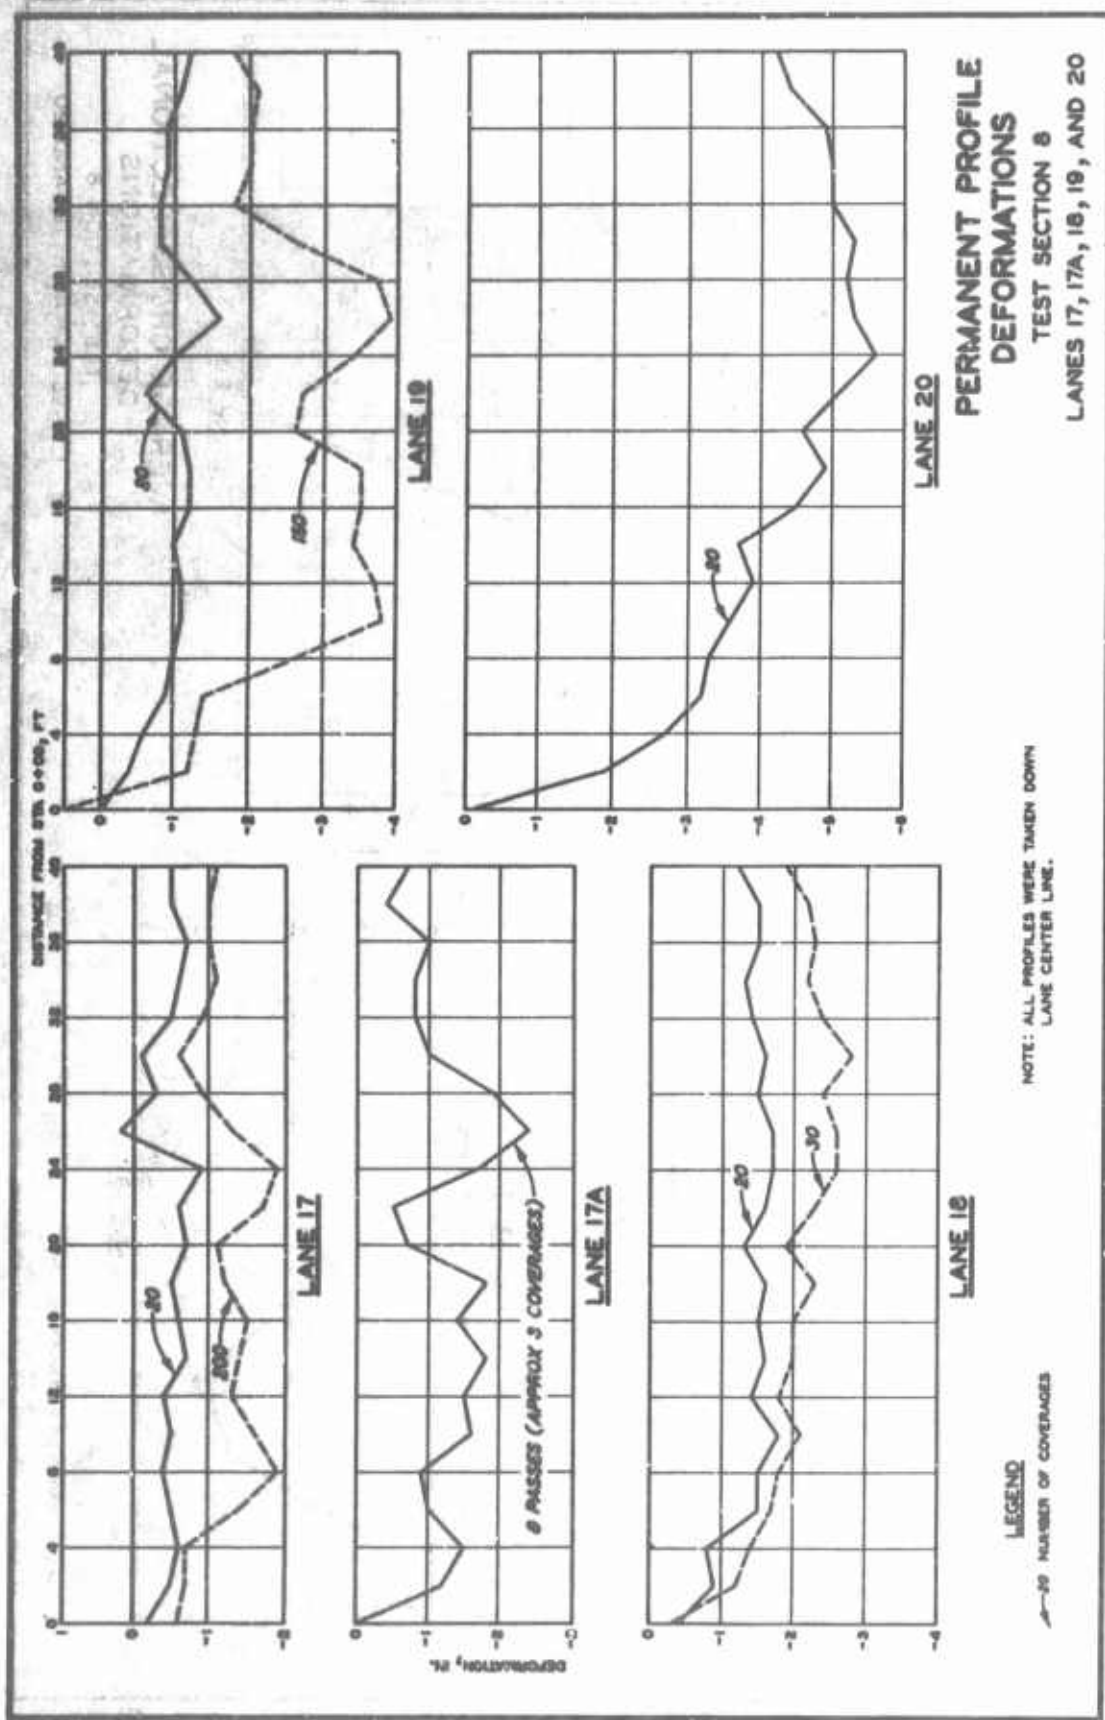


Figure 15

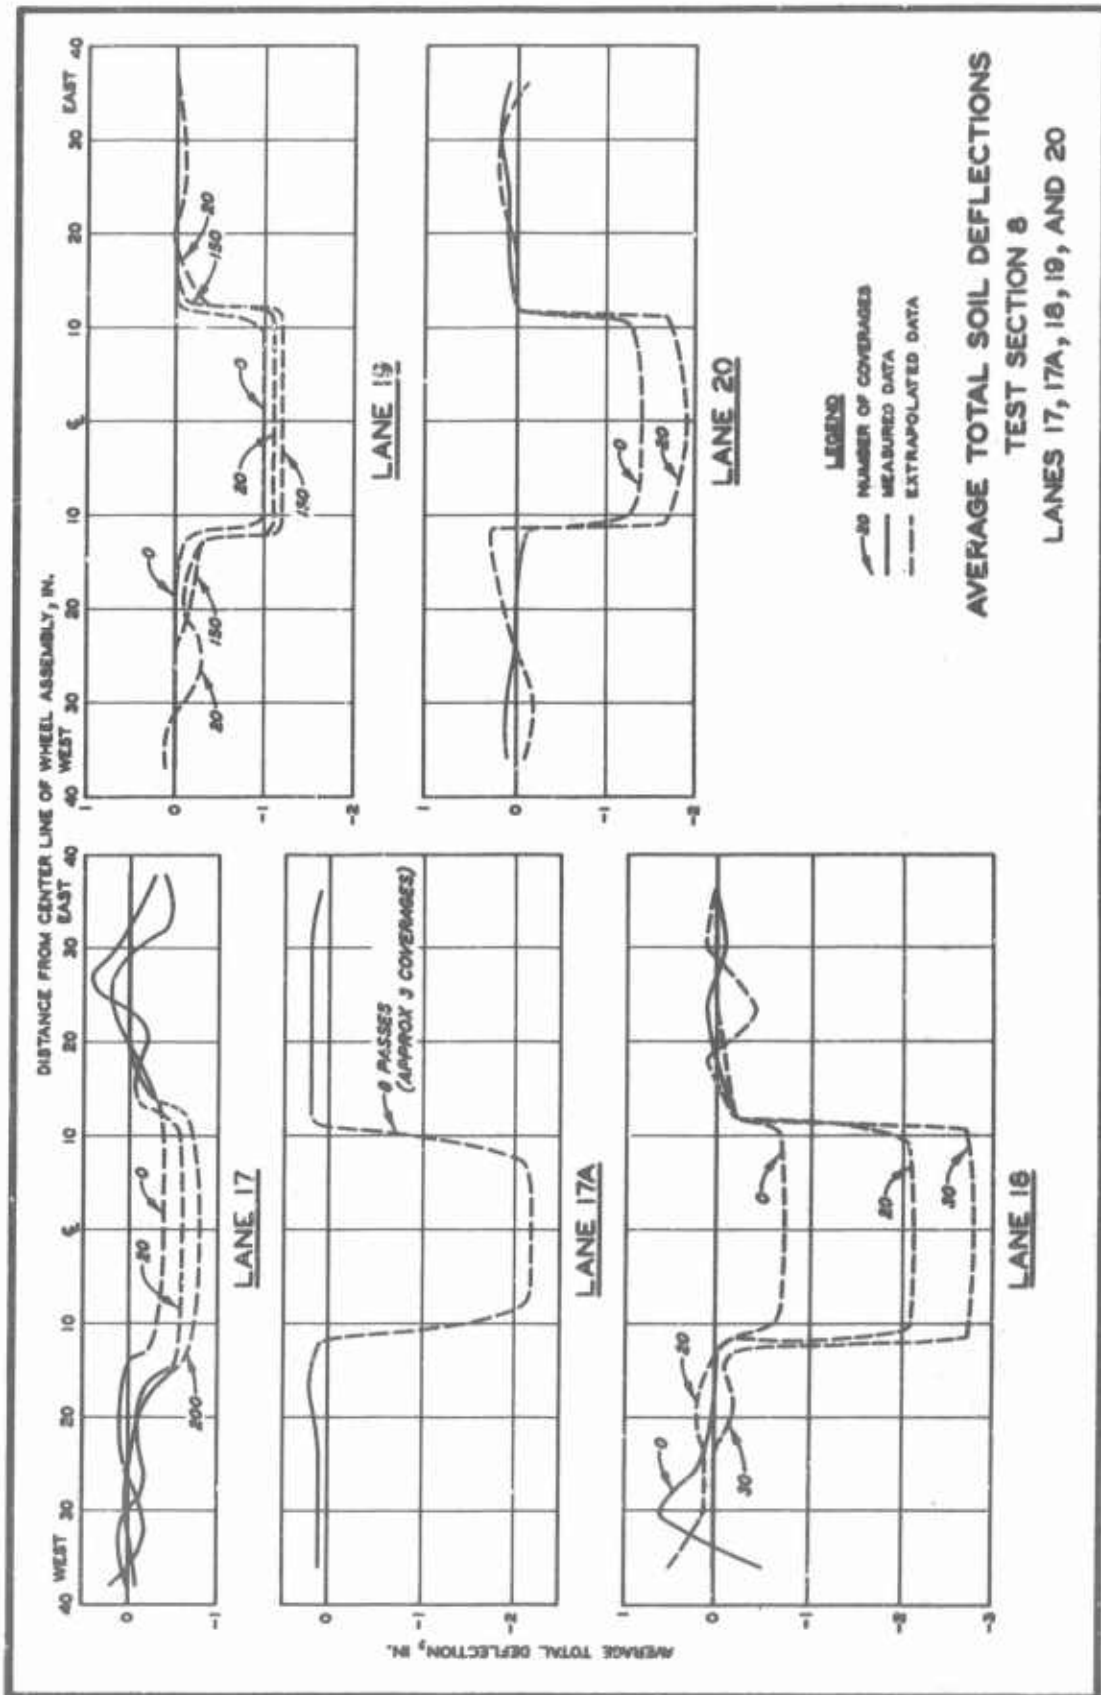


Figure 16

UNCLASSIFIED

Security Classification

DOCUMENT CONTROL DATA - R&D

(So write classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

1. ORIGINATING ACTIVITY (Corporate author) U. S. Army Engineer Waterways Experiment Station		2a. REPORT SECURITY CLASSIFICATION UNCLASSIFIED	
		2b. GROUP	
3. REPORT TITLE Aircraft Ground-Flotation Investigation Part IX Data Report on Test Section 8			
4. DESCRIPTIVE NOTES (Type of report and inclusive dates) Final Technical Report			
5. AUTHOR(S) (Last name, first name, initial) Rutledge, A. H. Hill, W. J., Jr.			
6. REPORT DATE September 1966		7a. TOTAL NO. OF PAGES 23	7b. NO. OF REFS
8a. CONTRACT OR GRANT NO. MIPR AS-4-177		8a. ORIGINATOR'S REPORT NUMBER(S) AFFDL-TR-66-43, Part IX.	
8. PROJECT NO. 410A		8b. OTHER REPORT NO(S) (Any other number that may be assigned this report) None	
10. AVAILABILITY/LIMITATION NOTICES This document is subject to special export controls and each transmittal to foreign governments or foreign nationals may be made only with prior approval of the Air Force Flight Dynamics Laboratory (FFDL), Wright-Patterson AFB, Ohio 45433.			
11. SUPPLEMENTARY NOTES		12. SPONSORING MILITARY ACTIVITY Air Force Flight Dynamics Laboratory Research and Technology Division AF Systems Command, WPAFB, Ohio	
13. ABSTRACT This data report describes the results of work undertaken as part of an overall program to develop ground-flotation criteria for the C-5A aircraft.			

DD FORM 1473
1 JAN 64

UNCLASSIFIED

Security Classification

10. KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
Aircraft Ground Flotation Rolling Resistance Rear Area Airfields Support Area Airfields Forward Area Airfields Vehicle Mobility						

INSTRUCTIONS

1. **ORIGINATING ACTIVITY:** Enter the name and address of the contractor, subcontractor, grantee, Department of Defense activity or other organization (corporate author) issuing the report.
- 2a. **REPORT SECURITY CLASSIFICATION:** Enter the overall security classification of the report. Indicate whether "Restricted Data" is included. Marking is to be in accordance with appropriate security regulations.
- 2b. **GROUP:** Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forces Industrial Manual. Enter the group number. Also, when applicable, show that optional markings have been used for Group 3 and Group 4 as authorized.
3. **REPORT TITLE:** Enter the complete report title in all capital letters. Titles in all cases should be unclassified. If a meaningful title cannot be selected without classification, show title classification in all capitals in parenthesis immediately following the title.
4. **DESCRIPTIVE NOTES:** If appropriate, enter the type of report, e.g., interim, progress, summary, annual, or final. Give the inclusive dates when a specific reporting period is covered.
5. **AUTHOR(S):** Enter the name(s) of author(s) as shown on or in the report. Enter last name, first name, middle initial. If military, show rank and branch of service. The name of the principal author is an absolute minimum requirement.
6. **REPORT DATE:** Enter the date of the report as day, month, year, or month, year. If more than one date appears on the report, use date of publication.
- 7a. **TOTAL NUMBER OF PAGES:** The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.
- 7b. **NUMBER OF REFERENCES:** Enter the total number of references cited in the report.
- 8a. **CONTRACT OR GRANT NUMBER:** If appropriate, enter the applicable number of the contract or grant under which the report was written.
- 8b, 8c, & 8d. **PROJECT NUMBER:** Enter the appropriate military department identification, such as project number, subproject number, system numbers, task number, etc.
- 9a. **ORIGINATOR'S REPORT NUMBER(S):** Enter the official report number by which the document will be identified and controlled by the originating activity. This number must be unique to this report.
- 9b. **OTHER REPORT NUMBER(S):** If the report has been assigned any other report numbers (either by the originator or by the sponsor), also enter this number(s).
10. **AVAILABILITY/LIMITATION NOTICES:** Enter any limitations on further dissemination of the report, other than those

imposed by security classification, using standard statements such as:

- (1) "Qualified requesters may obtain copies of this report from DDC."
- (2) "Foreign announcement and dissemination of this report by DDC is not authorized."
- (3) "U. S. Government agencies may obtain copies of this report directly from DDC. Other qualified DDC users shall request through _____."
- (4) "U. S. military agencies may obtain copies of this report directly from DDC. Other qualified users shall request through _____."
- (5) "All distribution of this report is controlled. Qualified DDC users shall request through _____."

If the report has been furnished to the Office of Technical Services, Department of Commerce, for sale to the public, indicate this fact and enter the price, if known.

11. **SUPPLEMENTARY NOTES:** Use for additional explanatory notes.
12. **SPONSORING MILITARY ACTIVITY:** Enter the name of the departmental project office or laboratory sponsoring (paying for) the research and development. Include address.
13. **ABSTRACT:** Enter an abstract giving a brief and factual summary of the document indicative of the report, even though it may also appear elsewhere in the body of the technical report. If additional space is required, a continuation sheet shall be attached.

It is highly desirable that the abstract of classified reports be unclassified. Each paragraph of the abstract shall end with an indication of the military security classification of the information in the paragraph, represented as (TS), (S), (C), or (U).

There is no limitation on the length of the abstract. However, the suggested length is from 150 to 225 words.

14. **KEY WORDS:** Key words are technically meaningful terms or short phrases that characterize a report and may be used as index entries for cataloging the report. Key words must be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location, may be used as key words but will be followed by an indication of technical context. The assignment of links, rules, and weights is optional.