

UNCLASSIFIED

AD NUMBER
AD813565
NEW LIMITATION CHANGE
TO Approved for public release, distribution unlimited
FROM Distribution authorized to U.S. Gov't. agencies and their contractors; Critical Technology; FEB 1967. Other requests shall be referred to Defense Advanced Research Projects Agency, 1400 Wilson Blvd., Arlington, VA 22209.
AUTHORITY
ARPA ltr, 29 Jan 1970

THIS PAGE IS UNCLASSIFIED

AD 813565

DC-TN-2046-1



FIRESTORM ANALYSIS
STATEMENT #2 UNCLASSIFIED

This document is subject to special export controls and each transmittal to foreign governments or foreign nationals may be made only with prior approval of *by ARPA-WASH DC 20301*

T. E. Lommasson
J. A. Keller
R. G. Kirkpatrick

Prepared on Contract No. 13-248

for

Division of Fire Research
U. S. Forest Service
Department of Agriculture
Washington, D. C.

This Project Sponsored By
The Advanced Research Projects Agency
Department of Defense

February 1, 1967

THE
Dikewood
CORPORATION

1009 BRADSHAW DRIVE, S.E. / TELEPHONE (505) 243-9781
UNIVERSITY RESEARCH PARK
ALBUQUERQUE, NEW MEXICO 87106

DC-TN-2046-1

FIRESTORM ANALYSIS

by

T. E. Lommasson
J. A. Keller
R. G. Kirkpatrick

Prepared on Contract No. 13-248

for

Division of Fire Research
U. S. Forest Service
Department of Agriculture
Washington, D. C.

This Project Sponsored By
The Advanced Research Projects Agency
Department of Defense

February 1, 1967

THE DIKEWOOD CORPORATION
1009 Bradbury Drive, S. E.
University Research Park
Albuquerque, New Mexico 87106

CONTENTS

<u>Section</u>	<u>Page</u>
List of Appendices	ii
List of Illustrations	iii
 1.0 INTRODUCTION	 1
1.1 Objectives	1
1.2 Background	1
1.3 Method of Calculation	2
1.4 Limitations	3
 2.0 RESULTS	 5
2.1 Radial Inrush Wind Velocity	5
2.2 Sensitivity Analysis	5
2.3 Accelerated Spread Study	6
 References	 9

LIST OF APPENDICES

<u>Appendix</u>	<u>Title</u>
IA	Rationale for Computation of Radial Inrush Wind Velocity
IB	Derivation of the Basic Equation
IC	Development of Spread Rate Relationships
ID	Derivation of Coalescence Equations
II	Rationale for Sensitivity Analysis
III	Computer Program for Inrush Wind and Sensitivity Calculations
IV	Radial Inrush Wind Velocity Curves
V	Sensitivity Curves
VI	Accelerated Spread Study
VII	Accelerated Spread Program
VIII	Accelerated Spread Curves

LIST OF ILLUSTRATIONS

<u>Fig. No.</u>		<u>Page</u>
RADIAL INDRAFT WIND VELOCITY CURVES		
<u>Case 1</u> , Constant Area Increase, $K = 5.0 \text{ ft}^2/\text{sec}$		
Fuel Loading = 5 tons/acre		
IV- 1	Area = 1 square mile	IV- 2
IV- 2	Area = 5 square miles	IV- 3
IV- 3	Area = 10 square miles	IV- 4
IV- 4	Area = 15 square miles	IV- 5
IV- 5	Area = 25 square miles	IV- 6
Fuel Loading = 15 tons/acre		
IV- 6	Area = 1 square mile	IV- 7
IV- 7	Area = 5 square miles	IV- 8
IV- 8	Area = 10 square miles	IV- 9
IV- 9	Area = 15 square miles	IV-10
IV-10	Area = 25 square miles	IV-11
Fuel Loading = 30 tons/acre		
IV-11	Area = 1 square mile	IV-12
IV-12	Area = 5 square miles	IV-13
IV-13	Area = 10 square miles	IV-14
IV-14	Area = 15 square miles	IV-15
IV-15	Area = 25 square miles	IV-16
<u>Case 2a</u> , Constant Perimeter Increase, $L = 0.1 \text{ ft}/\text{sec}$		
Fuel Loading = 5 tons/acre		
IV-16	Area = 1 square mile	IV-17
IV-17	Area = 5 square miles	IV-18
IV-18	Area = 10 square miles	IV-19
IV-19	Area = 15 square miles	IV-20
IV-20	Area = 25 square miles	IV-21
Fuel Loading = 15 tons/acre		
IV-21	Area = 1 square mile	IV-22
IV-22	Area = 5 square miles	IV-23
IV-23	Area = 10 square miles	IV-24
IV-24	Area = 15 square miles	IV-25
IV-25	Area = 25 square miles	IV-26

LIST OF ILLUSTRATIONS (Continued)

<u>Fig. No.</u>		<u>Page</u>
	Fuel Loading = 30 tons/acre	
IV-26	Area = 1 square mile.....	IV-27
IV-27	Area = 5 square miles.....	IV-28
IV-28	Area = 10 square miles.....	IV-29
IV-29	Area = 15 square miles.....	IV-30
IV-30	Area = 25 square miles.....	IV-31
	Case 2b, Constant Radial Increase, M = 0.01 ft/sec	
	Fuel Loading = 5 tons/acre	
IV-31	Area = 1 square mile.....	IV-32
IV-32	Area = 5 square miles.....	IV-33
IV-33	Area = 10 square miles.....	IV-34
IV-34	Area = 15 square miles.....	IV-35
IV-35	Area = 25 square miles.....	IV-36
	Fuel Loading = 15 tons/acre	
IV-36	Area = 1 square mile.....	IV-37
IV-37	Area = 5 square miles.....	IV-38
IV-38	Area = 10 square miles.....	IV-39
IV-39	Area = 15 square miles.....	IV-40
IV-40	Area = 25 square miles.....	IV-41
	Fuel Loading = 30 tons/acre	
IV-41	Area = 1 square mile.....	IV-42
IV-42	Area = 5 square miles.....	IV-43
IV-43	Area = 10 square miles.....	IV-44
IV-44	Area = 15 square miles.....	IV-45
IV-45	Area = 25 square miles.....	IV-46

SENSITIVITY CURVES

V-1	$\partial v_w / \partial n$ vs. n	V-2
V-2	$\partial v_w / \partial A$ vs. A	V-3
V-3	$\partial v_w / \partial FL$ vs. FL	V-4

LIST OF ILLUSTRATIONS
(Continued)

<u>Fig. No.</u>		<u>Page</u>
V-4	$\partial v_w / \partial E_{\text{fuel}}$ vs. E_{fuel}	V-5
V-5	$\partial v_w / \partial E_{\text{frac, viol}}$ vs. $E_{\text{frac, viol}}$	V-6
V-6	$\partial v_w / \partial E_{\text{frac, resid}}$ vs. $E_{\text{frac, resid}}$	V-7
V-7	$\partial v_w / \partial r$ vs. M	V-8
VI-1	ACCELERATED SPREAD PARAMETER DEFINITIONS. .	VI-1

ACCELERATED SPREAD CURVES

VIII-1	Radial Spread Rate vs. Time for Initial Mode 1	VIII-2
VIII-2	Radial Spread Rate vs. Fire Radius for Initial Mode 1 . .	VIII-3
VIII-3	Radial Spread Rate vs. Time for Initial Mode 2	VIII-4
VIII-4	Radial Spread Rate vs. Fire Radius for Initial Mode 2 . .	VIII-5
VIII-5	Radial Spread Rate vs. Time for Initial Mode 3	VIII-6
VIII-6	Radial Spread Rate vs. Fire Radius for Initial Mode 3 . .	VIII-7
VIII-7	Radial Spread Rate vs. Time for Initial Mode 4	VIII-8
VIII-8	Radial Spread Rate vs. Fire Radius for Initial Mode 4 . .	VIII-9

FIRESTORM ANALYSIS

1.0 INTRODUCTION

1.1 Objectives

The following general objectives were specified for this study:

- a) Compute the radial inrush wind (v_w) associated with a mass fire as a function of time and various fuel bed parameters,
- b) Investigate the sensitivity of v_w to variations in certain of the fuel bed parameters, and
- c) Conduct an analytical study of the case in which fire spread is accelerated by wind and/or flame interaction until coalescence.

1.2 Background

The basic point of departure for this research was Ref. 1, in which a hypothesis was developed relating radial inrush wind velocity at the edge of a potential firestorm area to the energy release rate of fires within the area and to the size of the area itself. The value of the constant in the equation relating these parameters was determined by "fitting" an equation derived from physical considerations to estimated "worst case" conditions during the Hamburg firestorm. One degree of freedom in the "constant" term allowed this fit to be made.

In Appendix IB, the equation of Ref. 1 is expanded to express the energy release rate of the fires in terms of the following parameters:

n	the number of initial fires,
FL	the fuel loading,
E_{fuel}	the energy content of the fuel,
A_{SV}	the area of a single fire which is in the violent burning stage* at a given time,
A_{SR}	the area of a single fire which is in the residual burning stage* at a given time,
$E_{frac, viol}$	the fraction of E_{fuel} released during the violent burning stage*,
$E_{frac, resid}$	the fraction of E_{fuel} released during the residual burning stage*,
Δt_V	the duration of the violent burning period, * and
Δt_R	the duration of the residual burning period*.

In Appendices IA and IC, equations are derived which, for certain assumptions, represent A_{SV} and A_{SR} as a function of time, spread rate, and other parameters for three different spread conditions.

1.3 Method of Calculation

A computer program to calculate v_w was written based upon Eq. (IA-1) and Tables IA-I and IA-II. The input values used are listed in Section IA. 4. The results of these calculations are presented graphically in

* The definitions of "violent" and "residual" burning regimes are based upon Ref. 2.

Appendix IV. A second part of the program calculates the partial derivative of v_w with respect to seven selected parameters based upon the rationale of Appendix II and using the inputs listed in Table II-I. The results of this series of calculations is presented in Appendix V. A listing of this program, its input requirements, and a sample output page from each part are contained in Appendix III.

The accelerated spread study considers that radial spread is accelerated by interaction effects (after adjacent fires reach a certain minimum separation distance). Four initial spread modes are investigated: a constant rate of radial increase, a constant rate of area increase, and two logarithmic rates of radial spread.*

The computer program listed in Appendix VII calculates spread rate, fire radius, and distance to the point at which flame fronts merge as a function of time for each initial spread mode. This program is based upon the equations of Appendix VI. Appendix VIII contains eight graphs showing radial spread rate as a function of time and of fire radius for each of the initial spread modes, with the point at which acceleration begins indicated on each curve.

1.4 Limitations

Inherent in the rationales and the results of this study are, of course, the approximations and assumptions made in deriving the heuristic model

* Provided by Mr. C. C. Chandler, Division of Fire Research, U. S. Forest Service, Washington, D. C.

from Ref. 1 and the modifications to it described in Section 1.2. In particular, the "worst case" conditions in Hamburg, from which the value of the constant was obtained, corresponds to 100% simultaneous involvement of all structures in an urban area during the violent burning period of the initial fires. This study considers a continuous wildland fuel bed with somewhat different burning characteristics. The degree of correspondence between these two cases is not, as yet, firmly established.

All of the v_w computations are made using average values for the rate of energy release term, as reflected by the parameters listed on pages IA-1 and IA-2.

Also, the type and rate of fire spread which occur in a fuel bed of the sort considered here will probably require considerable further investigation before the functional dependencies and appropriate parameter values are clearly defined. The preliminary work on accelerated spread in this study is one course of investigation that may yield a better understanding of these relationships.

The spread rate relations assumed are approximations, and in the real world probably represent rough average values as they develop as a function of time.

This entire study may be viewed as a project that has generated a number of rough hypotheses which may now be tested and assessed as to validity and utility.

2.0 RESULTS

2.1 Radial Inrush Wind Velocity Curves

The 45 families of curves in Appendix IV represent v_w as a function of n for ten values of time after ignition. A family of curves was constructed for each combination of values of 3 spread cases, 3 fuel loadings, and 5 area sizes. Each family is bounded above by the coalescence locus, as discussed in Appendix ID.

In general, an increase in the number of initial ignitions decreases the time at which the maximum value of v_w ($\hat{v}_w$) occurs, as would be expected. For Case 1 (constant area increase), $\hat{v}_w$ (as described by the coalescence locus) increases considerably as a function of n . On the other hand, for Case 2 (constant rate of perimeter or radial increase), the coalescence locus is much "flatter"; i. e., $\hat{v}_w$ is fairly constant with respect to n . This simply means that, as n increases, the time to coalescence is less for spread Case 1 than for spread Case 2, all other factors being equivalent. Also, for the values of the spread constants considered in this analysis, $\hat{v}_w$ appears to occur at a much earlier time for Case 1 than for Case 2, which is intuitively expected.

2.2 Sensitivity Analysis

Appendix V contains seven families of curves which represent $\frac{\partial v_w}{\partial \mu_i}$ at ten times after ignition as a function of μ_i with the other parameters μ_j ($j \neq i$) held at their "representative values." These curves are drawn

from the output of Part II of the computer program listed in Appendix III.

This part of the program and its inputs are based upon the rationale described in Appendix II.

The partial derivative $\frac{\partial v_w}{\partial \mu_i}$ indicates the rate of change of v_w with respect to μ_i . The sign of $\frac{\partial v_w}{\partial \mu_i}$ indicates the direction of change, e.g., if $\frac{\partial v_w}{\partial \mu_i} > 0$, an increase in the value of μ_i will result in an increase in the value of v_w . Conversely, if $\frac{\partial v_w}{\partial \mu_i} < 0$, then an increase in μ_i will yield a decrease in v_w . The magnitude $\left| \frac{\partial v_w}{\partial \mu_i} \right|$ serves as an index of the rate of change for various points on the family of curves associated with a particular μ_i . Table 2.2-I lists the sign of $\frac{\partial v_w}{\partial \mu_i}$ and the behavior of $\left| \frac{\partial v_w}{\partial \mu_i} \right|$ for the seven parameters considered.

2.3 Accelerated Spread Study

Appendix VI considers the case in which radial spread rate is accelerated by interaction effects when adjacent fires are sufficiently close. This case is investigated for four initial spread modes; two logarithmic rates of radial increase,* the constant rate of radial spread ($M = 0.01$ ft/sec) used for Case 2b of the v_w calculations, and the constant rate of area spread ($K_1 = 5.0$ ft²/sec) used for Case 1 of the v_w calculations.

* Provided by Mr. C. C. Chandler, Division of Fire Research, U. S. Forest Service, Washington, D. C.

from the output of Part II of the computer program listed in Appendix III. This part of the program and its inputs are based upon the rationale described in Appendix II.

The partial derivative $\frac{\partial v_w}{\partial \mu_i}$ indicates the rate of change of v_w with respect to μ_i . The sign of $\frac{\partial v_w}{\partial \mu_i}$ indicates the direction of change, e. g., if $\frac{\partial v_w}{\partial \mu_i} > 0$, an increase in the value of μ_i will result in an increase in the value of v_w . Conversely, if $\frac{\partial v_w}{\partial \mu_i} < 0$, then an increase in μ_i will yield a decrease in v_w . The magnitude $\left| \frac{\partial v_w}{\partial \mu_i} \right|$ serves as an index of the rate of change for various points on the family of curves associated with a particular μ_i . Table 2.2-I lists the sign of $\frac{\partial v_w}{\partial \mu_i}$ and the behavior of $\left| \frac{\partial v_w}{\partial \mu_i} \right|$ for the seven parameters considered.

2.3 Accelerated Spread Study

Appendix VI considers the case in which radial spread rate is accelerated by interaction effects when adjacent fires are sufficiently close. This case is investigated for four initial spread modes; two logarithmic rates of radial increase, * the constant rate of radial spread ($M = 0.01$ ft/sec) used for Case 2b of the v_w calculations, and the constant rate of area spread ($K_1 = 5.0$ ft²/sec) used for Case 1 of the v_w calculations.

* Provided by Mr. C. C. Chandler, Division of Fire Research, U. S. Forest Service, Washington, D. C.

TABLE 2.2-I

Sensitivity Summary

Parameter	Sign of $\frac{\partial v}{\partial \mu_i}$	Change in $\left \frac{\partial v}{\partial \mu_i} \right $ with increasing μ 's for a fixed time.	Change in $\left \frac{\partial v}{\partial \mu_i} \right $ with increasing time for a fixed value of μ_i .
$\mu_1 = n$	+	decreasing	increasing
$\mu_2 = A$	-	decreasing	increasing
$\mu_3 = FL$	+	decreasing	increasing
$\mu_4 = EF$	+	decreasing	increasing
$\mu_5 = E_{\text{frac, viol}}$	+	decreasing	increasing for $t \leq 32$ min. decreasing for $t > 32$ min.
$\mu_6 = E_{\text{frac, resid}}$	-	increasing	increasing for $t \leq 32$ min. decreasing for $t > 32$ min.
$\mu_7 = r$ ($r = 2\pi M^2 t$)	+	decreasing	decreasing

Equations are developed for radial spread rate, fire radius, and distance to merging as a function of time for each initial spread mode. The computer program listed in Appendix VII is based upon these equations.

The eight graphs in Appendix VIII represent radial spread rate as a function of time and of fire radius for each initial spread mode.

REFERENCES

1. Lommasson, T. E., Preliminary Investigation of Firestorm Start-Criteria, The Dikewood Corporation DC-TN-1050-1, Contract OCD-PS-65-53, Albuquerque, New Mexico, June 15, 1965.
2. Chandler, C. C., Storey, T. G., and Tangren, C. D., Prediction of Fire Spread Following Nuclear Explosions, U. S. Forest Service Research Paper PSW-5, Contract OCD-OS-62-131, Berkeley, California, 1963.

APPENDIX IA

RATIONALE FOR COMPUTATION OF RADIAL INRUSH WIND VELOCITY

IA.1 Basic Equation and Parameter Definitions

The basic equation* is

$$v_w = \left(\frac{88}{1000} \right) \left(\frac{50}{1089} \right)^{1/3} \cdot \frac{[(n)(FL)(E_{fuel})]^{1/3}}{A^{1/6}} \cdot \left[\frac{A_{SV}(r,t,\Delta t_V) \cdot E_{frac,viol}}{\Delta t_V} + \frac{A_{SR}(r,t,\Delta t_V,\Delta t_R) \cdot E_{frac,resid}}{\Delta t_R} \right]^{1/3} \quad (IA. 1)$$

Where

v_w	is the radial inrush wind velocity at the periphery of a circular area A within which fires are burning, in miles per hour
n	is the number of initial fires. [$n = n_d \cdot (A)$, where n_d is the number of initial fires per square mile]
FL	is the fuel loading, in tons per acre
E_{fuel}	is the caloric content of the fuel in Btu/lb
A	is the total area within which fires are started, in square miles
A_{SV}	is the area which is in the violent burning regime at time t , in square feet

* This equation is based on work done in Ref. 1. A derivation of the form used in this study from those in Ref. 1 is given in Appendix IB.

r	is the spread rate; if A_S denotes the total area, in square feet, over which the fire has spread at time t ,	
	$r = \frac{dA_S}{dt}$	(IA. 2)
t	is the time after ignition, in seconds	
Δt_V	is the duration of the violent burning period, in seconds	
$E_{\text{frac, viol}}$	is the fraction of the total available energy of the fuel which is released during the violent burning period	
A_{SR}	is the area which is in the residual burning regime at time t , in square feet	
Δt_R	is the duration of the residual burning period, in seconds	
$E_{\text{frac, resid}}$	is the fraction of the total available energy of the fuel which is released during the residual burning regime	

IA. 2 Assumptions

- A. All fires have negligible initial areas; i. e. , they are effectively "point fires".
- B. Fire spread starts immediately after initiation of any given "point fire", and each fire spreads in the same manner at the same rate symmetrically around the "point fire" until coalescence.
- C. All fires are started simultaneously from a uniform distribution of ignitions and burn in identical fuel beds.

D. Three rates of area spread with time will be considered:

- 1) $\frac{dA_S}{dt} = r_1 = K_1$, which represents a constant rate of area growth,
- 2) $\frac{dA_S}{dt} = r_2 = Bt$, which represents a constant rate of perimeter increase,
- 3) $\frac{dA_S}{dt} = r_3 = Ct$, which represents a constant rate of radial spread.

The expressions for B and C are derived in Appendix IC.

IA.3 Procedure

At any time t , the area into which a given fire has spread, A_S , is composed, ideally, of three regions:

- 1) The violently burning part, A_{SV} ,
- 2) The residually burning part, A_{SR} , and
- 3) The burned-out portion, A_{SBO} , so that

$$A_S(t) = A_{SV}(t) + A_{SR}(t) + A_{SBO}(t) \quad (\text{IA. 3})$$

From the definitions, it is apparent that

$$A_{SV}(t) = A_S(t) - A_S(t - \Delta t_V)$$

$$A_{SR}(t) = A_S(t - \Delta t_V) - A_S[t - (\Delta t_V + \Delta t_R)]$$

$$A_{SBO}(t) = A_S[t - (\Delta t_V + \Delta t_R)] \quad (\text{IA. 4})$$

Taking $r(t)$ as the spread rate, one may write the following relations:

$$A_{SBO} = \begin{cases} 0 & \text{if } t \leq \Delta t_V + \Delta t_R \\ \int_{\Delta t_V + \Delta t_R}^t r[t - (\Delta t_V + \Delta t_R)] dt & \text{for } t > \Delta t_V + \Delta t_R \end{cases} \quad (\text{IA. 5})$$

$$A_{SR} = \begin{cases} 0 & \text{if } t \leq \Delta t_V \\ \int_{\Delta t_V}^t r(t - \Delta t_V) dt - A_{SBO} & \text{for } t > \Delta t_V \end{cases} \quad (\text{IA. 6})$$

and

$$A_{SV} = \int_0^t r(t) dt - A_{SR} - A_{SBO} \quad (\text{IA. 7})$$

These expressions have been evaluated and the results are given in Tables IA-I and IA-II, which present formulae for A_{SV} , A_{SR} , and A_{SBO} as a function of time for the two basic spread modes given in paragraph IA. 2D above.

Case 1. Constant area increase.

$$r = \frac{dA_S}{dt} = K_1 \text{ ft}^2 / \text{sec} \quad (\text{IA. 8})$$

Table IA - I

$\begin{matrix} t \\ A_S \end{matrix}$	$0 \leq t \leq \Delta t_V$	$\Delta t_V < t \leq \Delta t_V + \Delta t_R$	$t > \Delta t_V + \Delta t_R$
A_{SV}	rt	$r \cdot \Delta t_V$	$r \cdot \Delta t_V$
A_{SR}	-0-	$r \cdot (t - \Delta t_V)$	$r \cdot \Delta t_R$
A_{SBO}	-0-	-0-	$r \cdot [t - (\Delta t_V + \Delta t_R)]$

In this case

$$n_c = \frac{A}{K_1 t} \times (5280)^2 \quad (\text{IA. 9})$$

where n_c is the number of initial fires necessary to achieve coalescence in area A by time t . *

$$\text{Case 2.} \quad r = \frac{dA_S}{dt} = K_2 t \quad (\text{IA. 10})$$

$$(2a) K_2 = B \quad (\text{constant rate of perimeter increase}) \quad B = L^2 / (2\pi)$$

where L is rate of change of perimeter, in feet per second. **

$$(2b) K_2 = C \quad (\text{constant rate of radial increase}) \quad C = 2\pi M^2$$

where M is rate of change of radius, in feet per second. **

* The derivation of the coalescence relations is given in Appendix ID.

** The derivation of these relationships is given in Appendix IC.

Table IA - II

$\begin{matrix} t \\ A_S \end{matrix}$	$0 \leq t \leq \Delta t_V$	$\Delta t_V < t \leq \Delta t_V + \Delta t_R$	$t > \Delta t_V + \Delta t_R$
A_{SV}	$\frac{rt}{2}$	$\frac{r}{2} \cdot \left[2\Delta t_V - \frac{(\Delta t_V)^2}{t} \right]$	$\frac{r}{2} \cdot \left[2\Delta t_V - \frac{(\Delta t_V)^2}{t} \right]$
A_{SR}	-0-	$\frac{r}{2} \cdot \left[t - 2\Delta t_V + \frac{(\Delta t_V)^2}{t} \right]$	$\frac{r}{2} \cdot \left[2\Delta t_R - \frac{2\Delta t_V \Delta t_R}{t} - \frac{(\Delta t_R)^2}{t} \right]$
A_{SBO}	-0-	-0-	$\frac{r}{2} \cdot \left[t - 2(\Delta t_V + \Delta t_R) + \frac{(\Delta t_V + \Delta t_R)^2}{t} \right]$

and

$$n_c = \frac{2A}{K_2 t^2} \times (5280)^2 \quad (\text{IA. 11})$$

IA. 4 Input Parameter Values

Calculations of v_w and n_c have been made for each case, using each combination of the parameter values:

$$n_d = 2000, 3000, 4000, 4500, 5000, 6000, 7000, 10,000$$

$$A = 1.0, 5.0, 10.0, 15.0, 25.0 \text{ mi}^2$$

$$FL = 5, 15.0, 30.0 \text{ tons/acre}$$

$$E_{\text{fuel}} = 7000 \text{ Btu/lb}$$

$$\Delta t_V = 360 \text{ sec}$$

$$\begin{aligned}
 \Delta t_R &= 4200 \text{ sec} \\
 K_1 &= 5.0 \text{ ft}^2/\text{sec} \\
 M &= .01 \text{ ft/sec} \\
 L &= .1 \text{ ft/sec} \\
 E_{\text{frac, viol}} &= 0.4 \\
 E_{\text{frac, resid}} &= 0.6 \\
 t &= 2, 4, 6, 8, 16, 24, 32, 48, 64, 80 \text{ minutes}
 \end{aligned}$$

Note that the total number of fires burning in a given area is represented by $n = n_d \cdot A$.

IA. 5 Method of Calculation

A computer program was written based upon the above equations. Using the inputs listed above, it calculates v_w as a function of time and n for each combination of the other parameters. A listing of this program, its input format requirements, and a sample output page is included in Appendix III. The output is grouped so that:

- 1) All pages pertaining to a given spread rate are together.
- 2) Within a given case, all pages with a specific FL are together.
- 3) Each page of the output has all the points for a specific area size, given the case and FL.

The results of these calculations are presented graphically in Appendix IV.

APPENDIX IB DERIVATION OF THE BASIC EQUATION

Equation (29) of Ref. 1 gives

$$v_w = \frac{(88 \times 10^{-3}) \left[\sum_{i=1}^n \frac{dE_{T(i)}}{dt} \right]^{1/3}}{\sqrt[6]{A}} \quad (\text{IB. 1})$$

where v_w is the radial inrush wind velocity at the periphery of area A, in miles per hour, n is the number of initial fires started in an area A, and $\frac{dE_{T(i)}}{dt}$ is the energy release rate for a single fire, in Btu/sec at time t.

Assuming identical simultaneously ignited fires in a continuous fuel bed with uniform characteristics, the total amount of energy released during the violent burning period is given by the product of:

- 1) the total number of fires,
- 2) the fuel loading (lbs/ft²),
- 3) the caloric content of the available fuel (Btu/lb),
- 4) the area (ft²) which is burning violently at the time in question, and
- 5) the fraction of the total energy of the fuel which is released during the violent burning period.

The average energy release rate during the violent burning regime is the total energy released during that time divided by the length of the violent burning period, in seconds. Symbolically,

$$\left[\sum_{i=1}^n \frac{dE_{T(i)}}{dt} \right]_{\text{viol}} = \frac{(n)(FL)(E_{\text{fuel}})(A_{SV})(E_{\text{frac, viol}})}{\Delta t_V} \quad (\text{IB. 2})$$

Similarly, the energy release rate during the residual burning period may be represented by

$$\left[\sum_{i=1}^n \frac{dE_{T(i)}}{dt} \right]_{\text{resid}} = \frac{(n)(FL)(E_{\text{fuel}})(A_{SR})(E_{\text{frac, resid}})}{\Delta t_R} \quad (\text{IB. 3})$$

If fuel loading (FL) is expressed in tons per acre, the expressions on the right in Eqs. (IB. 2) and (IB. 3) must be multiplied by the conversion factor (50/1089).

The total energy release rate is the sum of the release rate for those portions of the fuel bed in the violent burning regime and for the portions in the residual regime, or

$$\left[\sum_{i=1}^n \frac{dE_{T(i)}}{dt} \right]_{\text{total}} = \left[\sum_{i=1}^n \frac{dE_{T(i)}}{dt} \right]_{\text{viol}} + \left[\sum_{i=1}^n \frac{dE_{T(i)}}{dt} \right]_{\text{resid}} \quad (\text{IB. 4})$$

Substituting Eqs. (IB. 2), (IB. 3), and (IB. 4) into Eq. (IB. 1), using the conversion factor, and simplifying yields

$$v_w = \left(\frac{88}{1000} \right) \left(\frac{50}{1089} \right)^{1/3} \frac{[(n)(FL)(E_{\text{fuel}})]^{1/3}}{\sqrt[6]{A}} \left[\frac{A_{SV} \cdot E_{\text{frac, viol}}}{\Delta t_V} + \frac{A_{SR} \cdot E_{\text{frac, resid}}}{\Delta t_R} \right]^{1/3} \quad (\text{IB. 5})$$

which is the desired result. In this expression A_{SV} is a complex function of r , t , and Δt_V , and A_{SR} is a complex function of r , t , Δt_V and Δt_R

APPENDIX IC

DEVELOPMENT OF SPREAD RATE RELATIONSHIPS

The expressions for B and C, as defined under assumption (D),
Section IA. 2, may be derived as follows:

a) Let the perimeter of a fire be approximated by $P = 2\pi r_c$,
where r_c is the radius of the circular fire front and is a function of time.
If the rate of perimeter growth is constant, then

$$\frac{dP}{dt} = L, \quad (\text{IC. 1})$$

where L is the constant rate of perimeter increase in units of length per
unit of time.

From Eq. (IC. 1),

$$P = Lt = 2\pi r_c, \quad (\text{IC. 2})$$

and

$$r_c = \frac{Lt}{2\pi}. \quad (\text{IC. 3})$$

Now,

$$A_S = \pi r_c^2 = \frac{L^2 t^2}{4\pi}. \quad (\text{IC. 4})$$

Differentiation of Eq. (IC. 4) yields

$$\frac{dA_S}{dt} = \frac{L^2 t}{2\pi} = r_2 = Bt. \quad (\text{IC. 5})$$

Solving for B yields

$$B = \frac{L^2}{2\pi} . \quad (\text{IC. 6})$$

b) Similarly, if r_c again represents the radius of a circular fire front and M represents a constant rate of radial spread in units of length per unit of time, one may write

$$\frac{dr_c}{dt} = M \quad (\text{IC. 7})$$

so that

$$r_c = Mt , \quad (\text{IC. 8})$$

and

$$A_S = \pi r_c^2 = \pi M^2 t^2 . \quad (\text{IC. 9})$$

Hence

$$\frac{dA_S}{dt} = 2\pi M^2 t = r_3 = Ct , \quad (\text{IC. 10})$$

and therefore

$$C = 2\pi M^2 . \quad (\text{IC. 11})$$

APPENDIX ID

DERIVATION OF COALESCENCE EQUATIONS

The v_w versus n curves are bounded by the "coalescence locus", which may be defined as the number of initial fires necessary to achieve coalescence* by a specified time.

Assuming a uniform density of (n) ignitions, the area in square feet available to a single fire for spread before coalescence is

$$A_S = \frac{A \times (5280)^2}{n} \quad (\text{ID. 1})$$

Also,

$$A_S(t) = \int_0^t r(t) dt \quad (\text{ID. 2})$$

If $r(t) = K_1$ (Case 1),

$$A_S(t) = K_1 t \quad (\text{ID. 3})$$

Equating (ID. 1) and (ID. 3) yields, for Case 1,

$$n_c = \frac{A \times (5280)^2}{K_1 t} \quad (\text{ID. 4})$$

* At coalescence all of the individual fires have merged into a single large fire, and it is assumed that no regions within the area remain unburned.

where n_c represents the approximate number of initial fires required for coalescence by time t . The approximation results from geometric assumptions inherent in Eq. (ID. 4).

In Case 2,

$$r = K_2 t \quad , \quad (\text{ID. 5})$$

and Eq. (ID. 2) becomes

$$A_S(t) = \int_0^t K_2 t \, dt = \frac{1}{2} K_2 t^2 \quad . \quad (\text{ID. 6})$$

Equations (ID. 1) and (ID. 6) yield the approximation

$$n_c = \frac{2A \times (5280)^2}{K_2 t^2} \quad , \quad (\text{ID. 7})$$

for spread Case 2.

APPENDIX II

RATIONALE FOR SENSITIVITY ANALYSIS

II. 1 Purpose

To examine the sensitivity of the radial inrush wind velocity, as calculated in Appendix IA, to variations in seven selected parameters, expressions for the partial derivatives $\frac{\partial v_w}{\partial \mu_i}$ have been developed, where $\mu_1 = n$, $\mu_2 = A$, $\mu_3 = FL$, $\mu_4 = E_{\text{fuel}}$, $\mu_5 = E_{\text{frac, viol}}$, $\mu_6 = E_{\text{frac, resid}}$, and $\mu_7 = r$.

II. 2 Partial Derivatives

Formulae for the partial derivatives with respect to selected parameters have been derived as follows:

For convenience, let us represent Eq. (IA. 1) as

$$v_w = Q_1 \cdot Q_2 \cdot Q_3 \quad (\text{II. 1})$$

where

$$Q_1 = \left(\frac{88}{1000} \right) \left(\frac{50}{1089} \right)^{1/3}, \quad (\text{II. 2})$$

$$Q_2 = \frac{[(n)(FL)(E_{\text{fuel}})]^{1/3}}{A^{1/6}}, \quad (\text{II. 3})$$

and

$$Q_3 = \left\{ \frac{A_{SV}(r, t, \Delta t_V) \cdot E_{\text{frac, viol}}}{\Delta t_V} + \frac{A_{SR}(r, t, \Delta t_V, \Delta t_R) \cdot E_{\text{frac, resid}}}{\Delta t_R} \right\}^{1/3}. \quad (\text{II. 4})$$

Then

$$\frac{\partial v_w}{\partial n} = Q_1 Q_3 \frac{[(FL)(E_{fuel})]^{1/3}}{3n^{2/3} A^{1/6}} \quad (II. 5)$$

$$\frac{\partial v_w}{\partial A} = \frac{Q_1 Q_3 [(n)(FL)(E_{fuel})]^{1/3}}{-6 A^{7/6}} \quad (II. 6)$$

$$\frac{\partial v_w}{\partial (FL)} = \frac{Q_1 Q_3 [(n)(E_{fuel})]^{1/3}}{3(FL)^{2/3} A^{1/6}} \quad (II. 7)$$

$$\frac{\partial v_w}{\partial (E_{fuel})} = \frac{Q_1 Q_3 [(n)(FL)]^{1/3}}{3(E_{fuel})^{2/3} A^{1/6}} \quad (II. 8)$$

$$\frac{\partial v_w}{\partial (E_{frac, viol})} = \frac{Q_1 Q_2}{3(Q_3)^2} \left(\frac{A_{SV}(r, t, \Delta t_V)}{\Delta t_V} - \frac{A_{SR}(r, t, \Delta t_V, \Delta t_R)}{\Delta t_R} \right) \quad (II. 9)$$

and

$$\frac{\partial v_w}{\partial (E_{frac, resid})} = \frac{Q_1 Q_2}{3(Q_3)^2} \left(\frac{A_{SR}(r, t, \Delta t_V, \Delta t_R)}{\Delta t_R} - \frac{A_{SV}(r, t, \Delta t_V)}{\Delta t_V} \right) \quad (II. 10)$$

Note that

$$\frac{\partial v_w}{\partial (E_{frac, viol})} = - \frac{\partial v_w}{\partial (E_{frac, resid})} \quad (II. 11)$$

For Case 1, if $t \leq \Delta t_V$,

$$\frac{\partial v_w}{\partial r} = \frac{Q_1 Q_2}{3(Q_3)^2} \left(\frac{t \cdot E_{frac, viol}}{\Delta t_V} \right) \quad (II. 12)$$

If $\Delta t_V < t \leq \Delta t_V + \Delta t_R$,

$$\frac{\partial v_w}{\partial r} = \frac{Q_1 Q_2}{3(Q_3)^2} \left[E_{\text{frac, viol}} + \frac{(t - \Delta t_V) \cdot E_{\text{frac, resid}}}{\Delta t_R} \right] \quad (\text{II. 13})$$

and if $t > \Delta t_V + \Delta t_R$,

$$\frac{\partial v_w}{\partial r} = \frac{Q_1 Q_2}{3(Q_3)^2} \left(E_{\text{frac, viol}} + E_{\text{frac, resid}} \right) \quad (\text{II. 14})$$

Since

$$E_{\text{frac, viol}} + E_{\text{frac, resid}} = 1 \quad (\text{II. 15})$$

then

$$\frac{\partial v_w}{\partial r} = \frac{Q_1 Q_2}{3(Q_3)^2} \quad (\text{II. 16})$$

For Case 2, if $t \leq \Delta t_V$,

$$\frac{\partial v_w}{\partial r} = \frac{Q_1 Q_2}{6(Q_3)^2} \left(\frac{t \cdot E_{\text{frac, viol}}}{\Delta t_V} \right) \quad (\text{II. 17})$$

If $\Delta t_V < t \leq \Delta t_V + \Delta t_R$,

$$\frac{\partial v_w}{\partial r} = \frac{Q_1 Q_2}{6(Q_3)^2} \left\{ \left[2 - (\Delta t_V/t) \right] E_{\text{frac, viol}} + \left[\frac{t - 2\Delta t_V + (\Delta t_V^2/t)}{\Delta t_R} \right] E_{\text{frac, resid}} \right\} \quad (\text{II. 18})$$

and if $t > \Delta t_V + \Delta t_R$,

$$\frac{\partial v_w}{\partial r} = \frac{Q_1 Q_2}{6(Q_3)^2} \left\{ \left[2 - (\Delta t_V/t) \right] E_{\text{frac, viol}} + \left[2 - \frac{2(\Delta t_V) + \Delta t_R}{t} \right] E_{\text{frac, resid}} \right\} . \quad (\text{II. 19})$$

II. 3 Input Parameters

Calculations have been made of $\frac{\partial v_w}{\partial \mu_i}$, $i=1, \dots, 7$, using fixed representative values of μ_j ($j \neq i$) and varying μ_i across a range.

Representative values, ranges, and points of calculation are listed in Table II-I.

II. 4 Method of Calculations

A computer program was written based upon Eqs. (II. 2), $\dots$, (II. 19) and run using the input parameters as defined in Table II-I. A listing of this program and a sample of its output is included in Appendix III.

Appendix V contains seven sets of sensitivity curves based upon the output of this program. Each set represents $\frac{\partial v_w}{\partial \mu_i}$ plotted as a function of μ_i for each time value.

TABLE II - I
INPUT VALUES FOR SENSITIVITY ANALYSIS

Parameter	Representative Value	Range	Points
n_d	4500	2K - 10K	2K, 3K, 4K, 4.5K, 5K, 6K, 7K, and 10K
FL	15.0 T/Ac	5 - 30 T/Ac	5, 15.0, 30 T/Ac
E_{fuel}	7000 Btu/lb	6000 - 9000	6K, 7K, 8K, 9K
A	15.0 mi ²	1.0 - 25.0 mi ²	1.0, 5.0, 10.0 15.0, 25.0 mi ²
t	--	(Same as in Section IA. 4)	
Δt_V	360 sec	--	--
r	(Case 2-b)		
M	.01 ft/sec	.005 - .2 ft/sec	.005, .01, .015, .2
L	.1 ft/sec	--	--
K_1	5.0 ft ² /sec	--	--
A_{SV}	(Use Table IA-II)		
$E_{frac, viol}$	0.4	0.2 - 0.8	0.2, 0.4, 0.6, 0.8
Δt_R	4200 sec	--	--
A_{SR}	(Use Table IA-II)		
$E_{frac, resid}$	0.6	0.2 - 0.8	0.2, 0.4, 0.6, 0.8

APPENDIX III

COMPUTER PROGRAM FOR INRUSH WIND AND SENSITIVITY CALCULATIONS

III.1 General

The following program is in two parts. Part I calculates v_w as a function of time and n for each combination of the other input variables as defined in Section IA.4. Part II calculates $\frac{\partial v_w}{\partial \mu_i}$ ($i = 1, \dots, 7$) as a function of μ_i and time, with μ_j ($j \neq i$) held constant, as discussed in Section II.4. The inputs for Part II are listed in Table II-I. The program is written in FORTRAN IV for an IBM System/360 Model 40G digital computer.

III.2 Data Cards

Thirteen data cards are required. The first six data cards contain the input data for Part I of the program. Card 1 has format 8F10.4 and contains the following variables:

<u>Columns</u>	<u>Parameter</u>	<u>Program Symbol</u>	<u>Units</u>
1-10	E_{fuel}	EF	Btu/lb
11-20	Δt_V	DTV	seconds
21-30	Δt_R	DTR	seconds
31-40	$E_{\text{frac, viol}}$	EFV	number
41-50	$E_{\text{frac, resid}}$	EFR	number

Card 2 has format 3F10.6 and contains, in cols. 1-10, the rate of area spread in square feet per second; in cols. 11-20, the rate of perimeter increase in feet per second; and in cols. 21-30, the rate of radial increase in feet per second.

Card 3 has format 8F10.4 and contains three values of fuel loading in tons per acre.

Card 4 has format 8F10.4 and contains five values of area in square miles.

Card 5 has format 8I8 and contains eight values of initial ignition density (n_d) in number per square mile.

Cards 6 and 7 have format 8F10.4 and contain ten values of time in seconds.

Card 8 has format 8I8 and is a flag card. If one wishes to perform the sensitivity calculations of Part II, an integer 2 should be put in col. 8. If one wishes to omit the sensitivity calculations, an integer 1 should be put in col. 8.

The last five cards contain the additional inputs needed for Part II of the program. Card 7 has format I8, 6F10.4 and contains the representative values of the seven μ_i arranged in the following manner:

<u>Columns</u>	<u>Parameter</u>	<u>Program Symbol</u>	<u>Units</u>
1- 8	Rep. value of n_d	NDR	number
9-18	Rep. value of A	AR	square miles
19-28	Rep. value of FL	FLR	tons/acre
29-38	Rep. value of E_{fuel}	EFP	Btu/lb
39-48	Rep. value of $E_{\text{frac, viol}}$	EFVR	number
49-58	Rep. value of $E_{\text{frac, resid}}$	EFRR	number
59-68	Rep. value of M	AMR	feet/second

Cards 10-13 have format 4F10.5 and contain the points across the range of the four μ_i which were used as constant in Part I.

<u>Card</u>	<u>Parameter</u>	<u>Program Symbol</u>	<u>No. of Points</u>	<u>Units</u>
8	E_{fuel}	EF2(I)	4	Btu/lb
9	$E_{\text{frac, viol}}$	EFV2(I)	4	number
10	$E_{\text{frac, resid}}$	EFR2(I)	4	number
11	M (radial spread rate)	AM2(I)	4	feet/second

III. 3 Program Listing

(See following pages.)

	DIMENSION A(5),T(10),N(8),CN(8),FL(3),NC(10),ND(8),VW(10,8),TM(10)	1
	DIMENSION EF2(4),EFV2(4),EFR2(4),AM2(4),ASVR(10),ASRR(10),Q3(10)	2
	\$,PVW(8,10),NA(8)	3
C	PART ONE CALCULATES THE SET OF RADIAL INDRAFT WIND VELOCITIES	4
C	RESULTING FROM 8 VALUES OF N, THE NUMBER OF INITIAL FIRES, AT 10	5
C	GIVEN TIMES AFTER IGNITION. THIS SET IS PRODUCED FOR COMBINATIONS	6
C	OF 3 FUEL LOADINGS, 5 AREAS, AND 3 TYPES OF FIRE SPREAD.	7
C	THE FOLLOWING ARE INPUT VARIABLES:	8
C	EF, ENERGY CONTENT OF FUEL (BTU/POUND); DTV, VIOLENT BURNING TIME	9
C	(SECONDS); EFV, VIOLENT BURNING FRACTION; DTR, RESIDUAL BURNING TIME	10
C	(SECONDS); EFR, RESIDUAL BURNING FRACTION; AK, RATE OF AREA CHANGE,	11
C	(SQUARE FEET/SEC); AL, RATE OF PERIMETER CHANGE (FEET/SEC); AM,	12
C	RATE OF RADIUS CHANGE (FEET/SEC); FL(3), FUEL LOADINGS (TONS/ACRE);	13
C	A(5), AREAS (SQUARE MILES); ND(8), NUMBER OF INITIAL FIRES PER SQUAR	14
C	MILE (NUMBER/MILES SQUARED); T(10), TIMES AFTER IGNITION (SECONDS).	15
1	FORMAT (8F10.4)	16
2	FORMAT (8I8)	17
3	FORMAT (3F10.6)	18
	READ (1,1) EF,DTV,DTR,EFV,EFR	19
	READ (1,3) AK,AL,AM	20
	READ (1,1) (FL(I),I=1,3)	21
	READ (1,1) (A(I),I=1,5)	22
	READ (1,2) (ND(I),I=1,8)	23
	READ (1,1) (T(I),I=1,10)	24
	AK2=(AL*AL)/6.28318	25
	AK3=(AM*AM)*6.28318	26
	FMF=2.78784E+07	27
	FDV=EFV/DTV	28
	EDR=EFR/DTR	29
	DTVR=DTV+DTR	30
C	ICASE INDICATES WHICH TYPE OF FIRE SPREAD IS BEING USED:	31
C	1 = CONSTANT AREA CHANGE; 2 = CONSTANT PERIMETER CHANGE;	32
C	3 = CONSTANT RADIAL CHANGE.	33
	DO 45 ICASF=1,3	34
	IF (ICASE-2) 6,4,5	35
4	CONST=AK2	36
	GO TO 6	37
5	CONST=AK3	38
C	M INDEXES OVER THE 3 FUEL LOADINGS. L INDEXES OVER THE 5 AREAS	39
6	DO 45 M=1,3	40
	DO 45 L=1,5	41
	DO 7 I=1,8	42
	N(I)=ND(I)*A(L)	43
	CN(I)=N(I)**(1.0/3.0)	44
	AA=((FL(M)*EF)**(1.0/3.0))/(A(L)**(1.0/6.0))*0.031501	45
C	STATEMENTS 8-15 COMPUTE VELOCITIES FOR ICASE=1.	46
	IF (ICASE-1) 8,8,16	47
8	R=AK	48
	DO 15 K=1,10	49
	TIME=T(K)	50
	IF (TIME-DTV) 9,9,10	51
9	ASV=R*TIME	52

	ASR=0.0	53
	ASB0=0.0	54
	GO TO 13	55
10	IF (TIME-DTVR) 11,11,12	56
11	ASV=R*DTV	57
	ASR=R*(TIME-DTV)	58
	ASB0=0.0	59
	GO TO 13	60
12	ASV=R*DTV	61
	ASR=R*DTR	62
	ASB0=R*(TIME-DTVR)	63
13	AAA=AA*((ASV*EDV+ASR*EDR)**(1.0/3.0))	64
	DO 14 I=1,8	65
14	VW(K,I)=AAA*CN(I)	66
15	NC(K)=A(L)/(AK*TIME)*FMF	67
	GO TO 24	68
C	STATEMENTS 16-23 COMPUTE VELOCITIES FOR ICASE=2 OR 3.	69
16	DO 23 K=1,10	70
	TIME=T(K)	71
	R=CONST*TIME	72
	RH=R/2.0	73
	IF (TIME-DTV) 17,17,18	74
17	ASV=RH*TIME	75
	ASR=0.0	76
	ASB0=0.0	77
	GO TO 21	78
18	IF (TIME-DTVR) 19,19,20	79
19	ASV=RH*(DTV*(2.0-(DTV/TIME)))	80
	ASR=RH*(TIME-DTV*(2.0-DTV/TIME))	81
	ASB0=0.0	82
	GO TO 21	83
20	ASV=RH*DTV*(2.0-DTV/TIME)	84
	ASR=RH*DTR*(2.0-(2.0*DTV+DTR)/TIME)	85
	ASB0=RH*(TIME-DTVR*(2.0-DTVR/TIME))	86
21	AAA=AA*((ASV*EDV+ASR*EDR)**(1.0/3.0))	87
	DO 22 I=1,8	88
22	VW(K,I)=AAA*CN(I)	89
23	NC(K)=(2.0*A(L))/(CONST*TIME*TIME)*FMF	90
24	WRITE (3,25)	91
25	FORMAT ('1',T39,'VW IS THE RADIAL INDRAFT WIND VELOCITY IN MILES P ER HOUR'/'0',T23,'N IS THE NUMBER OF INITIAL FIRES, NC IS THE REQU \$IRED N FOR COALESCENCE BY THE GIVEN TIME'//)	92 93 94
	C=DTV/60.0	95
	B=DTR/60.0	96
	WRITE (3,26) EF,Efv,EFR,C,B	97
26	FORMAT ('0',T41,'ENERGY CONTENT OF THE FUEL IS ',F9.1,' BTU PER PO UND'/'0',T9,'VIOLENT BURNING FRACTION IS ',F6.2,T85,'RESIDUAL BUR \$NING FRACTION IS ',F6.2/1X,T9,'VIOLENT BURNING TIME IS ',F6.2,' MI \$NUTES',T85,'RESIDUAL BURNING TIME IS ',F6.2,' MINUTES'//)	98 99 100 101
	IF (ICASE-2) 27,28,29	102
27	WRITE (3,30) AK	103
	GO TO 33	104

28	WRITE (3,31) AL	105
	GO TO 33	106
29	WRITE (3,32) AM	107
30	FORMAT ('0',T32,'CASE 1, CONSTANT AREA INCREASE, K = ',E13.6,' (SQ	108
	SUARE FEET/SECOND)')//)	109
31	FORMAT ('0',T33,'CASE 2A, CONSTANT PERIMETER INCREASE, L = '	110
	\$,E13.6,' (FEET/SECOND)')//)	111
32	FORMAT ('0',T34,'CASE 2B, CONSTANT RADIAL INCREASE, M = ',E13.6,'	112
	\$(FEET/SECOND)')//)	113
33	WRITE (3,34) A(L),FL(M)	114
34	FORMAT ('0',T26,'AREA = ',F10.4,' SQUARE MILES ',10X,' FUEL LOADIN	115
	\$G = ',F10.4,' TONS PER ACRE')//)	116
	DO 35 I=1,10	117
35	TM(I)=T(I)/60.0	118
	DO 40 II=1,2	119
	IF (II-1) 36,36,37	120
36	IA=1	121
	IB=5	122
	GO TO 38	123
37	IA=6	124
	IB=10	125
38	WRITE (3,41) (TM(I),I=IA,IB)	126
	WRITE (3,42)	127
	DO 39 K=1,8	128
39	WRITE (3,43) (N(K),VW(I,K),I=IA,IB)	129
40	WRITE (3,44) (NC(I),I=IA,IB)	130
41	FORMAT ('0',T4,5(4X,' FOR ',F6.1,' MINUTES ')//)	131
42	FORMAT ('0',T4,5(6X,'N',11X,'VW',4X)//)	132
43	FORMAT (1X,T4,5(3X,16,2X,E13.6))	133
44	FORMAT ('0',T4,5(7X,'NC =',110,3X)////)	134
45	CONTINUE	135
	READ (1,2) N2	136
	IF (N2-2) 103,46,103	137
C	PART TWO CALCULATES THE PARTIAL DERIVATIVES WITH RESPECT TO THE	138
C	FOLLOWING VARIABLES: N,A,FL,EF,EFFV,EFR,R. EACH PARTIAL IS EVALUATED	139
C	FOR ALL THE INPUT VALUES OF THE VARIABLE AND AT EACH OF THE TIMES	140
C	USED IN PART ONE.	141
C	ADDITIONAL INPUT NEEDED FOR PART TWO IS:	142
C	NDR,AR,FLR,FFP,FFVR,FFRR,AMP (THESE ARE MOST PROBABLE OR REPRESENTAT	143
C	VALUES FOR THE VARIABLES FOR WHICH THE PARTIALS ARE EVALUATED.)	144
C	EF2(4), ENERGY CONTENT OF THE FUEL(BTU/POUND); EFFV2(4), VIOLENT	145
C	BURNING FRACTION; FFR2(4), RESIDUAL BURNING FRACTION; AM2(4), RATE	146
C	OF RADIAL INCREASE(FEET/SEC).	147
46	READ (1,47) NDR,AR,FLR,FFP,FFVR,FFRR,AMP	148
47	FORMAT (18,6F10.2)	149
	READ (1,48) (EF2(I),I=1,4)	150
	READ (1,48) (EFFV2(I),I=1,4)	151
	READ (1,48) (FFR2(I),I=1,4)	152
	READ (1,48) (AM2(I),I=1,4)	153
48	FORMAT (4F10.5)	154
C	THROUGH 53 CALCULATES Q3, THE PART OF THE PARTIALS WHICH IS ONLY	155
C	TIME-DEPENDENT	156

	AK2=AMR*AMR*6.28318	157
	DO 53 K=1,10	158
	TIME=T(K)	159
	RRH=AK2*TIME/2.0	160
	IF (TIME-DTV) 49,49,50	161
49	ASVR(K)=RRH*TIME	162
	ASRR(K)=0.0	163
	GO TO 53	164
50	IF (TIME-DTVR) 51,51,52	165
51	ASVR(K)=RRH*(DTV*(2.0-DTV/TIME))	166
	ASRR(K)=RRH*(TIME-DTV*(2.0-DTV/TIME))	167
	GO TO 53	168
52	ASRR(K)=RRH*(DTR*(2.0-((2.0*DTV+DTR)/TIME)))	169
	ASVR(K)=RRH*(DTV*(2.0-DTV/TIME))	170
53	Q3(K)=((ASVR(K)*EFVR/DTV)+(ASRR(K)*EFRR/DTR))*((1.0/3.0)	171
C	PARTIALS WITH RESPECT TO N(NUMBER OF INITIAL FIRES) FOR 8 N	172
	BB=.031501*((FLR*EFP)**(1.0/3.0)/(3.0*(AR**((1.0/6.0))))	173
	DO 54 I=1,8	174
	BBB=BR/(ND(I)*AR)**(2.0/3.0)	175
	DO 54 K=1,10	176
54	PVW(I,K)=BBB*Q3(K)	177
55	FORMAT ('1',T40,'PARTIAL DERIVATIVES OF THE RADIAL INDRAFT WIND VE	178
	\$LOCITY')	179
56	FORMAT (1X,T44,'WITH RESPECT TO N, THE NUMBER OF INITIAL FIRES')	180
57	FORMAT (1X,T31,'FOR CASE 28, CONSTANT RADIAL INCREASE, M = '	181
	\$,E13.6,' FEET PER SECOND'//)	182
58	FORMAT ('0',T4,'WITH AREA = ',F10.5,' SQUARE MILES FUEL LOADING	183
	\$G = ',F10.4,' TONS PER ACRE ENERGY OF FUEL = ',F10.4,' BTU PER	184
	\$ POUND')	185
59	FORMAT (1X,T9,'VIOLENT BURNING FRACTION = ',F6.2,T85,'RESIDUAL BUR	186
	\$NING FRACTION = ',F6.2)	187
60	FORMAT (1X,T9,'VIOLENT BURNING TIME = ',F6.2,' MINUTES',T85,'RESID	188
	\$UAL BURNING TIME = ',F6.2,' MINUTES'/////)	189
61	FORMAT ('0',T15,'N =',8(3X,I8,3X))	190
62	FORMAT ('0',T3,F6.1,' MINUTES ',8(1X,E13.6))	191
	WRITE (3,55)	192
	WRITE (3,56)	193
	WRITE (3,57) AMR	194
	WRITE (3,58) AR,FLR,EFP	195
	WRITE (3,59) EFVR,EFRR	196
	WRITE (3,60) C,B	197
	DO 63 I=1,8	198
63	NA(I)=ND(I)*AR	199
	WRITE (3,61) (NA(I),I=1,8)	200
	DO 64 K=1,10	201
64	WRITE (3,62) TM(K),(PVW(I,K),I=1,9)	202
C	PARTIALS WITH RESPECT TO A(AREA) FOR 5 A	203
	BB=.031501*(FLR*EFP)**(1.0/3.0)	204
	DO 65 I=1,5	205
	BBB=BB*(NDR*AR)**(1.0/3.0)/(-6.0*A(I)**(7.0/6.0))	206
	DO 65 K=1,10	207
65	PVW(I,K)=BBB*Q3(K)	208

	NR=NDR*AR	209
	WRITE (3,55)	210
	WRITE (3,66)	211
66	FORMAT (1X,T51,'WITH RESPECT TO A, THE TOTAL AREA')	212
	WRITE (3,57) AMR	213
	WRITE (3,67) NR,FLR,FFP	214
67	FORMAT ('0',T4,'WITH INITIAL NUMBER OF FIRES = ',I8,3X,'FUEL LOADI	215
	\$NG = ',F10.4,' TONS PER ACRE',3X,'ENERGY OF FUEL = ',F10.4,' BTU P	216
	\$ER POUND')	217
	WRITE (3,59) EFVR,EFRR	218
	WRITE (3,60) C,R	219
	WRITE (3,69) (A(I),I=1,5)	220
	DO 68 K=1,10	221
68	WRITE (3,70) TM(K),(PVW(I,K),I=1,5)	222
69	FORMAT ('0',T19,'A =',5(8X,F10.5,2X)/1X,T13,' (SQUARE MILES)')//)	223
70	FORMAT ('0',T7,F6.1,' MINUTES ',5(7X,E13.6))	224
C	PARTIALS WITH RESPECT TO FL(FUEL LOADING) FOR 3 FL	225
	BB=.031501*(NDR*AR*FFP)**(1.0/3.0)/(3.0*AR**(1.0/6.0))	226
	DO 71 I=1,3	227
	BBB=BB/FL(I)**(2.0/3.0)	228
	DO 71 K=1,10	229
71	PVW(I,K)=BBB*Q3(K)	230
	WRITE (3,55)	231
	WRITE (3,72)	232
72	FORMAT (1X,T49,'WITH RESPECT TO FL, THE FUEL LOADING')	233
	WRITE (3,57) AMR	234
	WRITE (3,73) NR,AR,FFP	235
73	FORMAT ('0',T4,'WITH INITIAL NUMBER OF FIRES = ',I8,5X,'AREA = '	236
	\$,F10.5,' SQUARE MILES',5X,'ENERGY OF FUEL = ',F10.4,' BTU PER POUN	237
	\$D')	238
	WRITE (3,59) EFVR,EFRR	239
	WRITE (3,60) C,R	240
	WRITE (3,75) (FL(I),I=1,3)	241
	DO 74 K=1,10	242
74	WRITE (3,76) TM(K),(PVW(I,K),I=1,3)	243
75	FORMAT ('0',T32,'FL =',3(11X,F10.4,2X)/1X,T26,'(TONS PER ACRE)')//)	244
76	FORMAT ('0',T22,F6.1,' MINUTES ',3(10X,E13.6))	245
C	PARTIALS WITH RESPECT TO FF(ENERGY CONTENT OF FUEL) FOR 4 EF	246
	BR=(.031501*(NDR*AR*FLR)**(1.0/3.0))/(3.0*AR**(1.0/6.0))	247
	DO 77 I=1,4	248
	BBB=BR/FF2(I)**(2.0/3.0)	249
	DO 77 K=1,10	250
77	PVW(I,K)=BBB*Q3(K)	251
	Q12=.031501*(NDR*AR*FLP*FFP)**(1.0/3.0)/AR**(1.0/6.0)	252
	WRITE (3,55)	253
	WRITE (3,78)	254
78	FORMAT (1X,T42,'WITH RESPECT TO FF, THE ENERGY CONTENT OF THE FUEL	255
	\$')	256
	WRITE (3,57) AMR	257
	WRITE (3,79) NR,AR,FLP	258
79	FORMAT ('0',T4,'WITH INITIAL NUMBER OF FIRES = ',I8,5X,'AREA = '	259
	\$,F10.5,' SQUAPE MILES',5X,'FUEL LOADING = ',F10.4,' TONS PER ACRE'	260

	\$)	261
	WRITE (3,59) EFVR,EFR	262
	WRITE (3,60) C,R	263
	WRITE (3,80) (EF2(I),I=1,4)	264
80	FORMAT ('0',T25,'EF =',4(11X,F10.5,2X)/1X,T17,'(BTU PER POUND)')//)	265
	DO 81 K=1,10	266
81	WRITE (3,82) TM(K),(PVW(I,K),I=1,4)	267
82	FORMAT ('0',T14,F6.1,' MINUTES ',4(10X,E13.6))	268
C	PARTIALS WITH RESPECT TO EFV(VIOLENT BURNING FRACTION) FOR 4 EFV2	269
	DO 83 I=1,4	270
	EFRC=1.0-EFV2(I)	271
	DO 83 K=1,10	272
	AAA=ASVR(K)/DTV	273
	BBB=ASRR(K)/DTR	274
83	PVW(I,K)=Q12*(AAA-BBB)/(3.0*(AAA*EFV2(I)+BBB*EFRC)**(2.0/3.0))	275
	WRITE (3,55)	276
	WRITE (3,84)	277
84	FORMAT (1X,T42,'WITH RESPECT TO EFV, THE VIOLENT BURNING FRACTION'	278
	\$)	279
	WRITE (3,57) AMR	280
	WRITE (3,79) NR,AR,FLR	281
	WRITE (3,85) EFP	282
85	FORMAT (1X,T9,'ENERGY OF FUEL =',F10.4,' BTU PER POUND',T85,'RESI	283
	DUAL BURNING FRACTION = 1.0-EFV')	284
	WRITE (3,60) C,R	285
	WRITE (3,87) (EFV2(I),I=1,4)	286
	DO 86 K=1,10	287
86	WRITE (3,82) TM(K),(PVW(I,K),I=1,4)	288
87	FORMAT ('0',T24,'EFV =',4(11X,F10.5,2X)/1X,T17,'(BTU PER POUND)')//)	289
C	PARTIALS WITH RESPECT TO EFR(RESIDUAL BURNING FRACTION) FOR 4 EFR2	290
	DO 88 I=1,4	291
	EFVC=1.0-EFR2(I)	292
	DO 88 K=1,10	293
	BBB=ASRR(K)/DTR	294
	AAA=ASVR(K)/DTV	295
88	PVW(I,K)=Q12*(BBB-AAA)/(3.0*(AAA*EFVC+BBB*EFR2(I))**((2.0/3.0))	296
	WRITE (3,55)	297
	WRITE (3,89)	298
89	FORMAT (1X,T42,'WITH RESPECT TO EFR, THE RESIDUAL BURNING FRACTION'	299
	\$')	300
	WRITE (3,57) AMR	301
	WRITE (3,79) NR,AR,FLR	302
	WRITE (3,90) EFP	303
90	FORMAT (1X,T9,'ENERGY OF FUEL =',F10.4,' BTU PER POUND',T85,'VIOLE	304
	NT BURNING FRACTION = 1.0-EFR')	305
	WRITE (3,60) C,R	306
	WRITE (3,92) (EFR2(I),I=1,4)	307
	DO 91 K=1,10	308
91	WRITE (3,82) TM(K),(PVW(I,K),I=1,4)	309
92	FORMAT ('0',T24,'EFR =',4(11X,F10.5,2X)/1X,T17,'(BTU PER POUND)')//)	310
C	PARTIALS WITH RESPECT TO R(CASE 28) FOR 4 AM	311
	Q123=Q12*EFVR/DTV	312

	DO 97 I=1,4	313
	CONST=AM2(I)*AM2(I)*6.28318	314
	DO 97 K=1,10	315
	TIME=T(K)	316
	R=CONST*TIME/2.0	317
	IF (TIME-DTV) 93,93,94	318
93	PVW(I,K)=Q123*TIME/(6.0*(R*TIME*EFVR/DTV)**(2.0/3.0))	319
	GO TO 97	320
94	IF (TIME-DTVR) 95,95,96	321
95	BB=Q12*((2.0-DTV/TIME)*EFVR+((TIME-DTV*(2.0-DTV/TIME))/DTR*EFRR))	322
	QQ=(R*(DTV*(2.0-DTV/TIME))*EFVR/DTV)+(R*(TIME-DTV*(2.0-DTV/TIME))	323
	*EFRR/DTR)	324
	PVW(I,K)=BB/(6.0*QQ**((2.0/3.0))	325
	GO TO 97	326
96	BB=Q12*((2.0-DTV/TIME)*EFVR+((2.0-(DTR+DTV)/TIME)*EFRR))	327
	QQ=(R*DTV*(2.0-DTV/TIME)*EFVR/DTV)+(R*(DTR*(2.0-(2.0*DTV+DTR)	328
	/TIME))*EFRR/DTR)	329
	PVW(I,K)=BB/(6.0*QQ**((2.0/3.0))	330
97	CONTINUE	331
	WRITE (3,55)	332
	WRITE (3,98)	333
98	FORMAT (1X,T26,'WITH RESPECT TO R, THE RATE OF SPREAD, FOR CASE 28	334
	\$,R = 6.28*M**2*TIME')	335
	WRITE (3,99) AR,NR,FLR,FFP	336
99	FORMAT ('0',T14,'WITH AREA = ',F10.5,' SQUARE MILES',T75,'NUMBER 0	337
	\$F INITIAL FIRES = ',I8/1X,T19,'FUEL LOADING = ',F10.4,' TONS PER A	338
	\$CRE',T75,'ENERGY OF FUEL = ',F10.5,' BTU PER POUND')	339
	WRITE (3,100) EFVR,EFRR,C,B	340
100	FORMAT (1X,T19,'VIOLENT BURNING FRACTION = ',F6.2,T75,'RESIDUAL BU	341
	\$RNING FRACTION = ',F6.2/1X,T19,'VIOLENT BURNING TIME = ',F6.2,' MI	342
	\$NUTES ',T75,'RESIDUAL BURNING TIME = ',F6.2,' MINUTES'////)	343
	WRITE (3,101) (AM2(I),I=1,4)	344
101	FORMAT ('0',T26,'M =',4(10X,F13.6)/1X,T18,'(FEET/SECOND)'///)	345
	DO 102 K=1,10	346
102	WRITE (3,82) TM(K),(PVW(I,K),I=1,4)	347
103	CONTINUE	348
	STOP	349
	END	350

Fig. III-1

SAMPLE OUTPUT PAGE FROM PART I

VM IS THE RADIAL INKRAFT WIND VELCCITY IN MILES PER HOUR
N IS THE NUMBER OF INITIAL FIRES, NC IS THE REQUIRED N FOR COALESCENCE BY THE GIVEN TIME

ENERGY CONTENT OF THE FUEL IS 7000.0 BTU PER POUND

VILIENT BURNING FRACTION IS 0.60
VILIENT BURNING TIME IS 0.60 MINUTES
RESIDUAL BURNING FRACTION IS 0.60
RESIDUAL BURNING TIME IS 70.00 MINUTES

CASE 20, CONSTANT RADIAL INCREASE, M = 0.100000E-01 (FEET/SECOND)

AREA = 15.0000 SQUARE MILES FUEL LOADING = 15.0000 TONS PER ACRE

2.0 MINUTES			4.0 MINUTES			6.0 MINUTES			8.0 MINUTES			16.0 MINUTES		
FUR	N	VM	FUR	N	VM	FUR	N	VM	FUR	N	VM	FUR	N	VM
10000	0.503648	01	30000	0.104773	02	30000	0.124576	02	30000	0.175383	02	30000	0.175383	02
45000	0.516588	01	45000	0.119935	02	45000	0.142604	02	45000	0.200764	02	45000	0.200764	02
60000	0.634617	01	60000	0.132006	02	60000	0.156556	02	60000	0.220969	02	60000	0.220969	02
67500	0.660048	01	67500	0.137291	02	67500	0.163241	02	67500	0.225817	02	67500	0.225817	02
75000	0.683620	01	75000	0.142199	02	75000	0.165075	02	75000	0.238032	02	75000	0.238032	02
80000	0.726459	01	80000	0.151109	02	80000	0.179659	02	80000	0.252946	02	80000	0.252946	02
105000	0.764759	01	105000	0.159076	02	105000	0.185143	02	105000	0.266283	02	105000	0.266283	02
150000	0.861308	01	150000	0.179159	02	150000	0.213022	02	150000	0.299901	02	150000	0.299901	02
NC = 7243734			NC = 23109344			NC = 10270817			NC = 5777334			NC = 1444334		
24.0 MINUTES			32.0 MINUTES			48.0 MINUTES			64.0 MINUTES			80.0 MINUTES		
FUR	N	VM	FUR	N	VM	FUR	N	VM	FUR	N	VM	FUR	N	VM
30000	0.210909	02	30000	0.240408	02	30000	0.290431	02	30000	0.338346	02	30000	0.373126	02
45000	0.241431	02	45000	0.275194	02	45000	0.332460	02	45000	0.382144	02	45000	0.427122	02
60000	0.282729	02	60000	0.302896	02	60000	0.369920	02	60000	0.420504	02	60000	0.470109	02
75000	0.312658	02	75000	0.315024	02	75000	0.380372	02	75000	0.437445	02	75000	0.488933	02
90000	0.342481	02	90000	0.326284	02	90000	0.394175	02	90000	0.453082	02	90000	0.506409	02
105000	0.364111	02	105000	0.346724	02	105000	0.418873	02	105000	0.481471	02	105000	0.538140	02
150000	0.410931	02	150000	0.365011	02	150000	0.440959	02	150000	0.506571	02	150000	0.566515	02
NC = 641921			NC = 361063			NC = 160481			NC = 90270			NC = 57773		

PARTIAL DERIVATIVES OF THE RADIAL INDRIFT WIND VELOCITY
WITH RESPECT TO A, THE TOTAL AREA
FOR CASE 2B, CONSTANT RADIAL INCREASE, M = 0.10000E-01 FEET PER SECOND

WITH INITIAL NUMBER OF FIRES = 67500 FUEL LOADING = 15.0000 TONS PER ACRE ENERGY OF FUEL = 7000.0000 BTU PER POUND
VIOLENT BURNING FRACTION = 0.40 RESIDUAL BURNING FRACTION = 0.60
VIOLENT BURNING TIME = 6.00 MINUTES RESIDUAL BURNING TIME = 70.00 MINUTES

Fig. III-2

SAMPLE OUTPUT PAGE FROM PART II

	A = (SQUARE MILES)	1.00000	5.00000	10.00000	15.00000	25.00000
2.0 MINUTES	-0.172753E 01	-0.264218E 00	-0.117696E 00	-0.733365E-01	-0.404108E-01	
4.0 MINUTES	-0.774229E 01	-0.419420E	-0.186830E 00	-0.116415E 00	-0.641481E-01	
6.0 MINUTES	-0.359341E 01	-0.549595E 00	-0.2444817E 00	-0.152546E 00	-0.840577E-01	
8.0 MINUTES	-0.427260E 01	-0.653473E 00	-0.291089E 00	-0.181379E 00	-0.999454E-01	
16.0 MINUTES	-0.601514E 01	-0.915987E 00	-0.409808E 00	-0.255353E 00	-0.140707E 00	
24.0 MINUTES	-0.723358E 01	-0.110634E 01	-0.492819E 00	-0.307077E 00	-0.169209E 00	
32.0 MINUTES	-0.824532E 01	-0.126106E 01	-0.561748E 00	-0.350027E 00	-0.192876E 00	
48.0 MINUTES	-0.990054E 01	-0.152348E 01	-0.678632E 00	-0.422858E 00	-0.233008E 00	
64.0 MINUTES	-0.114455E 02	-0.175115E 01	-0.780049E 00	-0.486051E 00	-0.267830E 00	
80.0 MINUTES	-0.127571E 02	-0.195726E 01	-0.871861E 00	-0.543260E 00	-0.299353E 00	

APPENDIX IV

RADIAL INRUSH WIND VELOCITY CURVES

The following 45 sets of curves are based upon the rationale and parameter values discussed in Appendix IA and are drawn from the output of Part I of the computer program listed in Appendix III.

Each curve on a page represents radial inrush wind velocity (v_w) as a function of the number of initial ignitions (n) for a specified time after ignition. Each family of curves shows ten different times with a specified combination of spread case, area, and fuel loading.

The curves are bounded above by the coalescence locus, as discussed in Appendix ID.

For all of the curves in this group, the fuel energy is taken as 7000 Btu/lb, the violent burning time as 6 minutes, the residual burning time as 70 minutes, the violent burning fraction as 0.4, and the residual burning fraction as 0.6 .

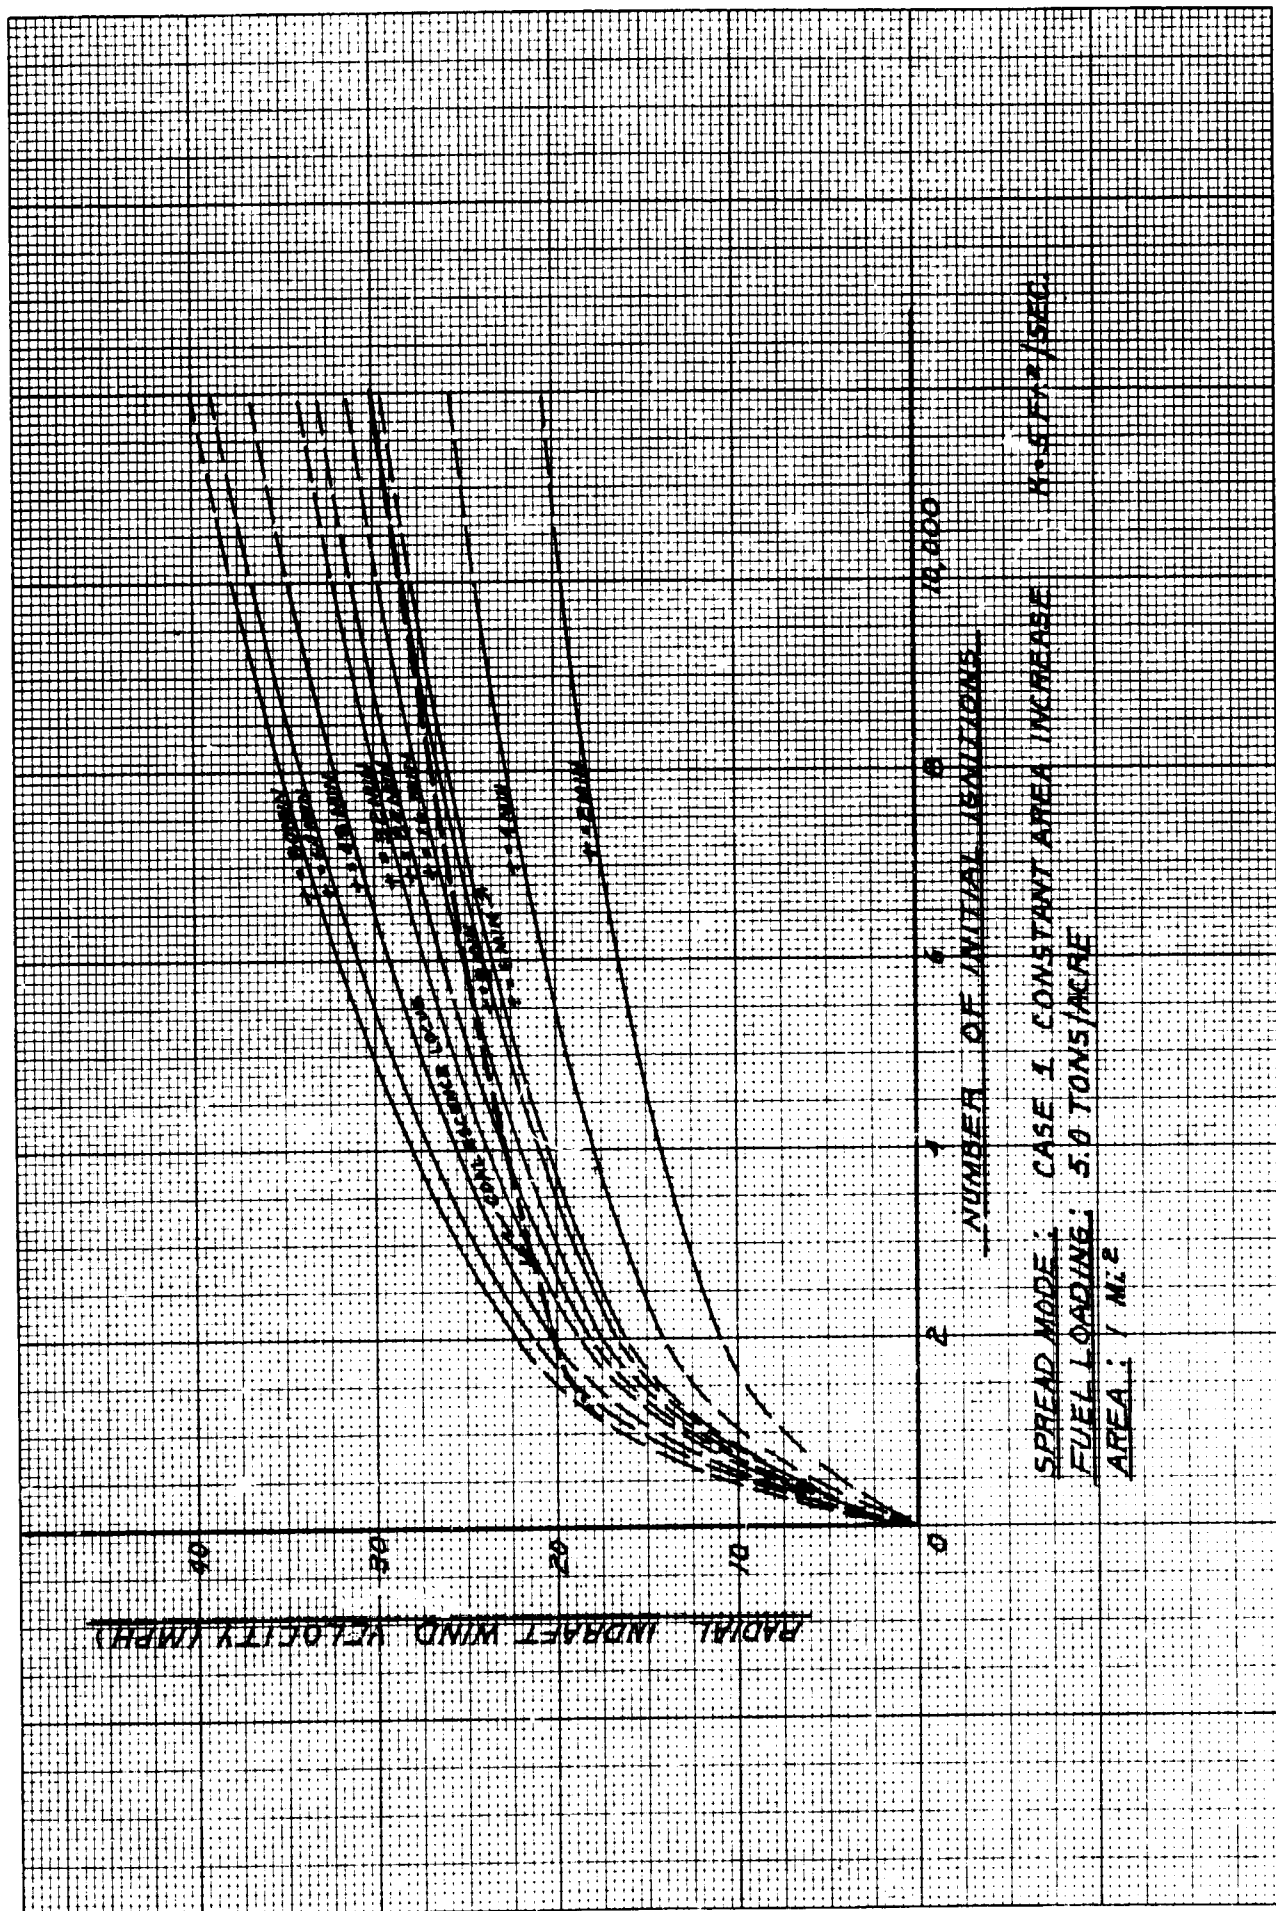


Fig. IV-1

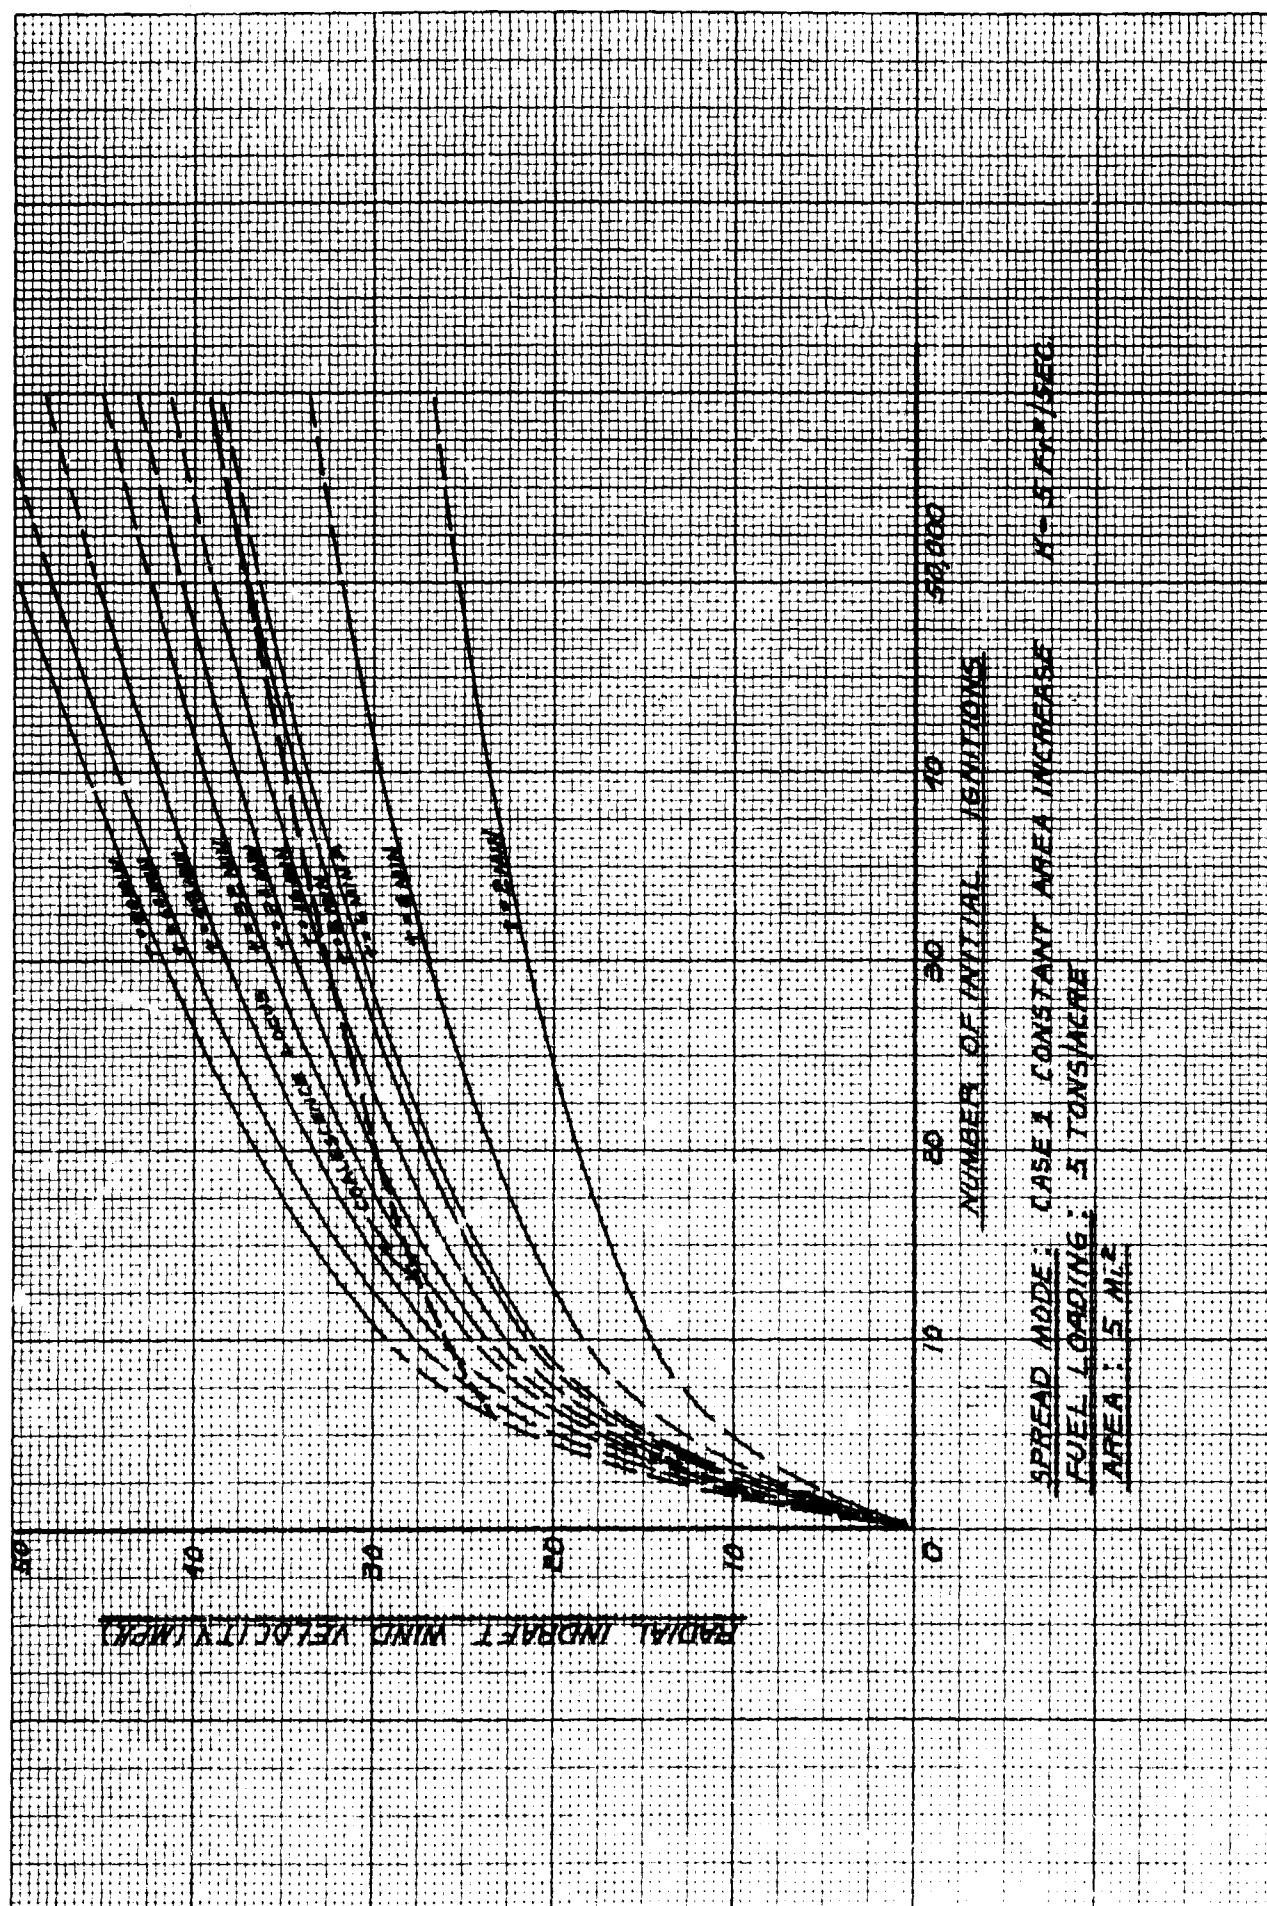


Fig. IV-2

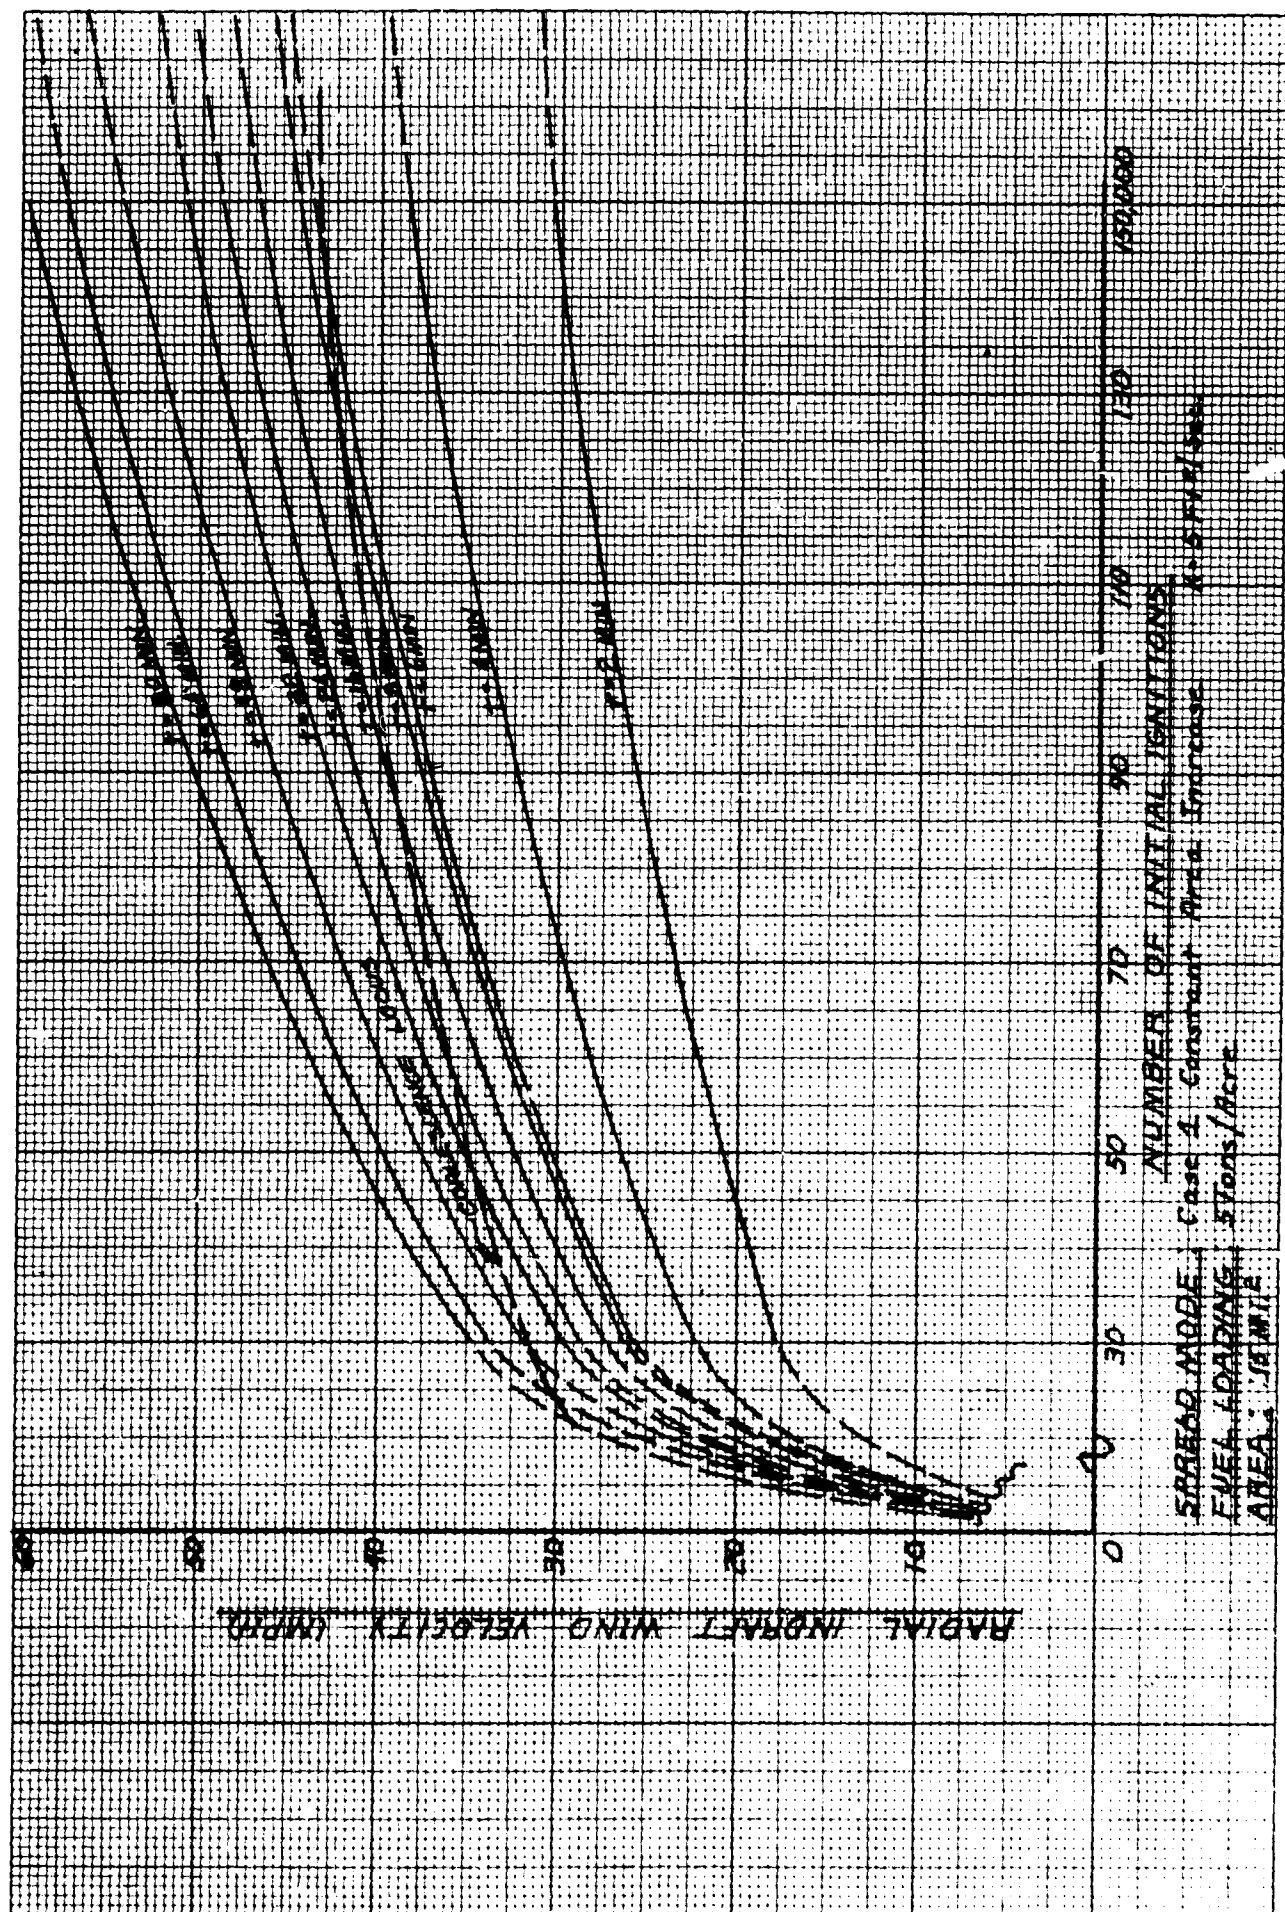


Fig. IV-4

FREDERICK POST COMPANY
 LUTHER CROSS SECTION 20 K 20 PER INCH

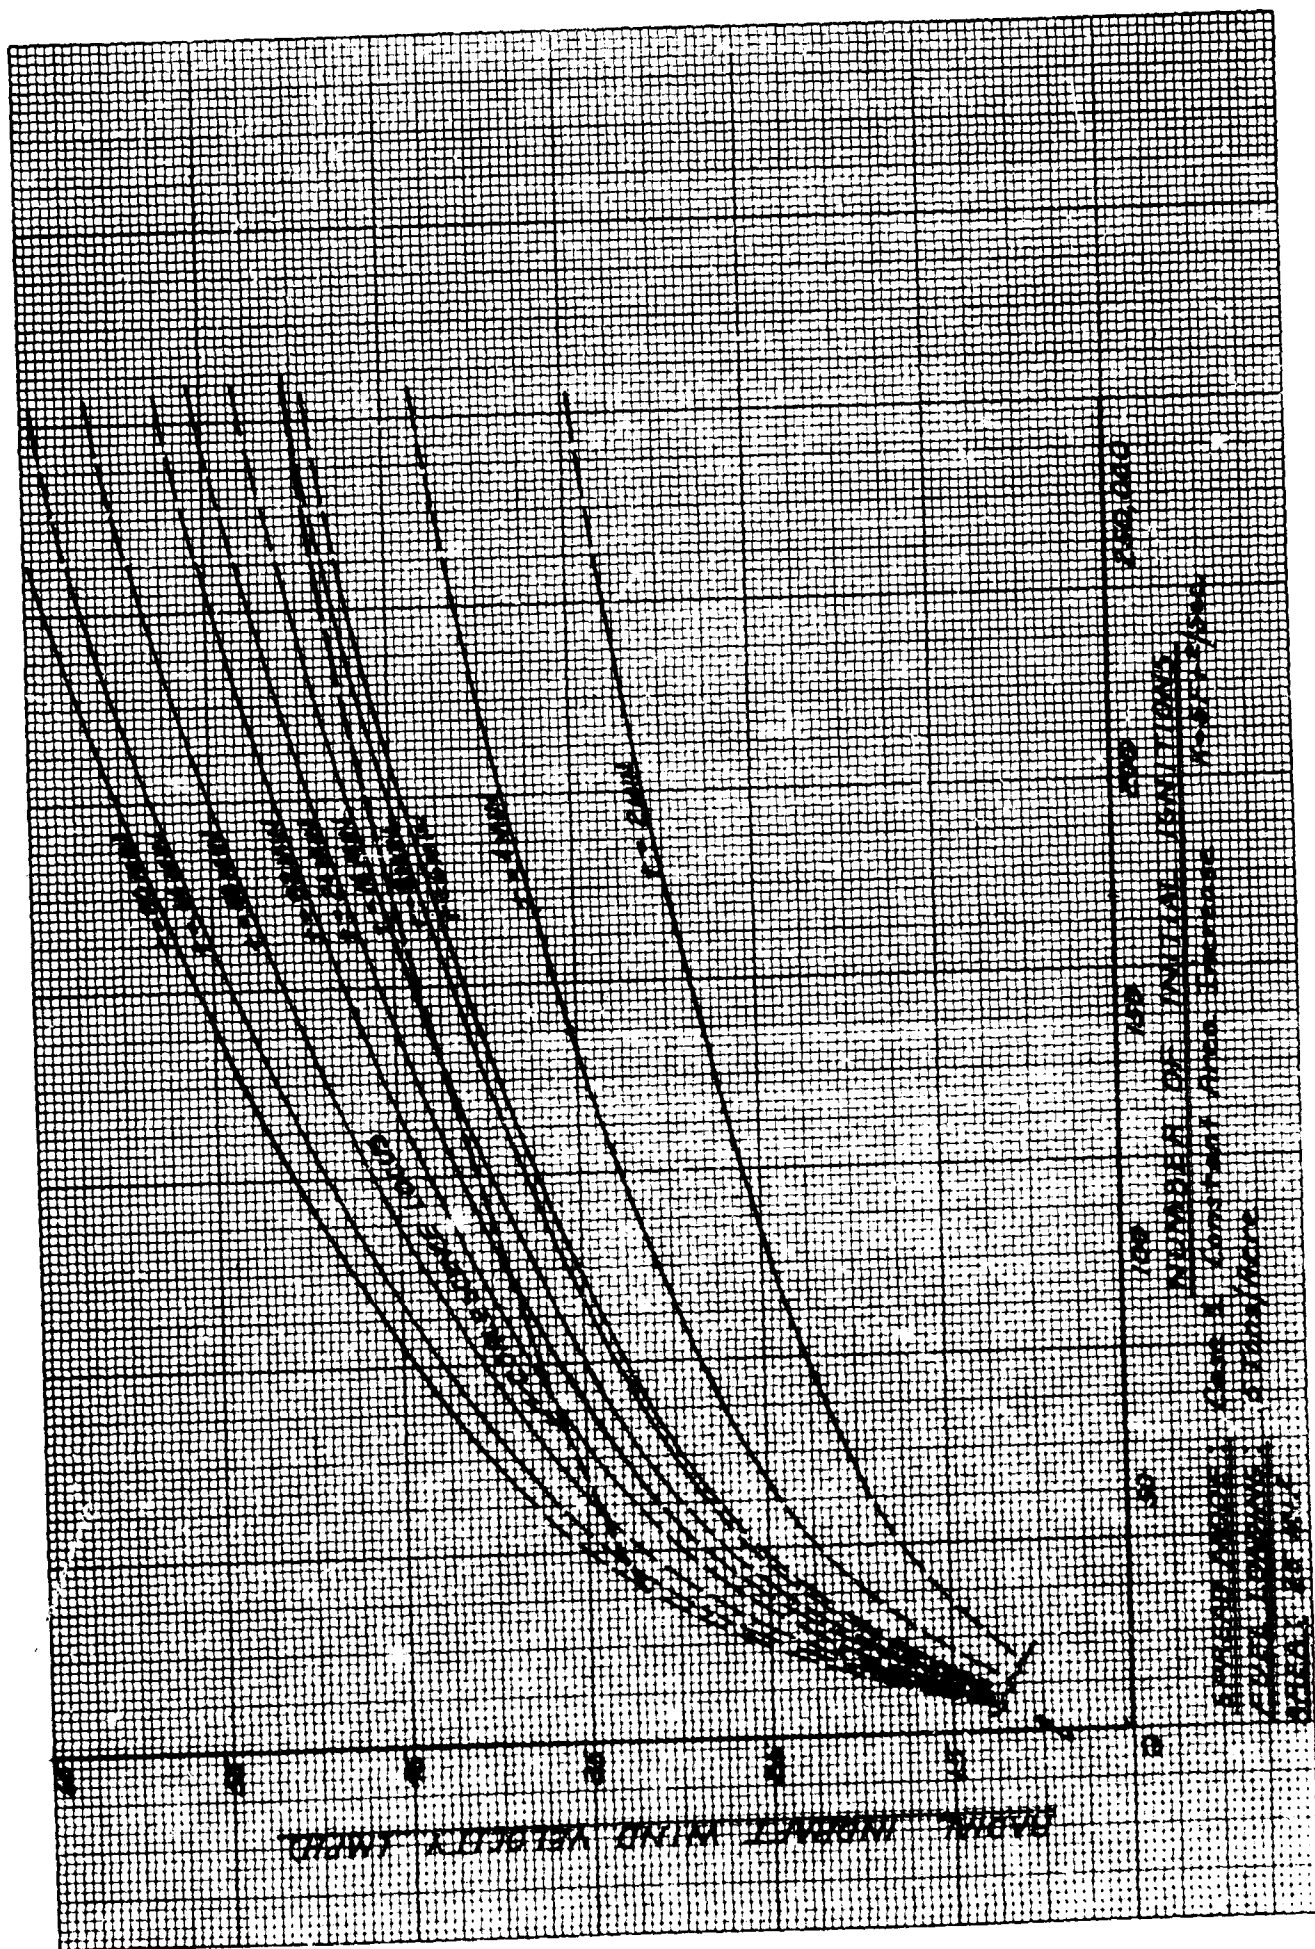


Fig. IV-5

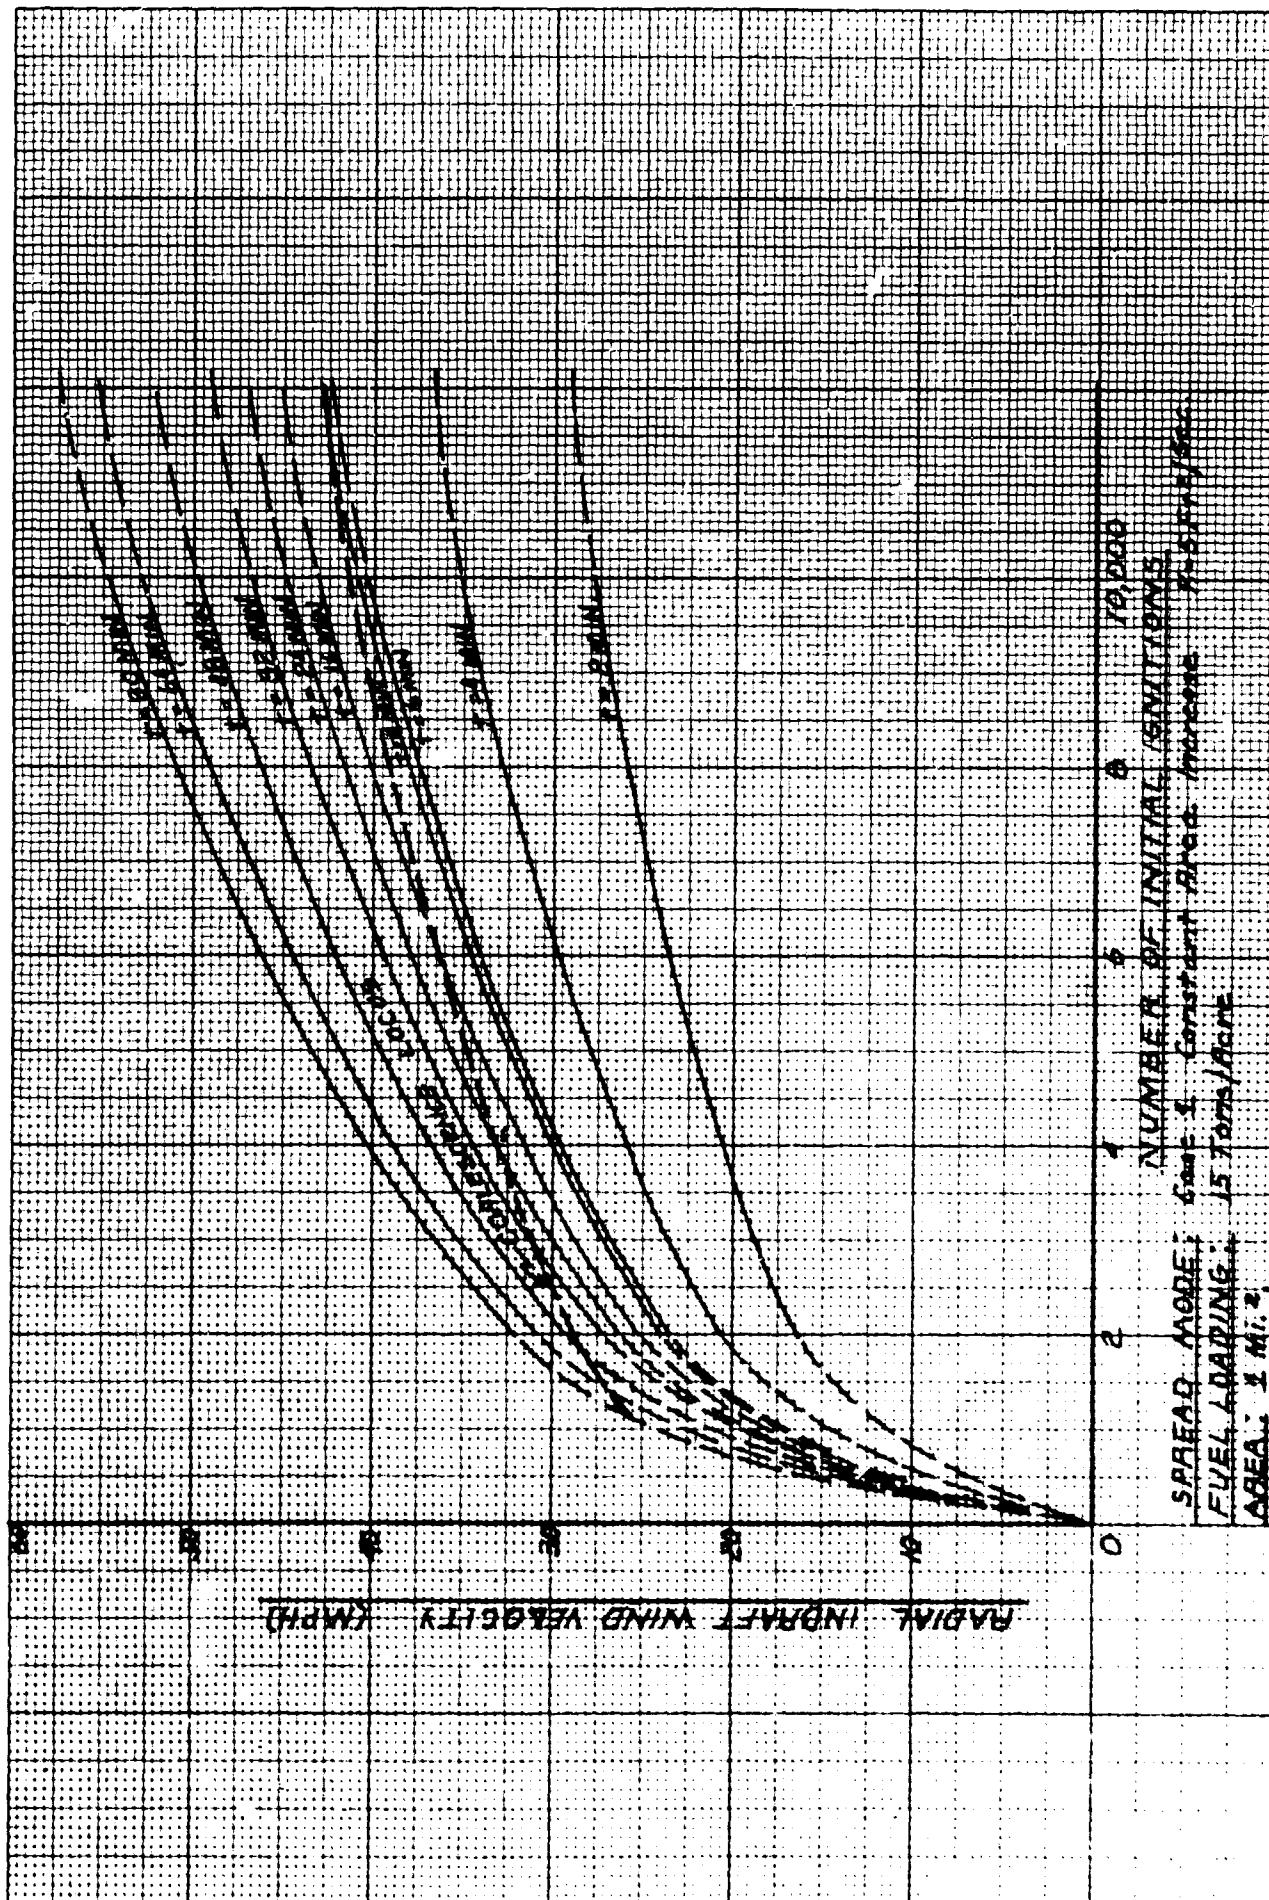


Fig. IV-6

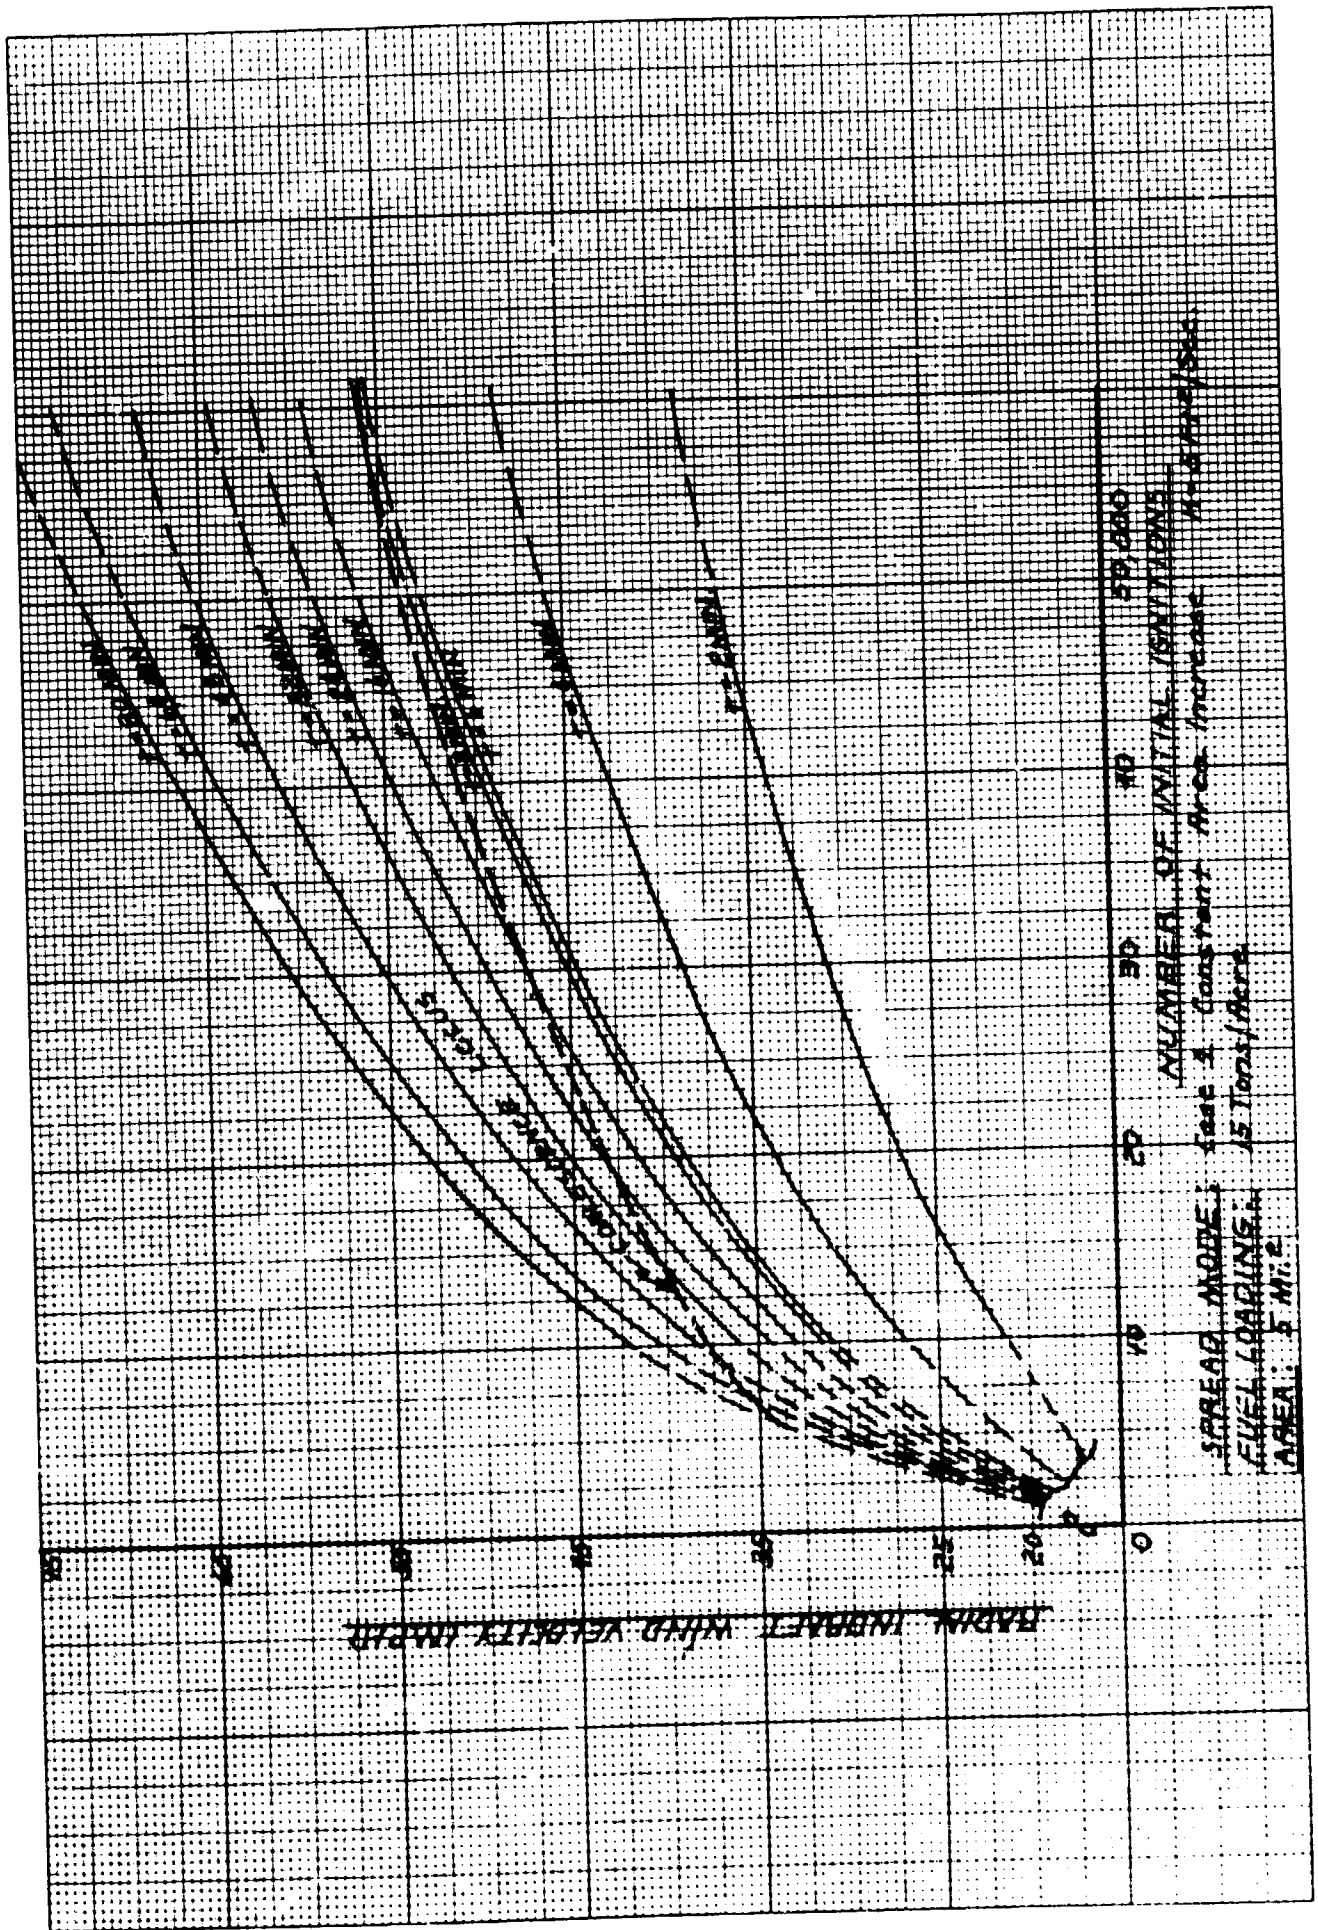


Fig. IV-7

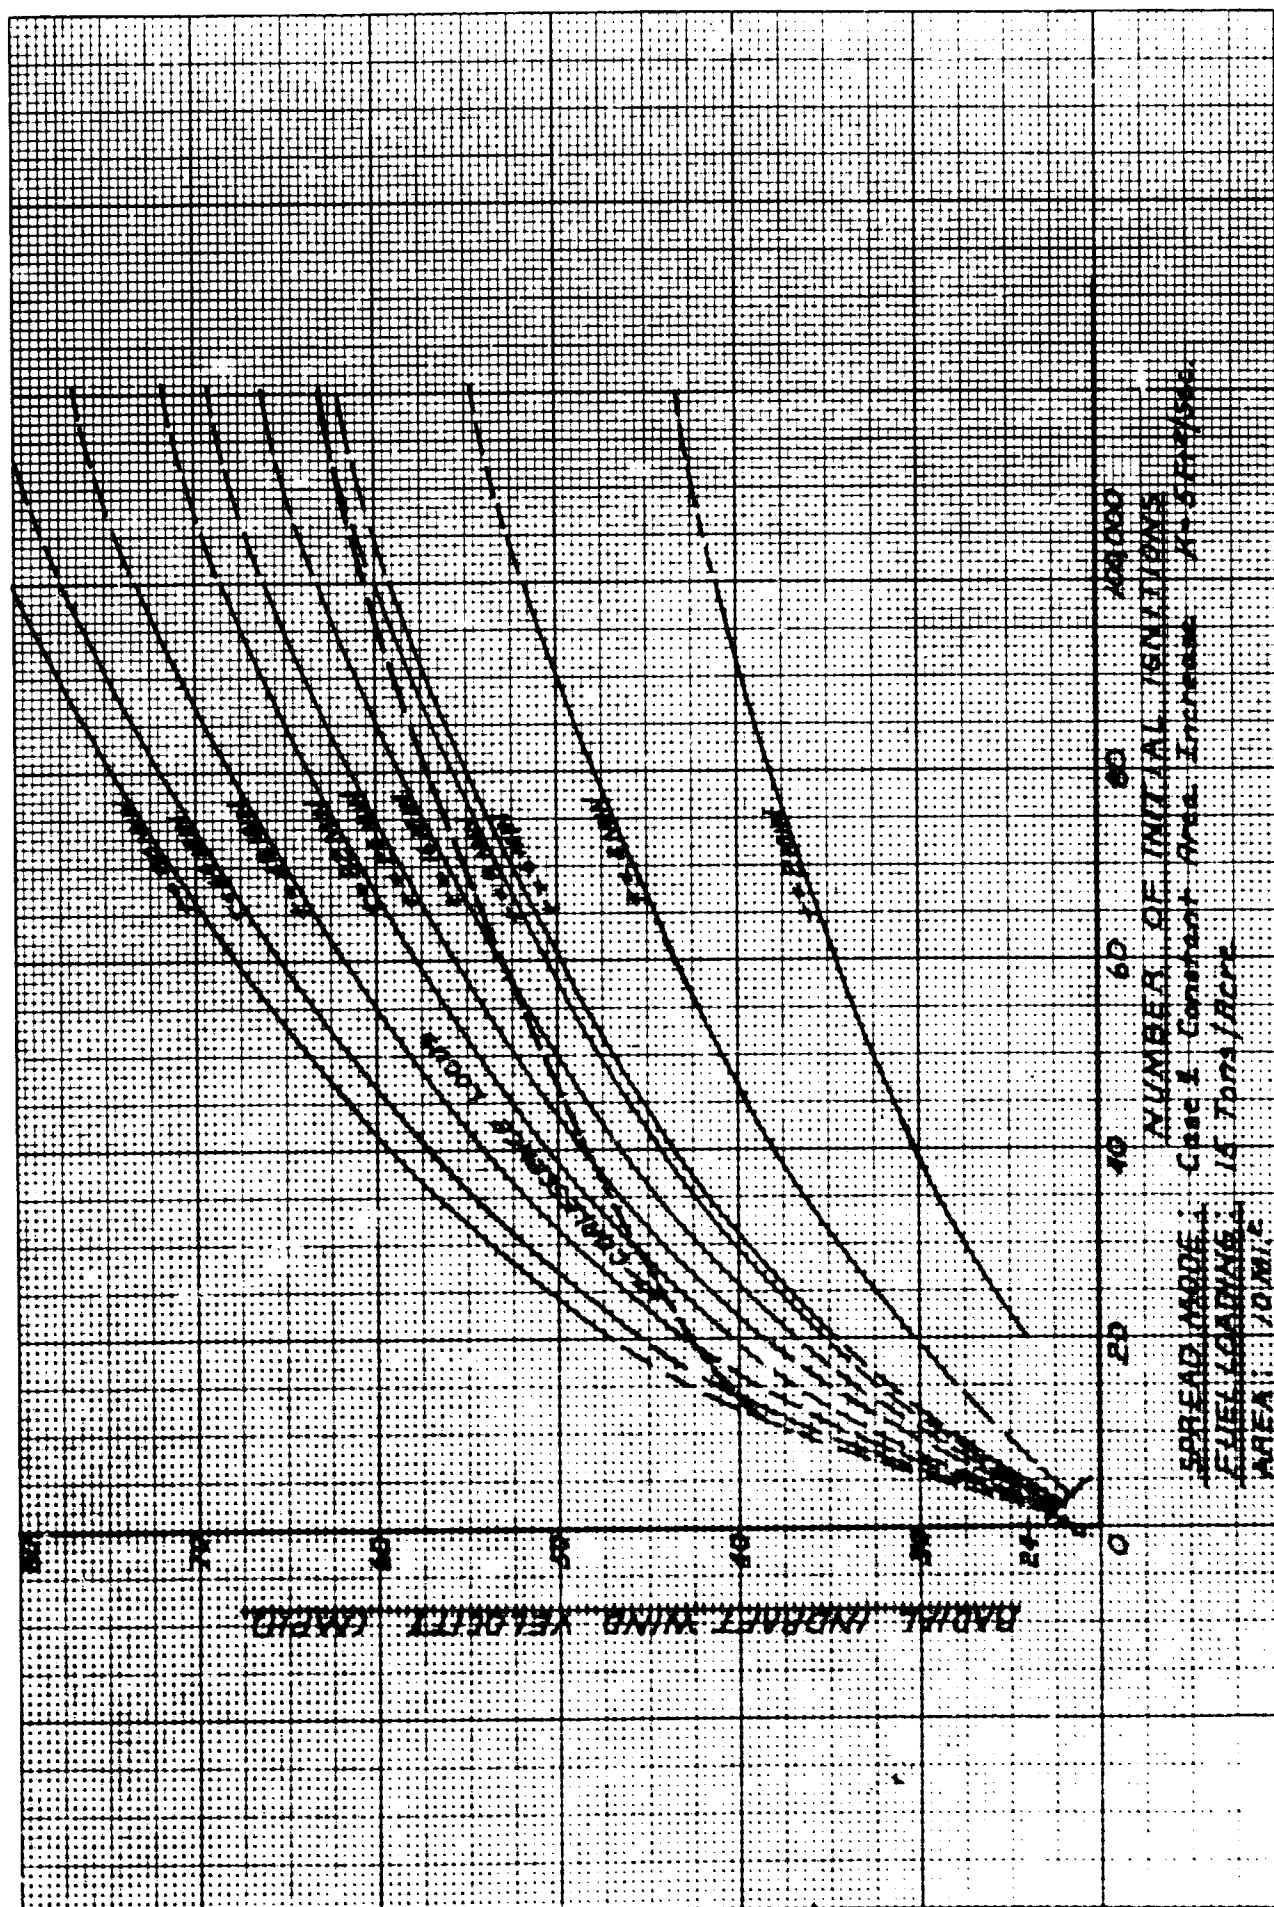


Fig. IV-8

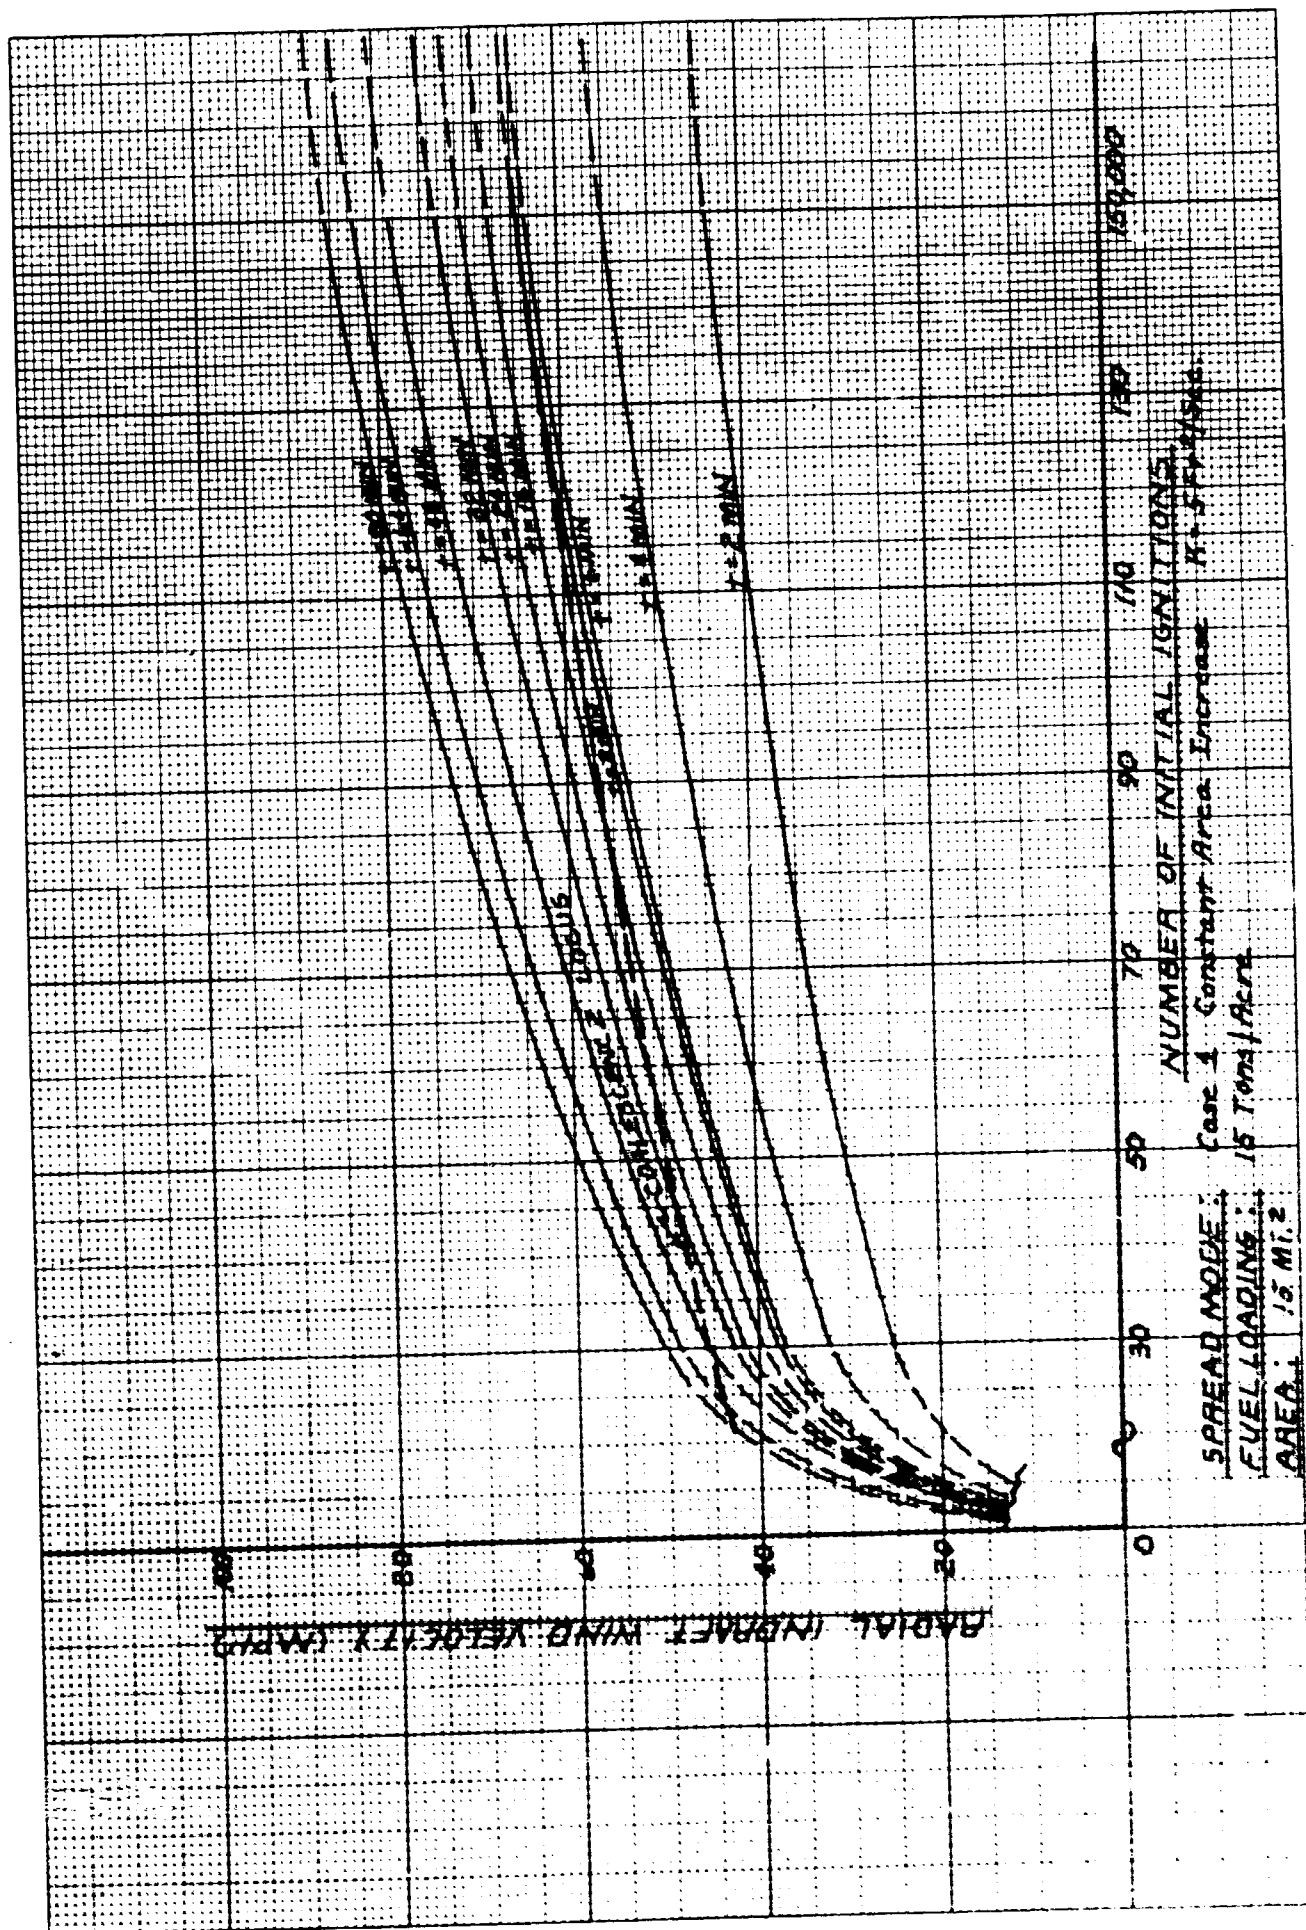


Fig. IV-9

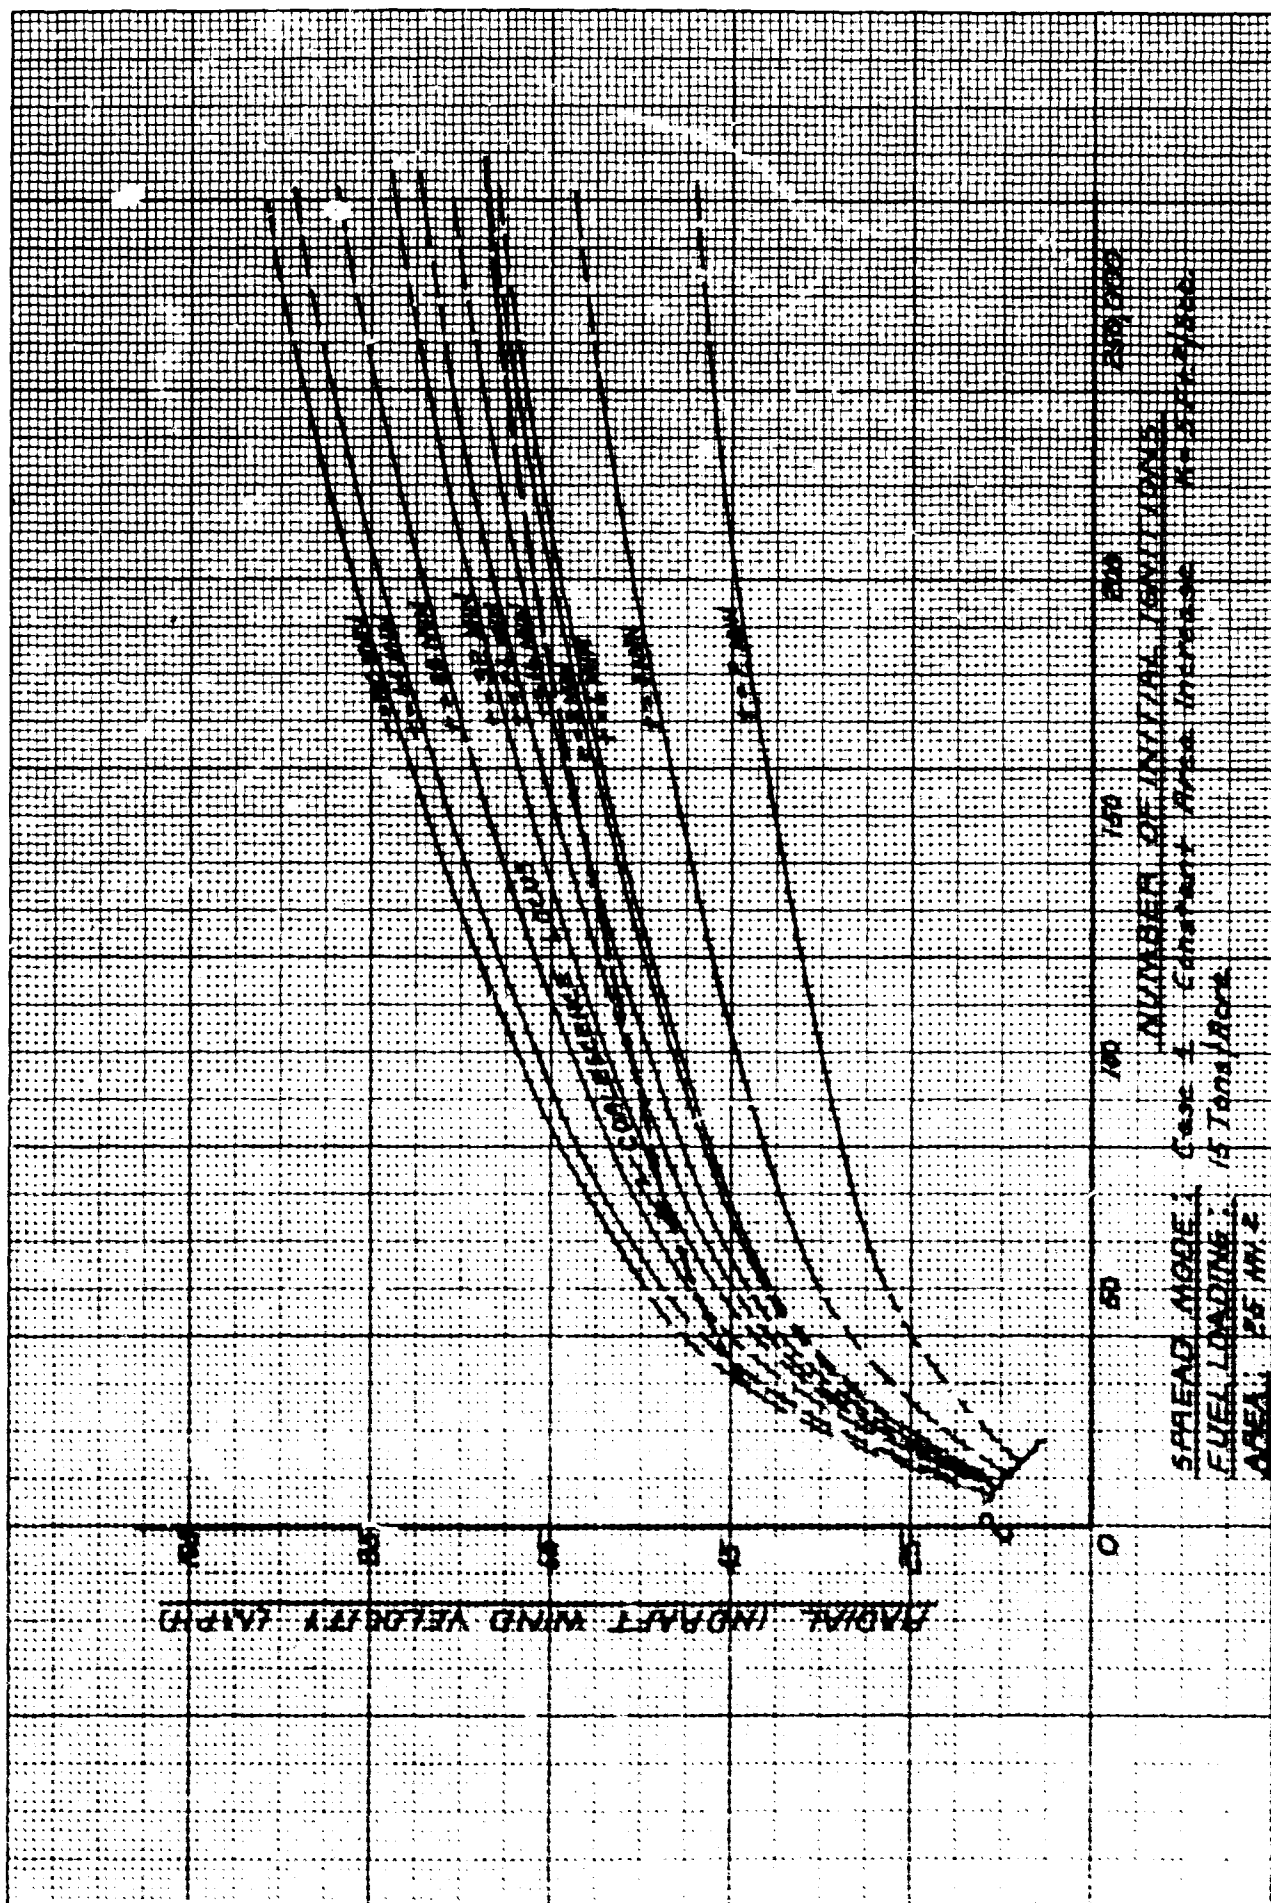


Fig. IV-10

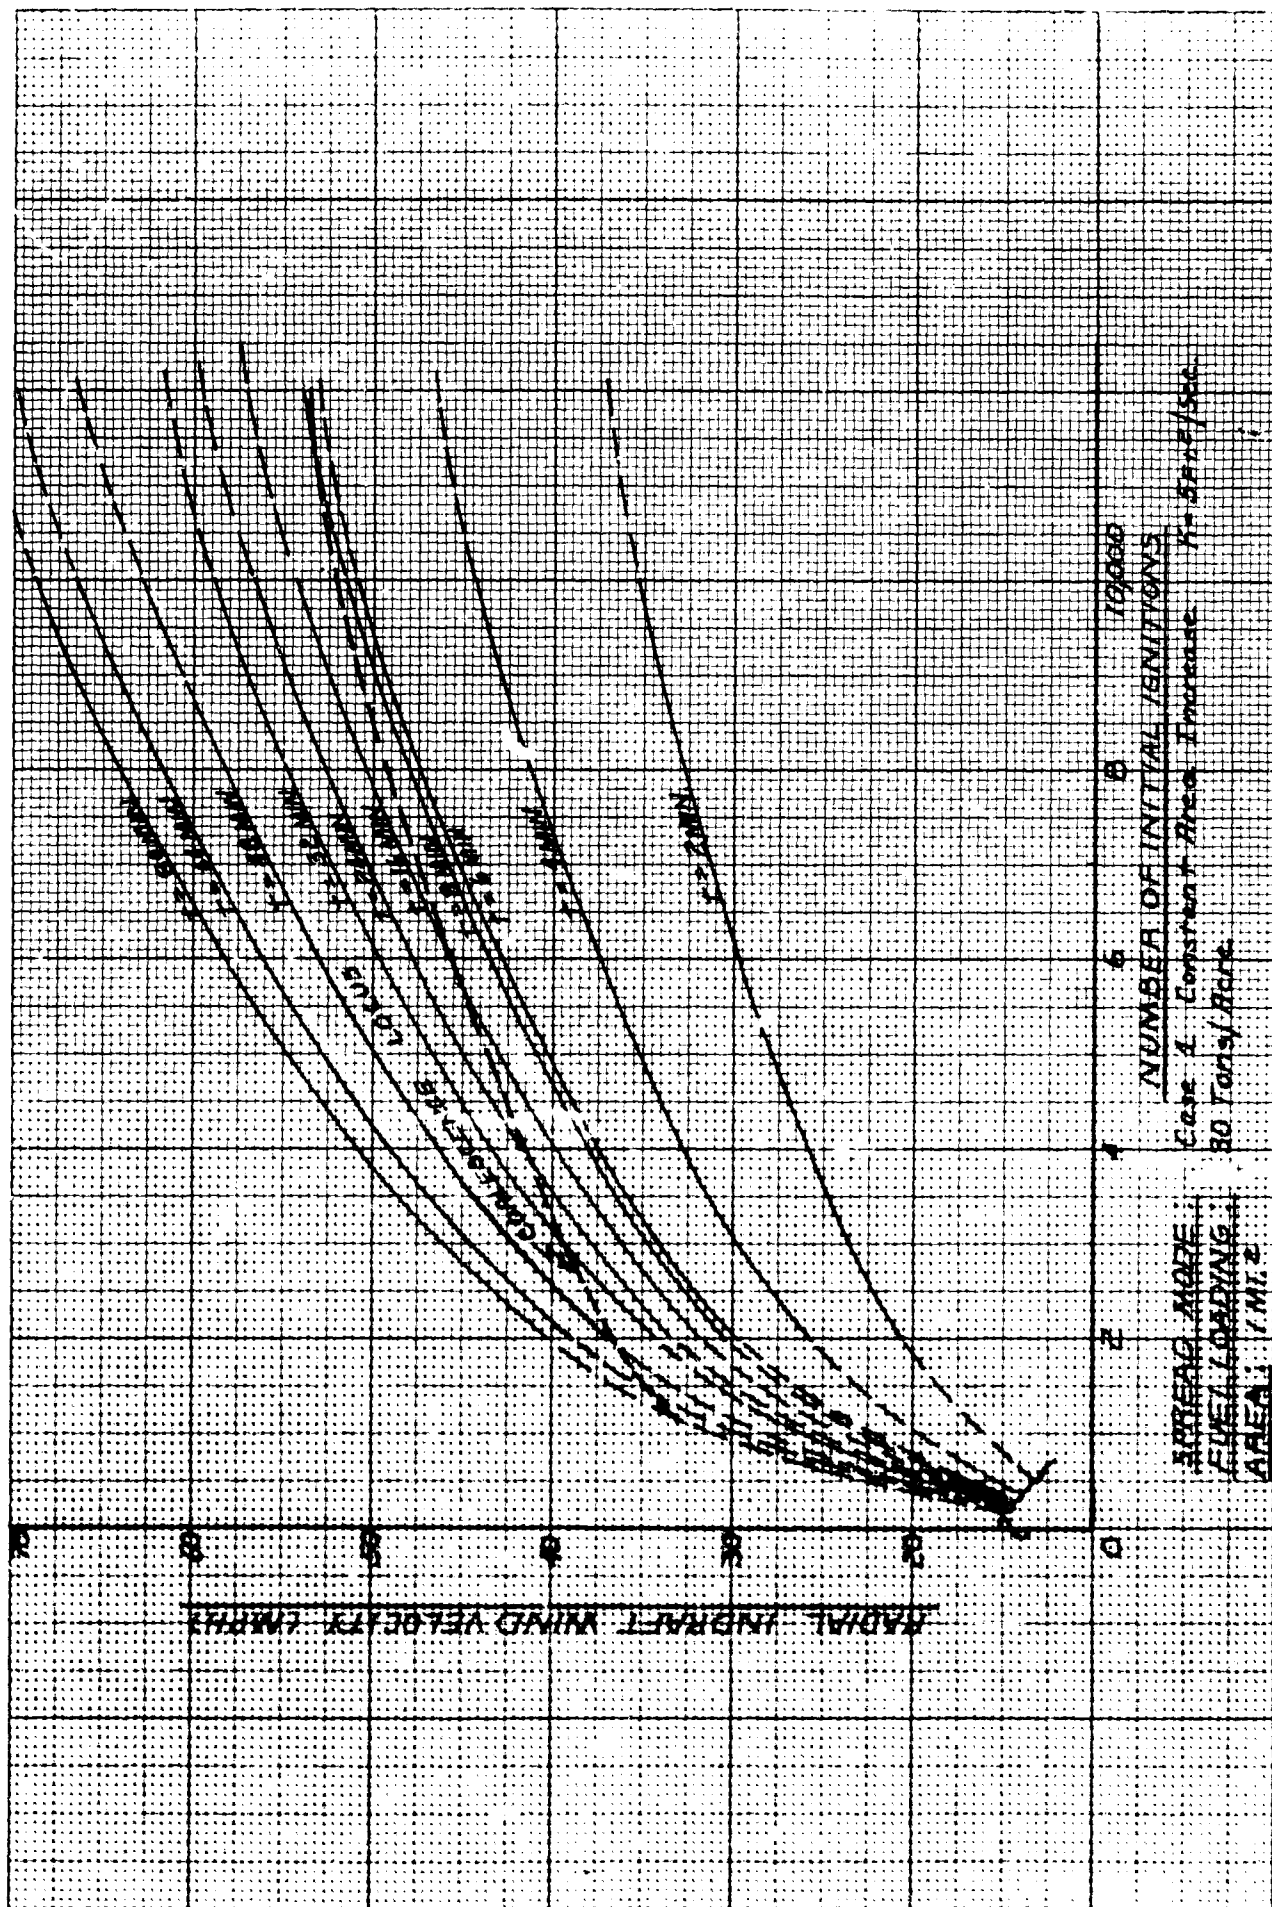


Fig. IV-11

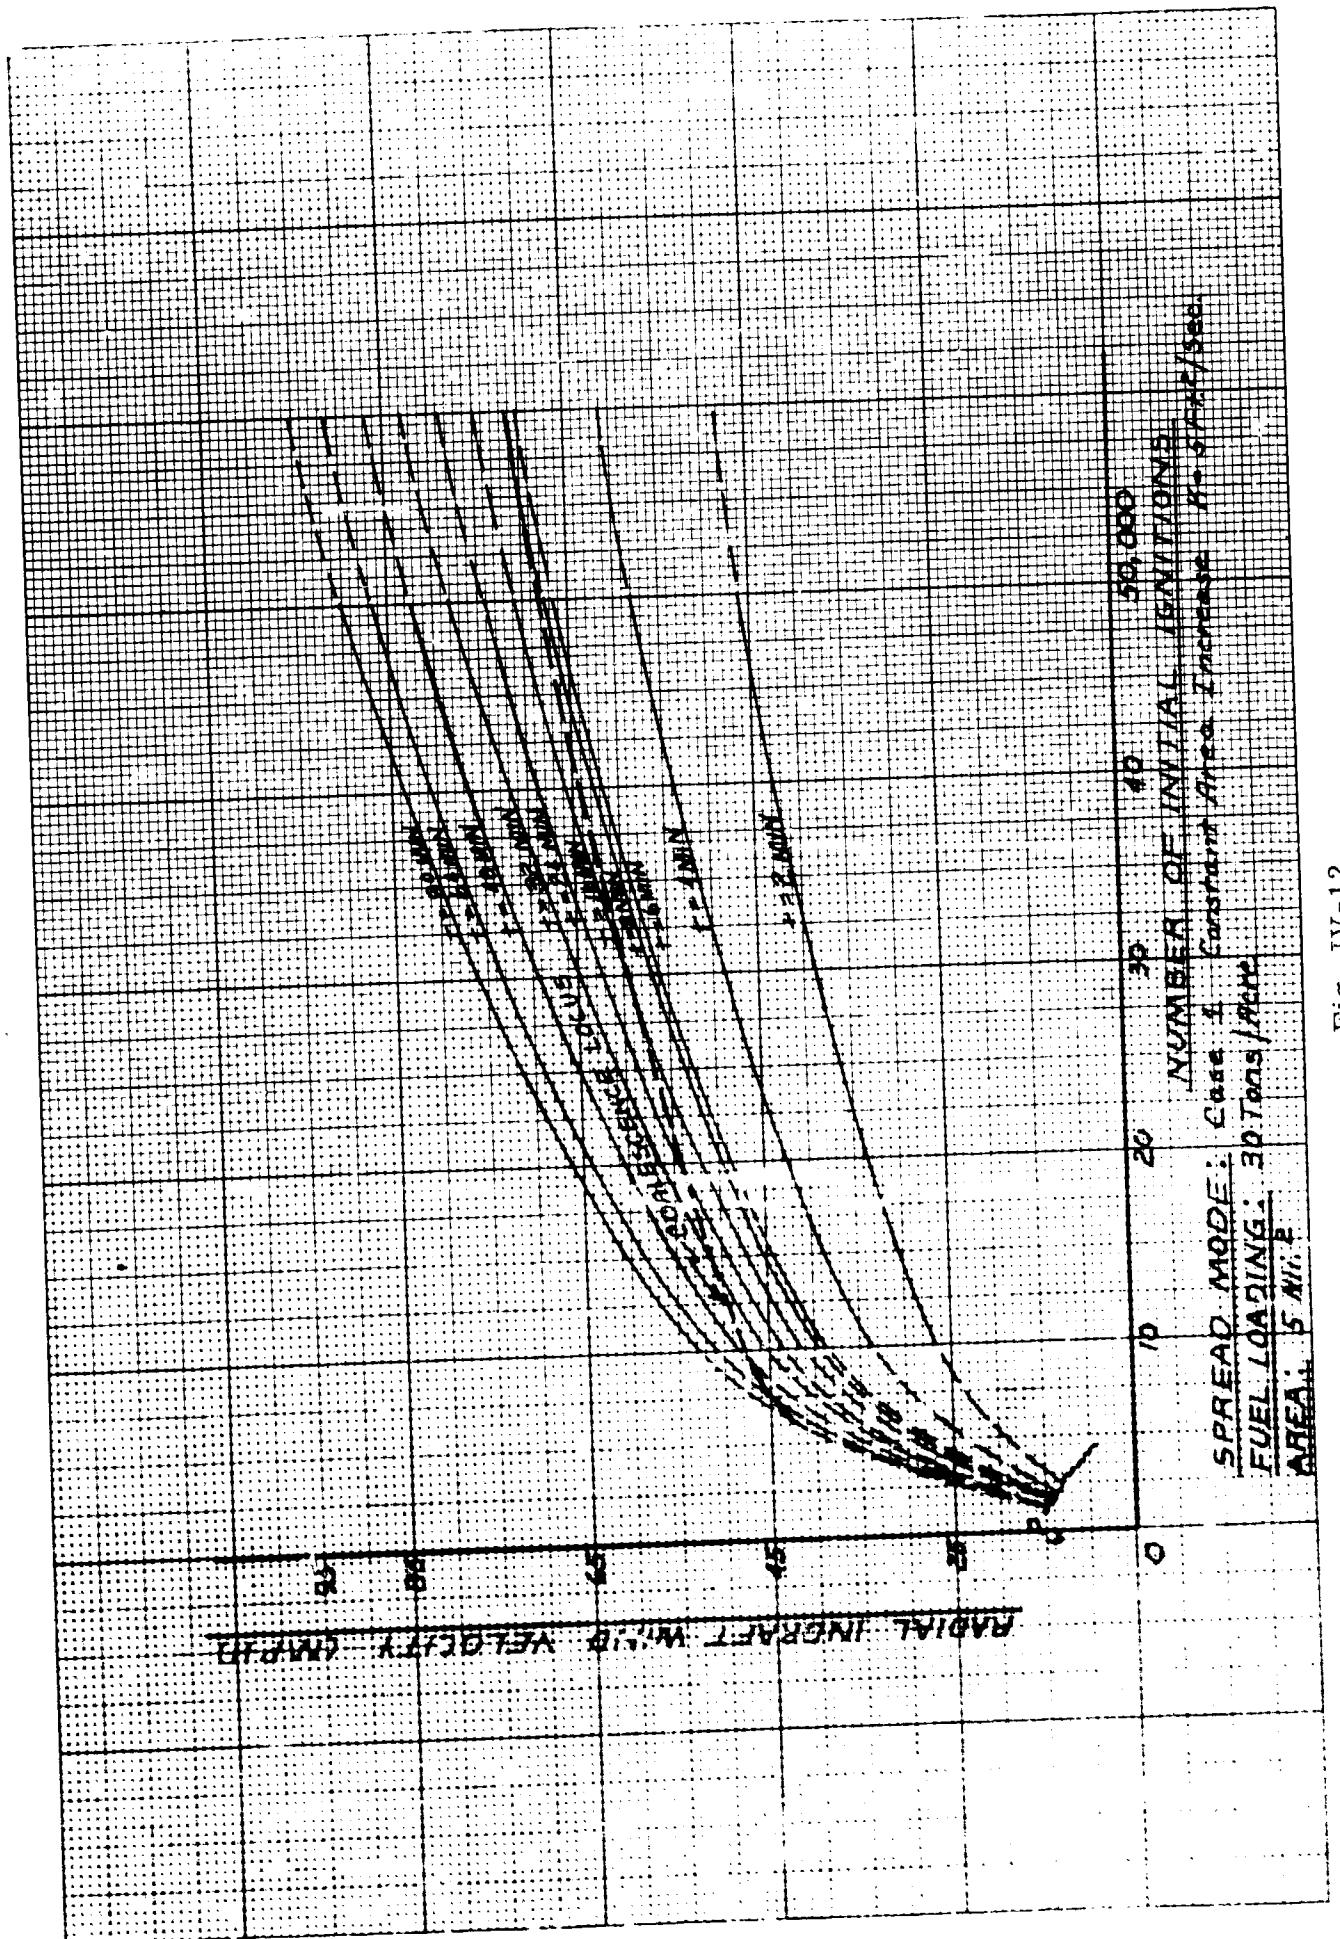


Fig. IV-12

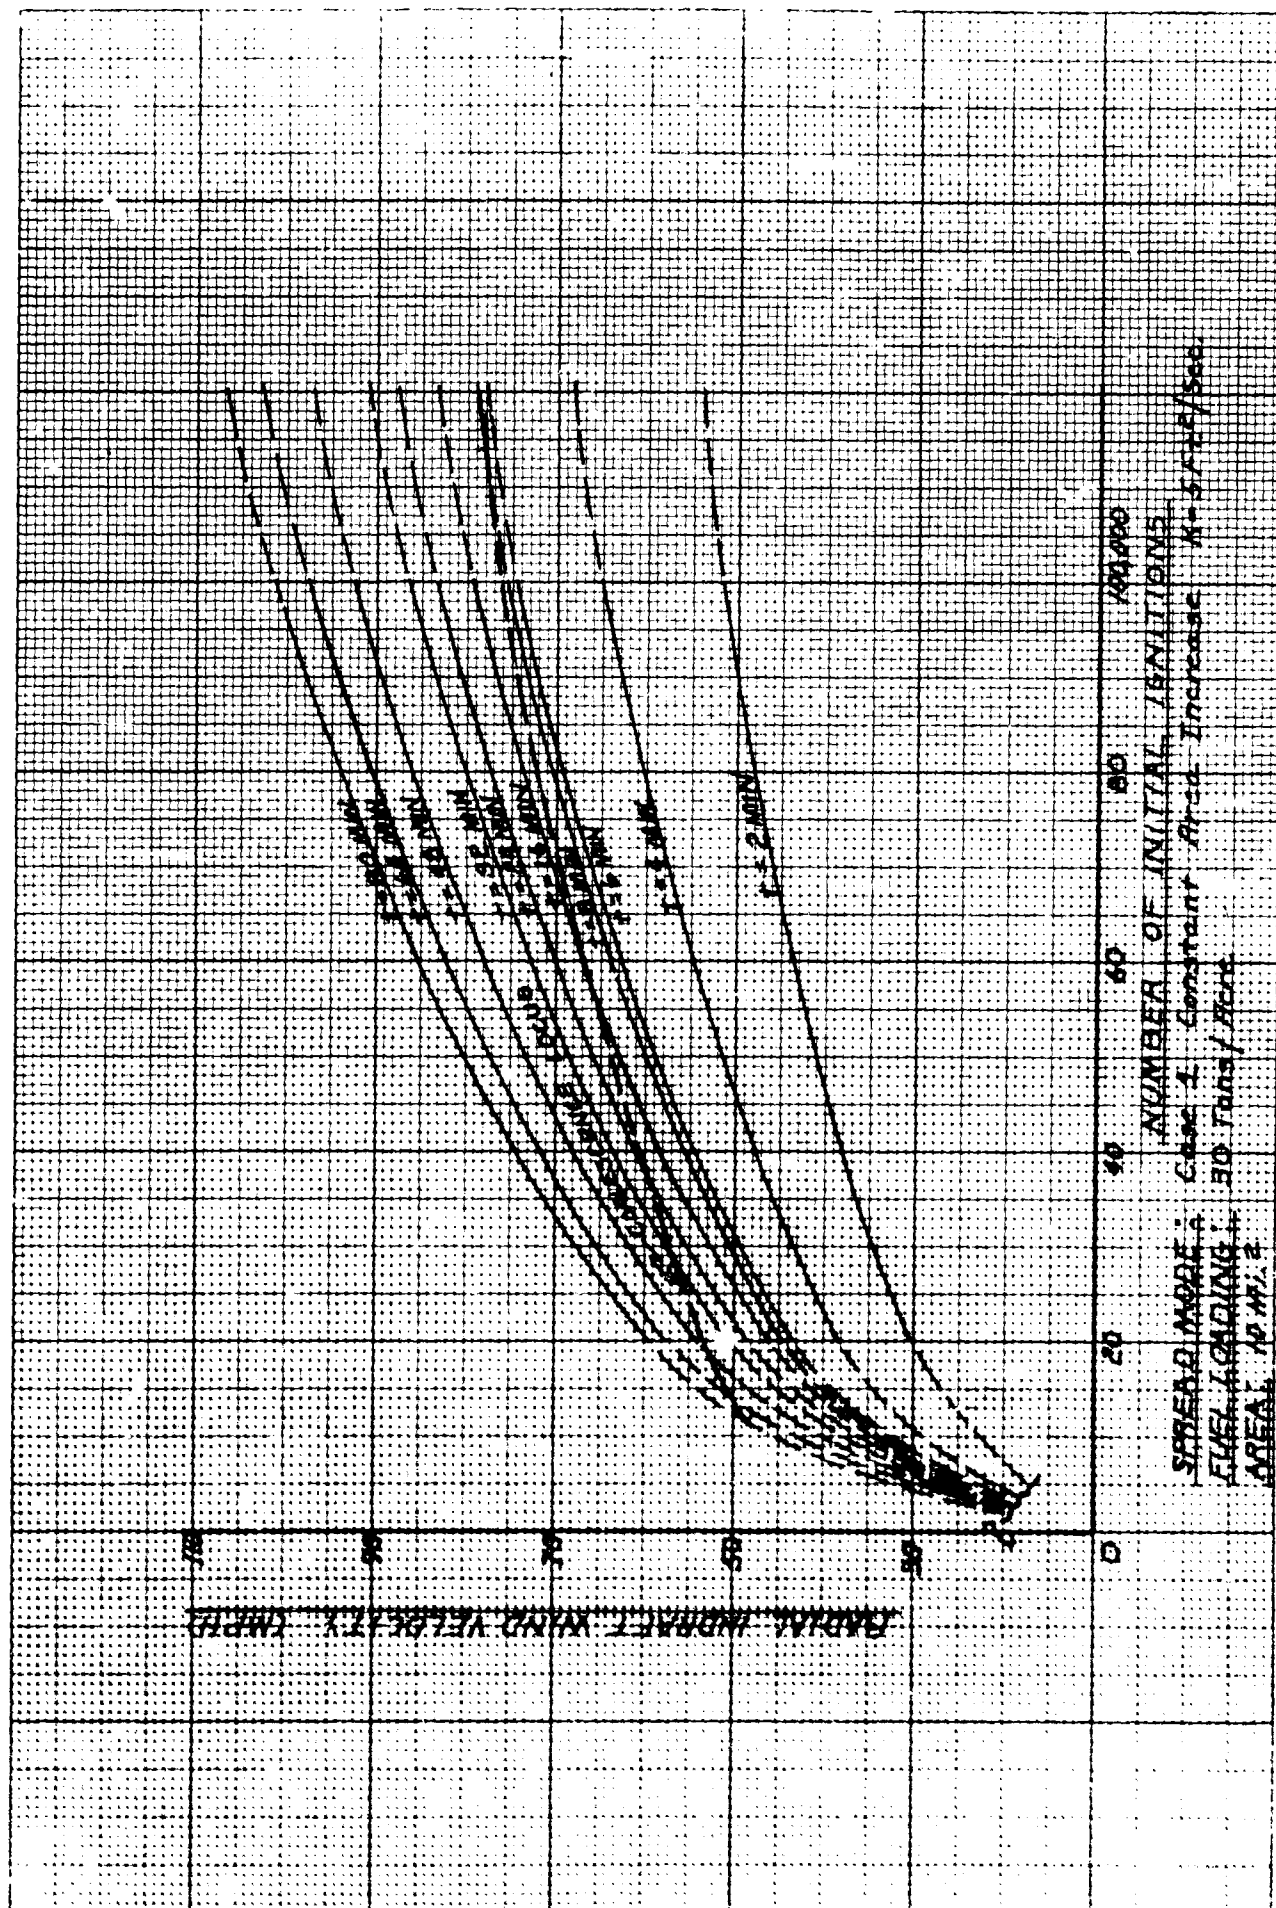


Fig. IV-13

FREDERICK POST COMPANY
30 LTRIC CROSS SECTION 20 X 20 PER INCH

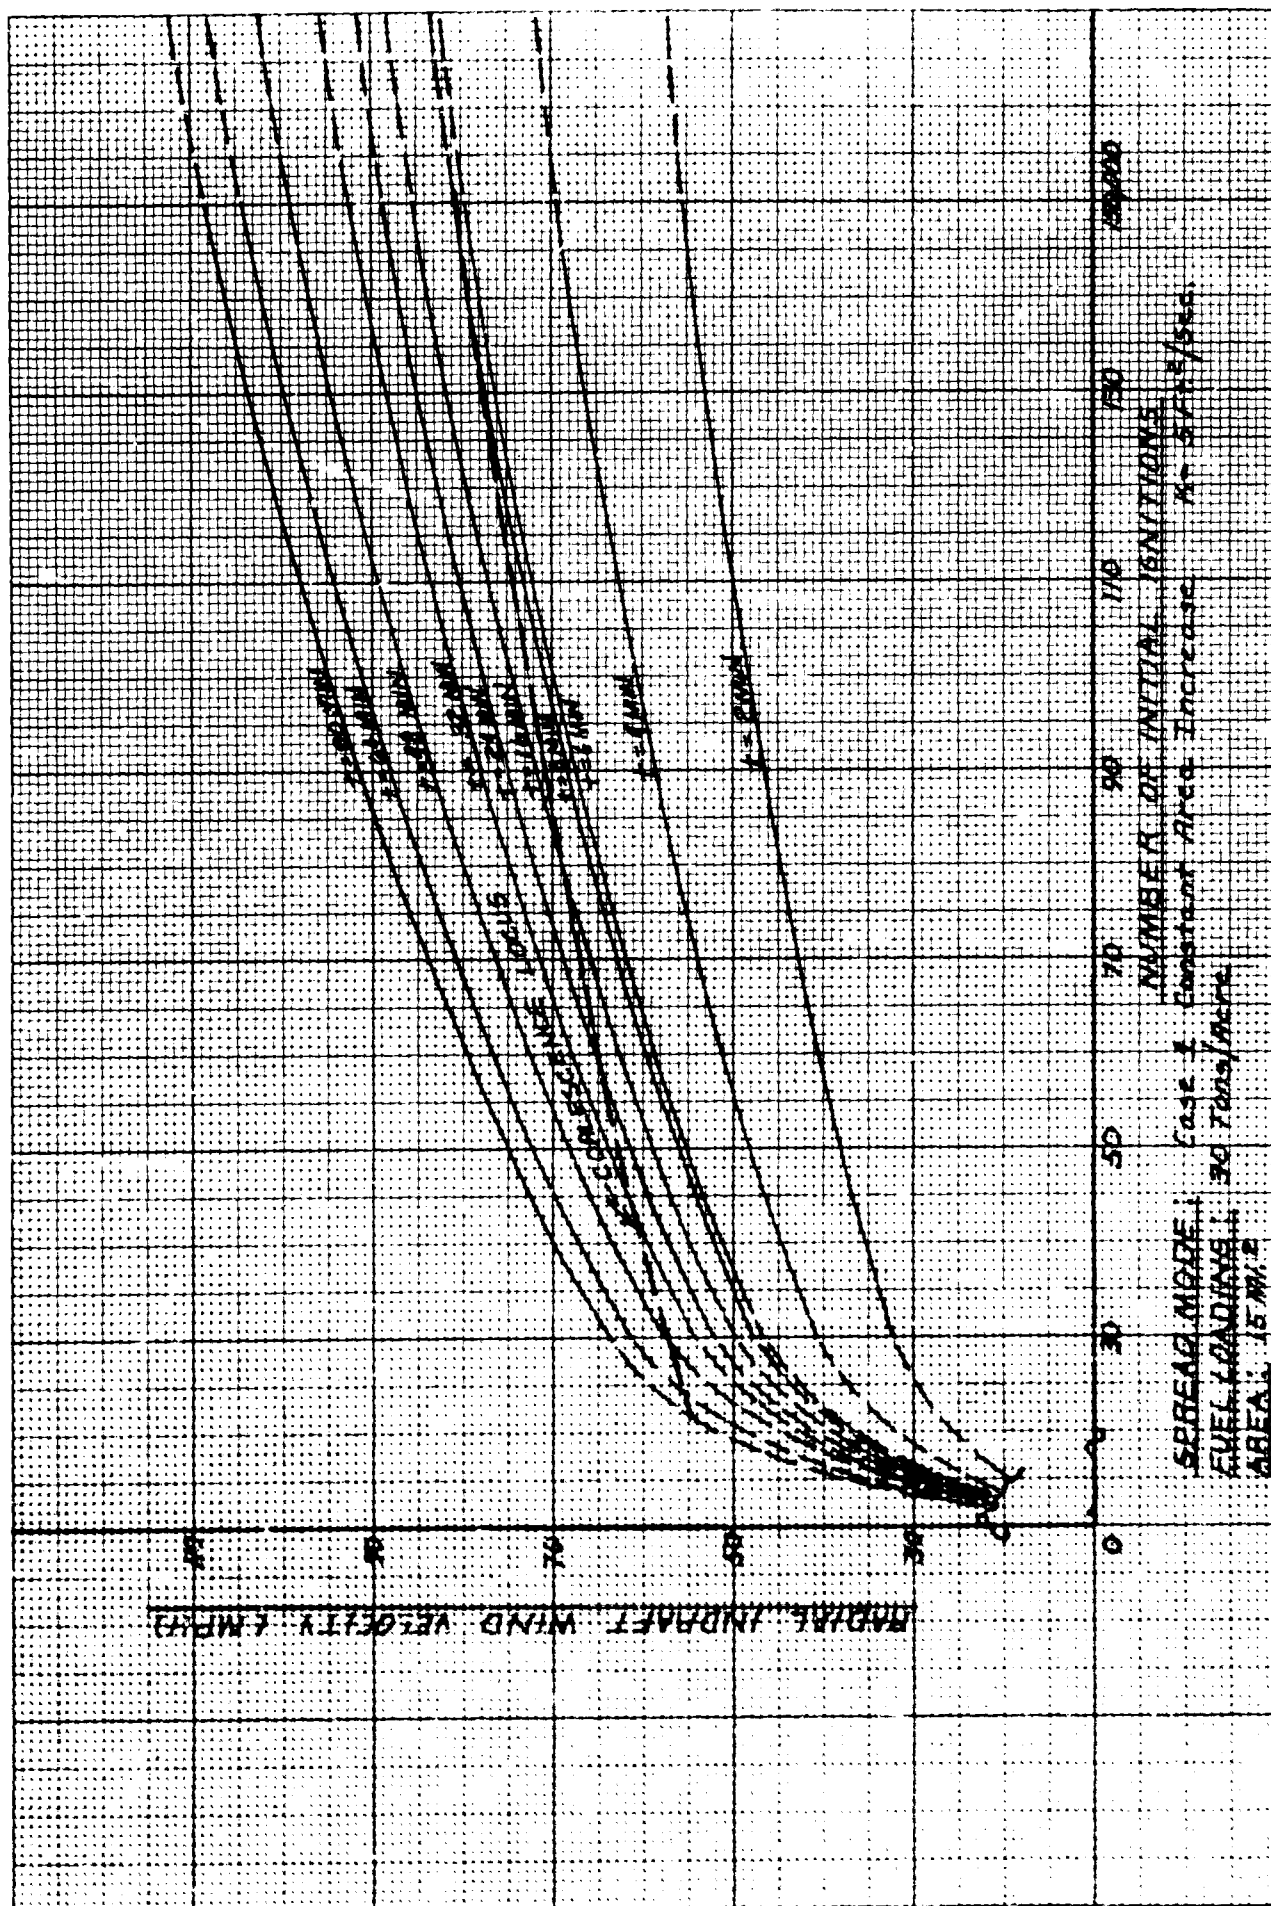


Fig. IV-14

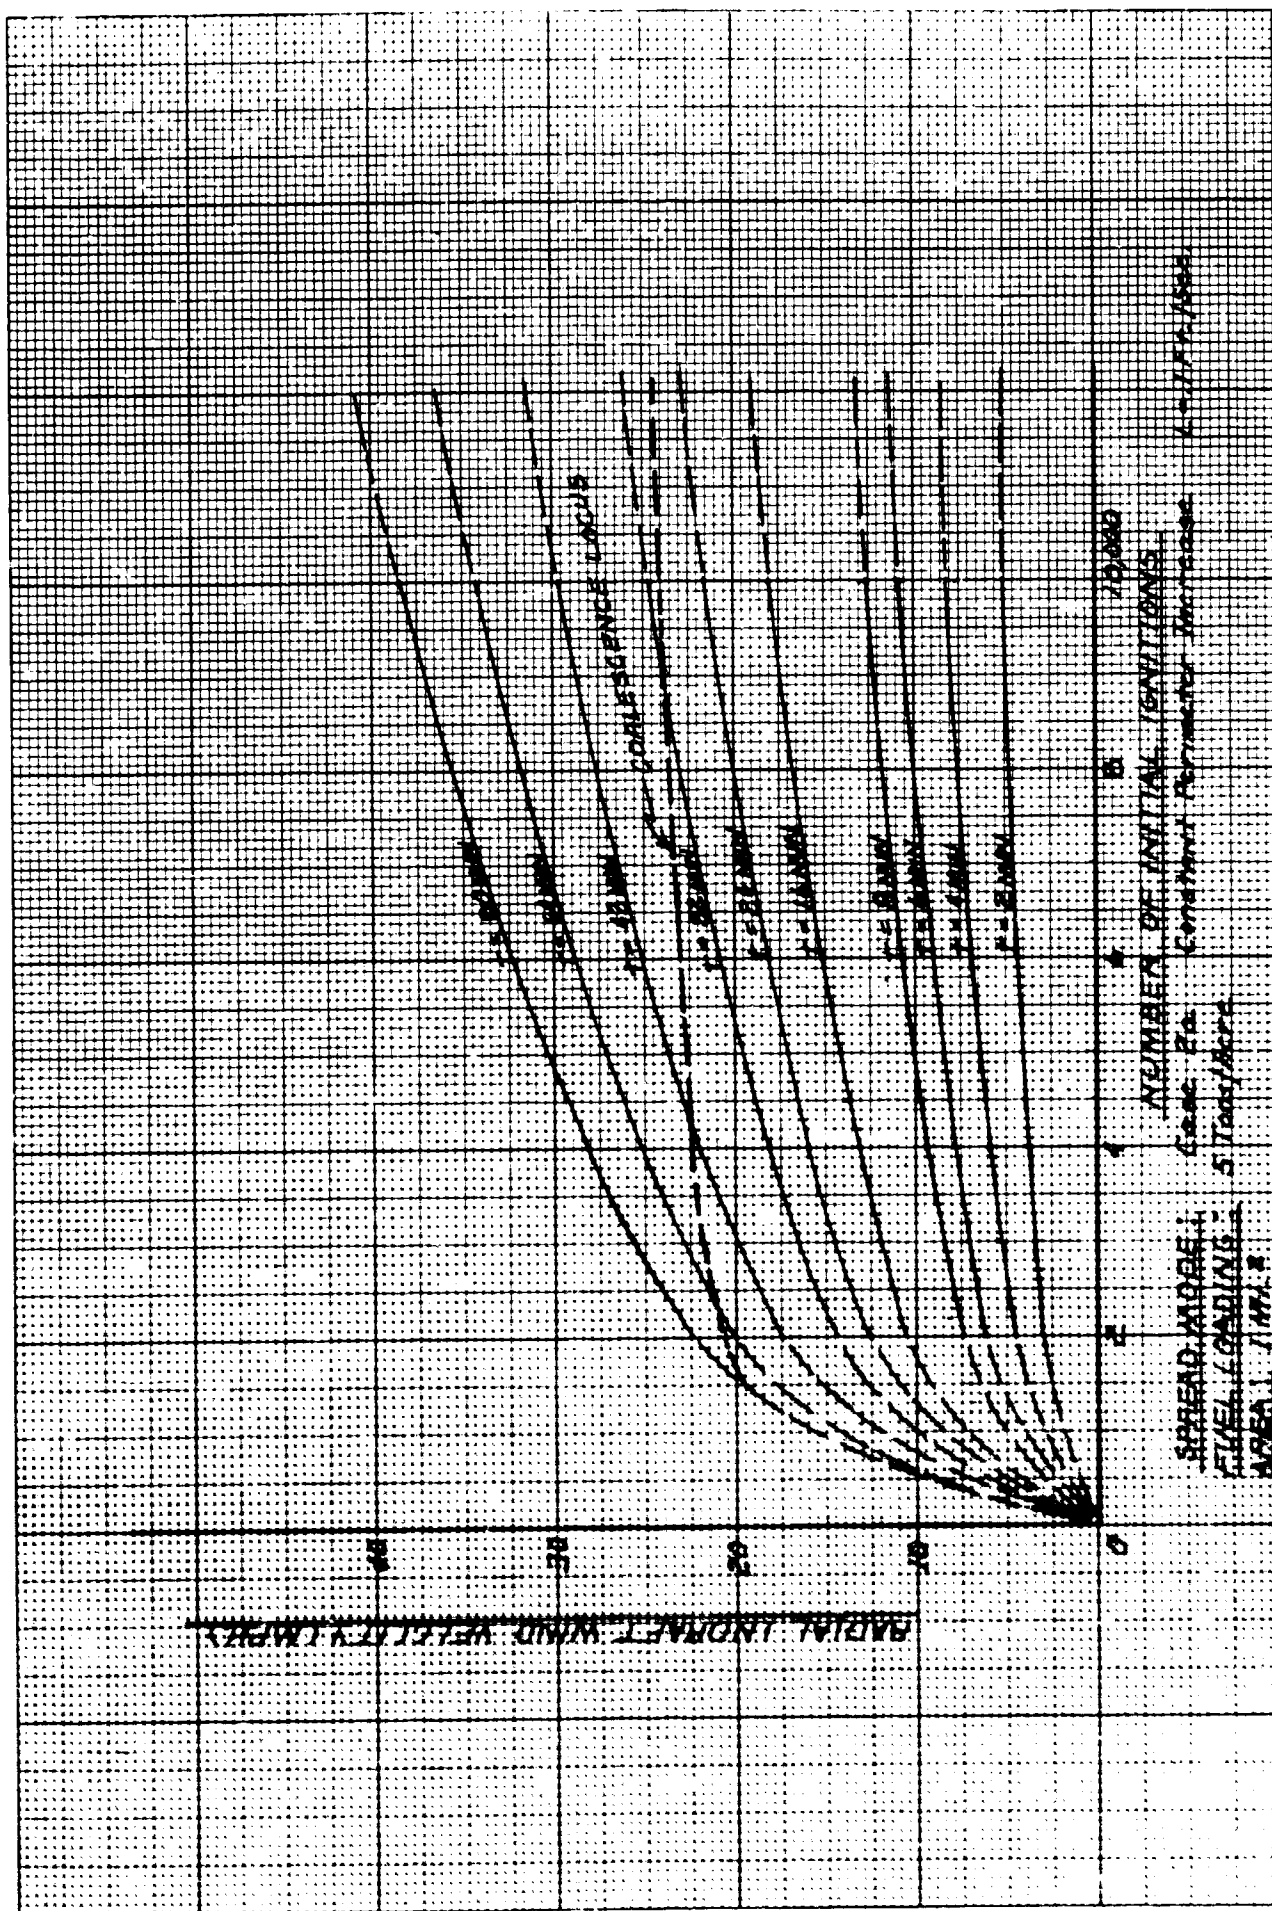


Fig. IV-16

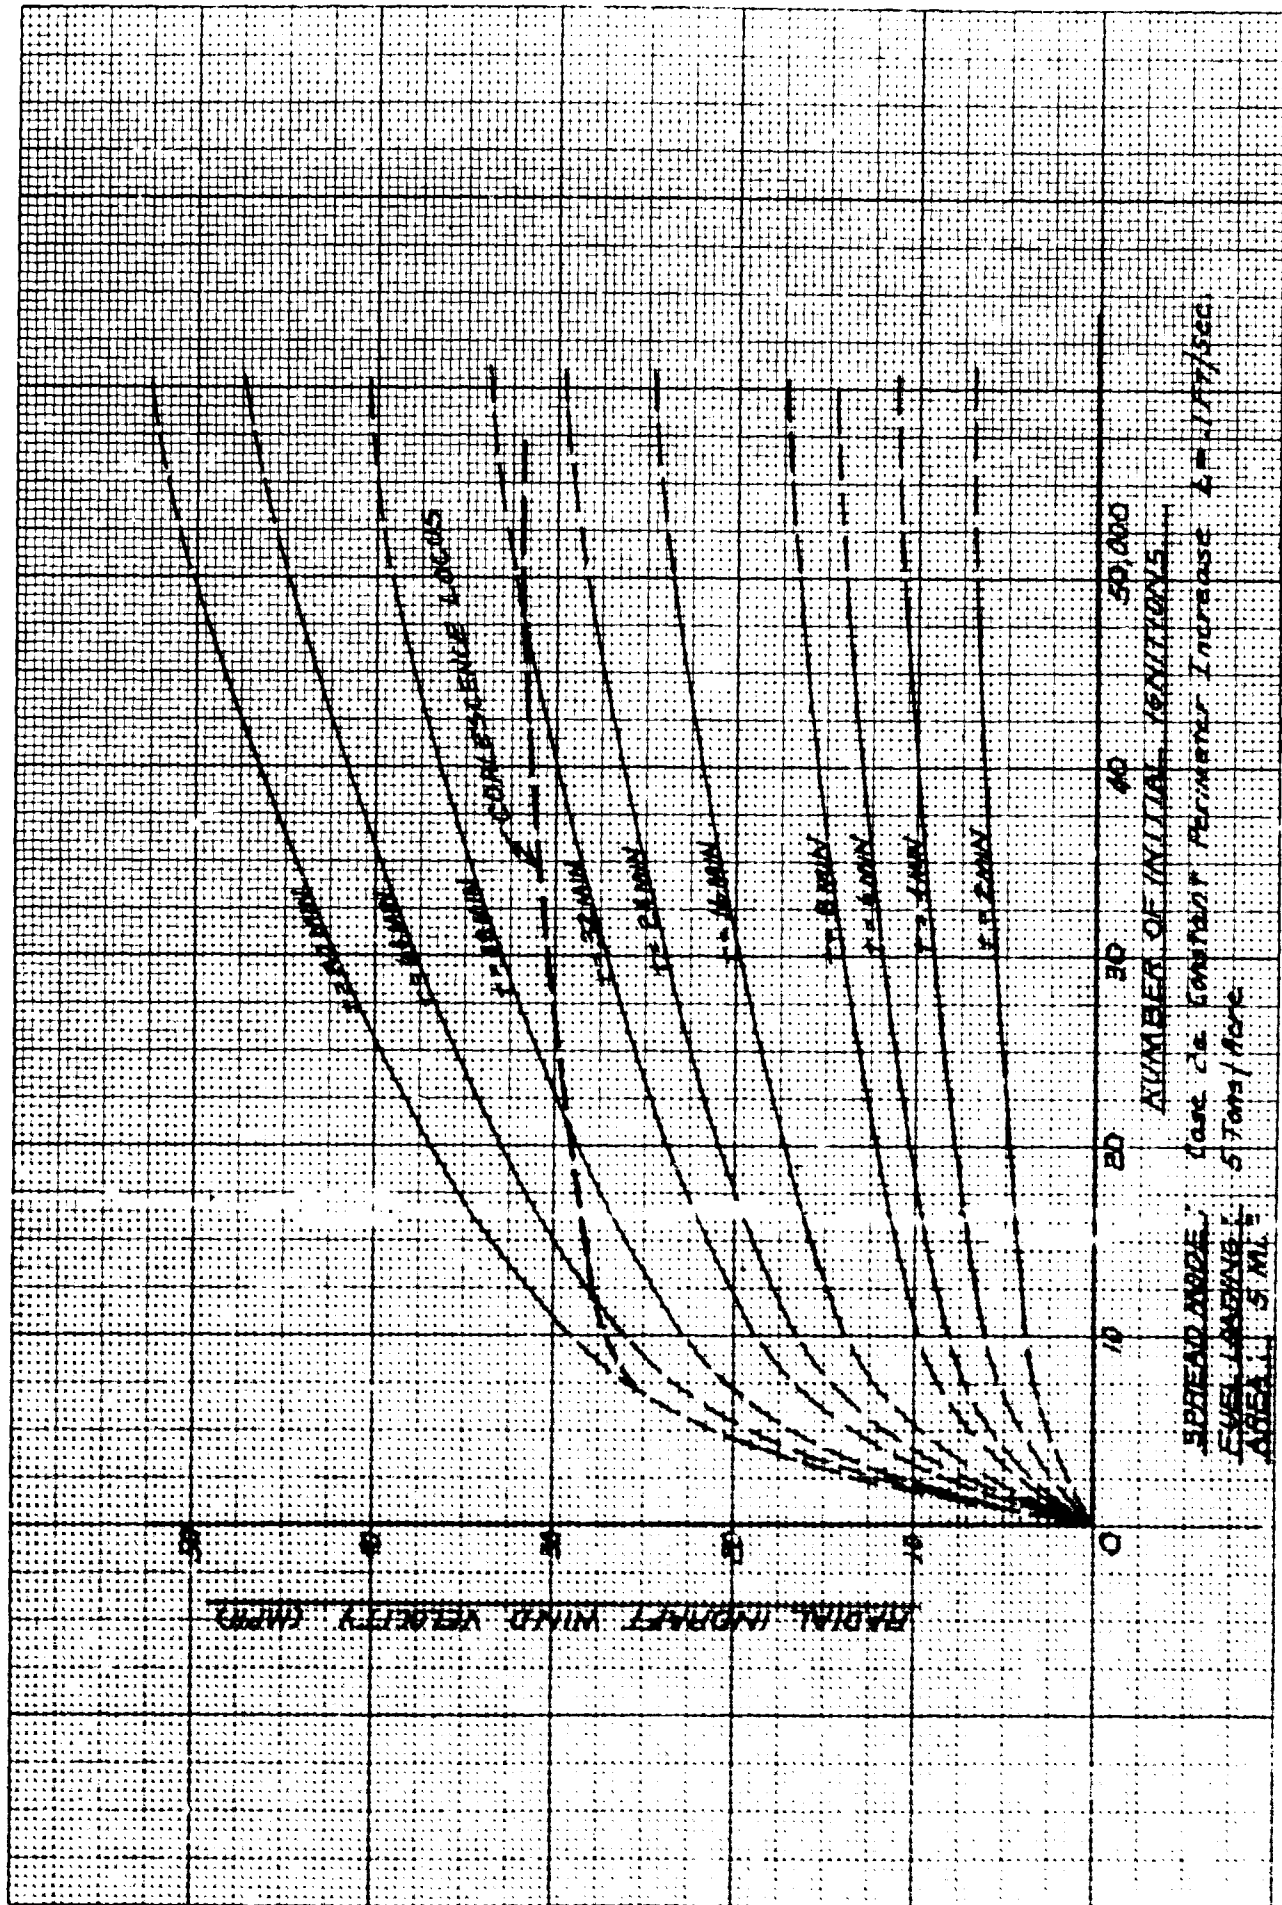


Fig. IV-17

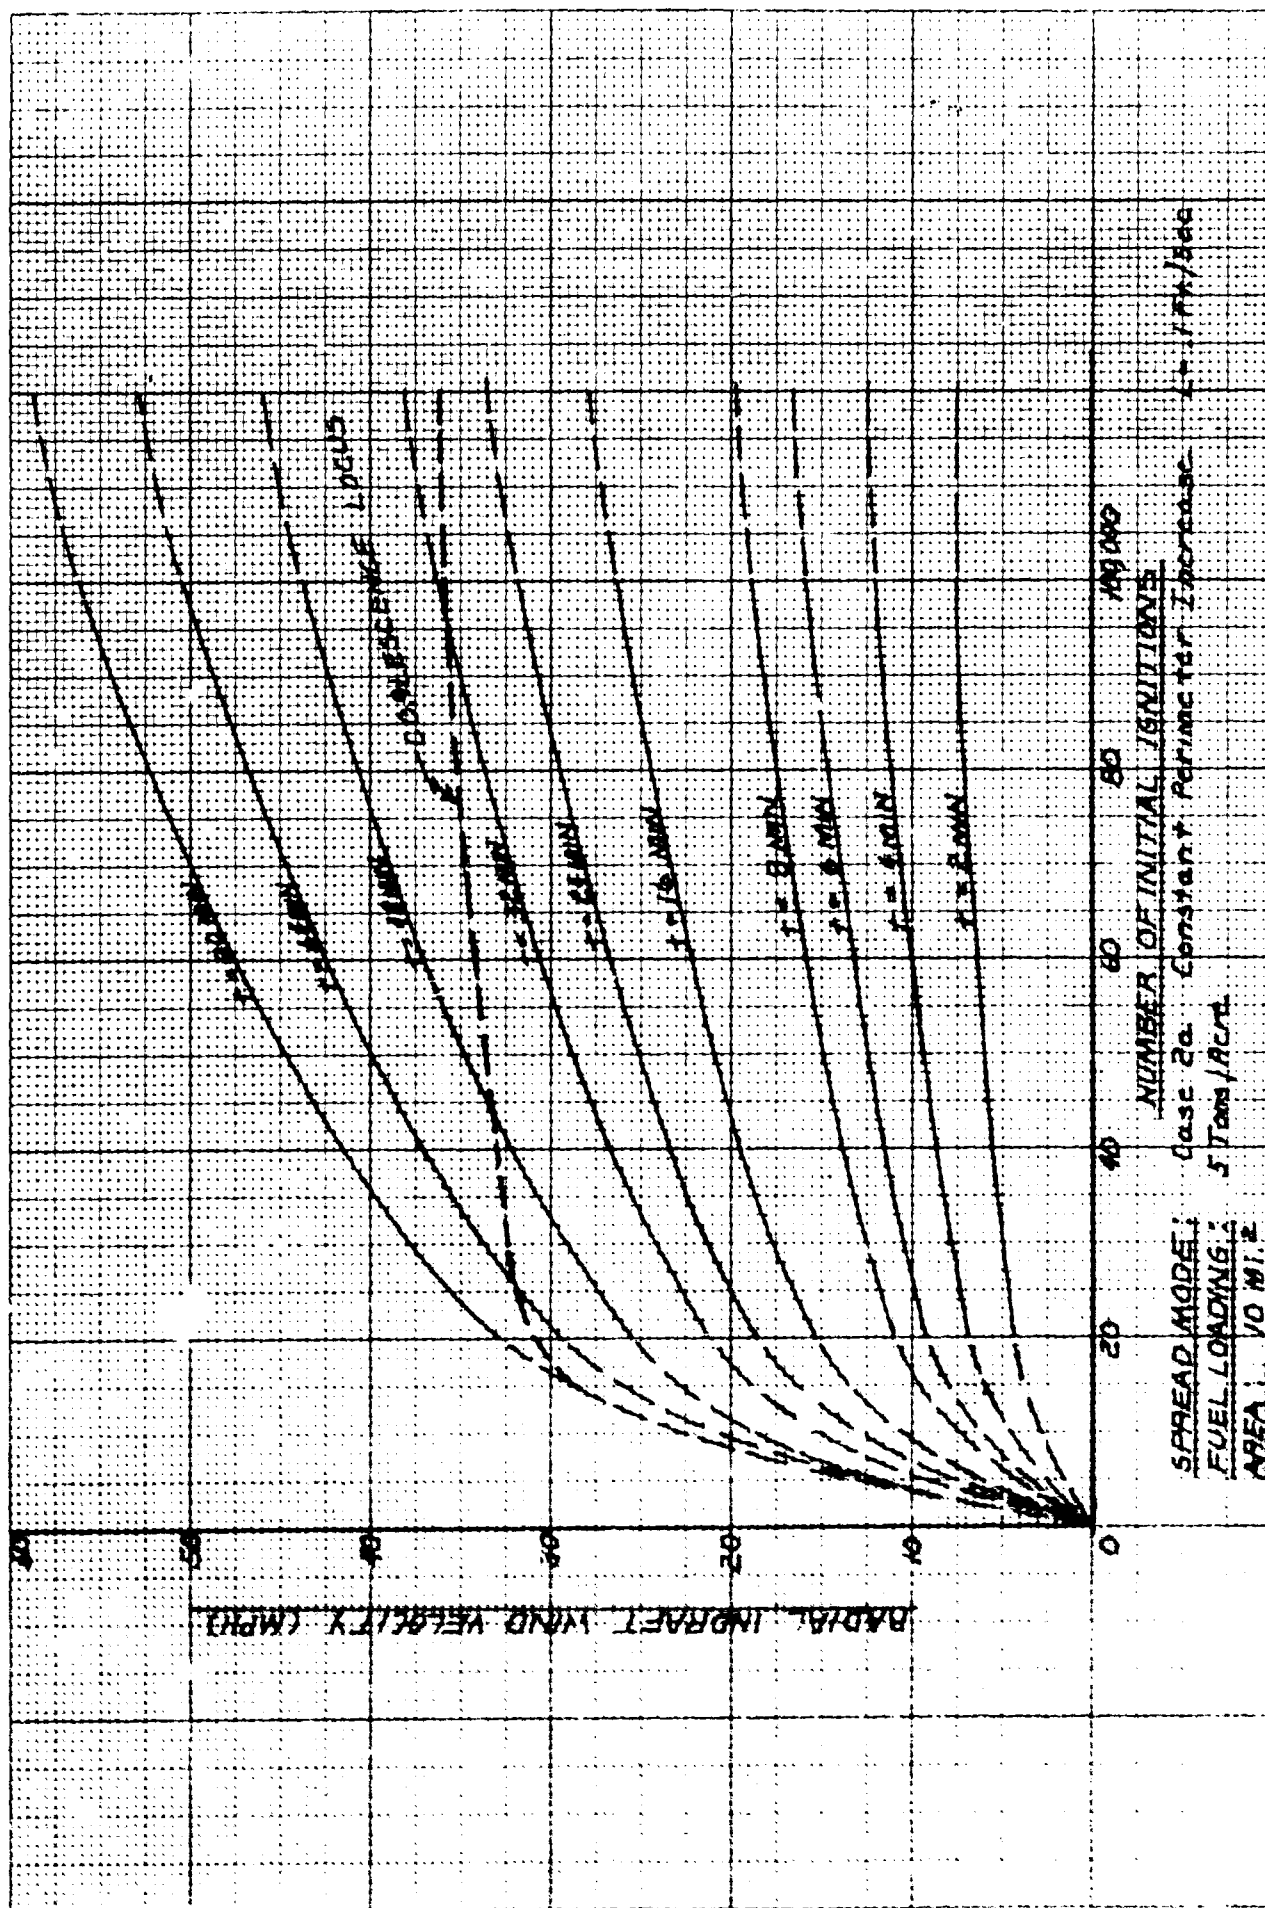


Fig. IV-18

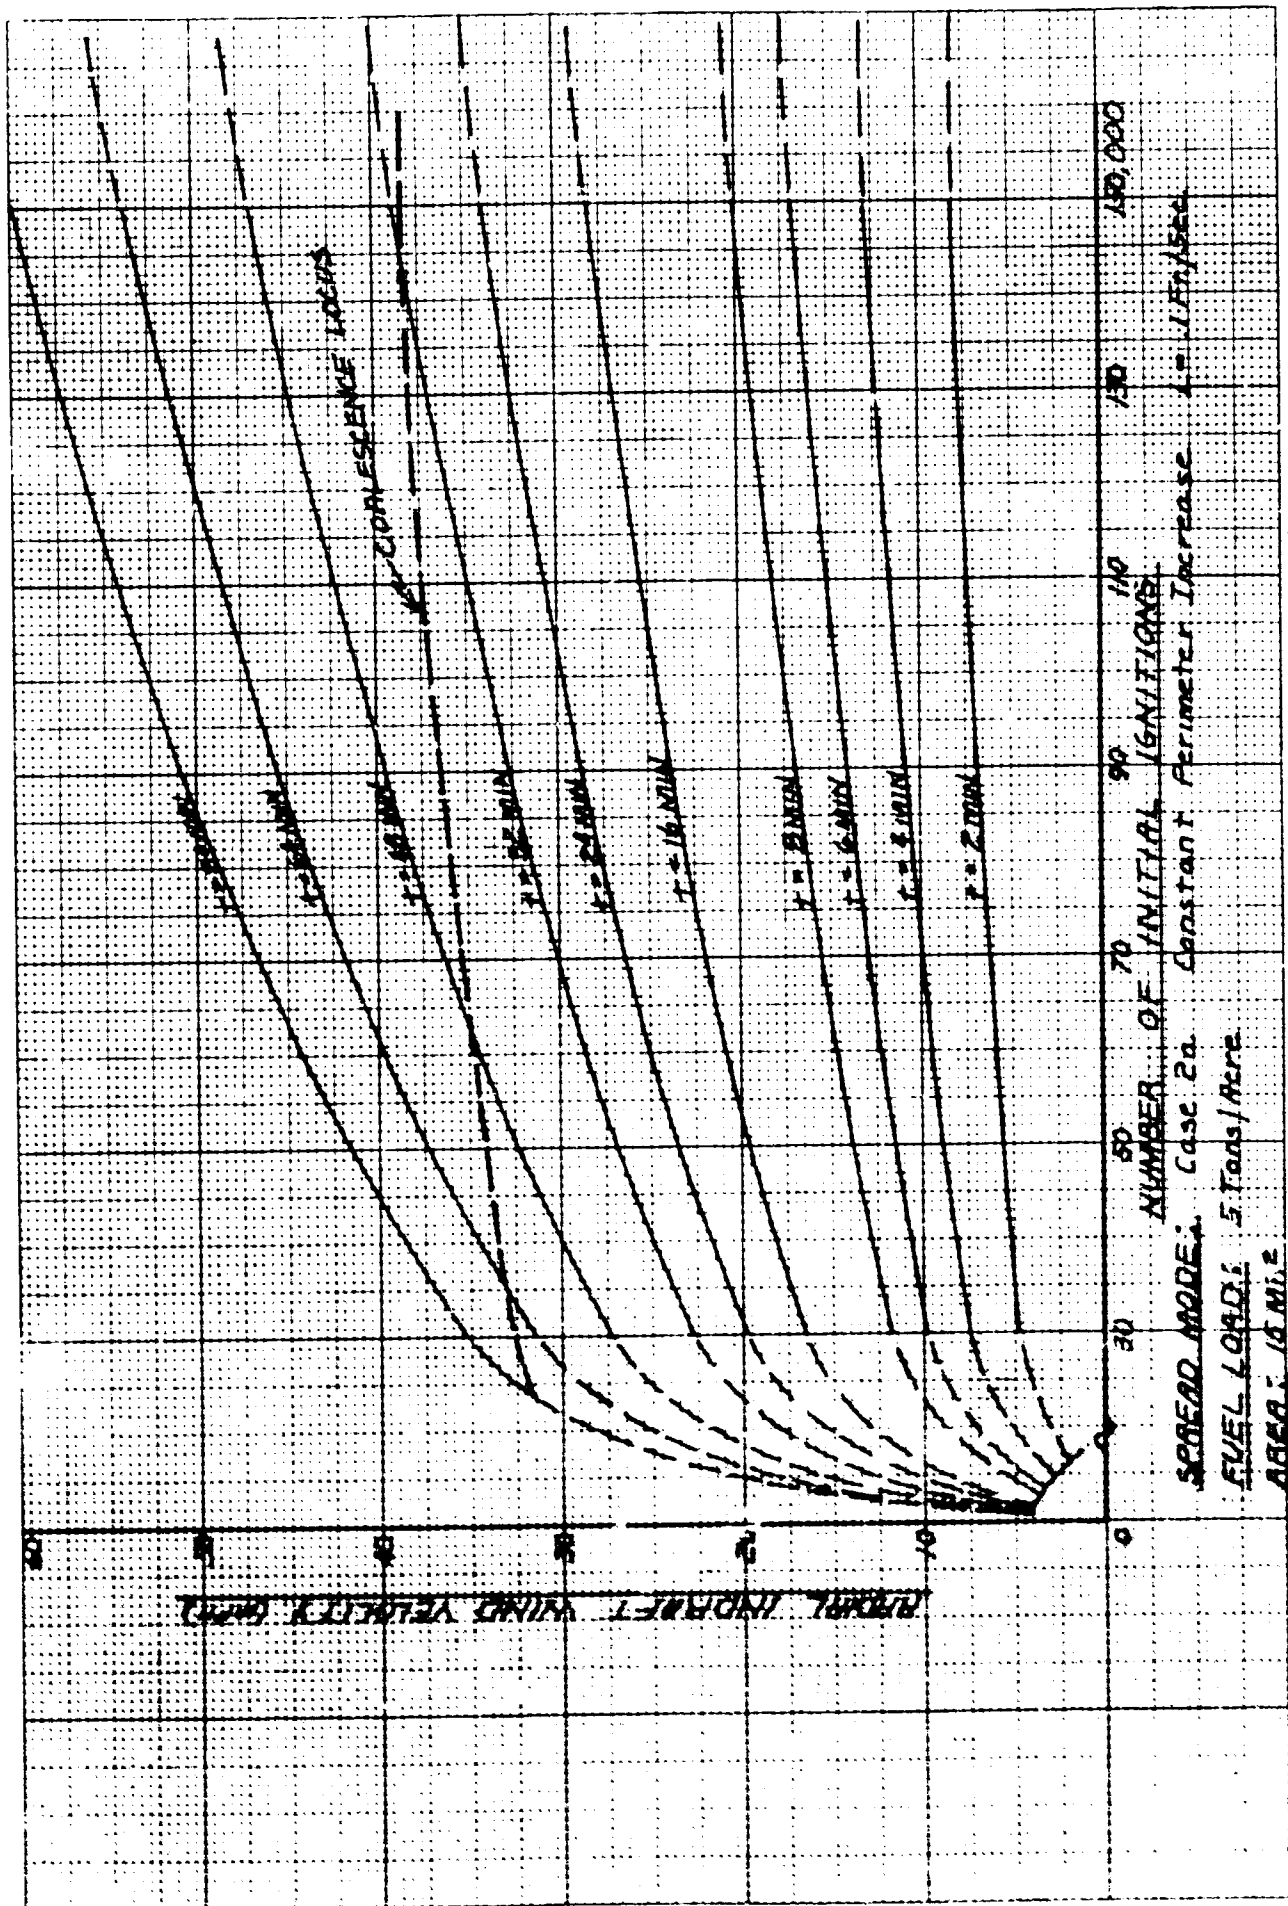


Fig. IV-19

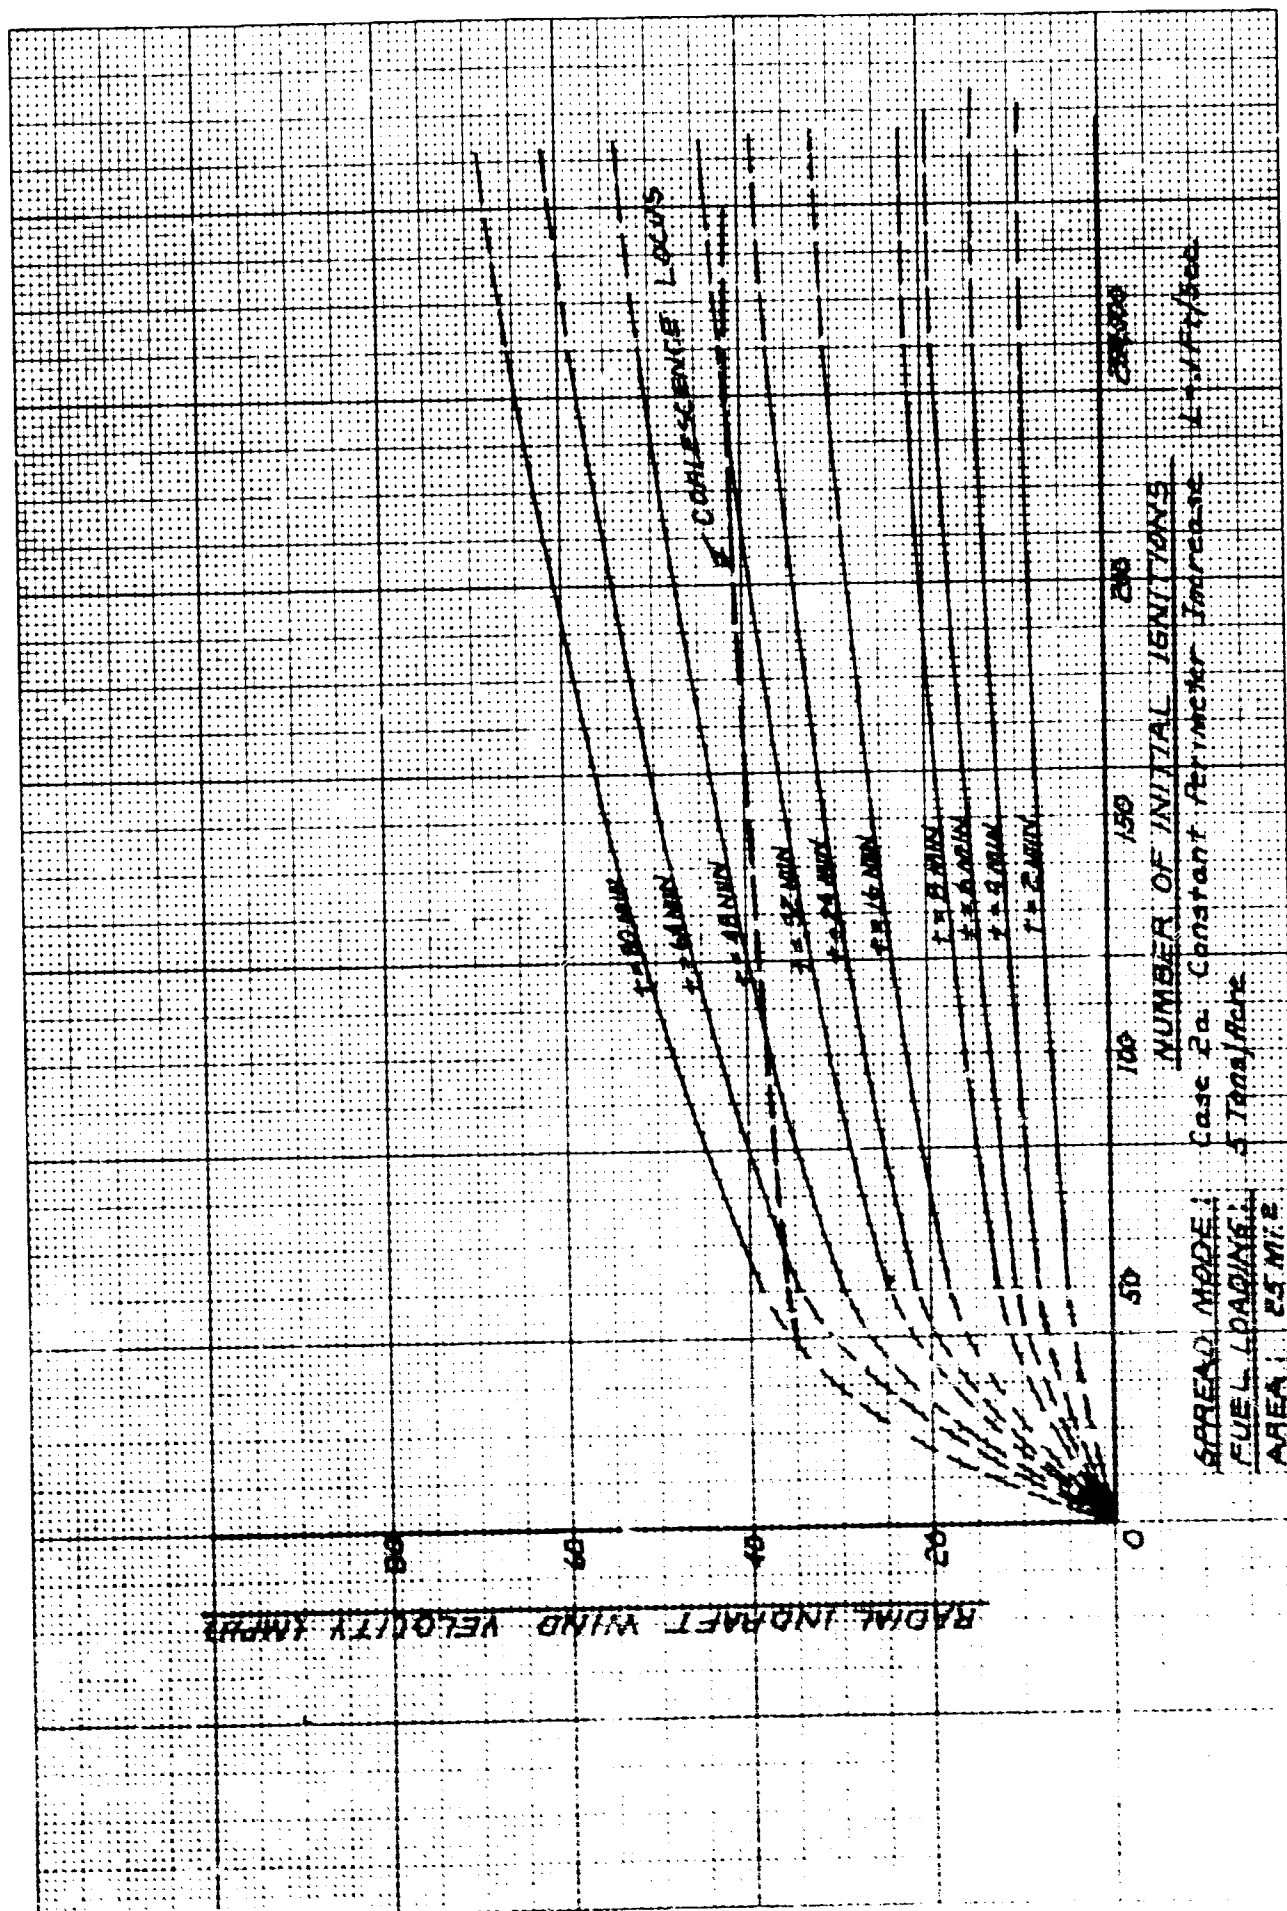


Fig. IV-20

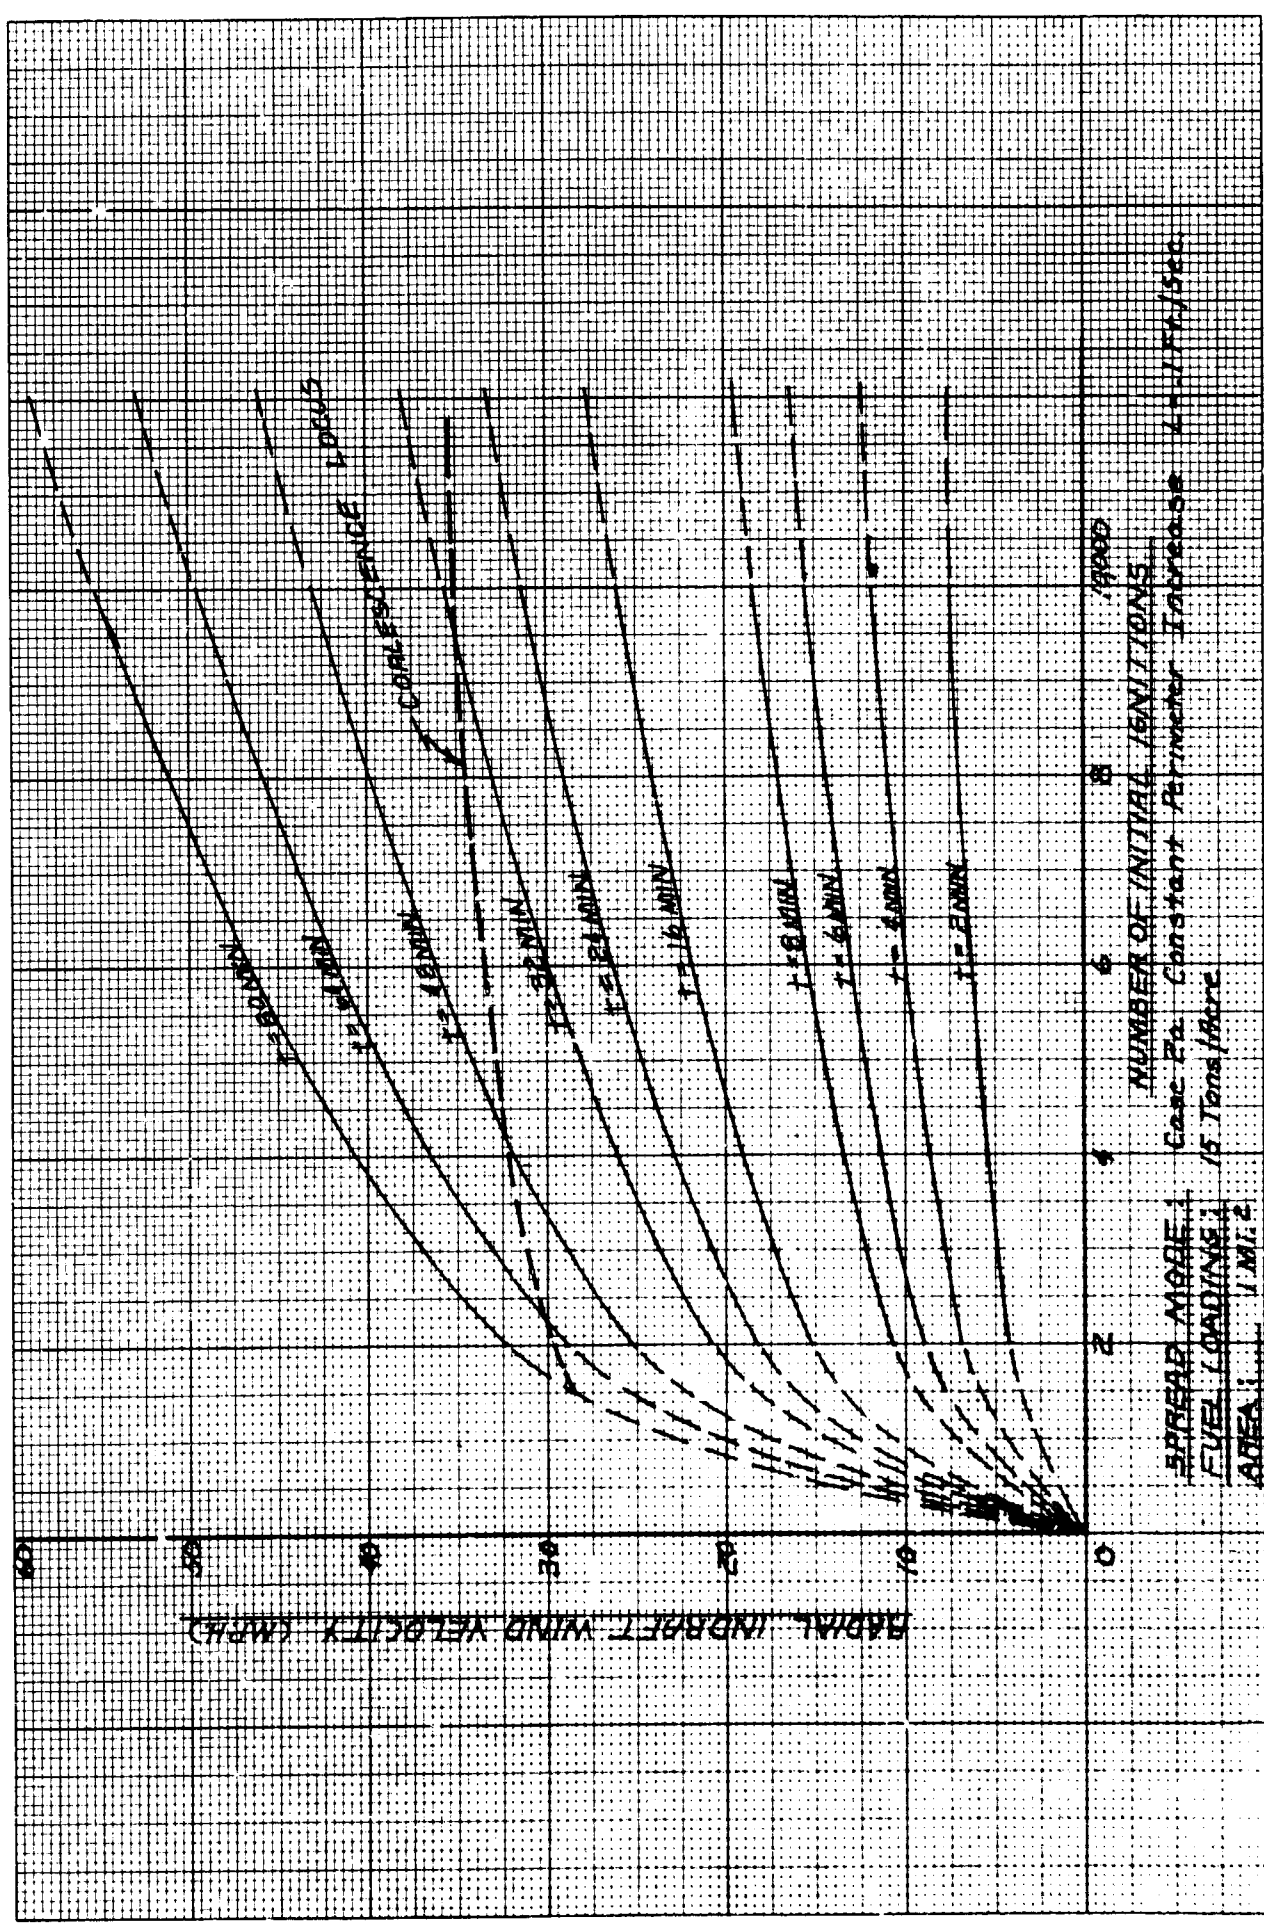


Fig. IV-21

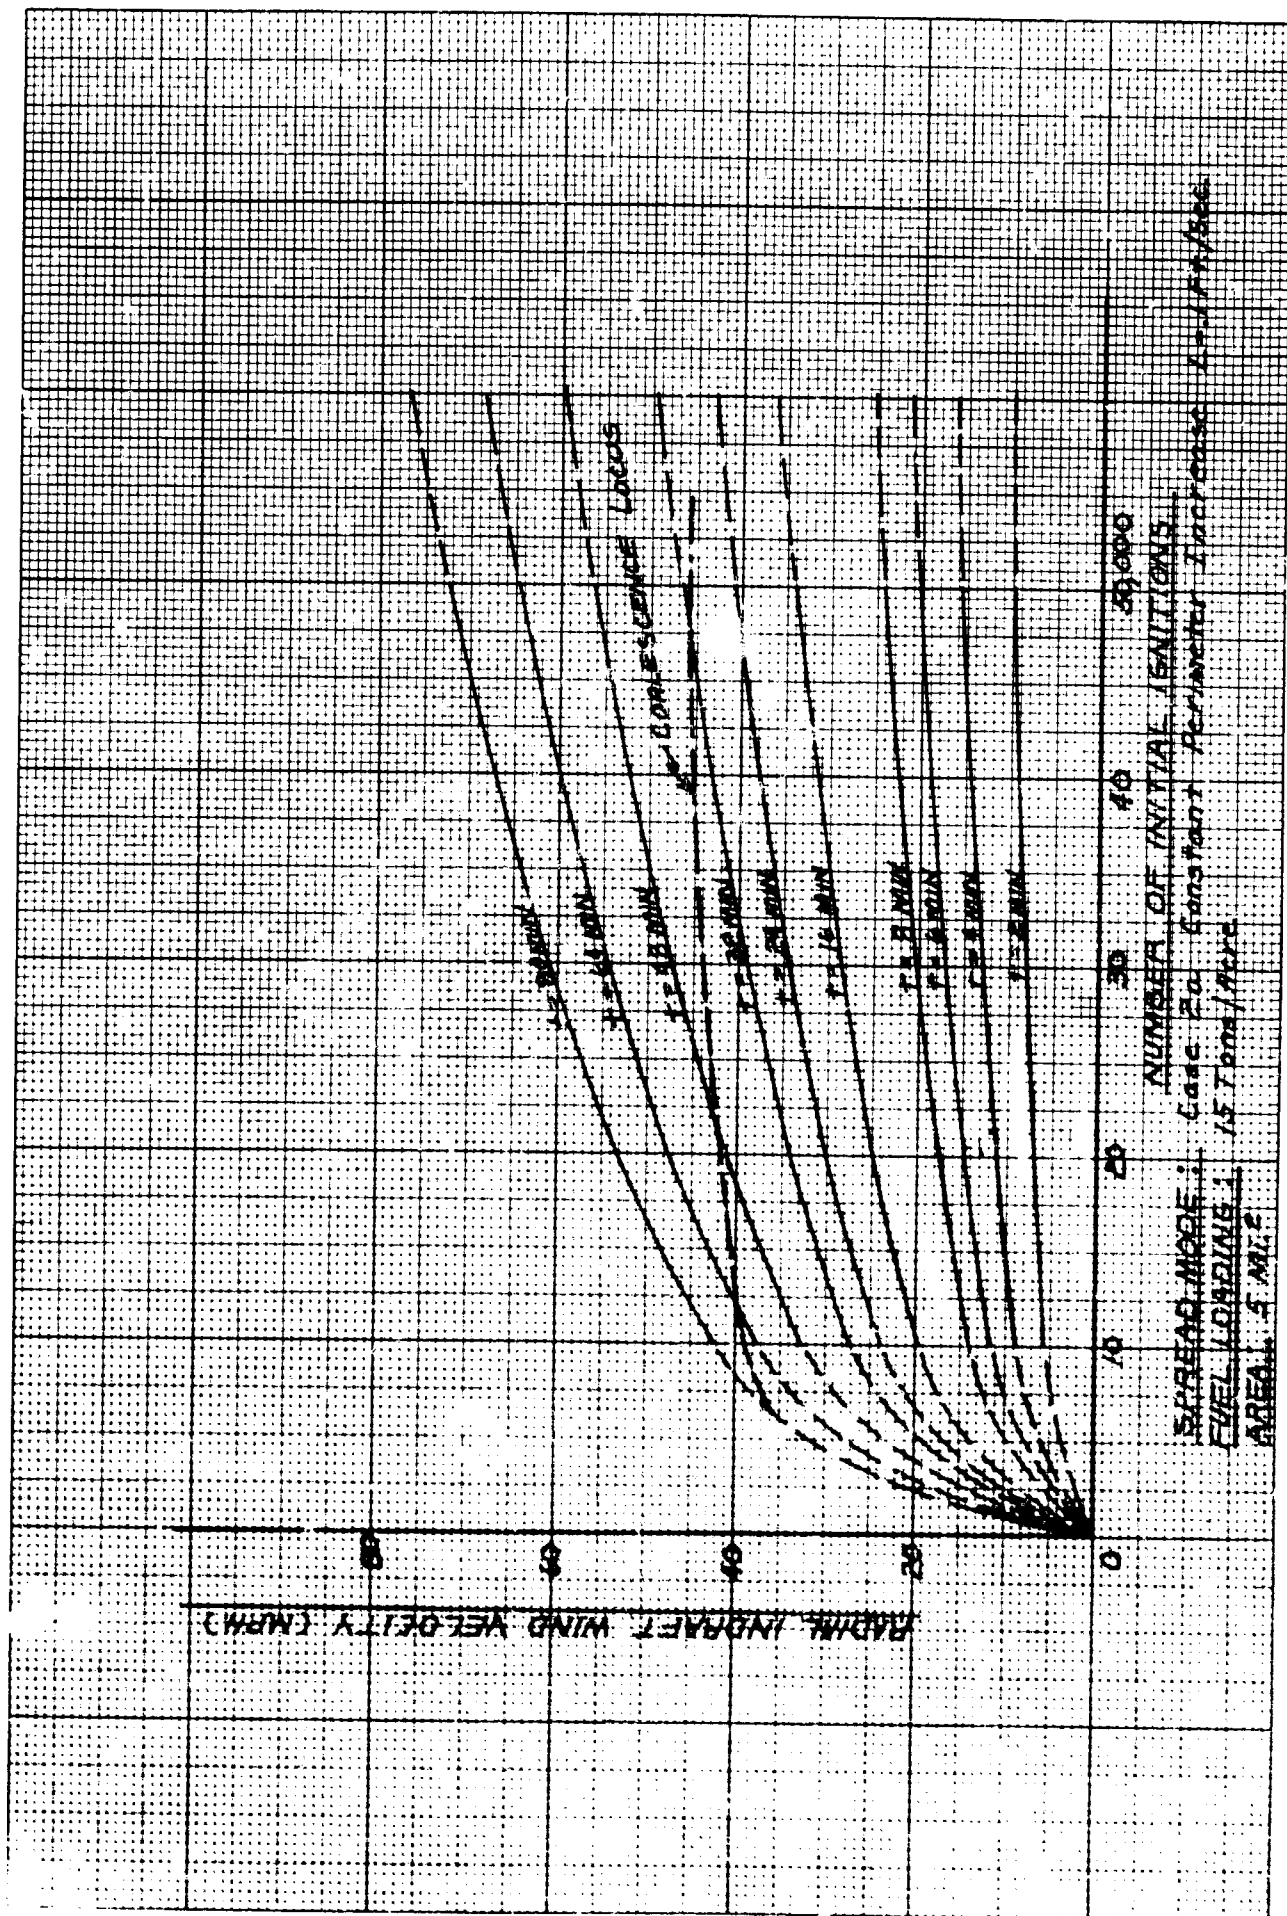


Fig. IV-22

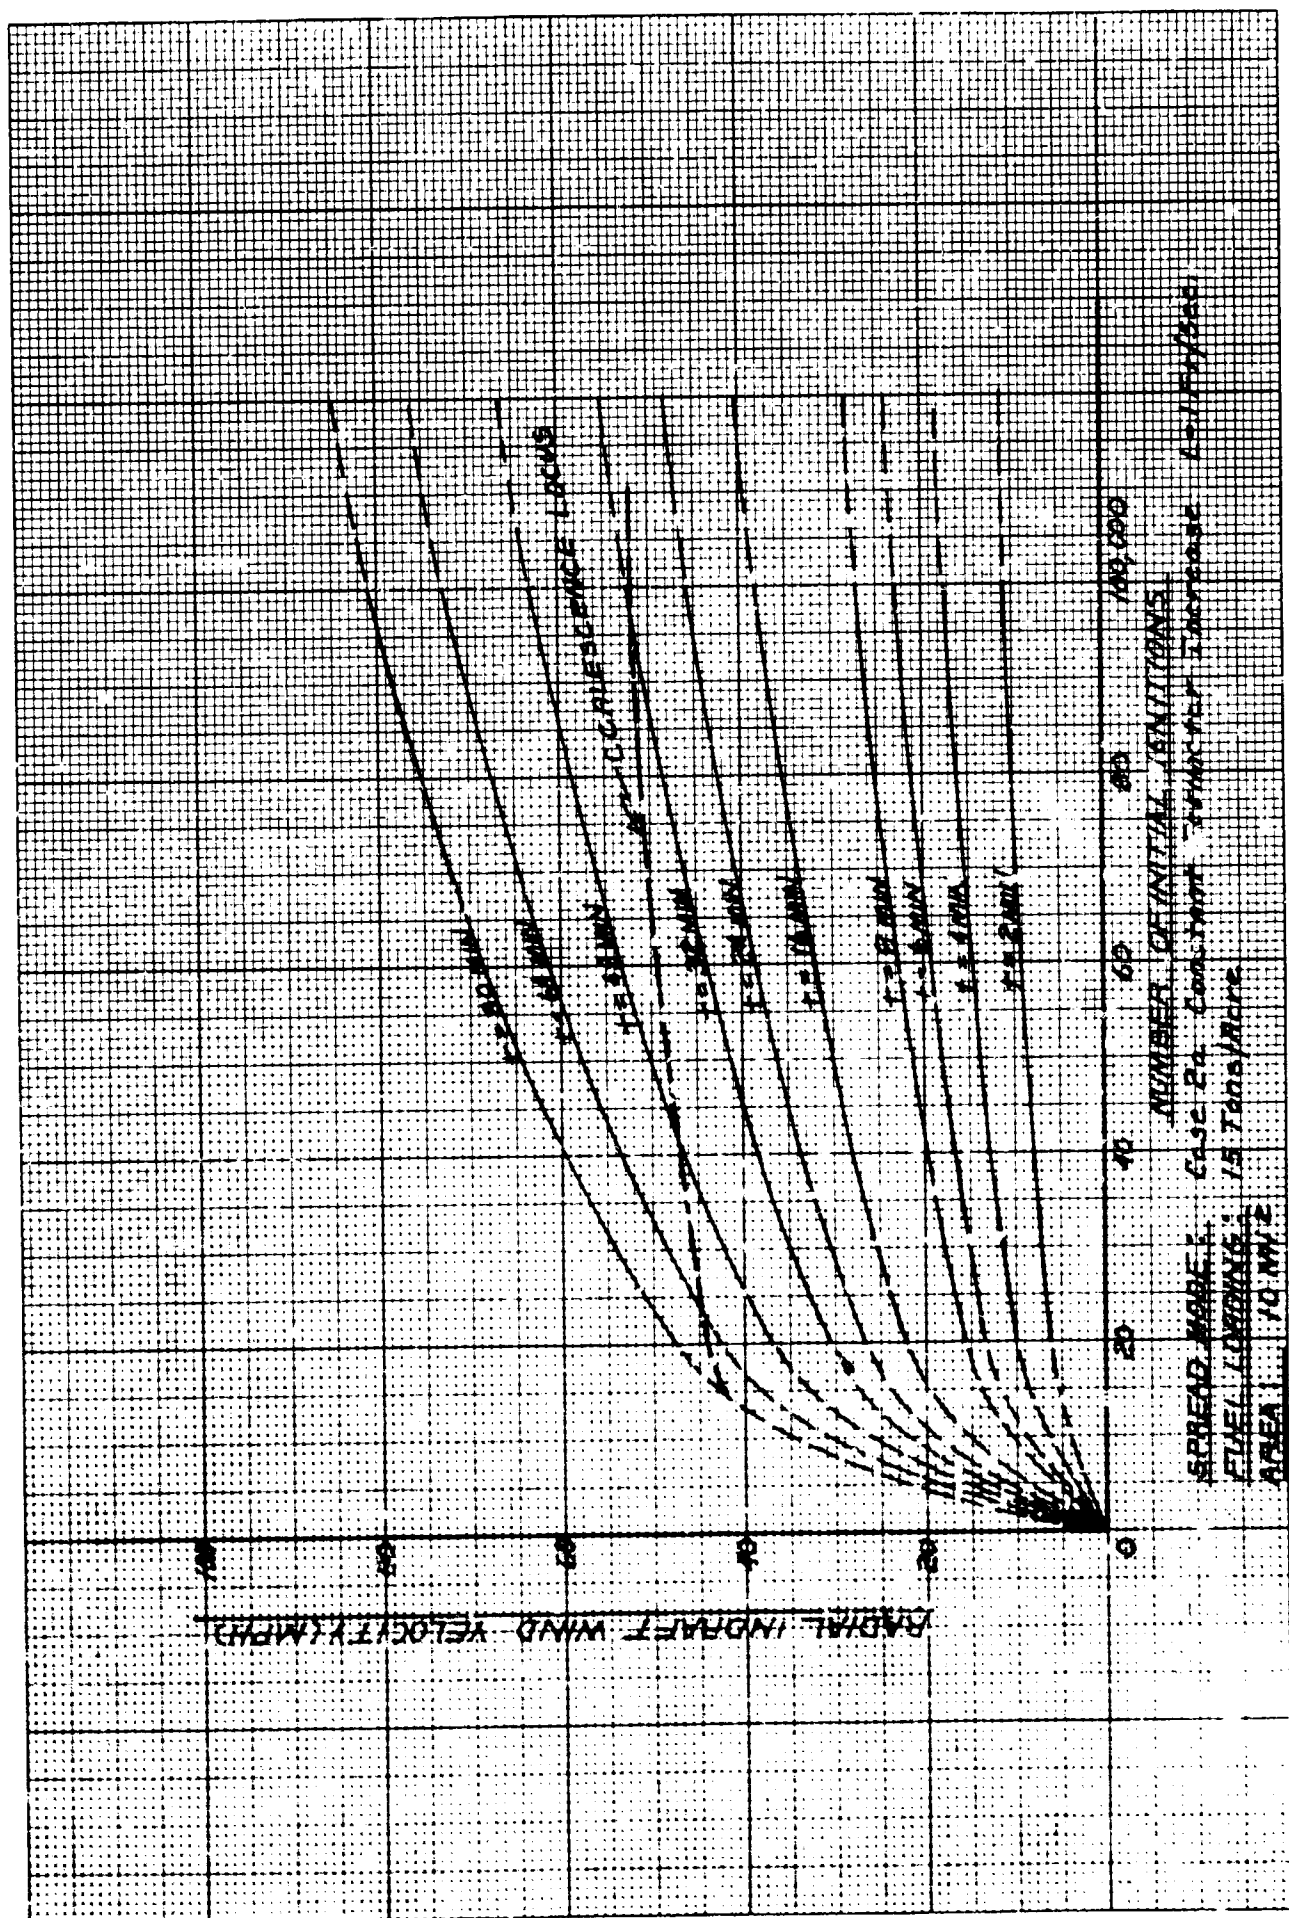


Fig. IV-23

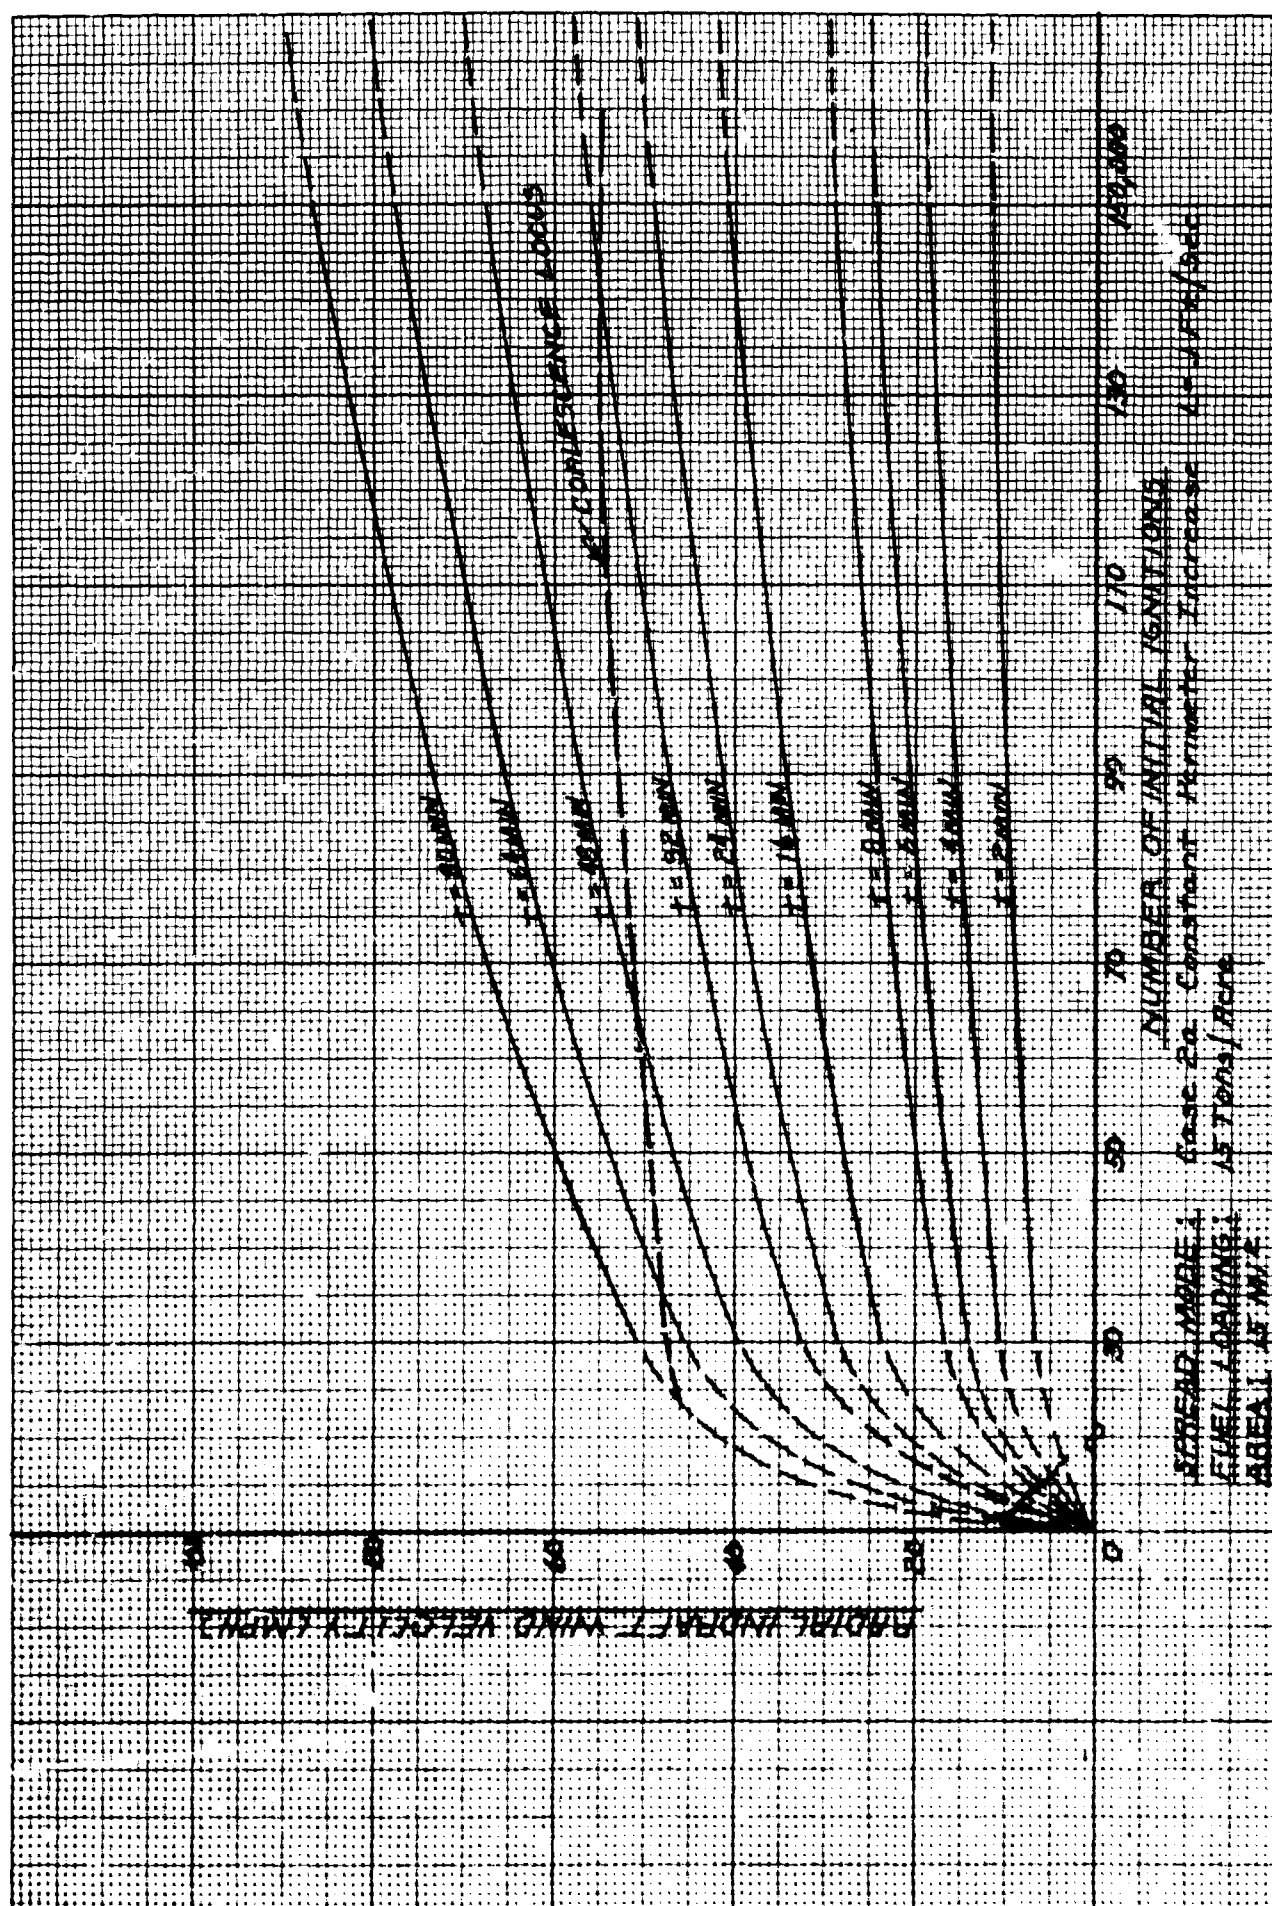


Fig. IV-24

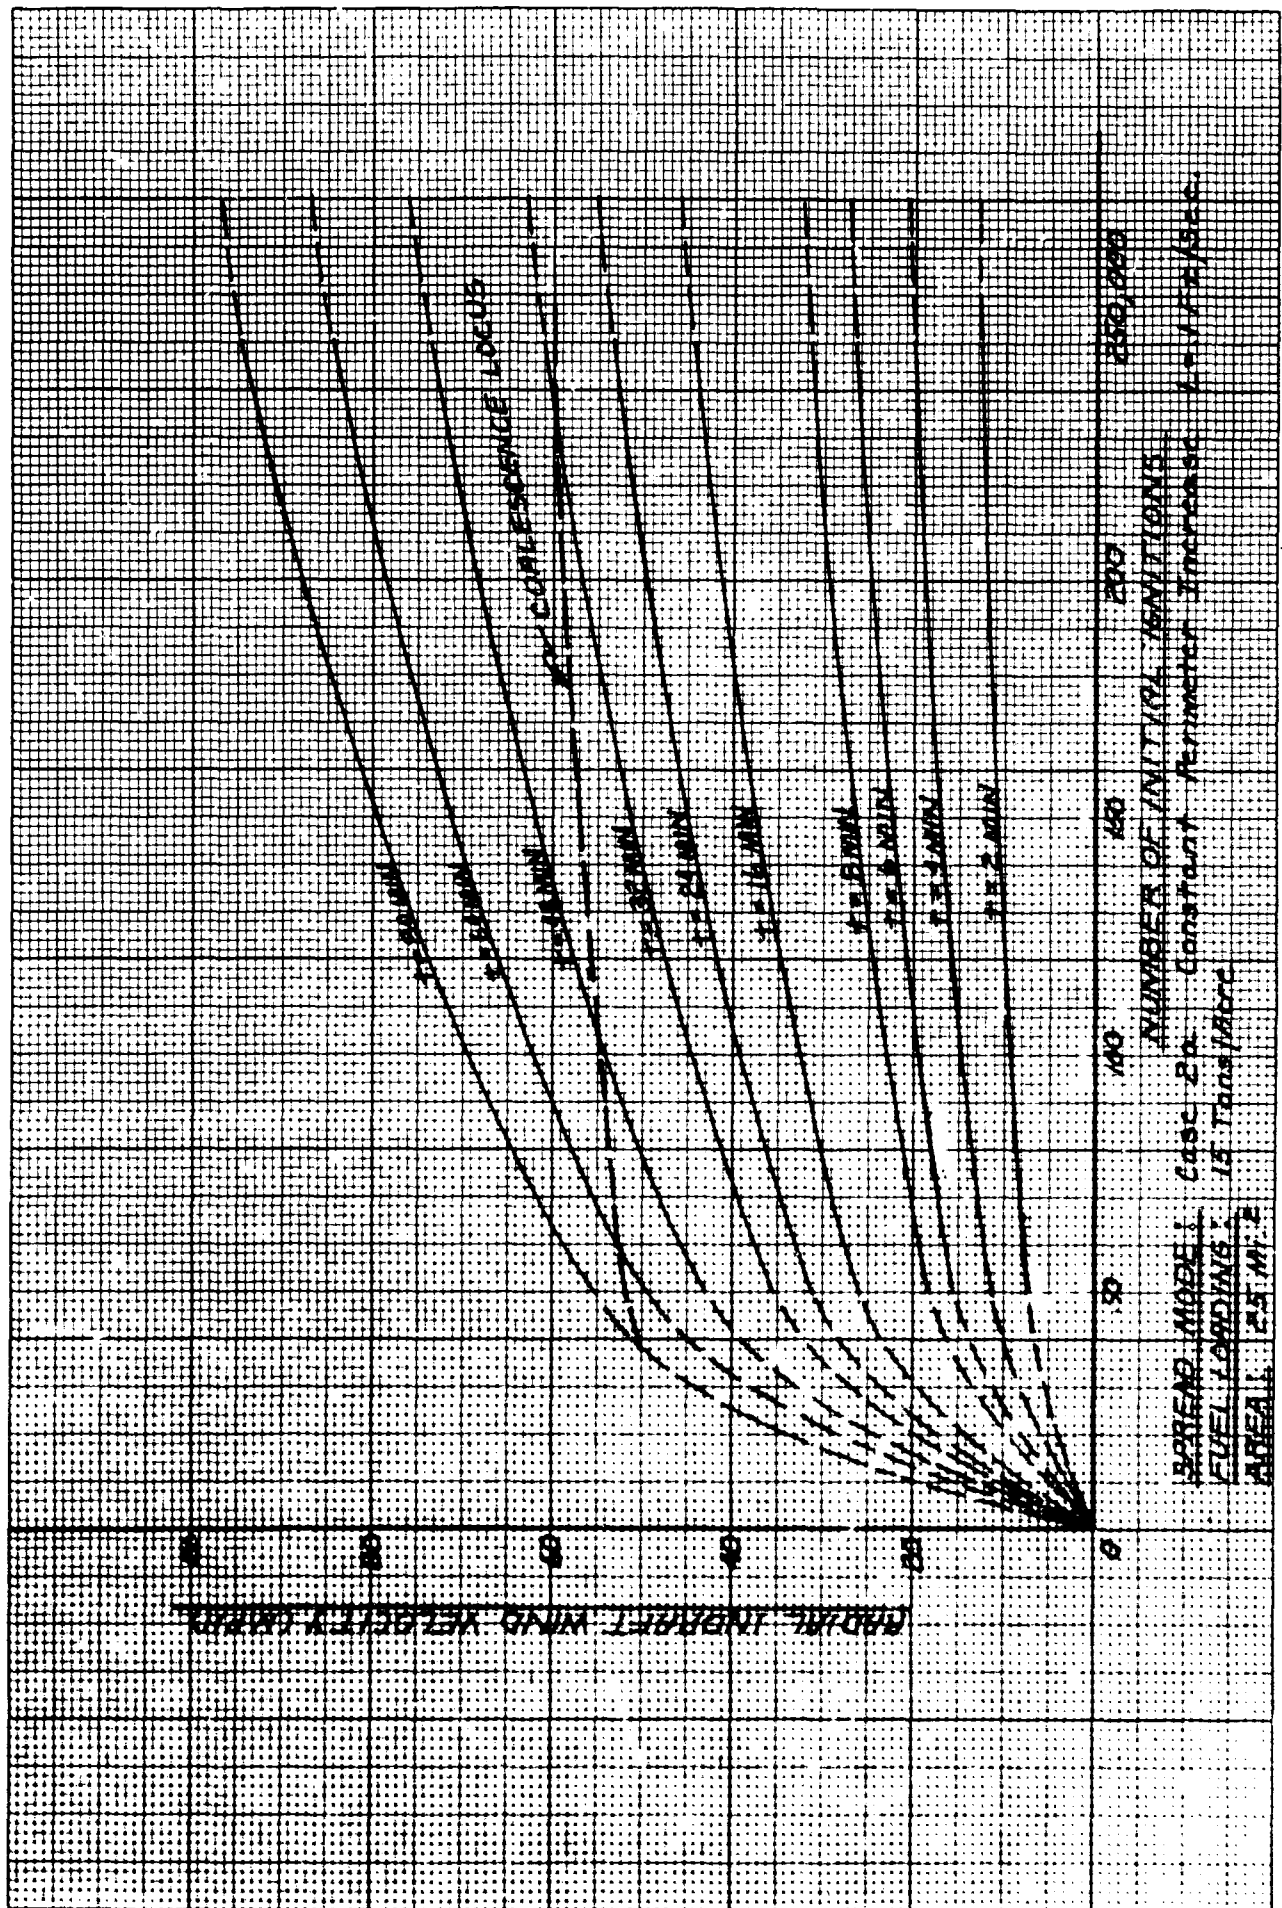


Fig. IV-25

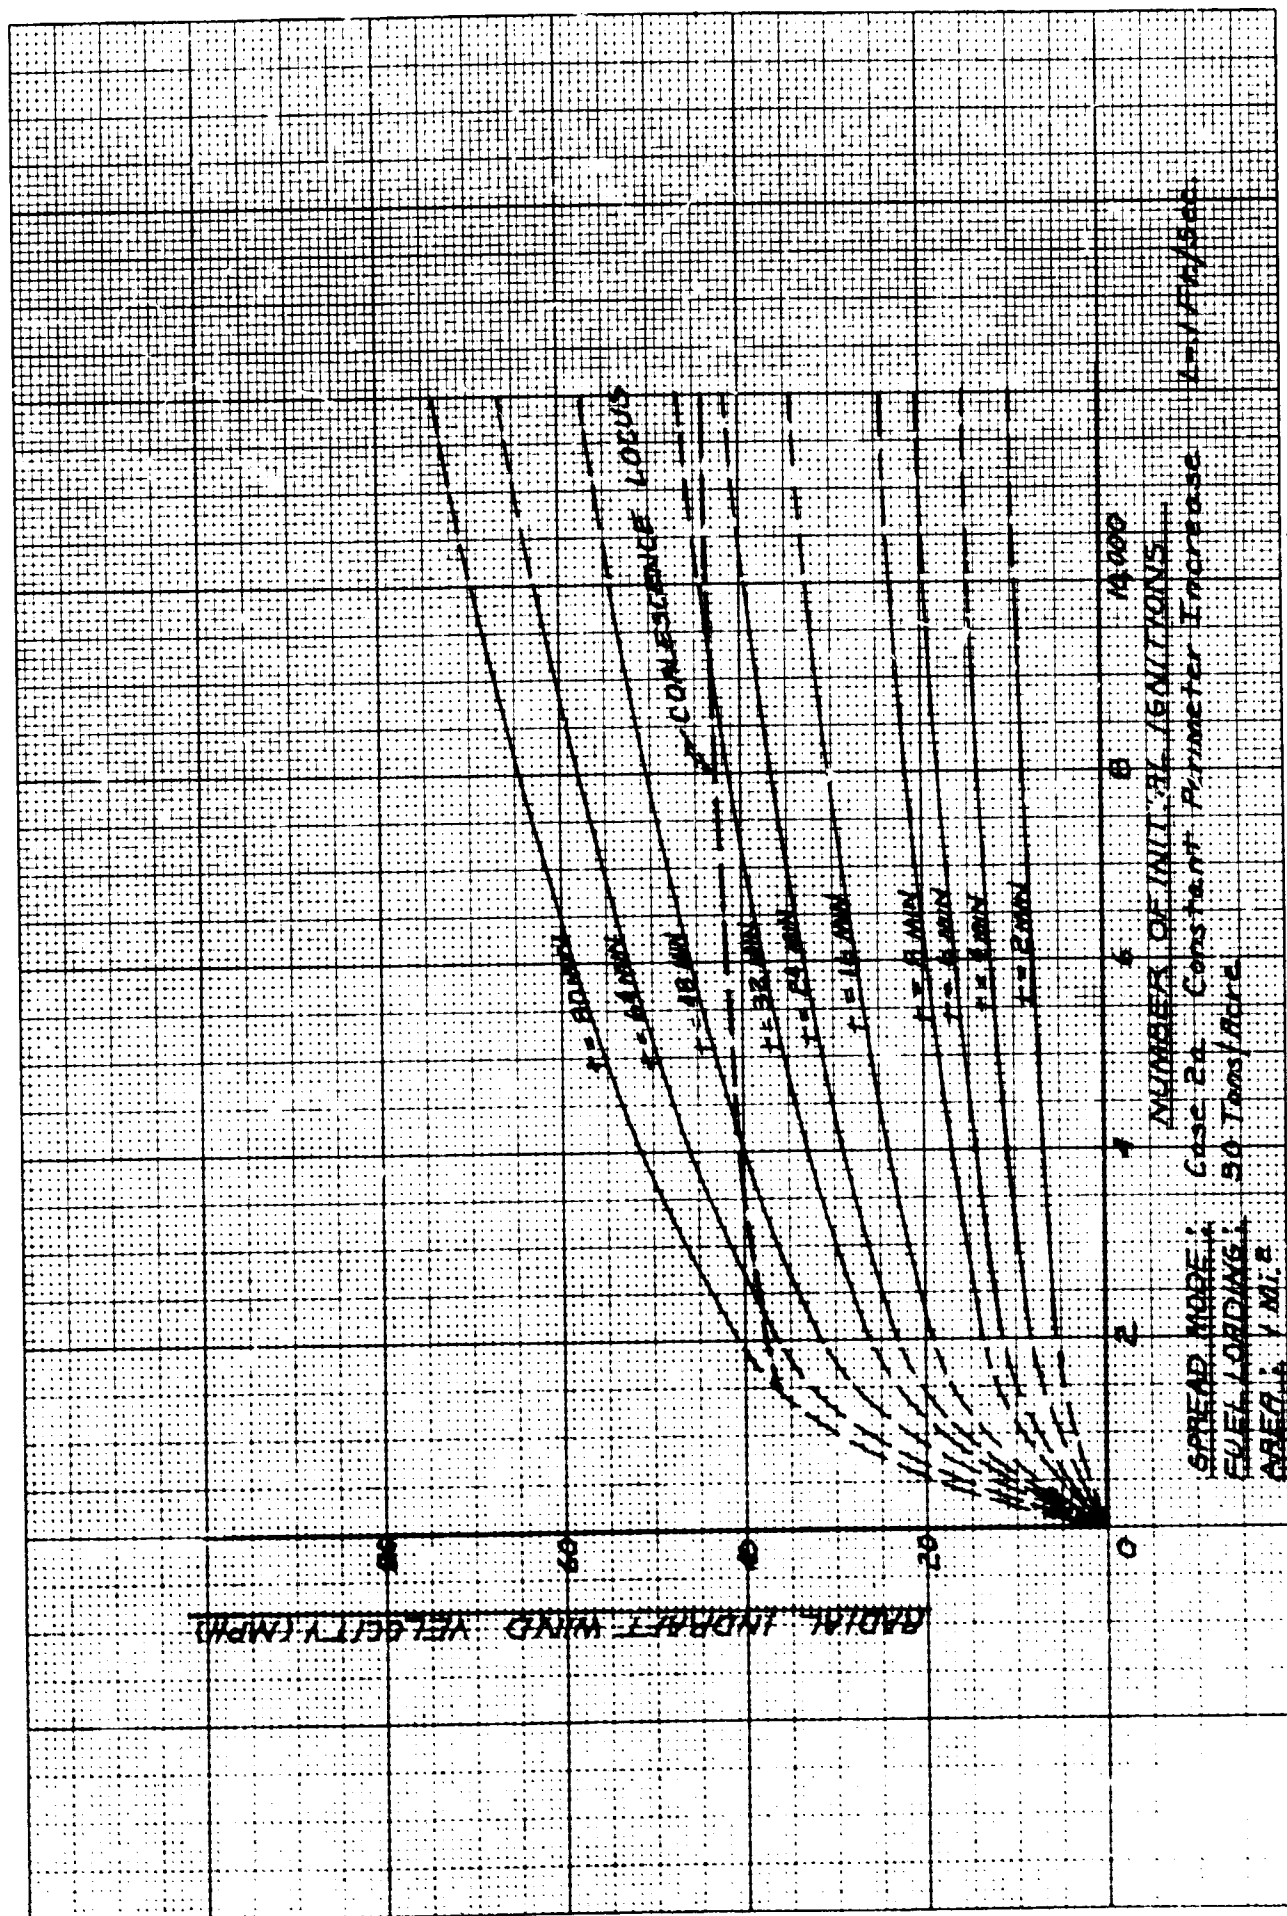


Fig. IV-26

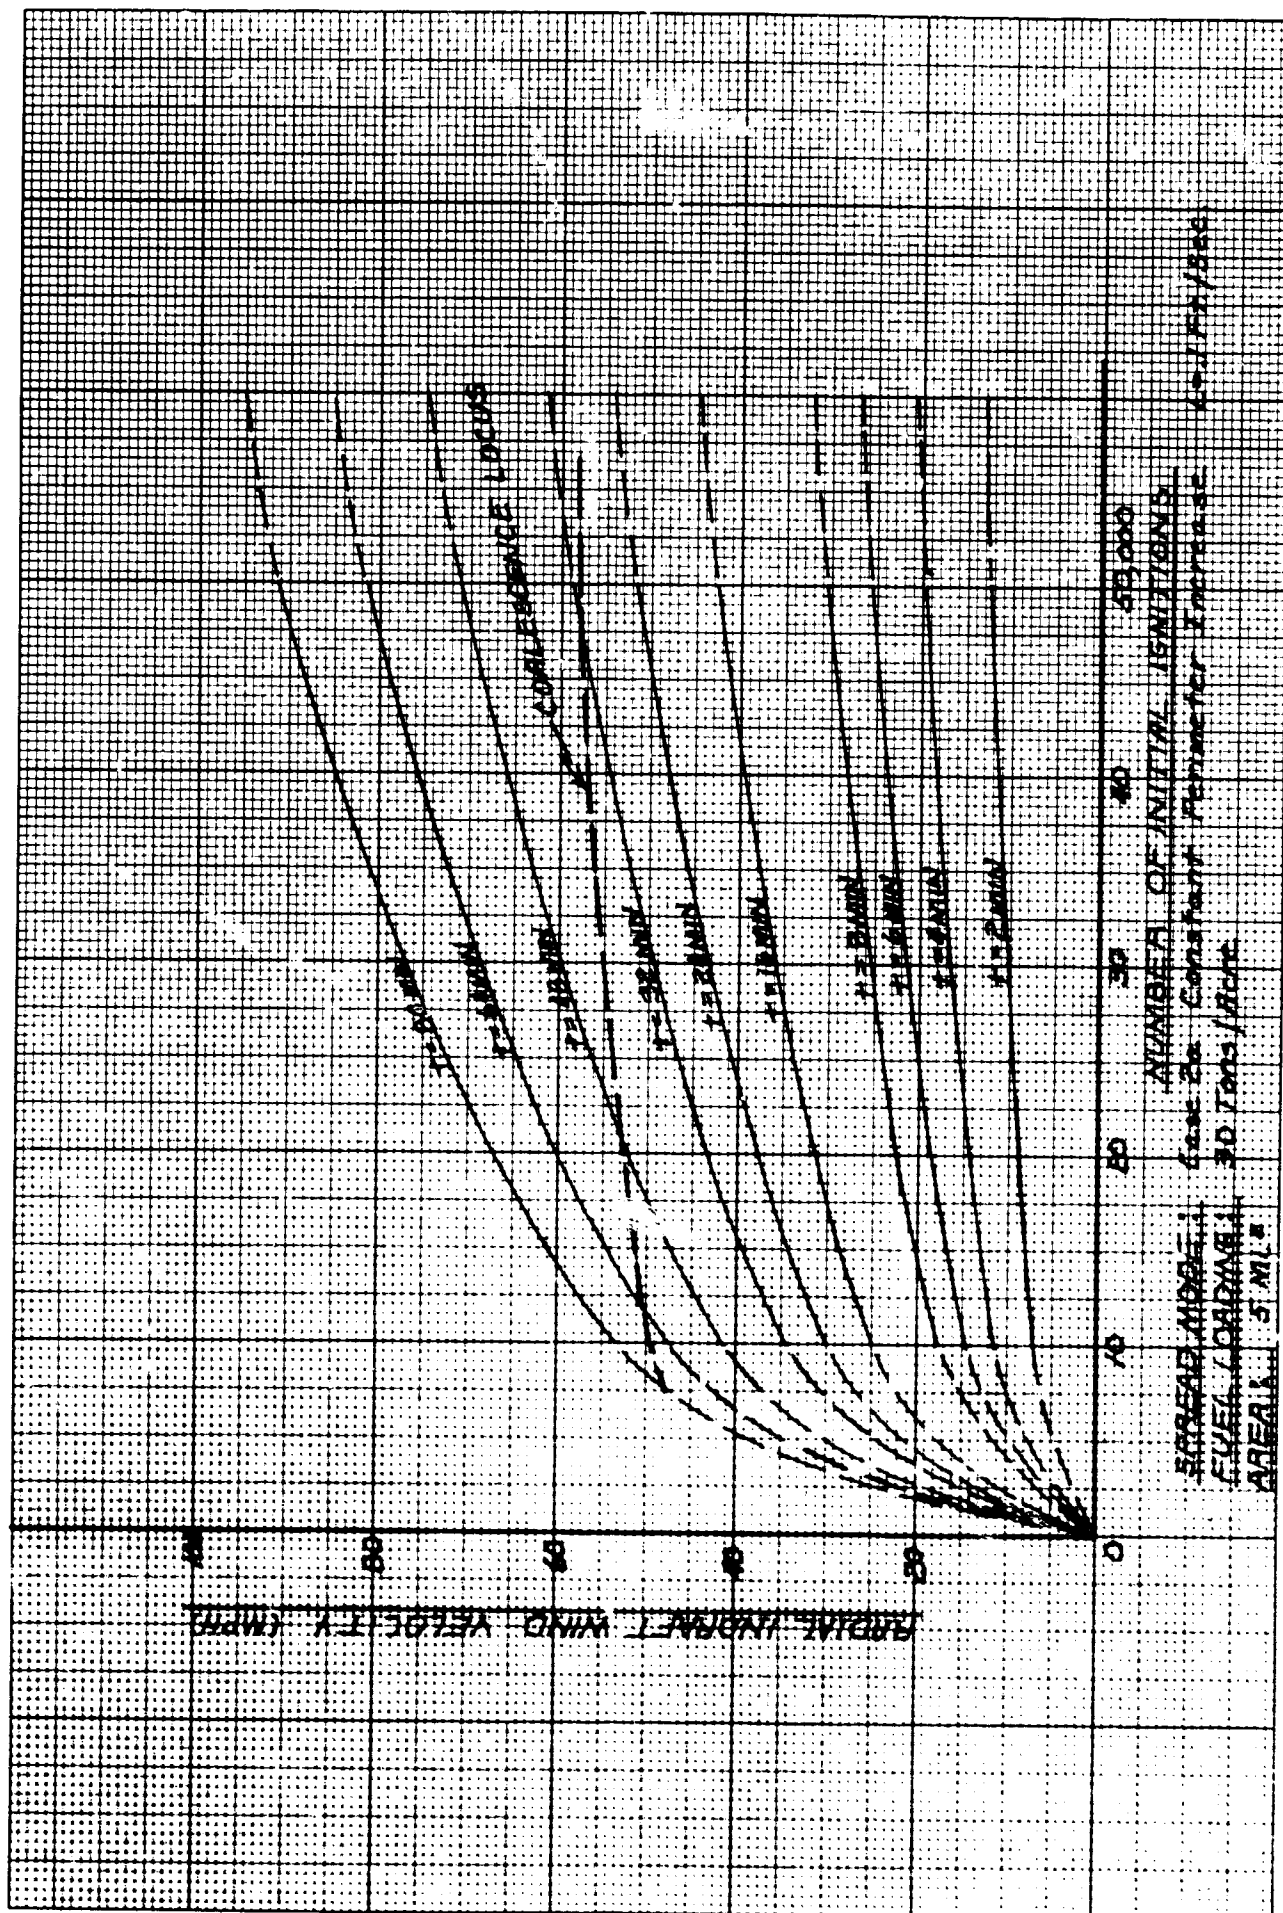


Fig. IV-27

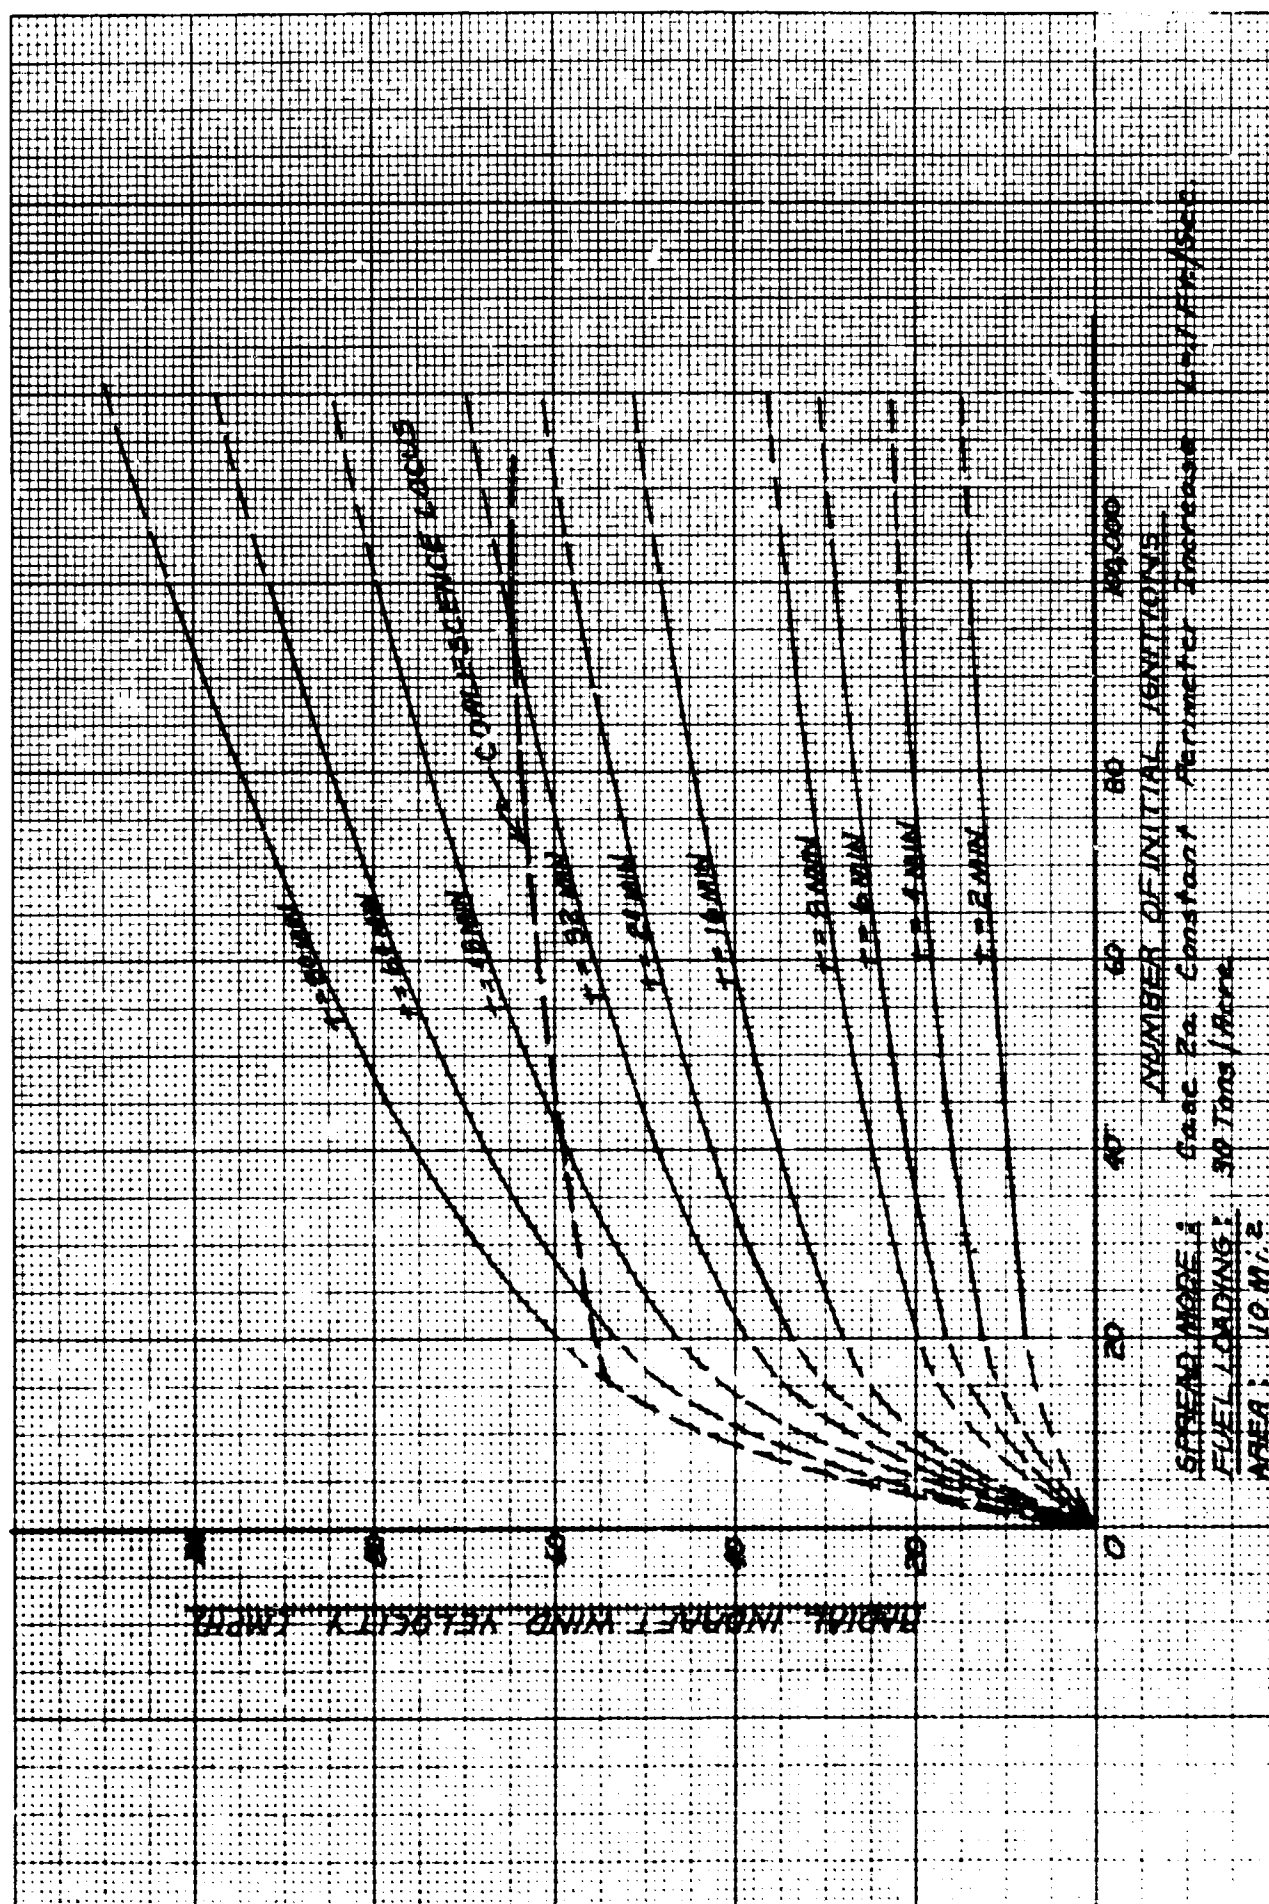


Fig. IV-28

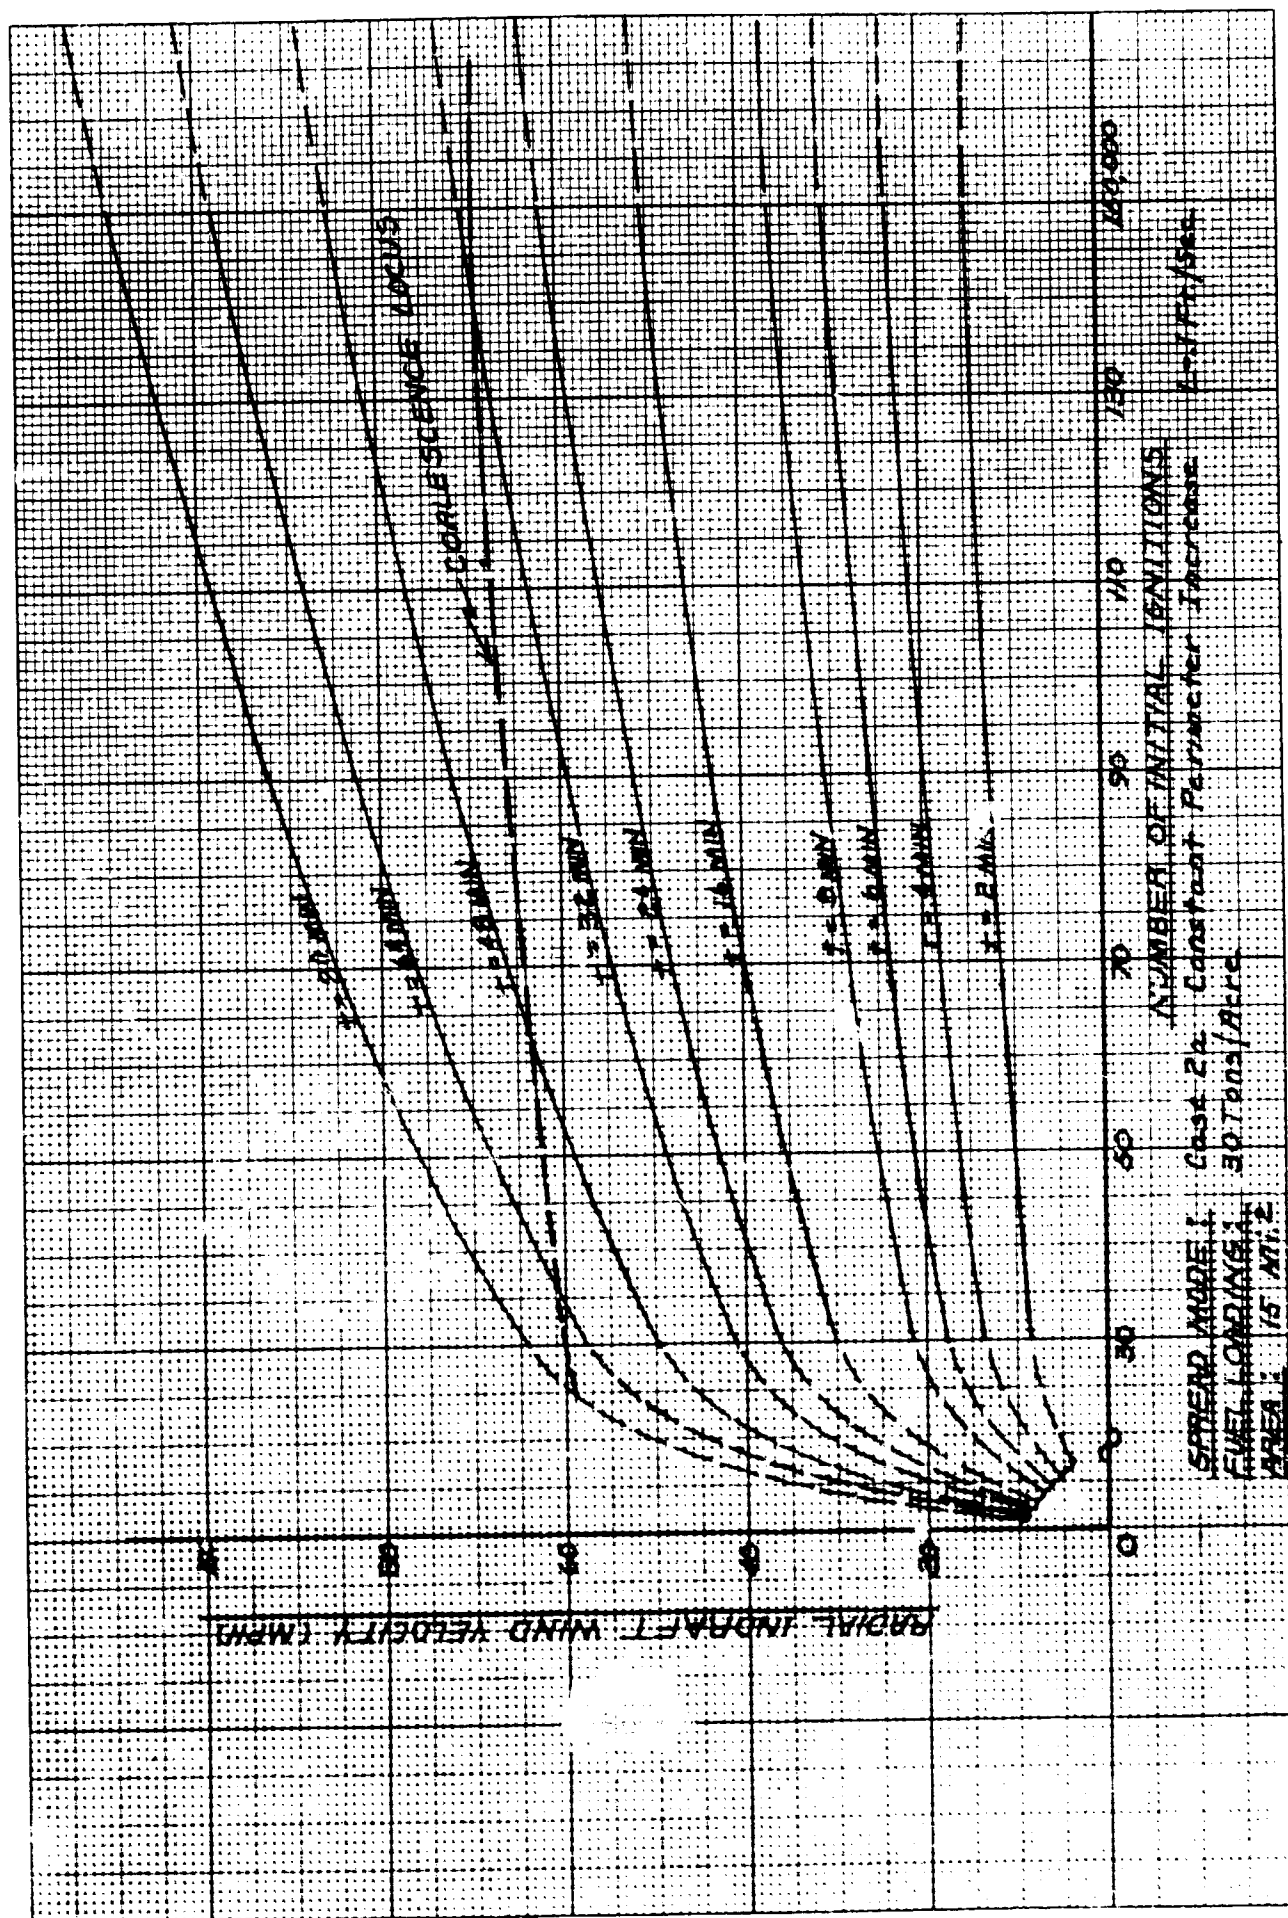


Fig. IV-29

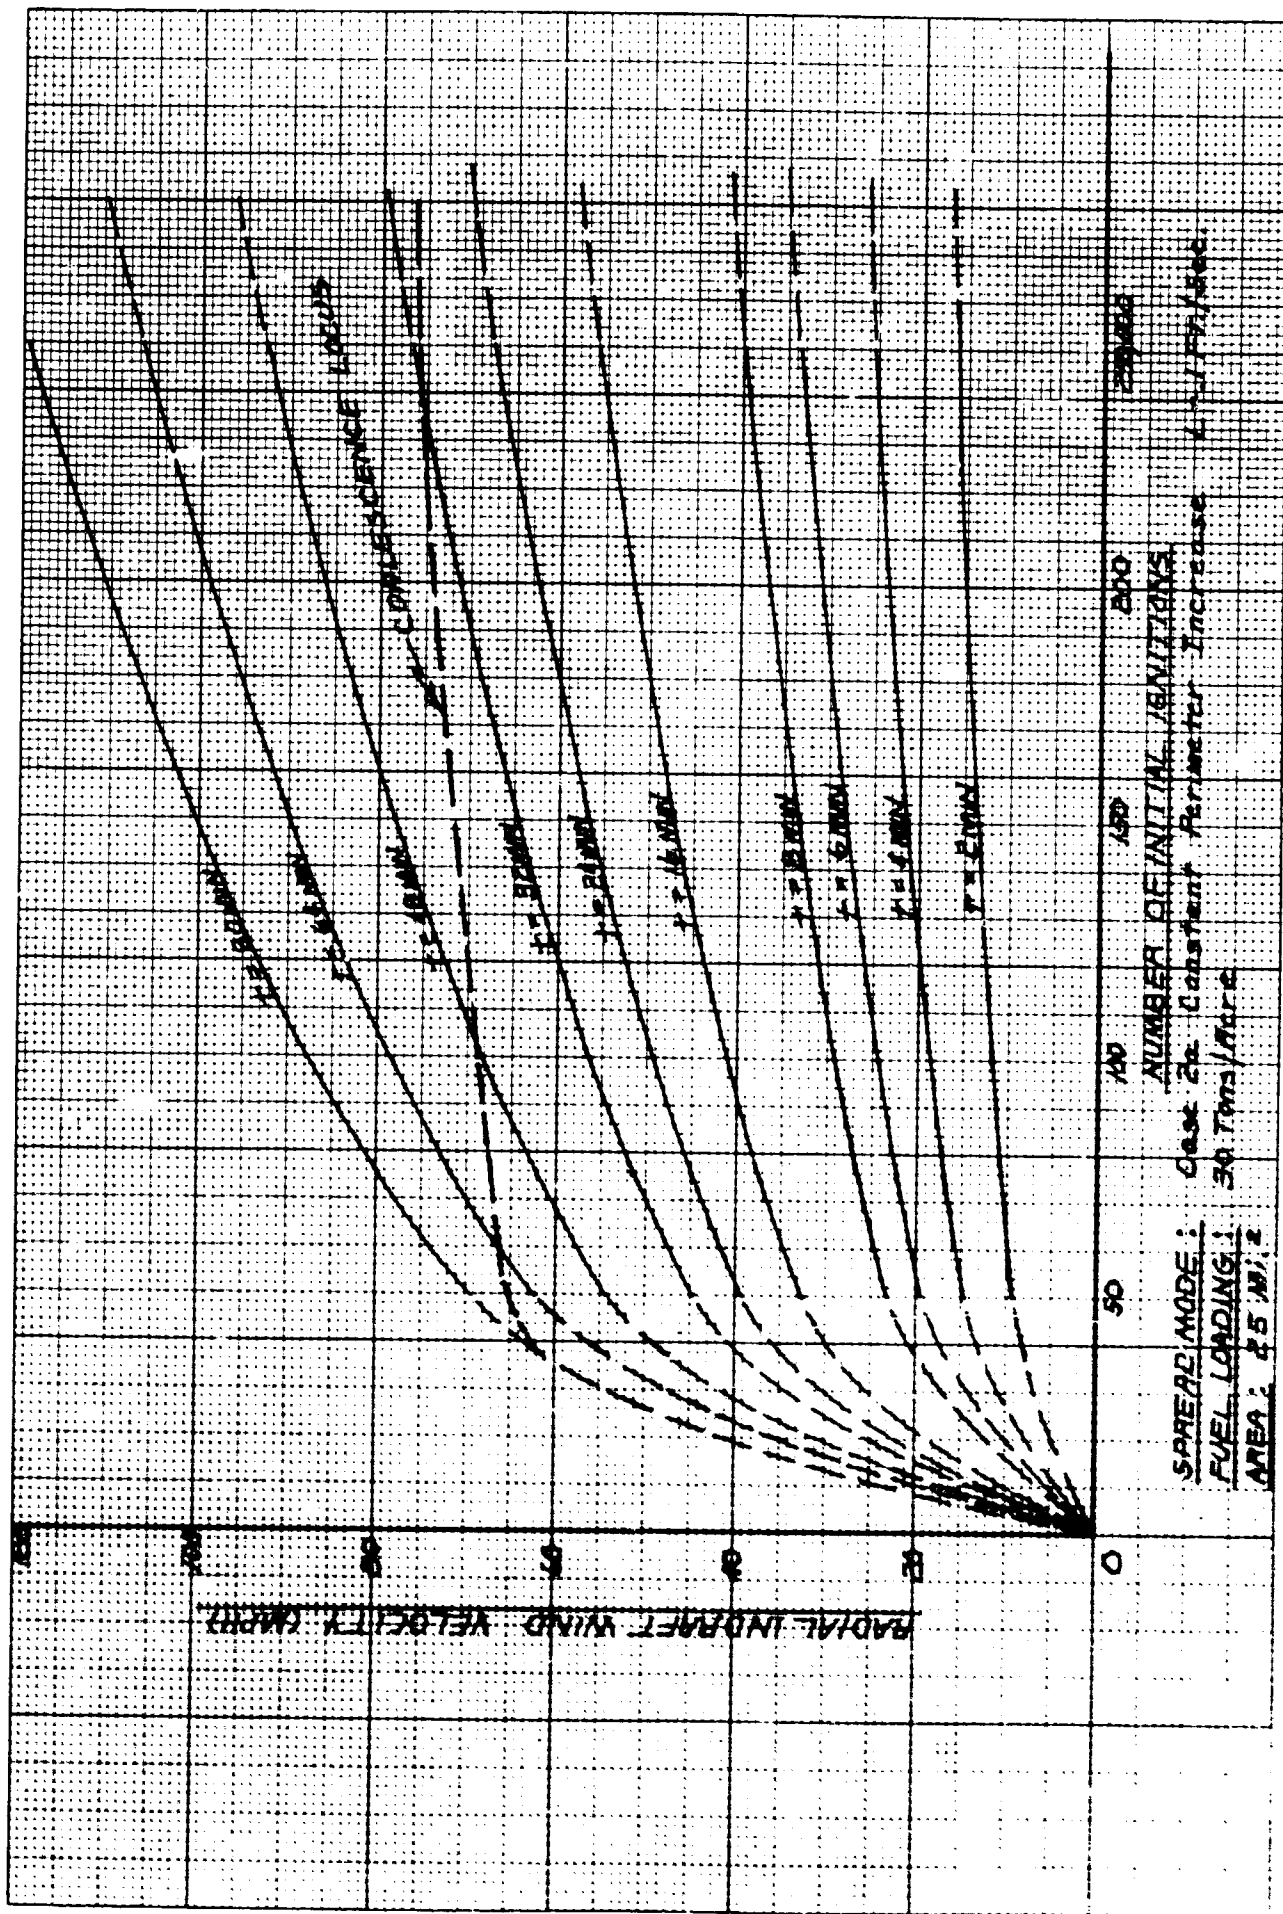


Fig. IV-30

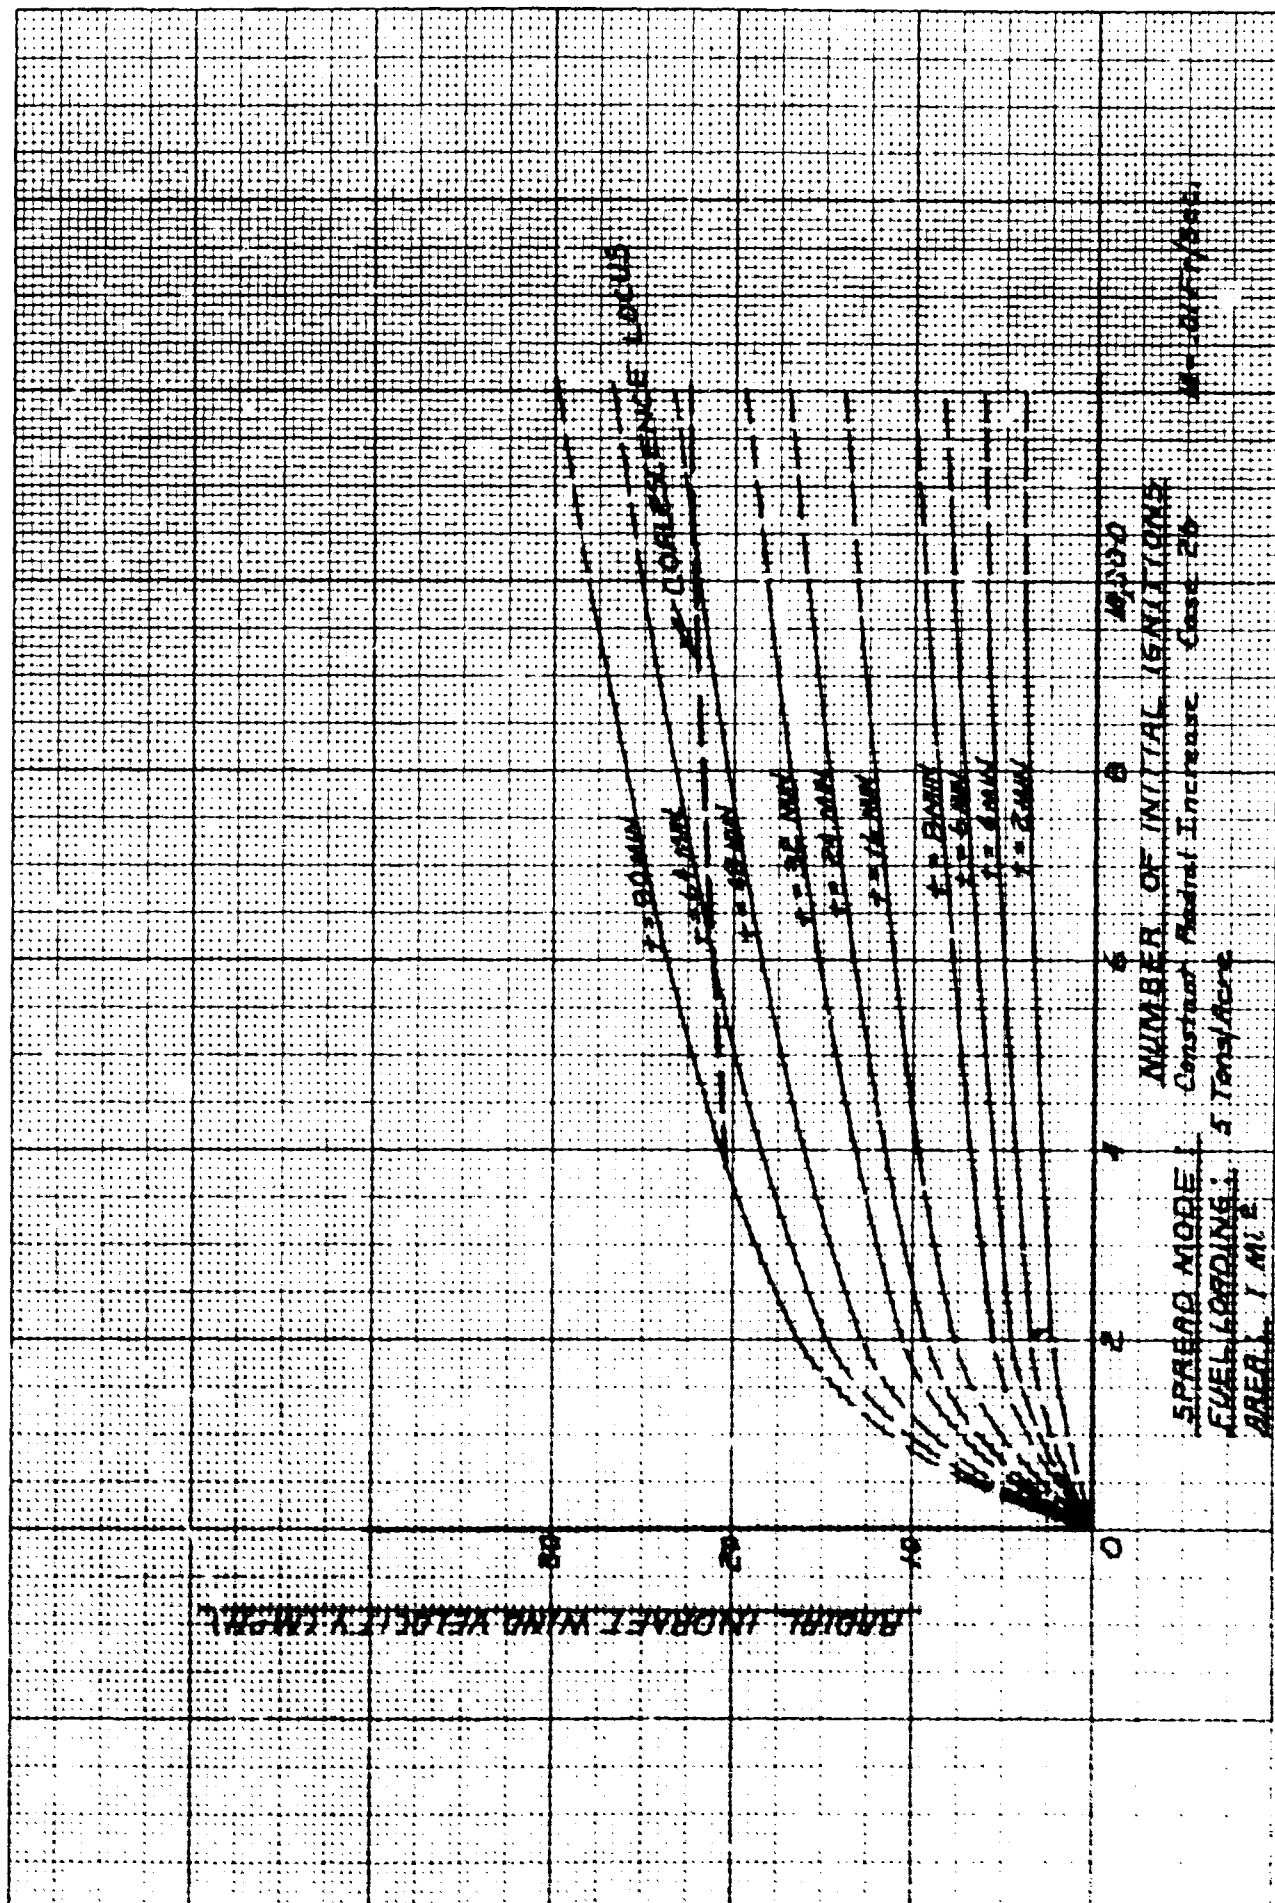


Fig. IV-31



Fig. IV-32

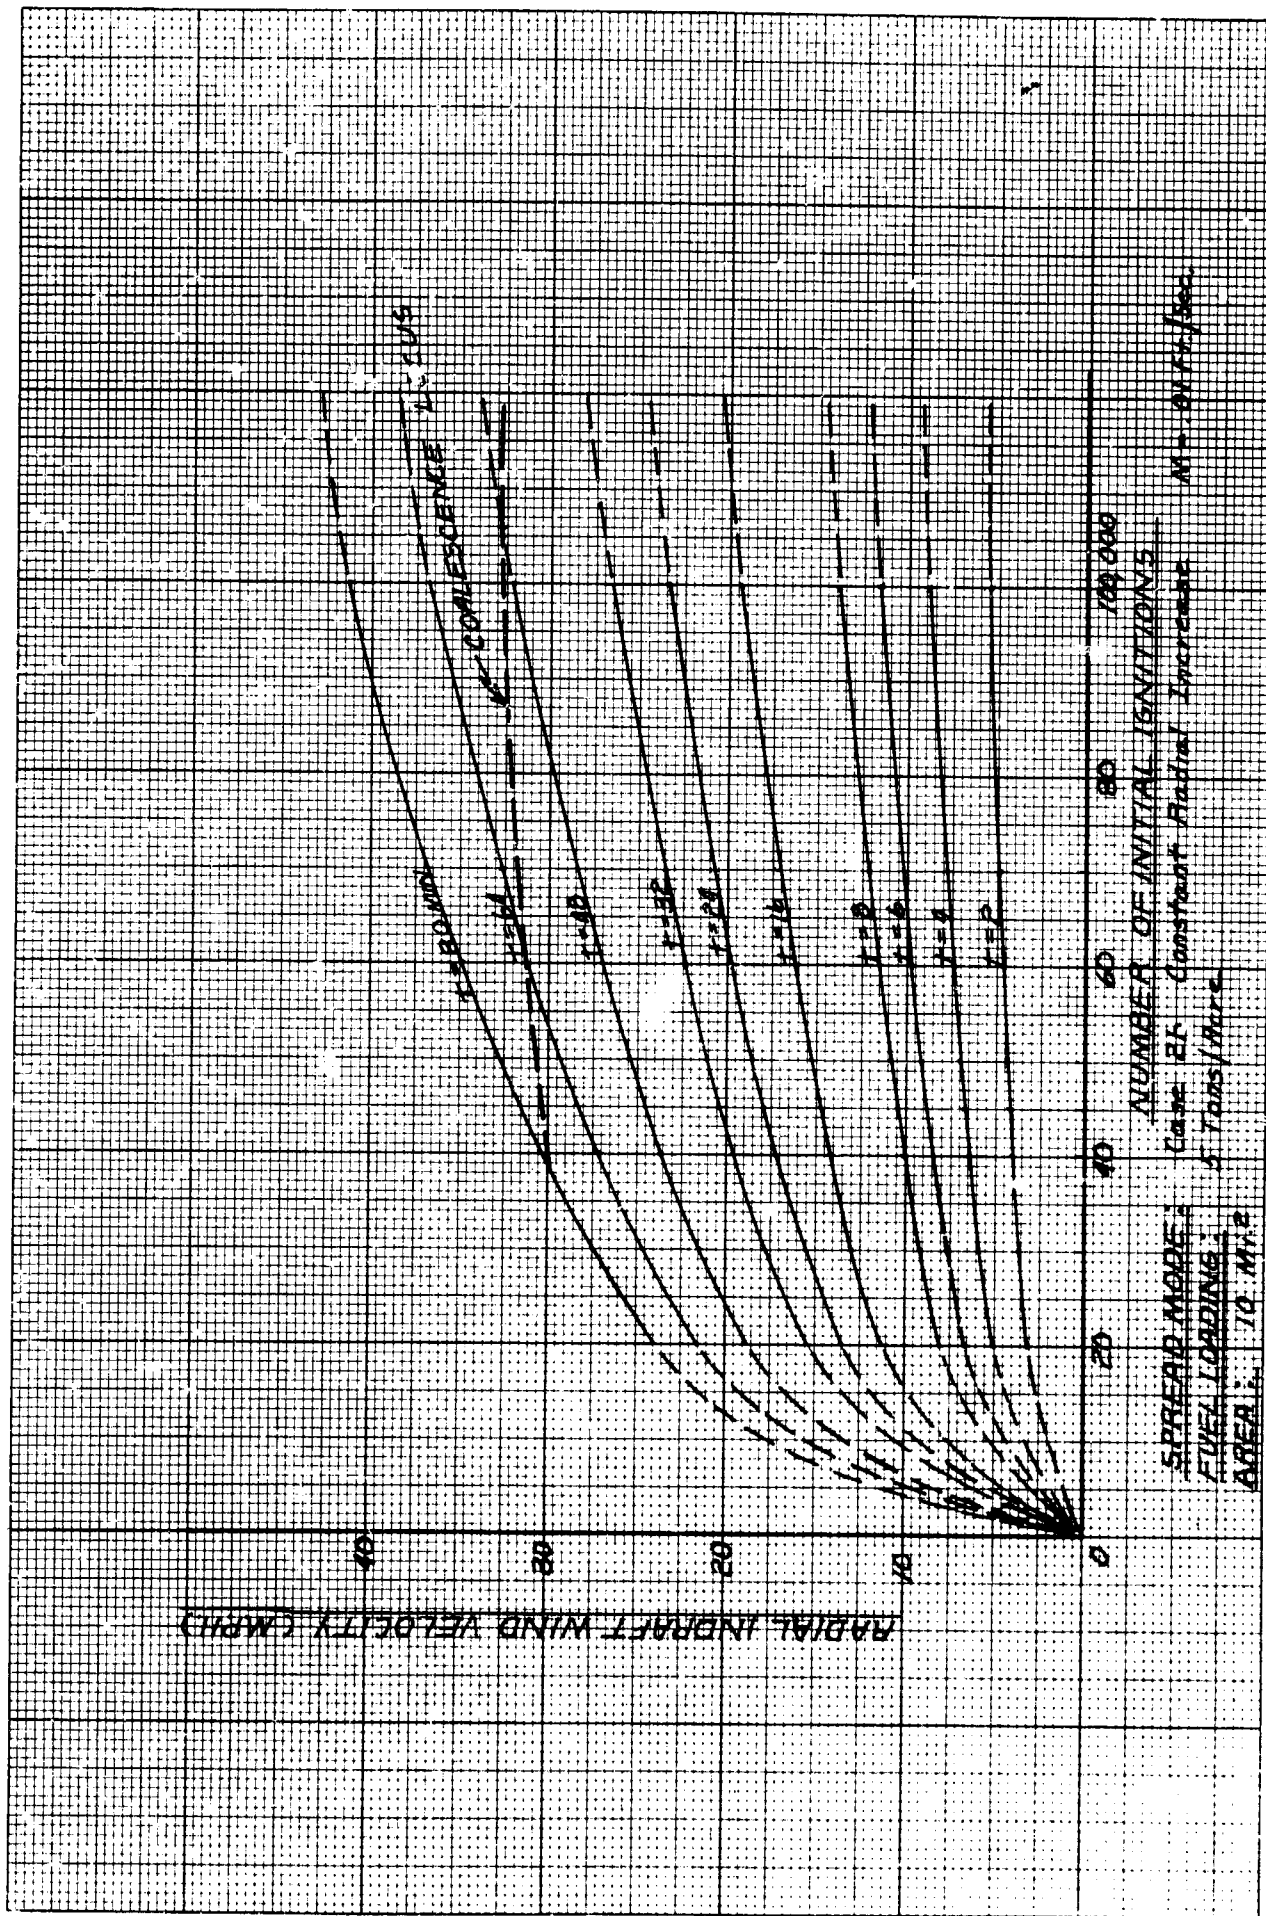


Fig. IV-33

IV-35




Fig. IV-35

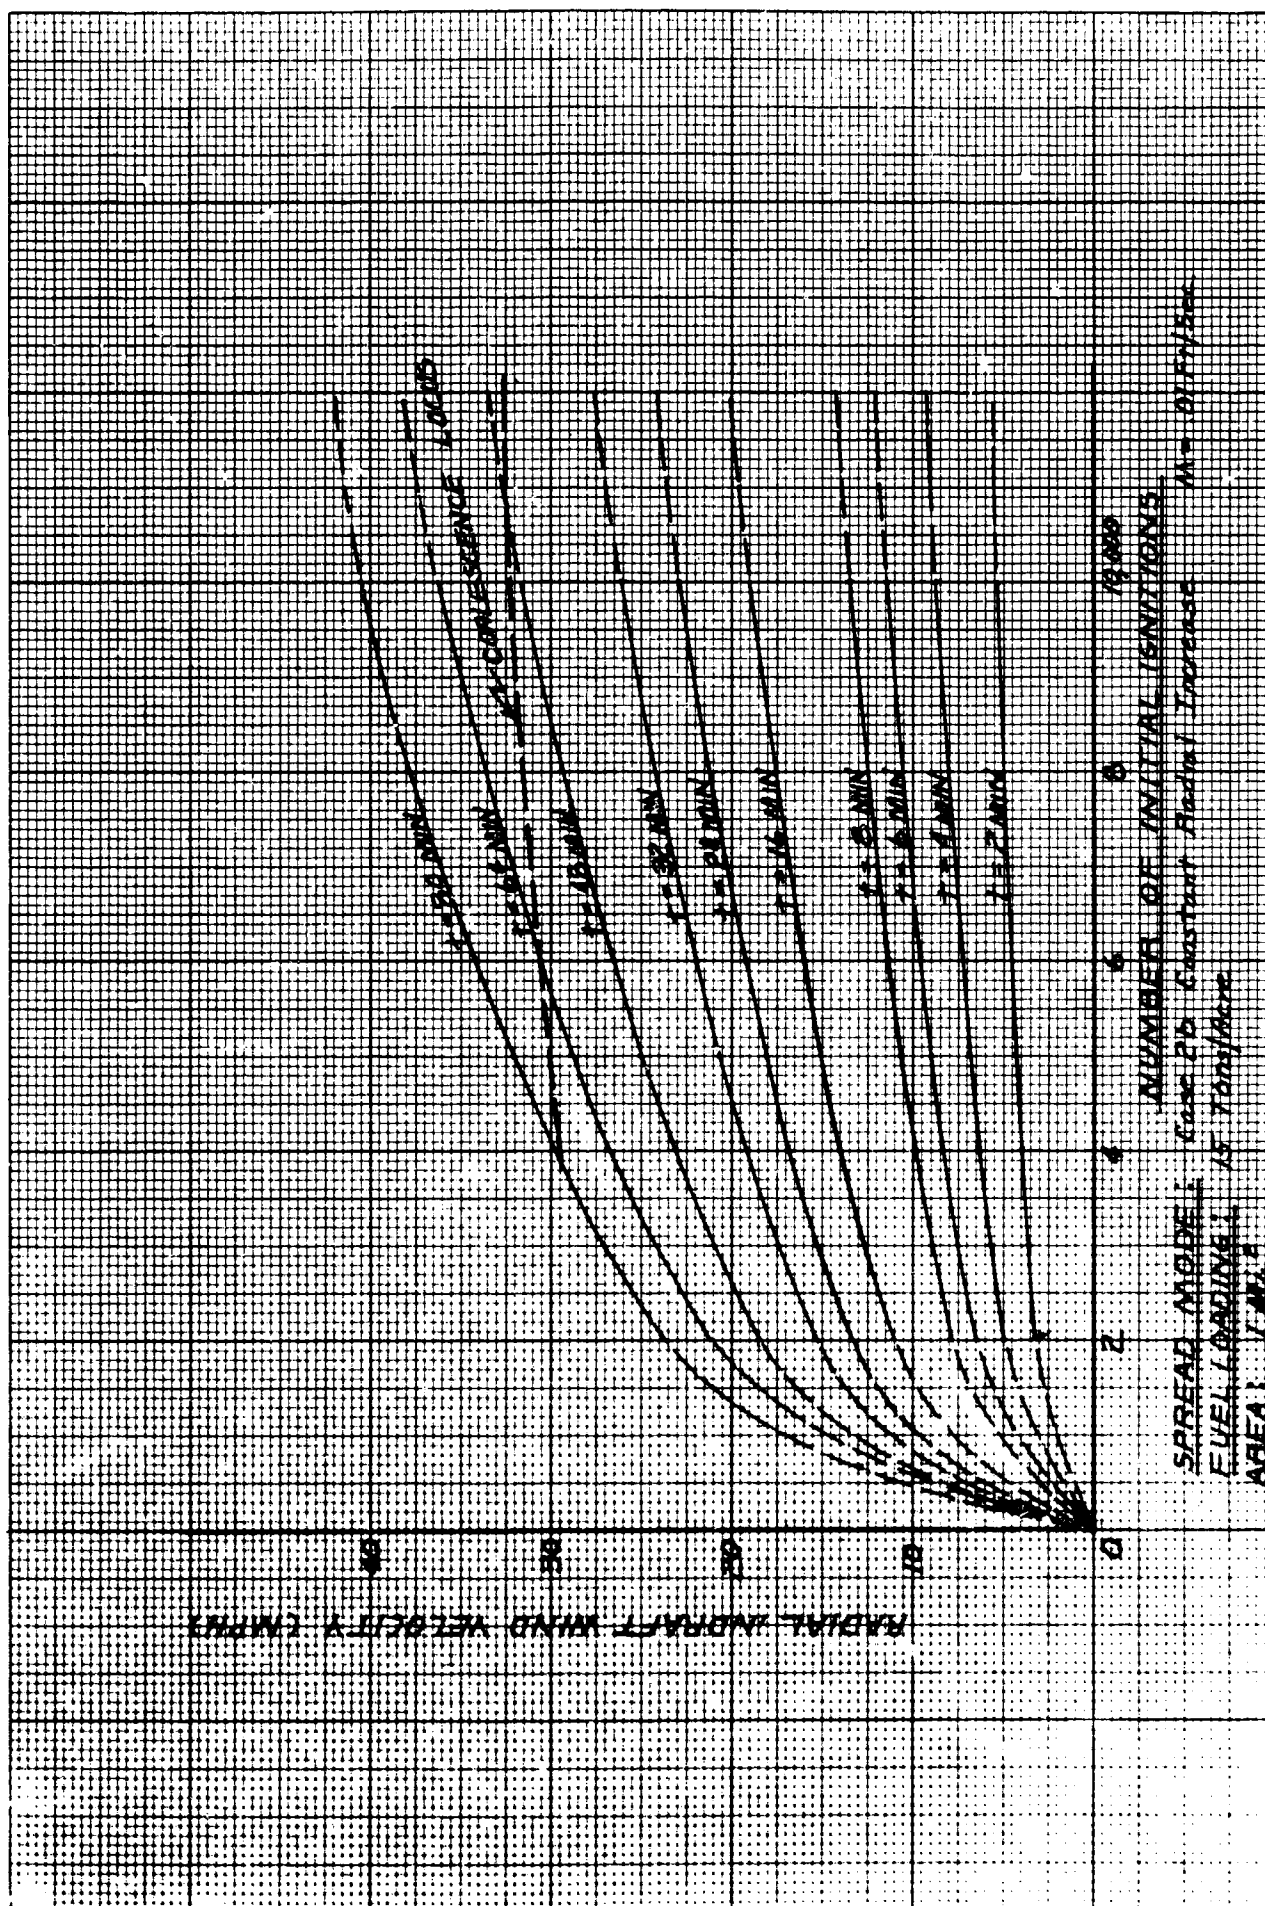


Fig. IV-36

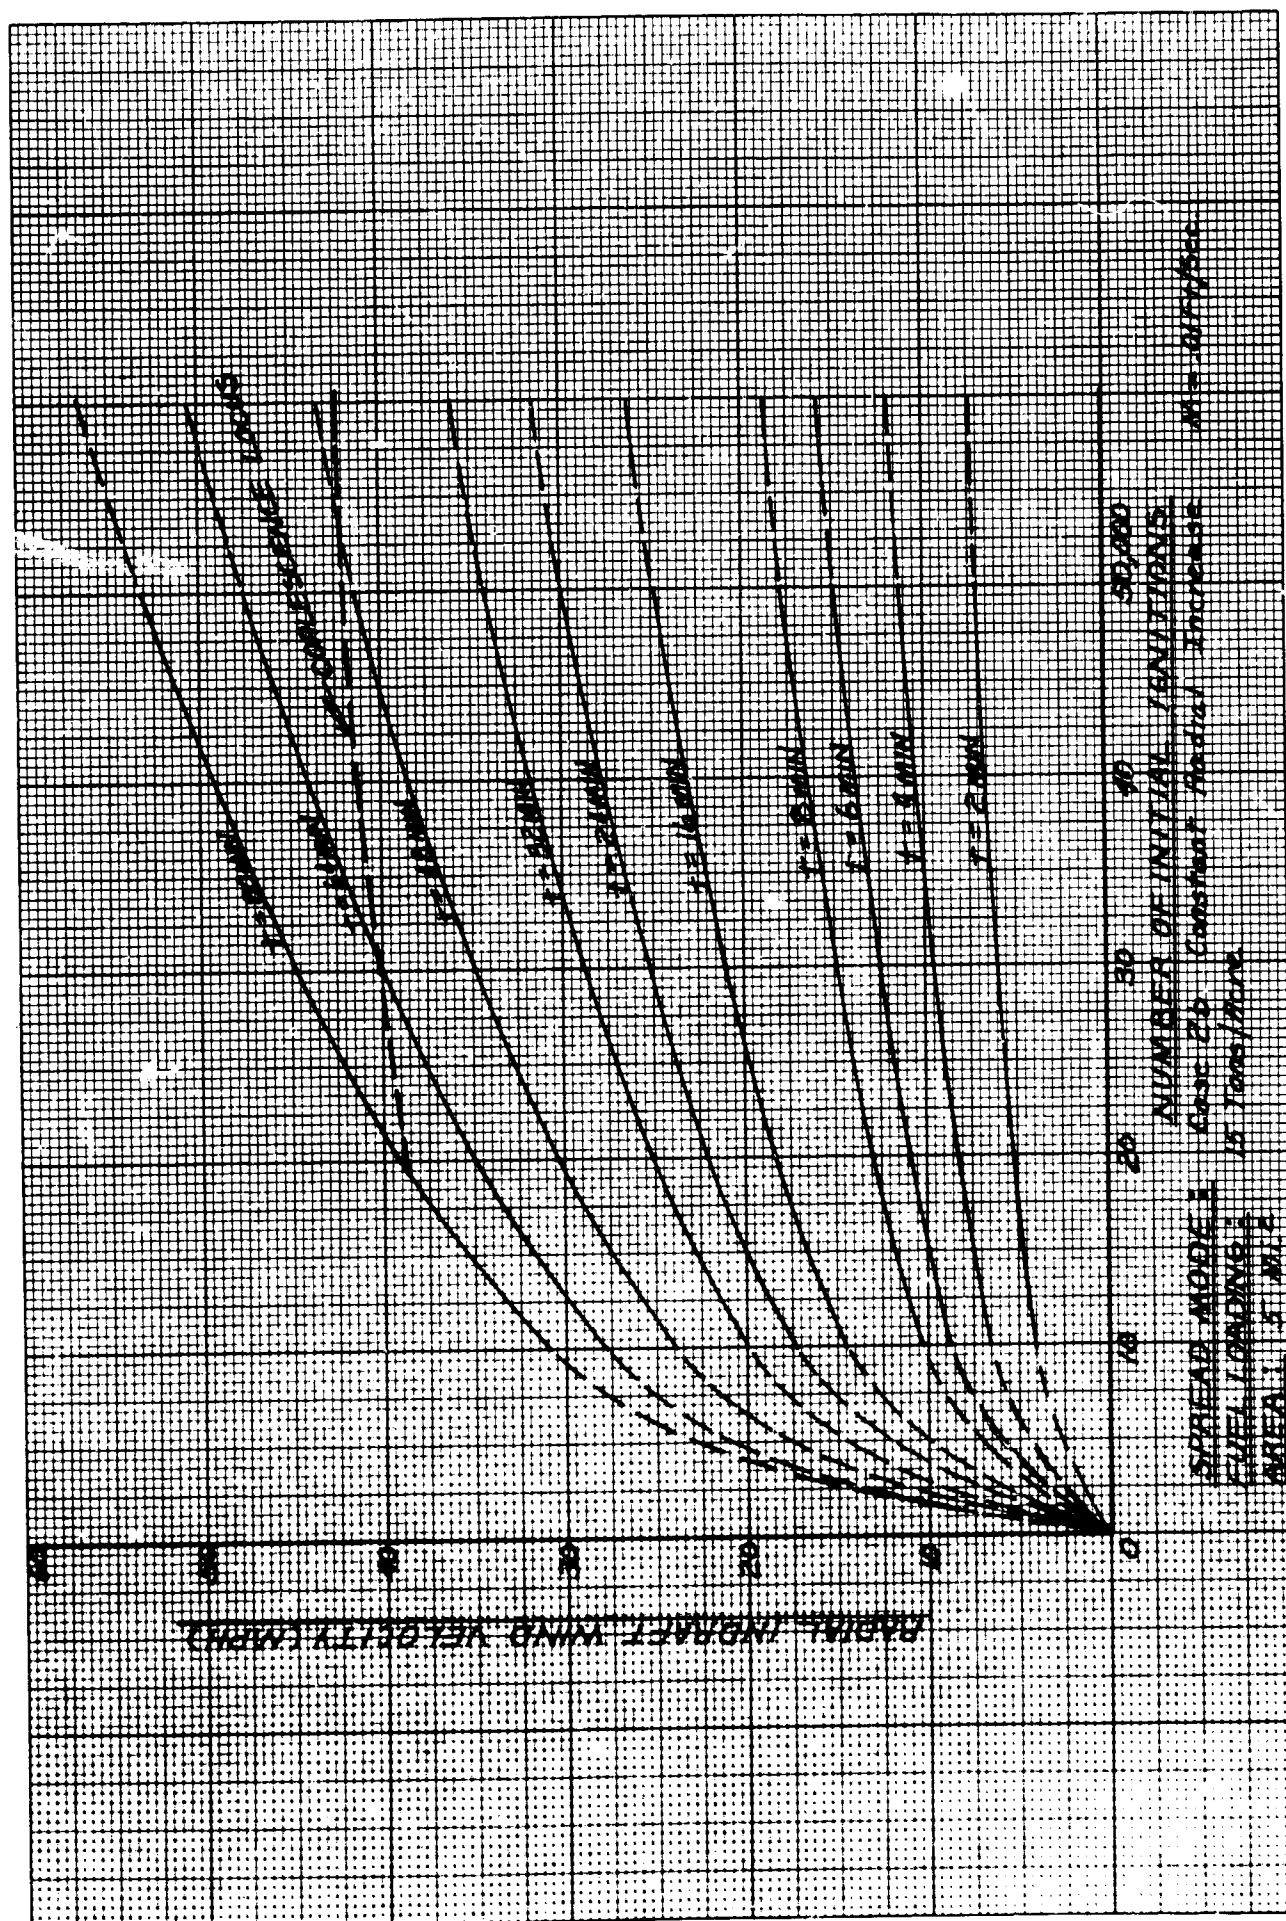


Fig. IV-37

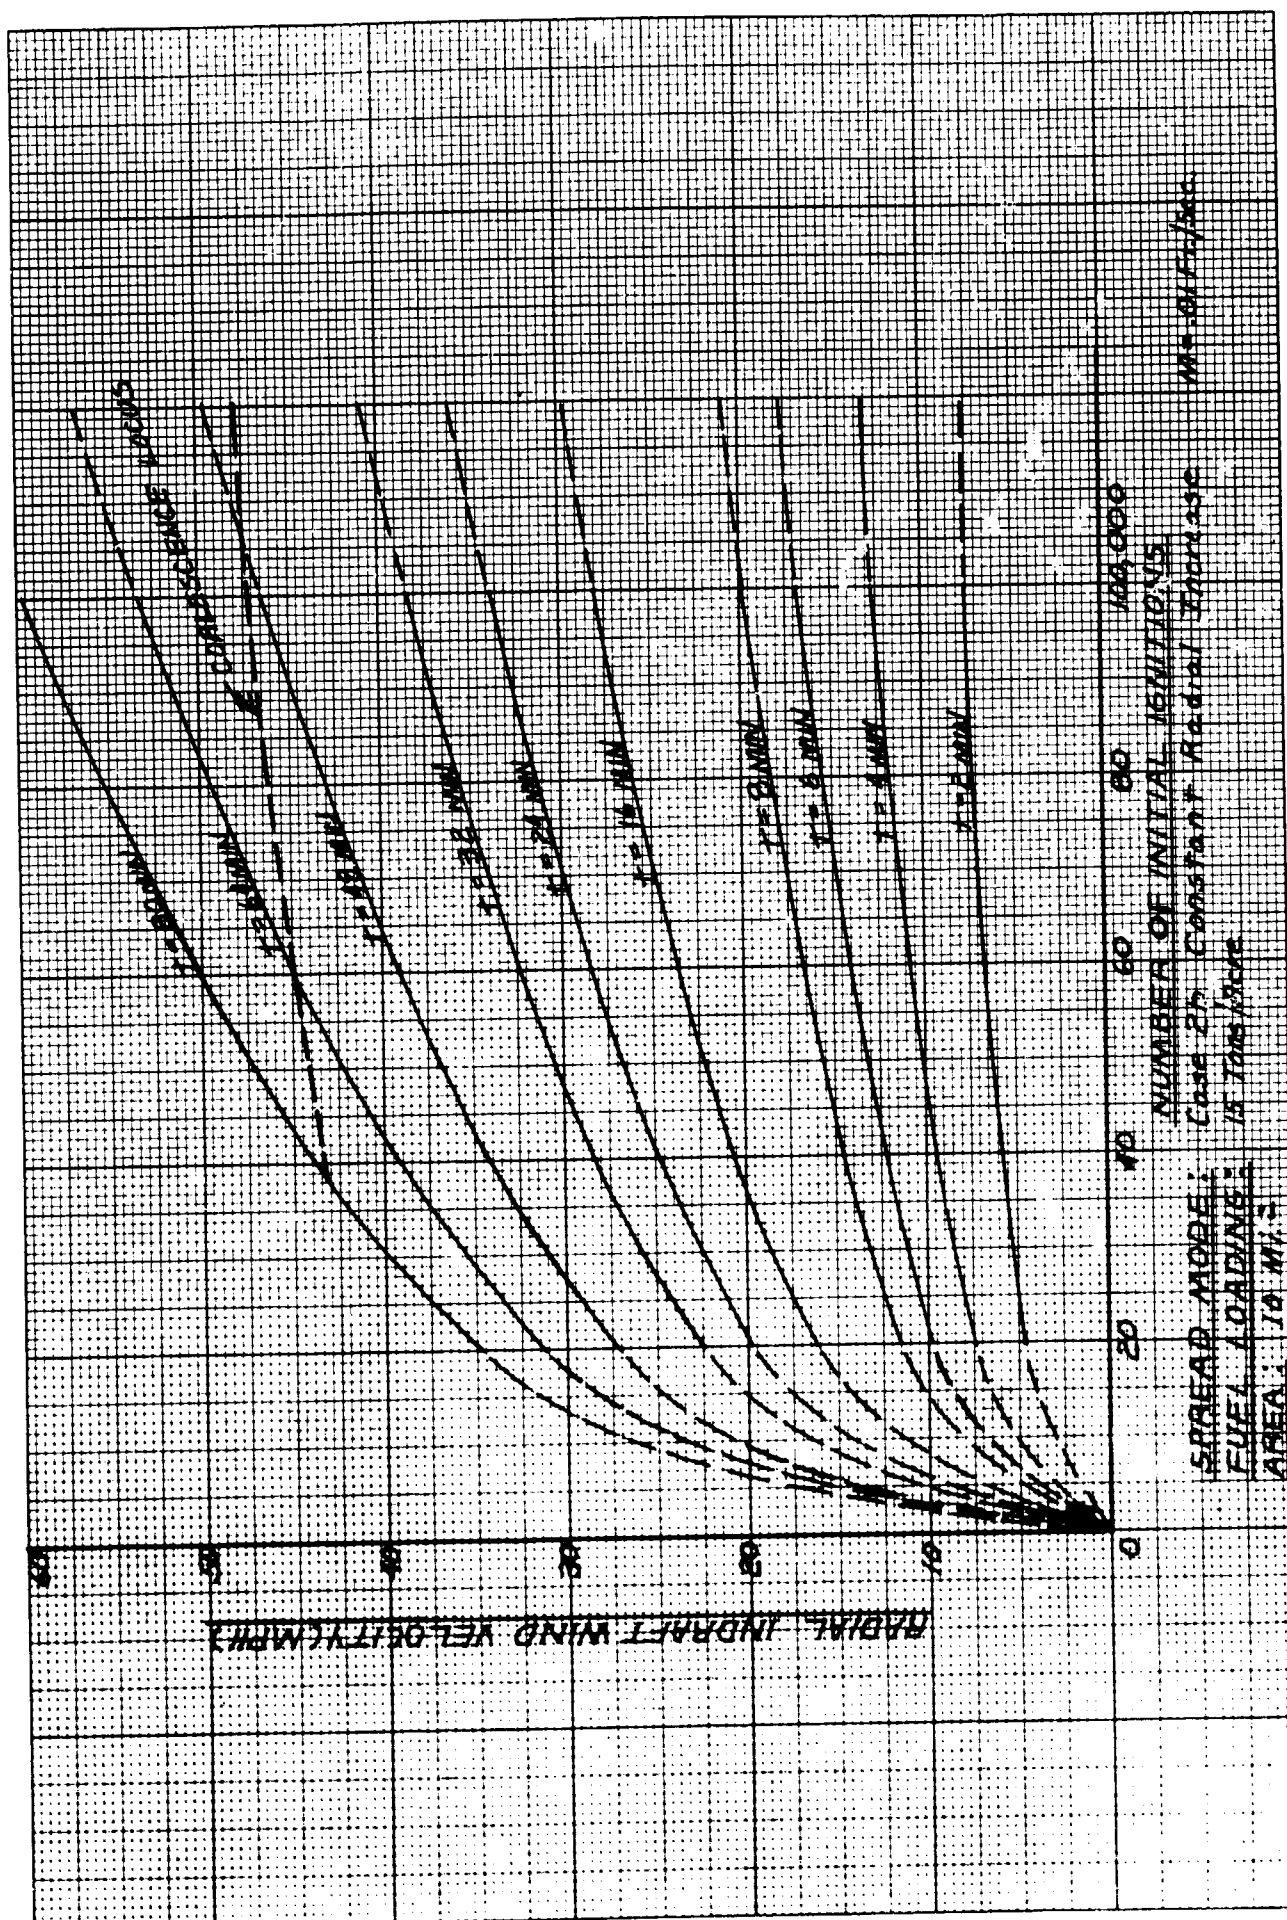


Fig. IV-38

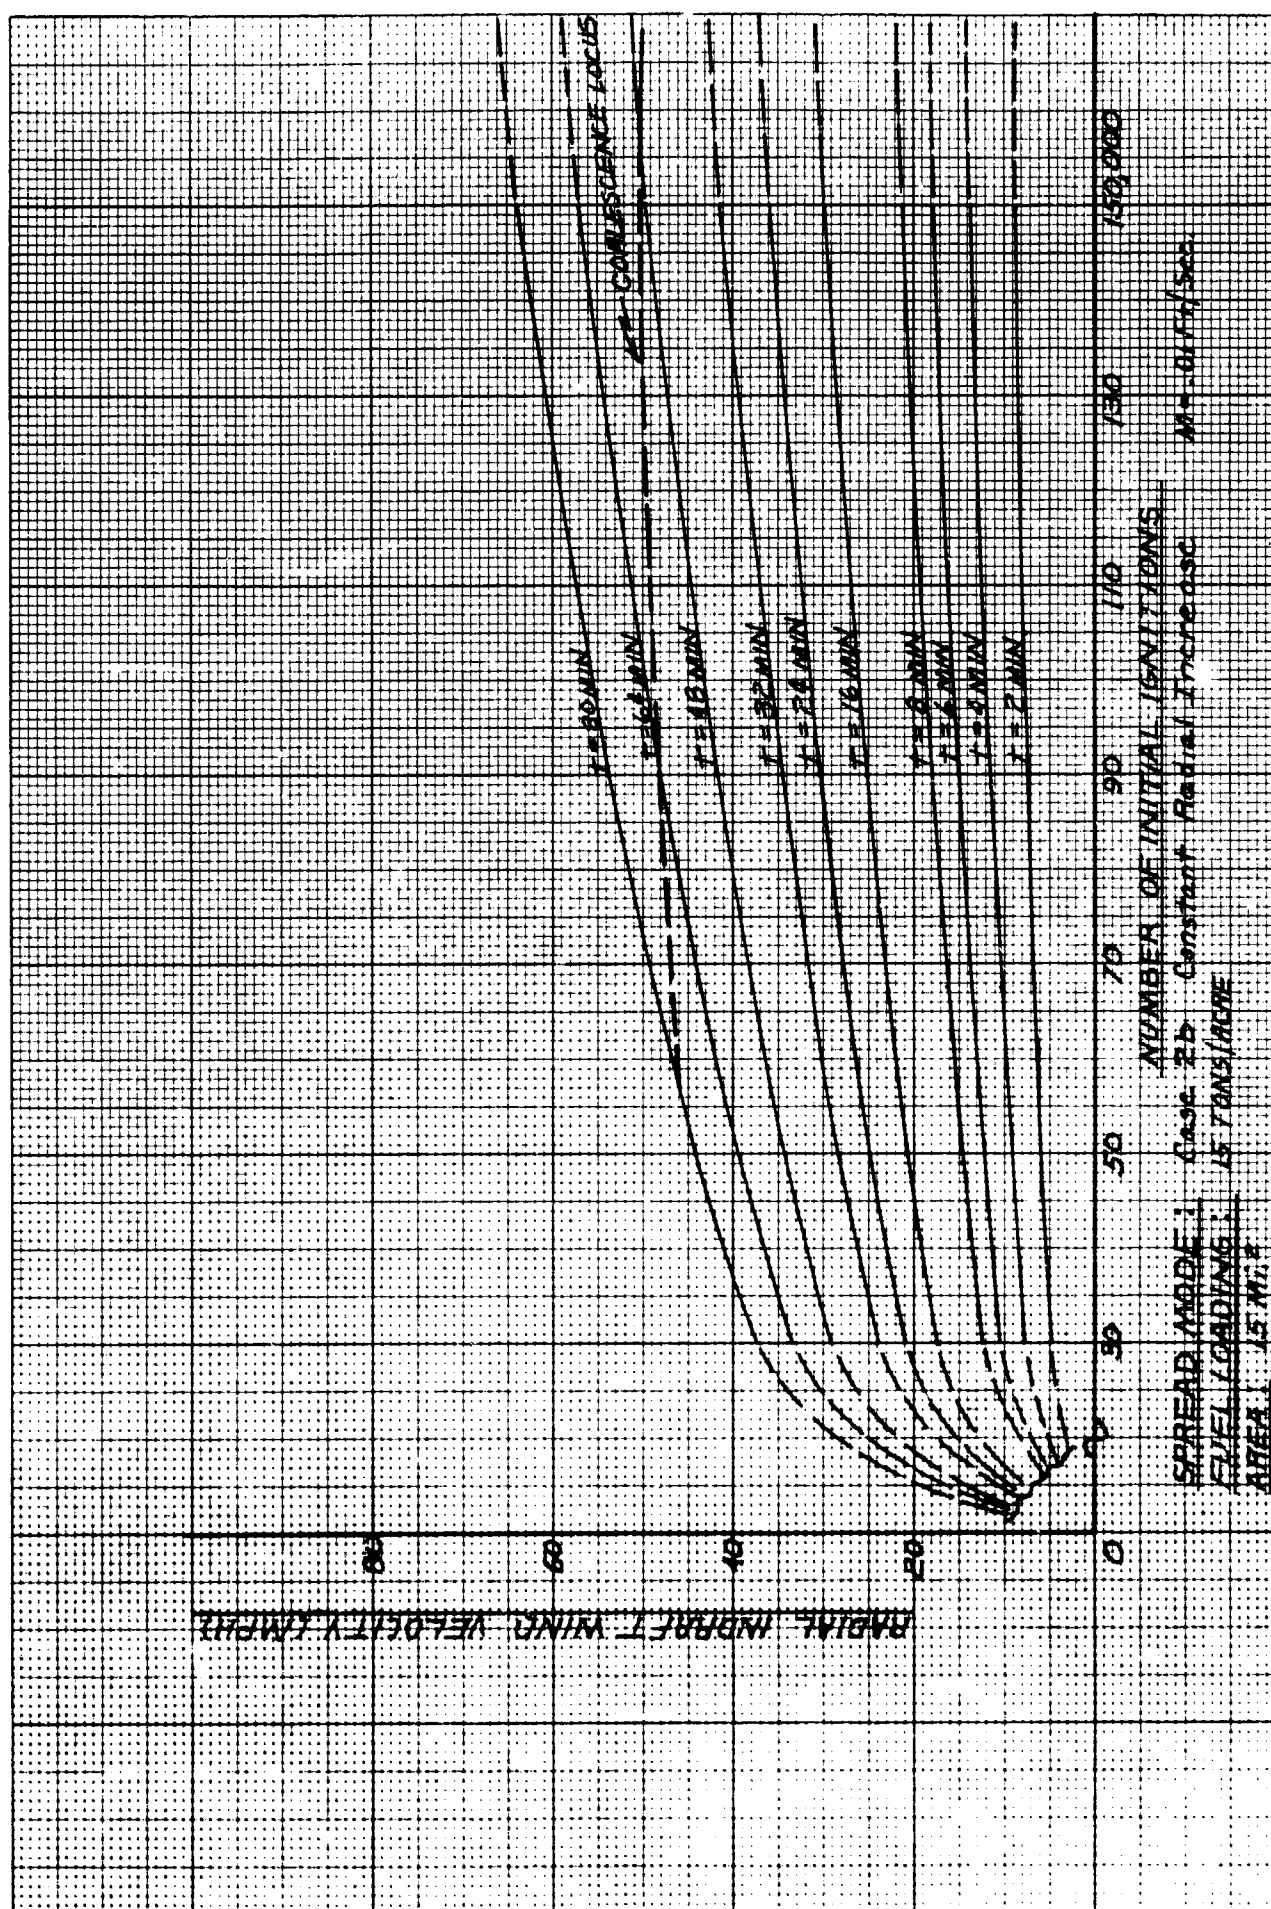


Fig. IV-39

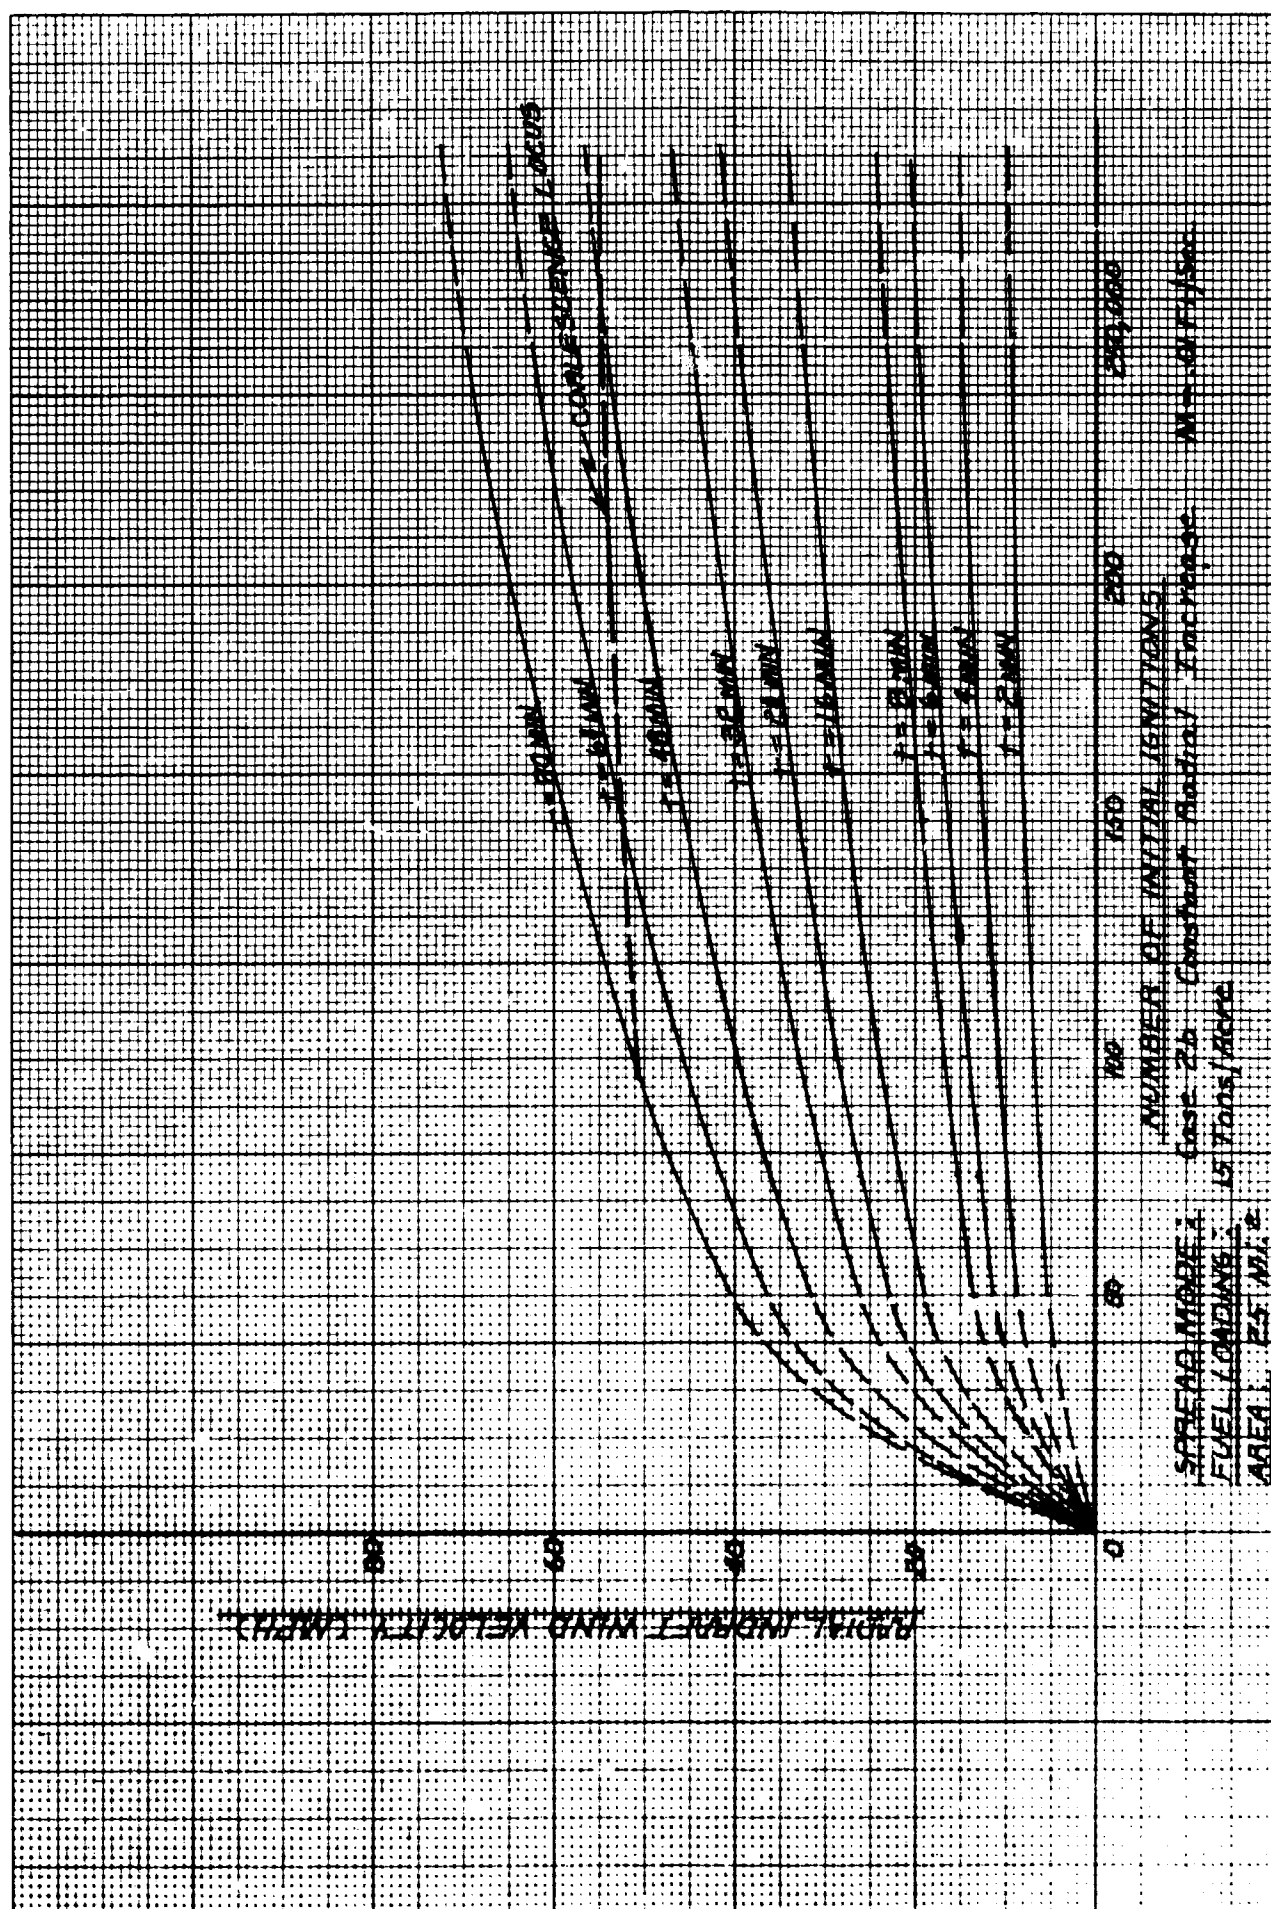


Fig. IV-40

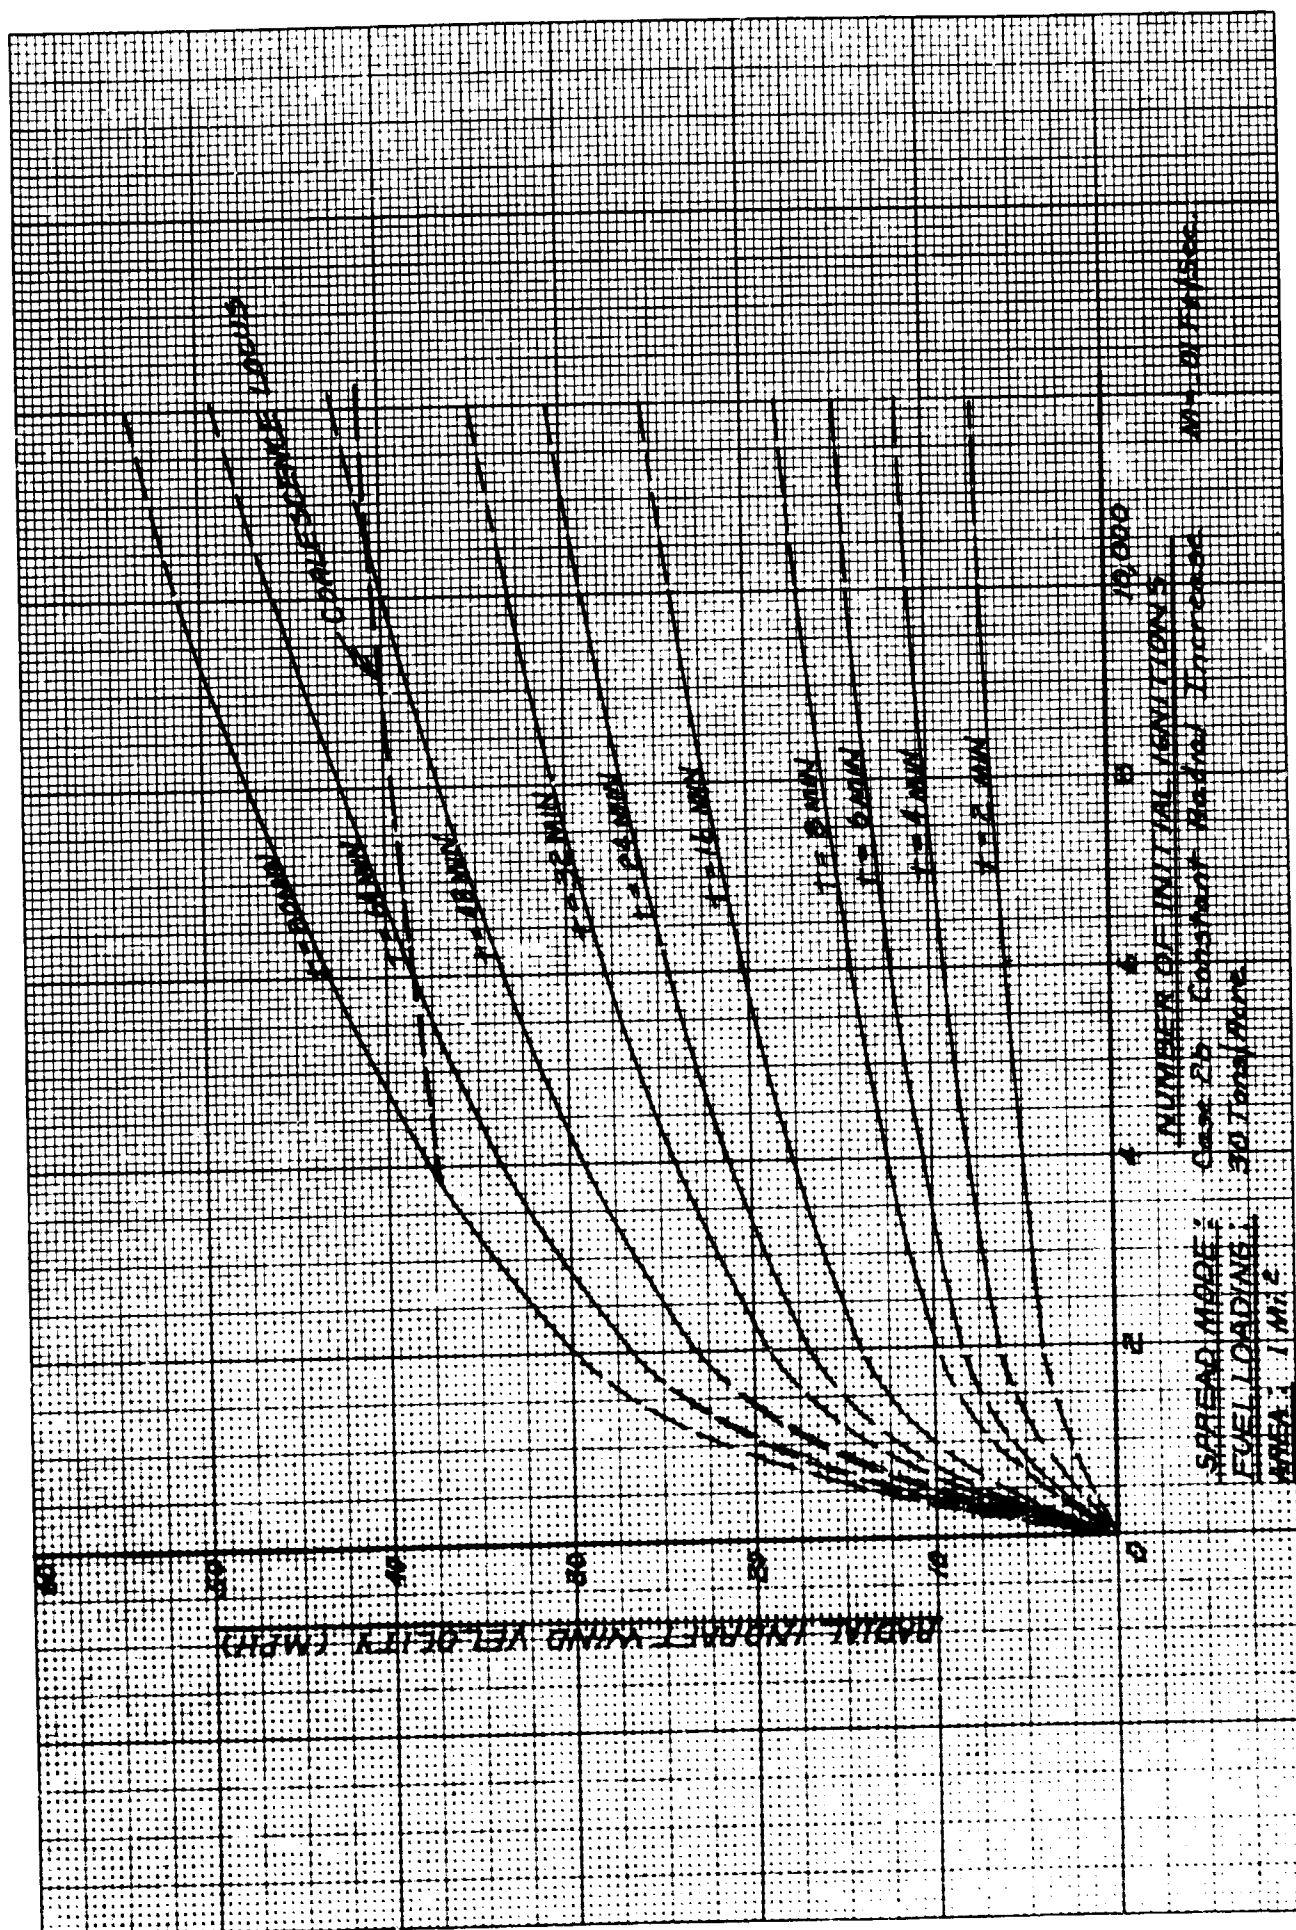


Fig. IV-41

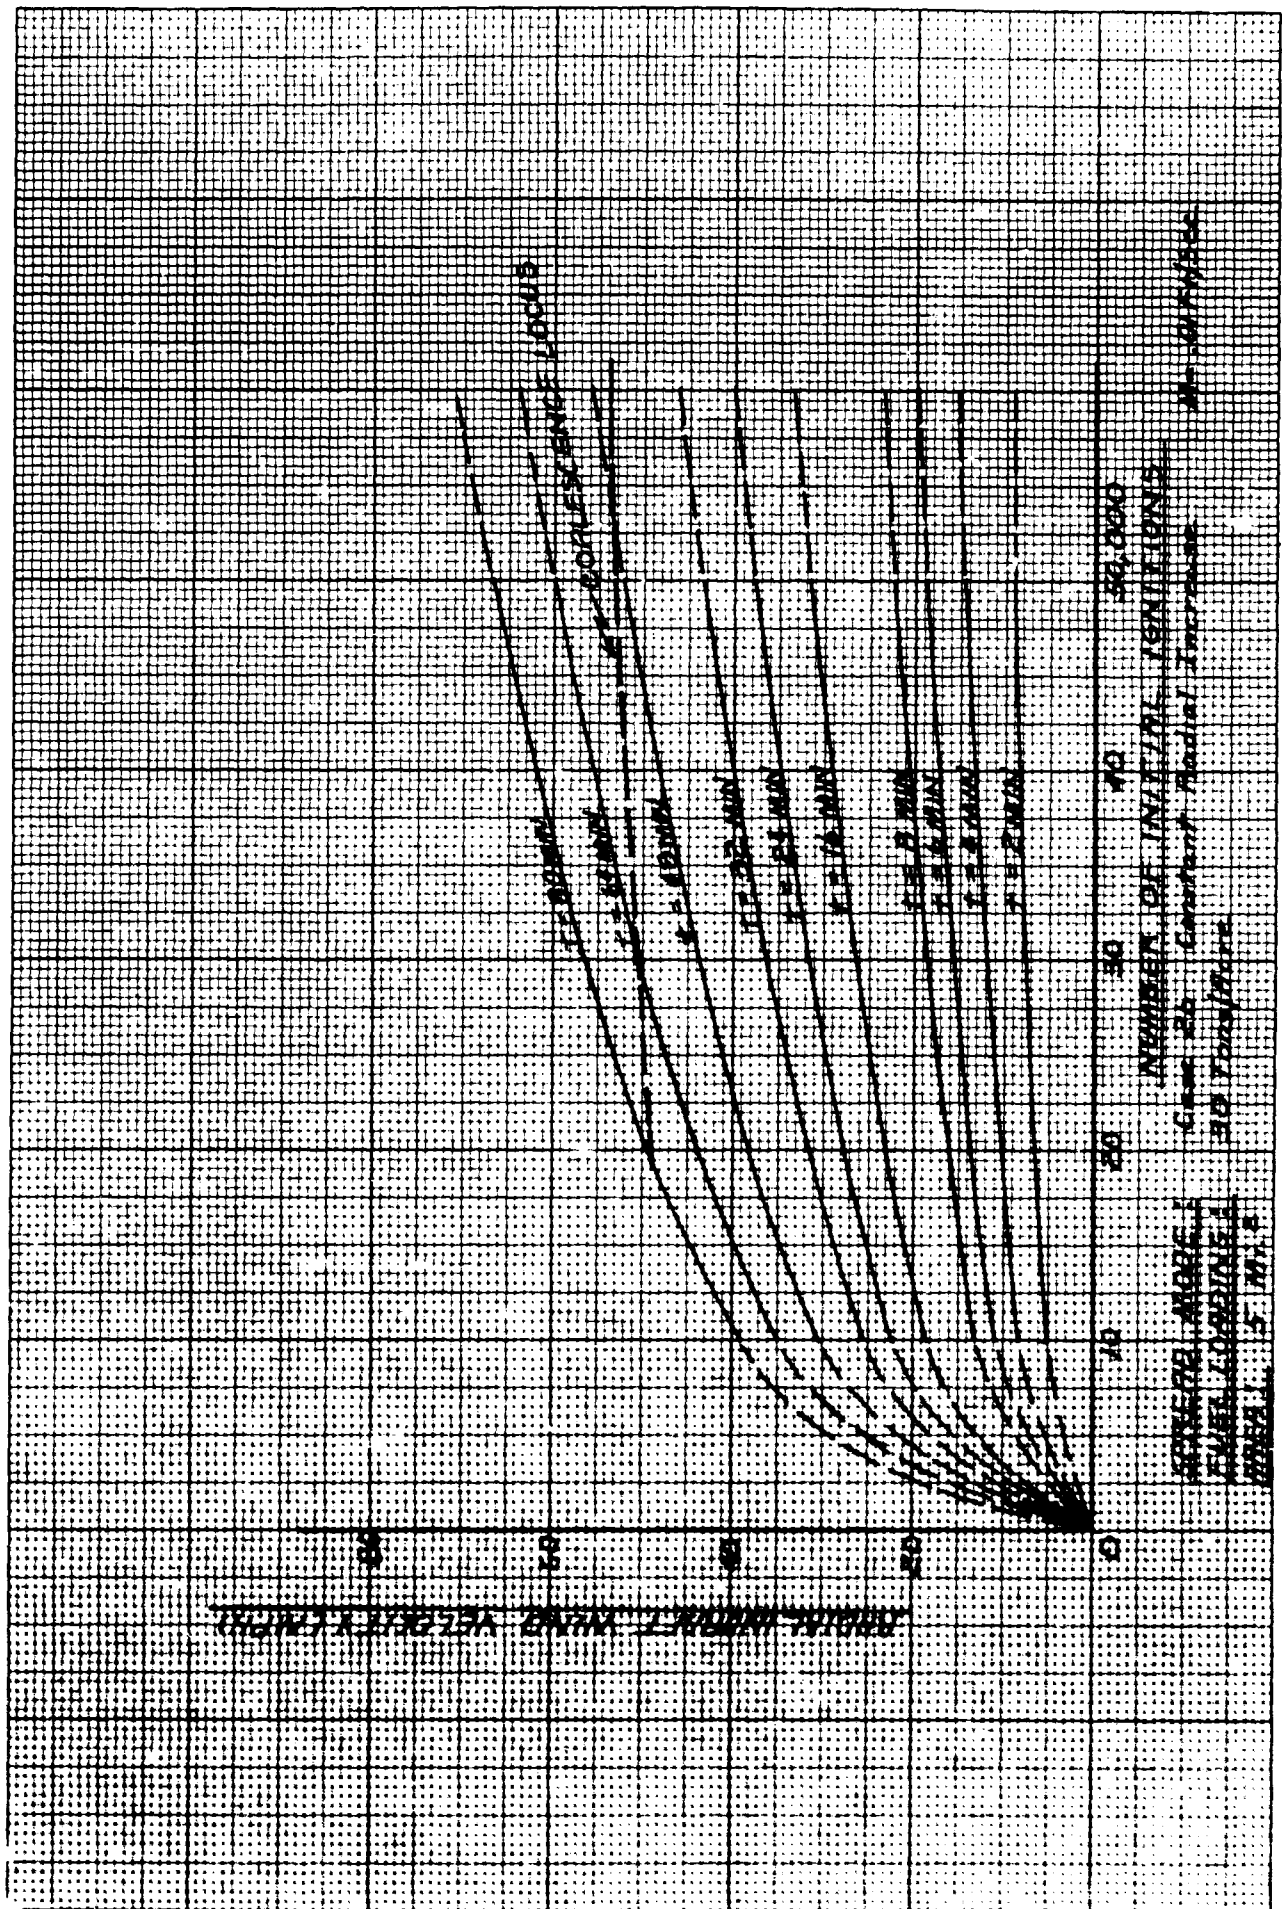


Fig. IV-42

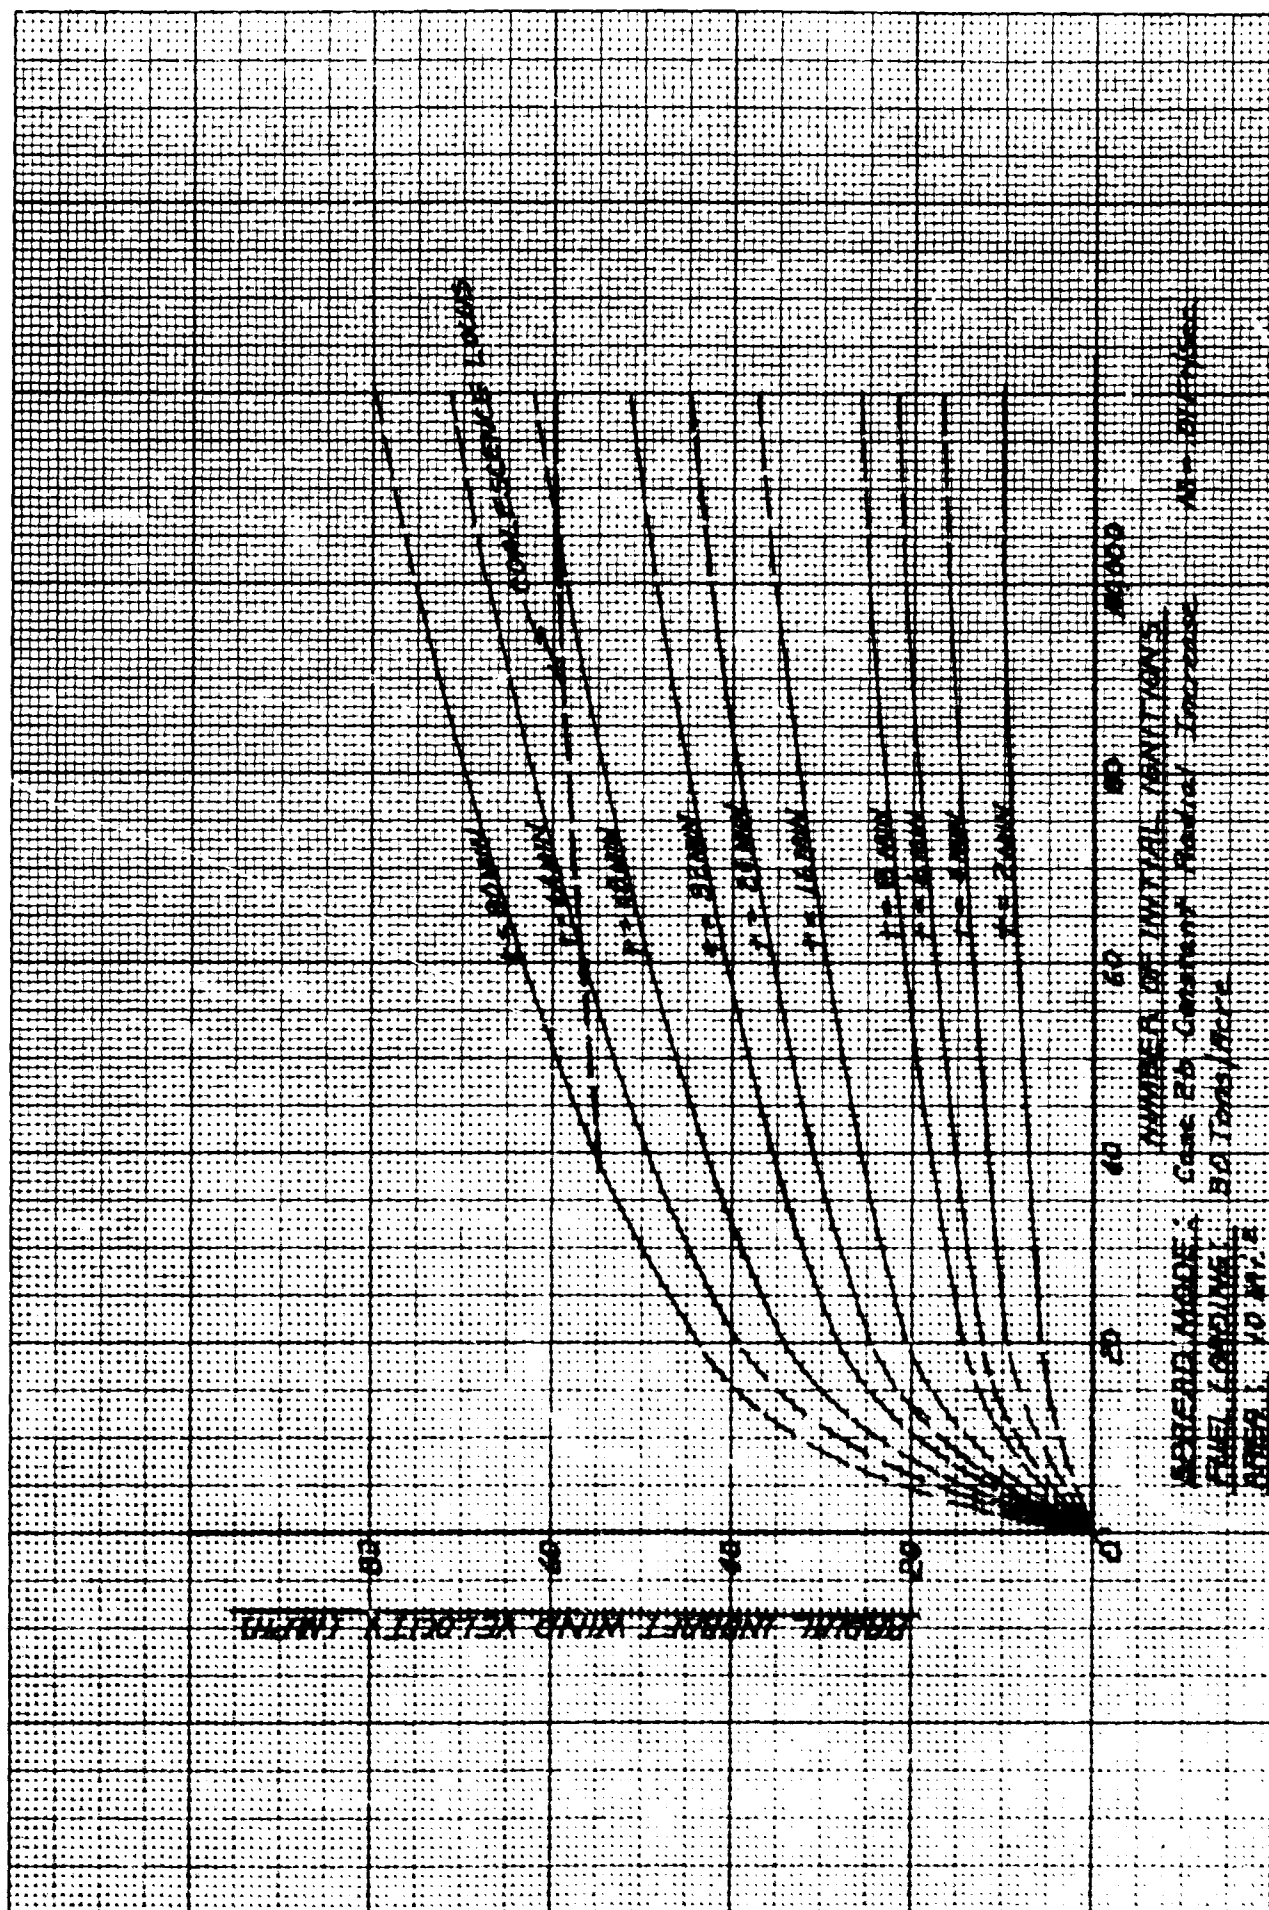


Fig. IV-43

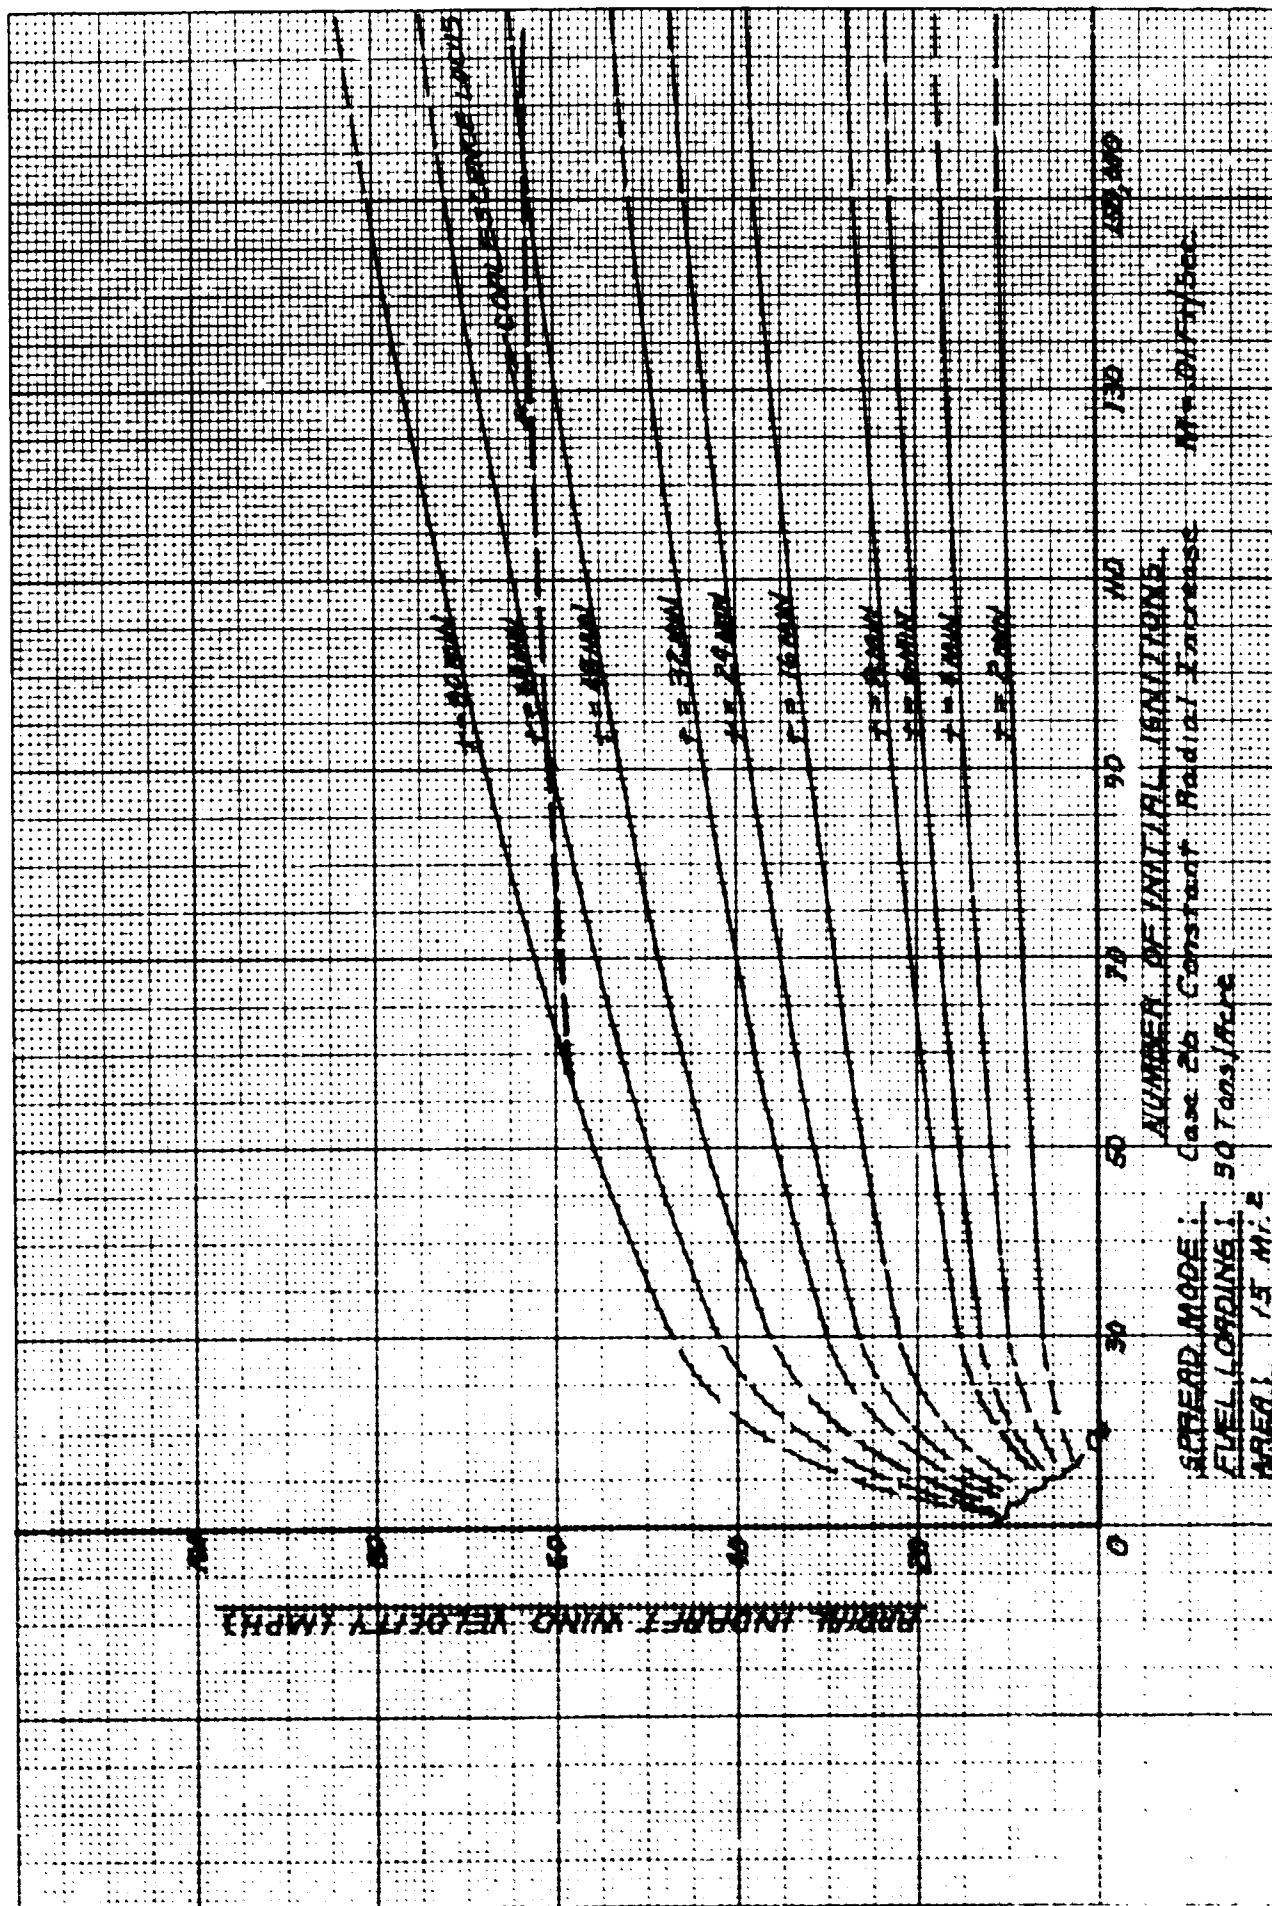


Fig. IV-44

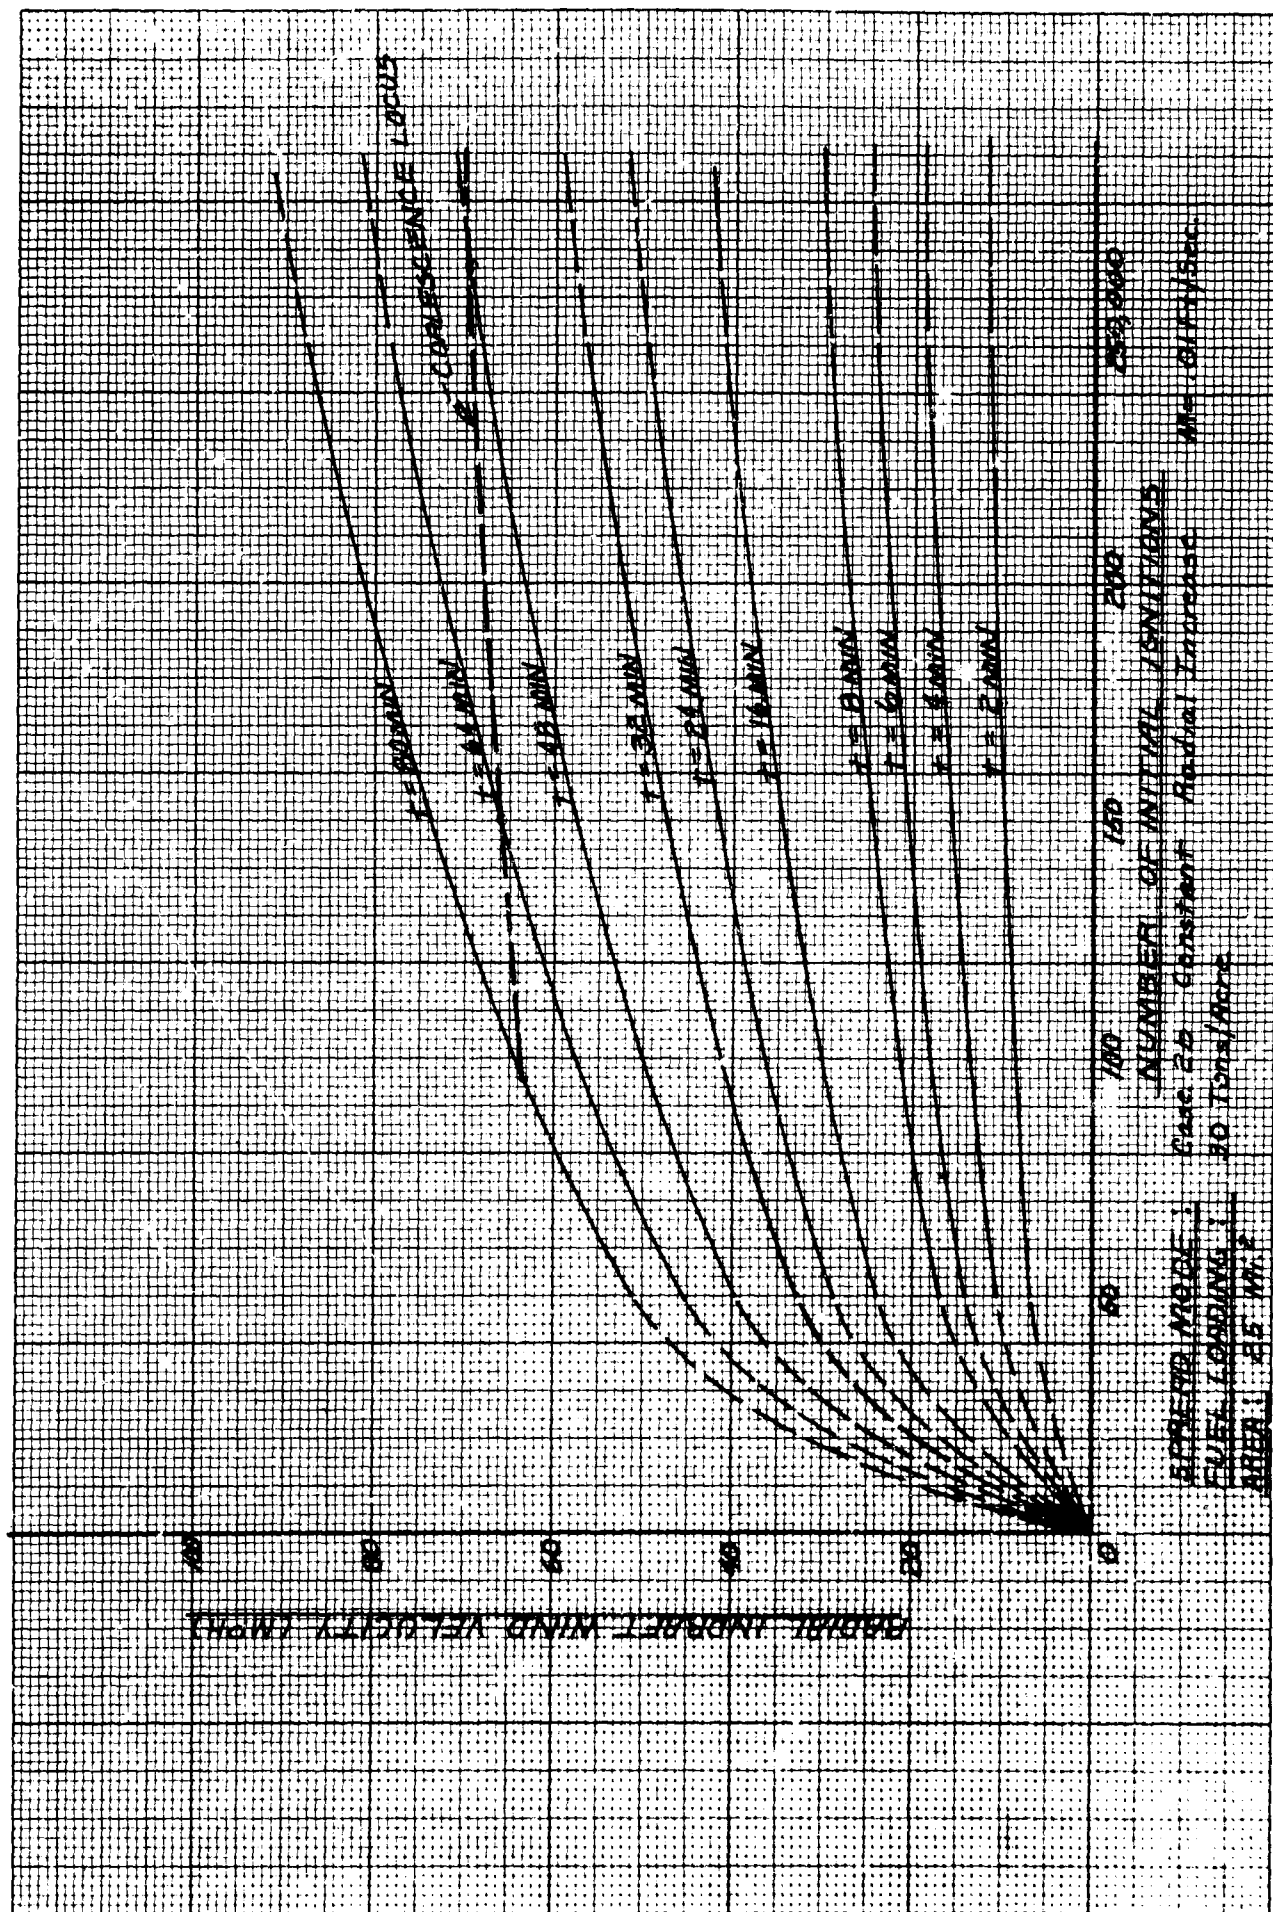


Fig. IV-45

APPENDIX V

SENSITIVITY CURVES

The following seven sets of curves are based upon the rationale and parameter values discussed in Appendix II and are drawn from the output of Part II of the computer program listed in Appendix III.

Each family of curves represents $\frac{\partial v}{\partial \mu_i}$ as a function of μ_i for ten different times with the other parameters μ_j ($j \neq i$) held at their "representative value" as listed in Table II-I.

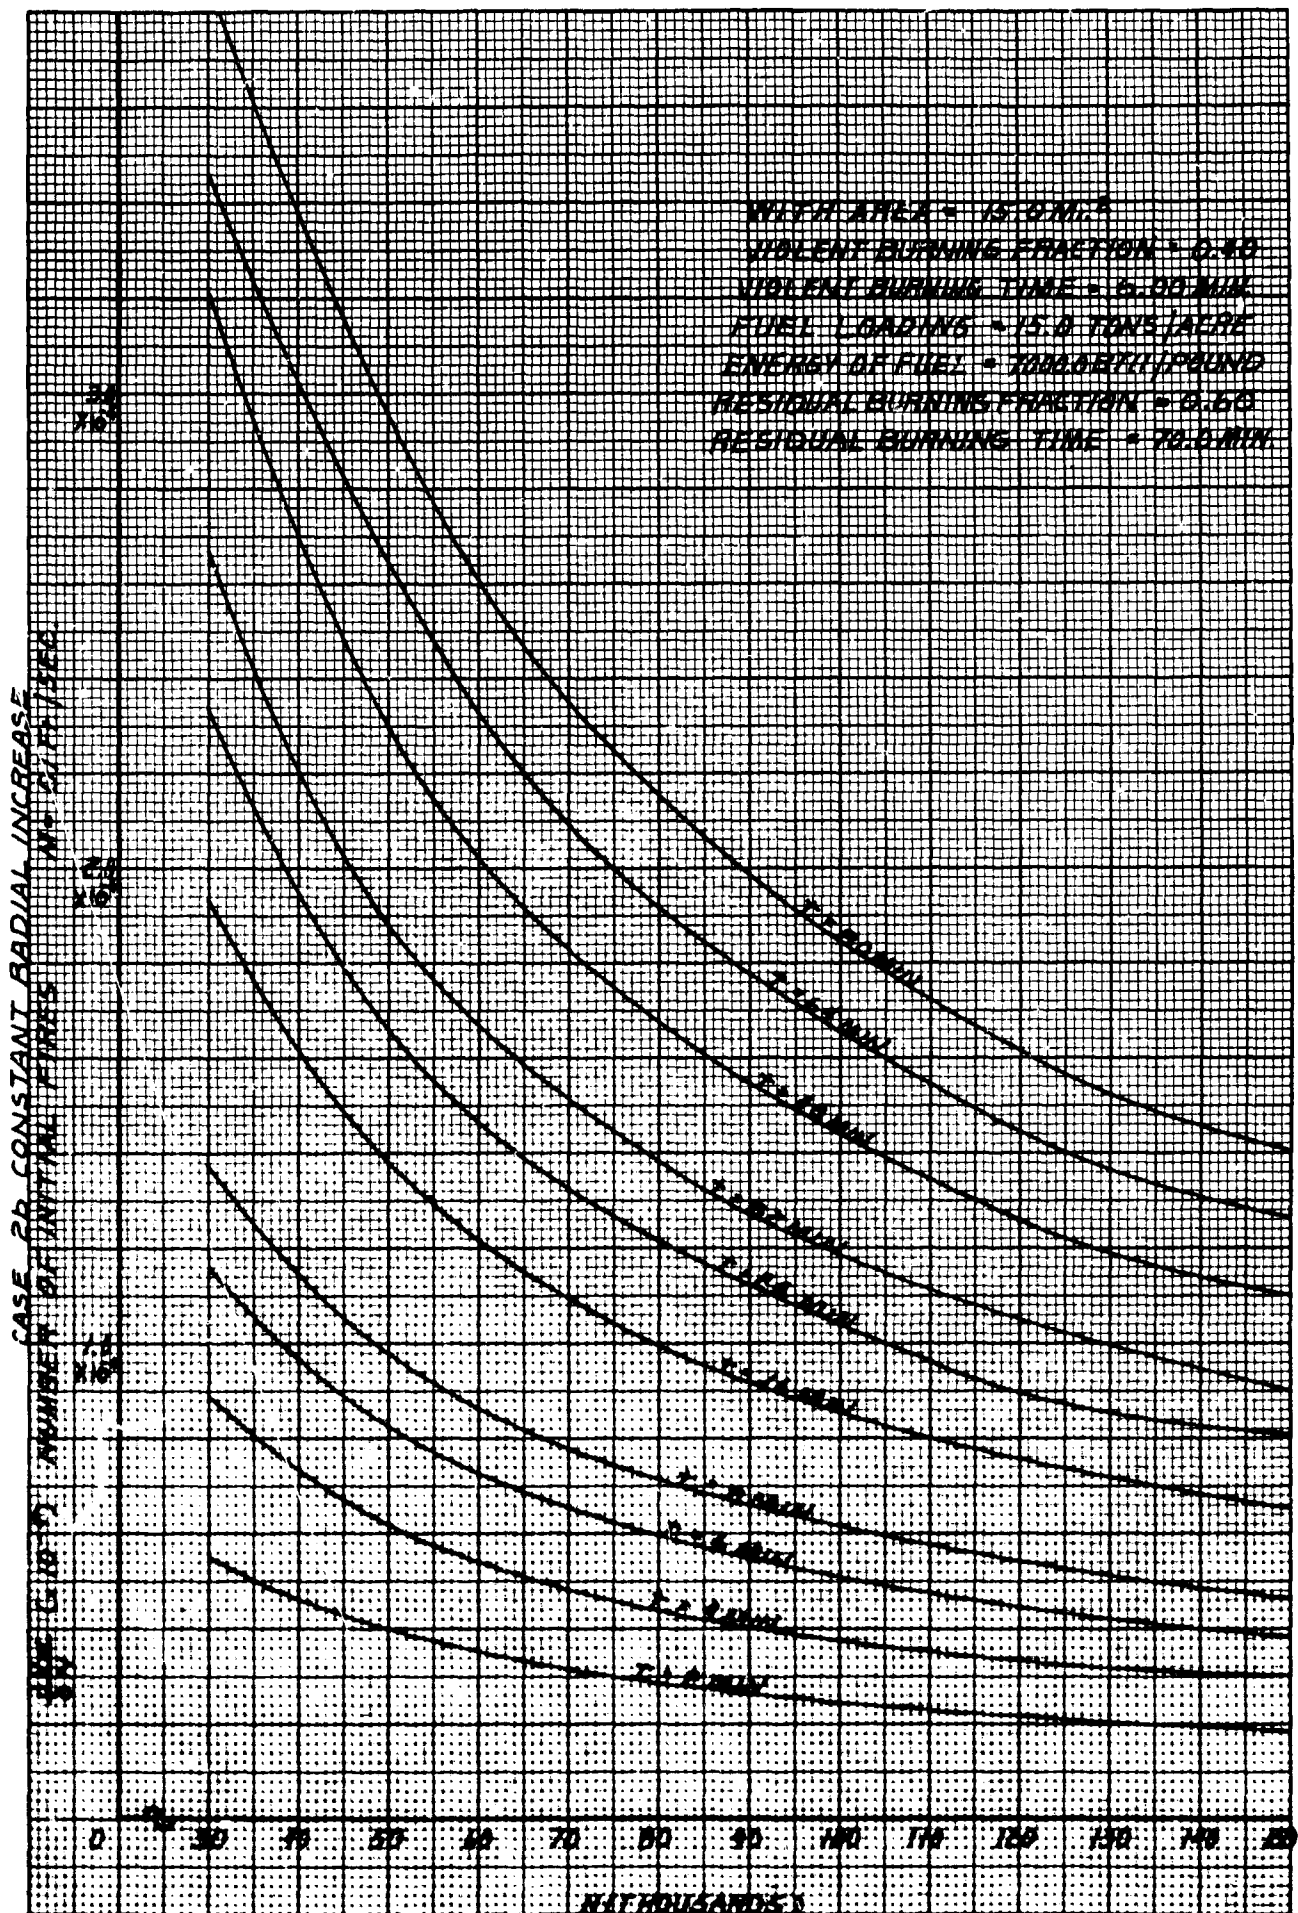


Fig. V-1

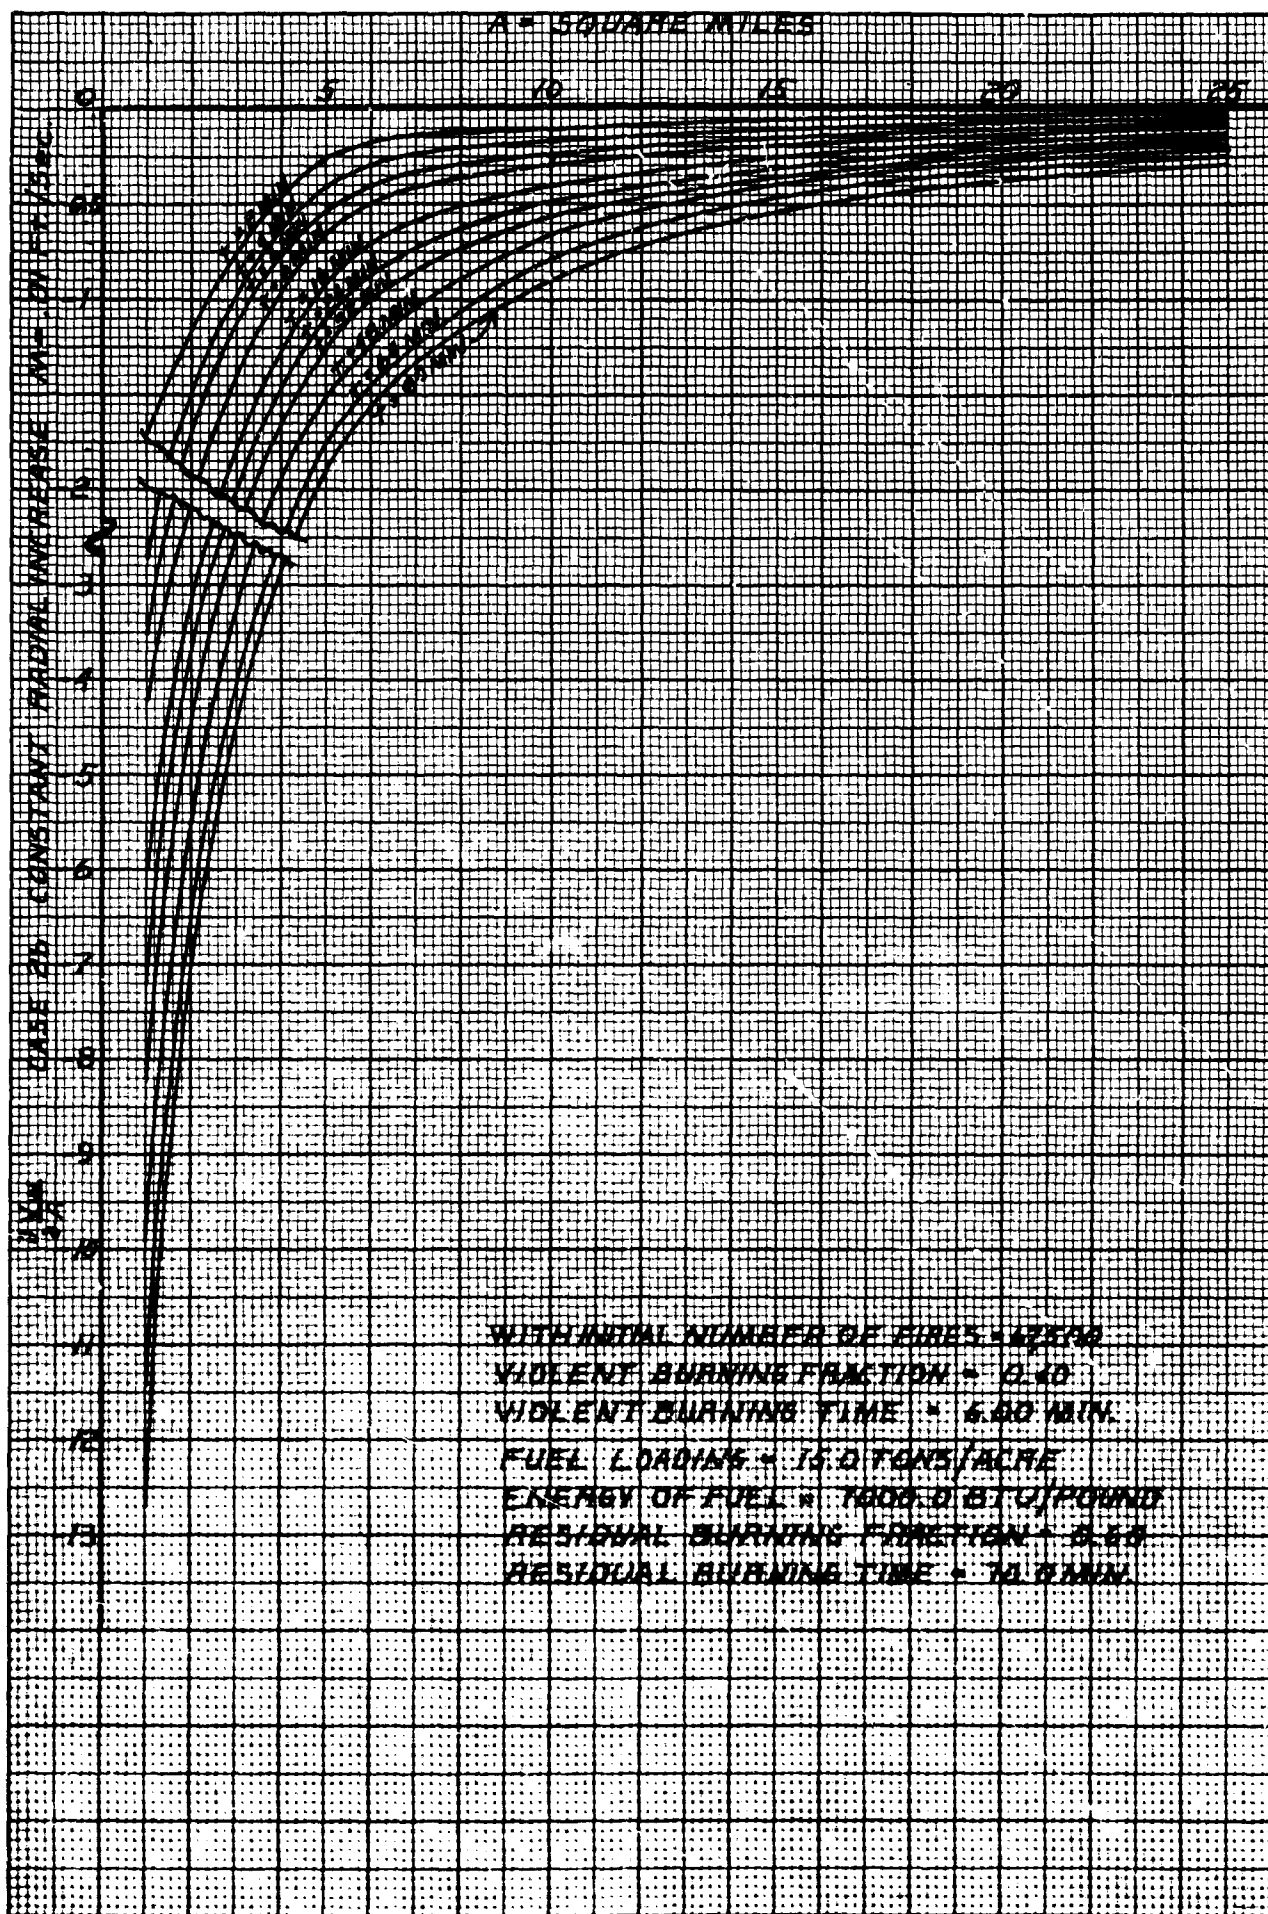


Fig. V-2

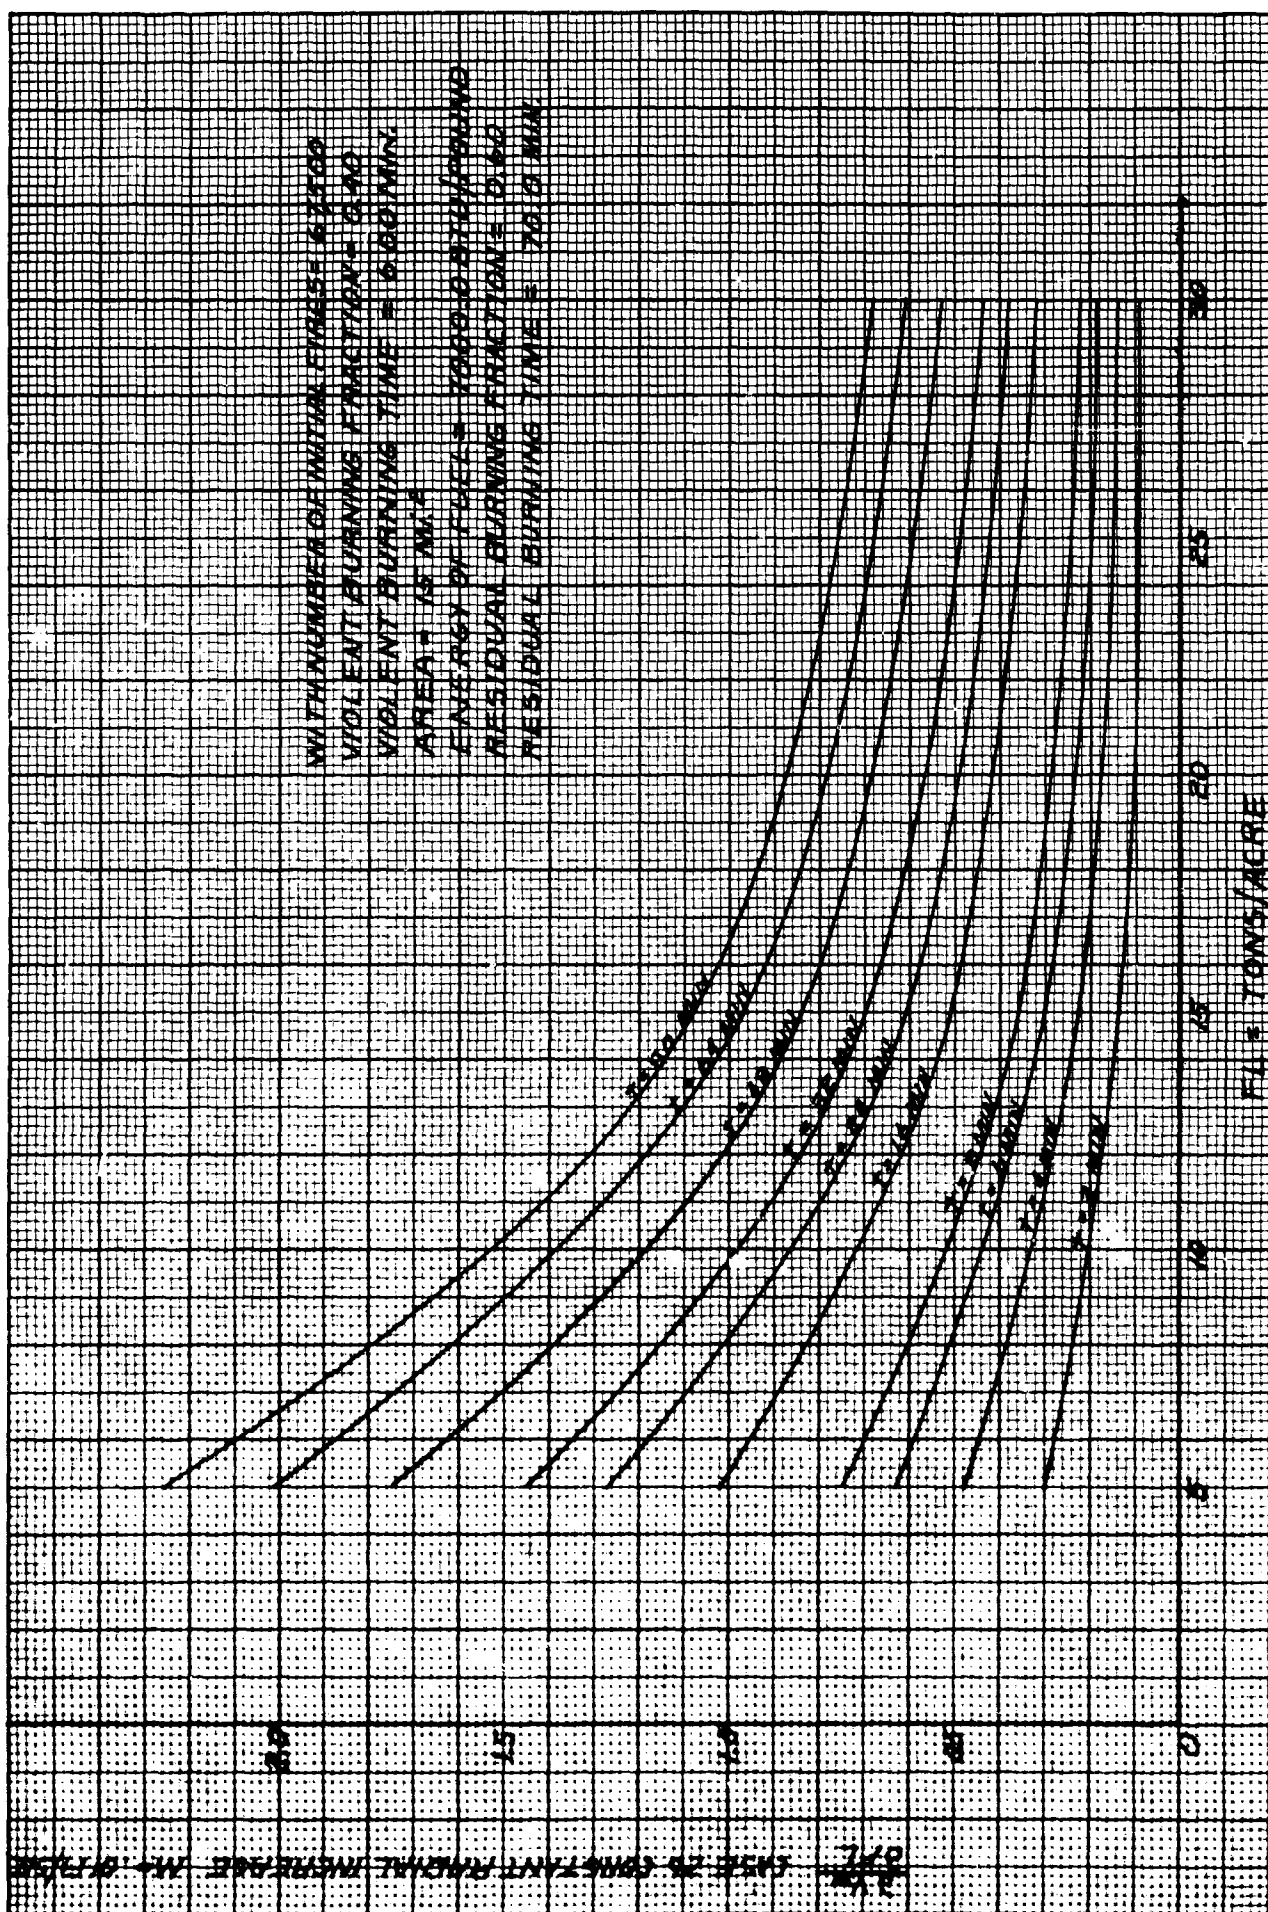


Fig. V-3

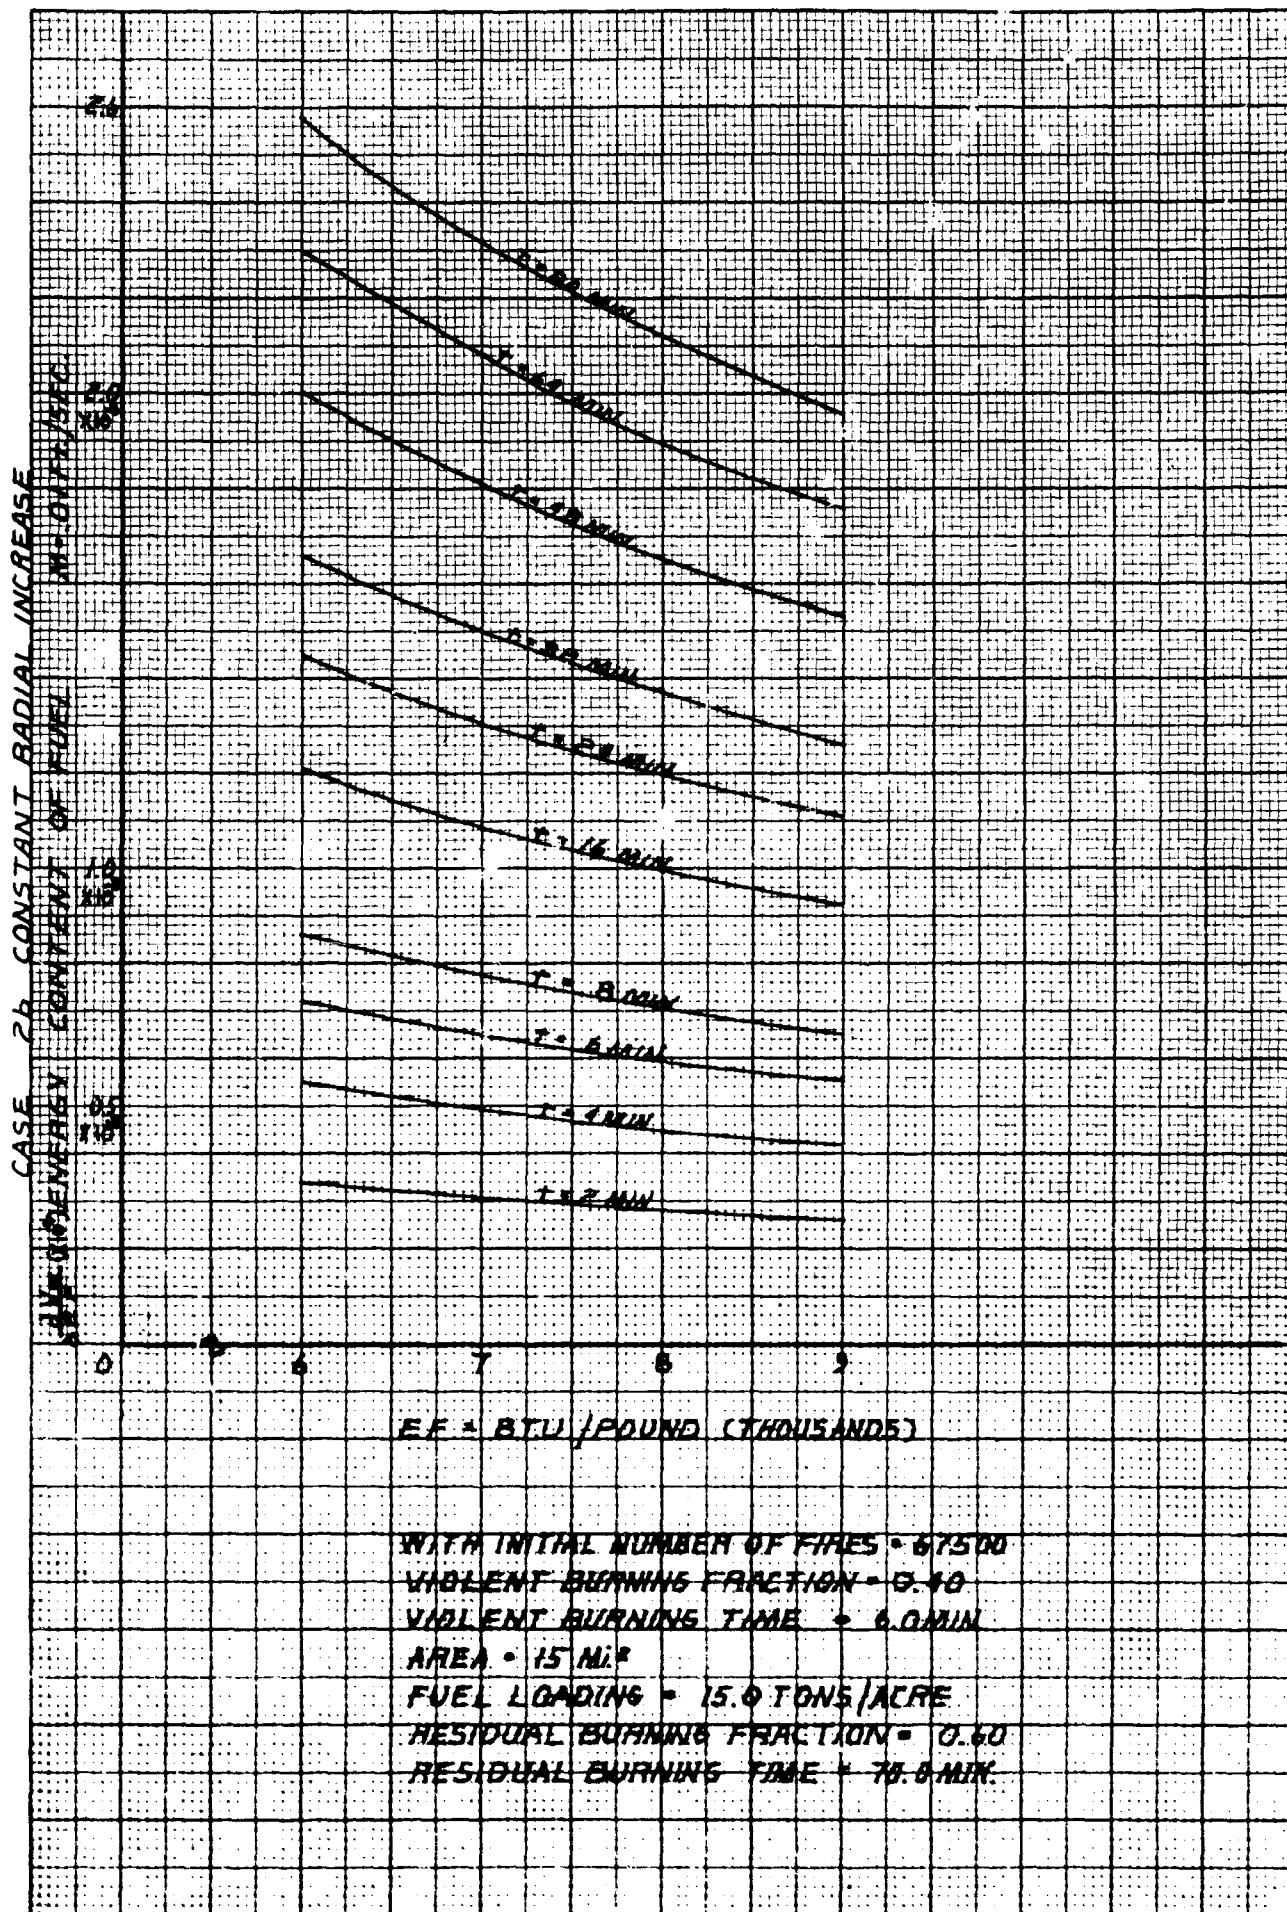


Fig. V-4

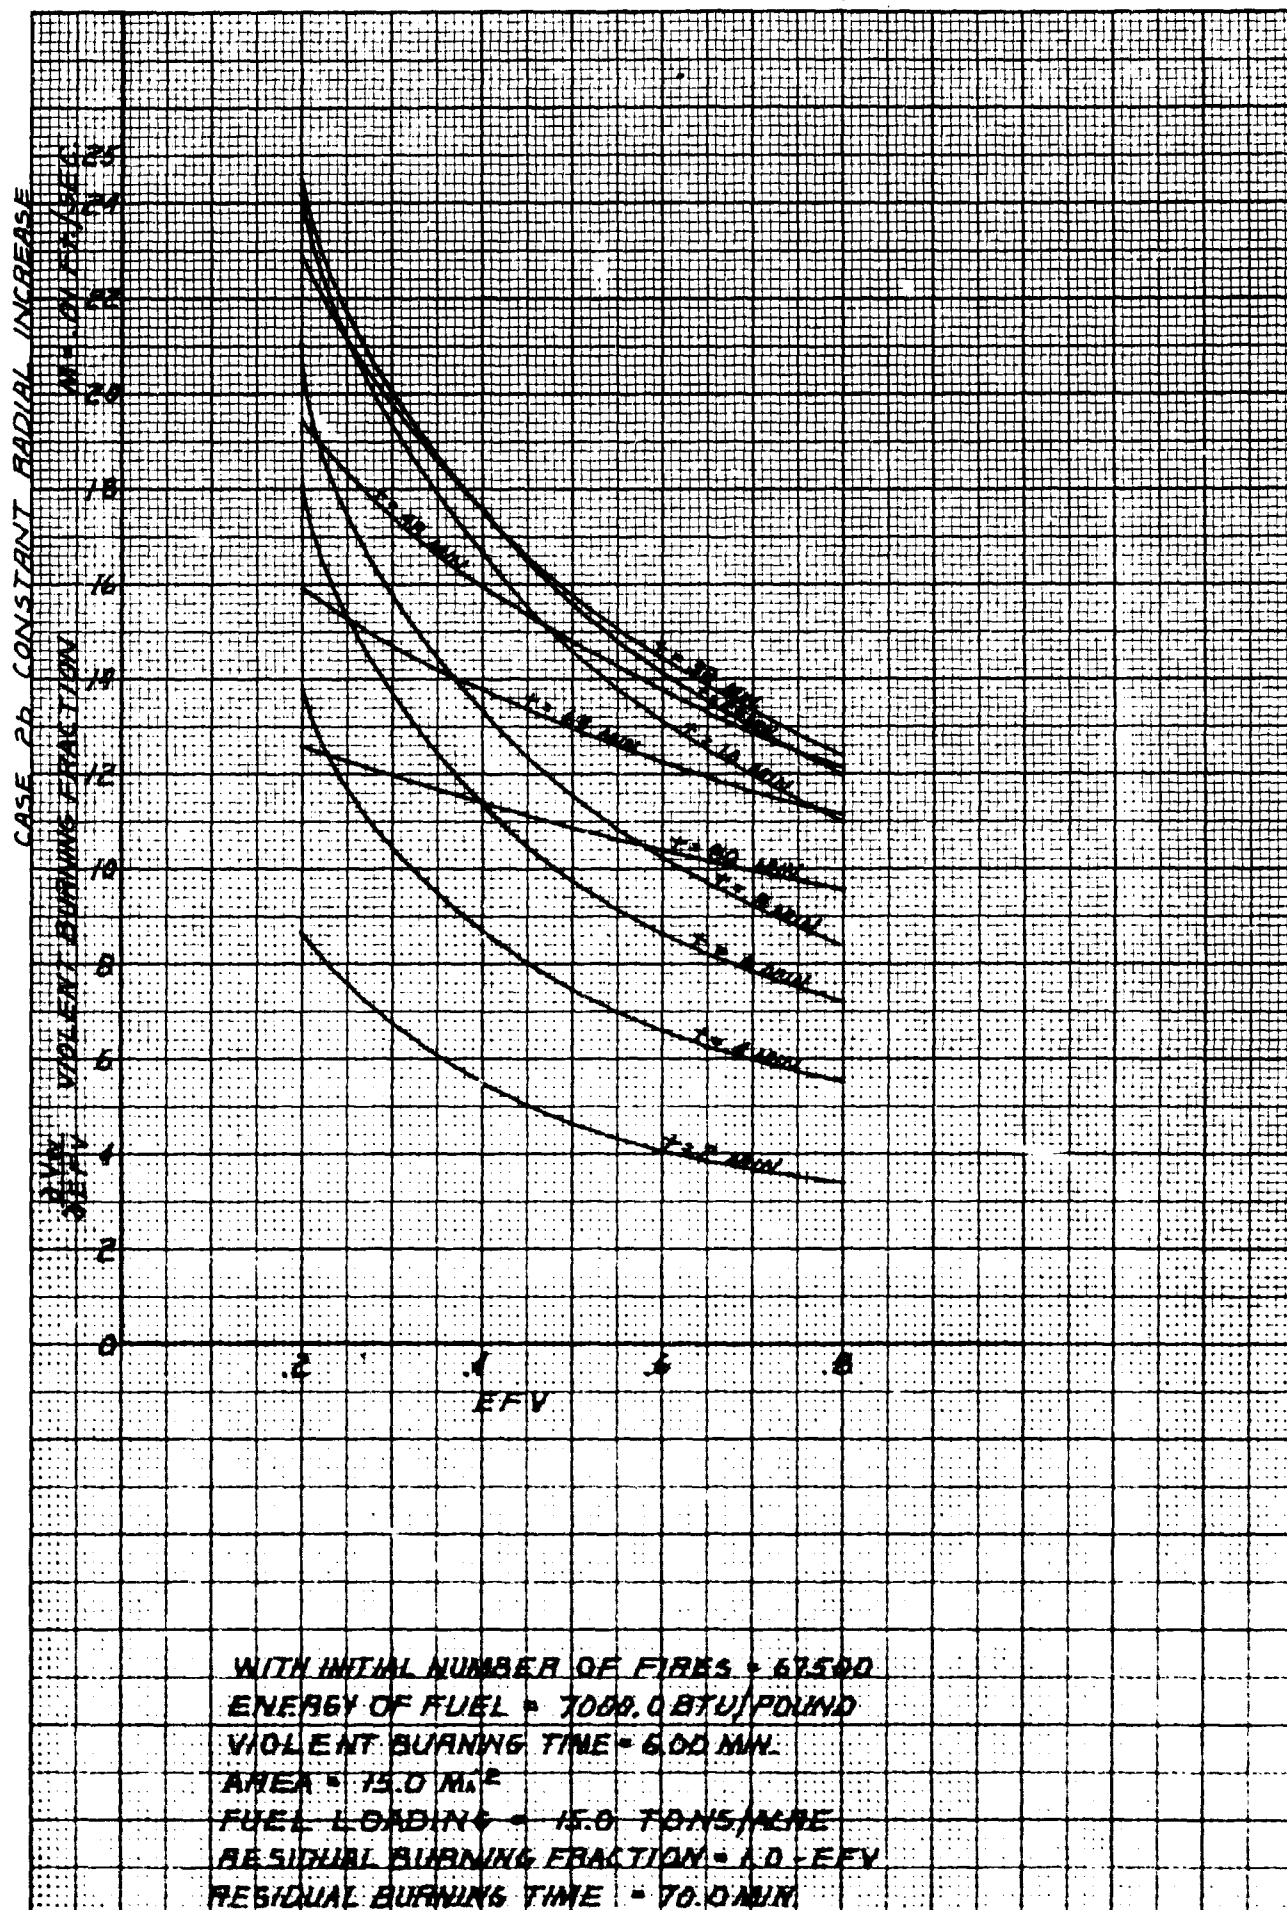


Fig. V-5

K-E 10 X 10 TO 1/2 INCH 40 1323
 7 1/2 X 10 INCHES
 KLUPPEL & ESSER CO.

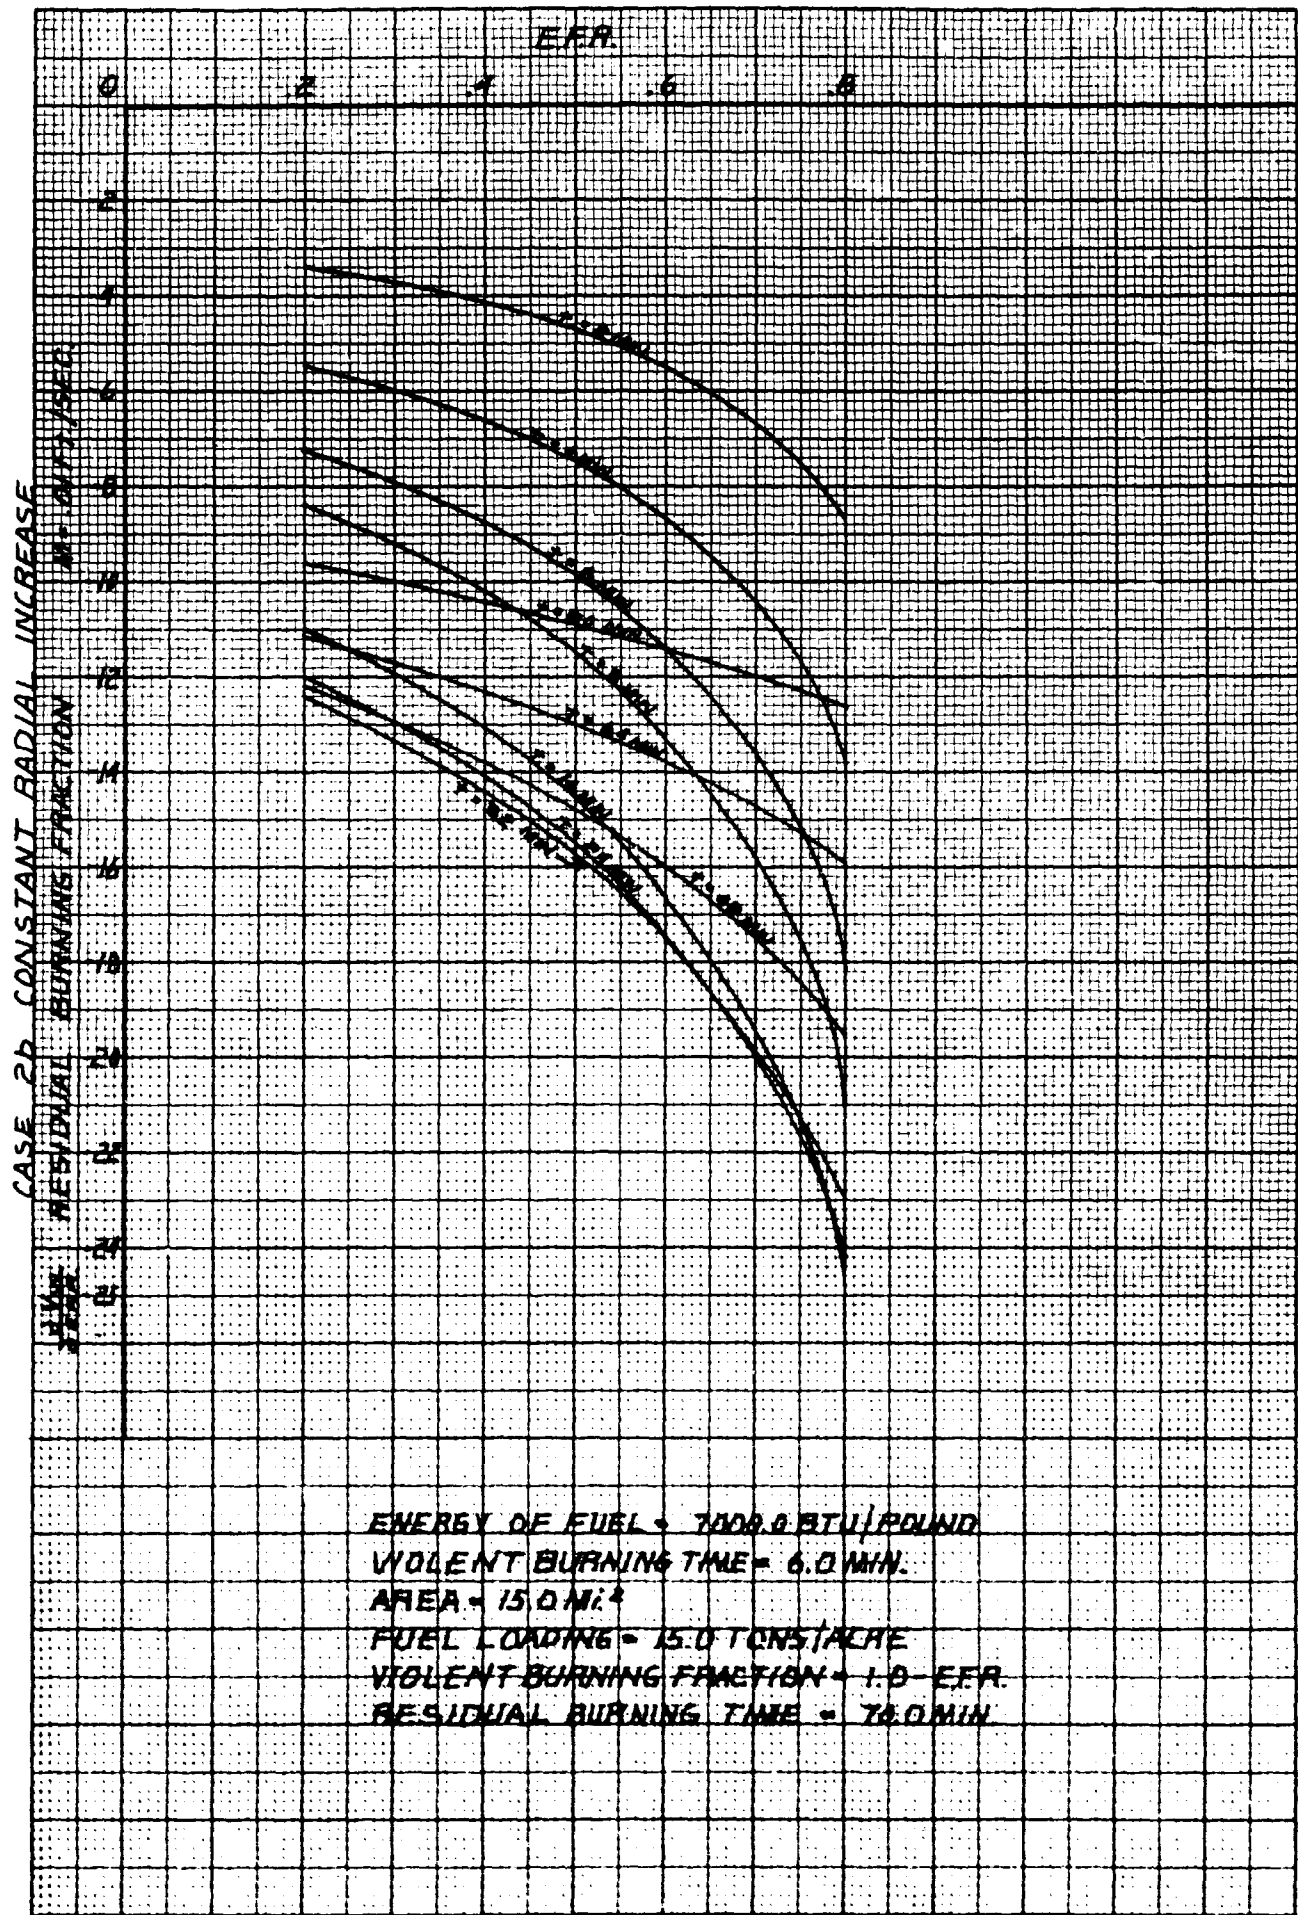


Fig. V-6

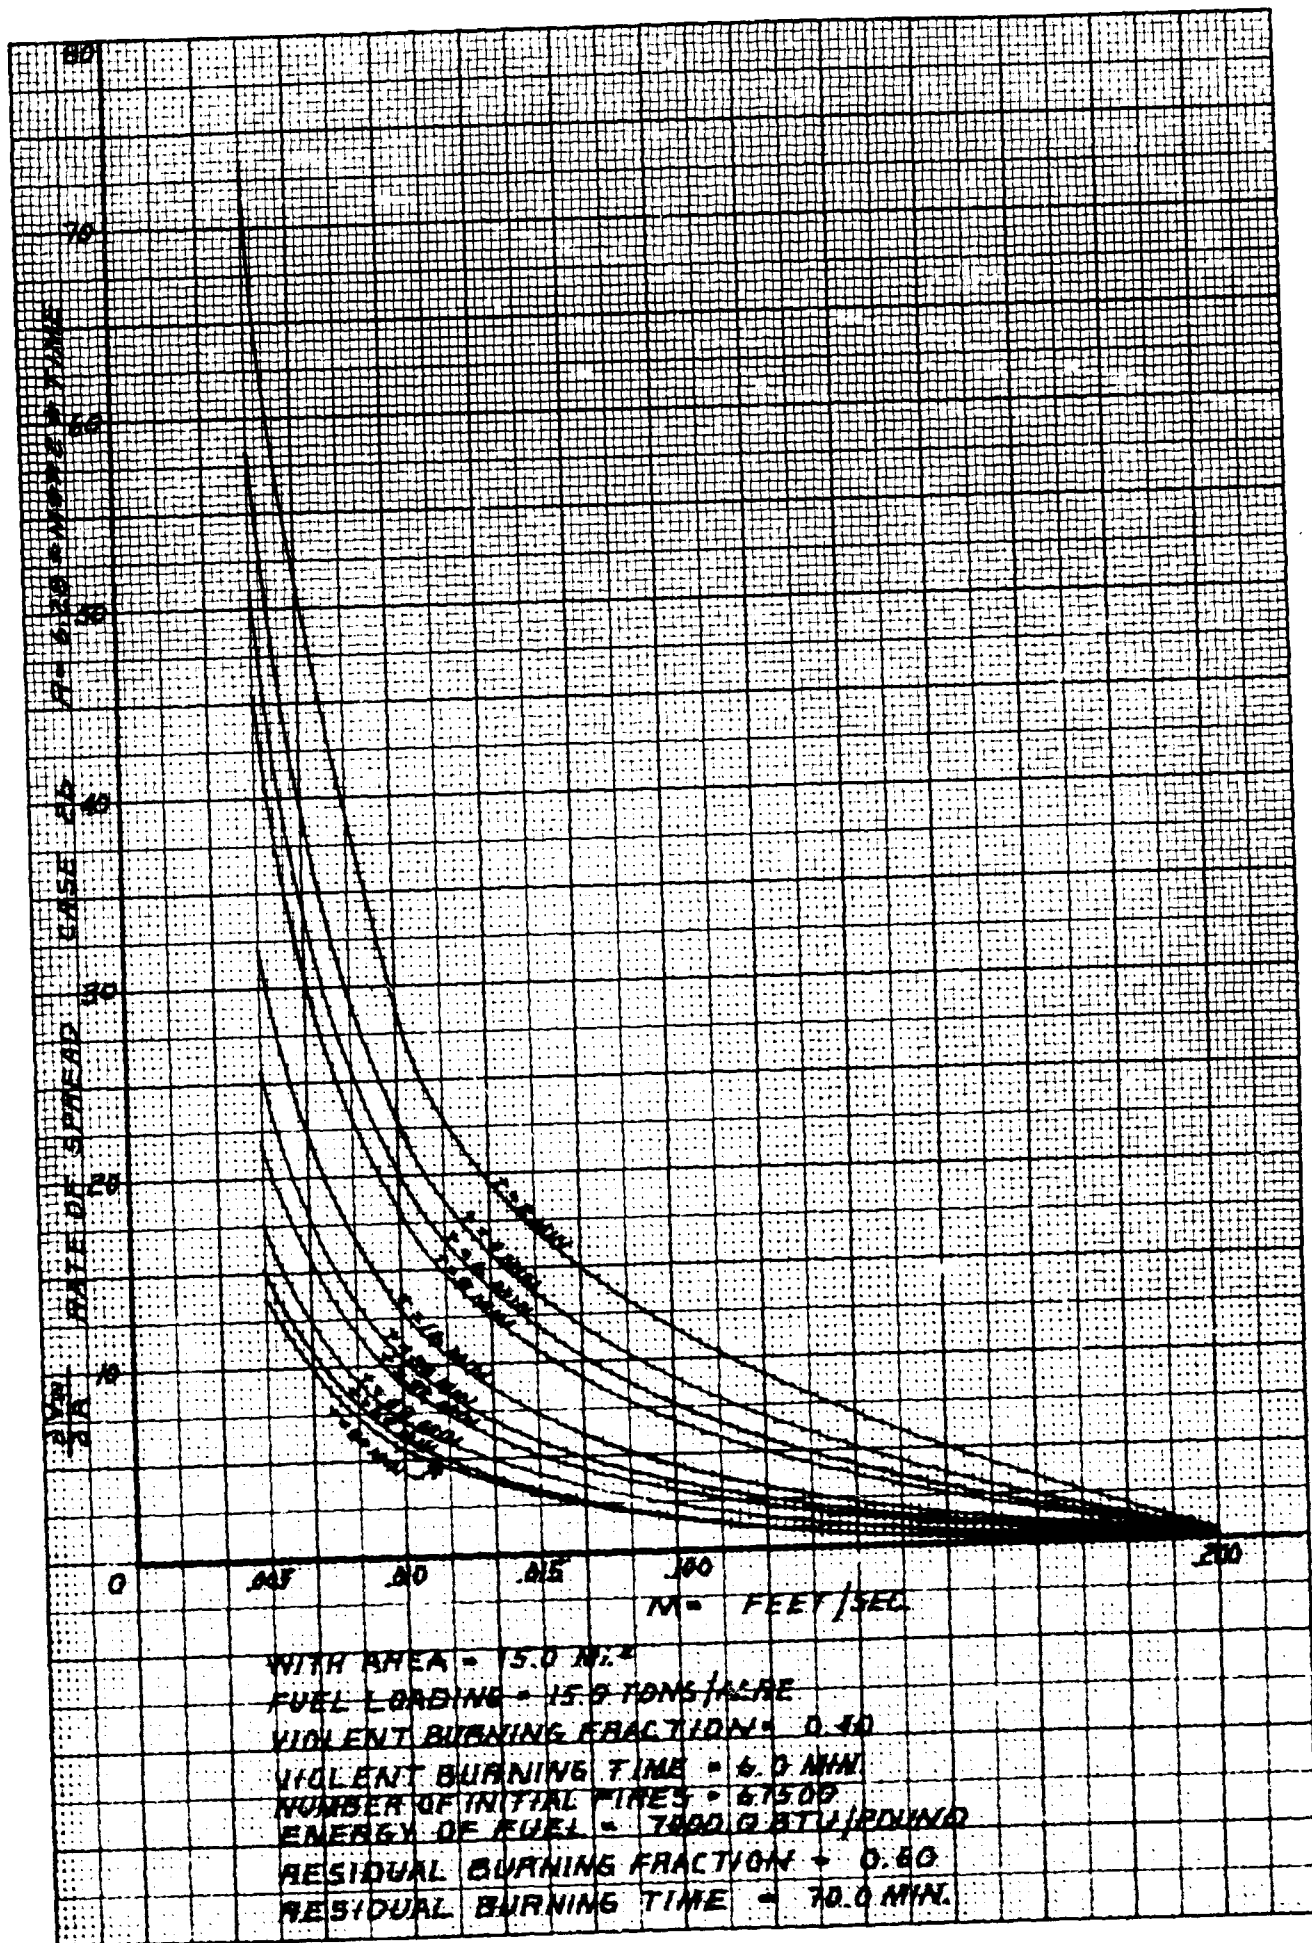


Fig. V-7

APPENDIX VI

ACCELERATED SPREAD STUDY

VI.1 General

Given n initial point fires distributed uniformly in an area A such that the initial separation distances between any fire and its nearest neighbors are equal, then D , x , and r_c are defined in Fig. VI-1 for any two fires.

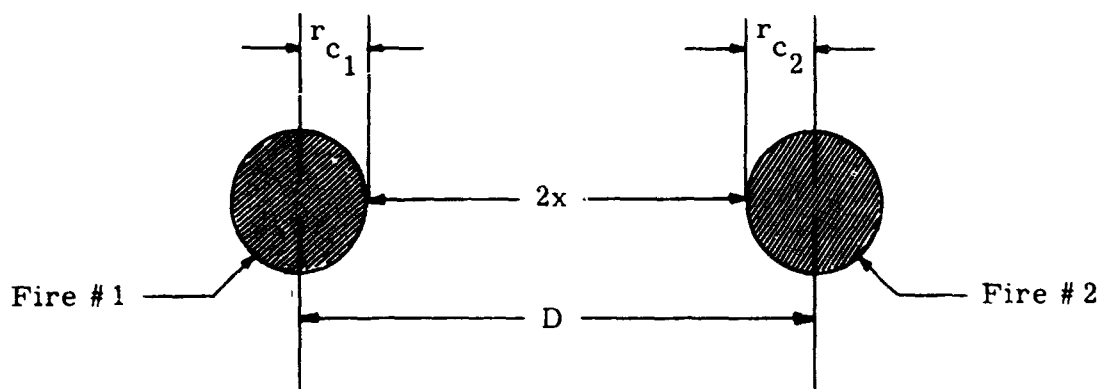


Fig. VI-1

Assume that $r_{c1} = r_{c2} = \phi(t)$, that both fires maintain essentially circular fronts as the fires spread, and the radius at any time t is r_c for each fire.

Let M represent the rate of radial spread in ft/min, so that

$$M = \frac{dr_c}{dt} \quad (VI.1)$$

M , x , and r_c are to be determined as functions of time for four initial spread modes, with accelerated spread beginning at some value of r_c .

VI.2 Accelerated Spread Relations *

Assume that for $r_c \geq [\sqrt{A/4n} - 3F]$, i. e., when $t > t_a$, spread is accelerated according to the hyperbolic relation

$$Mx = 3F \cdot M_a, \quad (VI.2)$$

where

- A is the fire area (sq ft),
- n is the total number of fires in area A,
- F is the flame height (assume $F = 3$ ft),
- t_a is the time at which accelerated spread begins,
- x is the distance of one fire front from the point of merging,
- 2x is the minimum separation between fires (ft), and
- M_a is the value of M at t_a , which is the start of the accelerated spread, i. e.,

$$r_c \text{ at } t_a = \sqrt{A/4n} - 3F$$

NOTE: $D = \sqrt{A/n}$; therefore, since $x = \frac{1}{2} D - r_c$,

$$x \text{ at } t_a = 3F = 9 \text{ ft}.$$

VI.3 Initial Spread Mode One

For initial spread mode one, take, for $0 \leq r_c \leq [\sqrt{A/4n} - 3F]$,

* Provided by Mr. Craig C. Chandler, Division of Fire Research, U. S. Forest Service, Washington, D. C.

$$\left. \begin{aligned} M &= 0 \quad \text{if } t \leq 1/6760 \text{ min} \\ M &= \frac{1.27}{2\pi} \log_{10}(6760 t) \quad \text{for } \frac{1}{6760} < t \leq t_a \end{aligned} \right\} \quad (\text{VI. 3})^*$$

Then, since

$$r_c(t) = \int_0^t M dt = \frac{1.27}{2\pi} \int_{\frac{1}{6760}}^t \log_{10}(6760 t) dt \quad , \quad (\text{VI. 4})$$

$$r_c(t) = \frac{1.27}{2\pi(\ln 10)} \left[t \{ \ln(6760 t) - 1 \} + \frac{1}{6760} \right] \quad , \quad (\text{VI. 5})$$

and

$$x(t) = \frac{1}{2} D - r_c(t) = \frac{1}{2} \sqrt{A/n} - r_c(t) \quad , \quad (\text{VI. 6})$$

where $r_c(t)$ is the value of r_c at time t .

VI. 4 Initial Spread Mode Two

For initial spread mode two, take, for $0 \leq r_c \leq [\sqrt{A/4n} - 3F]$,

$$\left. \begin{aligned} M &= 0 \quad \text{if } t \leq 1/0.91 \text{ min} \\ M &= \frac{6.67}{2\pi} \log_{10}(0.91 t) \quad \text{for } \frac{1}{0.91} < t \leq t_a \end{aligned} \right\} \quad (\text{VI. 7})^*$$

As before, integration of Eq. (VI. 7) yields

* Provided by Mr. Craig C. Chandler, Division of Fire Research, U. S. Forest Service, Washington, D. C.

$$r_c(t) = \frac{6.67}{2\pi(\ln 10)} \left[t[\ln(0.91 t) - 1] + \frac{1}{0.91} \right] ; \quad (\text{VI. 8})$$

and, also

$$x(t) = \frac{1}{2} D - r_c(t) = \frac{1}{2} \sqrt{A/n} - r_c(t) . \quad (\text{VI. 9})$$

VI. 5 Initial Spread Mode Three

Consider now the case of constant rate of radial increase for $t \leq t_a$, with

$$M = 0.01 \text{ ft/sec} = 0.6 \text{ ft/min} . \quad (\text{VI. 10})$$

In this case,

$$r_c(t) = 0.6 t , \quad (\text{VI. 11})$$

and, as before

$$x(t) = \frac{1}{2} D - r_c(t) . \quad (\text{VI. 12})$$

VI. 6 Initial Spread Mode Four

Also, consider the case of constant rate of area increase up to $t = t_a$, i. e.,

$$\frac{dA}{dt} = K_1 = 5 \text{ ft}^2/\text{sec} = 300 \text{ ft}^2/\text{min} . \quad (\text{VI. 13})$$

Now

$$\frac{dA}{dt} = \frac{d(\pi r_c^2)}{dt} = 2\pi r_c \frac{dr_c}{dt} = 2\pi r_c M , \quad (\text{VI. 14})$$

and equating (VI. 13) with (VI. 14) yields

$$2\pi r_c M = 300 \text{ ft}^2/\text{min} . \quad (\text{VI. 15})$$

Taking Eq. (VI. 15) and remembering that

$$M = \frac{dr_c}{dt} = r'_c ,$$

we have that

$$r_c r'_c = \frac{300}{2\pi} = C \quad (VI. 16)$$

with the initial condition that $r_c(0) = 0$.

Hence,

$$r_c(t) = \sqrt{2Ct} = \sqrt{\frac{300t}{\pi}} , \quad (VI. 17)$$

and, as before

$$x(t) = \frac{1}{2}D - r_c(t) . \quad (VI. 18)$$

Also, differentiation of Eq. (VI. 17) yields

$$M = \sqrt{\frac{75}{\pi t}} . \quad (VI. 19)$$

VI. 7 Method of Calculation

A computer program has been written based upon the foregoing which calculates M , r_c , and x as functions of time for $0 \leq r_c < \frac{1}{2}D$. A listing of this program and its input requirements is included in Appendix VII.

VI. 8 Results

The results of calculations with the above program are presented graphically in Appendix VIII.

APPENDIX VII

ACCELERATED SPREAD PROGRAM

VII. 1 General

The following program is based upon the accelerated spread rationale explained in Appendix VI, and calculates spread rate (M), fire radius (r_c), and distance to merging (x) for each of the four initial spread modes discussed in Appendix VI, with acceleration for each mode beginning when $x \leq 3F$, where F represents the flame height. The program is written in FORTRAN IV for an IBM System/360 Model 40G digital computer. The program is in three parts. The first part performs the calculations for each initial spread mode. SUBROUTINE PRINT prints the results of these calculations up to the point of acceleration, and SUBROUTINE ACC performs the calculations and prints the results for each initial mode after acceleration begins.

VII. 2 Data Cards

The first card has format I12 and contains NSETS, the number of data sets to be used in the run.

Each data set consists of a single card with format 5E12. 4 containing the following inputs:

<u>Column</u>	<u>Program Symbol</u>	<u>Units</u>	<u>Variable</u>
1-12	D	feet	Initial separation between fires
13-24	F	feet	Flame height
25-36	TINC	minutes	Time increment of calculation for initial spread
37-48	TM1	minutes	Spread start time for Mode 1
49-60	TM2	minutes	Spread start time for Mode 2

NOTE: Due to the form of the equations for initial spread modes one and two, TM1 must be greater than 1/6760 minutes and TM2 must be greater than 1/0.91 minutes.

VII. 3 Program Listing

(See following pages.)

C	PROGRAM SPREAD	1
	DIMENSION T(1500),M(1500),RC(1500),X(1500)	2
	REAL M,MA	3
	PI=3.14159	4
	READ (1,1) NSETS	5
1	FORMAT (I12)	6
C	NSETS IS THE NUMBER OF DATA SETS	7
	DO 21 K=1,NSETS	8
	READ (1,2) D,F,TINC,TM1,TM2	9
C	D IS THE INITIAL SEPARATION BETWEEN FIRES IN FEET	10
C	F IS THE FLAME HEIGHT IN FEET	11
C	TINC IS THE TIME INCREMENT IN MINUTES FOR INITIAL SPREAD	12
C	TM1 IS THE SPREAD START TIME FOR MODE ONE	13
C	TM2 IS THE SPREAD START TIME FOR MODE TWO	14
C	RC IS THE FIRE RADIUS IN FEET	15
C	X IS THE DISTANCE TO MERGING IN FEET	16
C	M IS THE RATE OF RADIAL SPREAD IN FEET PER MINUTE	17
C	T IS TIME IN MINUTES	18
2	FORMAT (5E12.4)	19
	MODE=0	20
	T(1)=TINC	21
C	THIS LOOP CALCULATES SPREAD FOR MODE ONE	22
	TEST=3.0*F	23
	DO 7 I=1,1000	24
	IF (T(I)-TM1) 3,3,4	25
3	M(I)=0	26
	RC(I)=0	27
	GO TO 5	28
4	M(I)=1.27/(2.0*PI)*ALOG10(6760.0*T(I))	29
	RC(I)=1.27/(2.0*PI*ALOG(10.0))*(T(I)*(ALOG(6760.0*T(I))-1.0)	30
	+1.0/6760.0)	31
5	X(I)=0.5*D-RC(I)	32
	II=I	33
	IF (X(I)-TEST) 8,8,6	34
6	T(I+1)=(I+1)*TINC	35
7	CONTINUE	36
8	MA=M(II)	37
	TA=T(II)	38
	XA=X(II)	39
	RA=RC(II)	40
	MODE=MODE+1	41
	CALL PRINT (X,M,T,RC,II,MODE,D,F)	42
	CALL ACC (XA,MA,TA,RA,X,M,T,RC,MODE,F)	43
	GO TO (9,15,18,21),MODE	44
9	T(1)=TINC	45
C	THIS LOOP CALCULATES SPREAD FOR MODE TWO	46
	DO 14 I=1,1000	47
	IF (T(I)-TM2) 10,10,11	48
10	M(I)=0.0	49
	RC(I)=0.0	50
	GO TO 12	51
11	M(I)=6.67/(2.0*PI)*ALOG10(0.91*T(I))	52

	RC(I)=6.67/(ALOG(10.0)*2.0*PI)*(T(I)*(ALOG(0.91*T(I))-1.0)	53
	\$+1.0/0.91)	54
12	X(I)=0.5*D-RC(I)	55
	II=I	56
	IF (X(I)-TEST) 8,8,13	57
13	T(I+1)=(I+1)*TINC	58
14	CONTINUE	59
15	T(I)=TINC	60
C	THIS LOOP IS FOR SPREAD MODE THREE, CONSTANT RADIAL INCREASE	61
	DO 17 I=1,1000	62
	M(I)=0.6	63
	RC(I)=0.6*T(I)	64
	X(I)=0.5*D-RC(I)	65
	II=I	66
	IF (X(I)-TEST) 8,8,16	67
16	T(I+1)=(I+1)*TINC	68
17	CONTINUE	69
18	T(I)=TINC	70
C	THIS LOOP CALCULATES SPREAD FOR MODE FOUR	71
	DO 20 I=1,1000	72
	M(I)=SQRT(75.0/(PI*T(I)))	73
	RC(I)=SQRT((300.0*T(I))/PI)	74
	X(I)=0.5*D-RC(I)	75
	II=I	76
	IF (X(I)-TEST) 8,8,19	77
19	T(I+1)=(I+1)*TINC	78
20	CONTINUE	79
21	CONTINUE	80
	RETURN	81
	END	82
	SUBROUTINE PRINT (X,M,T,RC,II,MODE,D,F)	83
	DIMENSION X(1),M(1),T(1),RC(1)	84
1	FORMAT (1H1,10X,19HINITIAL SEPARATION=,F12.4,10X,13HFLAME HEIGHT=	85
	\$,F12.4,10X,21HSPREAD MODE IS NUMBER,15)	86
	NPG=II/96	87
	L=II-NPG*96	88
	M1=1	89
	M2=96	90
	DO 4 K=1,NPG	91
	WRITE (3,1) D,F,MODE	92
	WRITE (3,2)	93
2	FORMAT (1H0,1X,2(12X,4HTIME,5X,11HSPREAD RATE,5X,11HFIRE RADIUS	94
	\$,3X,14HMEPGE DISTANCE))	95
	WRITE (3,3) (T(J),M(J),RC(J),X(J),J=M1,M2)	96
3	FORMAT (2X,8F16.4)	97
	M1=M1+56	98
	M2=M2+96	99
4	CONTINUE	100
	IF (L) 9,0,5	101
5	IF (NPG) 6,6,7	102
	M1=1	103
	M2=L	104

	GO TO 8	105
7	M2=M1+L-1	106
8	WRITE (3,1) D,F,MODE	107
	WRITE (3,2)	108
	WRITE (3,3) (T(J),M(J),RC(J),X(J),J=M1,M2)	109
9	RETURN	110
	END	111
	SUBROUTINE ACC (XA,MA,TA,RA,X,M,T,RC,MODE,F)	112
C	THIS SUBROUTINE CALCULATES SPREAD RATE, RADIUS, AND	113
C	SEPARATION DISTANCE AFTER ACCELERATION BEGINS	114
	DIMENSION X(1),T(1),M(1),RC(1)	115
	REAL M,MA	116
	DT=.005	117
	X(1)=XA	118
	M(1)=MA	119
	T(1)=TA	120
	RC(1)=RA	121
	DO 1 J=2,1500	122
	X(J)=X(J-1)-M(J-1)*DT	123
	M(J)=3.0*F*MA/X(J)	124
	RC(J)=RA+XA-X(J)	125
	T(J)=TA+DT*(J-1)	126
	IF (X(J)-.05) 2,2,1	127
1	CONTINUE	128
2	LPINC=4	129
	N=J-LPINC+1	130
	LPPG=96*LPINC	131
	NPG=N/LPPG	132
	L=N-NPG*LPPG	133
	M1=1	134
	M2=LPPG	135
	DO 3 KK=1,NPG	136
	WRITE (3,8) MODE	137
	WRITE (3,9)	138
	WRITE (3,10) (T(K),M(K),RC(K),X(K),K=M1,M2,LPINC)	139
	M1=M1+LPPG	140
	M2=M2+LPPG	141
3	CONTINUE	142
	IF (L) 11,11,4	143
4	IF (NPG) 5,5,6	144
5	M1=1	145
	M2=L	146
	GO TO 7	147
6	M2=M1+L-1	148
7	WRITE (3,8) MODE	149
	WRITE (3,9)	150
	WRITE (3,10) (T(K),M(K),RC(K),X(K),K=M1,M2,LPINC)	151
8	FORMAT (1H1,40X,'ACCELERATION PHASE FOR INITIAL SPREAD MODE',15)	152
9	FORMAT (1H0,1X,2(12X,4HTIME,5X,11HSPREAD RATE,5X,11HFIRE RADIUS	153
	5,3X,14HFFGE DISTANCE))	154
10	FORMAT (2X,5F16.4)	155
11	RETURN	156

APPENDIX VIII

ACCELERATED SPREAD CURVES

The following eight curves show spread rate (M) as a function of time (t) and fire radius (r_c) for each of the four initial spread modes discussed in Appendix VI, with the point at which accelerated spread begins indicated by the symbol ▲ beside each curve.

These curves are drawn from the output of the computer program described in Appendix VII, with an initial separation between fires (D) of 78.8 feet, a flame height (F) of 3.0 feet, TINC = 0.1 minutes, TM1 = .000148 minutes, and TM2 = 1.1 minutes.

The value of D was taken from the formula $D = \sqrt{A/n}$, with $n = A \cdot n_d$. Using the representative values of A and n_d as discussed in Appendix II,

$$D = \sqrt{\frac{15.0 (5280)^2}{15.0 \cdot 4500}} = \frac{528}{3} \sqrt{1/5} = 78.8 \text{ ft}.$$

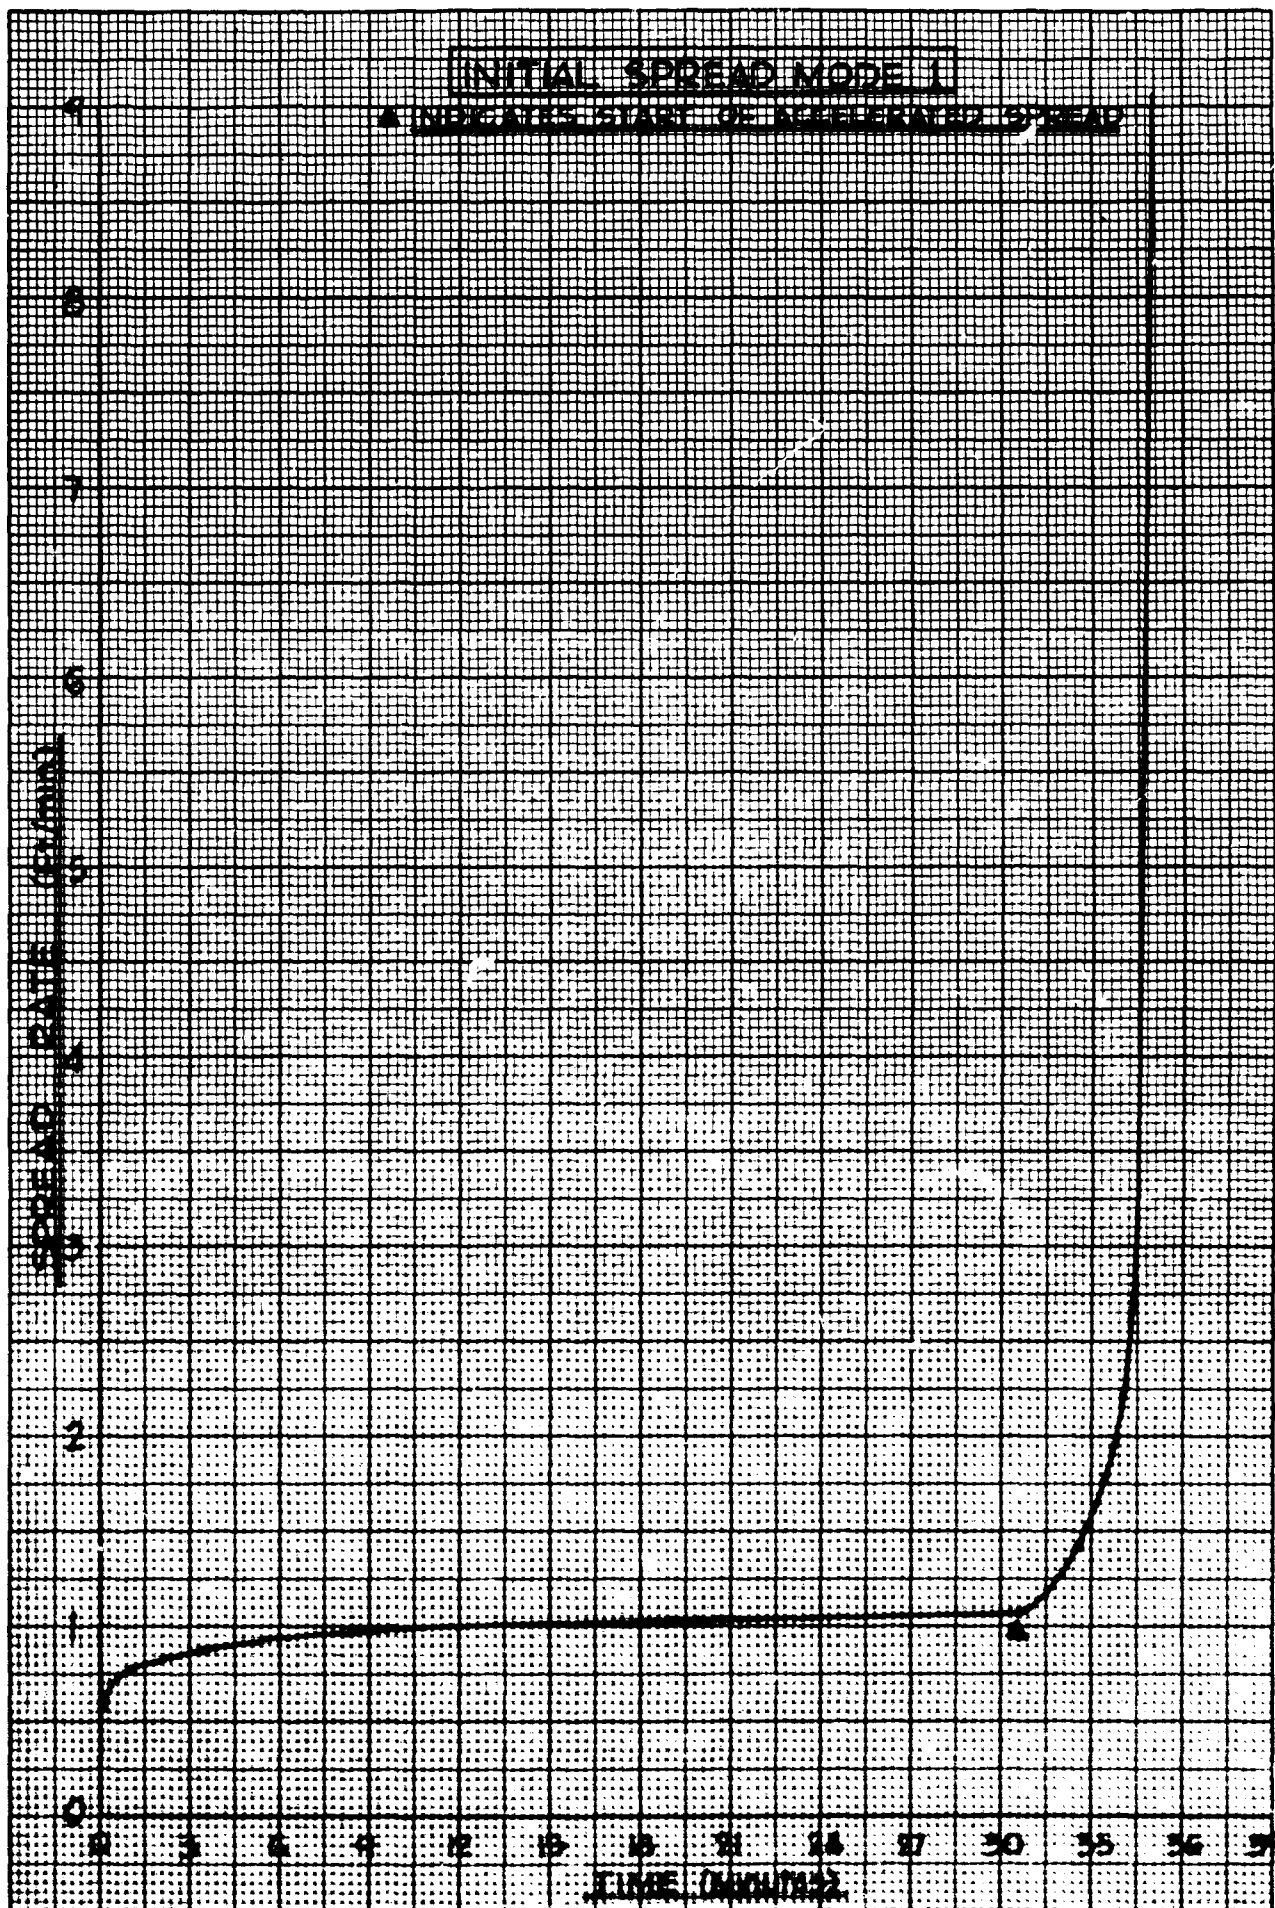


Fig. VIII-1

K-E 10 X 10 TO 13 INCH 48 1323
7 1/2 INCHES
KEUFFEL & ESSER CO.

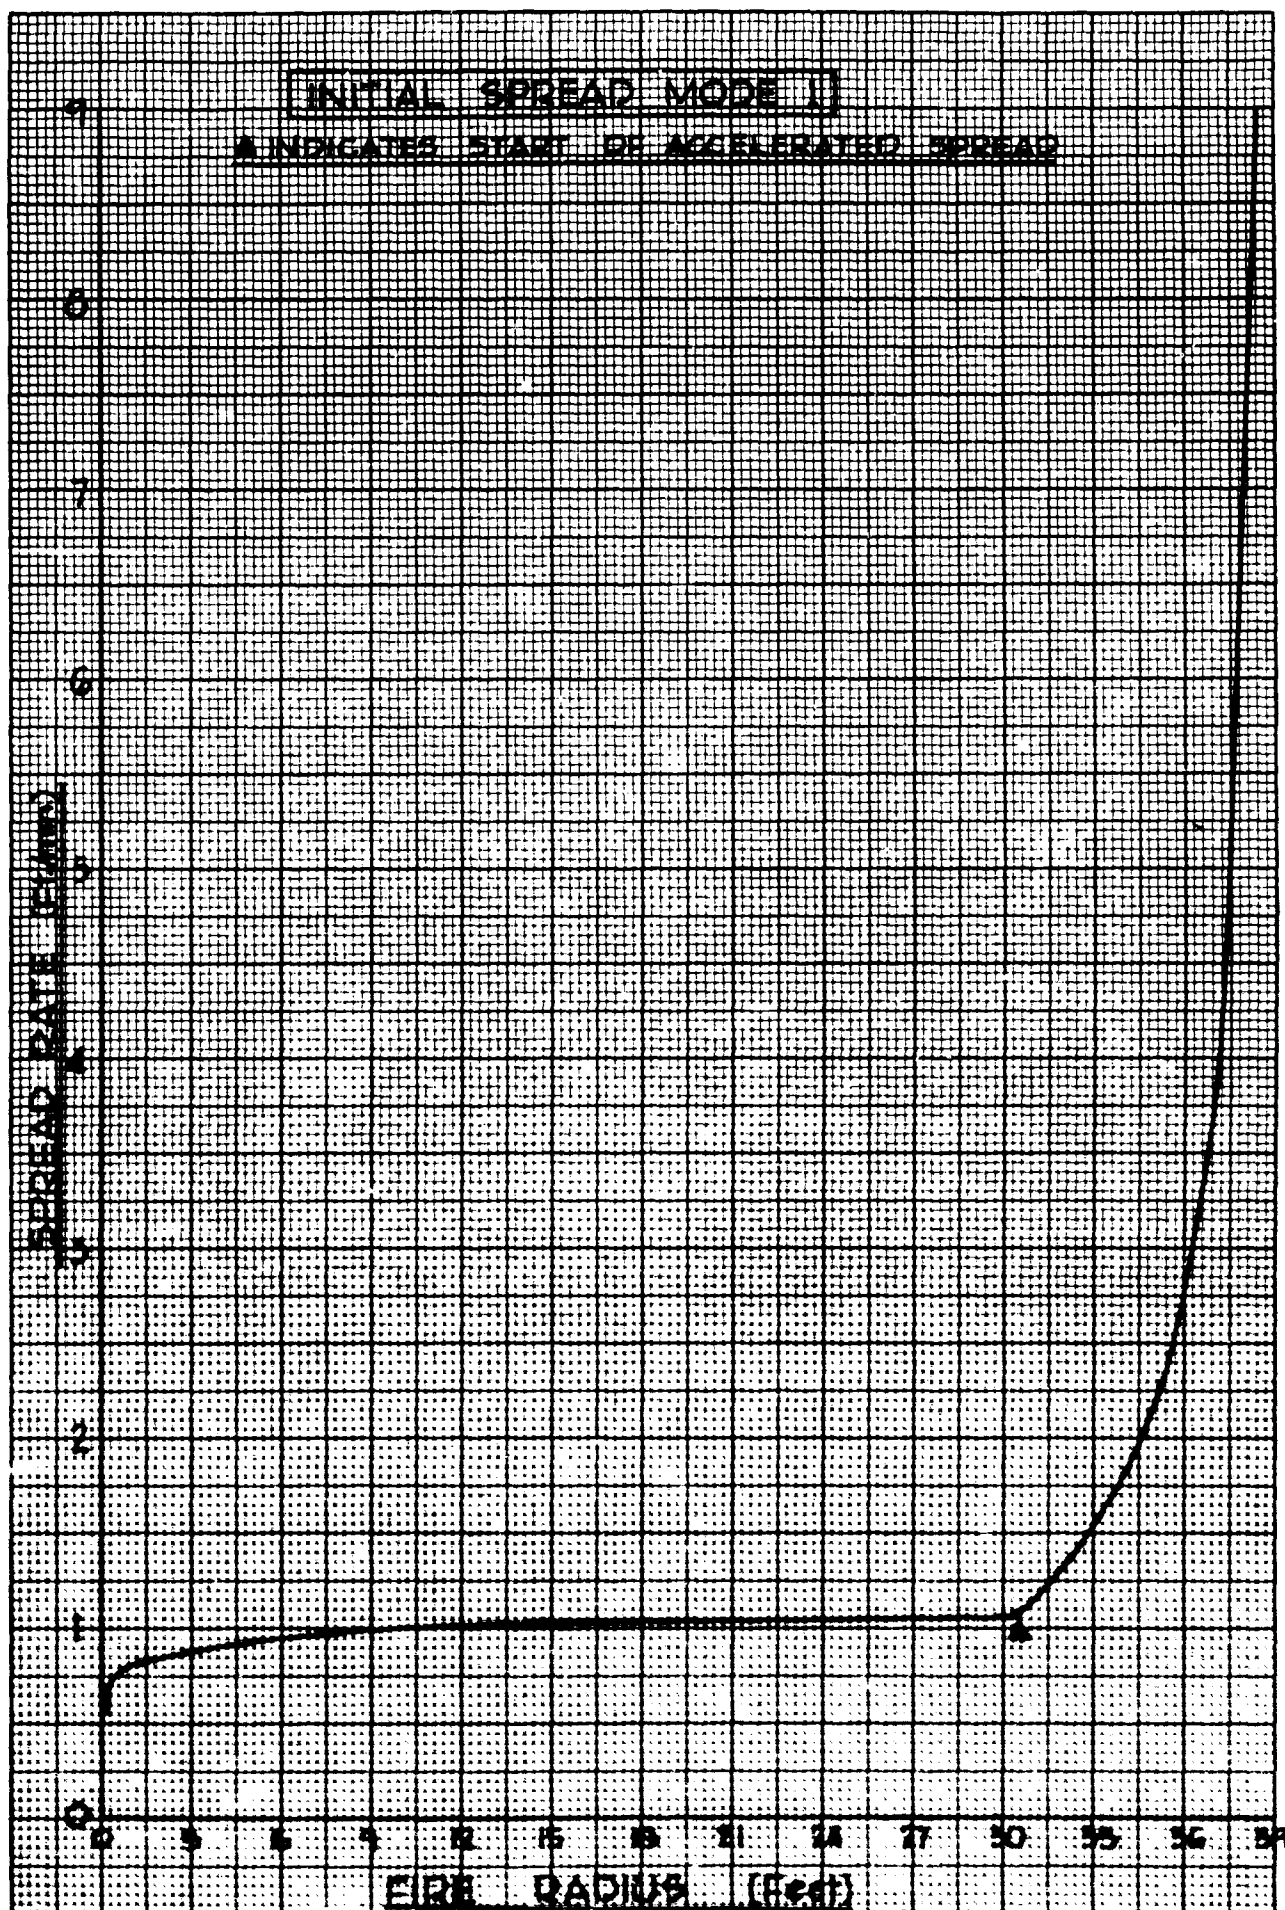


Fig. VIII-2

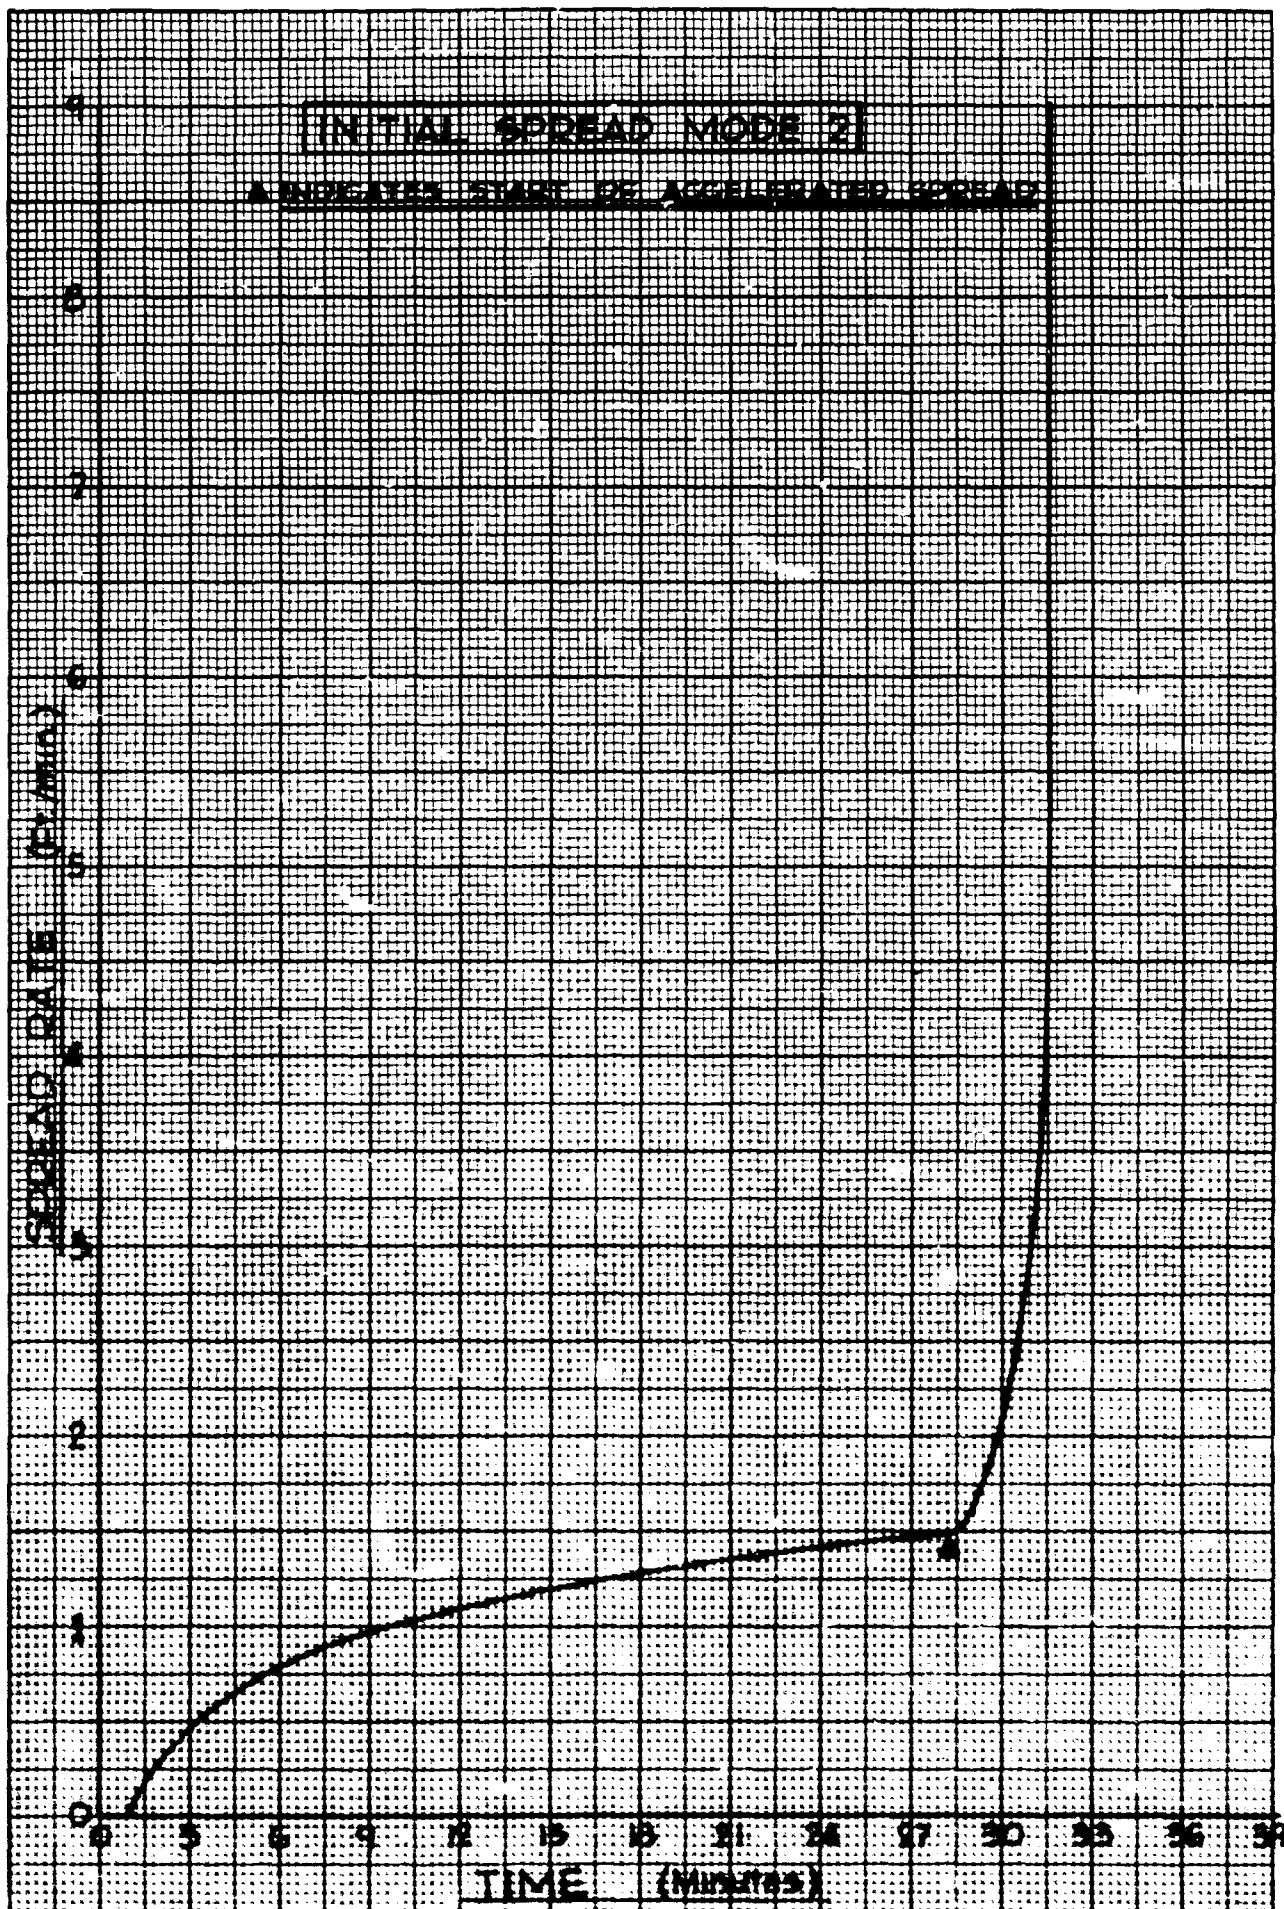


Fig. VIII-3

K-E 10 X 10 TO 1/2 INCM 46 1323
 7 X 10 INCM 5
 8 INCM 6
 9 INCM 7
 10 INCM 8
 11 INCM 9
 12 INCM 10
 13 INCM 11
 14 INCM 12
 15 INCM 13
 16 INCM 14
 17 INCM 15
 18 INCM 16
 19 INCM 17
 20 INCM 18
 21 INCM 19
 22 INCM 20
 23 INCM 21
 24 INCM 22
 25 INCM 23
 26 INCM 24
 27 INCM 25
 28 INCM 26
 29 INCM 27
 30 INCM 28
 31 INCM 29
 32 INCM 30
 33 INCM 31
 34 INCM 32
 35 INCM 33
 36 INCM 34
 37 INCM 35
 38 INCM 36
 39 INCM 37
 40 INCM 38
 41 INCM 39
 42 INCM 40
 43 INCM 41
 44 INCM 42
 45 INCM 43
 46 INCM 44
 47 INCM 45
 48 INCM 46
 49 INCM 47
 50 INCM 48
 51 INCM 49
 52 INCM 50
 53 INCM 51
 54 INCM 52
 55 INCM 53
 56 INCM 54
 57 INCM 55
 58 INCM 56
 59 INCM 57
 60 INCM 58
 61 INCM 59
 62 INCM 60
 63 INCM 61
 64 INCM 62
 65 INCM 63
 66 INCM 64
 67 INCM 65
 68 INCM 66
 69 INCM 67
 70 INCM 68
 71 INCM 69
 72 INCM 70
 73 INCM 71
 74 INCM 72
 75 INCM 73
 76 INCM 74
 77 INCM 75
 78 INCM 76
 79 INCM 77
 80 INCM 78
 81 INCM 79
 82 INCM 80
 83 INCM 81
 84 INCM 82
 85 INCM 83
 86 INCM 84
 87 INCM 85
 88 INCM 86
 89 INCM 87
 90 INCM 88
 91 INCM 89
 92 INCM 90
 93 INCM 91
 94 INCM 92
 95 INCM 93
 96 INCM 94
 97 INCM 95
 98 INCM 96
 99 INCM 97
 100 INCM 98
 101 INCM 99
 102 INCM 100
 103 INCM 101
 104 INCM 102
 105 INCM 103
 106 INCM 104
 107 INCM 105
 108 INCM 106
 109 INCM 107
 110 INCM 108
 111 INCM 109
 112 INCM 110
 113 INCM 111
 114 INCM 112
 115 INCM 113
 116 INCM 114
 117 INCM 115
 118 INCM 116
 119 INCM 117
 120 INCM 118
 121 INCM 119
 122 INCM 120
 123 INCM 121
 124 INCM 122
 125 INCM 123
 126 INCM 124
 127 INCM 125
 128 INCM 126
 129 INCM 127
 130 INCM 128
 131 INCM 129
 132 INCM 130
 133 INCM 131
 134 INCM 132
 135 INCM 133
 136 INCM 134
 137 INCM 135
 138 INCM 136
 139 INCM 137
 140 INCM 138
 141 INCM 139
 142 INCM 140
 143 INCM 141
 144 INCM 142
 145 INCM 143
 146 INCM 144
 147 INCM 145
 148 INCM 146
 149 INCM 147
 150 INCM 148
 151 INCM 149
 152 INCM 150
 153 INCM 151
 154 INCM 152
 155 INCM 153
 156 INCM 154
 157 INCM 155
 158 INCM 156
 159 INCM 157
 160 INCM 158
 161 INCM 159
 162 INCM 160
 163 INCM 161
 164 INCM 162
 165 INCM 163
 166 INCM 164
 167 INCM 165
 168 INCM 166
 169 INCM 167
 170 INCM 168
 171 INCM 169
 172 INCM 170
 173 INCM 171
 174 INCM 172
 175 INCM 173
 176 INCM 174
 177 INCM 175
 178 INCM 176
 179 INCM 177
 180 INCM 178
 181 INCM 179
 182 INCM 180
 183 INCM 181
 184 INCM 182
 185 INCM 183
 186 INCM 184
 187 INCM 185
 188 INCM 186
 189 INCM 187
 190 INCM 188
 191 INCM 189
 192 INCM 190
 193 INCM 191
 194 INCM 192
 195 INCM 193
 196 INCM 194
 197 INCM 195
 198 INCM 196
 199 INCM 197
 200 INCM 198
 201 INCM 199
 202 INCM 200
 203 INCM 201
 204 INCM 202
 205 INCM 203
 206 INCM 204
 207 INCM 205
 208 INCM 206
 209 INCM 207
 210 INCM 208
 211 INCM 209
 212 INCM 210
 213 INCM 211
 214 INCM 212
 215 INCM 213
 216 INCM 214
 217 INCM 215
 218 INCM 216
 219 INCM 217
 220 INCM 218
 221 INCM 219
 222 INCM 220
 223 INCM 221
 224 INCM 222
 225 INCM 223
 226 INCM 224
 227 INCM 225
 228 INCM 226
 229 INCM 227
 230 INCM 228
 231 INCM 229
 232 INCM 230
 233 INCM 231
 234 INCM 232
 235 INCM 233
 236 INCM 234
 237 INCM 235
 238 INCM 236
 239 INCM 237
 240 INCM 238
 241 INCM 239
 242 INCM 240
 243 INCM 241
 244 INCM 242
 245 INCM 243
 246 INCM 244
 247 INCM 245
 248 INCM 246
 249 INCM 247
 250 INCM 248
 251 INCM 249
 252 INCM 250
 253 INCM 251
 254 INCM 252
 255 INCM 253
 256 INCM 254
 257 INCM 255
 258 INCM 256
 259 INCM 257
 260 INCM 258
 261 INCM 259
 262 INCM 260
 263 INCM 261
 264 INCM 262
 265 INCM 263
 266 INCM 264
 267 INCM 265
 268 INCM 266
 269 INCM 267
 270 INCM 268
 271 INCM 269
 272 INCM 270
 273 INCM 271
 274 INCM 272
 275 INCM 273
 276 INCM 274
 277 INCM 275
 278 INCM 276
 279 INCM 277
 280 INCM 278
 281 INCM 279
 282 INCM 280
 283 INCM 281
 284 INCM 282
 285 INCM 283
 286 INCM 284
 287 INCM 285
 288 INCM 286
 289 INCM 287
 290 INCM 288
 291 INCM 289
 292 INCM 290
 293 INCM 291
 294 INCM 292
 295 INCM 293
 296 INCM 294
 297 INCM 295
 298 INCM 296
 299 INCM 297
 300 INCM 298
 301 INCM 299
 302 INCM 300
 303 INCM 301
 304 INCM 302
 305 INCM 303
 306 INCM 304
 307 INCM 305
 308 INCM 306
 309 INCM 307
 310 INCM 308
 311 INCM 309
 312 INCM 310
 313 INCM 311
 314 INCM 312
 315 INCM 313
 316 INCM 314
 317 INCM 315
 318 INCM 316
 319 INCM 317
 320 INCM 318
 321 INCM 319
 322 INCM 320
 323 INCM 321
 324 INCM 322
 325 INCM 323
 326 INCM 324
 327 INCM 325
 328 INCM 326
 329 INCM 327
 330 INCM 328
 331 INCM 329
 332 INCM 330
 333 INCM 331
 334 INCM 332
 335 INCM 333
 336 INCM 334
 337 INCM 335
 338 INCM 336
 339 INCM 337
 340 INCM 338
 341 INCM 339
 342 INCM 340
 343 INCM 341
 344 INCM 342
 345 INCM 343
 346 INCM 344
 347 INCM 345
 348 INCM 346
 349 INCM 347
 350 INCM 348
 351 INCM 349
 352 INCM 350
 353 INCM 351
 354 INCM 352
 355 INCM 353
 356 INCM 354
 357 INCM 355
 358 INCM 356
 359 INCM 357
 360 INCM 358
 361 INCM 359
 362 INCM 360
 363 INCM 361
 364 INCM 362
 365 INCM 363
 366 INCM 364
 367 INCM 365
 368 INCM 366
 369 INCM 367
 370 INCM 368
 371 INCM 369
 372 INCM 370
 373 INCM 371
 374 INCM 372
 375 INCM 373
 376 INCM 374
 377 INCM 375
 378 INCM 376
 379 INCM 377
 380 INCM 378
 381 INCM 379
 382 INCM 380
 383 INCM 381
 384 INCM 382
 385 INCM 383
 386 INCM 384
 387 INCM 385
 388 INCM 386
 389 INCM 387
 390 INCM 388
 391 INCM 389
 392 INCM 390
 393 INCM 391
 394 INCM 392
 395 INCM 393
 396 INCM 394
 397 INCM 395
 398 INCM 396
 399 INCM 397
 400 INCM 398
 401 INCM 399
 402 INCM 400
 403 INCM 401
 404 INCM 402
 405 INCM 403
 406 INCM 404
 407 INCM 405
 408 INCM 406
 409 INCM 407
 410 INCM 408
 411 INCM 409
 412 INCM 410
 413 INCM 411
 414 INCM 412
 415 INCM 413
 416 INCM 414
 417 INCM 415
 418 INCM 416
 419 INCM 417
 420 INCM 418
 421 INCM 419
 422 INCM 420
 423 INCM 421
 424 INCM 422
 425 INCM 423
 426 INCM 424
 427 INCM 425
 428 INCM 426
 429 INCM 427
 430 INCM 428
 431 INCM 429
 432 INCM 430
 433 INCM 431
 434 INCM 432
 435 INCM 433
 436 INCM 434
 437 INCM 435
 438 INCM 436
 439 INCM 437
 440 INCM 438
 441 INCM 439
 442 INCM 440
 443 INCM 441
 444 INCM 442
 445 INCM 443
 446 INCM 444
 447 INCM 445
 448 INCM 446
 449 INCM 447
 450 INCM 448
 451 INCM 449
 452 INCM 450
 453 INCM 451
 454 INCM 452
 455 INCM 453
 456 INCM 454
 457 INCM 455
 458 INCM 456
 459 INCM 457
 460 INCM 458
 461 INCM 459
 462 INCM 460
 463 INCM 461
 464 INCM 462
 465 INCM 463
 466 INCM 464
 467 INCM 465
 468 INCM 466
 469 INCM 467
 470 INCM 468
 471 INCM 469
 472 INCM 470
 473 INCM 471
 474 INCM 472
 475 INCM 473
 476 INCM 474
 477 INCM 475
 478 INCM 476
 479 INCM 477
 480 INCM 478
 481 INCM 479
 482 INCM 480
 483 INCM 481
 484 INCM 482
 485 INCM 483
 486 INCM 484
 487 INCM 485
 488 INCM 486
 489 INCM 487
 490 INCM 488
 491 INCM 489
 492 INCM 490
 493 INCM 491
 494 INCM 492
 495 INCM 493
 496 INCM 494
 497 INCM 495
 498 INCM 496
 499 INCM 497
 500 INCM 498
 501 INCM 499
 502 INCM 500
 503 INCM 501
 504 INCM 502
 505 INCM 503
 506 INCM 504
 507 INCM 505
 508 INCM 506
 509 INCM 507
 510 INCM 508
 511 INCM 509
 512 INCM 510
 513 INCM 511
 514 INCM 512
 515 INCM 513
 516 INCM 514
 517 INCM 515
 518 INCM 516
 519 INCM 517
 520 INCM 518
 521 INCM 519
 522 INCM 520
 523 INCM 521
 524 INCM 522
 525 INCM 523
 526 INCM 524
 527 INCM 525
 528 INCM 526
 529 INCM 527
 530 INCM 528
 531 INCM 529
 532 INCM 530
 533 INCM 531
 534 INCM 532
 535 INCM 533
 536 INCM 534
 537 INCM 535
 538 INCM 536
 539 INCM 537
 540 INCM 538
 541 INCM 539
 542 INCM 540
 543 INCM 541
 544 INCM 542
 545 INCM 543
 546 INCM 544
 547 INCM 545
 548 INCM 546
 549 INCM 547
 550 INCM 548
 551 INCM 549
 552 INCM 550
 553 INCM 551
 554 INCM 552
 555 INCM 553
 556 INCM 554
 557 INCM 555
 558 INCM 556
 559 INCM 557
 560 INCM 558
 561 INCM 559
 562 INCM 560
 563 INCM 561
 564 INCM 562
 565 INCM 563
 566 INCM 564
 567 INCM 565
 568 INCM 566
 569 INCM 567
 570 INCM 568
 571 INCM 569
 572 INCM 570
 573 INCM 571
 574 INCM 572
 575 INCM 573
 576 INCM 574
 577 INCM 575
 578 INCM 576
 579 INCM 577
 580 INCM 578
 581 INCM 579
 582 INCM 580
 583 INCM 581
 584 INCM 582
 585 INCM 583
 586 INCM 584
 587 INCM 585
 588 INCM 586
 589 INCM 587
 590 INCM 588
 591 INCM 589
 592 INCM 590
 593 INCM 591
 594 INCM 592
 595 INCM 593
 596 INCM 594
 597 INCM 595
 598 INCM 596
 599 INCM 597
 600 INCM 598
 601 INCM 599
 602 INCM 600
 603 INCM 601
 604 INCM 602
 605 INCM 603
 606 INCM 604
 607 INCM 605
 608 INCM 606
 609 INCM 607
 610 INCM 608
 611 INCM 609
 612 INCM 610
 613 INCM 611
 614 INCM 612
 615 INCM 613
 616 INCM 614
 617 INCM 615
 618 INCM 616
 619 INCM 617
 620 INCM 618
 621 INCM 619
 622 INCM 620
 623 INCM 621
 624 INCM 622
 625 INCM 623
 626 INCM 624
 627 INCM 625
 628 INCM 626
 629 INCM 627
 630 INCM 628
 631 INCM 629
 632 INCM 630
 633 INCM 631
 634 INCM 632
 635 INCM 633
 636 INCM 634
 637 INCM 635
 638 INCM 636
 639 INCM 637
 640 INCM 638
 641 INCM 639
 642 INCM 640
 643 INCM 641
 644 INCM 642
 645 INCM 643
 646 INCM 644
 647 INCM 645
 648 INCM 646
 649 INCM 647
 650 INCM 648
 651 INCM 649
 652 INCM 650
 653 INCM 651
 654 INCM 652
 655 INCM 653
 656 INCM 654
 657 INCM 655
 658 INCM 656
 659 INCM 657
 660 INCM 658
 661 INCM 659
 662 INCM 660
 663 INCM 661
 664 INCM 662
 665 INCM 663
 666 INCM 664
 667 INCM 665
 668 INCM 666
 669 INCM 667
 670 INCM 668
 671 INCM 669
 672 INCM 670
 673 INCM 671
 674 INCM 672
 675 INCM 673
 676 INCM 674
 677 INCM 675
 678 INCM 676
 679 INCM 677
 680 INCM 678
 681 INCM 679
 682 INCM 680
 683 INCM 681
 684 INCM 682
 685 INCM 683
 686 INCM 684
 687 INCM 685
 688 INCM 686
 689 INCM 687
 690 INCM 688
 691 INCM 689
 692 INCM 690
 693 INCM 691
 694 INCM 692
 695 INCM 693
 696 INCM 694
 697 INCM 695
 698 INCM 696
 699 INCM 697
 700 INCM 698
 701 INCM 699
 702 INCM 700
 703 INCM 701
 704 INCM 702
 705 INCM 703
 706 INCM 704
 707 INCM 705
 708 INCM 706
 709 INCM 707
 710 INCM 708
 711 INCM 709
 712 INCM 710
 713 INCM 711
 714 INCM 712
 715 INCM 713
 716 INCM 714
 717 INCM 715
 718 INCM 716
 719 INCM 717
 720 INCM 718
 721 INCM 719
 722 INCM 720
 723 INCM 721
 724 INCM 722
 725 INCM 723
 726 INCM 724
 727 INCM 725
 728 INCM 726
 729 INCM 727
 730 INCM 728
 731 INCM 729
 732 INCM 730
 733 INCM 731
 734 INCM 732
 735 INCM 733
 736 INCM 734
 737 INCM 735
 738 INCM 736
 739 INCM 737
 740 INCM 738
 741 INCM 739
 742 INCM 740
 743 INCM 741
 744 INCM 742
 745 INCM 743
 746 INCM 744
 747 INCM 745
 748 INCM 746
 749 INCM 747
 750 INCM 748
 751 INCM 749
 752 INCM 750
 753 INCM 751
 754 INCM 752
 755 INCM 753
 756 INCM 754
 757 INCM 755
 758 INCM 756
 759 INCM 757
 760 INCM 758
 761 INCM 759
 762 INCM 760
 763 INCM 761
 764 INCM 762
 765 INCM 763
 766 INCM 764
 767 INCM 765
 768 INCM 766
 769 INCM 767
 770 INCM 768
 771 INCM 769
 772 INCM 770
 773 INCM 771
 774 INCM 772
 775 INCM 773
 776 INCM 774
 777 INCM 775
 778 INCM 776
 779 INCM 777
 780 INCM 778
 781 INCM 779
 782 INCM 780
 783 INCM 781
 784 INCM 782
 785 INCM 783
 786 INCM 784
 787 INCM 785
 788 INCM 786
 789 INCM 787
 790 INCM 788
 791 INCM 789
 792 INCM 790
 793 INCM 791
 794 INCM 792
 795 INCM 793
 796 INCM 794
 797 INCM 795
 798 INCM 796
 799 INCM 797
 800 INCM 798
 801 INCM 799
 802 INCM 800
 803 INCM 801
 804 INCM 802
 805 INCM 803
 806 INCM 804
 807 INCM 805
 808 INCM 806
 809 INCM 807
 810 INCM 808
 811 INCM 809
 812 INCM 810
 813 INCM 811
 814 INCM 812
 815 INCM 813
 816 INCM 814
 817 INCM 815
 818 INCM 816
 819 INCM 817
 820 INCM 818
 821 INCM 819
 822 INCM 820
 823 INCM 821
 824 INCM 822
 825 INCM 823
 826 INCM 824
 827 INCM 825
 828 INCM 826
 829 INCM 827
 830 INCM 828
 831 INCM 829
 832 INCM 830
 833 INCM 831
 834 INCM 832
 835 INCM 833
 836 INCM 834
 837 INCM 835
 838 INCM 836
 839 INCM 837
 840 INCM 838
 841 INCM 839
 842 INCM 840
 843 INCM 841
 844 INCM 842
 845 INCM 843
 846 INCM 844
 847 INCM 845
 848 INCM 846
 849 INCM 847
 850 INCM 848
 851 INCM 849
 852 INCM 850
 853 INCM 851
 854 INCM 852
 855 INCM 853
 856 INCM 854
 857 INCM 855
 858 INCM 856
 859 INCM 857
 860 INCM 858
 861 INCM 859
 862 INCM 860
 863 INCM 861
 864 INCM 862
 865 INCM 863
 866 INCM 864
 867 INCM 865
 868 INCM 866
 869 INCM 867
 870 INCM 868
 871 INCM 869
 872 INCM 870
 873 INCM 871
 874 INCM 872
 875 INCM 873
 876 INCM 874
 877 INCM 875
 878 INCM 876
 879 INCM 877
 880 INCM 878
 881 INCM 879
 882 INCM 880
 883 INCM 881
 884 INCM 882
 885 INCM 883
 886 INCM 884
 887 INCM 885
 888 INCM 886
 889 INCM 887
 890 INCM 888
 891 INCM 889
 892 INCM 890
 893 INCM 891
 894 INCM 892
 895 INCM 893
 896 INCM 894
 897 INCM 895
 898 INCM 896
 899 INCM 897
 900 INCM 898
 901 IN

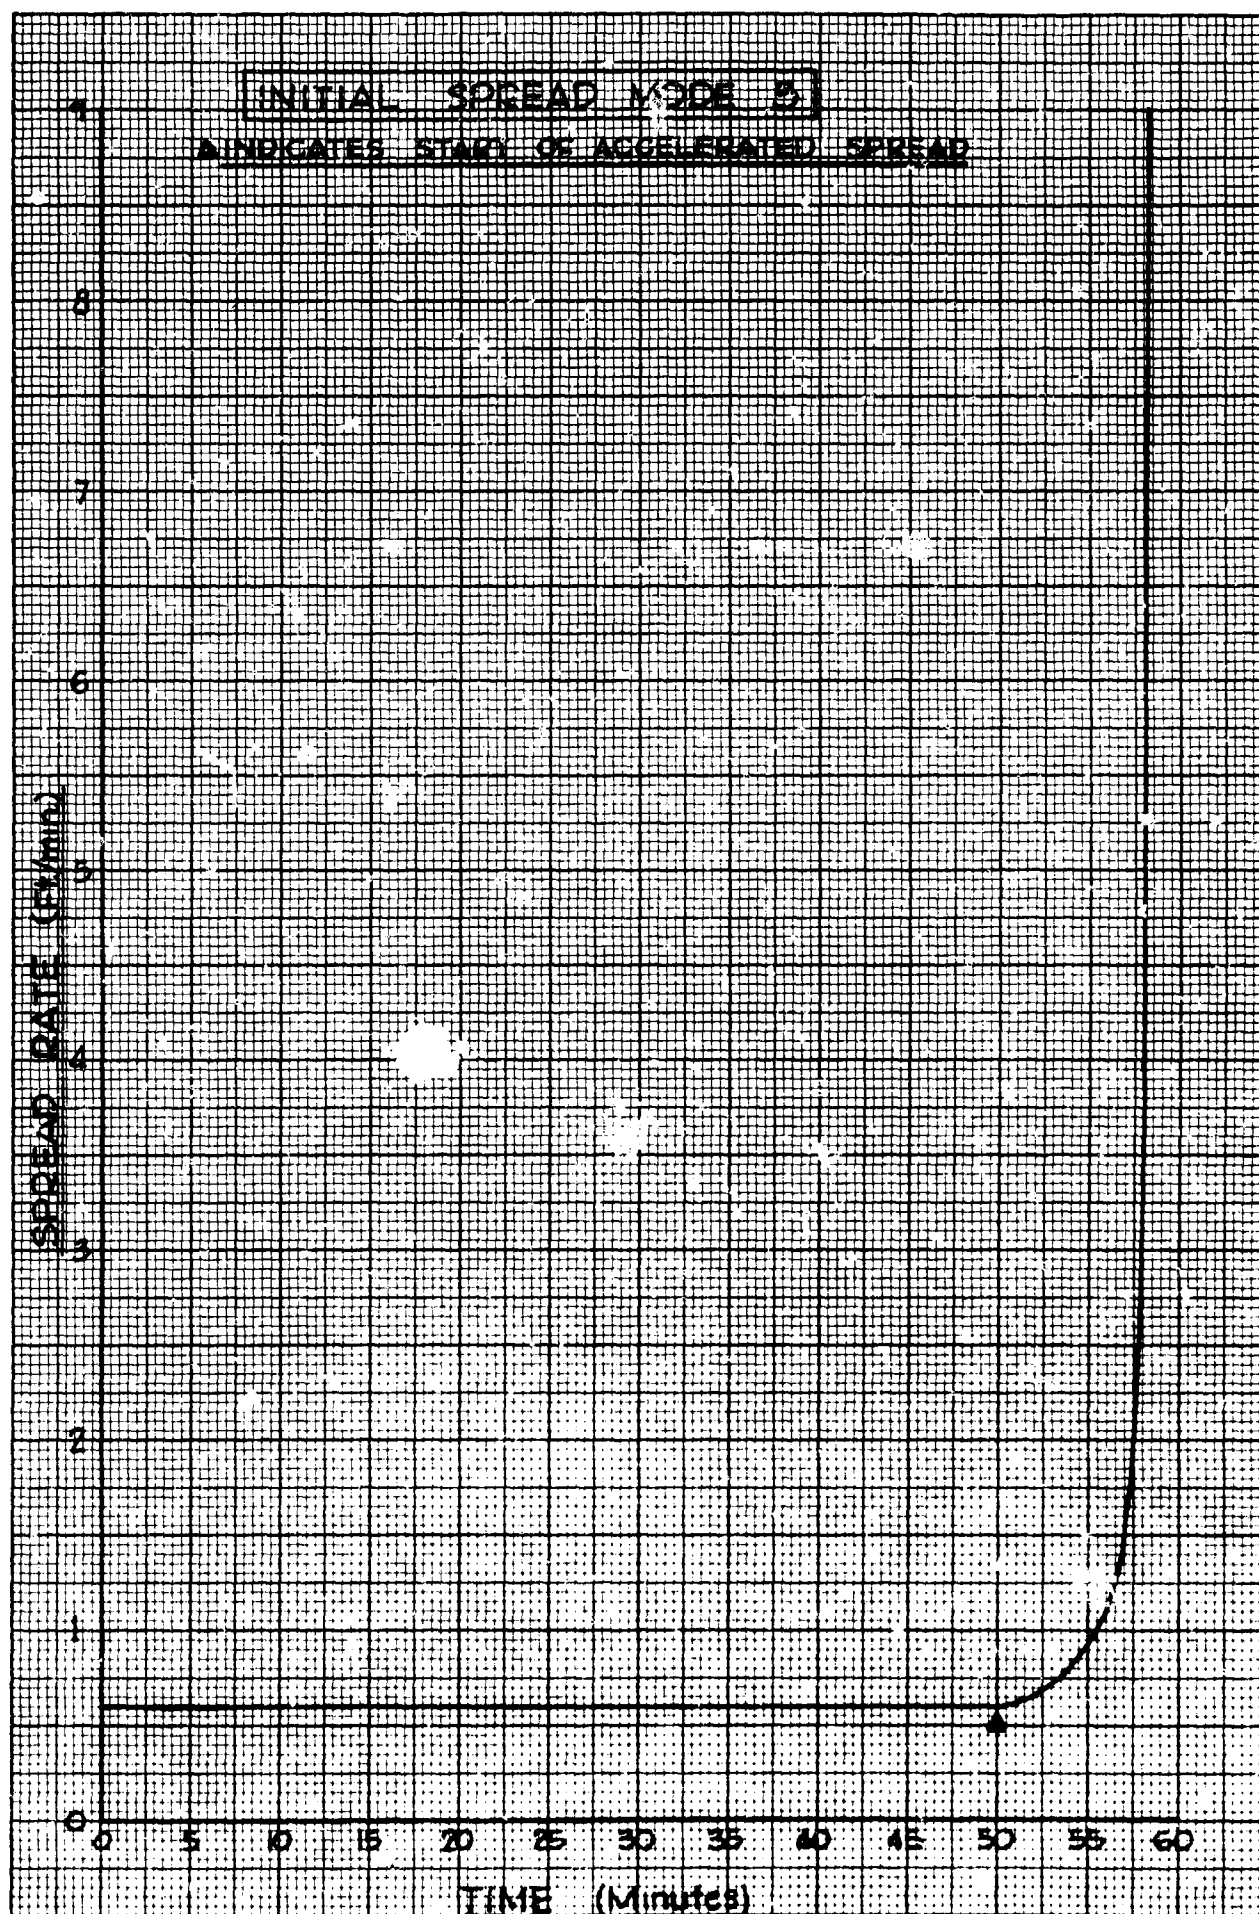


Fig. VIII-5

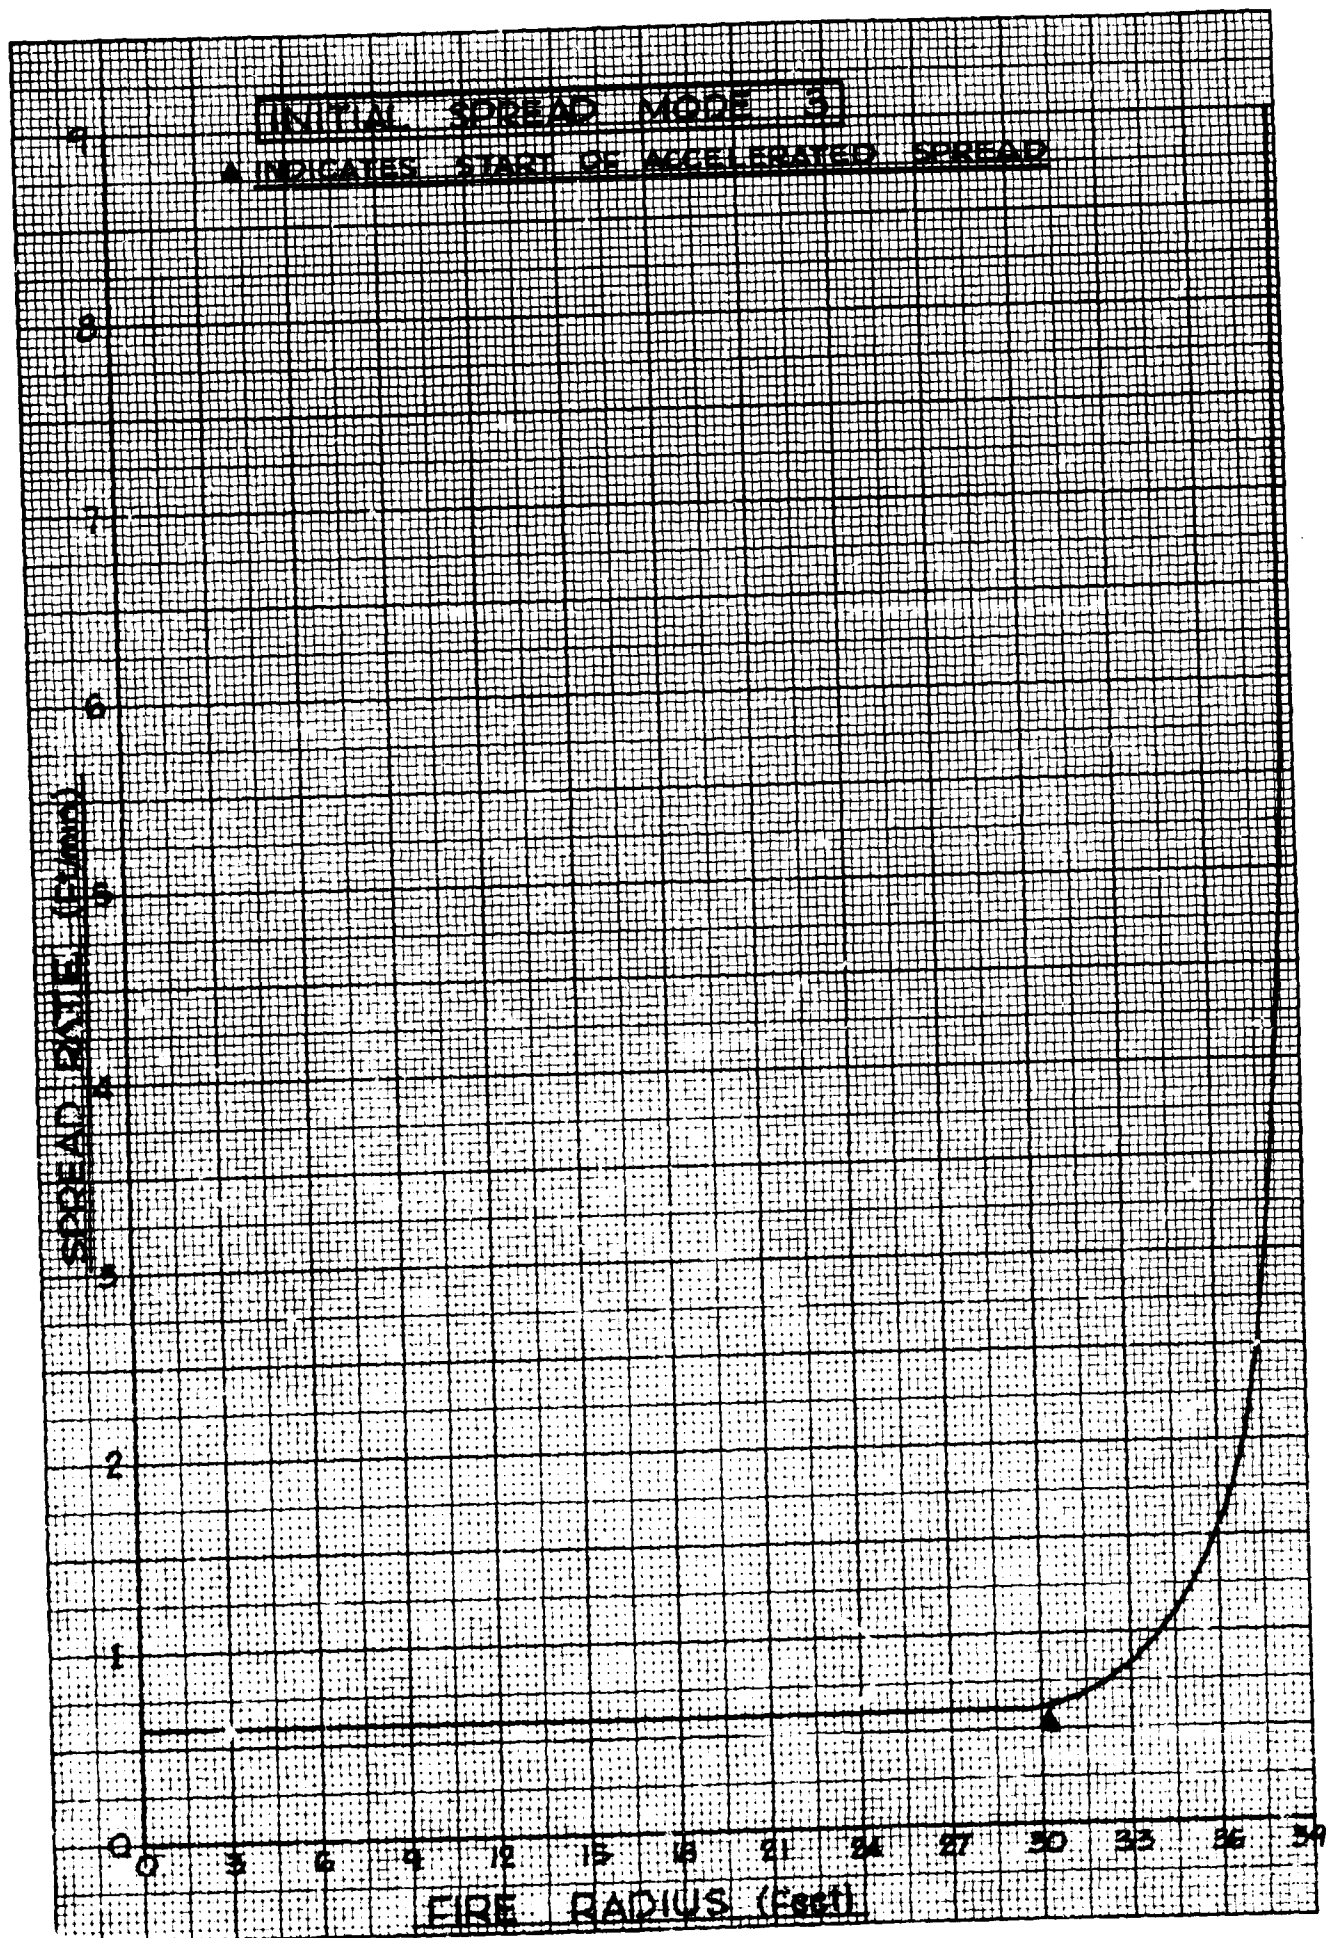


Fig. VIII-6

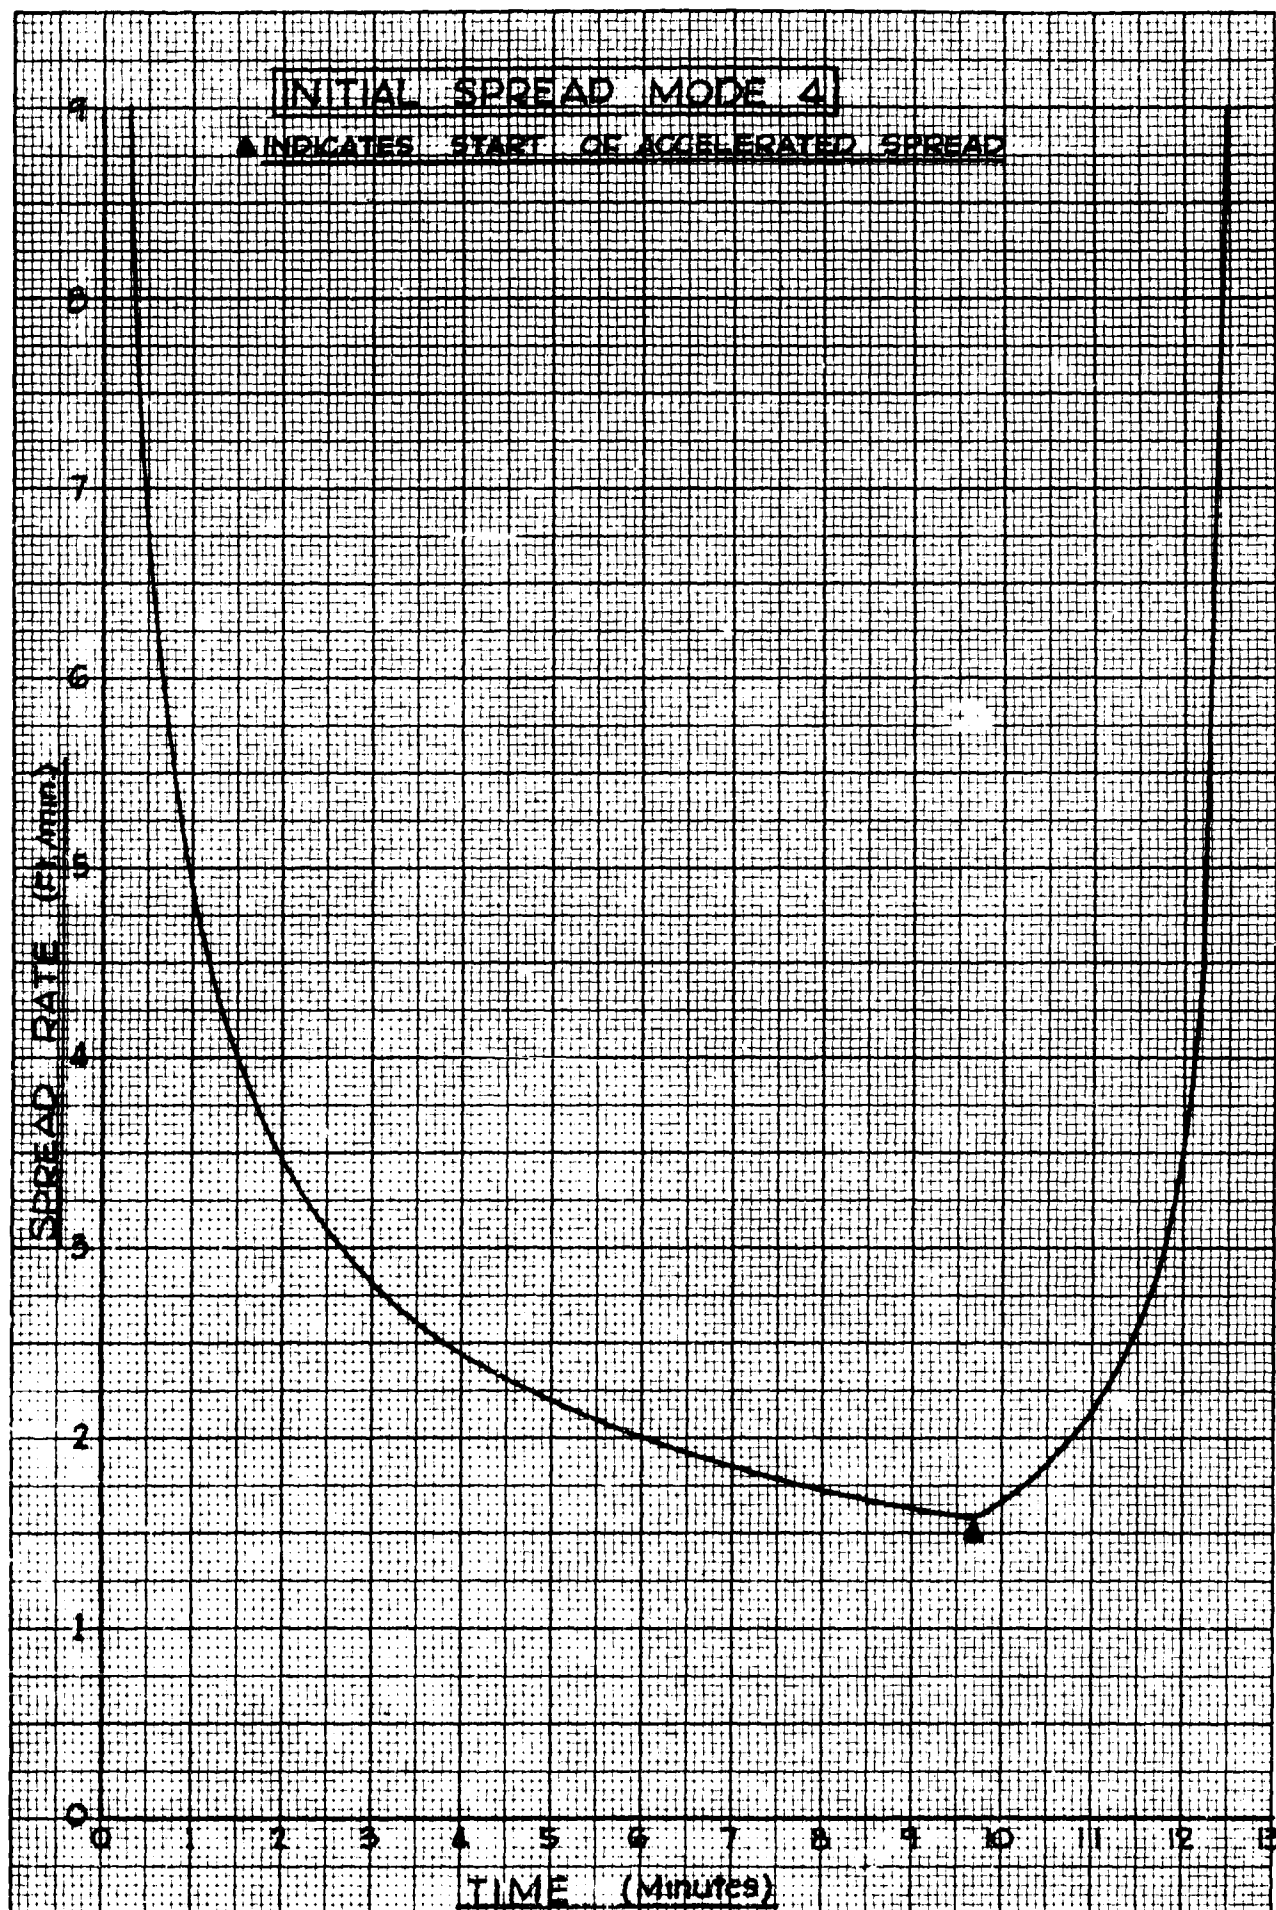


Fig. VII-7

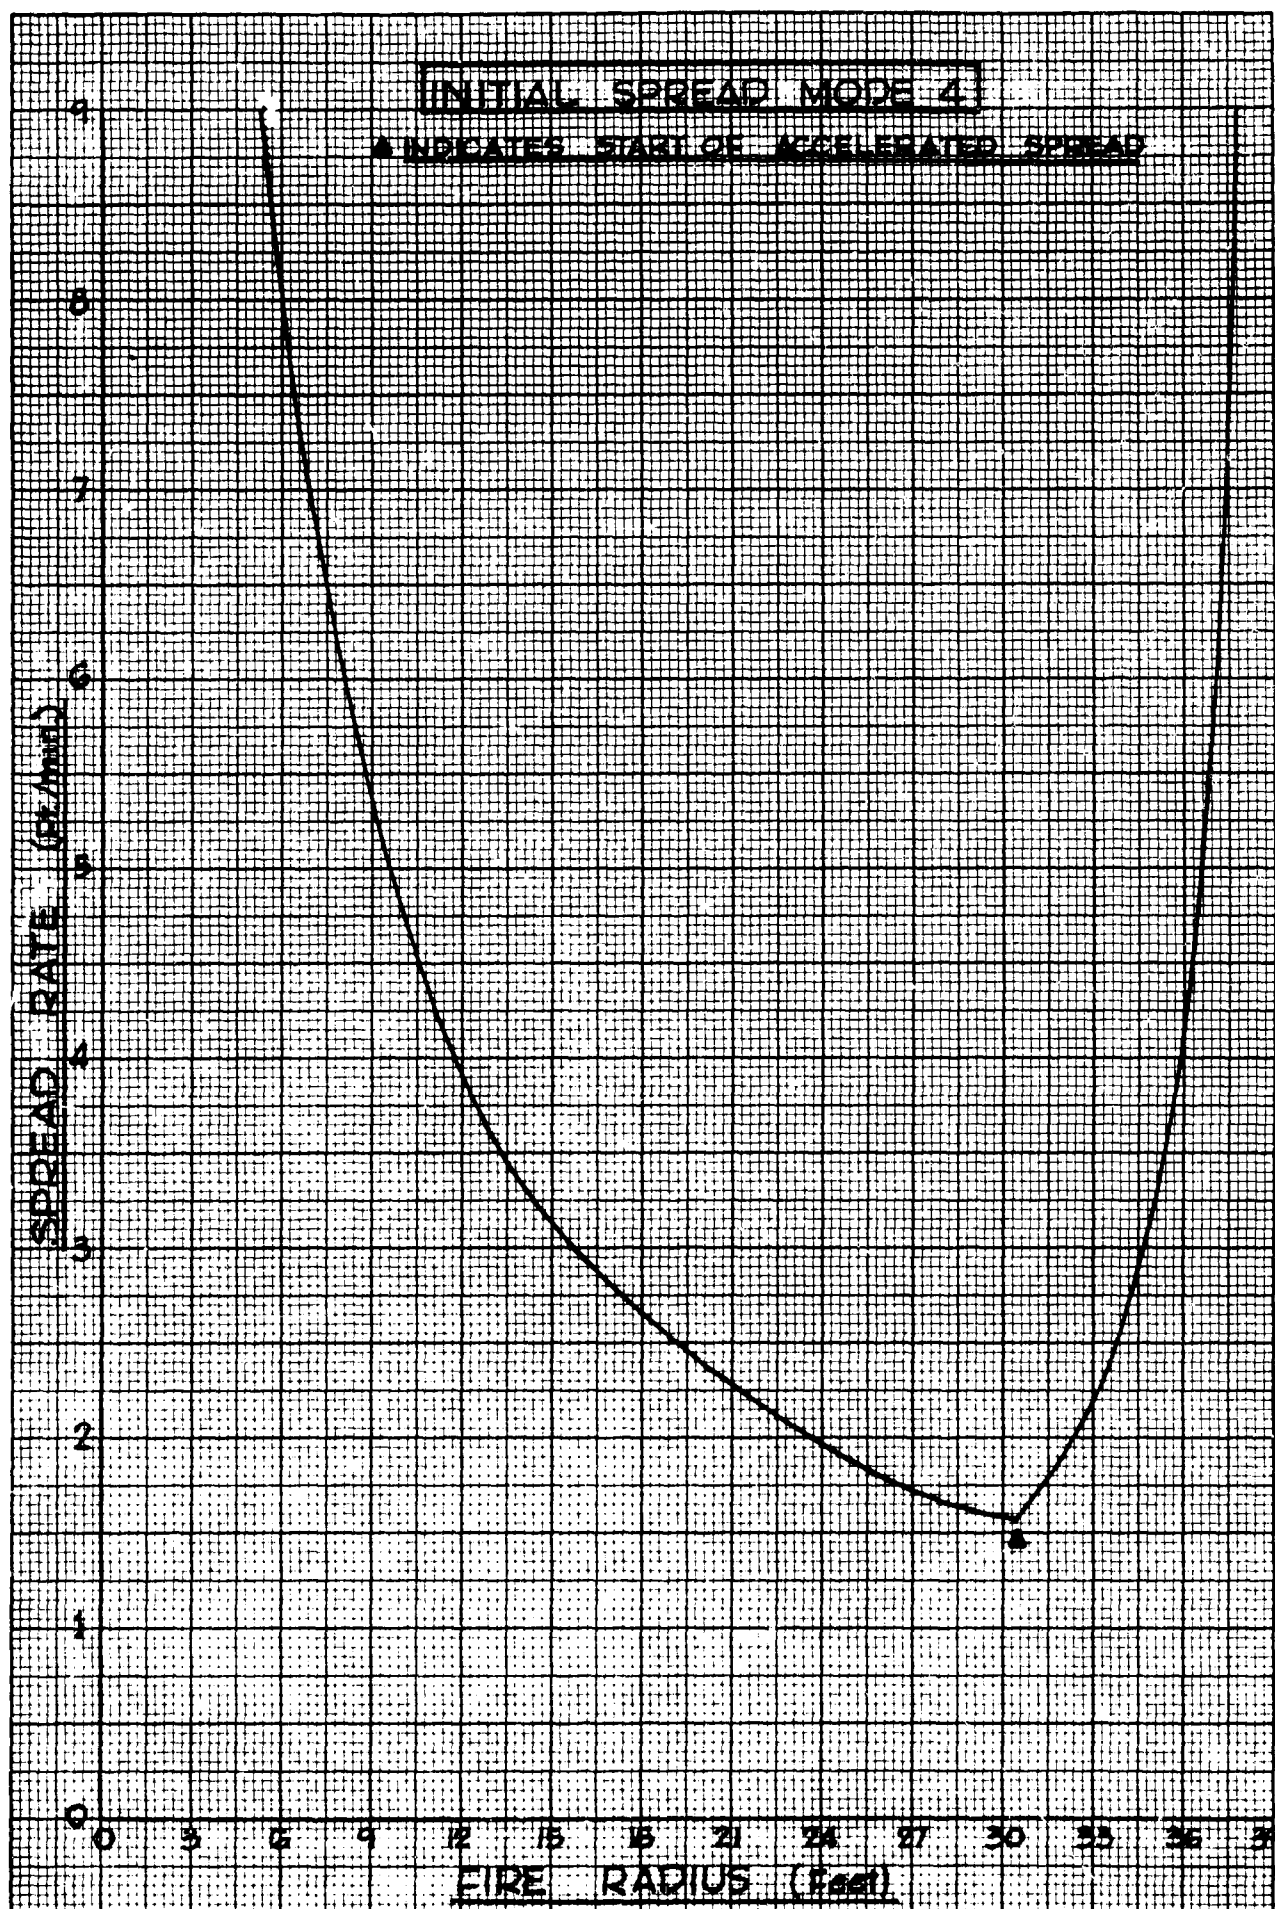


Fig. VIII-8