

UNCLASSIFIED

AD NUMBER

AD819940

LIMITATION CHANGES

TO:

Approved for public release; distribution is unlimited.

FROM:

**Distribution authorized to U.S. Gov't. agencies and their contractors;
Administrative/Operational Use; 08 SEP 1967.
Other requests shall be referred to Air Force Technical Applications Center, Washington, DC.**

AUTHORITY

AFTAC USAF ltr 28 Feb 1972

THIS PAGE IS UNCLASSIFIED

AD819940

AD819940

STABILITY OF FREQUENCY-WAVENUMBER
NOISE SPECTRA AT UBO

8 September 1967

Prepared For

AIR FORCE TECHNICAL APPLICATIONS CENTER
Washington, D. C.

By

R. L. Sax
TELEDYNE, INC.

Under

Project VELA UNIFORM

Sponsored By

ADVANCED RESEARCH PROJECTS AGENCY
Nuclear Test Detection Office
ARPA Order No. 624

**BEST
AVAILABLE COPY**

STABILITY OF FREQUENCY-WAVENUMBER
NOISE SPECTRA AT UBO

SEISMIC DATA LABORATORY REPORT NO. 197

AFTAC Project No.:	VELA T/6702
Project Title:	Seismic Data Laboratory
ARPA Order No.:	624
ARPA Program Code No.:	5810
Name of Contractor:	TELEDYNE, INC.
Contract No.:	F 33657-67-C-1313
Date of Contract:	2 March 1967
Amount of Contract:	\$ 1,736,617
Contract Expiration Date:	1 March 1968
Project Manager:	William C. Dean (703) 836-7644

P. O. Box 334, Alexandria, Virginia

AVAILABILITY

This document is subject to special export controls and each transmittal to foreign governments or foreign national may be made only with prior approval of Chief, AFTAC.

This research was supported by the Advanced Research Projects Agency, Nuclear Test Detection Office, under Project VELA-UNIFORM and accomplished under the technical direction of the Air Force Technical Applications Center under Contract F 33657-67-C-1313.

Neither the Advanced Research Projects Agency nor the Air Force Technical Applications Center will be responsible for information contained herein which may have been supplied by other organizations or contractors, and this document is subject to later revision as may be necessary.

TABLE OF CONTENTS

	Page No.
ABSTRACT	
PROCEDURE	1
TIME VARIATION OF THE SPECTRAL PEAK	1
Mean, Range, and Stability of Peak Power At Each Frequency	1
RESULTS	2
REFERENCES	3

LIST OF ILLUSTRATIONS

TABLE 1

TABLE 2

FIGURES

1. Unfiltered Noise
2. Unfiltered Noise
3. Unfiltered Noise
4. Unfiltered Noise
5. Unfiltered Noise
6. Unfiltered Noise
7. Unfiltered Noise
8. Filtered Noise Band
9. Filtered Noise Band
10. Filtered Noise Band
11. Filtered Noise Band
12. Filtered Noise Band
13. Filtered Noise Band
14. Filtered Noise Band

ABSTRACT

Seven four-minute samples of the ambient noise were subjected to frequency-wavenumber (F-K) spectral analysis in order to observe the range and character of variations in the F-K power spectrum. The observations are derived from the same normal population. The apparent variation in the underlying noise statistics or processes do not suggest gradual diurnal variations in the noise power, but large and apparently random inter-day fluctuations.

PROCEDURE

The SDL wavenumber-frequency analysis program VFKSPTRM due to McCowan and Jih was used to analyze seven four-minute samples of ambient noise recorded at the UB0 vertical array on 14 April 1967, starting at 3/20/00.00, 4/42/00.0, 6/20/00.0, 9/00/00.0, 11/20/00.0, 14/00/00.0, and 15/15/00.0. Spectral peaks were observed at nearly infinite vertical velocity at 0.20 cps, 0.80 cps, 1.50 cps, and 2.00 cps. The variability of power observed at these frequency was subjected to Bartlett's test for homogeneity of variance (Kullback, 1959). For better accuracy the high frequency peaks were observed after bandpass filtering in order to prevent leakage through the spectral window due to the large .20 cps peak.

TIME VARIATION OF THE SPECTRAL PEAK

Table 1 lists relative values of the spectral power observed at different times during the day at the specified frequency of F-K peaks observed in the noise. The vertical wave number of the peaks is nearly zero in all cases.

The .2 cps noise power was taken from the F-K spectral plots on Figures 1 to 7 with all observations normalized to the mean at .2 cps. The strip at the bottom of the Figures show the array response. The other observations were taken from the power spectral plots of band passed (.3 to 3 cps) data on Figures 8 to 14.

MEAN, RANGE, AND STABILITY OF PEAK POWER AT EACH FREQUENCY

The arithmetic mean value observed for the spectral peaks in the noise is taken from Table 1, as is the range between the lowest and highest observation in the time interval between 3/20/00.0 and 15/19/00.0. The parameter t is measured for testing the hypothesis that the observed variability of variances is due to sampling and that the underlying

variance of the noise field is time invariant

$$T = 2(BT) (B'X) \sum_{i=1}^7 \log S^2/S_i^2 \quad S^2 = \frac{1}{7} \sum_{i=1}^7 S_i^2$$

where B is bandwidth of frequency analysis

T is time-length of sample

X is length of the vertical array

B' is bandwidth of wave number analysis.

There is no spatial smoothing in the program, so $B'X \approx 1$. This can be verified from the array response (using 3 km. for the length of the array). The smoothing of power in time results in $B \approx .05$ cps and the time-length of the sample is 204 sec. The results of the t test are shown on Table 2. For acceptance of the hypothesis of homogeneity of variance t should be less than 12.63 in Fisher's B^2 distribution.

RESULTS

The probability of error in rejecting the hypothesis that the .2 cps noise is stationary is considerably greater than 0.05, and therefore we should not reject, but the power for acceptance of stationarity is probably low for this test. The result for the 0.8 cps peak is also marginal. We reject stationarity recognizing that the probability of error is close to 0.05 if the statistics and processes underlying the .8 cps peak are indeed stationary. In the case of the high-frequency peak at 1.5 cps and 2.0 cps respectively we can decisively reject the hypothesis that the random variates underlying the observed sample variances are from the same normal population. The high-frequency noise above 1 cps appears to be very non-stationary when viewed over a 12 hour time span. There is no obvious diurnal trend in the observed spectral power of the high-frequency

peaks.

The character of the noise as seen on Figures 1 through 4 shows a high degree of symmetry, indicating that energy conversions resulting in more up-going or down-going energy are not "observed" to play an important role in the ambient noise. There is no obvious indication of reflected P-pulses although such noise may be obscured by the array response.

REFERENCES

Kullback, S., Information Theory and Statistics, Wiley, 1959, p. 319.

TABLE 1

Time Frequency	3/20/ 00.0Z	4/42/ 00.0Z	6/20/ 00.0Z	9/00/ 00.0Z	11/20/ 00.0Z	14/00/ 00.0Z	15/15/ 00.0Z	Mean
.2 cps	1.35	1.02	1.14	0.79	1.05	0.64	1.02	1.00
.8 cps	0.04	0.10	0.06	0.03	0.05	0.03	0.06	0.06
1.5 cps	0.006	0.010	0.037	0.001	0.007	0.002	0.035	0.014
2.0 cps	0.011	0.003	0.002	0.005	0.010	0.034	0.002	0.017

TABLE 2

Frequency	Mean Power	Range of Power	t	Hypothesis of Homogeneity
.2 cps	1.00	0.64-1.35	9.7	Accepted
.8 cps	0.06	0.03-0.10	12.9	?
1.5 cps	0.014	0.001-0.037	91	Rejected
2.0 cps	0.017	0.002-0.055	98	Rejected

VFKSPTRM AMBIENT NOISE, UBO, STARTING AT 3/20/0 Z

OBSERVATION NO. = 110/0 NO. OF CHANNEL = 0
 SAMPLING RATE = 0R.00 STARTING POINT = 1 TOTAL POINTS = 4000
 THE NUMBER OF ENGINEING TIME = 5

CHANNEL ID	SCALE FACTOR	DEPTH	U M	SYMBOL
DM1	1.00	0.710	0 - J	0
DM3	1.00	0.110	6 - V	0
DM4	1.00	1.000	12 - 19	0
DM5	1.00	1.400	10 - U1	0
DM6	1.00	1.110	04 - 07	0

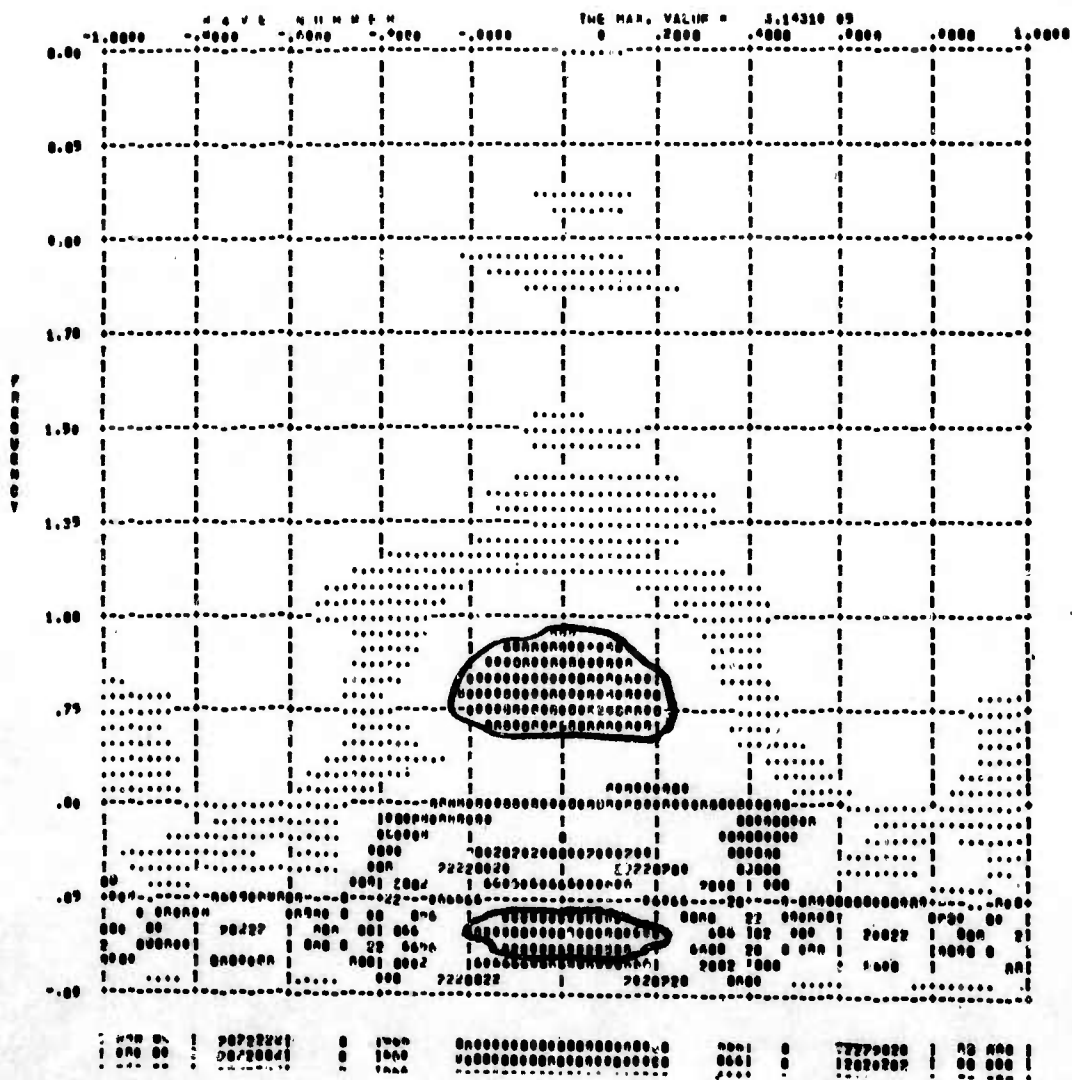


Figure 1. Unfiltered Noise

VKSPTN AMBIENT NOISE, URO, STARTING AT 4/42/00.0 Z

SEISMOGRAPH NO. = 11658

NO. OF CHANNEL = 5

SAMPLING RATE = 20.00

STARTING POINT = 1

TOTAL POINTS = 4000

THE GRAPH UP DOWNTIME TIME = 5

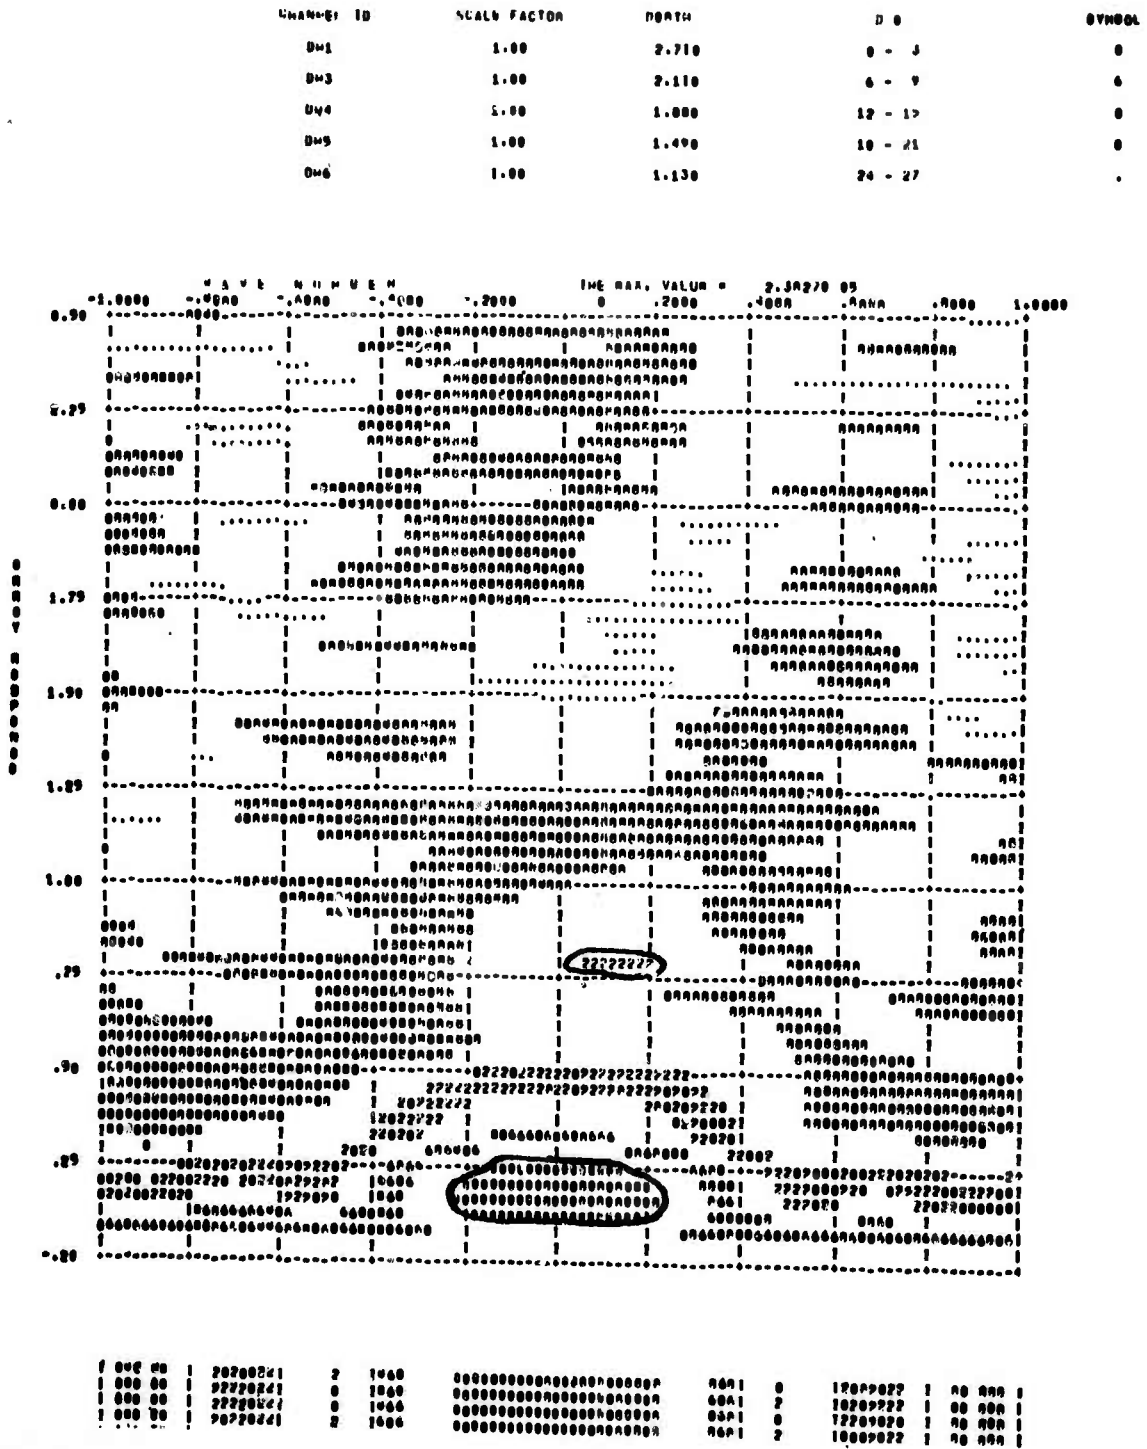


Figure 2. Unfiltered Noise

0813N00RAN NO. N 11601 WD. OF CHANNEL = 9
SIGNALING HAZ = 20.00 STARTING POINT = 1 TOTAL POINTS = 4896
THE NUMBER OF SWOONING TIT = 5

WAVELENGTH	SCALE FACTOR	DEPTH	U N	SYMBOL
DW1	1.00	2.710	0 - 3	0
DW3	1.00	2.110	0 - 9	0
DW4	1.00	1.000	12 - 15	2
DW5	1.00	1.490	10 - 21	0
DW6	1.00	1.130	24 - 27	-

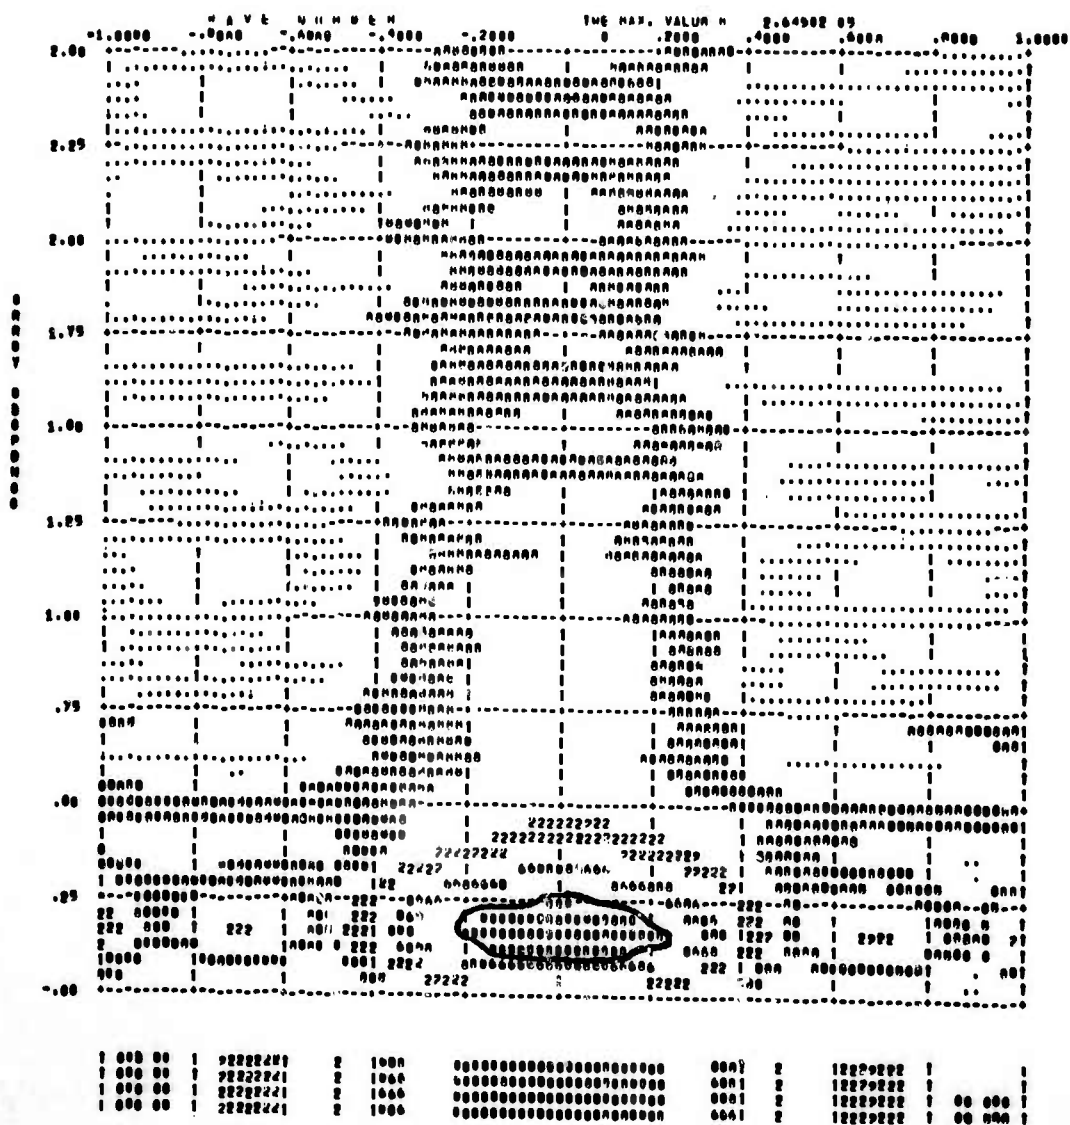


Figure 3. Unfiltered Noise

0613000040M NO. = 11002 NO. OF CHANNELS = 3
CHANNELING RATE = 80.00 BLANKING POINT = 1 IPAL POINTS = 4996
THE NUMBER OF O-RINGS IN IT = 3

CHANNEL ID	SCALE FACTOR	DEPTH	SYMBOL
DW1	1.00	2.710	4 - 8
DW3	1.00	2.110	8 - 1
DW4	1.00	1.000	8 - 0
DW5	1.00	1.490	16 - 15
DW6	1.00	1.130	16 - 21
			24 - 27

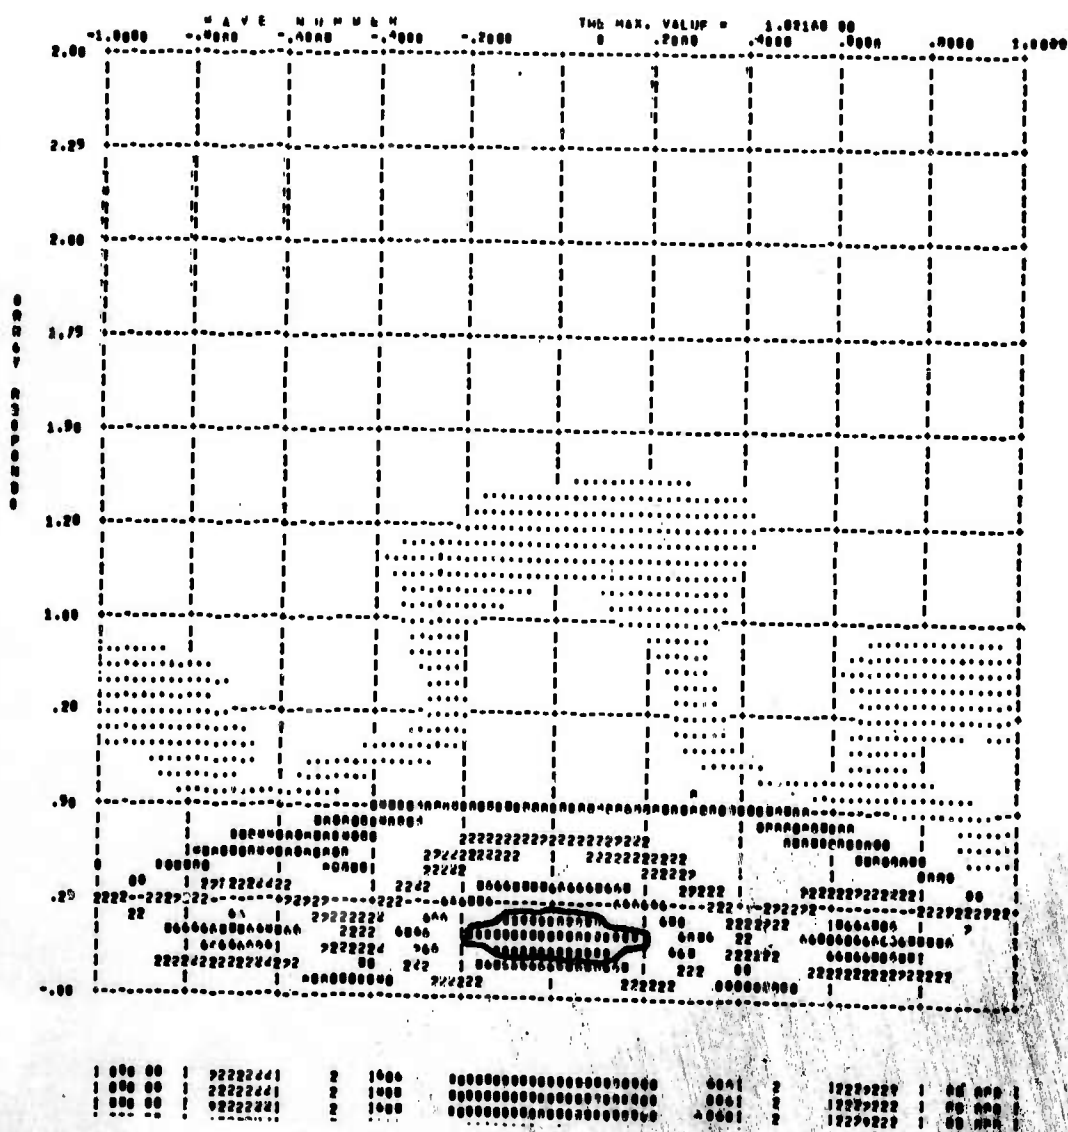


Figure 4. Unfiltered Noise

OFFSHORE NO. = 11003 NO. OF CHANNEL = 3
SAMPLING RATE = 20.00 STARTING POINT = 1 FINAL POINTS = 4000
THE NUMBER OF SWEEPING TIME = 5

CHANNEL ID	SCALE FACTOR	DEPTH	U R	SYMBO
0w1	1.00	2.710	0 - 3	0
0w3	1.00	2.110	4 - 6	0
0w4	1.00	1.690	12 - 15	2
0w5	1.00	1.490	16 - 21	0
0w8	1.00	1.130	24 - 27	

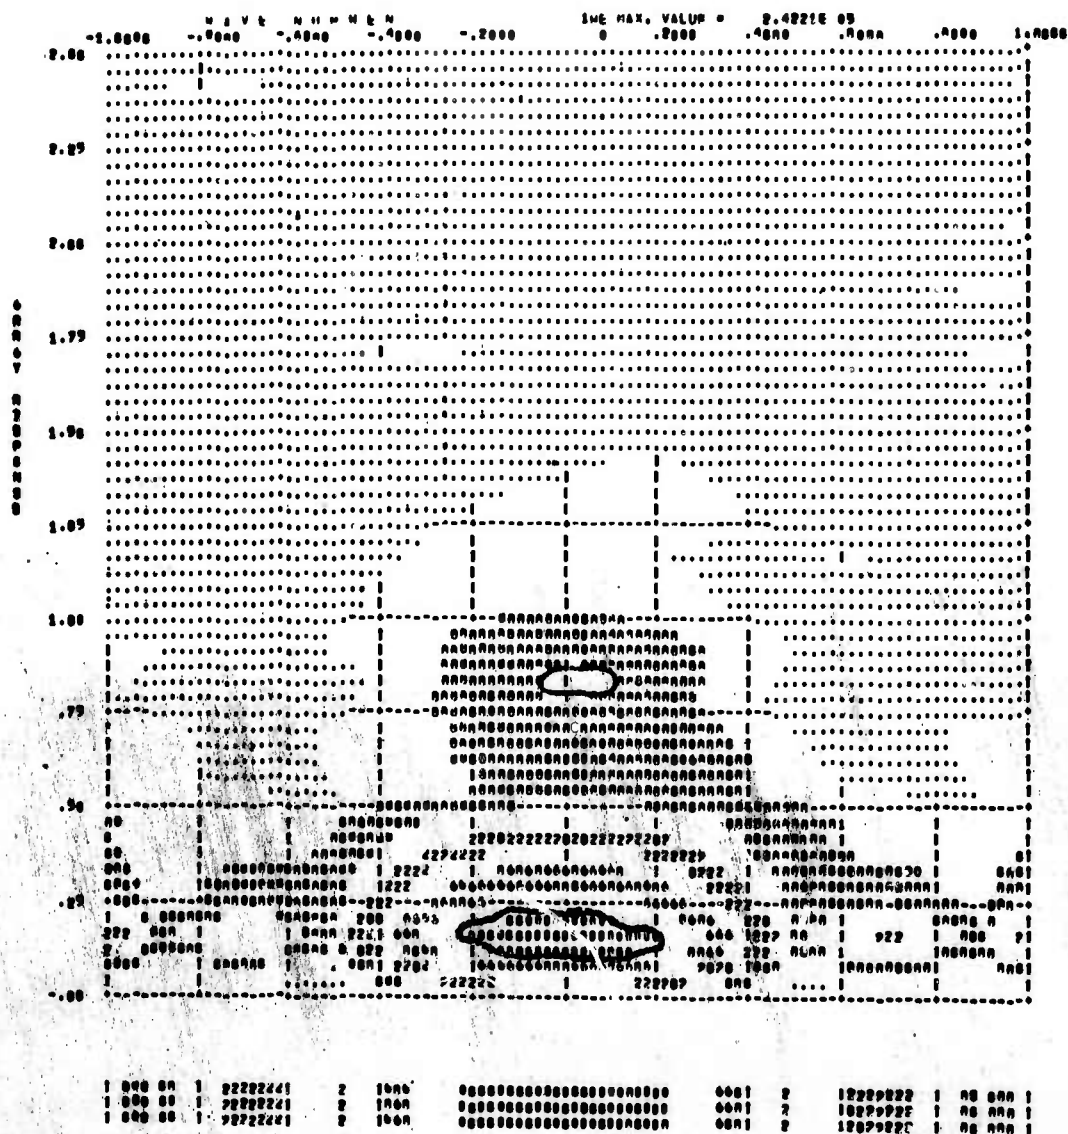


Figure 5. Unfiltered Noise

VFKSPTRM AMBIENT NOISE. UBO, STARTING AT 14/00/00.0 Z

0010000000 NO. = 11404 NO. OF CHANNEL = 0
 0000000000 SAMPLING RATE = 20.00 STARTING POINT = 1 TOTAL POINTS = 4000
 THE MINIMUM OF SHORTENING TIME = 5

CHANNEL ID	SCALE FACTOR	DEPTH		SYMBOL
DM1	1.00	2.710	0 0	2
DM3	1.00	2.110	0 - 3	0
DM4	1.00	1.000	0 - 9	2
DM5	1.00	1.490	12 - 15	0
DM6	1.00	1.130	16 - 21	0
			24 - 27	


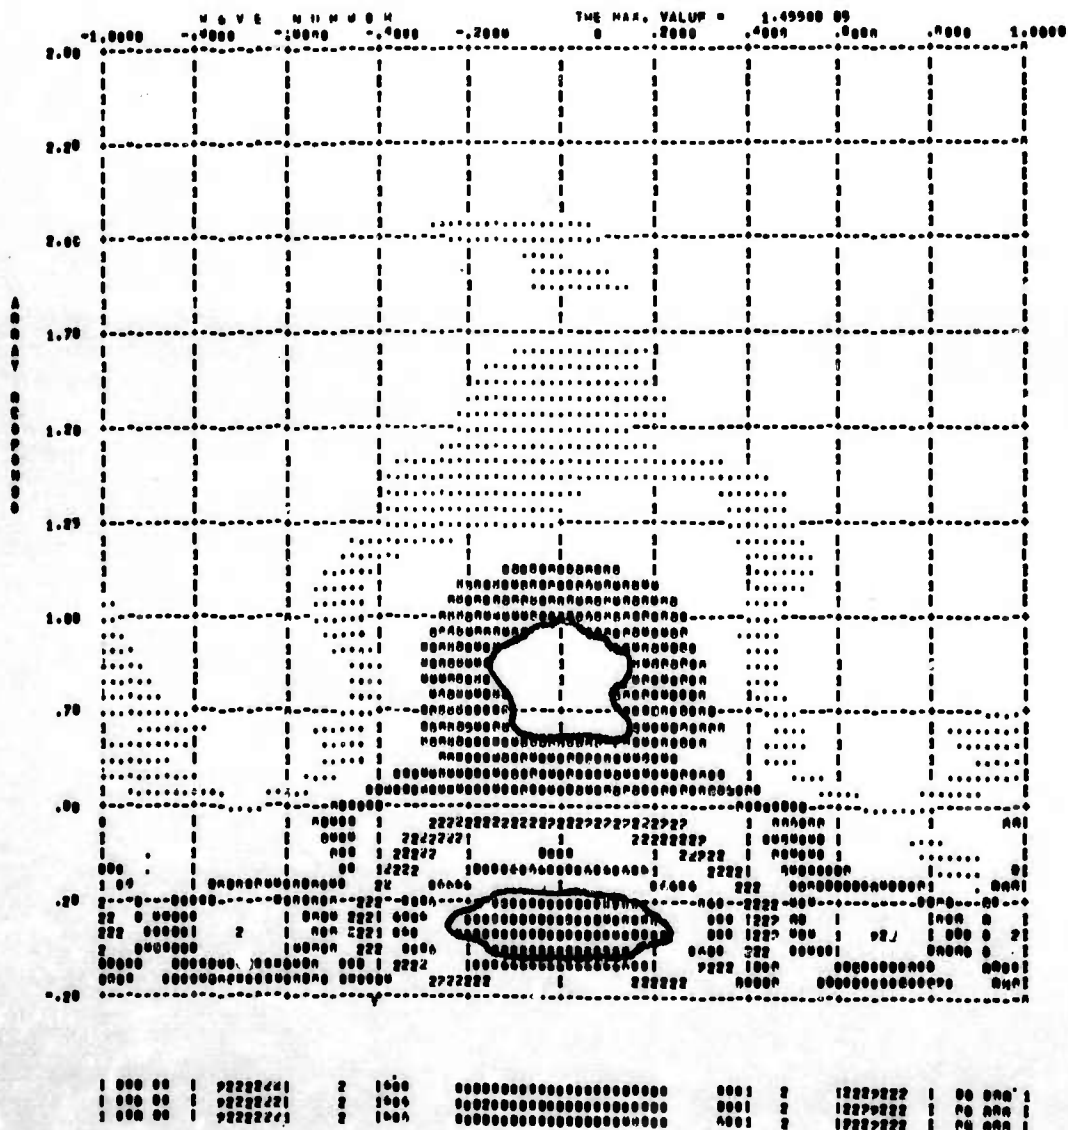


Figure 6. Unfiltered Noise

VFKSPTRM AMBIENT NOISE, UBO, STARTING AT 15/15/00.0 Z

OBSERVATION NO. = 11600 NO. OF CHANNEL = 5
 SAMPLING RATE = 20.00 STIMULUS POINT = 1 TOTAL POINTS = 4096
 THE MINIMUM OF SMOOTHING TIME = 5

CHANNEL ID	SCALE FACTOR	DEPTH		SYMBOL
DM1	1.00	9.710	0 0	
DM2	1.00	2.110	0 - 3	0
DM4	1.00	1.000	0 - 9	0
DM8	1.00	1.490	12 - 19	?
DM8	1.00	1.130	10 - 01	0
			24 - 27	

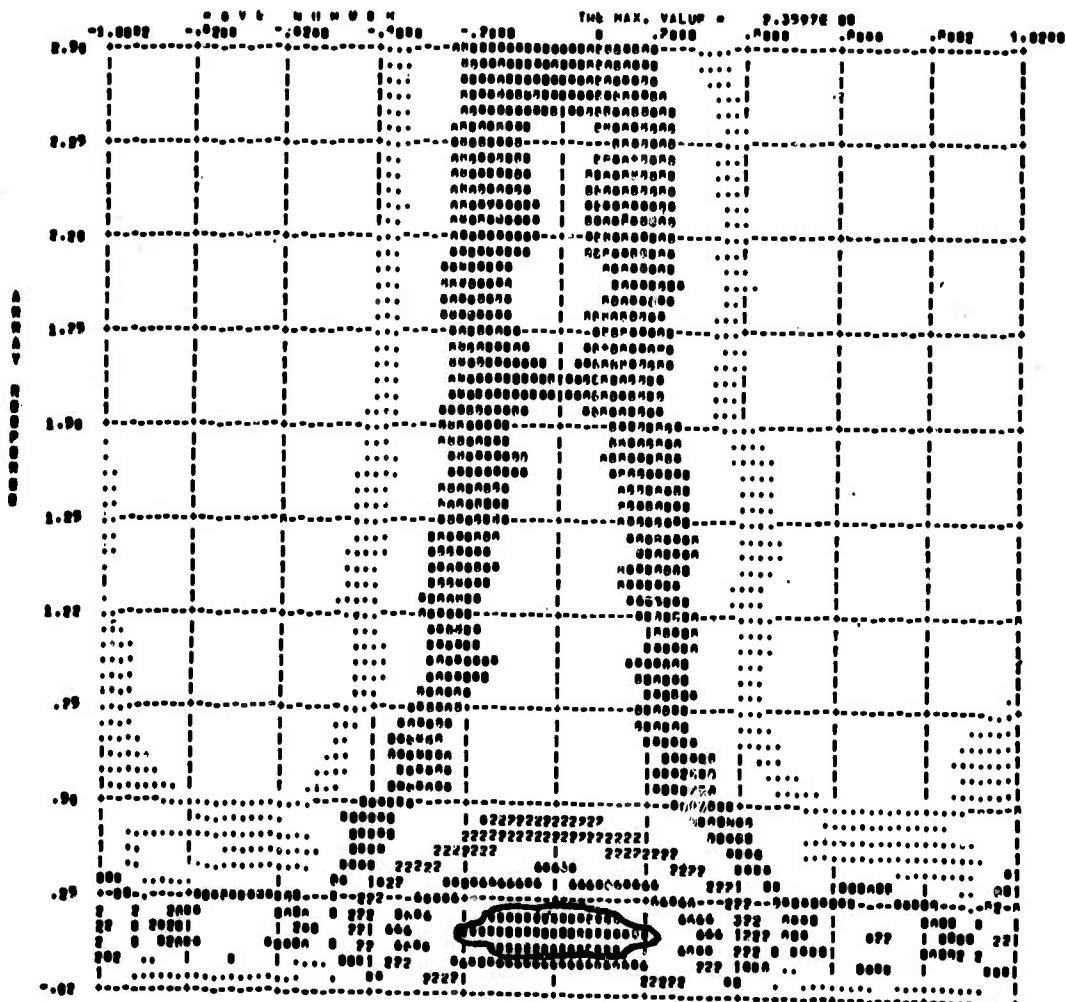


1 000 20 | 00000000 | 2 1000 000000000000000000000000 0001 2 10000000 00 000 1
 1 000 00 | 00000000 | 2 1000 000000000000000000000000 0001 2 10000000 00 000 1
 1 000 00 | 00000000 | 2 1000 000000000000000000000000 0001 2 10000000 00 000 1
 1 000 20 | 00000000 | 2 1000 000000000000000000000000 0001 2 10000000 00 000 1

Figure 7. Unfiltered Noise

WKSPTM AMBIENT NOISE, UBO, STARTING AT 3/20/00.0 Z

OBSERVATION NO. = 11074
 NO. OF CHANNEL = 5
 SAMPLING RATE = 24.00 HERTZ POINT = 1 TOTAL POINTS = 4000
 TIME DURATION OF SAMPLING TIME = 5

WAVELET ID	SCALE FACTOR	DEPTH	U B	SYMBOL
UW1	1.00	2.710	0 - J	0
UW3	1.00	2.110	6 - V	0
UW4	1.00	1.000	12 - 19	2
UW5	1.00	1.000	16 - 21	0
UW6	1.00	1.130	24 - 27	

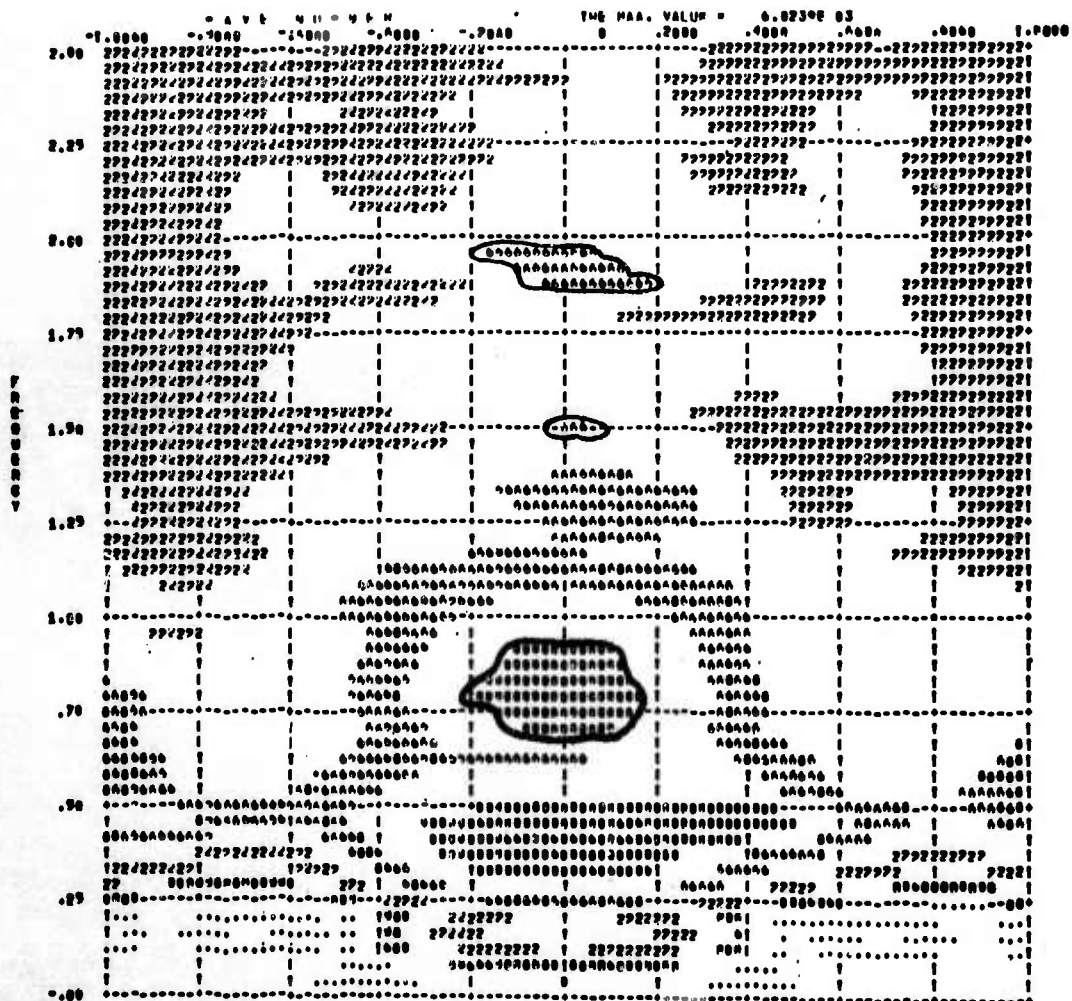

1 000 00	1 7222222	2 1000	00000000000000000000	0001	2	12222222	1 00 000
1 000 00	1 7222222	2 1000	00000000000000000000	0001	2	12222222	1 00 000
1 000 00	1 7222222	2 1000	00000000000000000000	0001	2	12222222	1 00 000
1 000 00	1 7222222	2 1000	00000000000000000000	0001	2	12222222	1 00 000

Figure 8. Filtered Noise Band: (.3<f<3cps)
 Rolloff: .1cps

36 JANUARY NR. 1 1970
 SAMUEL L. KATZ • PAUL J. STANLEY • JOHN J. TOTAL PRINTER • 1970
 THE UNIVERSITY OF MICHIGAN LIBRARY

CONCENTR	TH	SCALE FACTOR	DEPTH	U B	STRESS
UM1		1.00	2.710	0 - 3	0
UM3		1.00	4.110	0 - 4	0
UM4		1.00	1.000	12 - 15	2
UM5		1.00	1.400	10 - 21	0
				24 - 27	0

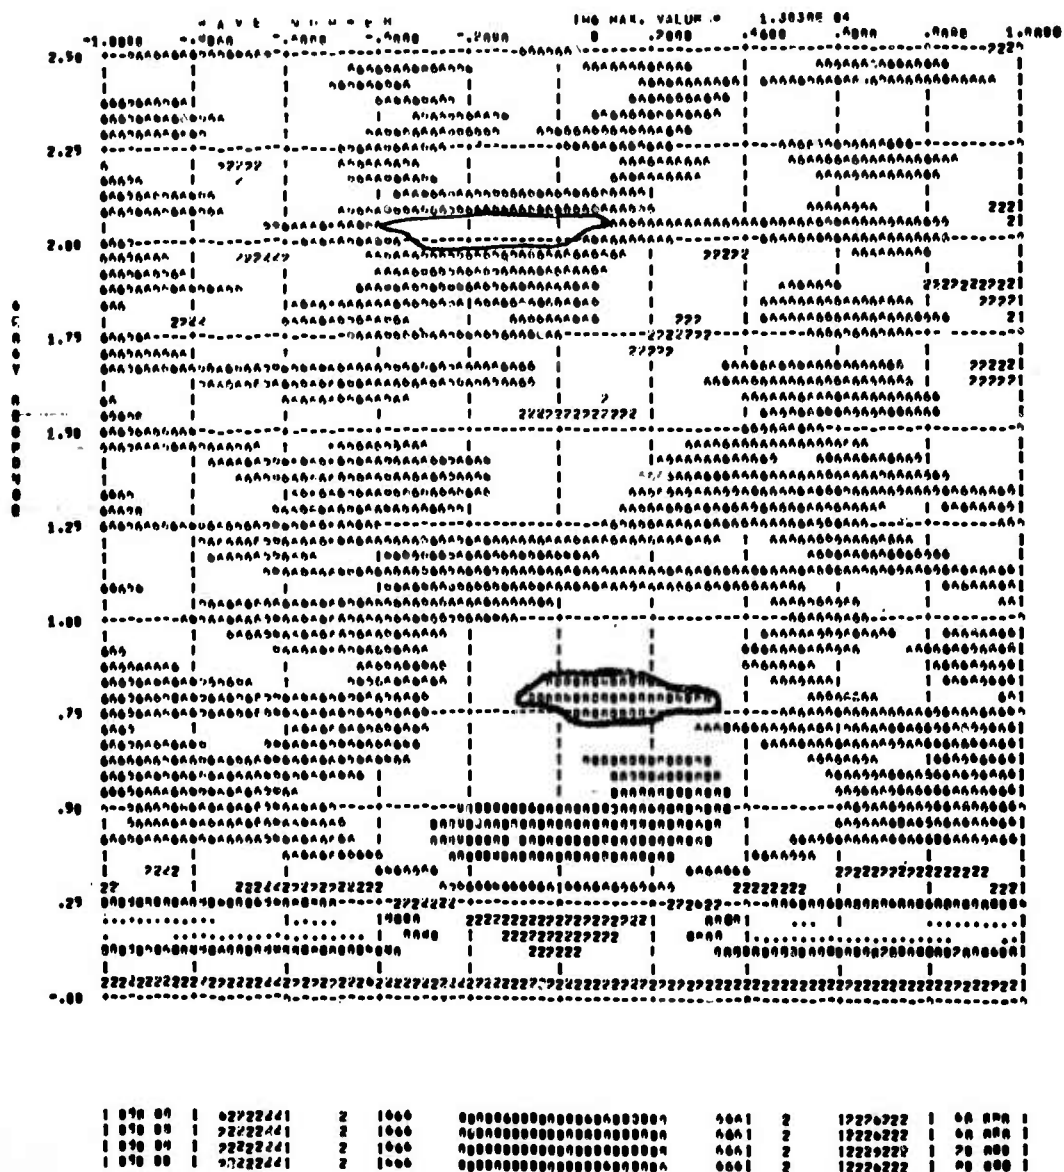


Figure 9. Filtered Noise Band: $(.3 < f < 3 \text{ cps})$
Rolloff: $.1 \text{ cps}$

S. JOURNAL NO. 0 1187 no. of PAGES A 5
SAMP IN, KAP A YNUO STATION POINT O I TOTAL PRINTS C 699A
THE NUMBER OF SUGGESTION, LINE A 5

Customer ID	State / Location	Item	Price	Quantity
U001	USA	2.778	8 = 3	8
U003	USA	2.110	6 = 6	6
U004	USA	1.888	12 = 15	7
U005	USA	1.899	10 = 21	8
U006	USA	1.138	24 = 27	9


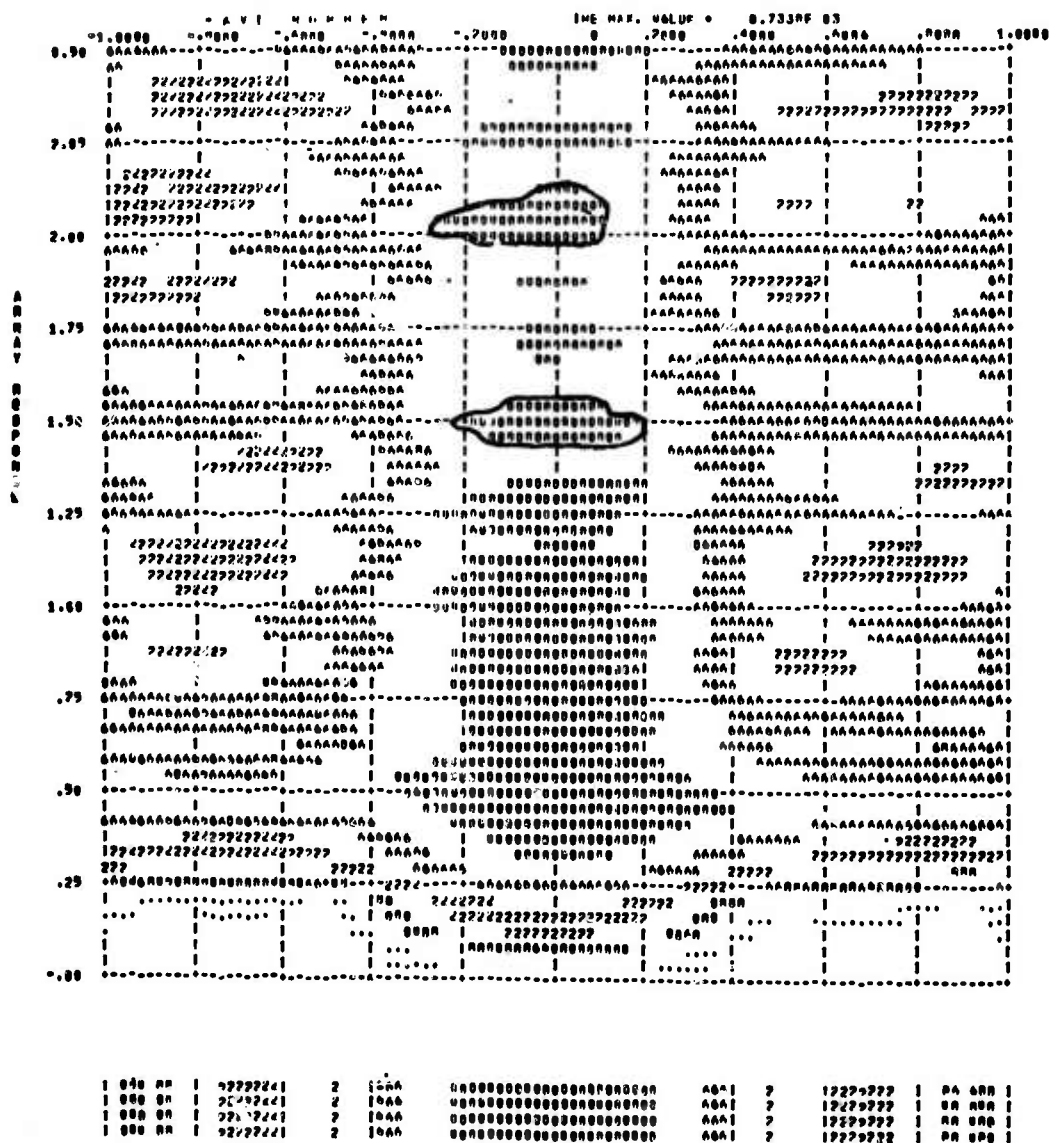


Figure 10. Filtered Noise Band: $(.3 < f < 3 \text{ cps})$
Rolloff: $.1 \text{ cps}$

VFKSPTRN AMBIENT NOISE. UBO. STARTING AT 9/00/00.0 Z

REFLECTION CO. = 11000 NO. OF CHANNEL = 6
 SAMPLING RATE = 20.00 GATING POINT = 1 TOTAL PRIORS = 4000
 THE NUMBER OF SPECTRUM LINES = 5

CHANNEL ID	SCALE FACTOR	DEPTH	U Q	SYMBOL
UW1	1.00	2.710	0 - J	0
UW3	1.00	2.110	0 - V	0
UW4	1.00	1.000	12 - 15	0
UW5	1.00	1.400	10 - 21	0
UW6	1.00	1.130	20 - 27	0

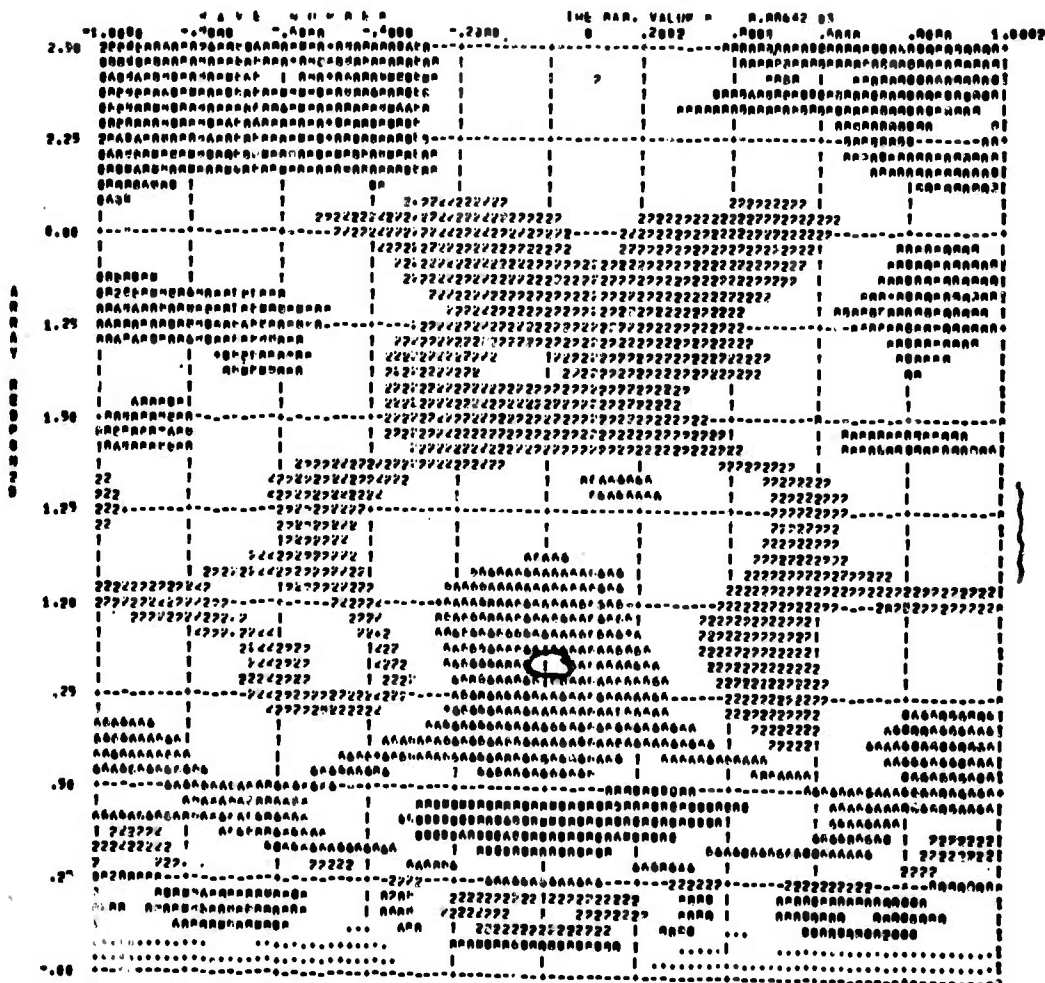


1 000 000 22222222 2 1000 000000000000000000000000 000 2 12222222 1 00 000 1
 1 000 000 22222222 2 1000 000000000000000000000000 000 2 12222222 1 00 000 1
 1 000 000 22222222 2 1000 000000000000000000000000 000 2 12222222 1 00 000 1
 1 000 000 22222222 2 1000 000000000000000000000000 000 2 12222222 1 00 000 1

Figure 11. Filtered Noise Band: (.3<f<3cps)
 Rolloff: .1cps

WKSPTRM AMBIENT NOISE, UBO, STARTING AT 11/20/00.0 Z

OFFSHORE MAP MAP = 11A03 NO. OF CHANNEL = 5
 SAMPLING RATE = 20.00 STARTING POINT = 1 TOTAL POINTS = 4000
 TIME MINIMUM OF SOUNDING TIME = 7

CHANNEL ID	SCALE FACTOR	DEPTH	U B	SYMBOL
UW1	1.00	2.710	U - J	0
UW2	1.00	2.710	U - V	0
UW3	1.00	1.000	12 - 15	2
UW4	1.00	1.400	10 - 21	0
UW5	1.00	1.130	24 - 27	.

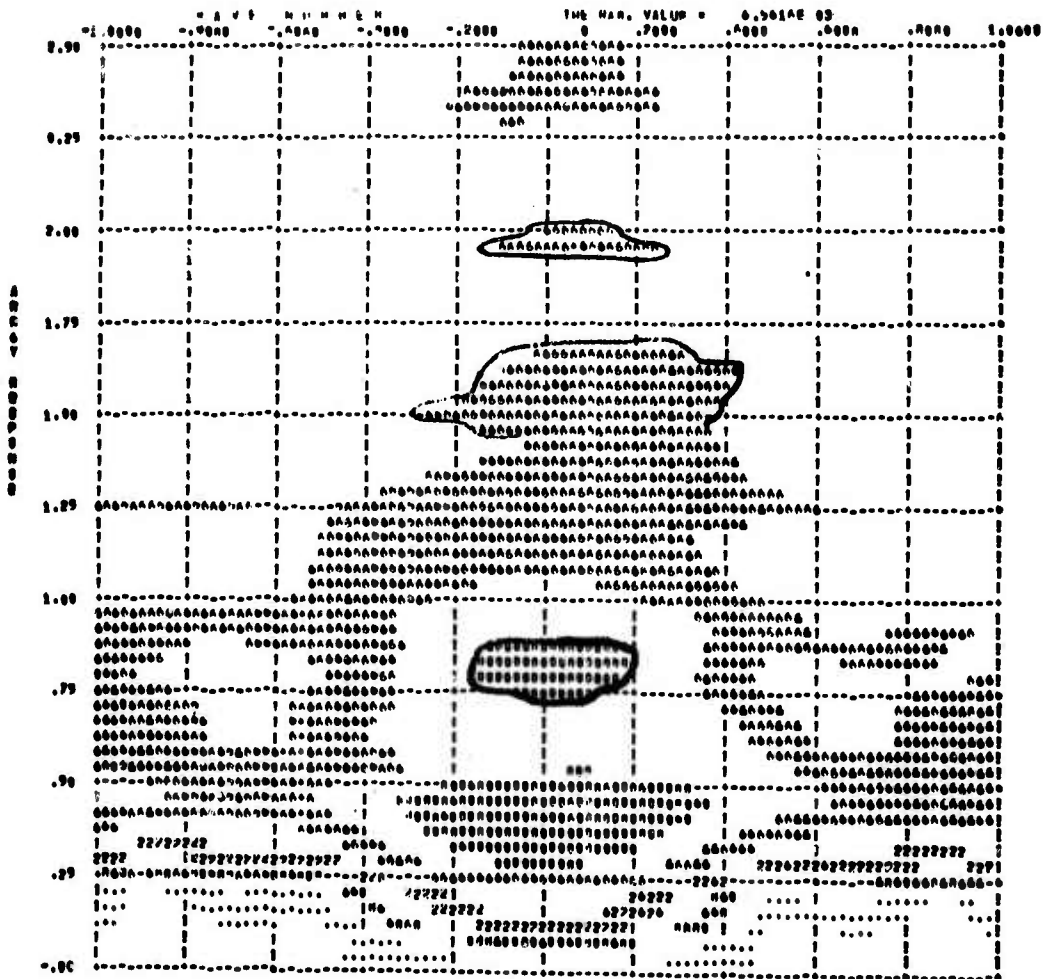

1 200 0A 1 0222222 2 1000 0000000000000000000000 0001 2 1222222 1 00 000 1
 1 000 00 1 0222222 2 1000 0000000000000000000000 0001 2 1222222 1 00 000 1
 1 000 00 1 0222222 2 1000 0000000000000000000000 0001 2 1222222 1 00 000 1
 1 000 00 1 0222222 2 1000 0000000000000000000000 0001 2 1222222 1 00 000 1

Figure 12. Filtered Noise Band: (.3<f<3cps)
 Rolloff: .1cps

VEKSPIN AMBIENT NOISE, URM, STARTING AT 14/00/00.0 Z

SELECTION: 00, 0 11000 NO. OF CHANNELS: 5
 SAMPLE RATE: 20.00 SIGNALING POINT: 1 TOTAL POINTS: 4000
 THE NUMBER OF SIGNALING TIME: 5

Channel ID	State Section	Depth	Time	Symbol
001	1.00	2.710	0 - 3	0
003	1.00	2.110	4 - 5	0
004	1.00	1.800	12 - 13	0
005	1.00	1.600	16 - 21	0
006	1.00	1.110	24 - 27	0

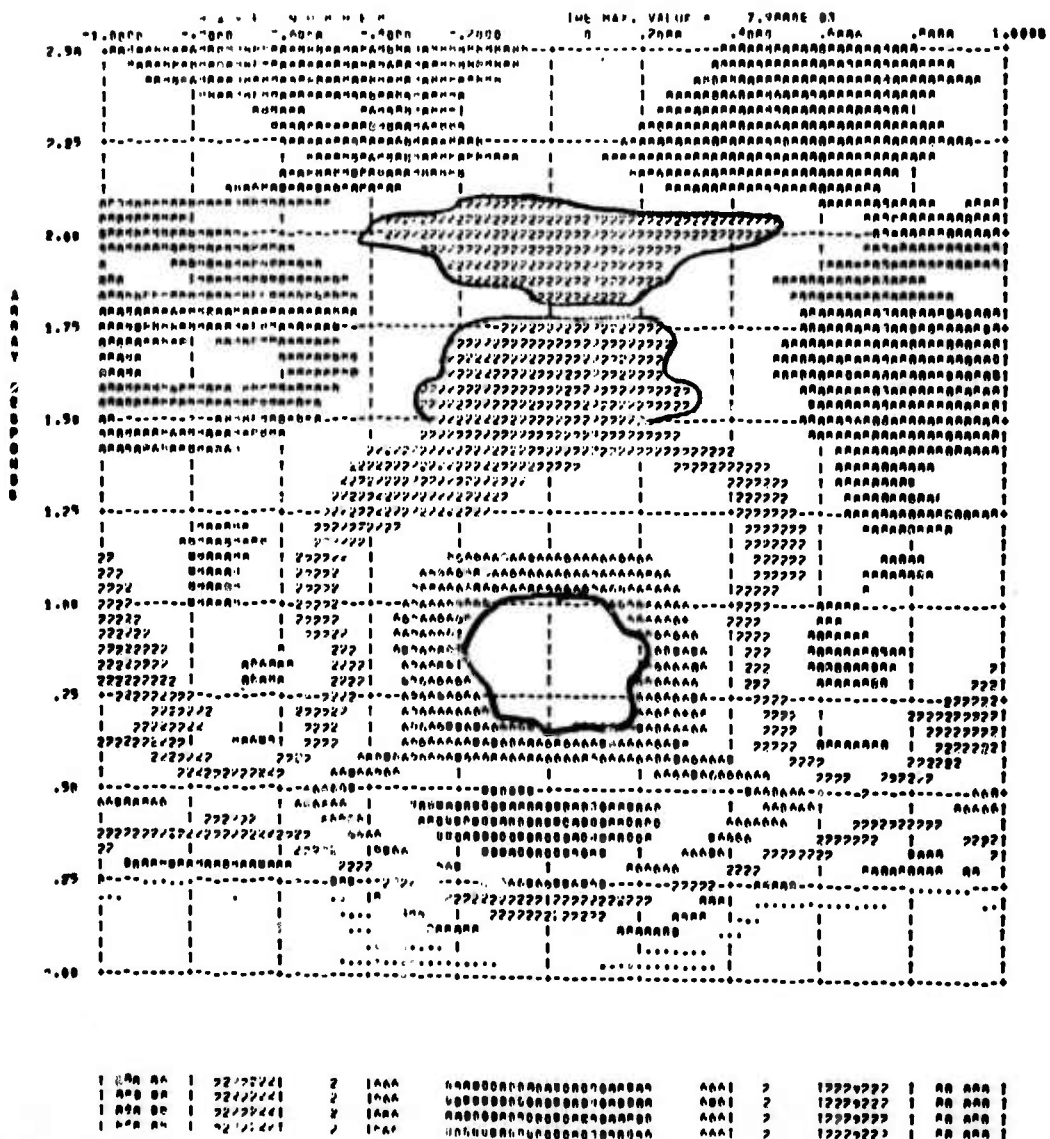


Figure 13. Filtered Noise Band: (.3<f<3cps)
 Rolloff: .1cps

OF INFORMATION ACT, s. 7(1)(b) NO. OF PAGES IN
 DOCUMENT IS 6085 51 PAGE NO. 1 TOTAL NO. OF PAGES = 6085
 THE NUMBER OF CHARACTERS IN IS 4

CHANNEL ID	SCALE FACTOR	DEPTH	U 6	SYMBOL
UW1	1.00	2.710		
UW3	1.00	2.110	9 - J	0
UW4	1.00	1.000	6 - V	0
UW5	1.00	1.490	12 - 1b	0
UW6	1.00	1.130	10 - di	0
			24 - 2f	.

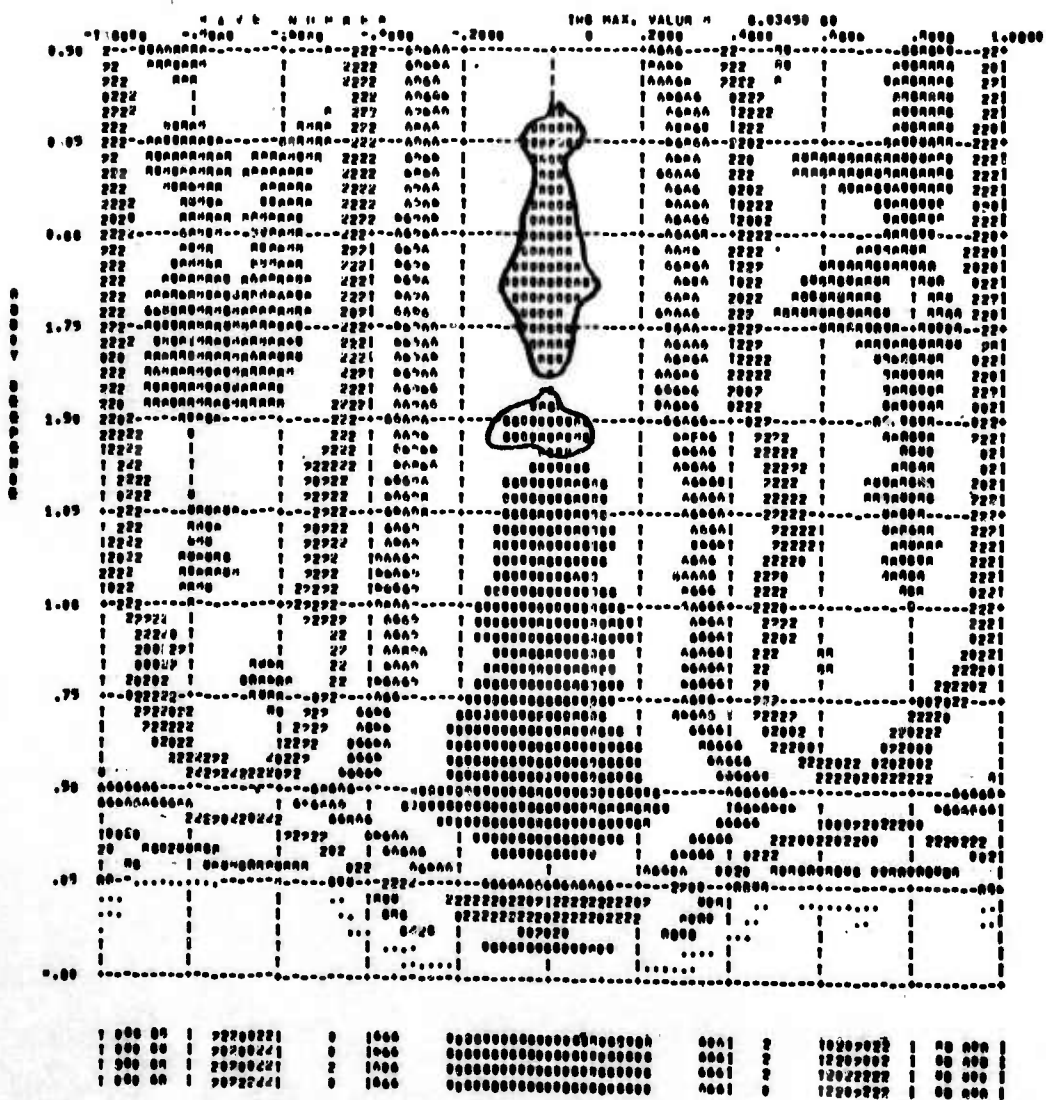


Figure 14. Filtered Noise Band: ($.3 < f < 3\text{cps}$)
Rolloff: $.1\text{cps}$

Unclassified

Security Classification

DOCUMENT CONTROL DATA - R&D		
(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)		
1. ORIGINATING ACTIVITY (Corporate author) TELEDYNE, INC. ALEXANDRIA, VIRGINIA		2a. REPORT SECURITY CLASSIFICATION Unclassified
		2b. GROUP ---
3. REPORT TITLE STABILITY OF FREQUENCY-WAVENUMBER NOISE SPECTRA AT UBO		
4. DESCRIPTIVE NOTES (Type of report and inclusive dates) Scientific		
5. AUTHOR(S) (Last name, first name, initial) Sax, Robert L.		
6. REPORT DATE September 8, 1967	7a. TOTAL NO. OF PAGES 24	7b. NO. OF REFS 1
8a. CONTRACT OR GRANT NO. F 33657-67-C-1313	8b. ORIGINATOR'S REPORT NUMBER(S) 197	
9a. PROJECT NO. VELA T/6702	9b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report) ---	
10. AVAILABILITY/LIMITATION NOTICES This document is subject to special export controls and each transmittal to foreign governments or foreign national may be made only with approval of Chief, AFTAC.		
11. SUPPLEMENTARY NOTES ----	12. SPONSORING MILITARY ACTIVITY ADVANCED RESEARCH PROJECTS AGENCY NUCLEAR TEST DETECTION OFFICE WASHINGTON, D. C.	
13. ABSTRACT Seven four-minute samples of the ambient noise were subjected to frequency-wavenumber (F-K) spectral analysis. In order to observe the range and character of variations in the F-K power spectrum. The observations are derived from the same normal population. The apparent variation in the underlying noise statistics or processes do not suggest gradual diurnal variations in the noise power, but large and apparently random interday fluctuations.		

DD FORM 1 JAN 64 1473

Unclassified

Security Classification

14. KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
Seismology						
Microseism						
Seismic Noise						
Spectrum						
Stationarity						

INSTRUCTIONS

1. ORIGINATING ACTIVITY: Enter the name and address of the contractor, subcontractor, grantee, Department of Defense activity or other organization (corporate author) issuing the report.

2a. REPORT SECURITY CLASSIFICATION: Enter the overall security classification of the report. Indicate whether "Restricted Data" is included. Marking is to be in accordance with appropriate security regulations.

2b. GROUP: Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forces Industrial Manual. Enter the group number. Also, when applicable, show that optional markings have been used for Group 3 and Group 4 as authorized.

3. REPORT TITLE: Enter the complete report title in all capital letters. Titles in all cases should be unclassified. If a meaningful title cannot be selected without classification, show title classification in all capitals in parenthesis immediately following the title.

4. DESCRIPTIVE NOTES: If appropriate, enter the type of report, e.g., interim, progress, summary, annual, or final. Give the inclusive dates when a specific reporting period is covered.

5. AUTHOR(S): Enter the name(s) of author(s) as shown on or in the report. Enter last name, first name, middle initial. If military, show rank and branch of service. The name of the principal author is an absolute minimum requirement.

6. REPORT DATE: Enter the date of the report as day, month, year, or month, year. If more than one date appears on the report, use date of publication.

7a. TOTAL NUMBER OF PAGES: The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.

7b. NUMBER OF REFERENCES: Enter the total number of references cited in the report.

8a. CONTRACT OR GRANT NUMBER: If appropriate, enter the applicable number of the contract or grant under which the report was written.

8b, 8c, & 8d. PROJECT NUMBER: Enter the appropriate military department identification, such as project number, subproject number, system number, task number, etc.

9a. ORIGINATOR'S REPORT NUMBER(S): Enter the official report number by which the document will be identified and controlled by the originating activity. This number must be unique to this report.

9b. OTHER REPORT NUMBER(S): If the report has been assigned any other report numbers (either by the originator or by the sponsor), also enter this number(s).

10. AVAILABILITY/LIMITATION NOTICES: Enter any limitations on further dissemination of the report, other than those

imposed by security classification, using standard statements such as:

- (1) "Qualified requesters may obtain copies of this report from DDC."
- (2) "Foreign announcement and dissemination of this report by DDC is not authorized."
- (3) "U. S. Government agencies may obtain copies of this report directly from DDC. Other qualified DDC users shall request through _____."
- (4) "U. S. military agencies may obtain copies of this report directly from DDC. Other qualified users shall request through _____."
- (5) "All distribution of this report is controlled. Qualified DDC users shall request through _____."

If the report has been furnished to the Office of Technical Services, Department of Commerce, for sale to the public, indicate this fact and enter the price, if known.

11. SUPPLEMENTARY NOTES: Use for additional explanatory notes.

12. SPONSORING MILITARY ACTIVITY: Enter the name of the departmental project office or laboratory sponsoring (paying for) the research and development. Include address.

13. ABSTRACT: Enter an abstract giving a brief and factual summary of the document indicative of the report, even though it may also appear elsewhere in the body of the technical report. If additional space is required, a continuation sheet shall be attached.

It is highly desirable that the abstract of classified reports be unclassified. Each paragraph of the abstract shall end with an indication of the military security classification of the information in the paragraph, represented as (TS), (S), (C), or (U).

There is no limitation on the length of the abstract. However, the suggested length is from 130 to 225 words.

14. KEY WORDS: Key words are technically meaningful terms or short phrases that characterize a report and may be used as index entries for cataloging the report. Key words must be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location, may be used as key words but will be followed by an indication of technical context. The assignment of links, rules, and weights is optional.