

UNCLASSIFIED

AD NUMBER

AD859541

LIMITATION CHANGES

TO:

Approved for public release; distribution is unlimited.

FROM:


Distribution authorized to U.S. Gov't. agencies and their contractors; Critical Technology; 23 JUL 1969. Other requests shall be referred to Army Missile Command, Redstone Arsenal, Attn; AMSMI-RG, AL 35809. This document contains export-controlled technical data.

AUTHORITY

USAMICOM ltr, 7 Dec 1972

THIS PAGE IS UNCLASSIFIED

AD 859541



AD

REPORT NO. RG-TR-69-11

**COMPARISON OF TRUNCATION ERRORS
OF OPTIMUM STEADY-STATE AND CRITICALLY
DAMPED SECOND-ORDER FILTERS**

by
Andrew B. Woods

July 1969

*This document is subject to special export controls
and each transmittal to foreign governments or foreign
nationals may be made only with prior approval of this
Command, ATTN: AMSMI-RC.*



U.S. ARMY MISSILE COMMAND

Redstone Arsenal, Alabama 35809

D D C
RECEIVED
OCT 1 1969
RECEIVED
C

23 July 1969

Report No. RG-TR-69-11

**COMPARISON OF TRUNCATION ERRORS
OF OPTIMUM STEADY-STATE AND CRITICALLY
DAMPED SECOND-ORDER FILTERS**

by

Andrew B. Woods

**DA Project No. 1X263302D212
AMC Management Structure Code No. 5231.12.171**

*This document is subject to special export controls
and each transmittal to foreign governments or foreign
nationals may be made only with prior approval of this
Command, ATTN: AMSMI-RG.*

**Guidance Systems Branch
Army Inertial Guidance and Control Laboratory and Center
Research and Engineering Directorate (Provisional)
U. S. Army Missile Command
Redstone Arsenal, Alabama 35809**

ABSTRACT

Second-order, linear, recursive, fixed-weight optimal and critically damped filters are compared on the basis of truncation errors produced by each. The critically damped and optimal filters are derived along with the commonly used parameters which are truncation error and noise ratio. It is shown that when truncation errors are compared on the basis of equal noise ratios for the two filters, the optimal filter yields a significant improvement over the critically damped filter.

CONTENTS

	Page
1. Critically Damped Second-Order Filters	1
2. Optimum Second-Order Filters	2
3. Relationship Between Optimum and Critically Damped Filter	9
4. Variance Reduction Ratio	10
5. Truncation Error	12
6. Conclusions	14
REFERENCES	17

ILLUSTRATIONS

Figure	Page
1 Weight Relationships of Optimal and Critically Damped Filters	3
2 Kalman Steady-State Optimum	11
3 Critically Damped and Optimum Filters: Truncation Errors	15

BLANK PAGE

1. Critically Damped Second-Order Filters

By definition, a second-order filter is one which will converge on any noise-free second-degree polynomial and yield error-free predictions. The equations involved in a second-order filter containing filter weights of G, H, and K are:

$$\bar{y}_n = \hat{y}_n + G(x_n - \hat{y}_n) \quad (1)$$

$$\bar{\dot{y}}_n = \hat{\dot{y}}_n + \frac{H}{T}(x_n - \hat{y}_n) \quad (2)$$

$$\bar{\ddot{y}}_n = \hat{\ddot{y}}_n + \frac{2K}{T^2}(x_n - \hat{y}_n) \quad (3)$$

$$\hat{y}_{n+1} = \bar{y}_n + \bar{\dot{y}}_n T + \bar{\ddot{y}}_n \frac{T^2}{2} \quad (4)$$

$$\hat{\dot{y}}_{n+1} = \bar{\dot{y}}_n + \bar{\ddot{y}}_n T \quad (5)$$

$$\hat{\ddot{y}}_{n+1} = \bar{\ddot{y}}_n \quad (6)$$

The X 's represent any of many possible filter inputs, for example, radar parameters such as X, Y, Z, range, azimuth, and elevation, while the Y 's represent the outputs. In order to distinguish between the smoothing equations and the prediction equations, (+) over a letter indicates predicted values and (-) indicates smoothed values.

The above six equations may be manipulated so that the predicted value at time $n+1$ is a function of only the last three measurements (filter inputs), the last three predicted values, and some combinations of the filter weights. This equation is in the form of the general equation for linear feedback filters, Equation (8), and can be written as:

$$\begin{aligned} \hat{y}_{n+1} &= (G + H + K) x_n + (-2G - H + K) x_{n-1} + G x_{n-2} \\ &- (-3 + G + H + K) \hat{y}_n - (3 - 2G - H + K) \hat{y}_{n-1} \\ &- (-1 + G) \hat{y}_{n-2} \end{aligned} \quad (7)$$

$$\hat{y}_{n+1} = \sum_{i=0}^{N-1} a_i x_i - \sum_{i=0}^{M-1} b_i \hat{y}_{n-i} \quad (8)$$

It is noteworthy that a_1 and b_1 are given in terms of the weights G, H, and K, and M and N are both three.

The z-transform of Equation (7) may now be taken.

$$Y_n(z) = X_n(z) \left[(G + H + K) + (-2G - H + K)z^{-1} + Gz^{-2} \right] / \left[1 + (-3 + G + H + K)z^{-1} + (3 - 2G - H + K)z^{-2} + (-1 + G)z^{-3} \right] . \quad (9)$$

2. Optimum Second-Order Filters

From Equation (9) the relations among the weights of a critically damped second-order filter, may be obtained. For a second-order filter to be critically damped, the three roots of the denominator polynomial must be real and equal. The three weighting coefficients (G, H, K) are functions of the roots (r_1, r_2, r_3) of the denominator polynomial.

A term, β , may be defined as follows:

$$\beta = \frac{1}{r}, \quad r = r_1 = r_2 = r_3 ,$$

where r is the real root of the denominator polynomial. The weights are related to r (and β) by equating the coefficients of like powers of z^{-1} in the cubic $(z^{-1} - r)^3$, to those of the denominator polynomial. The resulting equations are:

$$G = 1.0 - \beta^3$$

$$H = 1.5(1 - \beta^2)(1 - \beta)$$

$$K = 0.5(1 - \beta)^3 .$$

It can readily be shown that β is a good indication of the degree of smoothing. No smoothing will take place if $\beta = 0$, and heavy smoothing will take place as β approaches 1. Therefore, many β 's may be chosen between zero and one, and the critically damped weights solved for. The relationship between the weights may be seen in upper case letters in Figure 1.

Emphasis will now be shifted toward deriving a Kalman steady-state filter from which the weights will be computed for the optimum second-order filter. To begin with, certain parameters must be known in order to initiate the process. One of these parameters characterizes the expected maneuver of the target. It should again be pointed out that the filter operates on only one measured coordinate at a time, for example, range. Therefore, a maneuver covariance matrix, Q, such that

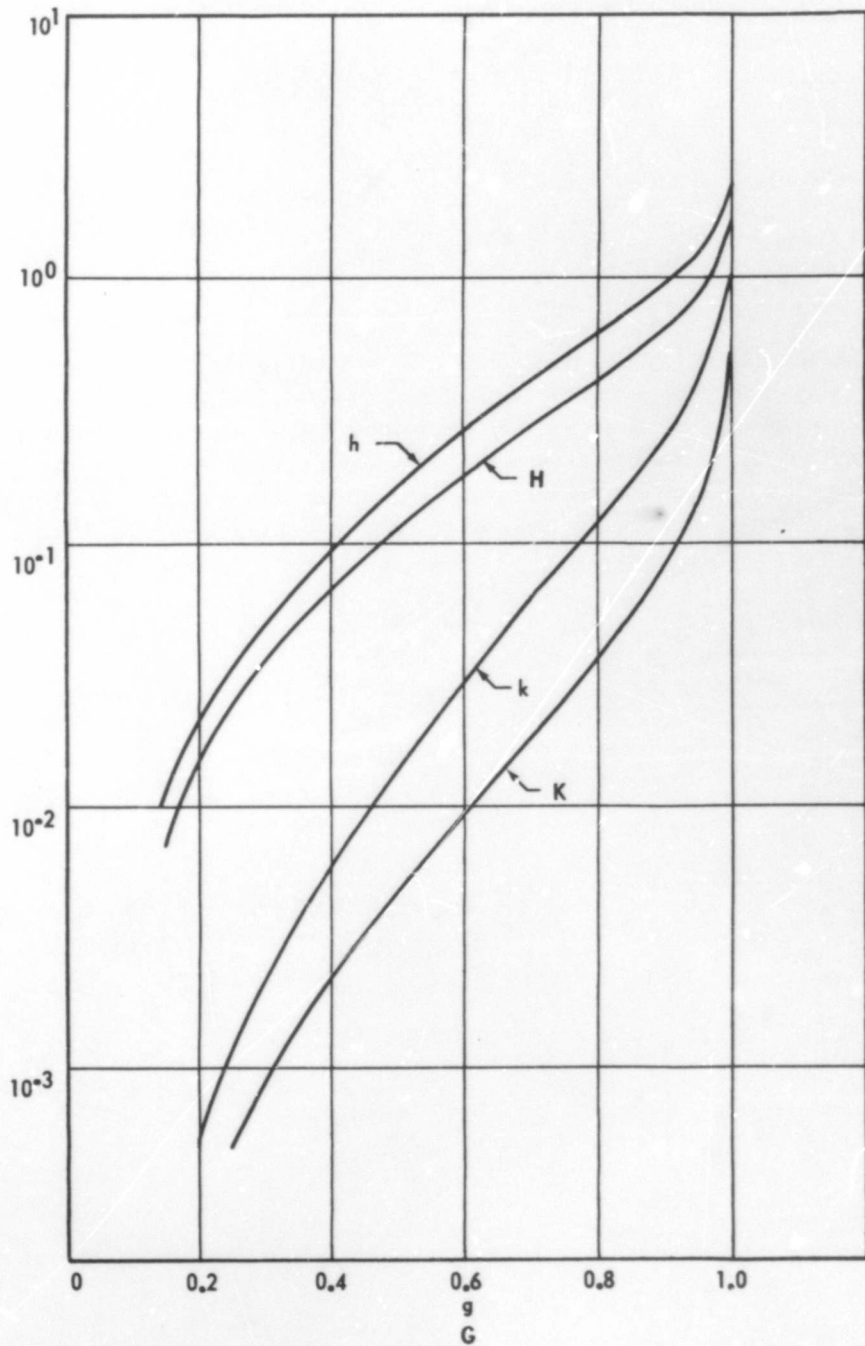


FIGURE 1. WEIGHT RELATIONSHIPS OF OPTIMUM (LOWER CASE) AND CRITICALLY DAMPED (UPPER CASE) FILTERS

$$Q = \begin{bmatrix} 0 & 0 & 0 \\ 0 & 0 & 0 \\ 0 & 0 & \sigma_M^2 \end{bmatrix}, \quad (10)$$

may be defined.

Element Q_{33} of this matrix (σ_M^2) is actually the maneuver variance. It represents the uncertainty in predicted acceleration caused by derivatives in the trajectory higher than the second, during one sample interval. Element Q_{33} may be approximated from the maximum target jerk by neglecting derivatives higher than the third. If the maximum jerk of a target is 5 g per second, this, multiplied by T, might be taken to be the 3σ maneuver and when broken down into its coordinate components, one of which is the filter input, σ_M^2 is obtained.

Also a sampled data system transition matrix for a constant acceleration input must be defined. It is:

$$\Phi = \begin{bmatrix} 1 & T & \frac{T^2}{2} \\ 0 & 1 & T \\ 0 & 0 & 1 \end{bmatrix}. \quad (11)$$

From Schwarz and Friedland [1] [Section 4.2, page 107, Equation (4.5)] $\Phi(t)$ is defined as:

$$\Phi(t) = I + At + A^2 \frac{t^2}{2!} + A^3 \frac{t^3}{3!} + \dots$$

However since

$$\ddot{y} = \text{constant}$$

then

$$\ddot{\dot{y}} = 0.$$

Therefore, Equation (4.3) in the reference becomes:

$$\dot{y}(t) = Ay(t),$$

or

$$\begin{bmatrix} \dot{y}(t) \\ \ddot{y}(t) \\ \ddot{y}(t) \\ y(t) \end{bmatrix} = \begin{bmatrix} 0 & 1 & 0 \\ 0 & 0 & 1 \\ 0 & 0 & 0 \end{bmatrix} \begin{bmatrix} y(t) \\ \dot{y}(t) \\ \ddot{y}(t) \end{bmatrix} .$$

Thus

$$A = \begin{bmatrix} 0 & 1 & 0 \\ 0 & 0 & 1 \\ 0 & 0 & 0 \end{bmatrix} .$$

And from Equation (4.5), with I = the identity matrix,

$$\Phi(T) = \begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \\ 0 & 0 & 1 \end{bmatrix} + \begin{bmatrix} 0 & 1 & 0 \\ 0 & 0 & 1 \\ 0 & 0 & 0 \end{bmatrix} T + \begin{bmatrix} 0 & 0 & 1 \\ 0 & 0 & 0 \\ 0 & 0 & 0 \end{bmatrix} \frac{T^2}{2} .$$

Therefore

$$\Phi(T) = \begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \\ 0 & 0 & 1 \end{bmatrix} + \begin{bmatrix} 0 & T & 0 \\ 0 & 0 & T \\ 0 & 0 & 0 \end{bmatrix} + \begin{bmatrix} 0 & 0 & \frac{T^2}{2} \\ 0 & 0 & 0 \\ 0 & 0 & 0 \end{bmatrix} = \begin{bmatrix} 1 & T & \frac{T^2}{2} \\ 0 & 1 & T \\ 0 & 0 & 1 \end{bmatrix} .$$

Now, two other matrices are defined which will be used later;

$$W = \begin{bmatrix} W_1 \\ W_2 \\ W_3 \end{bmatrix} \quad (12)$$

is the second order filter "weighting" matrix;

$$H = [1 \ 0 \ 0] \quad (13)$$

is termed the observation matrix and relates the state vector [Y] to the measurement vector [X]. The number of rows in the observation matrix indicates the number of ways one intends to measure independently a state variable such as position. A non-zero element indicates what variable or

variables are being measured. The number of columns corresponds to the number of rows in the state vector. Therefore, it can be seen that since the only input is position $[X_1]$, being measured in only one way, the observation matrix is defined as in Equation (13).

There are two other matrices which must be defined. These are the smoothed error covariance matrix and the predicted error covariance matrix.

$$\hat{P}_{(n+1)} = \begin{bmatrix} \hat{P}_{11} & \hat{P}_{12} & \hat{P}_{13} \\ \hat{P}_{21} & \hat{P}_{22} & \hat{P}_{23} \\ \hat{P}_{31} & \hat{P}_{32} & \hat{P}_{33} \end{bmatrix},$$

where \hat{P}_{11} is the predicted position covariance, or

$$\hat{P}_{11} = E\{(\hat{y} - E\hat{y})(\hat{y} - E\hat{y})\} = E\{(\hat{y} - E\hat{y})^2\},$$

where E denotes the expected value. Therefore, each of the elements of $\hat{P}_{(n+1)}$ is defined (but not calculated) as follows:

$$\begin{aligned} \hat{P}_{12} &= E\{(\hat{y} - E\hat{y})(\hat{y} - E\hat{y})\} \\ \hat{P}_{13} &= E\{(\hat{y} - E\hat{y})(\hat{y} - E\hat{y})\} \\ \hat{P}_{23} &= E\{(\hat{y} - E\hat{y})(\hat{y} - E\hat{y})\} \\ \hat{P}_{22} &= E\{(\hat{y} - E\hat{y})(\hat{y} - E\hat{y})\} = E\{(\hat{y} - E\hat{y})^2\} \\ \hat{P}_{33} &= E\{(\hat{y} - E\hat{y})(\hat{y} - E\hat{y})\} = E\{(\hat{y} - E\hat{y})^2\}. \end{aligned}$$

The same is true for $\bar{P}_{(n+1)}$ excepting the fact that $(\hat{\cdot})$ is replaced by $(-\cdot)$. Note at this point that the matrices \bar{P} and \hat{P} are symmetrical about the main diagonal. This will be a major simplifying factor brought out later.

Now the Kalman sequence and the general Kalman equations for a second-order filter may be introduced. Once again the symbol $(\hat{\cdot})$ means predicted and $(-\cdot)$ means smoothed quantities. The general equation for determining weights is

$$W_{(n+1)} = \hat{P}_{(n+1)} H^T \left[H \hat{P}_{(n+1)} H^T + R \right]^{-1}. \quad (14)$$

All matrices except the measurement variance have been defined:

$$R = \left[\sigma_R^2 \right], \quad (15)$$

where σ_R is the standard deviation of the radar errors. Thus R , in this case, is a 1×1 matrix.

The other two equations needed to update the covariances and calculate the weights are:

$$\bar{P}(n+1) = [I - WH] \hat{P}(n+1) \quad (16)$$

$$\hat{P}(n+1) = \Phi \bar{P}(n) \Phi^T + Q. \quad (17)$$

Equations (16) and (17) will be combined to form the error covariance matrix for the predicted state:

$$\hat{P}(n+1) = \Phi [I - WH] \hat{P}(n) \Phi^T + Q. \quad (18)$$

The above equation may be written in expanded matrix form and the matrix algebra carried out, since all the matrices have been defined:

$$\hat{P}(n+1) = \begin{bmatrix} 1 & T & \frac{T^2}{2} \\ 0 & 1 & T \\ 0 & 0 & 1 \end{bmatrix} \left\{ \begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \\ 0 & 0 & 1 \end{bmatrix} - \begin{bmatrix} W_1 \\ W_2 \\ W_3 \end{bmatrix} [1 \ 0 \ 0] \right\} \begin{bmatrix} \hat{P}_{11}(n) & \hat{P}_{12}(n) & \hat{P}_{13}(n) \\ \hat{P}_{21}(n) & \hat{P}_{22}(n) & \hat{P}_{23}(n) \\ \hat{P}_{31}(n) & \hat{P}_{32}(n) & \hat{P}_{33}(n) \end{bmatrix} \begin{bmatrix} 1 & 0 & 0 \\ T & 1 & 0 \\ \frac{T^2}{2} & T & 1 \end{bmatrix} + \begin{bmatrix} 0 & 0 & 0 \\ 0 & 0 & 0 \\ 0 & 0 & \sigma_M^2 \end{bmatrix}. \quad (19)$$

At this point it becomes advantageous to get explicit expressions for the weights. From Equation (14):

$$W(n+1) = \begin{bmatrix} \hat{P}_{11}(n+1) & \hat{P}_{12}(n+1) & \hat{P}_{13}(n+1) \\ \hat{P}_{21}(n+1) & \hat{P}_{22}(n+1) & \hat{P}_{23}(n+1) \\ \hat{P}_{31}(n+1) & \hat{P}_{32}(n+1) & \hat{P}_{33}(n+1) \end{bmatrix} \begin{bmatrix} 1 \\ 0 \\ 0 \end{bmatrix} \left\{ [1 \ 0 \ 0] \begin{bmatrix} \hat{P}_{11}(n+1) & \hat{P}_{12}(n+1) & \hat{P}_{13}(n+1) \\ \hat{P}_{21}(n+1) & \hat{P}_{22}(n+1) & \hat{P}_{23}(n+1) \\ \hat{P}_{31}(n+1) & \hat{P}_{32}(n+1) & \hat{P}_{33}(n+1) \end{bmatrix} \begin{bmatrix} 1 \\ 0 \\ 0 \end{bmatrix} + [R] \right\}^{-1}.$$

Therefore,

$$W(n+1) = \begin{bmatrix} W_1(n+1) \\ W_2(n+1) \\ W_3(n+1) \end{bmatrix} = \begin{bmatrix} \hat{P}_{11}(n+1)/[\hat{P}_{11}(n+1) + R] \\ \hat{P}_{12}(n+1)/[\hat{P}_{11}(n+1) + R] \\ \hat{P}_{13}(n+1)/[\hat{P}_{11}(n+1) + R] \end{bmatrix} . \quad (20)$$

It is now apparent that:

$$W_1(n+1) = \hat{P}_{11}(n+1)/[\hat{P}_{11}(n+1) + R] \quad (21)$$

$$W_2(n+1) = \hat{P}_{12}(n+1)/[\hat{P}_{11}(n+1) + R] \quad (22)$$

$$W_3(n+1) = \hat{P}_{13}(n+1)/[\hat{P}_{11}(n+1) + R] . \quad (23)$$

These three equations may be used quite extensively in simplifying the equations which result from expanding Equation (19). It may now be shown from Equation (19) that:

$$\begin{aligned} \hat{P}_{11}(n+1) &= W_1 R + 2 W_2 R T + W_3 R T^2 - \hat{P}_{12}(n) W_2 T^2 - W_2 \hat{P}_{13}(n) T^3 \\ &\quad + \hat{P}_{22}(n) T^2 + \hat{P}_{23}(n) T^3 - \frac{1}{4} \hat{P}_{13}(n) W_3 T^4 + \frac{1}{4} \hat{P}_{33}(n) T^4 \end{aligned} \quad (24)$$

$$\begin{aligned} \hat{P}_{12}(n+1) &= W_2 R + W_3 R T - \hat{P}_{12}(n) W_2 T + \hat{P}_{22}(n) T + \frac{3}{2} \hat{P}_{23}(n) T^2 \\ &\quad - \frac{3}{2} \hat{P}_{12}(n) W_3 T^2 - \frac{1}{2} \hat{P}_{13}(n) W_3 T^3 + \frac{1}{2} \hat{P}_{33}(n) T^3 \end{aligned} \quad (25)$$

$$\hat{P}_{13}(n+1) = W_3 R - \hat{P}_{12}(n) W_3 T + \hat{P}_{23}(n) T + \frac{1}{2} \hat{P}_{33}(n) T^2 - \frac{1}{2} \hat{P}_{13}(n) W_3 T^2 \quad (26)$$

$$\begin{aligned} \hat{P}_{22}(n+1) &= -\hat{P}_{12}(n) W_2 + \hat{P}_{22}(n) + 2 \hat{P}_{23}(n) T - 2 \hat{P}_{12}(n) W_3 T \\ &\quad - \hat{P}_{13}(n) W_3 T^2 + \hat{P}_{33}(n) T^2 \end{aligned} \quad (27)$$

$$\hat{P}_{33}(n+1) = -\hat{P}_{13}(n) W_3 + \hat{P}_{33}(n) + \sigma_M^2 \quad (28)$$

$$\hat{P}_{23}(n+1) = -\hat{P}_{12}(n) W_3 + \hat{P}_{23}(n) - \hat{P}_{13}(n) W_3 T + \hat{P}_{33}(n) T . \quad (29)$$

In the steady state the covariance and weights approach constants. Since this is true,

$$\hat{P}_{ij}(n+1) = \hat{P}_{ij}(n),$$

and the time indexes may be dropped. The resulting equations fix the optimum steady-state weights.

3. Relationship Between Optimum and Critically Damped Filter

The previous six equations (24-29) may now be manipulated to obtain relationships between the three weights (W_1 , W_2 , and W_3) by eliminating the P 's which cannot be described in terms of the weights and substituting for those P 's which can. Equation (24) is multiplied by two, Equation (25) by minus two T ($-2T$) and Equation (26) by T squared (T^2), and the resulting equations are combined. From Equations (21), (22), and (23) it can readily be seen that:

$$2TW_2 = W_1 \left(W_1 + W_2T + W_3 \frac{T^2}{2} \right) \quad (30)$$

Considering Equations (26) and (27) in a similar manner, one may deduce the equation:

$$W_2^2 = 2W_1W_3. \quad (31)$$

Now Equation (28) easily reduces to:

$$\frac{W_3^2}{1-W_1} = \frac{\sigma_M^2}{R}. \quad (32)$$

Equations (30), (31), and (32) are the basic weight relationships of the optimum steady-state filter.

Now the second-order Kalman needs to be related to the previously described G-H-K. The Kalman smoothing and prediction equations (with no control vector) are:

$$[\hat{Y}(n+1)] = [F] [\bar{Y}(n)]$$

$$[\bar{Y}(n)] = [\hat{Y}(n)] + [W] \{ [X(n)] - [H][\hat{Y}(n)] \}$$

or

$$\hat{y}(n+1) = \bar{y}(n) + \bar{y}(n)T + \bar{y}(n) \frac{T^2}{2}$$

$$\hat{\dot{y}}(n+1) = \bar{\dot{y}}(n) + \bar{\ddot{y}}(n)T$$

$$\hat{\ddot{y}}(n+1) = \bar{\ddot{y}}(n)$$

$$\begin{aligned}\bar{y}(n) &= \hat{y}(n) + W_1 [x(n) - \hat{y}(n)] \\ \bar{\bar{y}}(n) &= \hat{\hat{y}}(n) + W_2 [x(n) - \hat{y}(n)] \\ \bar{\bar{\bar{y}}}(n) &= \hat{\hat{\hat{y}}}(n) + W_3 [x(n) - \hat{y}(n)] .\end{aligned}$$

Thus it becomes apparent that the following relationships hold true for optimum steady-state second order, and critically damped second-order filters:

$$W_1 = g \quad (33)$$

$$W_2 T = h \quad (34)$$

$$W_3 \frac{T^2}{2} = k . \quad (35)$$

Weights (optimum) h and k are shown as functions of g in lower case letters in Figure 1. Shown in Figure 2 is a curve relating the optimum weight g to the parameter $T^4 \frac{\sigma_M^2}{\sigma_R^2}$. Thus, the weights for the optimum filter are fixed if T , σ_M , and σ_R are known.

In summary, there is actually no difference in the critically damped and the optimum filters except in the calculation of the weights.

4. Variance Reduction Ratio

Attention is now turned to the criteria to be used in comparing the two second-order filters. It can be shown that there exists a variance reduction ratio, δ^2 , which, for predicted position, is a function only of the weights of the second-order filter. This function is defined as follows:

$$\delta^2 = \frac{\sigma_y^2}{\sigma_x^2} = \frac{gk(2g+h-4) + h[g(2g+h) + 2h]}{[-g(h+k) + 2k](2g+h-4)} ,$$

where σ_y^2 and σ_x^2 are the variances of the output and the input respectively.

The actual step-by-step derivation of this term is beyond the scope of this paper, however, the procedure¹ will be pointed out. Using Equations (1) through (6), one may solve for every element of the covariance matrix with the weights

¹C. F. Asquith, unpublished notes.

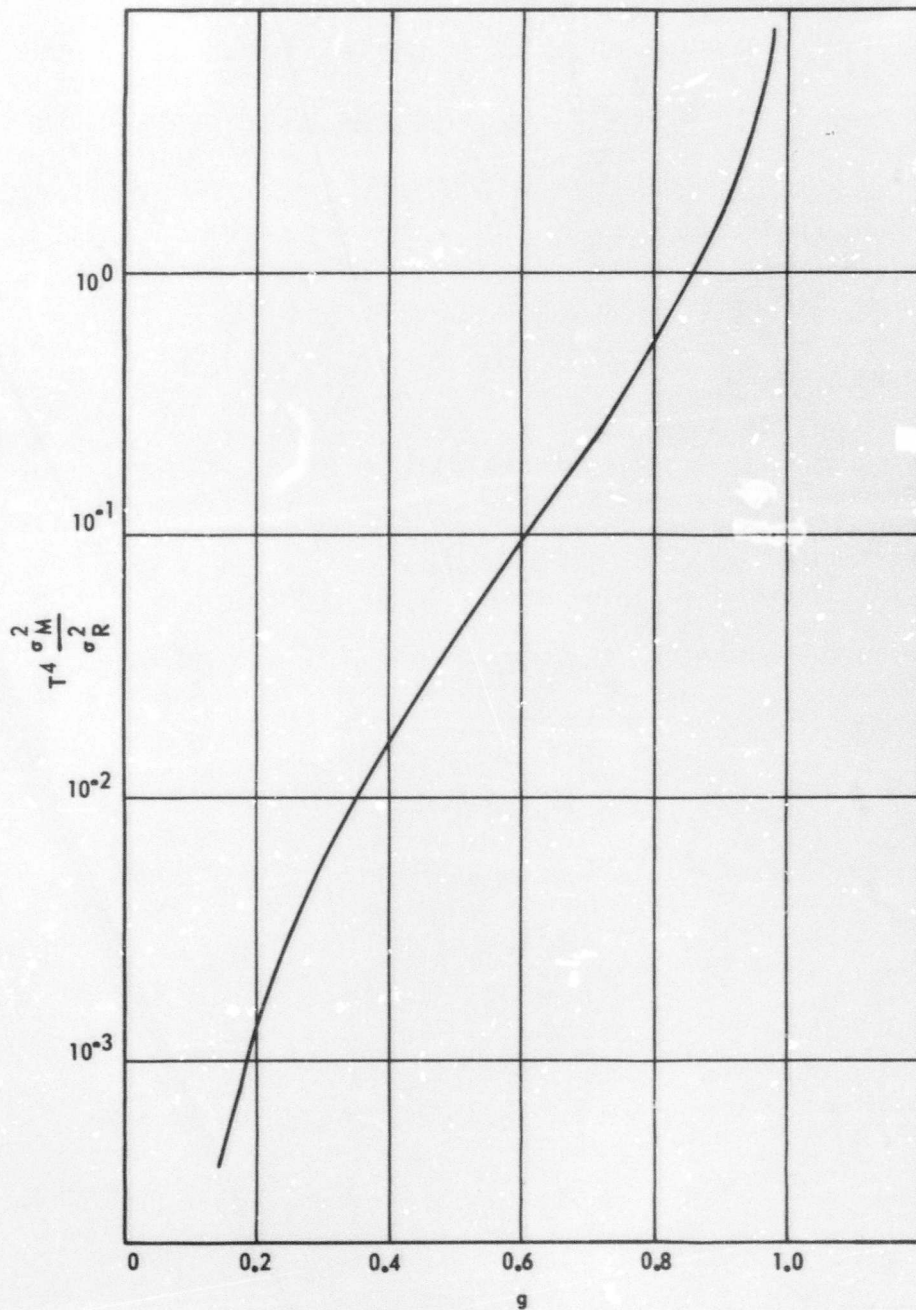


FIGURE 2. KALMAN STEADY-STATE "OPTIMUM"

constant by calculating $E[(y - E_y)^2]$, $E[(y - E_y)(\dot{y} - E\dot{y})]$, etc. Then the indexes may be dropped, making the steady-state assumption. Next, P_{12} , P_{13} , P_{22} , P_{23} , and P_{33} must all be eliminated, leaving an equation for P_{11}/R which is actually $\frac{\sigma_y^2}{\sigma_x^2}$ for predicted position only. (The same procedure may be followed if the variance reduction ratio is desired for either velocity or acceleration.)

Therefore, by simply knowing the weights, one may calculate the noise ratio of the two filters. The noise ratio, δ^2 , for the two filters may then be equalized and the filters may be compared on other grounds.

5. Truncation Error

The criterion that has been chosen for comparison of the two filters is an error which arises from the inputting to the two filters, of a curve of one degree higher than the order of the filter. In the case of the second-order filter, this would be an input comprised of a change in acceleration (\ddot{x}) or "jerk." When this is input into a second-order filter, the steady-state error which arises is termed truncation error.

Assuming a trajectory with constant jerk (J_0), the acceleration, velocity, and position can be calculated as functions of time. The acceleration equals the total time times the jerk or:

$$\text{Acceleration} = nT J_0 . \quad (36)$$

Integrating this expression, the velocity and position are obtained:

$$\text{Velocity} = \frac{nT^2}{2} J_0 \quad (37)$$

$$\text{Position} = \frac{nT^3}{6} J_0 . \quad (38)$$

The noise-free measured values at times n , $n-1$, and $n-2$ are denoted as:

$$x_n = \frac{nT^3}{6} J_0 \quad (39)$$

$$x_{n-1} = \frac{(n-1)^3 T^3}{6} J_0 \quad (40)$$

$$x_{n-2} = \frac{(n-2)^3 T^3}{6} J_0 . \quad (41)$$

Now the equation for linear feedback filters, in this case, Equation (7), is recalled:

$$\begin{aligned}
 y(n+1) &= (g + h + k) x_n + (-2g - h + k) x_{n-1} \\
 &+ g x_{n-2} - (-3 + g + h + g) y_n \\
 &- (3 - 2g - h + k) y_{n-1} - (-1 + g) y_{n-2} \quad (7)
 \end{aligned}$$

The errors then, in the predicted, are defined for the present point and the past three as:

$$\epsilon(n+1) = y(n+1) - \frac{(n+1)^3 T^3 J_0}{6} \quad (42)$$

$$\epsilon(n) = y(n) - \frac{n^3 T^3 J_0}{6} \quad (43)$$

$$\epsilon(n-1) = y(n-1) - \frac{(n-1)^3 T^3 J_0}{6} \quad (44)$$

$$\epsilon(n-2) = y(n-2) - \frac{(n-2)^3 T^3 J_0}{6} \quad (45)$$

Solving Equations (42) through (45) for the respective y 's and substituting them in Equation (7), one obtains:

$$\begin{aligned}
 \epsilon(n+1) + (n+1)^3 T^3 \frac{J_0}{6} &= (g + h + k) (nT)^3 \frac{J_0}{6} + (-2g - h + k) (n-1)^3 T^3 \frac{J_0}{6} \\
 &+ g (n-2)^3 T^3 \frac{J_0}{6} - (-3 + g + h + k) \left(\epsilon(n) + n^3 T^3 \frac{J_0}{6} \right) - (3 - 2g - h + k) \\
 &\left[\epsilon(n-1) + (n-1)^3 T^3 \frac{J_0}{6} \right] - (-1 + g) \left[\epsilon(n-2) + (n-2)^3 T^3 \frac{J_0}{6} \right] .
 \end{aligned}$$

Simplifying, the previous equation becomes:

$$\begin{aligned}
 2k \epsilon(n+1) &= T^3 \frac{J_0}{6} [- (n+1)^3 + (g + h + k) n^3 + (-2g - h + k) (n-1)^3 \\
 &+ g (n-2)^3 - (-3 + g + h + k) n^3 - (3 - 2g - h + k) (n-1)^3 - (-1 + g) (n-2)^3] .
 \end{aligned}$$

Therefore:

$$2k \epsilon(n+1) = T^3 \frac{J_0}{6} [- (n+1)^3 + 3 n^3 - 3 (n-1)^3 + (n-2)^3] .$$

Finally the equation reduces to:

$$2k \epsilon(n+1) - T^3 \frac{J_0}{6} [6] = - T^3 J_0 .$$

Thus:

$$\epsilon(n+1) = \frac{- T^3 J_0}{2 k} .$$

In summary, the truncation error is a function of $\frac{1}{k}$. Therefore, in order to minimize truncation error, k must be maximized.

Now the filter weights must be chosen so that the noise ratios of the two filters correspond. Then the truncation errors of the two filters can be compared to determine which, the critically damped or the optimum, has less truncation error from the constant jerk input (Figure 3).

6. Conclusions

It is readily apparent that the optimum filter offers a far better minimization of truncation error than the critically damped filter. In fact, choosing a certain noise reduction ratio one may determine from Figure 3 that there is approximately a 40-percent decrease in truncation error.

It must be noted that the truncation error due to those inputs of two or more degrees higher than that of the second-order filter have been neglected. These derivatives generally are of little significance, however, in the calculation of total truncation error because these inputs would be very small and of short duration.

Therefore, in closing, if the problem is to minimize truncation error, there is a marked advantage in using the optimum, second-order filter over the critically damped second-order filter. Applicable data and discussion have been given in previous works [2-4].

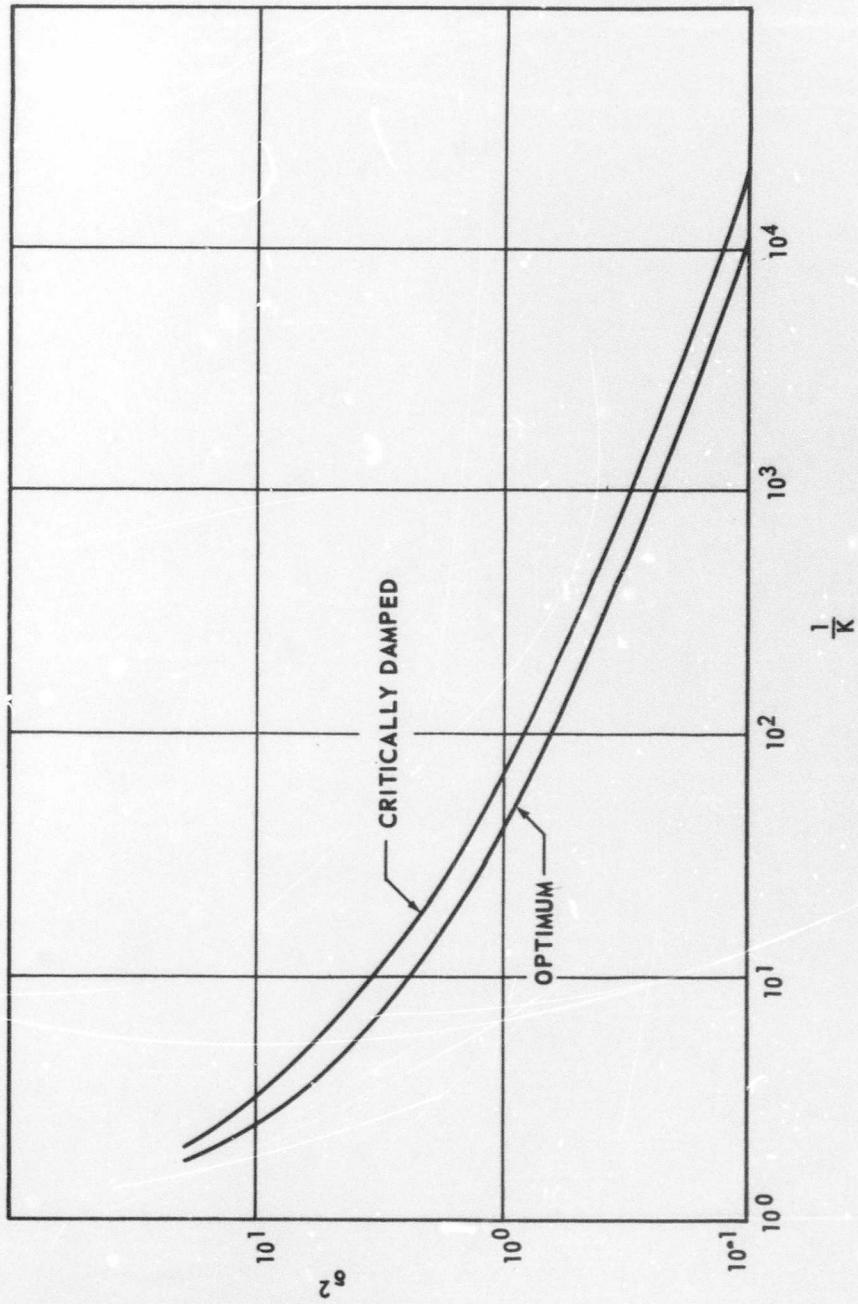


FIGURE 3. CRITICALLY DAMPED AND OPTIMUM FILTERS: TRUNCATION ERRORS

REFERENCES

1. Schwarz and Friedland, Linear Systems, McGraw-Hill, New York, 1965.
2. E. Taenzer, Verification of the Approximate Equations Developed for the Truncation Errors of GH and GHK Filters, Report No. BZ-1167, Raytheon Company, Bedford, Massachusetts, 1 November 1967.
3. J. R. Benedict and G. W. Bordner, "Synthesis of an Optimal Set of Track-While-Scan Smoothing Equations," IRE Transactions on Automatic Control, July 1962.
4. J. R. Ragazzini and G. F. Franklin, Sampled Data Control Systems, McGraw-Hill, New York, 1958.

UNCLASSIFIED

Security Classification

DOCUMENT CONTROL DATA - R & D

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

1. ORIGINATING ACTIVITY (Corporate author) Army Inertial Guidance and Control Laboratory and Center Research and Engineering Directorate (Provisional) U. S. Army Missile Command Redstone Arsenal, Alabama 35809		2a. REPORT SECURITY CLASSIFICATION Unclassified	
		2b. GROUP N/A	
3. REPORT TITLE COMPARISON OF TRUNCATION ERRORS OF OPTIMUM STEADY-STATE AND CRITICALLY DAMPED SECOND-ORDER FILTERS			
4. DESCRIPTIVE NOTES (Type of report and inclusive dates) Technical Report			
5. AUTHOR(S) (First name, middle initial, last name) Andrew B. Woods			
6. REPORT DATE 23 July 1969		7a. TOTAL NO. OF PAGES 23	7b. NO. OF REFS 4
8a. CONTRACT OR GRANT NO.		9a. ORIGINATOR'S REPORT NUMBER(S) RG-TR-69-11	
b. PROJECT NO. (DA) IX263302D212 c. AMC Management Structure Code No. 5231. 12. 171 d.		9b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report) AD	
10. DISTRIBUTION STATEMENT This document is subject to special export controls and each transmittal to foreign governments or foreign nationals may be made only with prior approval of this Command, ATTN: AMSMI-RG.			
11. SUPPLEMENTARY NOTES None		12. SPONSORING MILITARY ACTIVITY Same as No. 1	
13. ABSTRACT Second-order, linear, recursive, fixed-weight optimal and critically damped filters are compared on the basis of truncation errors produced by each. The critically damped and optimal filters are derived along with the commonly used parameters which are truncation error and noise ratio. It is shown that when truncation errors are compared on the basis of equal noise ratios for the two filters, the optimal filter yields a significant improvement over the critically damped filter.			

DD FORM 1473
1 NOV 68

REPLACES DD FORM 1473, 1 JAN 64, WHICH IS
OBSOLETE FOR ARMY USE.

UNCLASSIFIED

Security Classification

14. KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
Fixed-weight optimal filters Critically damped filters Truncation errors Noise ratio						