


AD 894 530 L

C-TR-71-54

FTC-TR-71-54

AD894530

A
F
F
T
C



**LIMITED HIGH ALTITUDE
PERFORMANCE EVALUATION
OF THE
HH-53C HELICOPTER**

RODNEY L. RITTER
Captain, USAF
Project Engineer

SYDNEY E. GURLEY
Major, USAF
Project Pilot

CLARK E. LOVRIEN, JR.
Major, USAF
Project Officer/Pilot

TECHNICAL REPORT No. 71-54

DECEMBER 1971

Distribution limited to U.S. Government agencies only
(Test and Evaluation), November 1971. Other requests
for this document must be referred to ASD (SDQM),
Wright-Patterson AFB, Ohio 45433.

**AIR FORCE FLIGHT TEST CENTER
EDWARDS AIR FORCE BASE, CALIFORNIA
AIR FORCE SYSTEMS COMMAND
UNITED STATES AIR FORCE**

Qualified requesters may obtain copies of this report from the Defense Documentation Center, Cameron Station, Alexandria, Va. Department of Defense contractors must be established for DDC services, or have "need to know" certified by cognizant military agency of their project or contract.

DDC release to OTS is not authorized

When US Government drawings, specifications, or other data are used for any purpose other than a definitely related government procurement operation, the government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the government may have formulated, furnished, or in anyway supplied the said drawings, specifications, or any other data is not to be regarded by implication or otherwise, as in any manner licensing the holder or any other person or corporation or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

Do not return this copy, Retain or destroy

DEPARTMENT OF THE AIR FORCE
HEADQUARTERS AERONAUTICAL SYSTEMS DIVISION (AFSC)
WRIGHT-PATTERSON AIR FORCE BASE, OHIO 45433



REPLY TO
ATTN OF

ASD/SDQH 5-27 (Maj Thompson/54921/cal/H-53/R&D 9-2)

SUBJECT

ASD Addendum to FTC-TR-71-54, H-53 Altitude Performance

10 Recipients of FTC-TR-71-54

This report is a part of and should remain attached to FTC-TR-71-54, "Limited High Altitude Performance Evaluation of the H-53C Helicopter". Paragraph numbers below correspond to the recommendations in the AFFTC Technical Report.

1. Concur. ASD will accomplish the data analysis required to incorporate this test data in the flight manual (along with data from previous tests, which is being reduced by commercial contract). All available flight test data will be incorporated simultaneously.


2. Concur with intent. ASD has initiated actions to incorporate the required information in the flight manual.

3. Concur. Test data analysis indicates that the largest increase in hover weight capability (at 9500 feet, standard day, and 100% N_r) due to the new bellcrank alone is approximately 2650 pounds. ASD provided technical approval of the Engineering Change Proposal (ECP 7379) with the recommendation that WRAMA procure the bellcrank for the H-53 fleet.

4. Concur. The ASD data effort for the flight manual will consider this compromise of optimum performance in favor of safety.

5. Concur with intent. ASD has established an additional data analysis task to determine the feasibility of defining single engine performance without further flight tests of H-53 helicopters. This effort is undertaken to determine the extent of additional test data which may or may not be required to further define the single engine height-velocity characteristics, if deemed necessary at a later date.

FOR THE COMMANDER

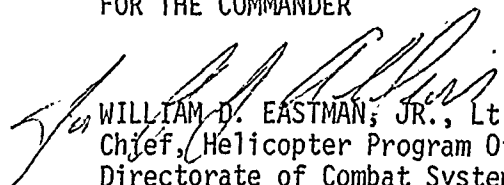
WILLIAM D. EASTMAN, JR., Lt Col, USAF
Chief, Helicopter Program Office
Directorate of Combat Systems
Deputy for Systems

PRIDE IN THE PAST



FAITH IN THE FUTURE

FTC-TR-71-54

**LIMITED HIGH ALTITUDE
PERFORMANCE EVALUATION
OF THE
HH-53C HELICOPTER**

RODNEY L. RITTER
Captain, USAF
Project Engineer

SYDNEY E. GURLEY
Major, USAF
Project Pilot

CLARK E. LOVRIEN, JR.
Major, USAF
Project Officer/Pilot

Distribution limited to U.S. Government agencies only
(Test and Evaluation), November 1971. Other requests
for this document must be referred to ASD (SDQH),
Wright-Patterson AFB, Ohio 45433.

FOREWORD

This report presents the results of the limited high altitude performance tests and tail rotor evaluation of an HH-53C helicopter, USAF serial number 68-10354. Testing was conducted between 26 September and 16 November 1971 at Bishop, California, and the nearby high altitude test site, Coyote Flats. The tests were conducted under authority of AFFTC Project Directive 72-17.

The authors of this report wish to express their appreciation to Airman Gary Snitily for his assistance with the data reduction and engineering analysis. In addition, the dedicated efforts of SMSgt Frank M. Presbury and his maintenance crew are most thankfully acknowledged.

Foreign announcement and dissemination by the Defense Documentation Center are not authorized because of technology restrictions of the U.S. Export Control Acts as implemented by AFR 400-10.

Prepared by:

Rodney L. Ritter

RODNEY L. RITTER
Captain, USAF
Project Engineer

Sydney E. Gurley

SYDNEY E. GURLEY
Major, USAF
Project Pilot

Clark E. Lovrien, Jr.

CLARK E. LOVRIEN, JR.
Major, USAF
Project Officer/Pilot

Reviewed and approved by:
9 DECEMBER 1971

James W. Wood

JAMES W. WOOD
Colonel, USAF
Commander, 6510th Test Wing

Robert M. White

ROBERT M. WHITE
Brigadier General, USAF
Commander

ABSTRACT

This limited flight test program defined the hover and takeoff performance of the HH-53C helicopter at high altitude and included an evaluation of the increased tail rotor power provided by a new tail rotor bellcrank. Hover and takeoff performance were satisfactory during high altitude testing. Operating at 105-percent rotor speed at high altitude, heavy gross weight combinations provided a more rapid response of the aircraft to control inputs than operation at 100-percent where control response was somewhat sluggish. In addition, it provided increased performance, prevented reaching mechanical control stops from limiting performance and lowered cruise guide readings. The new tail rotor bellcrank increased the HH-53C lift capability approximately 4,500 pounds by preventing tail rotor authority from limiting aircraft performance. A compromise between maximum performance and safety resulted in recommendation of a 35 knot indicated airspeed for takeoff.

table of contents

	Page
LIST OF ILLUSTRATIONS _____	v
LIST OF ABBREVIATIONS _____	vi
INTRODUCTION _____	1
TEST AND EVALUATION _____	2
Performance _____	2
Hover _____	2
Takeoffs _____	2
Sawtooth Climbs _____	3
Approaches _____	3
Directional Control Evaluation _____	4
Sideward and Rearward Flight _____	4
Tethered Hover _____	5
CONCLUSIONS AND RECOMMENDATIONS _____	6
APPENDIX - DATA ANALYSIS METHODS AND TEST DATA _____	7
General _____	7
Power Determination _____	7
Sawtooth Climbs _____	8
Control Positions _____	8
REFERENCES _____	47

list of illustrations

Figure	Title	Page
1-6	Nondimensional Hover Performance _____	9-14
7-10	Hover Performance Summary _____	15-18
11-14	5-Foot Level Acceleration _____	19-22
15	5-Foot Level Acceleration Summary _____	23
16-19	15-Foot Level Acceleration _____	24-27
20	15-Foot Level Acceleration Summary _____	28
21	Sawtooth Climbs _____	29
22-28	Paced IGE Flight _____	30-36
29	Tail Rotor Torque Time History _____	37
30-33	Hover Control Position _____	38-41
34-36	Collective-Rudder Coupling _____	42-44
37	Tail Rotor Blade Angle versus Wind Azimuth in a Hover _____	45
38	Tail Rotor Torque versus Wind Azimuth in a Hover _____	46

list of abbreviations and symbols

<u>Item</u>	<u>Definition</u>	<u>Unit</u>
A	rotor disk area	ft ²
AFCS	automatic flight control system	- - -
avg	average	- - -
C	centigrade or Celsius	- - -
C _p	pressure coefficient	dimensionless
C _T	thrust coefficient	dimensionless
cg	center of gravity	in.
dh/dt	time rate of change of altitude	ft per min
FAT	free air temperature	deg C
fwd	forward	- - -
IGE	in ground effect	- - -
KIAS	knots indicated airspeed corrected for instrument error	- - -
N _r	rotor speed	rpm
Q	engine torque	pct
R	rotor radius	ft
R/C	rate of climb	ft per min
rpm	revolutions per minute	- - -
SHP	shaft horsepower	550 $\frac{\text{ft-lb}}{\text{sec}}$
T _a	ambient temperature	deg K
W	airplane gross weight	lb
ρ	air density	slugs per ft ³
Ω	rotor angular velocity	rad per sec



INTRODUCTION

Previous HH-53C hover performance testing as reported in references 1 and 3 was accomplished only at sea level. As a result of the earlier tests, it was recommended that high altitude testing be accomplished to adequately define the operational envelope of the aircraft (reference 1). In addition, the HH-53C has experienced growth in its performance capabilities. Engine power has increased from an original 3,435 shaft horsepower (SHP) to the present value of 3,925 SHP, the main gearbox's torque capability has increase 18 percent, and for the tests reported herein, T_5 limits were raised from 727 to 750 degrees C. These increased performance capabilities resulted in a tail rotor control problem as was reported in reference 4. Reports from operational users noted that the tail rotor does not have sufficient control power to overcome the torque generated by the main rotor at high altitude and heavy gross weight combinations. To prevent lack of tail rotor control from limiting the performance of the HH-53C a new tail rotor bellcrank was installed on the test aircraft which increased the available tail rotor blade angle by 3.25 degrees. Effects of the new tail rotor bellcrank were evaluated during these high altitude tests. Also, limited takeoff performance, sawtooth climbs, and a qualitative approach evaluation were accomplished on an opportunity basis.

All tests were conducted with engine air particle separators (EAPS), 450-gallon tip tanks and rescue hoist installed. Thirty-two flights for a total of 55.4 hours were flown to acquire the data presented within this report.

TEST AND EVALUATION

PERFORMANCE

Hover

Hovering performance was evaluated, using tethered hover techniques, at wheel heights of 150, 100, 80, 47, 22, and 10 feet. Two locations, Bishop Airport (4,100 feet) and nearby Coyote Flats (10,000 feet), were used so that a sufficient temperature range was available to test four different rotor blade tip Mach number (M_{tip}) values (0.60, 0.62, 0.64 and 0.66). The data are presented in nondimensional form, thrust coefficient (C_T) versus pressure coefficient (C_p) for lines of constant M_{tip} (figures 1 to 6, appendix), and wheel height versus C_p for lines of constant C_T (figures 7 to 10, appendix). Plots present previous acquired data (reference 3) as well as the results of the test program reported herein. These data should be used to update the HH-53C Flight Manual (reference 2). (R 1)

Takeoffs

Takeoff data were obtained by using a level acceleration takeoff technique at wheel heights of 5 and 15 feet. The 15-foot wheel height was used to simulate the carrying of an external sling load. All flights were made with a mid cg and with the landing gear down. The distance required to clear a 50-foot height was obtained through a range of ΔC_p 's for the two techniques by varying the gross weight of the aircraft from 36,500 to 40,500 pounds. A Fairchild Flight Analyzer was used to record time, height and distance of each takeoff. Figures 11 through 20 of the appendix present these data.

The helicopter was hovered at the two wheel heights using 105-percent rotor rpm, and the power required to hover was noted. The helicopter was then accelerated at the hover height as rapidly as possible to an aim airspeed by pulling the collective to maximum power available or until the rotor rpm dropped to 100 percent. When the helicopter reached the desired indicated airspeed in a level acceleration, the airspeed was maintained in a climb until the helicopter or the simulated sling load cleared the desired 50 foot altitude above the ground. The power required at this point was noted. The difference between the power required in hover and at 50 feet was the ΔC_p against which takeoff distance was plotted in the previously mentioned figures. For purposes of the test a pace vehicle was used during the acceleration and climb at speeds below 35 knots. Figures 15 and 20 show that the minimum takeoff distance occurs when accelerating to 25 knots and climbing out, while maintaining this speed. This airspeed is not recommended because of inherent inaccuracies in the airspeed indicator at low airspeeds and the large attitude changes required in rotating from a nose low attitude for level acceleration to a nose high attitude for a low speed climb. For an opera-

¹ Boldface numerals preceded by an R correspond to the recommendation numbers tabulated in the Conclusions and Recommendations section of this report.

tional takeoff situation it is necessary to compromise between maximum performance and safety. If a climbout is attempted at 25 knots, a slight over-rotation or a minor attitude change during the climb can cause the airspeed to drop off to such a point that the aircraft can no longer climb and will settle back to the ground. From pilot experience during the takeoff tests, 35 KIAS was the lowest indicated airspeed that was stable enough to be utilized during the takeoff climb.

The acceleration close to the ground and climbout at 35 KIAS provided for a much safer operation. The climb airspeed was very close to the minimum single engine speed of approximately 40 KIAS. A maximum performance takeoff must necessarily be accomplished within the avoid area of the height-velocity diagram; however, single engine speed could possibly be attained if the climbout was at 35 KIAS or a much more controlled touchdown could be made if necessary. For these reasons it is recommended that level acceleration takeoff data be presented using 35 KIAS for the climb. (R 4)

Height-velocity tests have never been conducted at weights greater than 37,000 pounds or at high altitude. A qualitative evaluation of minimum single engine airspeed was made and found to be approximately the same (40 KIAS) as at lower elevation. Single engine out performance should be defined at high altitudes. (R 5)

Sawtooth Climbs

Sawtooth climbs were made with 100- and 105-percent rotor speeds at approximately 41,000 pounds gross weight. At a density altitude of approximately 11,300 feet collective limits reduced the rate of climb while operating at 100-percent rotor speed as compared to the rate of climb at 105 percent. Figure 21 presents this data. It is recommended that a rotor speed of 105 percent be used when operating at high altitudes and heavy gross weight combinations. (R 2)

Approaches

High altitude approaches were not specifically evaluated during the performance tests, but enough general observations were made during normal day-to-day operations at the test site to form qualitative opinions concerning the best technique to use when making approaches into a high altitude site at high gross weights. Numerous approaches were made to the high altitude site at 42,000 pounds gross weight and with power margins as low as 10-percent torque (20-percent torque total). Approaches were made to both running landings and a low hover. Approaches were made at a higher true airspeed (same indicated airspeed) than at lower altitudes and caused increased difficulty in slowing the helicopter during the approach, particularly to a hover. Approaches to a running landing are recommended when a suitable landing area is available and excess hover power is marginal. Running landings with touchdown speeds in the normal 20 to 40 knot range resulted in noticeably higher ground speeds than experienced at lower elevations. This must be anticipated because of the inadequacy of the HH-53C wheel brakes. If a running landing is made and the brakes must be used to stop the helicopter, very short brake life can be expected, especially if minimum distance stops are made with the helicopter at high gross weight. The helicopter can be effectively slowed to a stop by proper application of collective and cyclic controls.

Approaches to a hover were made using a slow, shallow approach to prevent buildup of excessive descent rates or a requirement for a flare to slow the helicopter during the last portion of the approach. There was a tendency for the helicopter to "fall through" as translational lift was lost. This momentary loss of lift was anticipated by insuring that near hover power was applied as the helicopter passed through translational lift, thus reducing the requirement for a sudden application of collective and possible rotor (N_r) droop. A rotor speed of 105 percent was used on all heavy weight, high altitude approaches to allow a margin above 100-percent N_r in case the rotor speed was inadvertently drooped when increasing the collective to maximum power. It is recommended that all high altitude, heavy weight approaches be made using maximum rotor speed (full throttles/105-percent) to allow use of maximum power and to avoid reaching an aircraft mechanical limit (tail rotor or collective). (R 2)

DIRECTIONAL CONTROL EVALUATION

As previously stated the test helicopter was equipped with a new tail rotor bellcrank which increased the control travel of the tail rotor blades by approximately 10 percent. Originally, the tail rotor blade travel was from -3.5 degrees (full right rudder pedal, full down collective) to +24 degrees (full left rudder pedal, full up collective). The new bellcrank maintained the full right pedal, down collective tail rotor blade angle of -3.5 degrees, but increased the full left pedal, up collective blade angle to +27.25 degrees.

Two different methods were used to evaluate the effectiveness of the new tail rotor bellcrank: (1) Pacing of an in-ground-effect (IGE) flight, from left sideward through rearward to right sideward flight, and (2) tethered hover in winds of various velocities.

Sideward and Rearward Flight

Sideward and rearward flights were conducted at a mid cg (340 inches) 39,000 pounds gross weight and forward cg (328 inches) at 37,500 pounds gross weight. Rotor speeds were 102 and 100 percent, respectively. In addition, left and right sideward flight at 97-percent rotor speed, mid cg (340 inches) and 39,000 pounds gross weight were conducted to compare rotor speed effects. Figures 22 through 28 present these data.

The discontinuities present in the data fairings represent the speed (approximately 20 knots) at which translational lift becomes evident. Comparing sideward flight performance at 102 and 97 percent rotor speed, it is evident that variations in rotor speed significantly influence the aircraft's capabilities. The conventional bellcrank blade angle limits are included in the plots. It can be seen that the new bellcrank significantly increased the sideward flight capability. Where two data points are presented they represent the absolute maximum and minimum values recorded during that particular data point. At 97-percent rotor speed the aircraft is collective limited in left sideward flight and tail rotor blade limited in right sideward flight. The lower rotor speeds increased cruise guide readings, as was expected (reference 2). Higher rotor speeds (above 100-percent, see section Tethered Hover) resulted in more normal response higher directional control capability, and reduced cruise guide readings. When operating the HH-53C at high altitudes, 105-percent rotor speeds should be used. (R 2)

Tethered Hover


Hover data were obtained using tethered hover techniques. Increasing gross weights up to the limit gross weight were simulated by pulling on a cable tethered to the ground. Power was increased until reaching the gross weight limit or an aircraft power or control limit.

Hover testing was performed at Coyote Flats and Bishop Airport.

While hovering in a wind, various aircraft headings relative to the wind could easily be established. Then, by monitoring tail rotor torque and blade angle, a critical relative heading was determined. At approximately 200 degrees relative heading the HH-53C experienced a shuddering, similar to that felt when translational lift is lost during approach to a hover. However, maximum blade angle and tail rotor torque were obtained at approximately 80 degrees relative heading.

Tethered hover in little or no wind (3 knots or less) showed the new tail rotor bellcrank to be sufficient for C_T values up to 107 (figures 30 through 33). At 9,500 feet pressure altitude, the new bellcrank increased the HH-53C's capability by approximately 4,500 pounds. The new bellcrank will prevent any tail rotor control problems for the present aircraft limits. It should be utilized to prevent lack of tail rotor control from limiting aircraft performance. (R 3)

During all tethered hover tests, the helicopter's handling and control response were satisfactory. To obtain referred performance data, rotor speed ranged from 95 to 105 percent. No control response problem was encountered even at the relatively low rotor speed of 94 percent. However, at rotor speeds below 100 percent, control response was sluggish and consequently more fatiguing to the pilot when trying to maintain a stable hover. When operating at rotor speeds below 100 percent, collective and tail rotor mechanical limits were occasionally reached. To maintain a more normal control response and insure full utilization of available engine power without being limited by a mechanical control stop a rotor speed of 105 percent should be used for high altitude, heavy gross weight hover operations. (R 2)

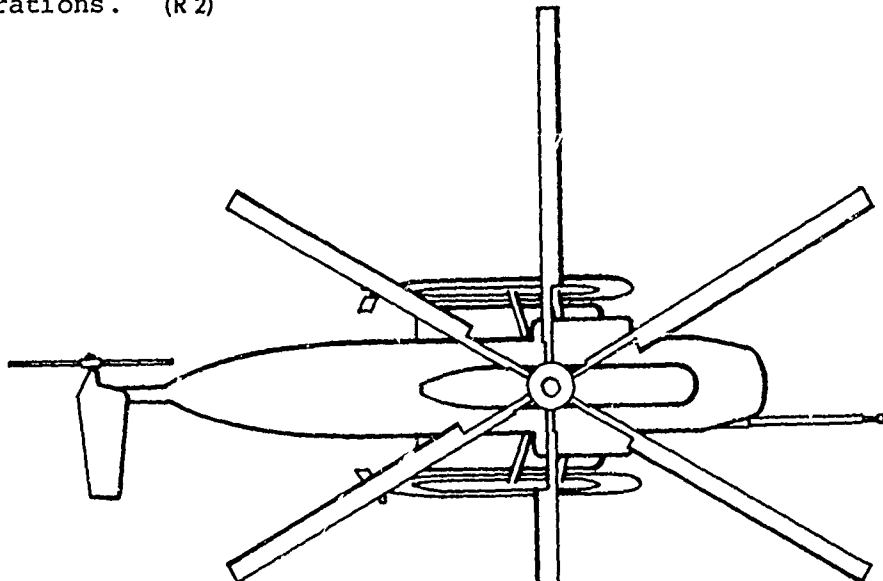

CONCLUSIONS AND RECOMMENDATIONS

The HH-53C helicopter's hover and takeoff performance were satisfactory during high altitude testing. Operating at 105-percent rotor speed at high altitude, heavy gross weight combinations provided a more rapid response of the aircraft to control inputs than operation at 100 percent where control response was somewhat sluggish. In addition, it provided increased performance (more power available), avoided reaching mechanical control stops (collective or tail rotor) which would limit performance, and lowered cruise guide readings. The new tail rotor bellcrank increased the HH-53C lift capability approximately 4,500 pounds by preventing lack of tail rotor authority from limiting aircraft performance.


1. The hover data presented in this report should be used to update the HH-53C Flight Manual (page 2).
2. A rotor speed of 105 percent should be used for high altitude, heavy gross weight combinations (pages 3, 4, and 5).
3. The new tail rotor bellcrank should be incorporated to prevent the lack of tail rotor control from limiting the aircraft's performance (page 5).

Maximum takeoff performance over a 50-foot obstacle was obtained by climbing at approximately 25 knots. However, a compromise between performance and safety dictated the use of 35 knots.

4. Takeoff charts should be based on 35-knot climbout speeds (page 3).

Height velocity tests have never been conducted at weights greater than 37,000 pounds gross weight or at high altitude.

5. Single engine out performance should be defined at high altitudes (page 3).

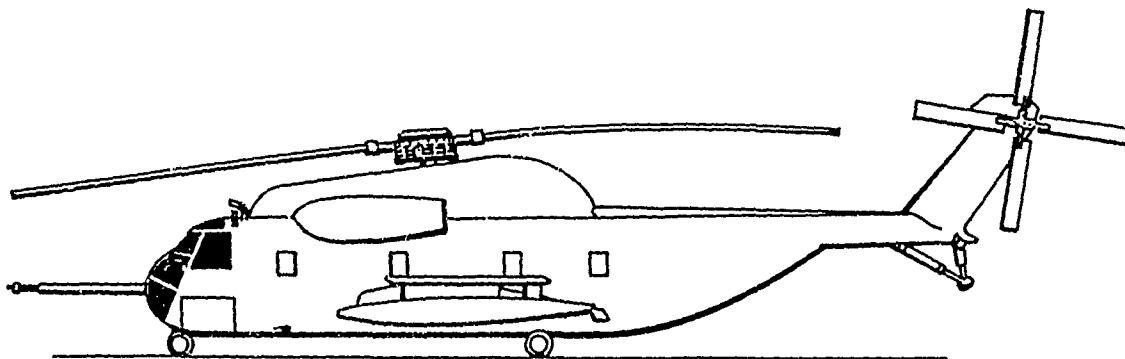

APPENDIX I

DATA ANALYSIS METHODS AND TEST DATA

GENERAL

Dimensional analysis of the major items affecting helicopter performance yields several sets of dimensionless variables which can be used to present performance data in a useful nondimensional form. These variables are defined as follows:

$$C_p = \frac{\text{SHP} \times 550}{\rho A (\Omega R)^3}$$

$$C_T = \frac{W}{\rho A (\Omega R)^2}$$

$$M_{TIP} = \frac{\Omega R}{38.967 \sqrt{T_a}}$$

Where SHP is in foot-pound x 550 per second, ρ is the air density in slugs per foot cubed, A is the rotor disc area in feet squared, Ω is the rotor angular velocity in radians per second, R is the rotor radius in feet, and T_a is the temperature of the ambient air in degrees Kelvin.

POWER DETERMINATION

The HH-53C employed an electronic torque monitoring system to measure the percent of torque being applied by each engine to the main transmission. A torque reading of 100 percent was equivalent to 3,200 SHP. The torque sensing system was located at the engine input section to the nose gearbox and was made up of the torque shaft, torque pickup, the phase detector, and the torque indicator. The torque sensor shaft consisted of an inner and outer shaft arranged so that the inner shaft was subjected to the power turbine load. The major diameter on each shaft was machined to contain 72 teeth. This portion of the shaft was the exciter. The torque pickup was a coil installed in the torque tube opposite the exciter.

The system measured torque by measuring the twist in the shaft connecting the engine to the load. To measure this twist a pickup was installed in the torque tube opposite a pair of gear teeth on the rotating shaft. As the shaft rotated, two ac signals were induced in the pickup coils. As the torque in the shaft increased, the two sets of teeth were displaced from each other as the shaft twisted and the phase angle difference between the two ac voltages changed. The output of the pickup coils was fed into a phase detector that electronically measured the phase angle change. This phase angle was then converted to an output

voltage proportional to torque. Test SHP was determined from inflight torquemeter readings and rotor rpm using the following equation.

$$\frac{\text{SHP}}{\text{engine}} = \frac{(13,600) (\% \text{ rpm}) (\% Q) (1,235)}{5,250}$$

Where Q is percent torque reading from the aircraft's instruments.

SAWTOOTH CLIMBS

The data presented in figure 21 of this appendix are the test day observed rates of climb corrected to tape line rates of climb using the following equation:

$$R/C_t = \frac{dh}{dt} \times \frac{T_{a_t}}{T_{a_s}}$$

where R/C_t was the tapeline rate of climb in feet per minute, dh/dt being the slope of the pressure altitude versus time curve in feet per minute. T_{a_t}/T_{a_s} was the ratio of the test day ambient temperatures to the standard day temperature for the test altitude.

CONTROL POSITIONS

The following controls and their positions were monitored during the tail rotor evaluation portion of these tests: lateral and longitudinal cyclic stick, collective stick, and rudder pedals. Sensors were located in the "broom closet" located on the aft side of the bulkhead dividing the cockpit and cargo area. These pickups only registered control inputs. The actual control output was a function of the pilot input, collective-rudder pedal coupling, and the automatic flight control system (AFCS). Consequently, the following additional parameters were also monitored: the AFCS servo output, tail rotor blade pitch angle and the tail rotor torque.

The AFCS's input occurs in series with pilot's input and does not necessarily show as a control position change. It is possible for the pilot to have 20-percent left rudder pedal travel remaining, yet have the tail rotor blade angle at the limit (+27.25 degrees). This phenomenon occurs in the data presented in the tail rotor evaluation. It is a result of the collective-rudder coupling and AFCS authority. Figure 34 shows how collective position can affect rudder pedal position and tail rotor blade angle.

Arbitrarily, 100-percent right rudder pedal was defined as that position where collective was full down and tail rotor blade angle was -3.5 degrees with AFCS off. Left rudder (0 percent) was defined at full up collective with tail rotor blade angle at +27.25 degrees.

Figure 35 shows this situation: full right rudder is applied (full pedal travel; collective control is full down; now, when the collective control is raised, the rudder pedal travel available increases, although the tail rotor blade angle actually decreases. Figure 36 shows the converse of this (up collective, left pedal).

FH-53G USAF S/N 68-10554

T64-GE-7 ENGINES

10 FOOT WHEEL HEIGHT

450 GALLON FUELTANKS INSTALLED

- NOTE: 1. ALL DATA WITHOUT EAPS
OBTAINED FROM EARLIER TESTS REF F-3 ETC-TR-70-8
2. SHADED SYMBOLS DENOTE
FREE FLIGHT HOVER
3. TAILED SYMBOLS DENOTE
HIGH ALTITUDE HOVER WITH
EAPS INSTALLED

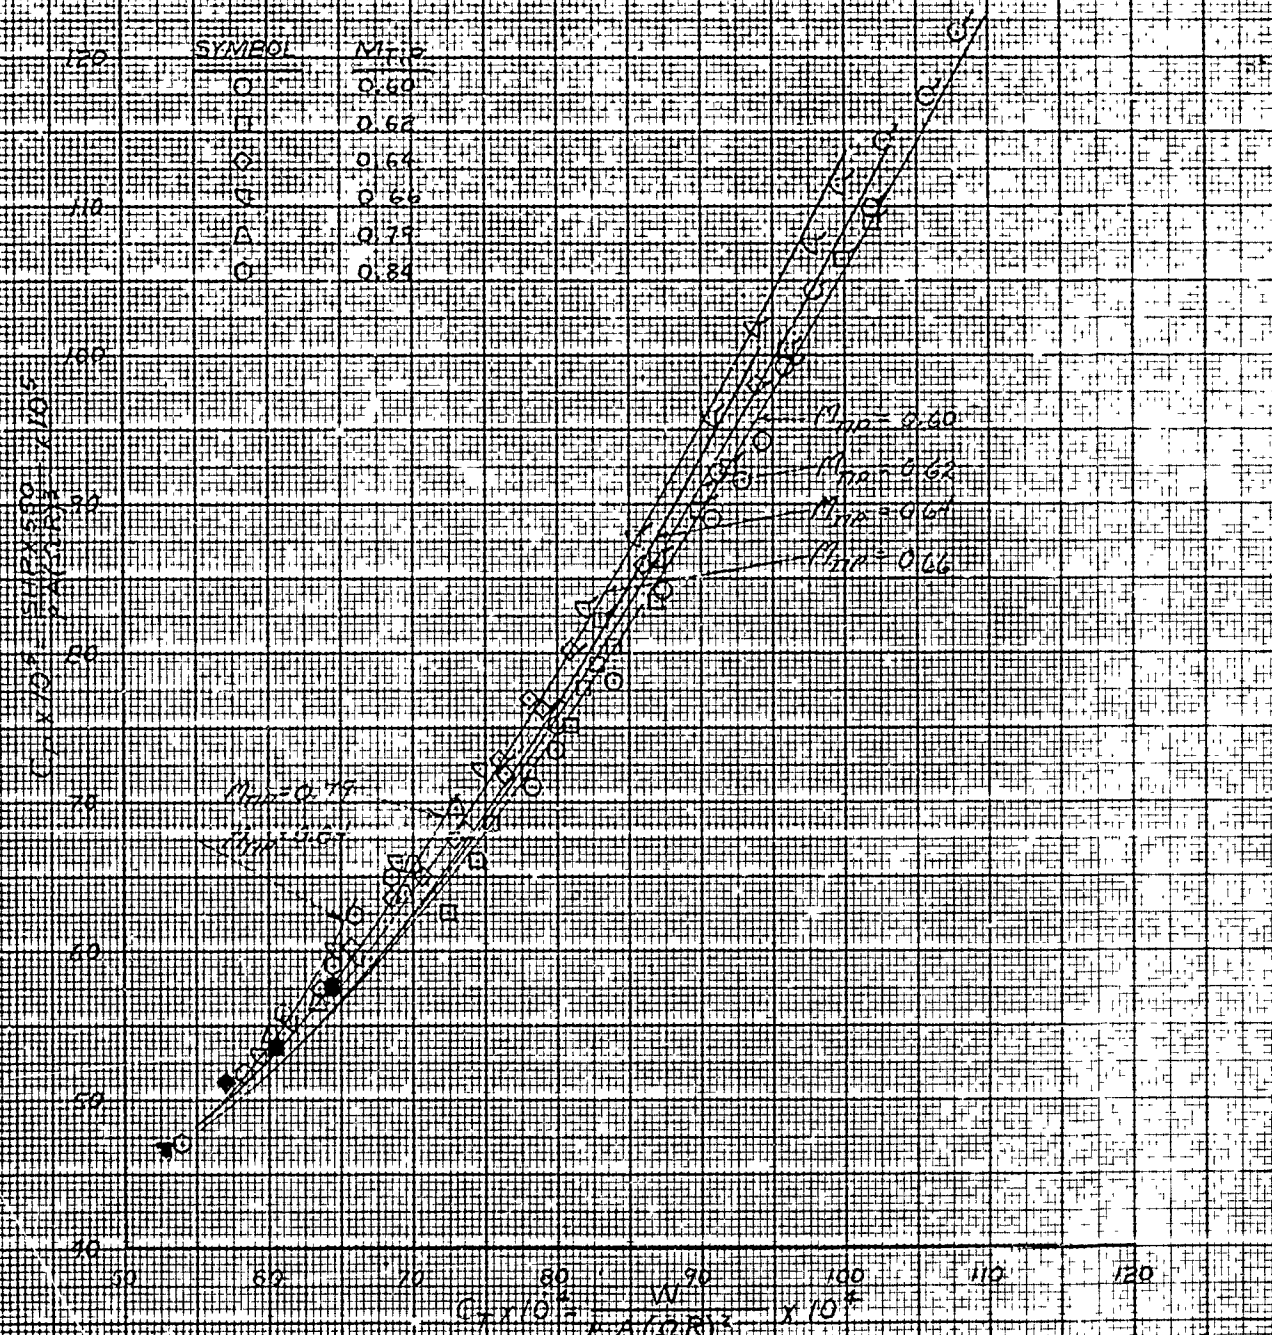



Figure 1

Nondimensional Hovering Performance

450 GALLON TIPTANKS INSTALLED

HIGH ALTITUDE HOVER WITH
FAPS INSTALLED

SYMBOL	MEAN
O	0.60
H	0.42
G	0.64
U	0.46
A	0.79
D	0.34

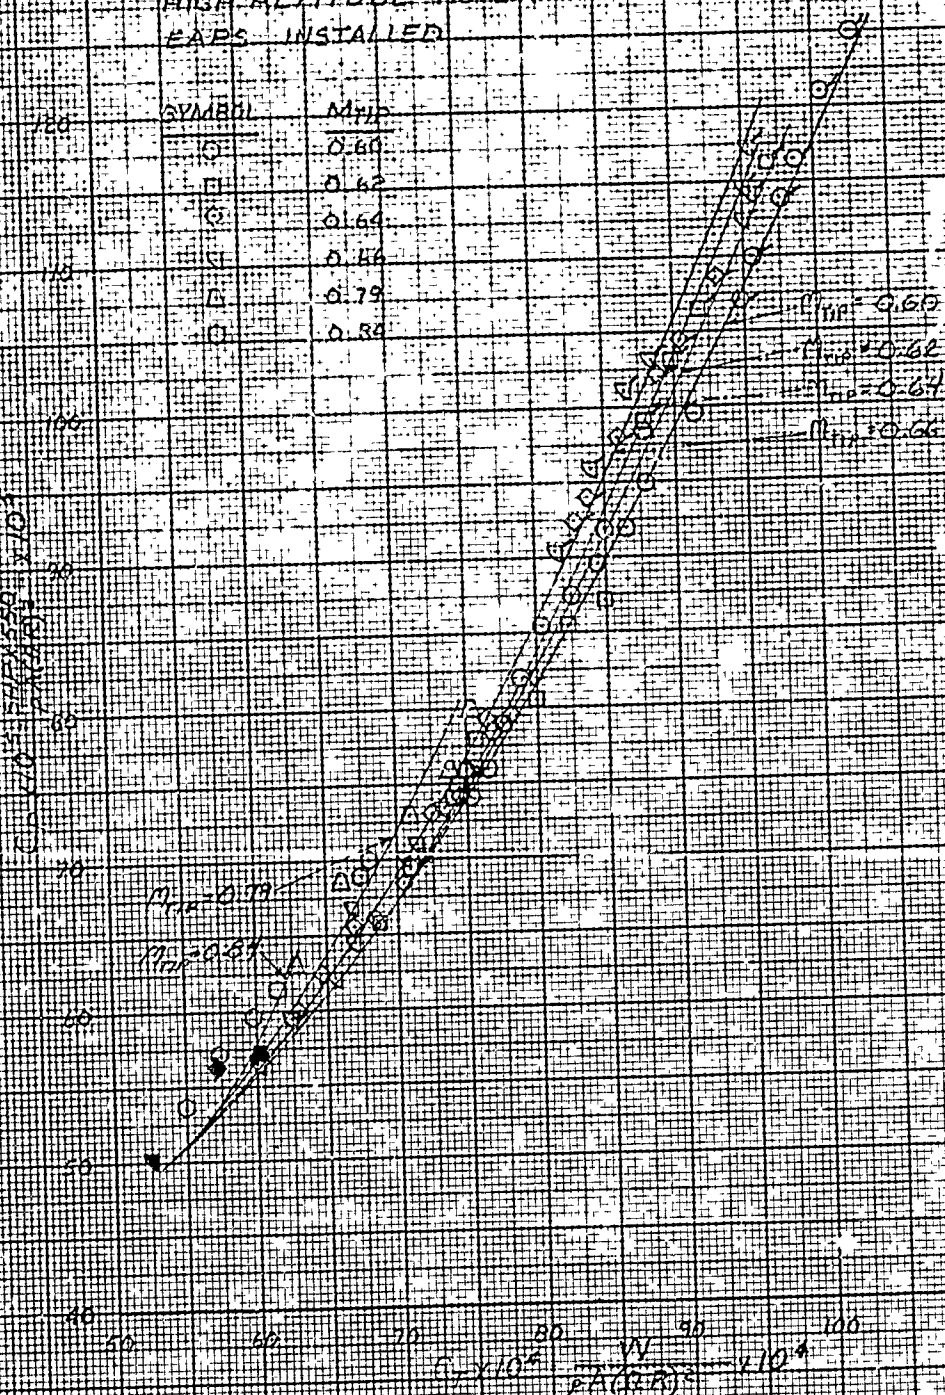

FRANK C

Non-dimensional Flexing performance

HH 53C USAF SIN 68-10354


T64-GE-7 ENGINES

47 FOOT WHEEL HEIGHT

450 GALLON TILTANKS INSTALLED

NOTE: 1. ALL DATA WITHOUT FAPE
OBTAINED FROM EARLIER TESTS *
2. SHADED SYMBOLS DENOTE
FREE FLIGHT HOVER
3. TAILED SYMBOLS DENOTE
HIGH ALTITUDE HOVER WITH
FAPE INSTALLED

SYMBOL	MTIP
○	0.60
◐	0.62
◑	0.64
◒	0.66
◓	0.79
◔	0.84

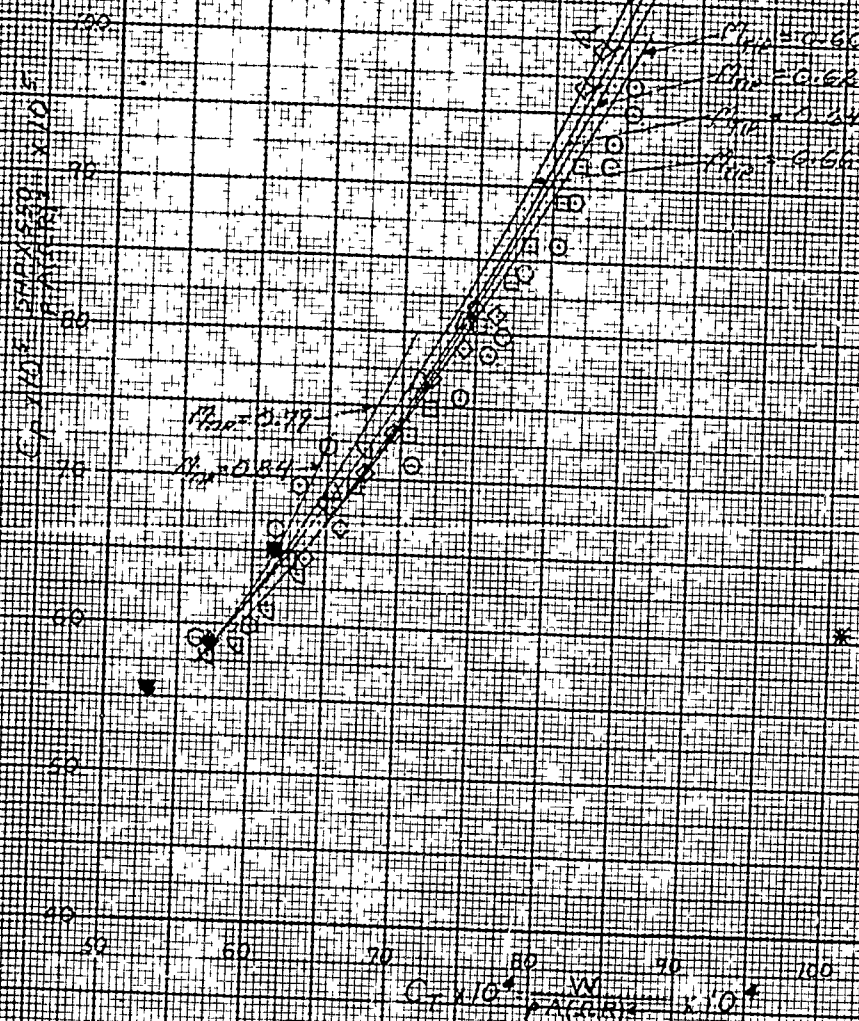

* REF L 3
FIG-TR-70-B

Figure 3. Non-dimensional Hovering Performance

HH-53C USAF SIN 68-10354

T64-GE-7 ENGINES

30 FOOT WHEEL HEIGHT

450 GALLON TANKS INSTALLED

NOTE: 1. ALL DATA WITHOUT EAPS
OBTAINED FROM EARLIER TESTS *
2. SHADED SYMBOLS DENOTE
FREE FLIGHT HOVER
3. TAILED SYMBOLS DENOTE
HIGH ALTITUDE HOVER WITH
EAPS INSTALLED

SYMBOL	MPH
○	0.60
□	0.62
◇	0.64
▽	0.66
△	0.79
●	0.84

CL X 10⁻⁵ SHIP SPEED X 10⁵

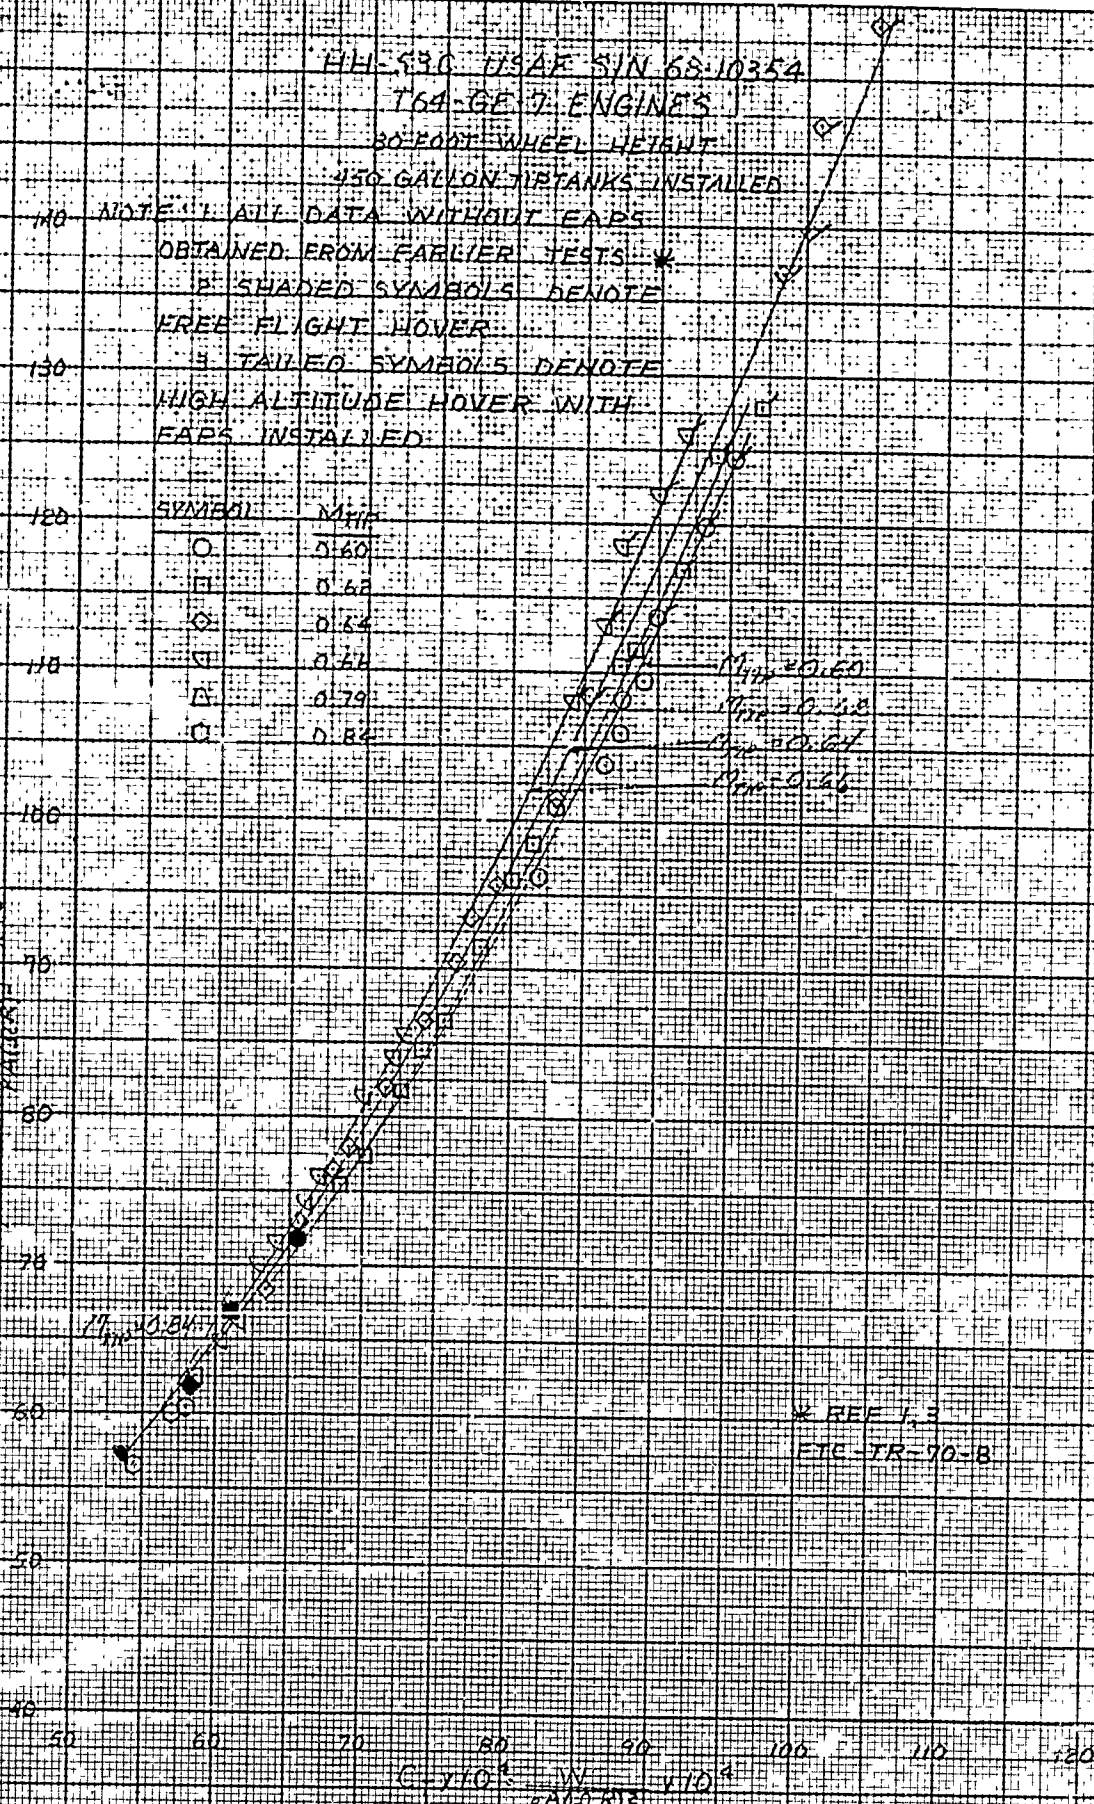


Figure 4 Nondimensional Hovering Performance

13

HH-53C USAF SYN 68-10354

764-GE-7 ENGINES

100-FOOT WHEEL HEIGHT

450-FOOT WHEEL HEIGHT

NOTE: ALL DATA WITHOUT EAPS OBTAINED

FROM EARLIER TEST REF 1, 3 & 4

SHADED SYMBOLS DENOTE

FREE FLIGHT HOVER

3-TAILED SYMBOLS DENOTE

HIGH ALTITUDE HOVER WITH

EAPS INSTALLED

SYMBOL	NOTE
○	0.54
○	0.56

$M_{TWR} = 0.64$

$M_{TWR} = 0.66$

SYMBOLS
UNSHADED
3-TAILED


* FIG-TR 10-B


30 40 50 60 70 80 90 100 110 120


$C_{X10K} \times 10^4$

REMARKS

Figure 6 Nondimensional Hovering Performance

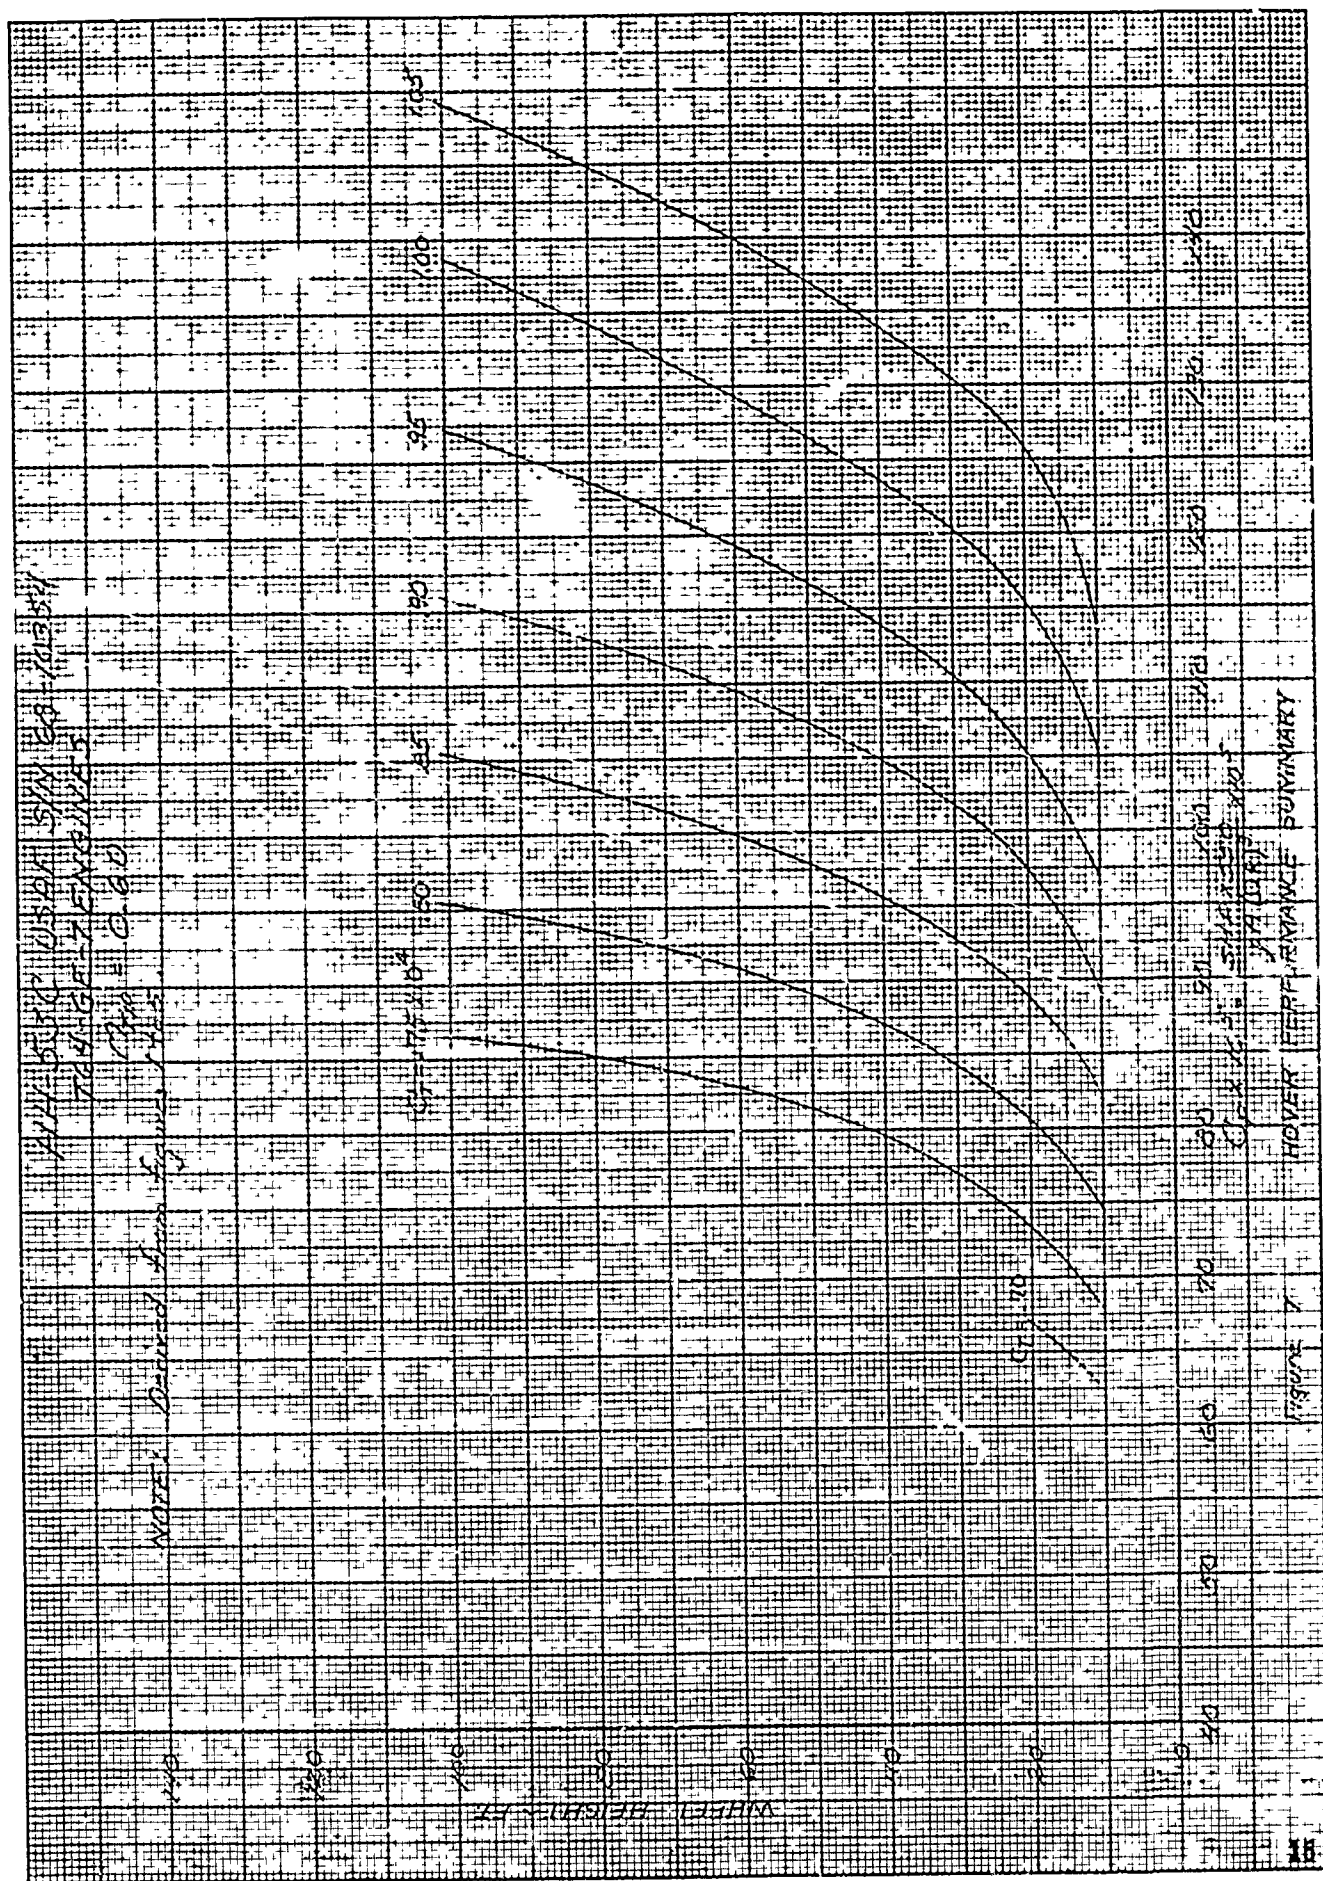

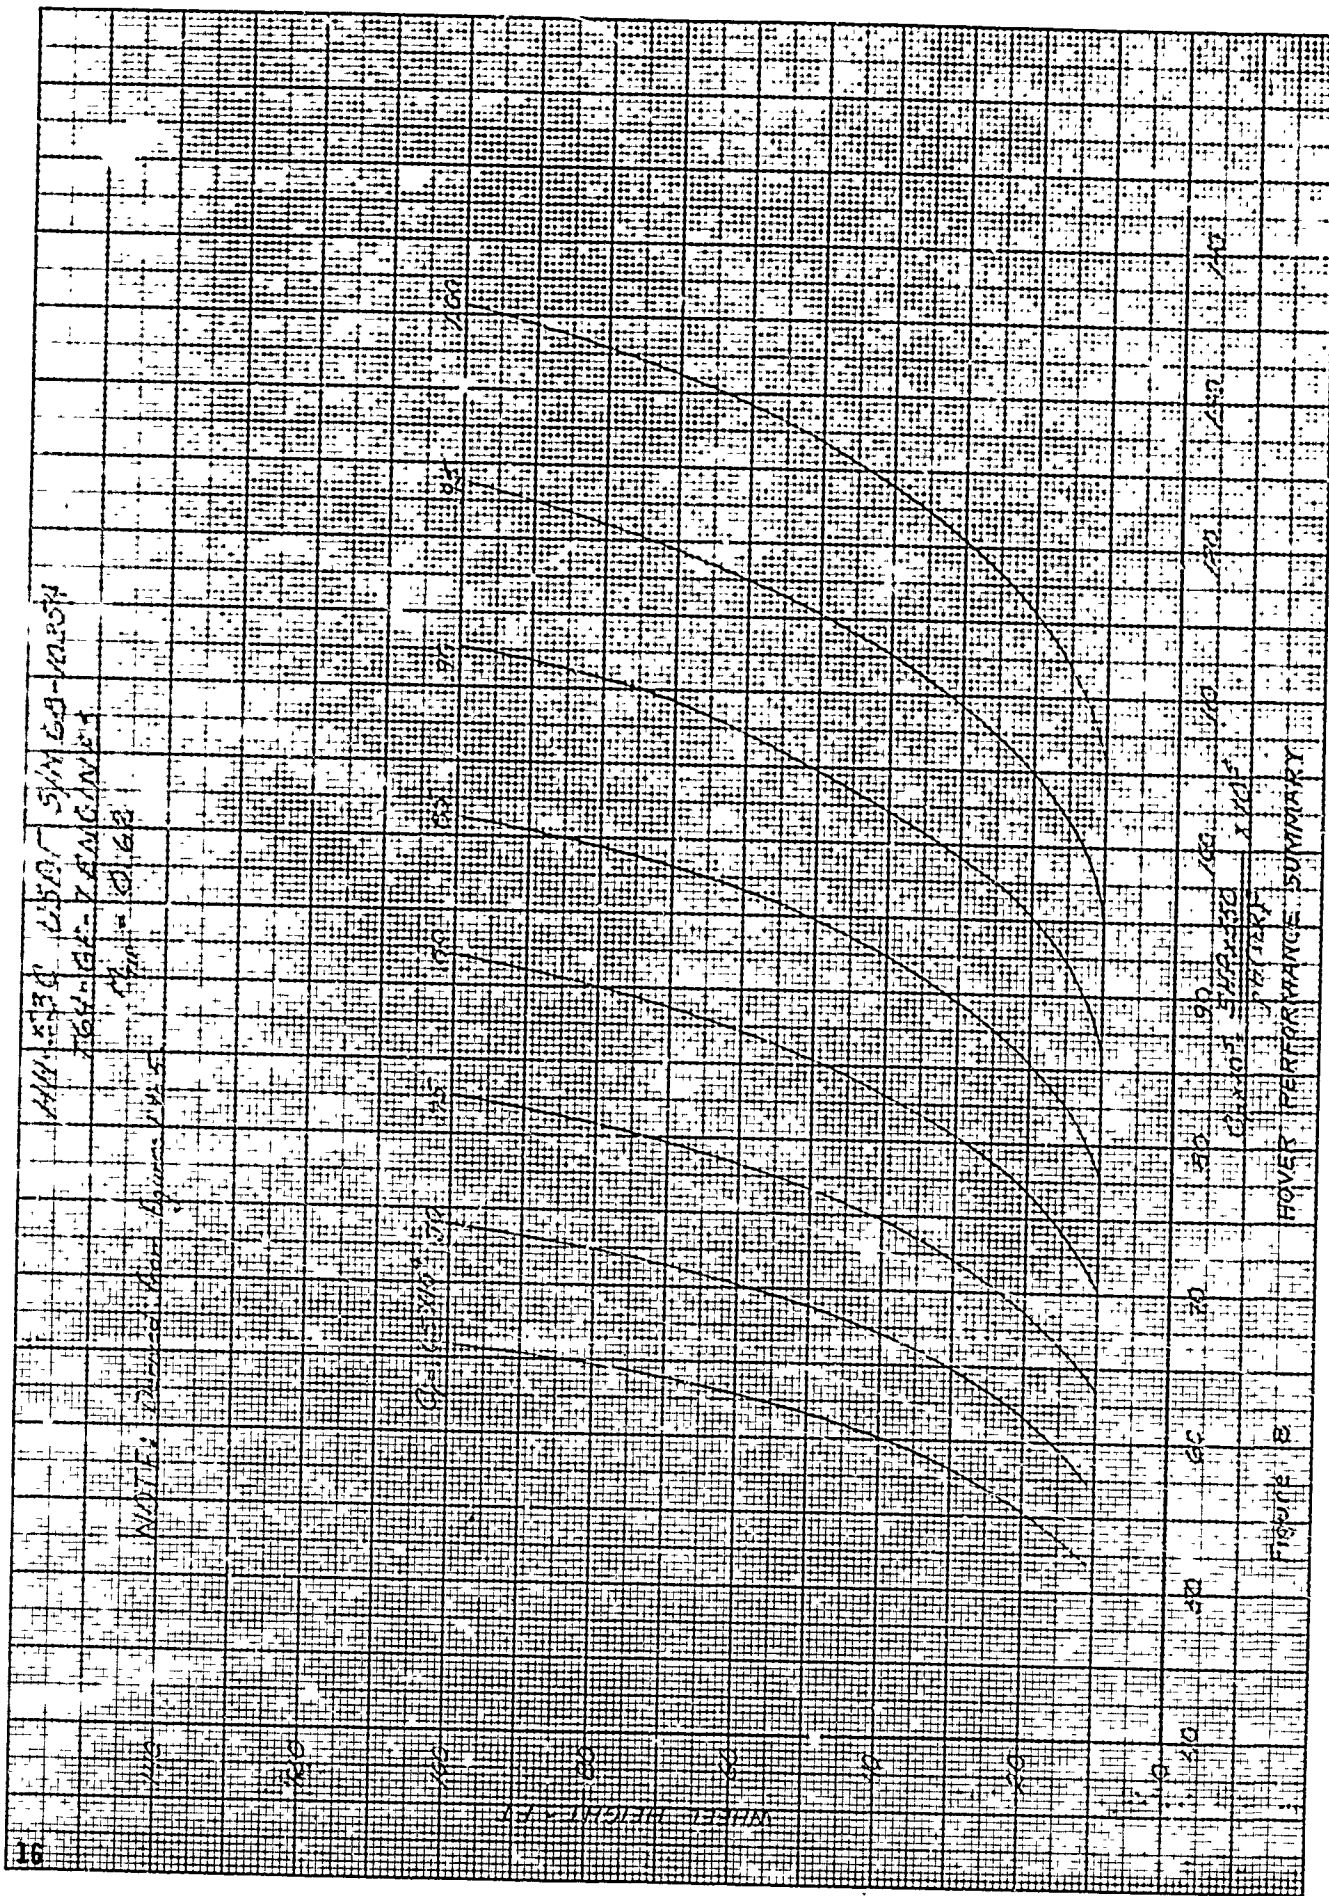


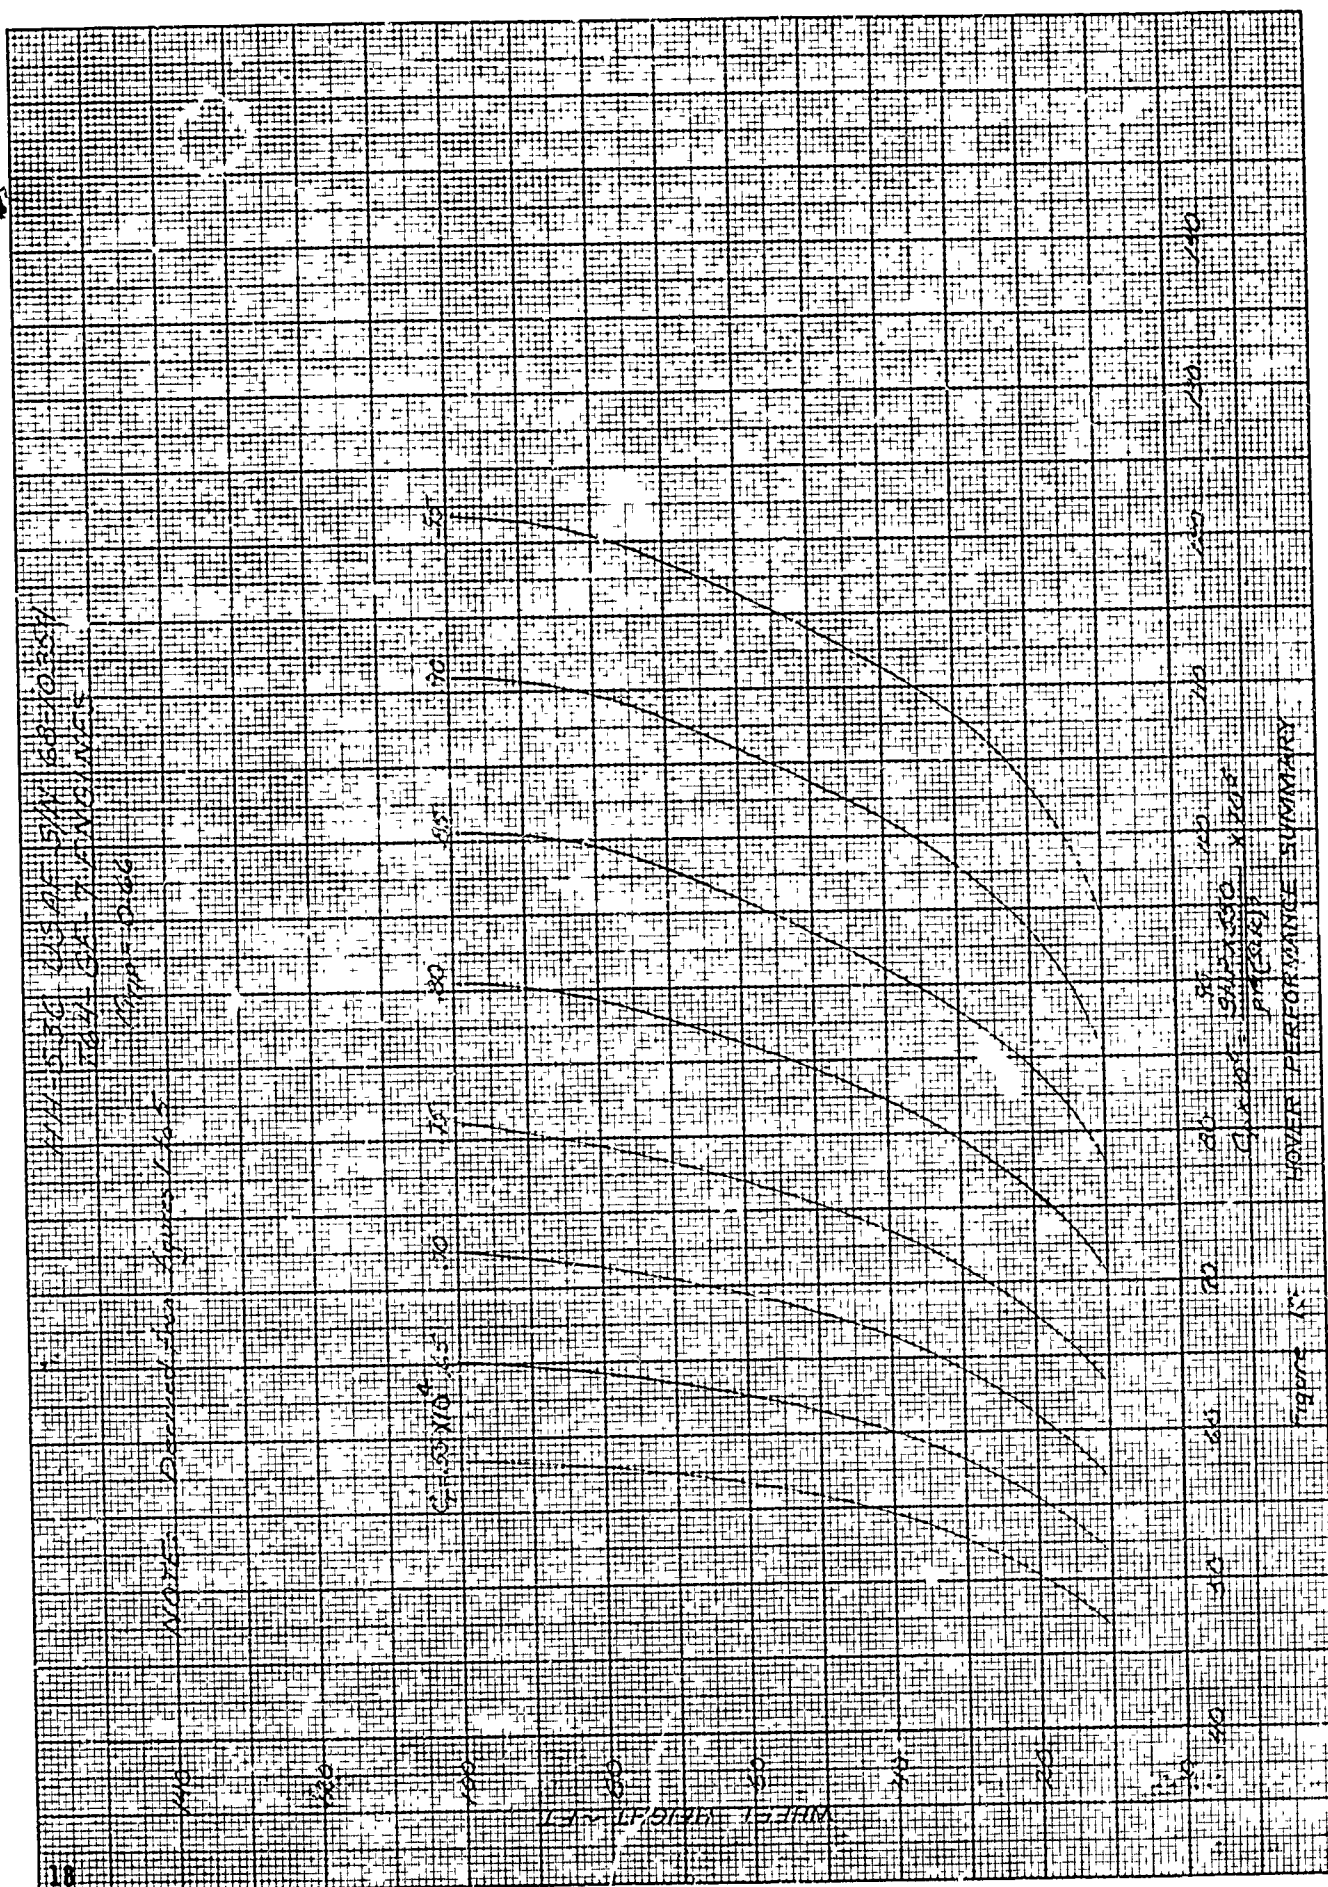

HH-53C USAF SIN 68-10354
T64-GE-7 ENGINES
 $ACF = 21 \times 10^{-5}$

NOTES:

ROTOR SPEED 194 RPM
LANDING GEAR DOWN

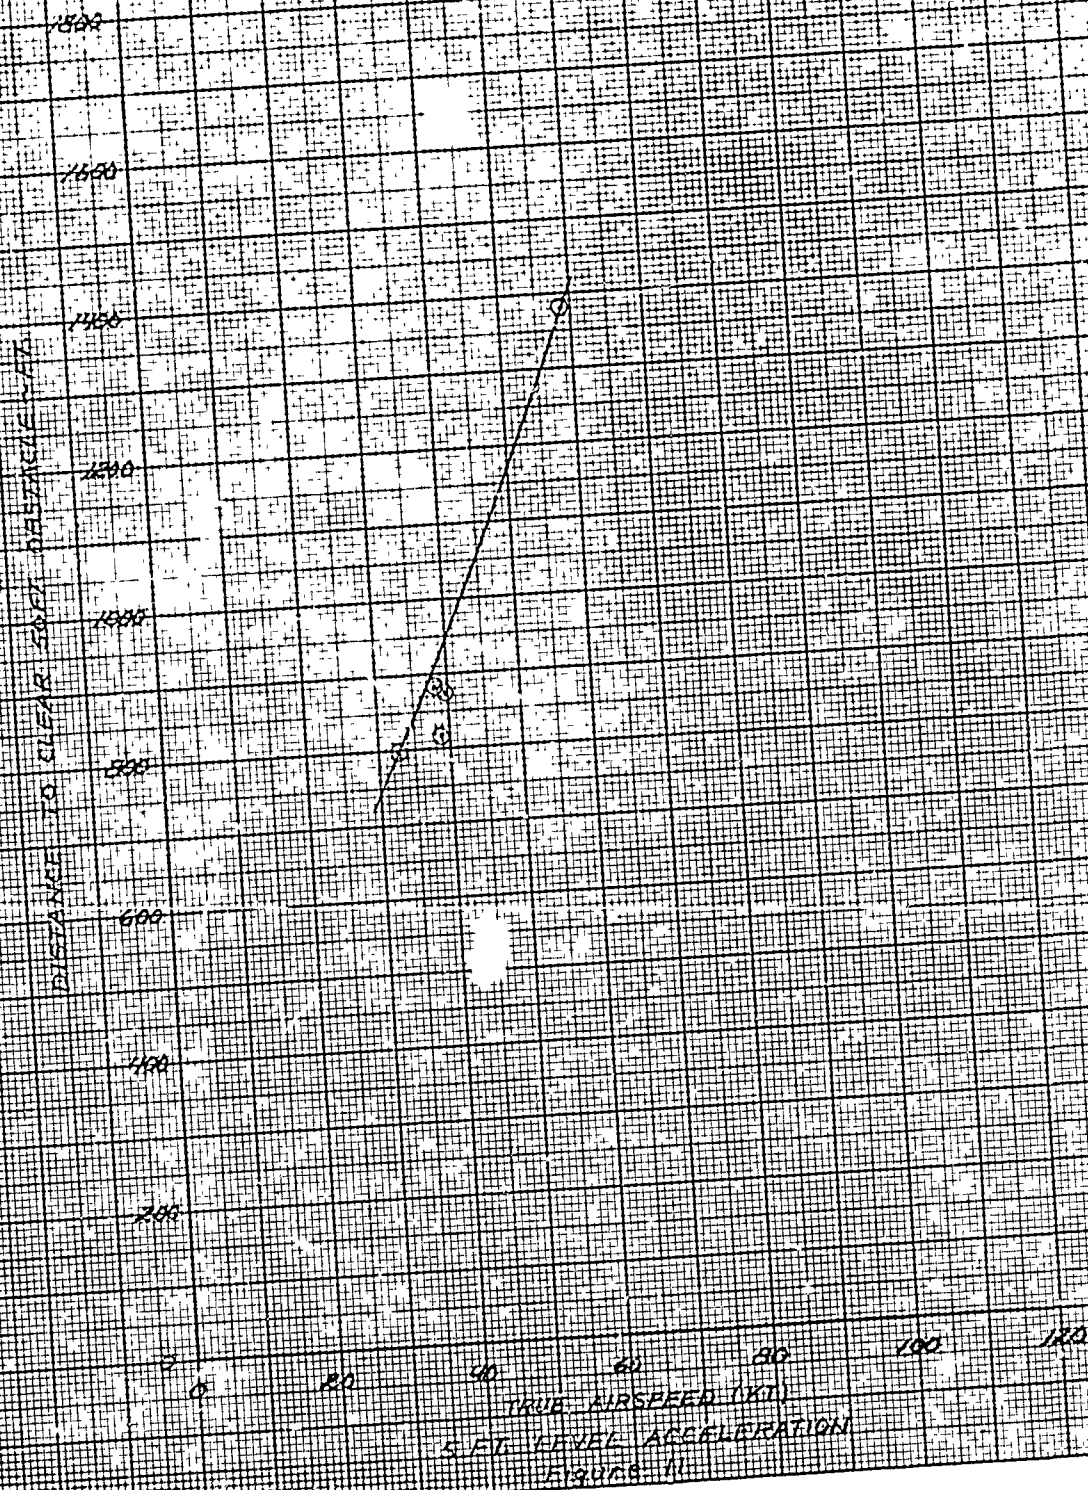

HH-53C USAF SIN 68-10354
T64-GE-7 ENGINES
 $AC_0 = 28 \times 10^{-6}$

NOTES:

ROTOR SPEED 196 RPM
LANDING GEAR DOWN

DISTANCE TO CLEAR 50 FT OBSTACLE - FT

1500

1400

1300

1200

1000

800

600

400

200

0

5

20

40

60

80

100

120

TRUE AIRSPEED (KT)

5 FT LEVEL ACCELERATION

FIGURE 12

HH-53C USAF SIN 68-10354


T62-GE-7 ENGINES

$ACD = 30.5 \times 10^{-6}$

NOTES:

ROTOR SPEED = 196 RPM

LANDING GEAR DOWN

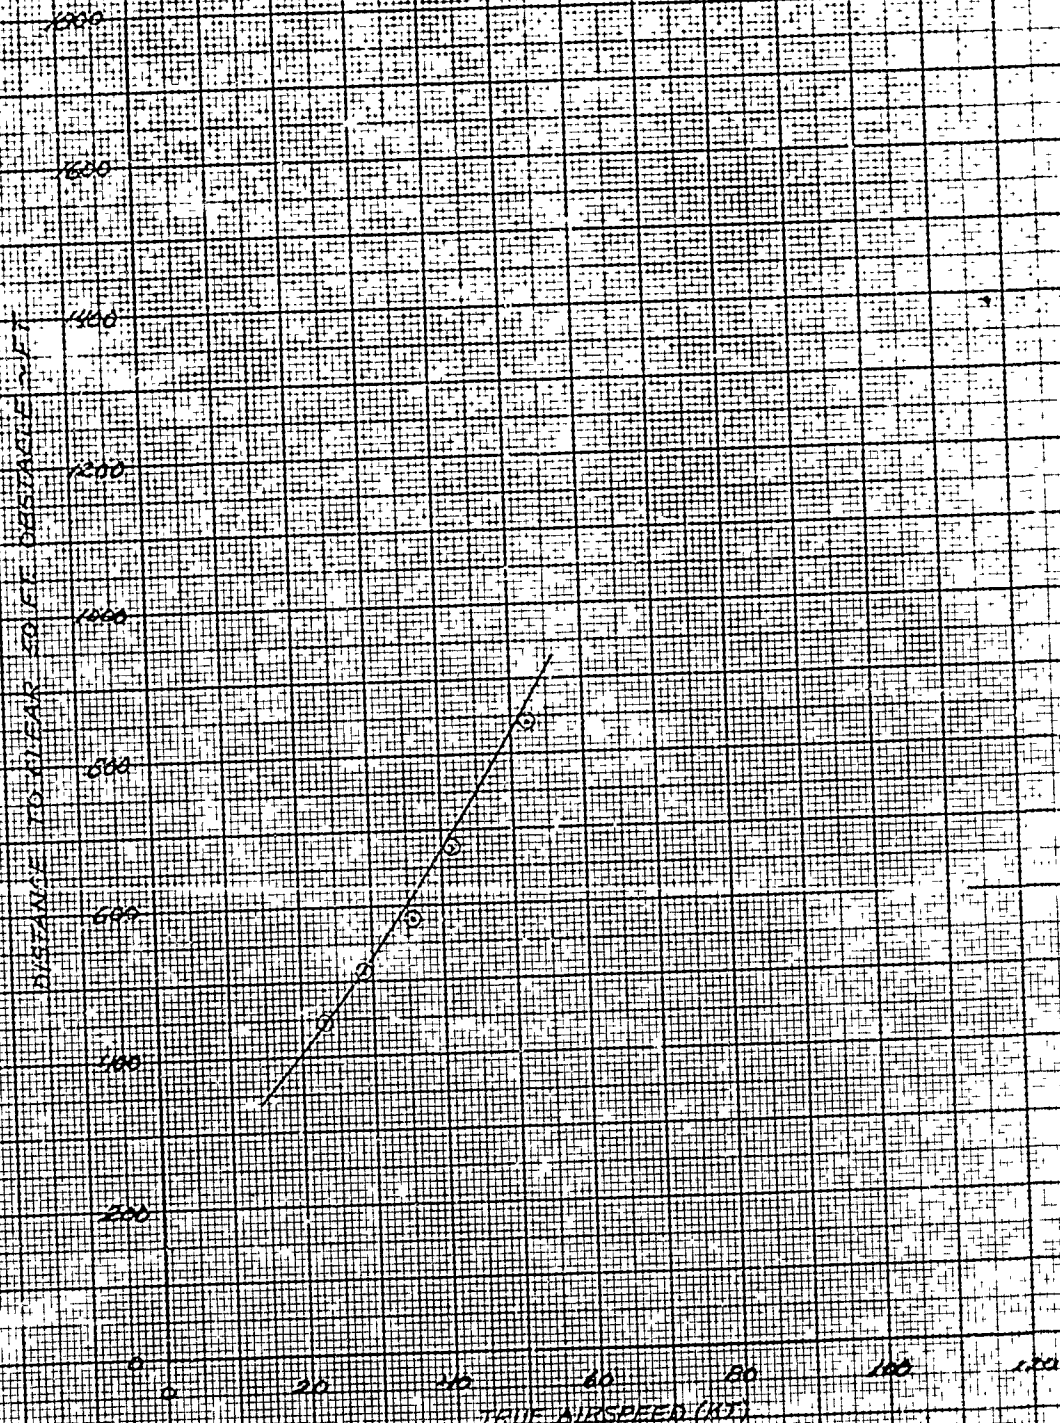

5.1 - LEVEL ACCELERATION

Figure 13

HH-53C USAF SIN 68-10854

T64-GE-7 ENGINES

ACF = 33.8 X 10⁶

NOTES:

RYTOR SPEED = 196 RPM

LANDING GEAR DOWN

DISTANCE TO CLEAR 50 FT OBSTACLE (FT)

1500

1600

1400

1200

1000

800

600

400

200

0

0

20

40

60

80


100

120

TRUE AIRSPEED (KT)

5 FT LEVEL ACCELERATION


Figure 14

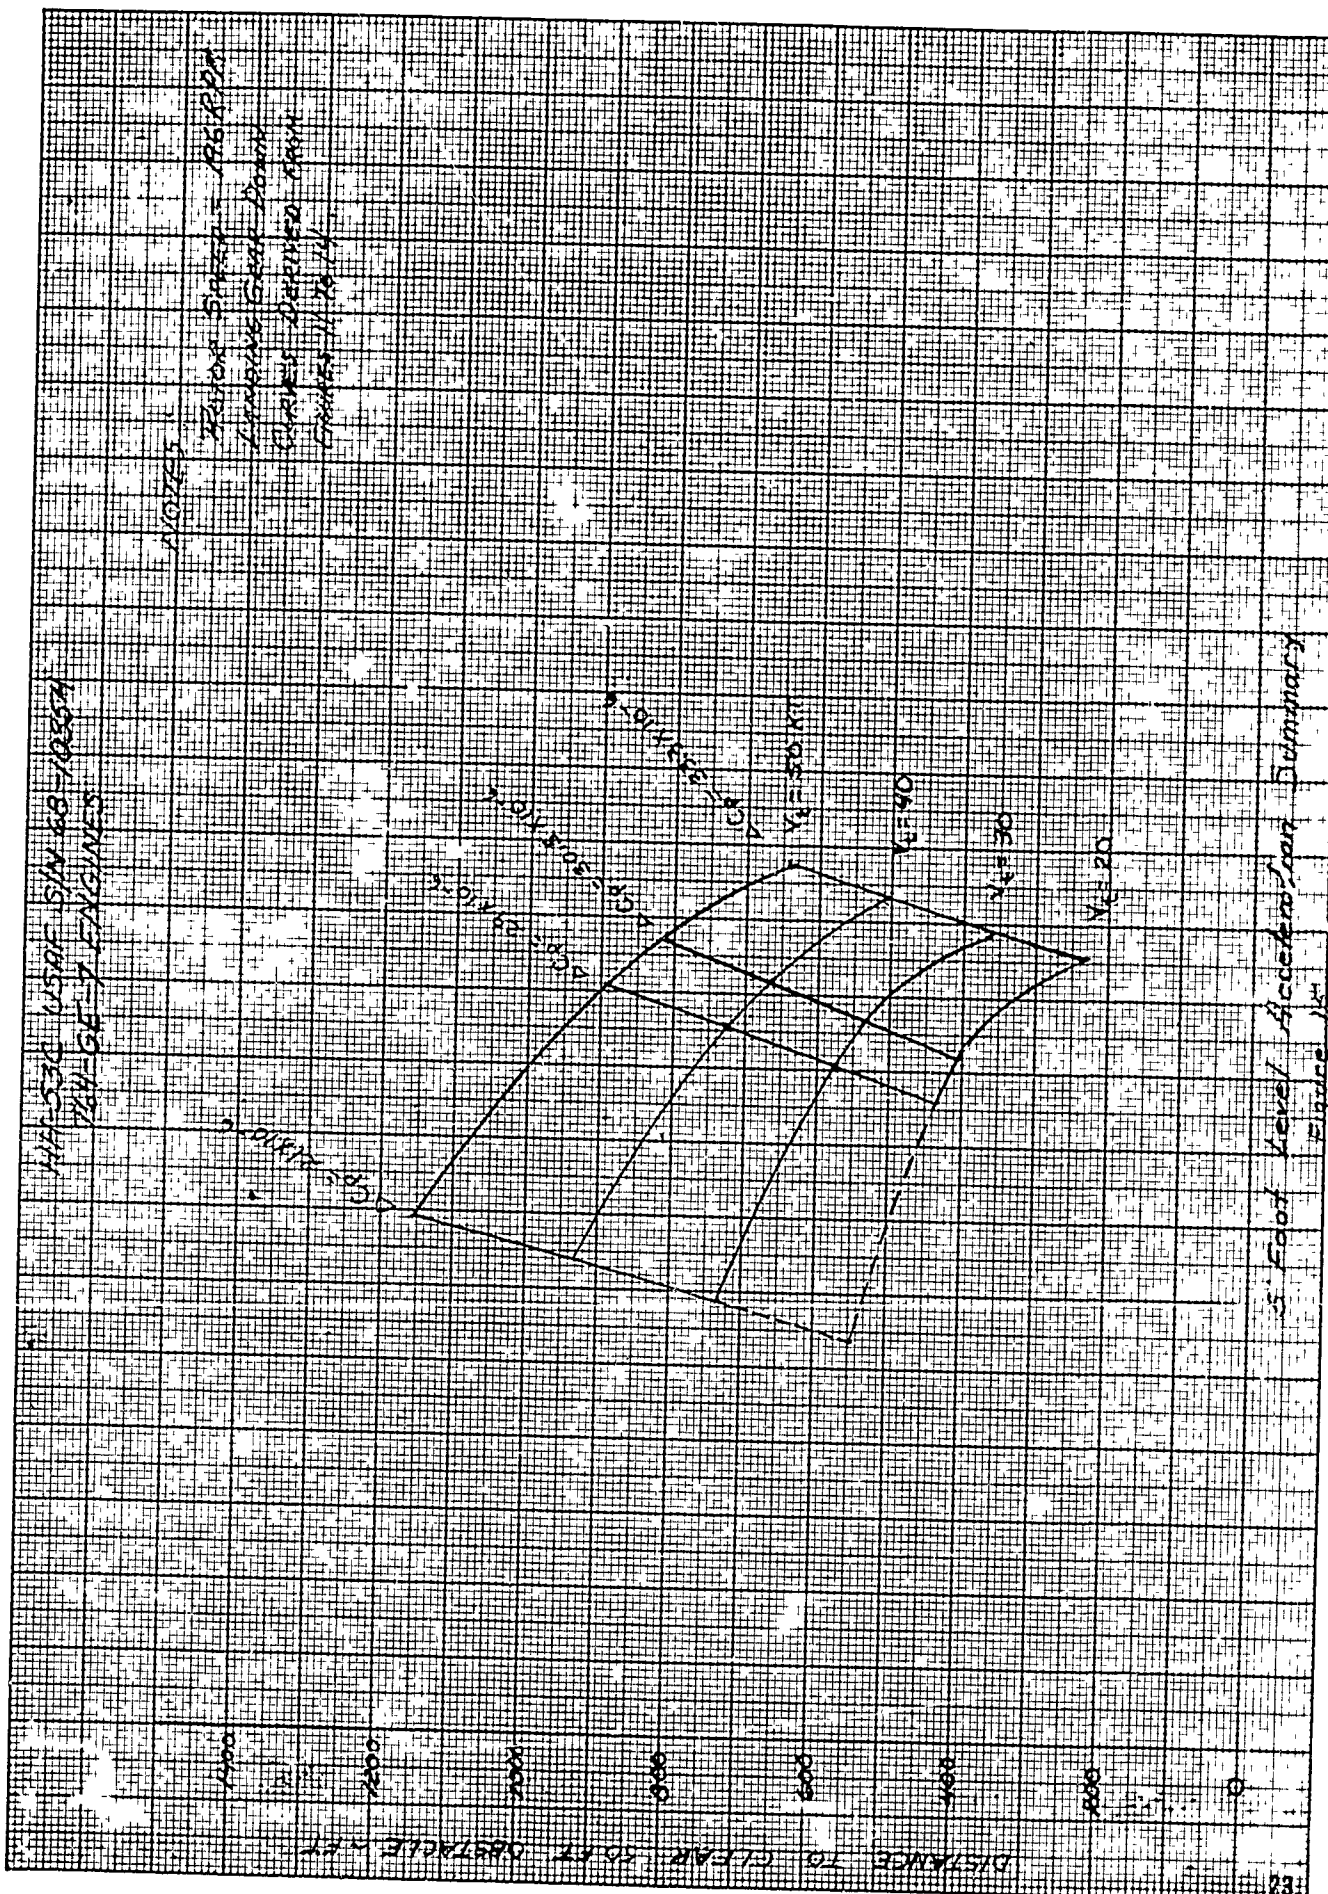

HH-53C USAF SIN 68-10354
 T64-GE-7 ENGINES
 ACP 9.6 X 10⁻⁶

NOTES

ROTOR SPEED: 198 RPM
 LANDING GEAR DOWN

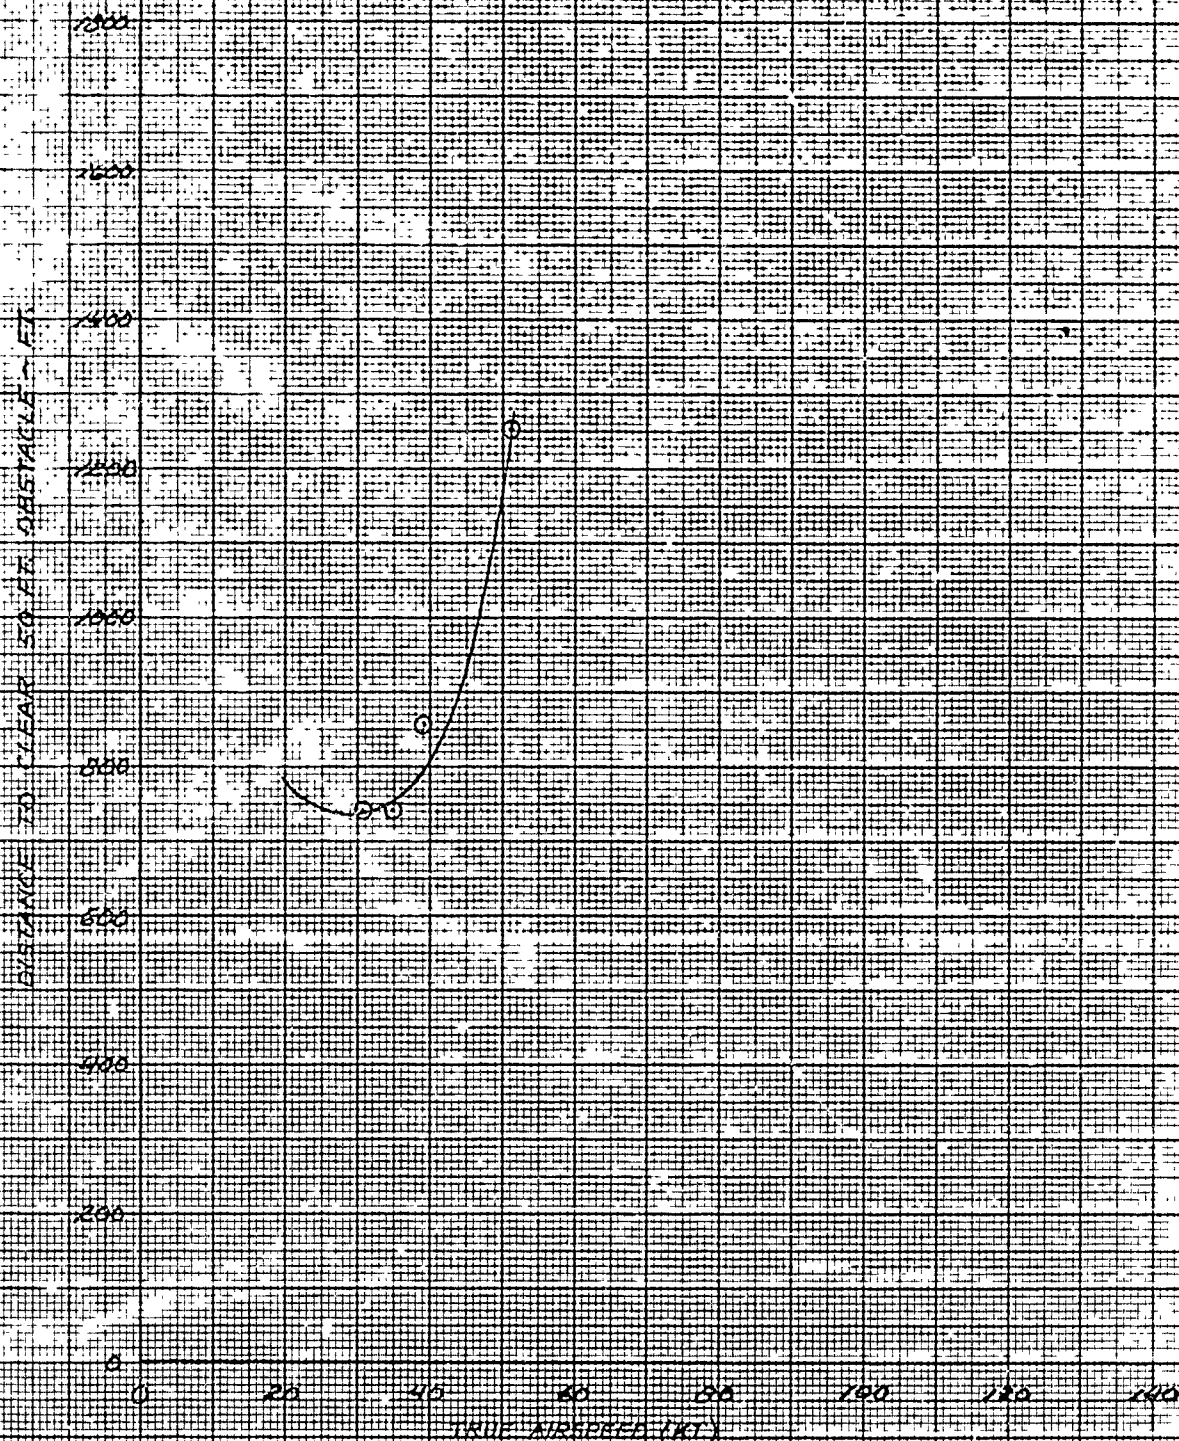

TRUE AIRSPEED (KTS)
 15 FT LEVEL ACCELERATION

Figure 16

HH-53C USAF S/N 68-10354
T64-GE-7 ENGINES
ACF-1341/D-6

NOTES:

ROTOR SPEED: 190 RPM
LANDING GEAR DOWN

DISTANCE TO CLEAR 50 FT OBSTACLE - FT

1600
1400
1200
1000
800
600
400
200
0

0 20 40 60 80 100 120

TRUE AIRSPEED (KTS)

15 FT LEVEL ACCELERATION

Figure 17



HL-53C U.S.A.F. SIN 68-10354

T64-GE-7 ENGINES

$AC = 17.9 \times 10^6$

NOTES

ROTOR SPEED = 198 RPM

LANDING GEAR DOWN

DISTANCE TO CLEAR 50 FT OBSTACLE (FT)

1800

1600

1400

1200

1000

800

600

400

200

0

0

20

40

60

80

100

120

TRUE AIRSPEED (KT)

15 FT LEVEL ACCELERATION

FIGURE 18

HH-53C USAF SIN 68-10358

164-GB-7 ENGINES

ACF-23.3X10³

NOTES

ROTOR SPEED 196 RPM

LANDING GEAR DOWN

DISTANCE TO CLEAR 50-FT OBSTACLE (FEET)

1800

1600

1400

1200

1000

800

600

400

200

0

20

40

60

80

100

120

TRUE AIRSPEED (KTS)

15 FT LEVEL ACCELERATION

Figure 15

HH-53G USAF S/N 68-10354

T64-G-7-ENGINE

Symbol	Avg. Cyl. Temp. (°F)	Avg. Press. (in)	Avg. Ambient Temp. (°C)	Avg. Cyl. Temp. (°F)	Rotor Speed (rpm)
(1)	41500	1000	10.5	340	186 (100%)
(2)	40500	10500	5.0	340	186 (100%)
(3)	41500	10000	14.0	340	186 (105%)

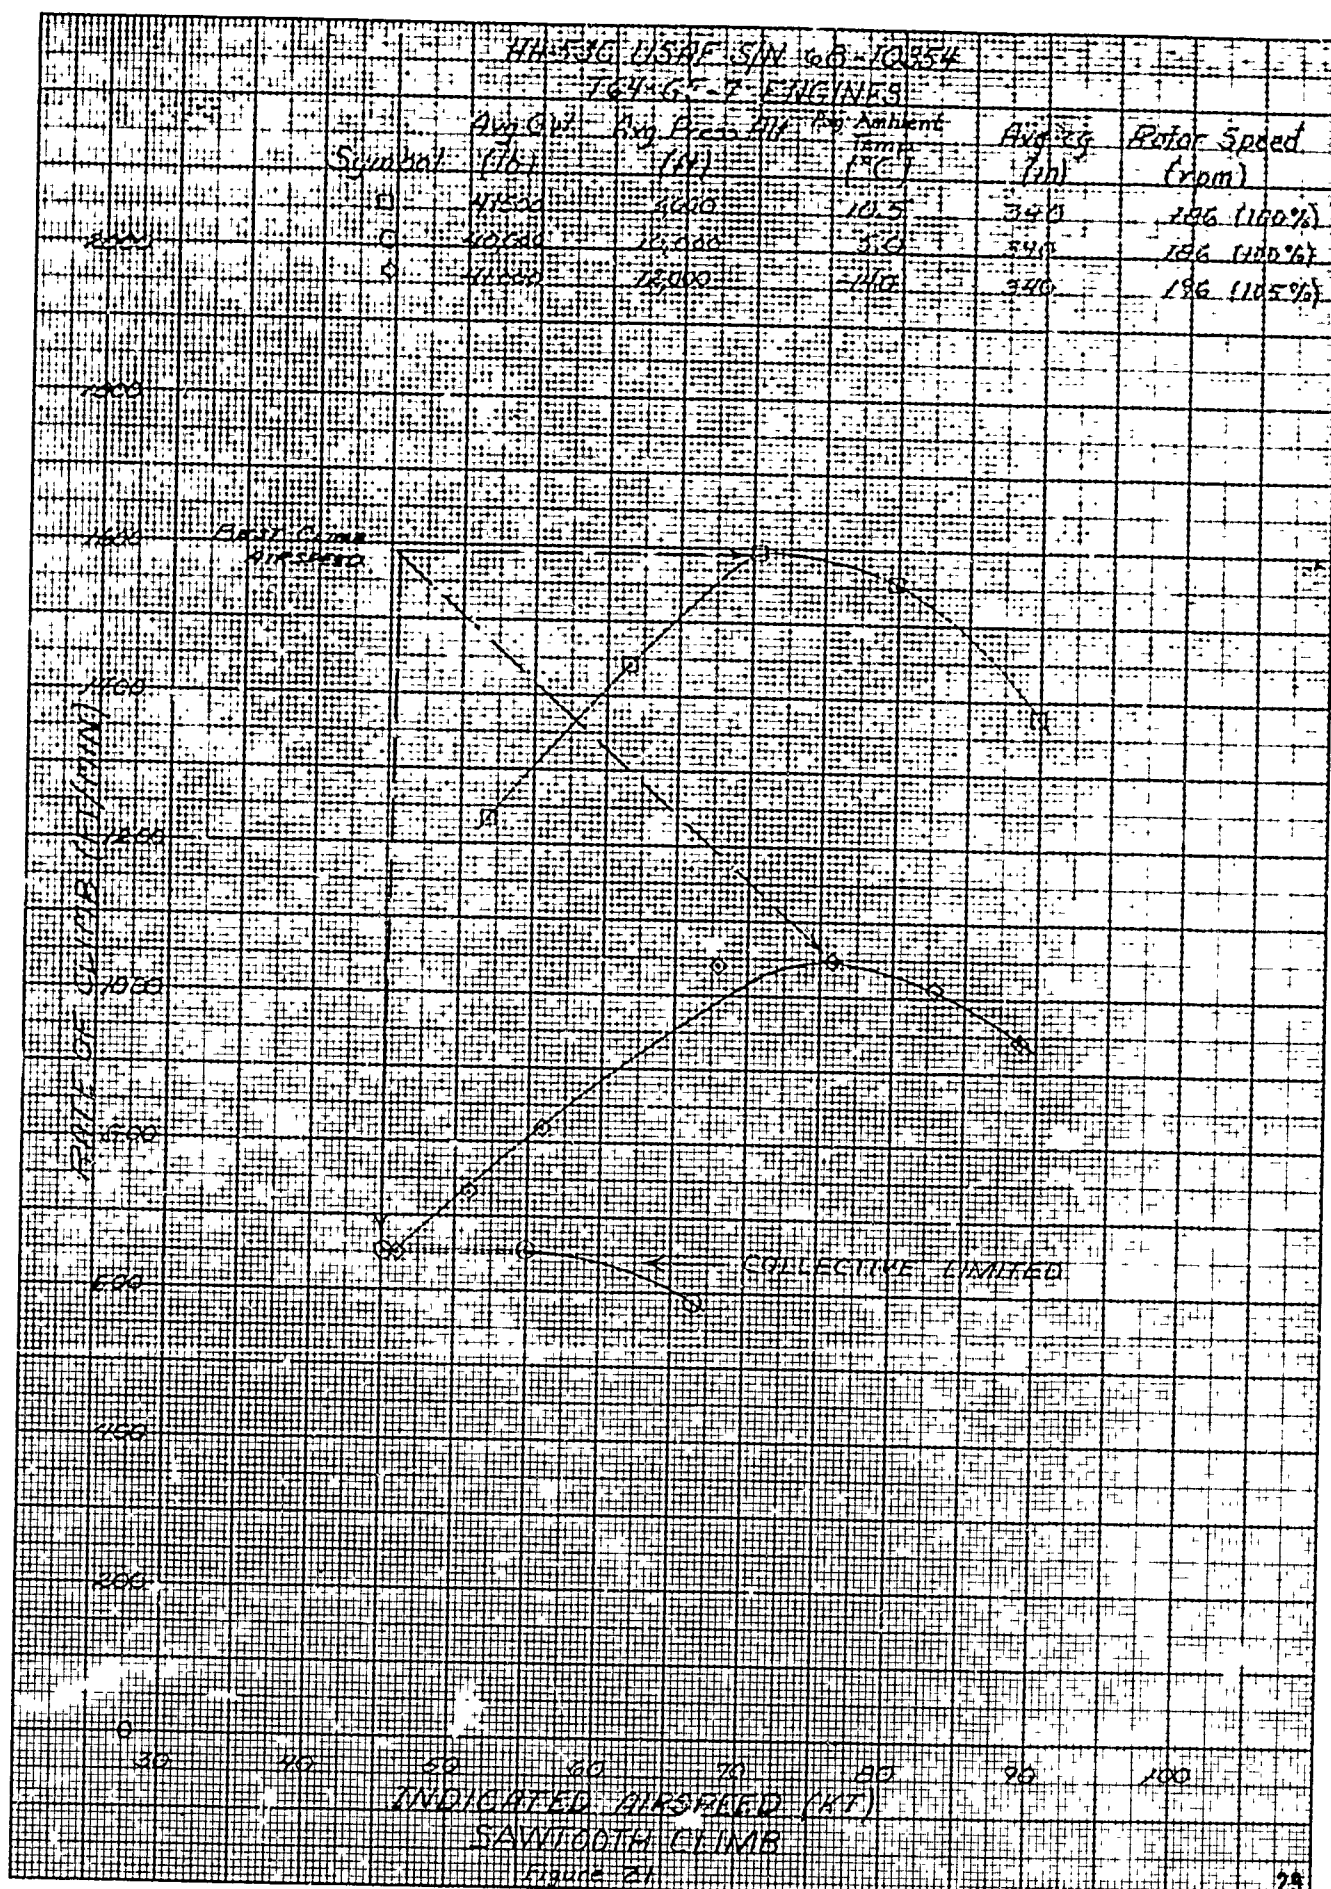


Figure 21

HH-53C USAF S/N 68-10354

T64 GE-7 ENGINES

APPROX 20-FOOT WHEEL HT

SIDEWARD FLIGHT


ROTOR SPEED 102%

GROSS WEIGHT 37000 LBS

C.G. 342 IN (MID)

AVG O.A.T. 46°C

PRESS ALT 9260 FT

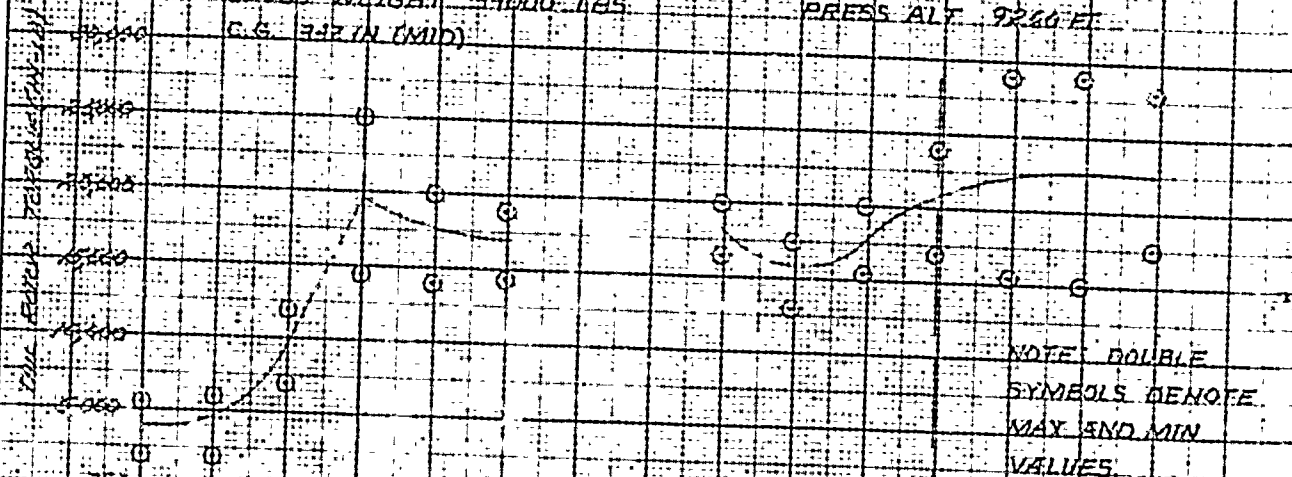

NEW PERICRANK LIMIT


CONVENTIONAL LIMIT

TRANSLATIONAL LIFT



Figure 22

PERIOD OF FLIGHT

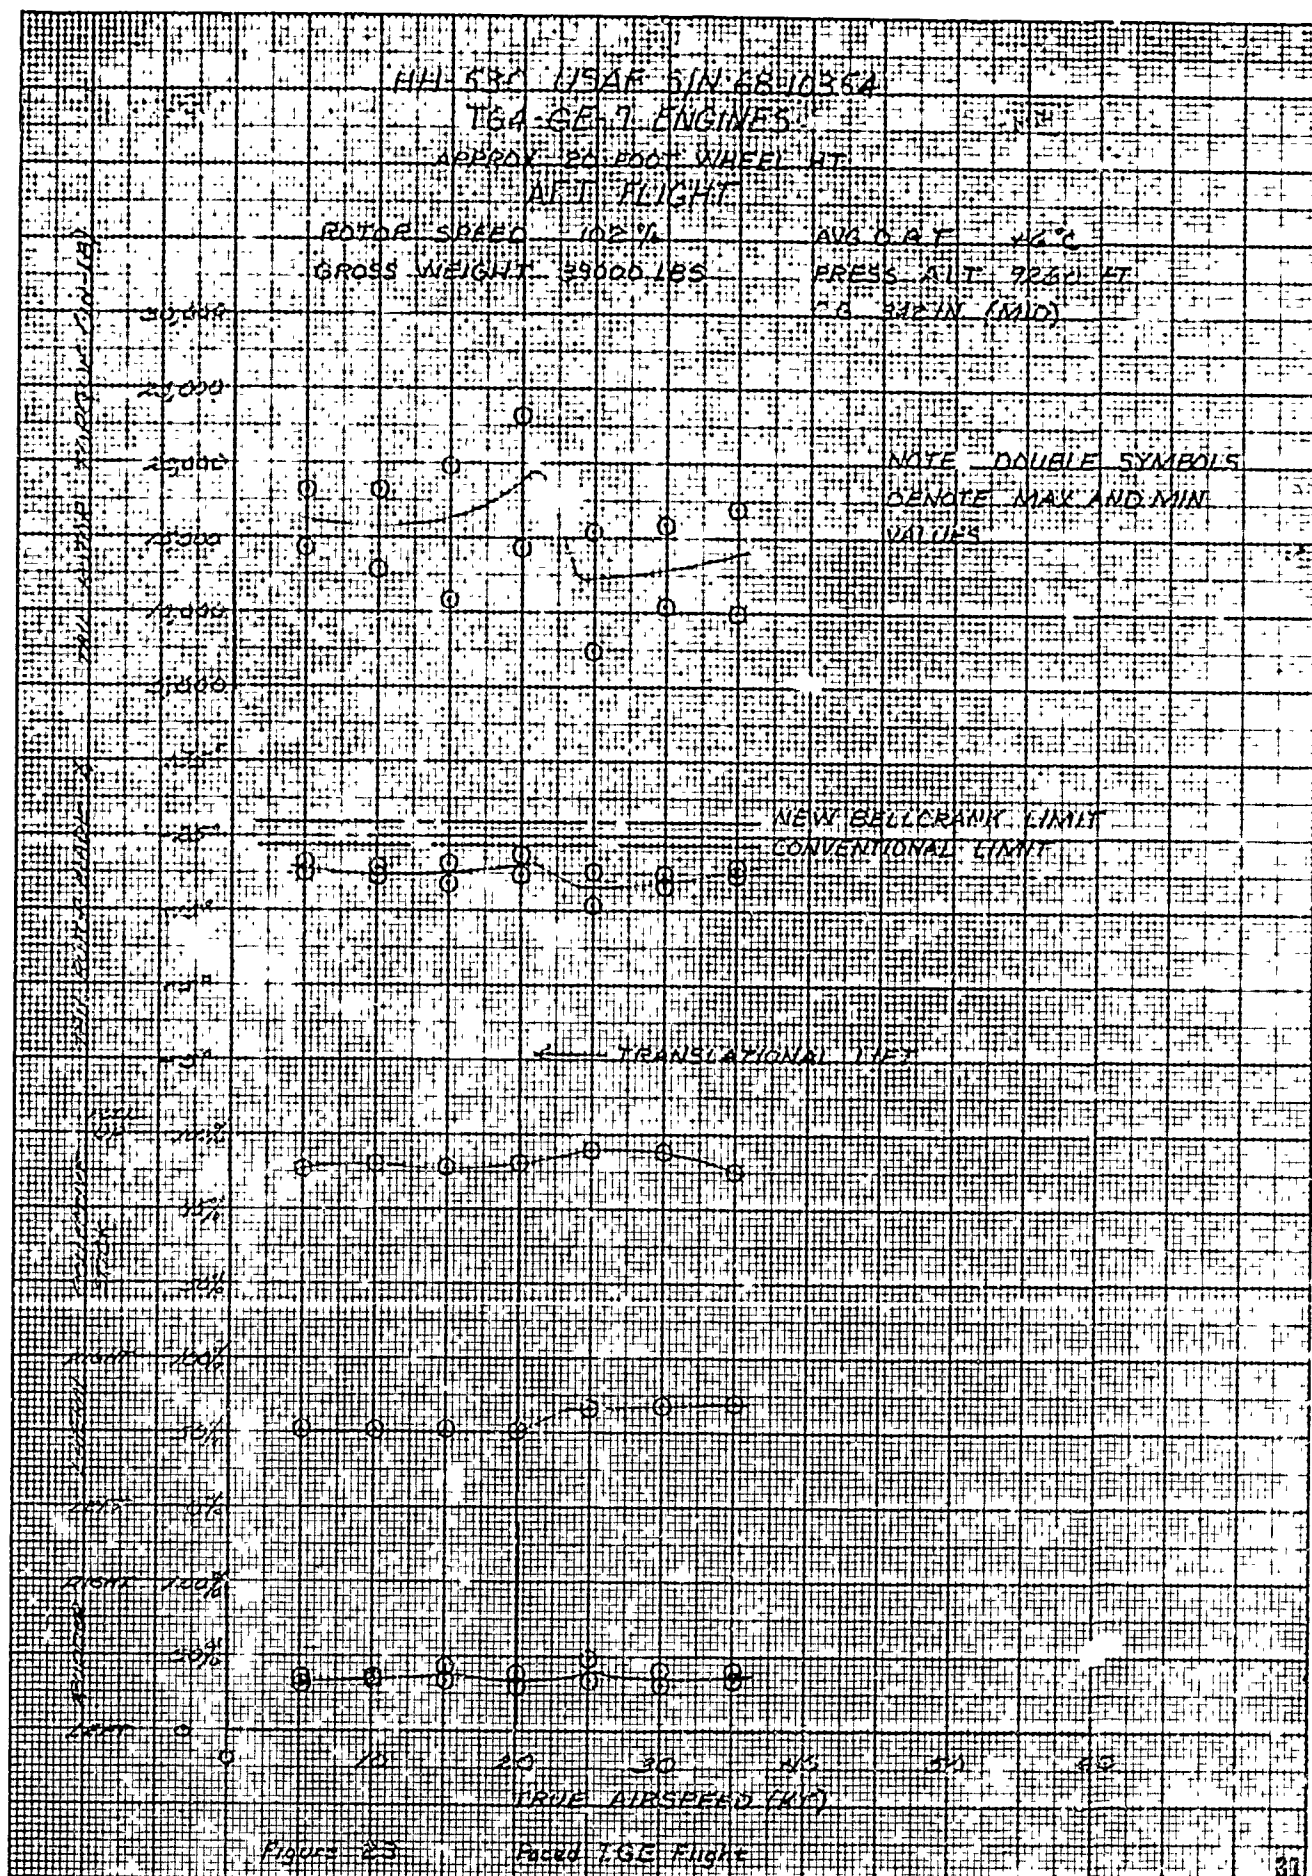

HH-53C USAF SIN 48-10354

T64-GE-7 ENGINES

APPROX 20 FOOT WHEEL LT

AFT QUARTERING FLIGHT

ROTOR SPEED 102%

AVG OATF 16°C

GROSS WEIGHT 29000 LBS

PRESS ALT 9260 FT

C.G. 742 IN (MID)

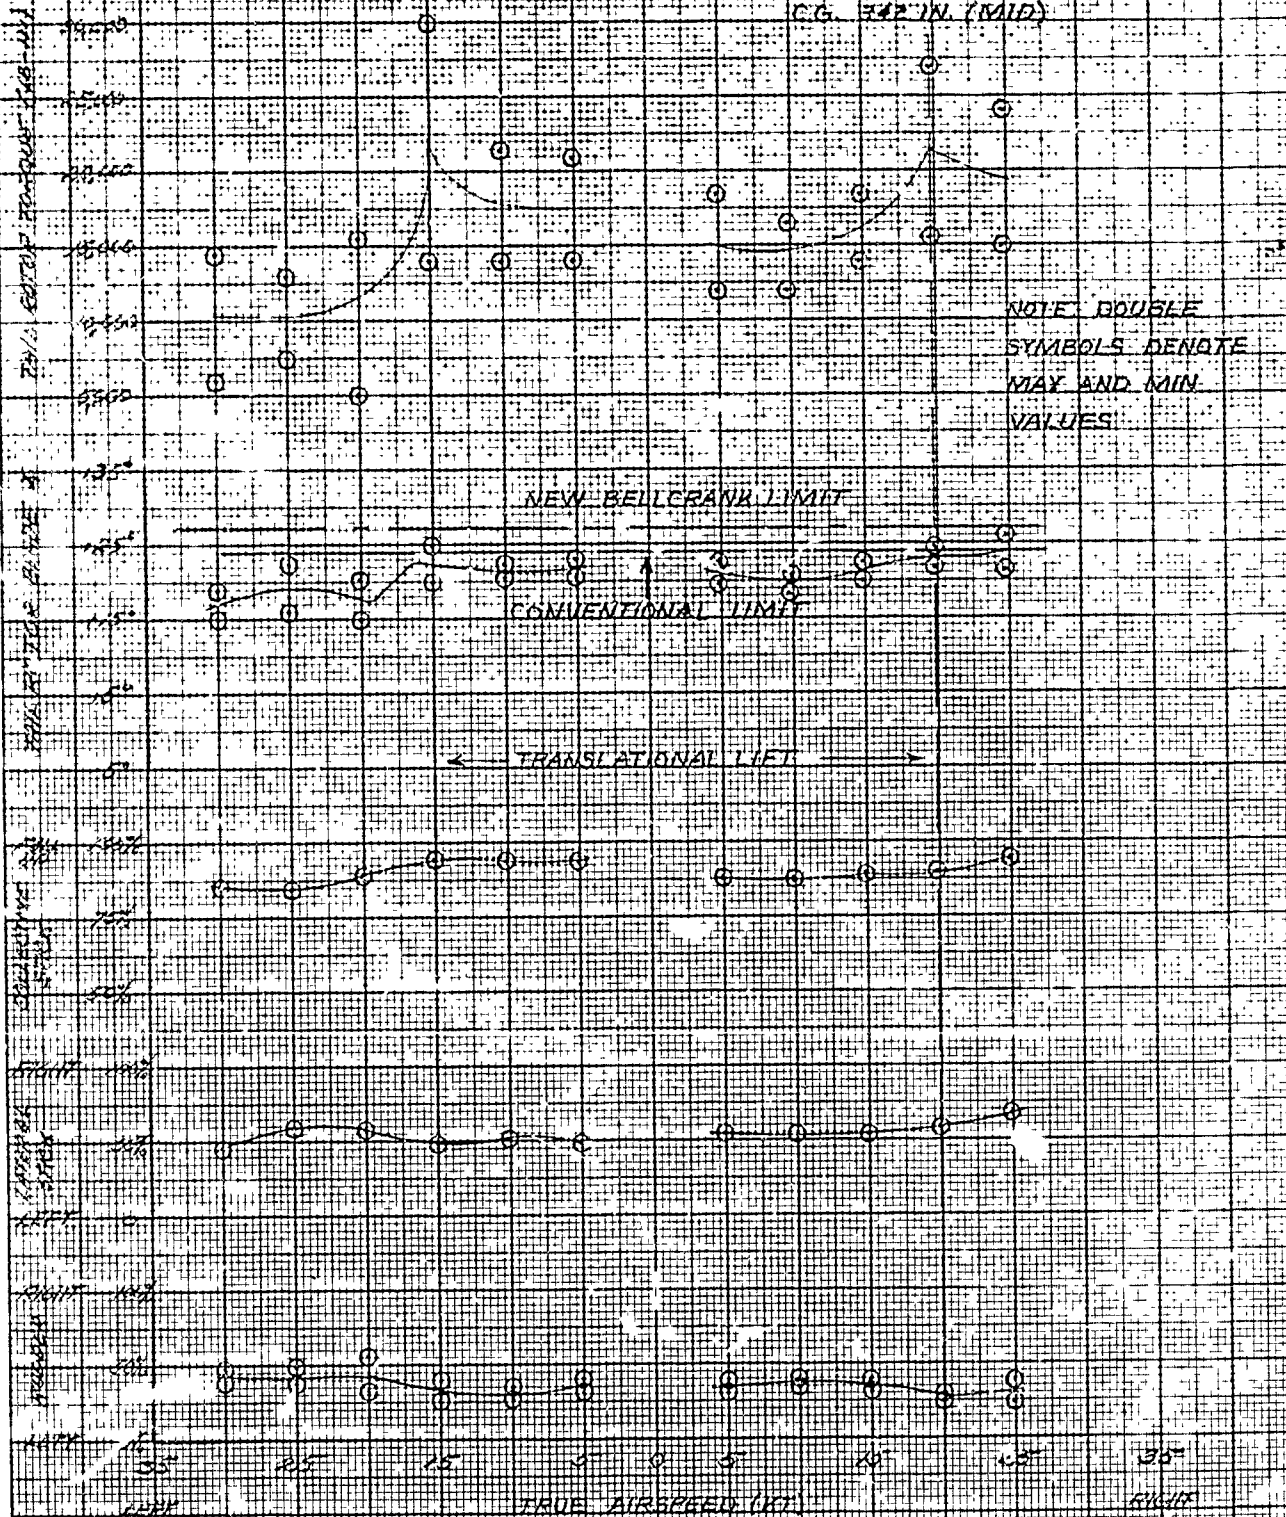


FIGURE 24

Fixed LGE FLIGHT

HH-53C USAF SIN 68-10864

764 GE-T ENGINES

APPROX 20 FOOT WHEEL WEIGHT

SIDEWARD FLIGHT

ROTOR SPEED 100%

AVE CAT 710T

GROSS WEIGHT 37,500 LBS

PRESS ALT 9400 FT

C.G. 328 IN (FWD)

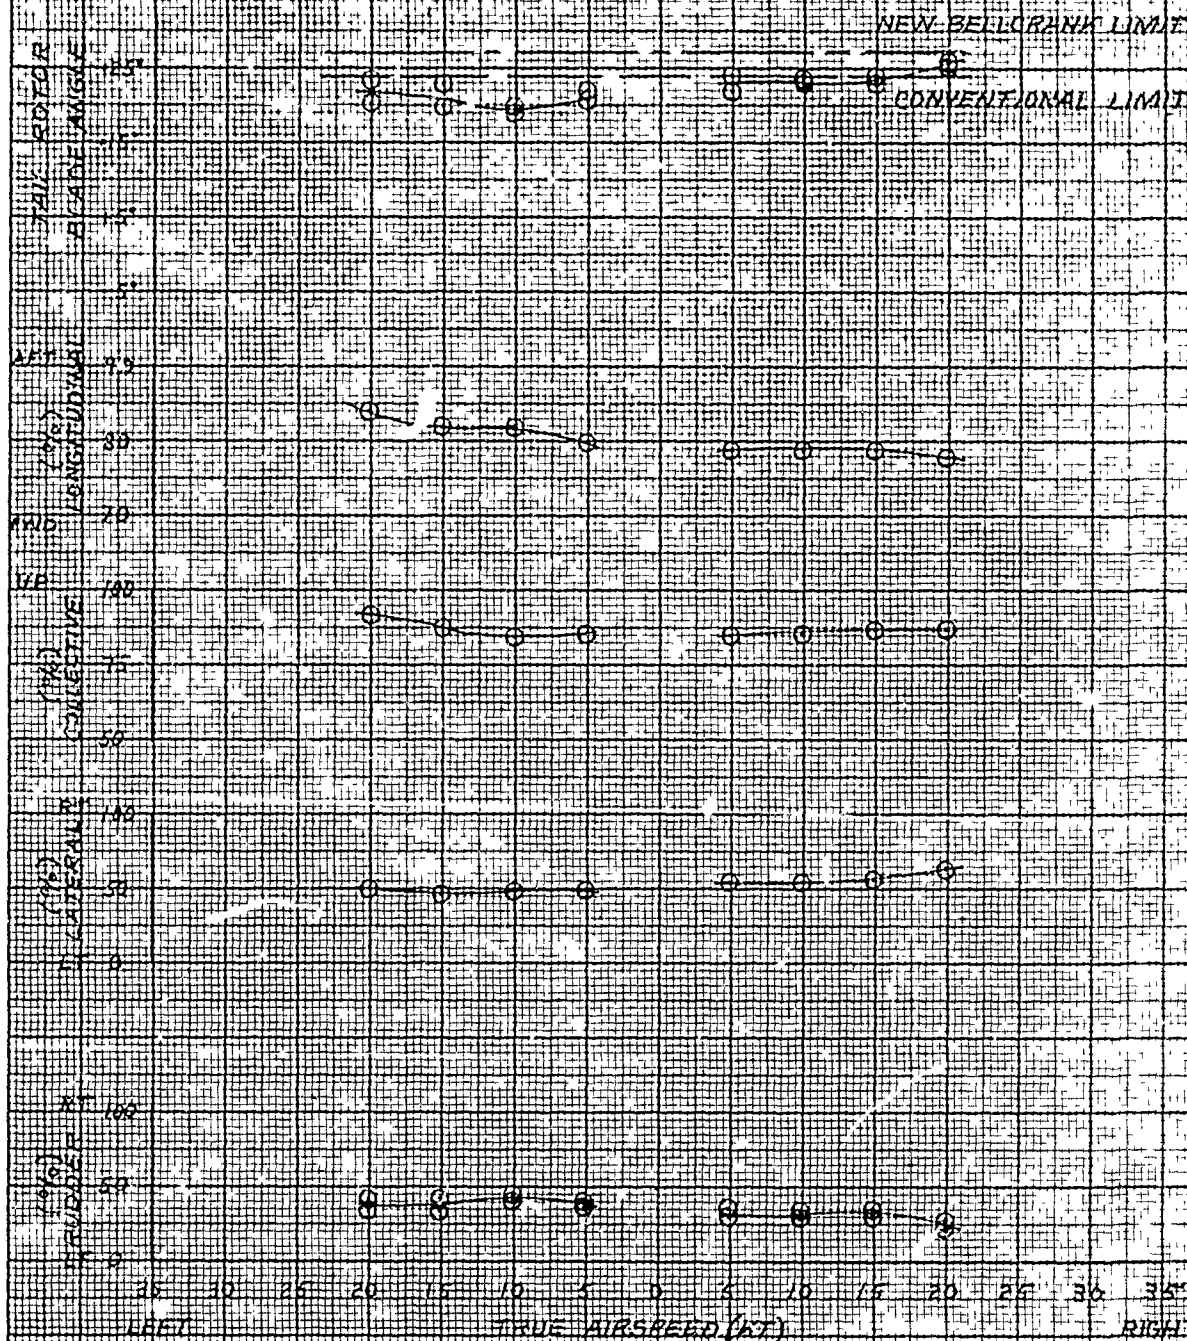


Figure 25

Paced LGE Flight

HH-53C USAF SN 68-10354

T64-GE-7 ENGINES

APPROX 20 FOOT WHEEL HEIGHT

AFT FLIGHT

ROTOR SPEED 100%

GROSS WEIGHT 37,500

AVG OAT 410°C

SPRESS ALT 9400 FT

C.G. 828 IN. (FWD)

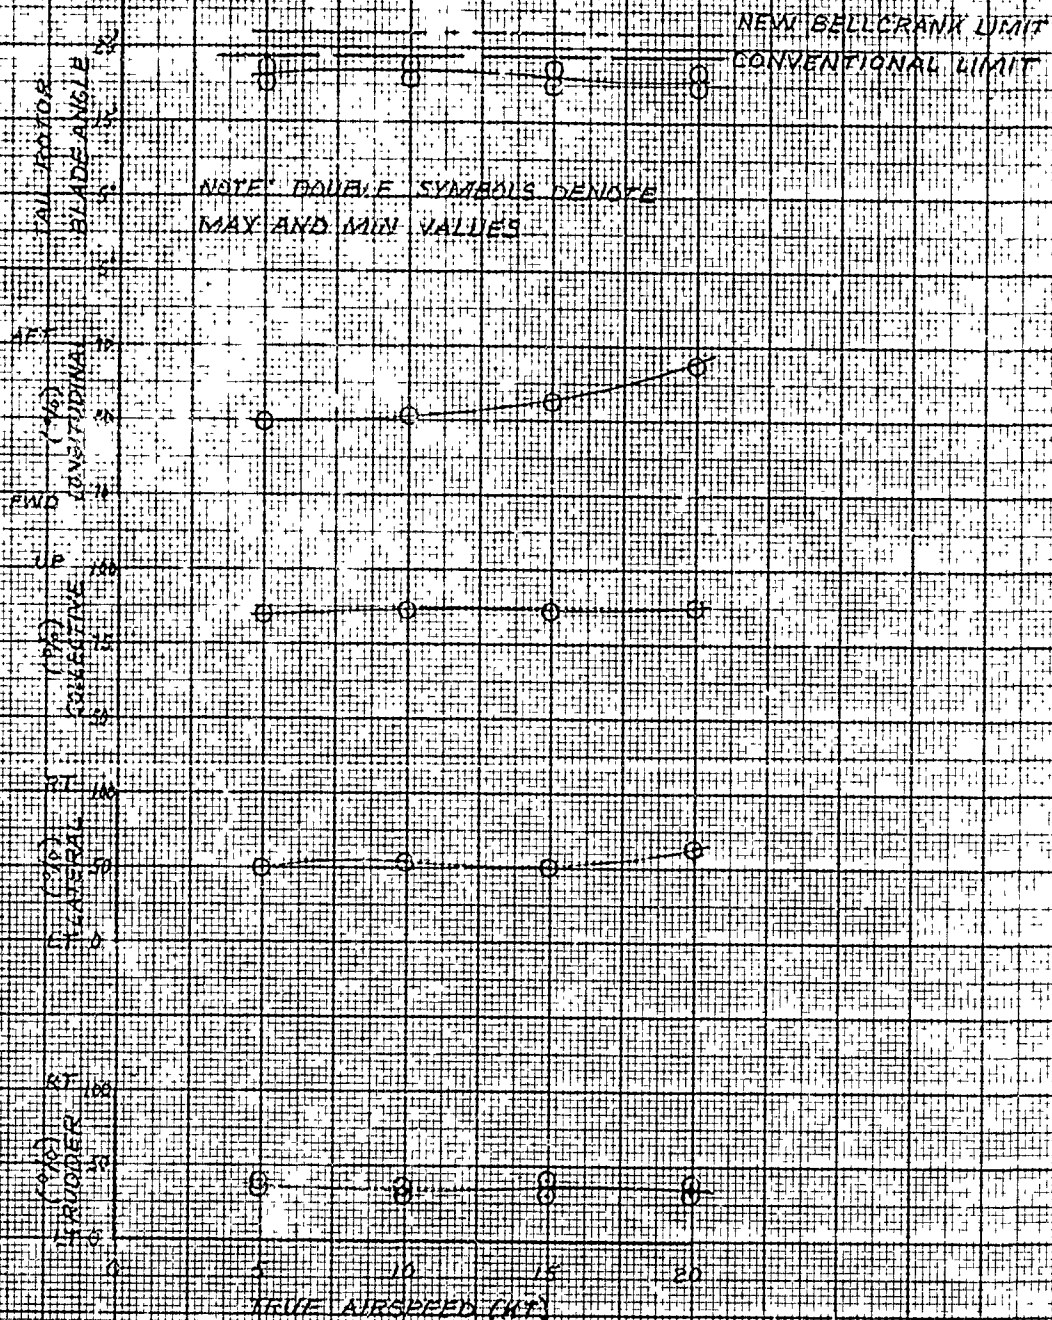


Figure 26

Paced IGE Flight

HH-53C USAF SINGR-10354

T64-GE-7 ENGINES

APPROX 20-FOOT WHEEL HEIGHT

AFT QUARTERING FLIGHT


ROTOR SPEED 100%

AVG OAT 41.9°C

GROSS WEIGHT 37,500 LBS

PRESS ALT 9400 FT

CG 52.8 IN (FWD)

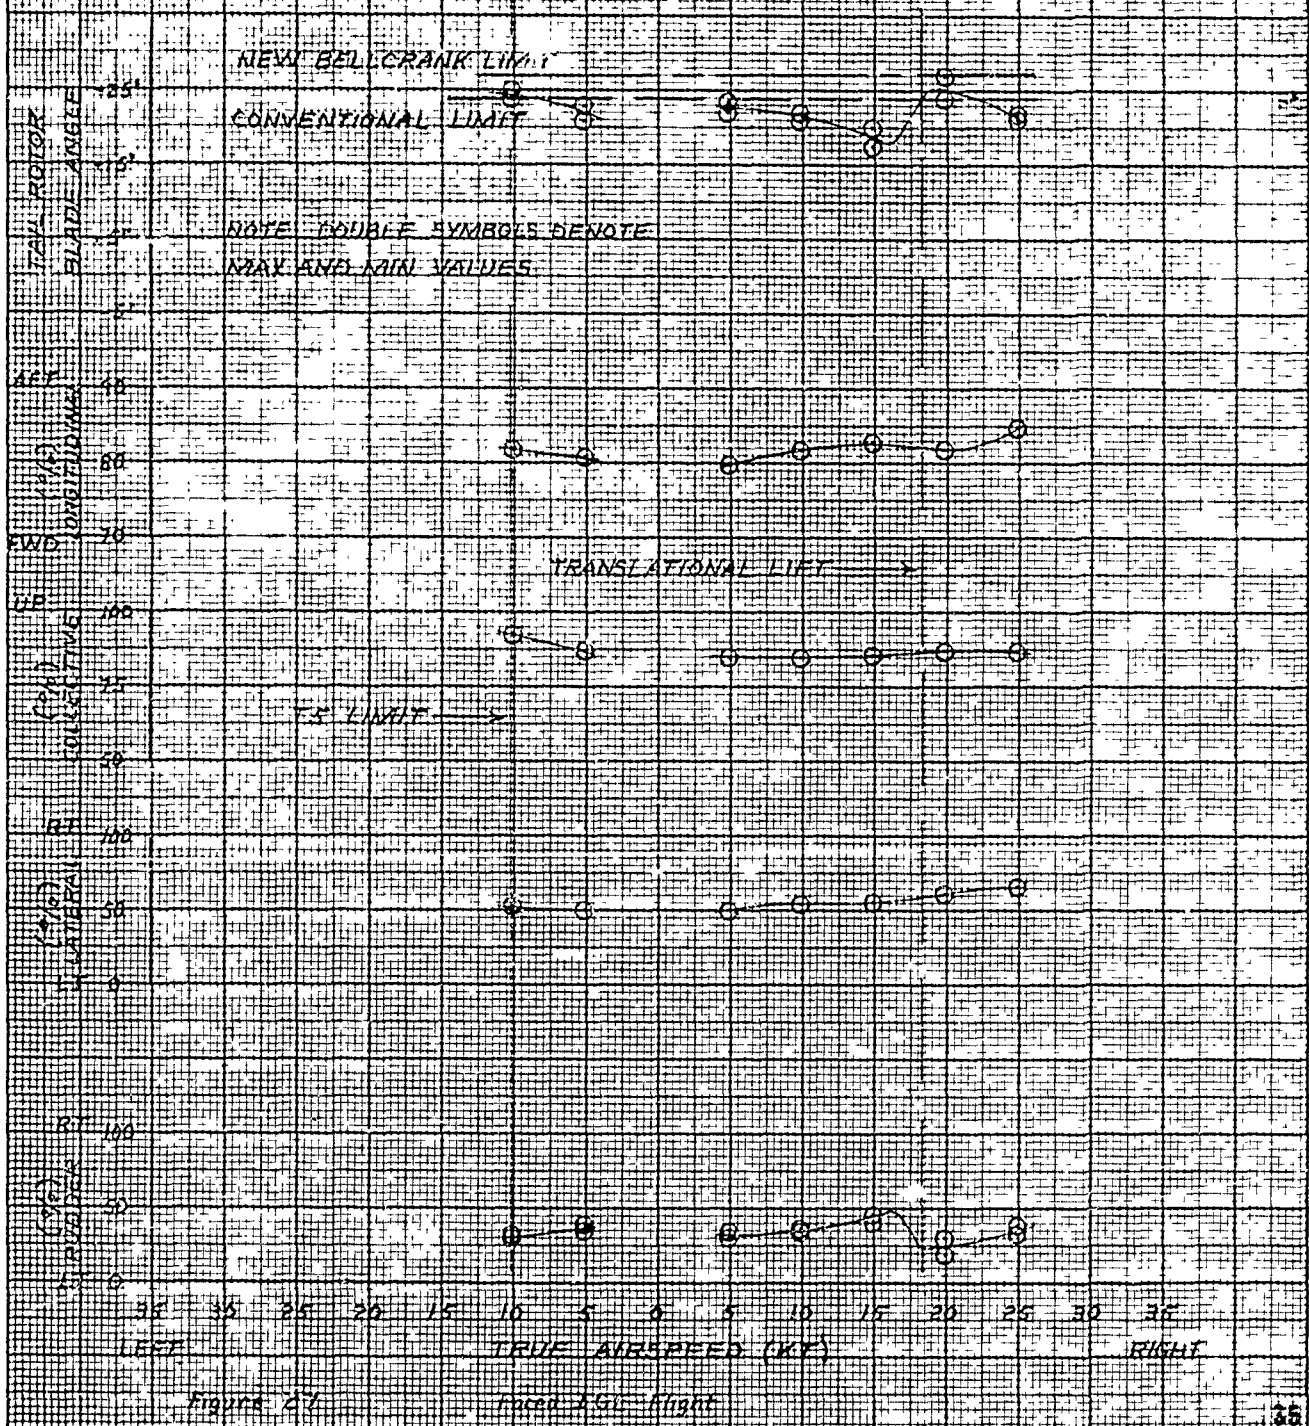

HH-53C USAF S/N 68-10354

T64-GE-7 ENGINES

APPROX 20 FT WHEEL HEIGHT

SIDEWARD FLIGHT

ROTOR SPEED 97%

AVG OAT 13.0°

GROSS WEIGHT 37000 LBS

PRESS ALT 9480 FT

P.C. 532 IN (MID)

TAIL ROTOR TORQUE (IN-LB)

NOTE: DOUBLE SYMBOLS DENOTE
MAX AND MIN VALUES

W

BLADE

TAIL ROTOR

COLLECTIVE
STICK

RIGHT

LATERAL
STICK

LEFT

RIGHT

ROUNDER

LEFT


RIGHT

TRUE AIRSPEED (KT)

38

Figure 28


Forced LGE FLIGHT

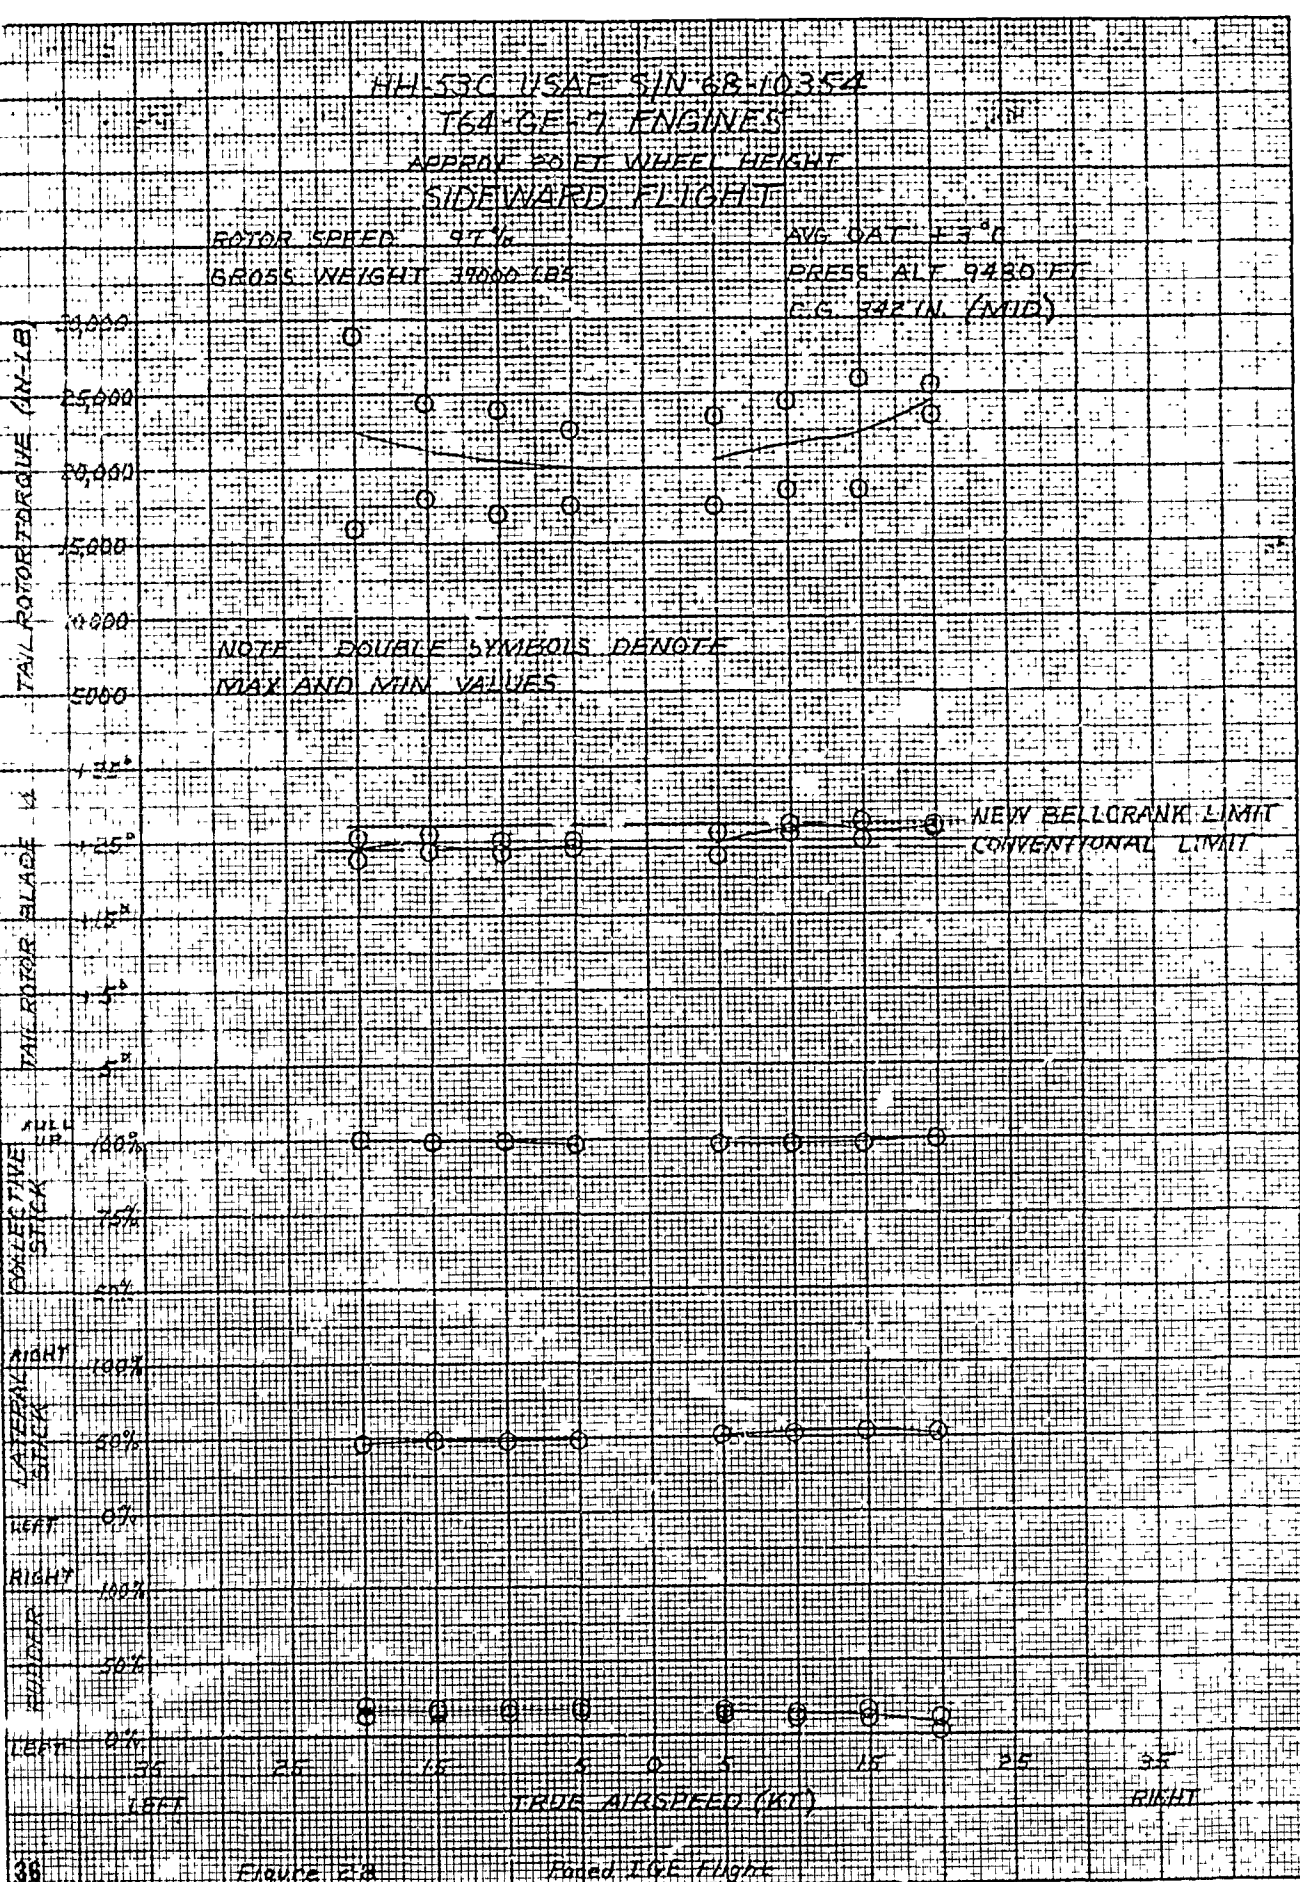

HH-53C USAF SJA 68-10354
 T64-GE-7 ENGINES
 AFT FLIGHT

ROTOR SPEED 102 %
 GROSS WEIGHT 39000 LBS
 QAT +6 °C
 PRESS ALT 9260 FT
 C.G. 342 IN (MID)

NOTE: TYPICAL TIME HISTORY FOR
 TAIL ROTOR TORQUE SHOWING
 MAX AND MIN VALUES AS
 PRESENTED IN FIGURES
 22 THROUGH 28

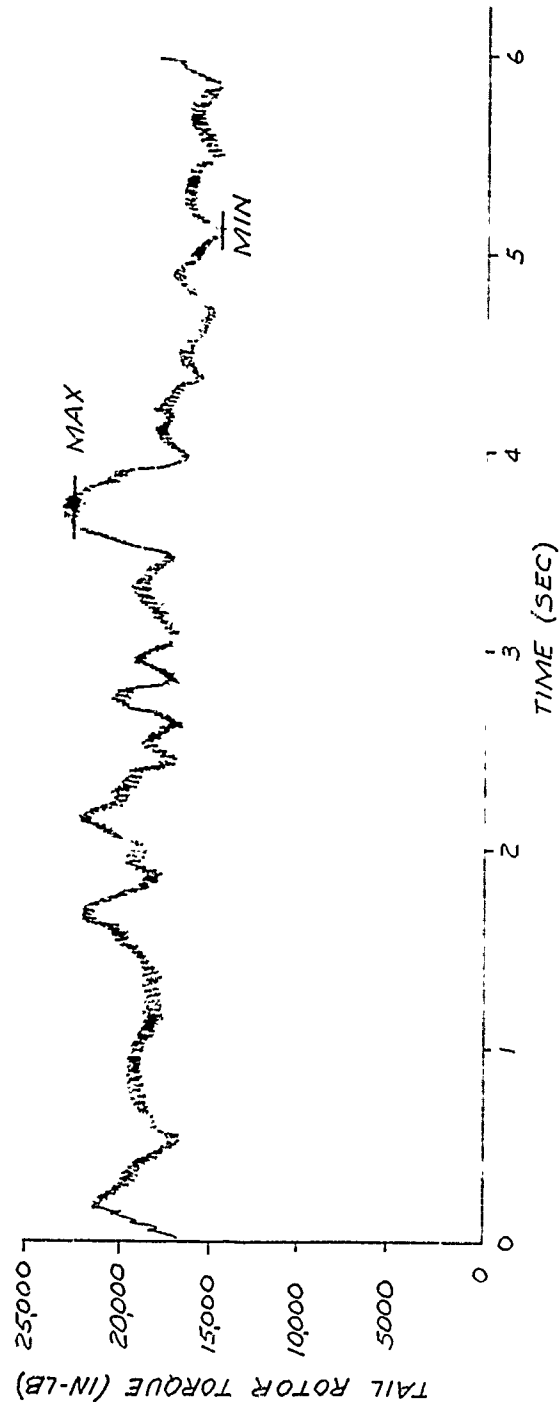

TAIL ROTOR TORQUE TIME HISTORY

Figure 29

H4-53C USAF S/N 58-10354
 T84-GE-7 ENGINES
 10 FOOT WHEEL MEASUREMENT

SYMBOL ROTOR SPEED (RPM)

190-195

CONVENTIONAL LIMIT

NEW BELL CRANK LIMIT

Hover Control Position

Figure 30

WITH ROTOR TO ENGINE (CH-47) (100%) (100%)

REDUCED FUEL (100%) (100%)

RT

WITH ROTOR TO ENGINE (CH-47) (100%) (100%)

RT

WITH ROTOR TO ENGINE (CH-47) (100%) (100%)

RT

WITH ROTOR TO ENGINE (CH-47) (100%) (100%)

RT

WITH ROTOR TO ENGINE (CH-47) (100%) (100%)

RT

WITH ROTOR TO ENGINE (CH-47) (100%) (100%)

RT


HILL-53C USAF SIN 68-10362
 T64 GE 7 ENGINES
 24-FOOT WHEEL HUBS

ROTOR SPEED (RPM)
 180-195
 180-185
 170-175

SYMBOL
 C
 A
 H

3 x 120000
 1 x 15

CONVENTIONAL LIGHT
 NEW BELLEFANT
 LIGHT



TAIL ROTOR BLADES
 (FOES)

TAIL ROTOR BLADES
 (FOES)

TAIL ROTOR BLADES
 (FOES)

TAIL ROTOR BLADES
 (FOES)

TAIL ROTOR BLADES
 (FOES)

TAIL ROTOR BLADES
 (FOES)

TAIL ROTOR BLADES
 (FOES)

TAIL ROTOR BLADES
 (FOES)

HH-53C USAF SIN 83-10354

T64-GF 7 ENGINES

THE NEW YORK PUBLIC LIBRARY

SYMBOL ROTOR SPEED (RPM)


5.6470815

785-795

MODEL NUMBER	FOR WHICH THE INVENTION IS	UP	CHALLENGE STATEMENT	UP	FOR WHICH THE INVENTION IS	UP	CHALLENGE STATEMENT
1000	FOR WHICH THE INVENTION IS	UP	CHALLENGE STATEMENT	UP	FOR WHICH THE INVENTION IS	UP	CHALLENGE STATEMENT

James H. Hayes


Figure 3

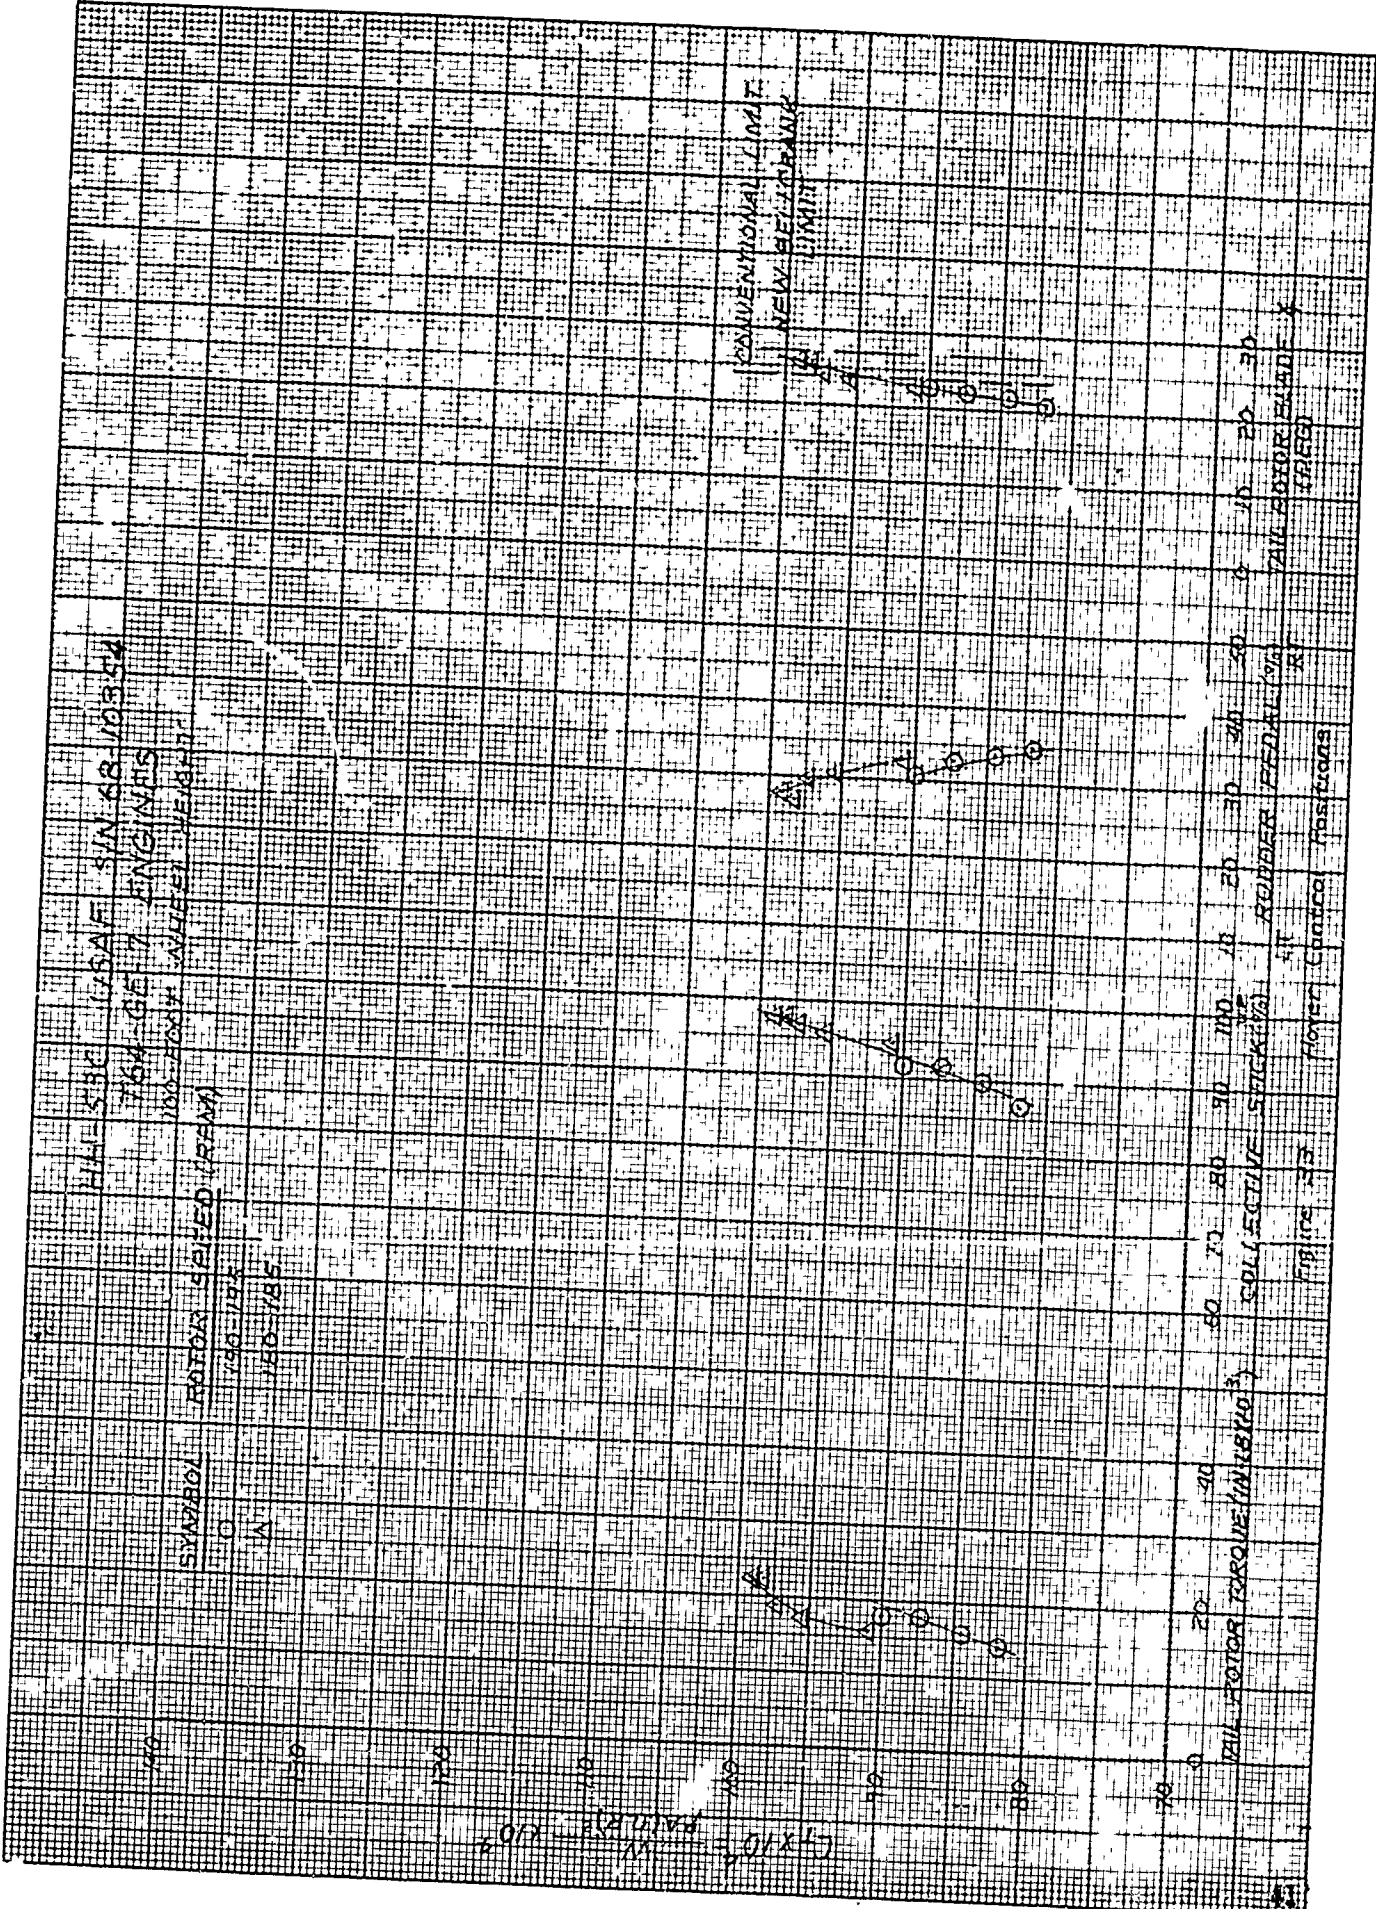

201X-1201115
201X-1201115

HH-53E USAF S/N 68-10354
T64-GE-7 ENGINES

SYMBOL	COLLECTIVE POSITION
○	100%
□	77 1/2%
◇	55 1/2%
●	33 1/2%
△	11 1/2%

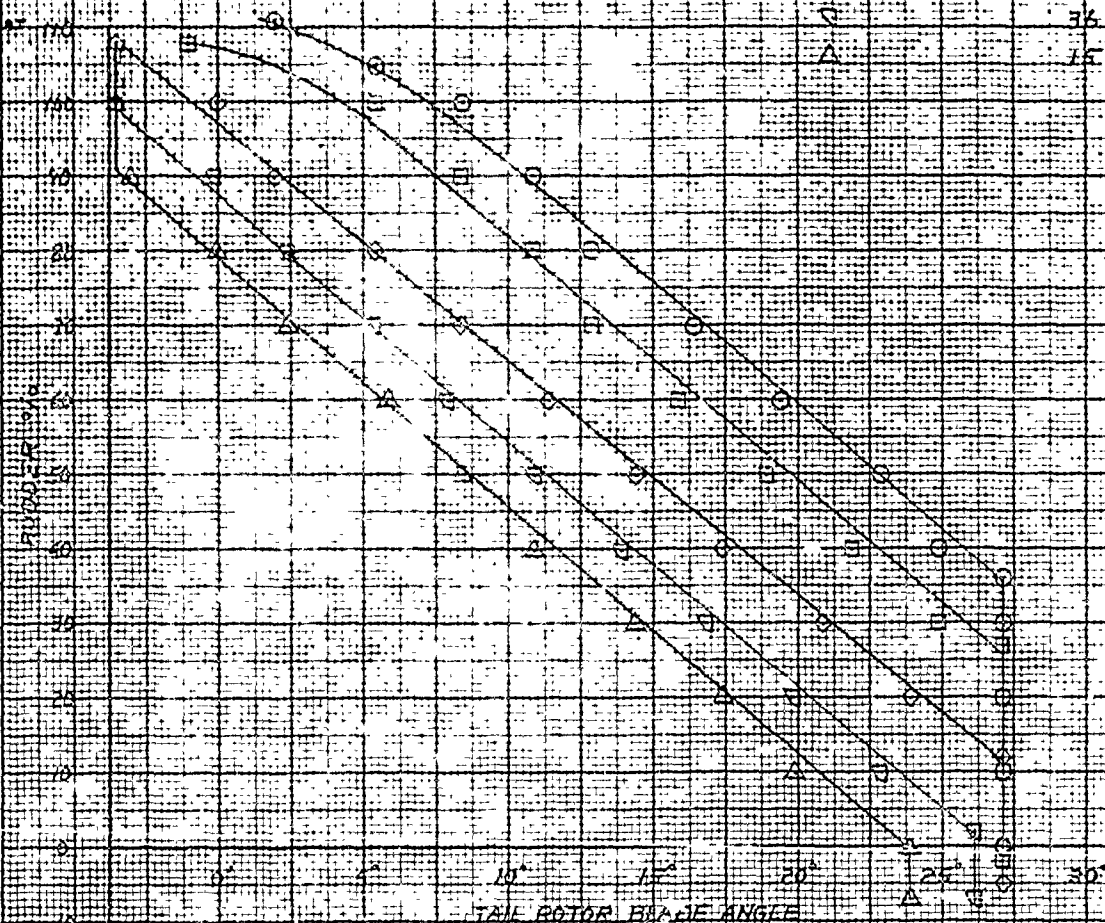


COLLECTIVE-RUDDER COUPLING

Figure 34

FH-93C USAF SIN 48-10854
T64-GE-7 ENGINES

APSC ON
O COLLECTIVE
100% RUDDER NORMAL FULL RIGHT
100% RUDDER MAX FULL RIGHT
Δ RUDDER

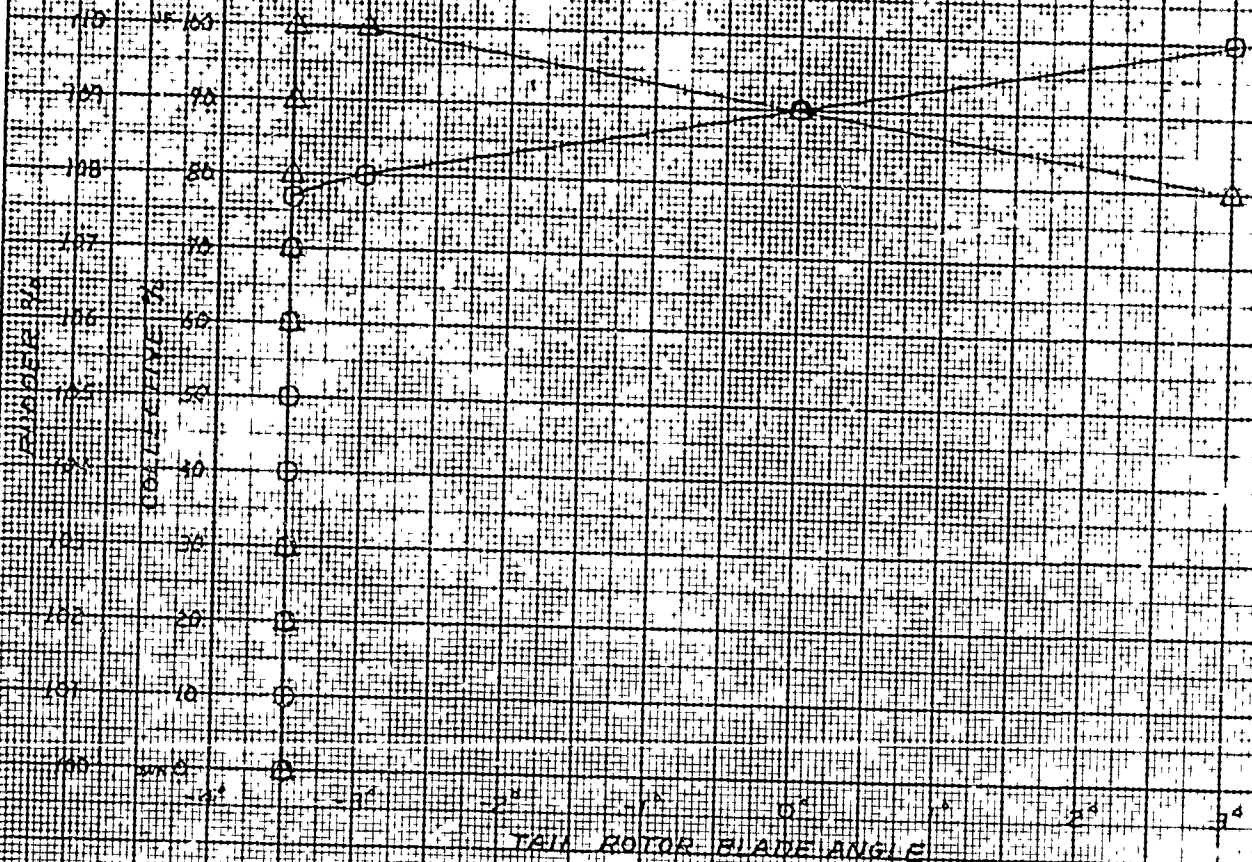


COLLECTIVE RUDDER COUPLING

Figure 35

AH-56C (15A) SN 18-10352
T64-GE-10 ENGINES

APSC ON
 ○ COLLECTIVE
 △ RUDDER
 ○ RUDDER NORMAL FULL LEET
 △ RUDDER MAX FULL LEET

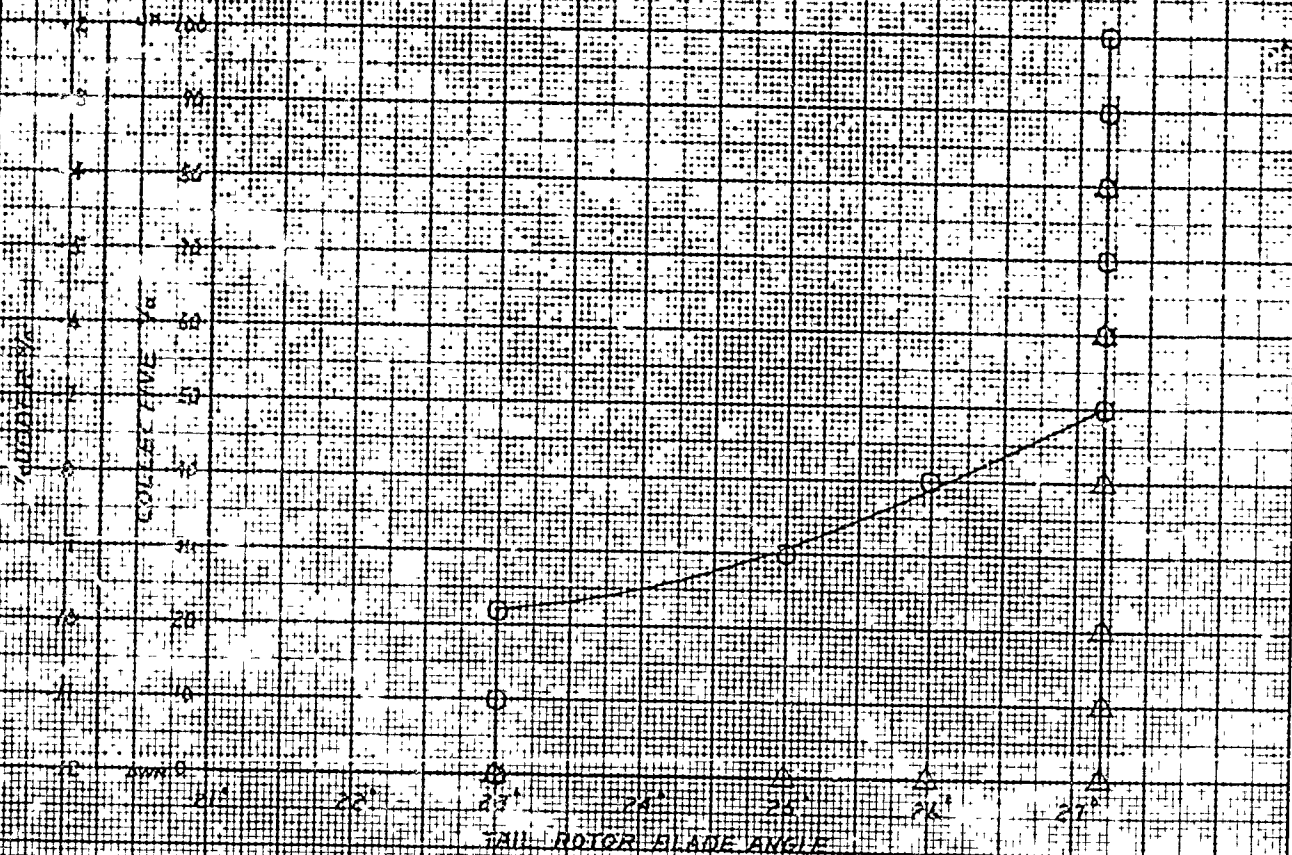

COLLECTIVE RUDDER COUPLING

Figure 36

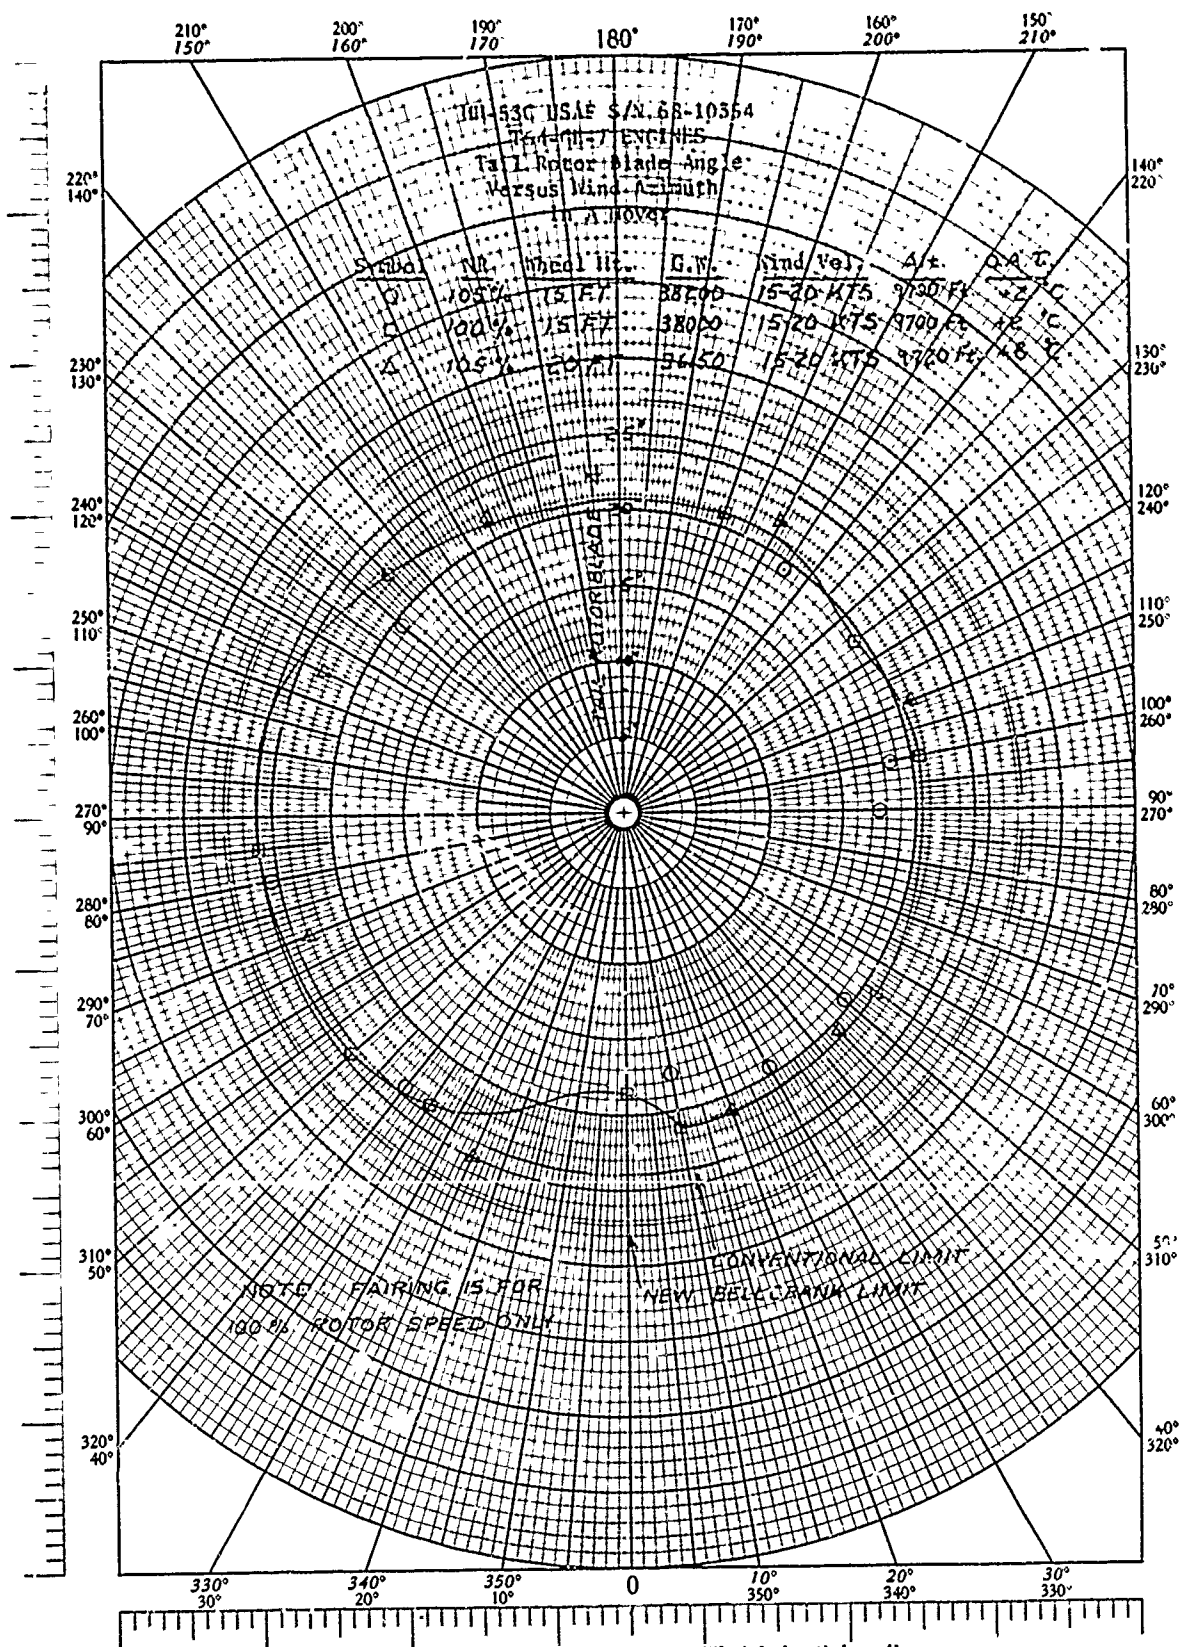


Figure 37 Tail Rotor Blade Angle versus Wind Azimuth in a Hover

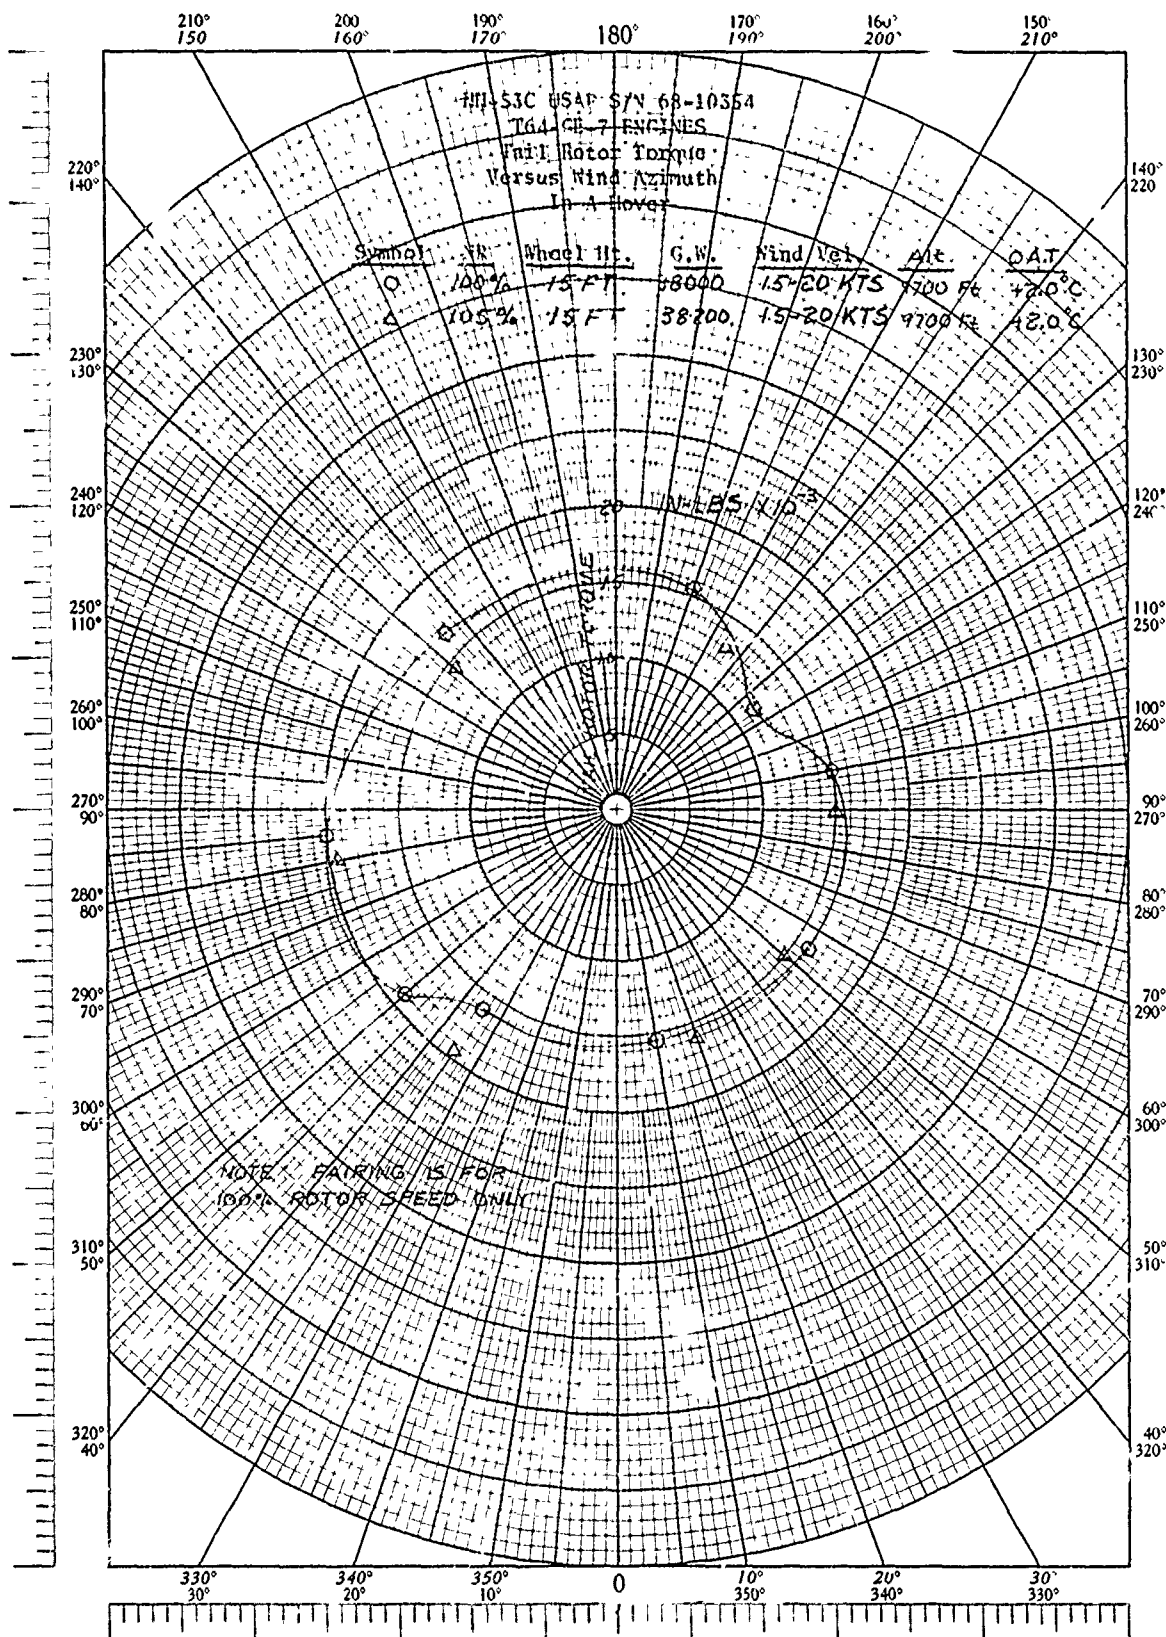


Figure 38 Tail Rotor Torque versus Wind Azimuth in a Hover

REFERENCES

1. Barbini, Wayne J.; Balfe, Paul G., Major USAF, Lovrien, Clark E., Jr., Major USAF; Category II Performance and Flying Qualities Tests of the HH-53C Helicopter, FTC-TR-70-8, Air Force Flight Test Center, April 1970.
2. Flight Manual USAF Series HH-53B, HH-53C Helicopter, T.O. 1H-53(H) B-1, 30 June 1970, changed 30 June 1971.
3. Gurley, Sydney E., Major USAF; Lovrien, Clark E., Jr., Major USAF; Ritter, Rodney L., Captain USAF, Cold Weather Hover Performance, (Supplement), FTC-TR-70-8, Air Force Flight Test Center, April 1971.
4. Barbagallo, John L; Etzel, Gregory A.M., Major USAF; Lovrien, Clark E., Jr., Major USAF, Category II Desert Test of the HH-53C Helicopter, FTC-TR-71-43, Air Force Flight Test Center, September 1971.

UNCLASSIFIED

Security Classification

DOCUMENT CONTROL DATA - R & D

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

1. ORIGINATING ACTIVITY (Corporate author) Air Force Flight Test Center Edwards Air Force Base, California		2a. REPORT SECURITY CLASSIFICATION UNCLASSIFIED	
		2b. GROUP N/A	
3. REPORT TITLE Limited High Altitude Performance Evaluation of the HH-53C Helicopter			
4. DESCRIPTIVE NOTES (Type of report and inclusive dates) Final			
5. AUTHOR(S) (First name, middle initial, last name) RODNEY L. RITTER, Captain, USAF SYDNEY E. GURLEY, Major, USAF CLARK E. LOVRIEN, Major, USAF			
6. REPORT DATE December 1971		7a. TOTAL NO. OF PAGES 47	7b. NO. OF REFS 4
8a. CONTRACT OR GRANT NO.		9a. ORIGINATOR'S REPORT NUMBER(S) FTC-TR-71-54	
b. PROJECT NO.		9b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report) N/A	
c. Project Directive 72-17			
d.			
10. DISTRIBUTION STATEMENT Distribution limited to U.S. Government agencies only (Test and Evaluation), November 1971. Other requests for this document must be referred to ASD (SDQH), Wright-Patterson AFB, Ohio 45433.			
11. SUPPLEMENTARY NOTES N/A		12. SPONSORING MILITARY ACTIVITY 6510th Test Wing Edwards AFB, California	
13. ABSTRACT This limited flight test program defined the hover and takeoff performance of the HH-53C helicopter at high altitude and included an evaluation of the increased tail rotor power provided by a new tail rotor bellcrank. Hover and takeoff performance were satisfactory during high altitude testing. Operating at 105-percent rotor speed at high altitude, heavy gross weight combinations provided a more rapid response of the aircraft to control inputs than operation at 100-percent where control response was somewhat sluggish. In addition, it provided increased performance, prevented reaching mechanical control stops from limiting performance and lowered cruise guide readings. The new tail rotor bellcrank increased the HH-53C lift capability approximately 4,500 pounds by preventing tail rotor authority from limiting aircraft performance. A compromise between maximum performance and safety resulted in recommendation of a 35 knot indicated airspeed for takeoff.			

DD FORM 1473
1 NOV 65

UNCLASSIFIED

Security Classification

14

KEY WORDS

LINK A

LINK B

LINK C

ROLE

WT

ROLE

WT

ROLE

WT

HH-53C helicopter
performance
high altitude performance
takeoff
hover
tail rotor
control response
lift capability