

REPORT DOCUMENTATION PAGE					Form Approved OMB No. 0704-0188	
The public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.						
1. REPORT DATE (DD-MM-YYYY) 02/16/2010		2. REPORT TYPE Technical Report - Briefing Charts			3. DATES COVERED (From - To)	
4. TITLE AND SUBTITLE High Cycle Life Cathode for High Voltage (5V) Lithium Ion Batteries				5a. CONTRACT NUMBER		
				5b. GRANT NUMBER		
				5c. PROGRAM ELEMENT NUMBER		
6. AUTHOR(S)				5d. PROJECT NUMBER		
				5e. TASK NUMBER		
				5f. WORK UNIT NUMBER		
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Army Research Laboratory Adelphi MD United States				8. PERFORMING ORGANIZATION REPORT NUMBER		
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) Army Research Laboratory Adelphi MD United States				10. SPONSOR/MONITOR'S ACRONYM(S)		
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)		
12. DISTRIBUTION/AVAILABILITY STATEMENT A = Approved For Public Release 12/3/2015 No						
13. SUPPLEMENTARY NOTES						
14. ABSTRACT						
15. SUBJECT TERMS						
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT	18. NUMBER OF PAGES	19a. NAME OF RESPONSIBLE PERSON	
a. REPORT U	b. ABSTRACT U	c. THIS PAGE U			19b. TELEPHONE NUMBER (Include area code)	



U.S. Army Research, Development and Engineering Command

High Cycle Life Cathode for High Voltage (5V) Lithium Ion Batteries



TECHNOLOGY DRIVEN. WARFIGHTER FOCUSED.


Inventor: Dr. Jan L. Allen

Technology Overview


- There is a huge, growing demand in commerce and the military for high energy density rechargeable batteries.
- In response to this need, we have developed a high voltage, high cycle life Li-ion cathode material based on lithium cobalt phosphate (LiCoPO_4) that provides higher energy density (15% > LiFePO_4 demonstrated, up to 40% greater with further R&D).
- The invention combines the safety of a phosphate system with a high energy content. Safety advantage arises from abuse tolerance of phosphate.
- Previous attempts to use LiCoPO_4 have generally resulted in rapid charge-capacity fade and an extremely short cycle life (e.g., greater than 50 percent loss after only 10 cycles).
- The innovation is the partial substitution of lithium and cobalt by iron, which stabilizes electrochemical cycling and greatly reduces capacity loss. The capacity retention is more than 80 percent after 500 cycles with high coulombic efficiency.

Technology Overview


ARL innovation of partial substitution of Li and Co by Fe stabilizes the electrochemical capacity of LiCoPO_4 cathode

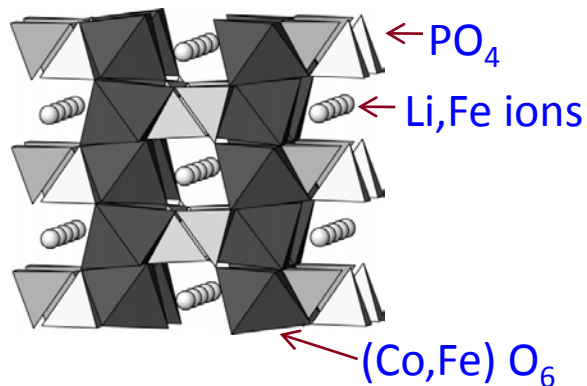

Comparison to standard LiCoPO_4 and standard electrolyte

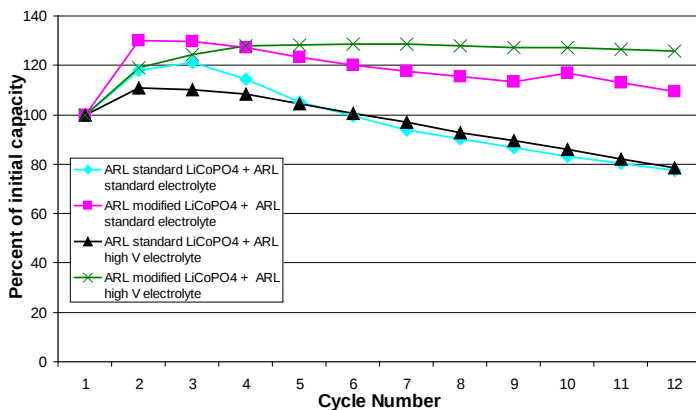

Substituted LiCoPO_4 with ARL-SEDD high voltage stabilized electrolyte demonstrates high cycle life (capacity retention of $>80\%$ at 500 cycles shown here) with about 97% coulombic efficiency.

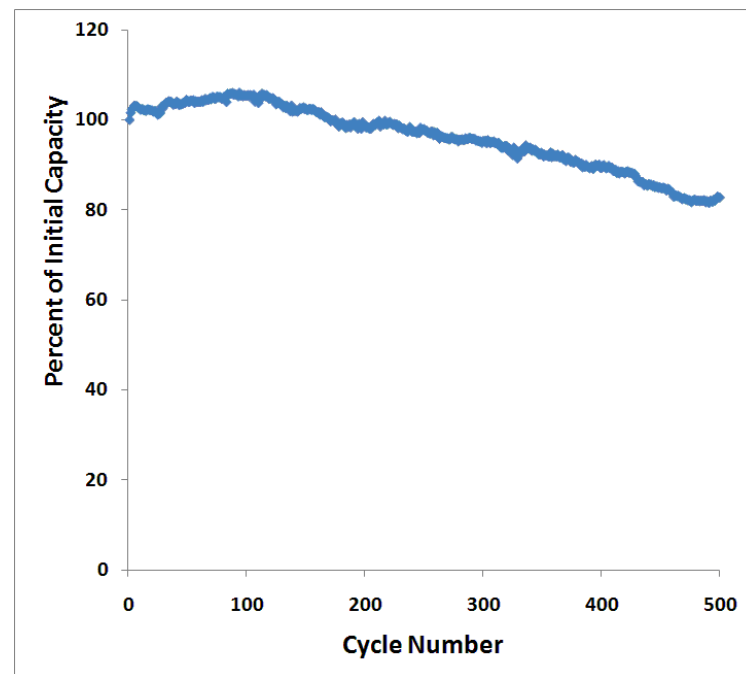

- Cathode expected to last far beyond 500 cycles
- Preparation method adaptable to existing cathode process lines
- IP includes novel composition of matter and preparation method

Technology Advantages

The High Cycle Life Cathode's advantages:

- Provides potentially up to 40% greater energy density than standard LiFePO_4
- Higher voltage at cell level may reduce number of cells required for application
- Easy and inexpensive method to prepare
- Offers safety advantage of phosphate based cathodes without trade-off in energy density.
- It is a "drop-in" technology (no new processing methods are required)

Technology Differentiation

Military application




- A soldier currently required to carry 50 lbs of batteries could potentially reduce the overall weight by about 20 lbs.
- Current military vehicles consume immense quantities of fossil fuels. Cost to bring forward fuel to the battlefield is enormous in terms of dollars and lives. Hybrid electric vehicles based on this technology will consume less fuel.

Improvements over existing products

- The BB2590, the current soldier rechargeable battery, constructed with this cathode material has a projected energy density of about 170 Wh/kg relative to current specifications of about 120 Wh/kg. Mission time can increase by 40% or weight of batteries can be reduced by 40%.




Technology Proof of Concept

Method of Preparation

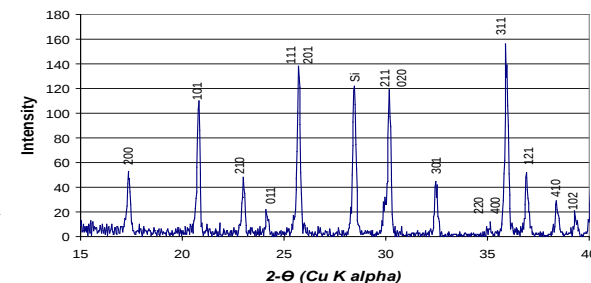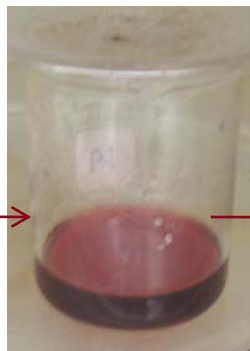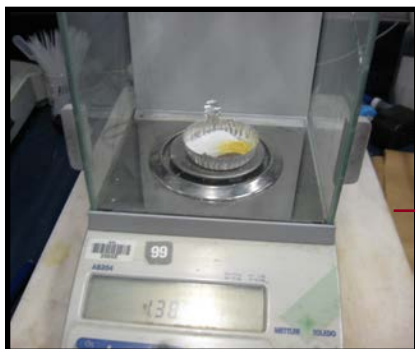

X-ray diffraction

Cathode coated with standard methods and tested in coin cells demonstrating long cycle life

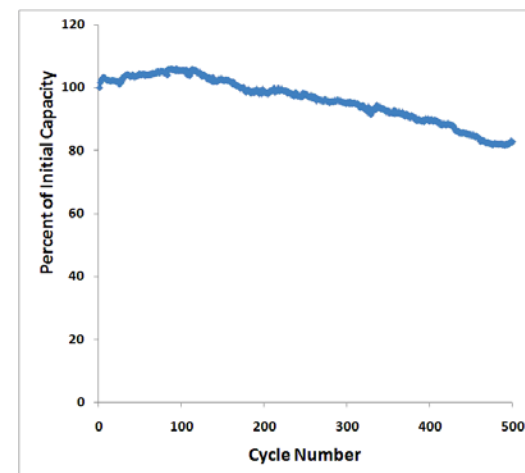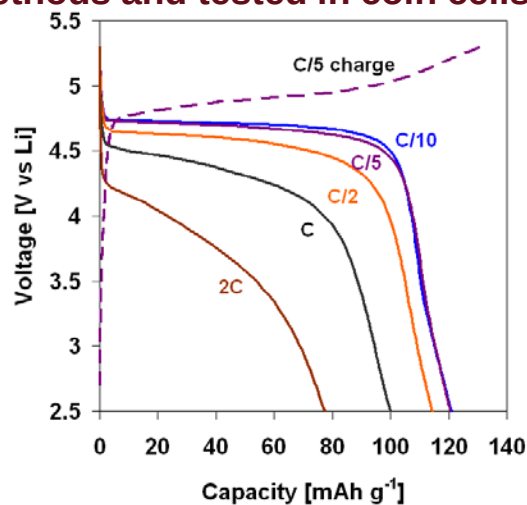

Currently about TRL-4

Military Applications

Envisioned military applications include:

- Soldier power for a longer life rechargeable Li-ion, e.g., BA-2590
- “More-electric” vehicles: starting, silent watch
- Military electronics
- Projected \$500 Million military/aerospace market for Li-ion by 2015*



Military Electronics



Soldier Power



More-electric vehicles

*Frost & Sullivan, March 2010, N779-27, US Battery Market for Military/Aerospace Applications.

APPROVED FOR PUBLIC RELEASE

TECHNOLOGY DRIVEN. WARFIGHTER FOCUSED.

Commercial Applications

40% Increased battery life for application to:

Three major markets

- Electric Vehicle, Hybrid Electric Vehicle
- Consumer Electronics
- Large scale stationary energy storage

Overall, Li ion market is about \$18 billion in 2010
(Sanyo estimate)*

Projected By 2015 (Sanyo estimate)*:

- \$18 Billion in Automotive applications
- \$18 Billion in Consumer electronics
- \$24 Billion in Large scale stationary energy storage



Large Scale Stationary storage (utilities)



Consumer Electronics



Hybrid Electric & Electric Vehicles

*As reported in Bloomberg Businessweek.com, 11/17/2010 author: Mariko Yasu

Technology Agreements

- A patent license and CRADA is sought. The current technology would benefit from a collaboration between the inventor team and the commercialization partner. This would most readily be done through a patent license / CRADA agreement.
- TRL 4– Fully functioning cell prototypes using the invented cathode.
- A Provisional patent application has been filed.