



Summary: Phase III Urban Acoustics Data

by W.C. Kirkpatrick Alberts, II, John M. Noble, and Mark A. Coleman

ARL-MR-0794

September 2011

NOTICES

Disclaimers

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

Citation of manufacturer's or trade names does not constitute an official endorsement or approval of the use thereof.

Destroy this report when it is no longer needed. Do not return it to the originator.

Army Research Laboratory

Adelphi, MD 20783-1197

ARL-MR-0794

September 2011

Summary: Phase III Urban Acoustics Data

W.C. Kirkpatrick Alberts, II, John M. Noble, and Mark A. Coleman
Computational and Information Sciences Directorate, ARL

REPORT DOCUMENTATION PAGE				Form Approved OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.					
1. REPORT DATE (DD-MM-YYYY)		2. REPORT TYPE		3. DATES COVERED (From - To)	
September 2011		Data Report			
4. TITLE AND SUBTITLE Summary: Phase III Urban Acoustics Data				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S) W.C. Kirkpatrick Alberts, II, John M. Noble, and Mark A. Coleman				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) U.S. Army Research Laboratory ATTN: RDRL-CIE-S 2800 Powder Mill Road Adelphi MD 20783-1197				8. PERFORMING ORGANIZATION REPORT NUMBER ARL-MR-0794	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited.					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT This report briefly describes the results of Phase III of a recent experimental program to characterize the propagation of sound in the urban environment. The site studied herein represents a third fundamental case of urban acoustics: a small, isolated cluster of single-story buildings. The results include microphone recordings of both impulsive and continuous-wave sources as well as meteorological information.					
15. SUBJECT TERMS Urban acoustics					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT UU	18. NUMBER OF PAGES 18	19a. NAME OF RESPONSIBLE PERSON W. C. Kirkpatrick Alberts, II
a. REPORT Unclassified	b. ABSTRACT Unclassified	c. THIS PAGE Unclassified			19b. TELEPHONE NUMBER (Include area code) (301) 394-2121

Contents

List of Figures	iv
1. Introduction	1
2. Methods and Procedures	1
3. Results	2
4. Discussion	5
5. Conclusion	5
6. References	6
Appendix A. MATLAB Microphone Data Viewer	7
Appendix B. MATLAB Temperature Data Viewer	9
Distribution List	11

List of Figures

Figure 1. Reference microphone (#4) recording of an impulse generated by a bird-scare device.	2
Figure 2. Roof-mounted microphone (#6) recording of broadband, pseudorandom noise generated by a loudspeaker.	3
Figure 3. Bird-scare impulse as recorded by a microphone situated between two buildings (#22).	3
Figure 4. Wind speed and wind direction as measured by an ultrasonic anemometer in close proximity to one of the four buildings in the experiment.	4
Figure 5. Example photograph of the experiment site and setup.	4

1. Introduction

Recently, a series of experiments were conducted to characterize the sound fields around what might be termed fundamental cases of urban acoustics (1–3) in order to determine the level of approximation that could be used when attempting to model the propagation of sound through urban terrain. The experimental study of these fundamental cases included a single-story isolated building typical of North American suburban areas and a three-story, concrete-block building similar to those found in urban industrial areas. This report describes the third phase of the study, which endeavored to characterize the sound field around an isolated set of four single-story buildings.

Section 2 briefly describes the methods and procedures used during the experiment. Section 3 presents example results, section 4 provides a short discussion of the results, and the final section offers some concluding remarks.

2. Methods and Procedures

The data referenced in this report were collected at a site in Maryland in July 2009 as part of an investigation of the processes that govern the propagation of sound through an urban environment (1–3). The data consist of microphone recordings of a pseudorandom noise broadcast by a loudspeaker and impulses generated by a propane bird-scare device. Collection times were 5 min for the bird-scare device and 3 min for the noise, which resulted in files of approximately 375 and 225 MB, respectively. The 32 microphones were emplaced around four single-story buildings. In addition to the microphone recordings, meteorological information (wind speed, wind direction, temperature, pressure, and humidity) was also recorded during the two test days.

Files containing the coordinates of the building corners and coordinates of all of the sensor and source positions are included with the data. Microphone calibration information, photographs of the experimental setup and two MATLAB™ scripts for viewing the data are also included. The two MATLAB viewers are attached as appendices. Appendix A gives the script for viewing microphone data and appendix B gives the script for viewing data recorded by temperature probes.

3. Results

Figures 1 through 3 show representative data from 3 of the 32 microphones. Figure 1 shows an impulse recorded by a reference microphone. Figure 2 depicts broadband noise recorded by a roof-mounted microphone. Figure 3 shows a series of impulses recorded at a point between two buildings. Figure 4 is a representative plot of the wind speed versus time as measured by an ultrasonic anemometer placed on a tripod behind one of the buildings. The final figure, figure 5, is an example of the photographs that are included in the data set.

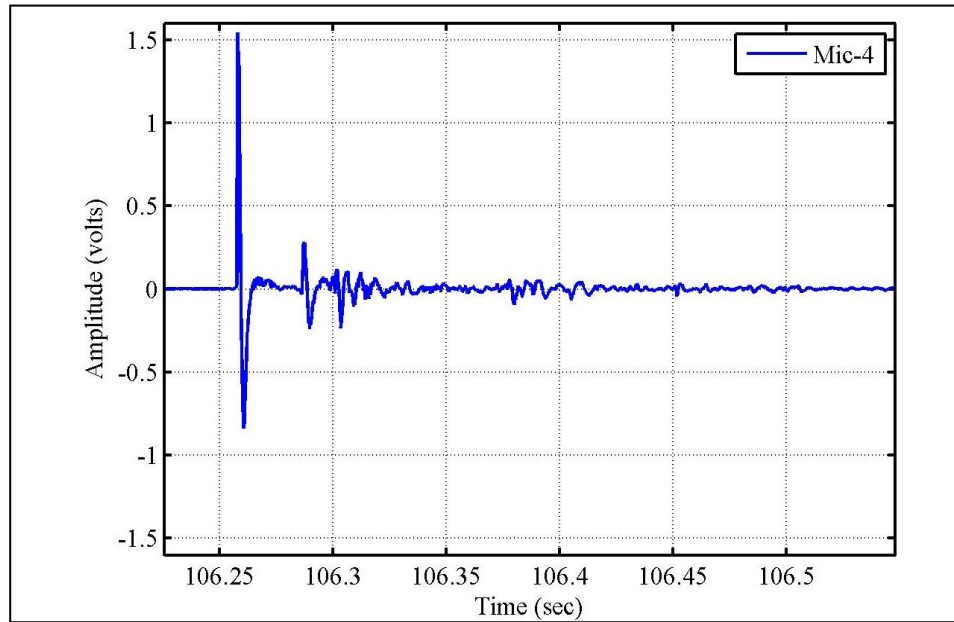


Figure 1. Reference microphone (#4) recording of an impulse generated by a bird-scare device.

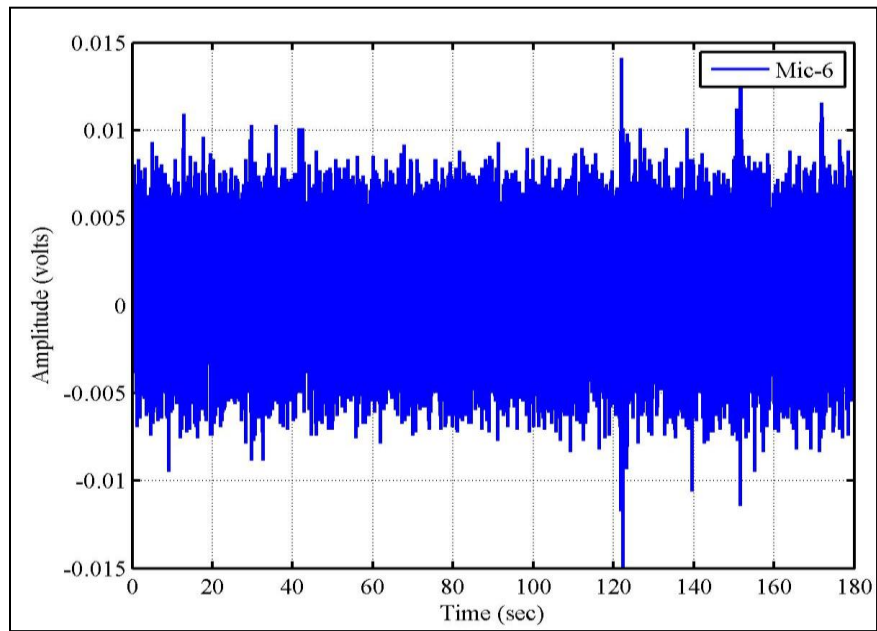


Figure 2. Roof-mounted microphone (#6) recording of broadband, pseudorandom noise generated by a loudspeaker.

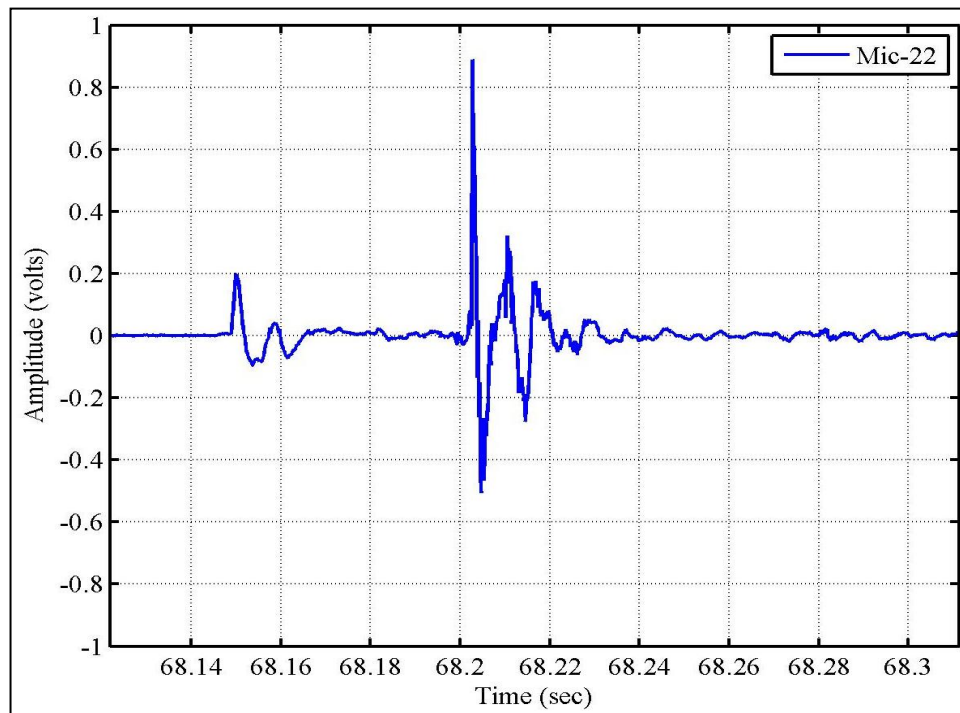


Figure 3. Bird-scare impulse as recorded by a microphone situated between two buildings (#22).

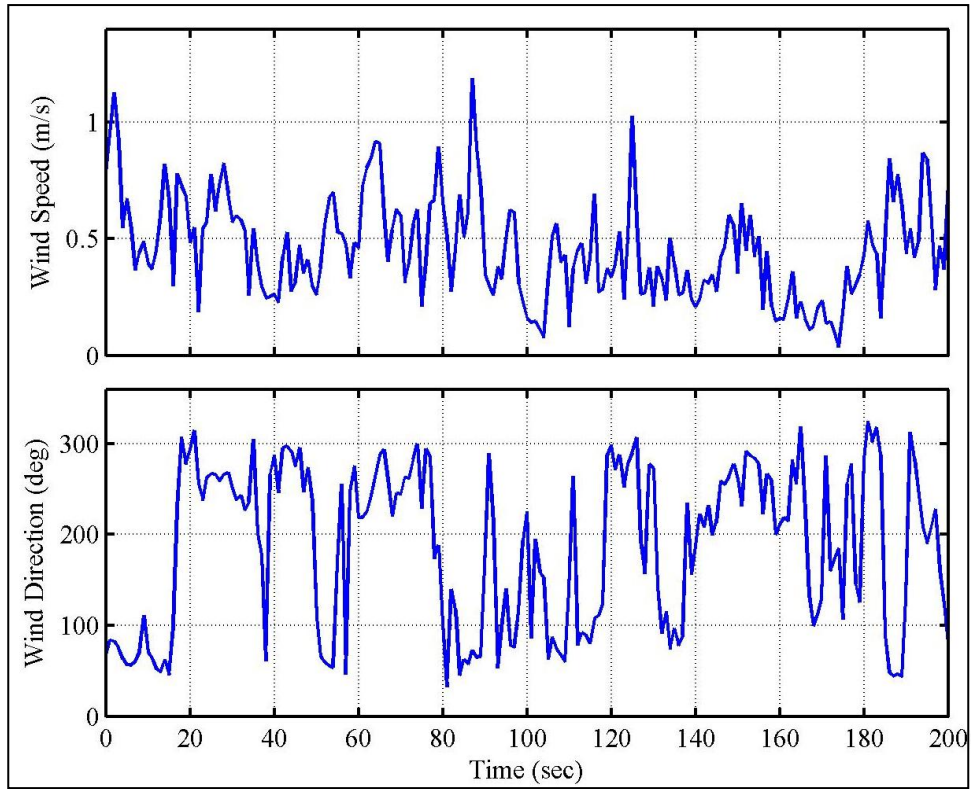


Figure 4. Wind speed and wind direction as measured by an ultrasonic anemometer in close proximity to one of the four buildings in the experiment.



Figure 5. Example photograph of the experiment site and setup.

4. Discussion

Example time-domain acoustic data are shown in figures 1 through 3. The reference impulse shown in figure 1 at 106.25 s is clean and will be time gated and used for normalizing scattered and diffracted impulses measured at other positions around the site. This impulse was measured by a microphone approximately 1 m above ground in front of the building in the center of figure 5. Figure 2 shows diffracted random noise generated by a loudspeaker superimposed with impulses (at 120, 140, and 150 s) from a nearby police firing range. The microphone that recorded the noise in figure 2 was mounted on the roof of the central building in figure 5. Thus, the noise reaching the microphone passed a single diffracting edge. Figure 3 demonstrates the difficulty associated with sound propagation in an urban environment, and shows, at 68.15 s, a strong, clear impulsive arrival and, at 68.2 s, a second strong impulsive arrival. The first arrival is a superposition of at least eight diffracted paths around the building in the far right of figure 5. The second arrival is due to a reflection from the building second from the right in figure 5. A direction-finding algorithm operating on either of the impulses in figure 3 would point in an erroneous direction. The ultrasonic anemometer data shown in figure 4 demonstrate the changes in the horizontal flow due to the wind passing over a building, which can lead to turbulent effects on propagating sound, such as increased energy penetration into the acoustic shadow of the building due to turbulent scattering. Figure 5 shows the layout of the site and allows for an approximate determination of the elevation changes encountered by a propagating acoustic impulse.

5. Conclusion

The third phase of an urban acoustics study to characterize the propagation of sound around an isolated set of four single-story buildings has generated a comprehensive acoustic data set of recordings of impulsive and broadband noise signatures at many points around the set of buildings. Included in the data set are meteorological measurements taken both close to and separated from the buildings. Initial analysis of time-domain acoustic and wind data shows complicated behavior that might be expected considering the non-trivial environment of the experiment.

6. References

1. Alberts, W.C.K., II; Noble, J. M.; Coleman, M. A. On the Application of Well-known Diffraction Models to the Sound Field in the Shadow Zone of an Isolated Building. *App. Acoust.* **2009**, 70 (8), 1128–1130.
2. Alberts, W.C.K., II; Noble, J. M.; Coleman, M. A. Sound Propagation in the Vicinity of An Isolated Building: an Experimental Investigation. *J. Acoust. Soc. Am.* **2008**, 124 (2), 733–742.
3. Alberts, W.C.K., II; Coleman, M. A.; Noble, J. M. *Fundamental Cases of Urban Acoustics and Their Interaction with Propagating sound: Phase II*; ARL-TR-5285; U.S. Army Research Laboratory: Adelphi, MD, September 2010.

Appendix A. MATLAB Microphone Data Viewer

The following is the script we used for viewing microphone data.

```
function T3_data_viewer(numchan)
%Function to view channels from each of the 32 microphones used during the
%Davidsonville, MD urban acoustics experiment. This will also serve as an
%example for extracting the data from the rather large binary files (~400
%MB)
%
%Input
%1) number of channels to plot (1 to 5)(limited to 5 for memory reasons)
%
%Output
%1) Plot containing all requested channels
%
%initial writing -- Dr. W.C. Kirkpatrick Alberts, II: 30 March 2011

%Request file path and name from user
[fil, pat] = uigetfile('*.bin','Select Combined Data File');
patfil = strcat(pat,fil);

fid = fopen(patfil);

%Get number of points per channel(10 kHz sample rate, 4 bytes, 32 channels)
fseek(fid,0,'eof');
ppchan = ftell(fid)/4/32;
fseek(fid,0,'bof');

%Get channel numbers from user
channel = zeros(1,numchan);
lgdstr = cell(1,numchan);
for k = 1:numchan
    channel(k) = input('Enter microphone number:');
    lgdstr{k} = strcat('Mic-', num2str(channel(k)));
end

%Read data
Data = zeros(ppchan,numchan);
for k = 1:numchan
    fseek(fid,(channel(k)-1)*ppchan*4,'bof');
    Data(:,k) = fread(fid,ppchan,'float32');
end

time = 0:1e-4:(ppchan/1e4)-1e-4;
figure
hold all
for k = 1:numchan
    plot(time,Data(:,k))
    xlabel('Time (sec)')
    ylabel('Amplitude (volts)')
end
```

```
switch numchan
case 1
    legend(lgdstr{1})
case 2
    legend(lgdstr{1},lgdstr{2})
case 3
    legend(lgdstr{1},lgdstr{2},lgdstr{3})
case 4
    legend(lgdstr{1},lgdstr{2},lgdstr{3},lgdstr{4})
case 5
    legend(lgdstr{1},lgdstr{2},lgdstr{3},lgdstr{4},lgdstr{5})
end
```

Appendix B. MATLAB Temperature Data Viewer

The following is the script we used for viewing data recorded by temperature probes.

```
function T3_temp_viewer
%Function to view temperature date from each of the 8 probes used during the
%Davidsonville, MD urban acoustics experiment.  This will also serve as an
%example for extracting the data.
%
%Input
%none
%
%Output
%1) Plot containg all requested channels
%
%initial writing -- Dr. W.C. Kirkpatrick Alberts, II: 31 March 2011

%Request file path and name from user
[fil, pat] = uigetfile('*.bin','Select Combined Data File');
patfil = strcat(pat,fil);

fid = fopen(patfil);

%Get number of points per channel(4 bytes, 8 channels)
fseek(fid,0,'eof');
ppchan = ftell(fid)/4/8;
fseek(fid,0,'bof');
numchan = 8;
channel = 1:8;
lgdstr = cell(1,numchan);
for k = 1:numchan
    lgdstr{k} = strcat('Temp-', num2str(channel(k)));
end

%Read data
Data = zeros(ppchan,numchan);
for k = 1:numchan
    fseek(fid,(channel(k)-1)*ppchan*4,'bof');
    Data(:,k) = fread(fid,ppchan,'float32');
end

time = 0:ppchan-1;
figure
hold all
for k = 1:numchan
    plot(time,Data(:,k))
        xlabel('Time (sec)')
        ylabel('Temperature (deg C)')
end
axis([0 300 20 40])
legend(lgdstr{1},lgdstr{2},lgdstr{3},lgdstr{4},lgdstr{5},...
        lgdstr{6},lgdstr{7},lgdstr{8})
```

INTENTIONALLY LEFT BLANK.

NO. OF COPIES	ORGANIZATION
1	ADMNSTR DEFNS TECHL INFO CTR ATTN DTIC OCP 8725 JOHN J KINGMAN RD STE 0944 FT BELVOIR VA 22060-6218
11	US ARMY RSRCH LAB ATTN IMNE ALC HRR MAIL & RECORDS MGMT ATTN RDRL CIO LL TECHL LIB ATTN RDRL CIO MT TECHL PUB ATTN RDRL CIE S WC KIRKPATRICK ALBERTS II (5 COPIES) JOHN NOBLE MARK COLEMAN ADELPHI MD 20783-1197

INTENTIONALLY LEFT BLANK.