

EXPLORING BROAD AREA QUANTUM CASCADE LASERS

Tim Newell, et. al.

1 October 2017

Technical Paper

APPROVED FOR PUBLIC RELEASE. DISTRIBUTION IS UNLIMITED



**AIR FORCE RESEARCH LABORATORY
Directed Energy Directorate
3550 Aberdeen Ave SE
AIR FORCE MATERIEL COMMAND
KIRTLAND AIR FORCE BASE, NM 87117-5776**

NOTICE AND SIGNATURE PAGE

Using Government drawings, specifications, or other data included in this document for any purpose other than Government procurement does not in any way obligate the U.S. Government. The fact that the Government formulated or supplied the drawings, specifications, or other data does not license the holder or any other person or corporation; or convey any rights or permission to manufacture, use, or sell any patented invention that may relate to them.

This report was cleared for public release by the AFRL RD/RV Corporate Communications Office and is available to the general public, including foreign nationals. Copies may be obtained from the Defense Technical Information Center (DTIC) (<http://www.dtic.mil>).

AFRL-RD-PS-TP-2017-0008 HAS BEEN REVIEWED AND IS APPROVED FOR PUBLICATION IN ACCORDANCE WITH ASSIGNED DISTRIBUTION STATEMENT.

**LU.CHUNTE.AND
REW.1284461386**

Digitally signed by
LU.CHUNTE.ANDREW.1284461386
DN: c=US, o=U.S. Government, ou=DoD, ou=PKI,
ou=USAF, cn=LU.CHUNTE.ANDREW.1284461386
Date: 2017.12.15 13:45:06 -07'00'

CHUNTE LU, DR-II, DAF
Work Unit Manager

**WOOD.KENTON.T
.1151077656**

Digitally signed by
WOOD.KENTON.T.1151077656
Date: 2018.02.01 10:49:04 -07'00'

KENTON T. WOOD, DR-IV, DAF
Chief, Laser Division

This report is published in the interest of scientific and technical information exchange, and its publication does not constitute the Government's approval or disapproval of its ideas or findings.

REPORT DOCUMENTATION PAGE			Form Approved OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing this collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.				
1. REPORT DATE (DD-MM-YYYY) 01/10/2017		2. REPORT TYPE Technical Paper		3. DATES COVERED (From - To) 1 October 2015- 1 October 2017
4. TITLE AND SUBTITLE Exploring Broad Area Quantum Cascade Lasers		5a. CONTRACT NUMBER In House		
		5b. GRANT NUMBER		
		5c. PROGRAM ELEMENT NUMBER		
6. AUTHOR(S) Tim Newell, Ron Kaspi, Andy Lu, Chi Yang		5d. PROJECT NUMBER		
		5e. TASK NUMBER		
		5f. WORK UNIT NUMBER D0C7		
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Air Force Research Laboratory 3550 Aberdeen Ave. SE Kirtland AFB, NM 87117-5776		8. PERFORMING ORGANIZATION REPORT NUMBER		
9. SPONSORING / MONITORING AGENCY NAME(S) AND ADDRESS(ES) Air Force Research Laboratory 3550 Aberdeen Ave SE Kirtland AFB, NM 87117-5776		10. SPONSOR/MONITOR'S ACRONYM(S) AFRL/RDLTD		
		11. SPONSOR/MONITOR'S REPORT NUMBER(S) AFRL-RD-PS-TP-2017-0008		
12. DISTRIBUTION / AVAILABILITY STATEMENT Approved for public release. Distribution is unlimited. AFRL RD/RV Corporate Communications Office Approval #RDMX-17-14691				
13. SUPPLEMENTARY NOTES				
14. ABSTRACT Quantum Cascade Lasers fabricated for multi-transverse mode operation have seldom been investigated. And yet they exhibit curious behavior such as the coherent locking of low order modes or apparently oscillating in a single but high-order transverse mode. As opposed to the commonly used semiconductor diode laser, quantum cascade lasers are unipolar devices creating photons from electron transitions in the conduction band. This changes their inherent time scales and also leads to a very low linewidth enhancement factor. Thus their intrinsic performance can be substantially different than their diode counterparts. In this talk we explore a 40-micron wide broad area laser with and without feedback from an external mirror. The interest is to see if feedback can alter the transverse modes, their time scales, and if this feedback leads to nonlinear oscillations and perhaps chaos.				
15. SUBJECT TERMS Quantum-well diode; Mid-IR; Brightness scaling; Broad area lasers				
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT SAR	18. NUMBER OF PAGES 36
a. REPORT Unclassified	b. ABSTRACT Unclassified	c. THIS PAGE Unclassified		
				19b. TELEPHONE NUMBER (include area code)

Headquarters U.S. Air Force

Integrity - Service - Excellence

Exploring Broad Area Quantum Cascade Lasers



Tim Newell, Ron Kaspi, Andy
Lu, and Chi Yang
Air Force Research Laboratory
Directed Energy Directorate
Albuquerque, NM USA



Abstract

Quantum Cascade Lasers fabricated for multi-transverse mode operation have seldom been investigated. And yet they exhibit curious behavior such as the coherent locking of low order modes or apparently oscillating in a single but high-order transverse mode. As opposed to the commonly used semiconductor diode laser, quantum cascade lasers are unipolar devices creating photons from electron transitions in the conduction band. This changes their inherent time scales and also leads to a very low linewidth enhancement factor. Thus their intrinsic performance can be substantially different than their diode counterparts. In this talk we explore a 40-micron wide broad area laser with and without feedback from an external mirror. The interest is to see if feedback can alter the transverse modes, their time scales, and if this feedback leads to nonlinear oscillations and perhaps chaos.




Broad Area Quantum Cascade Lasers
Feedback Experiments
Beam Control
Temporal Dynamics
Mode Control Methods
Summary



III-V Semiconductor Lasers

Quantum Well Laser

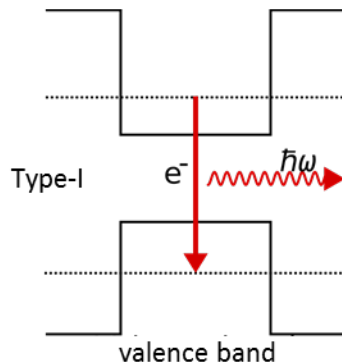

Electron – hole recombination


λ : ~200nm to 3720nm

Easy to grow:

9 to 12 alloy layers with
3- to 5-QWs in parallel

*Electrical to optical efficiency can be
over 70%.*

Quantum Cascade Laser

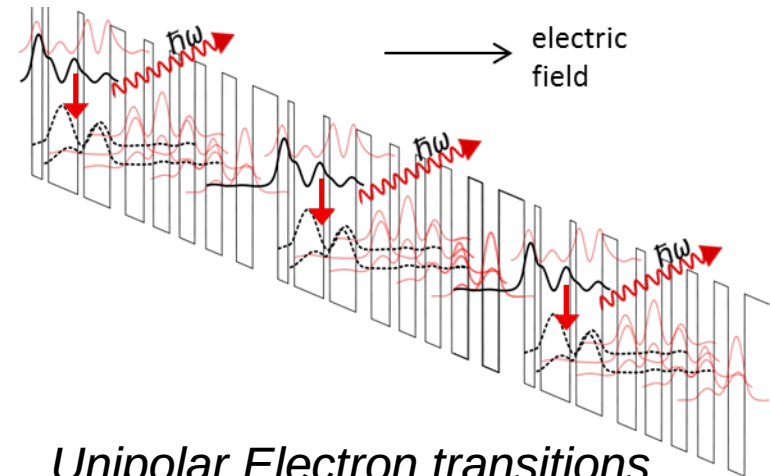

Unipolar Electron transitions

λ : ~3500nm to 30 μ m

Demanding growth:


25- to 35-stages in series and
~270 alloy layers

*<10% efficiency is normal.
25% is the record*



QW & QCL material processing


Quantum Well Laser

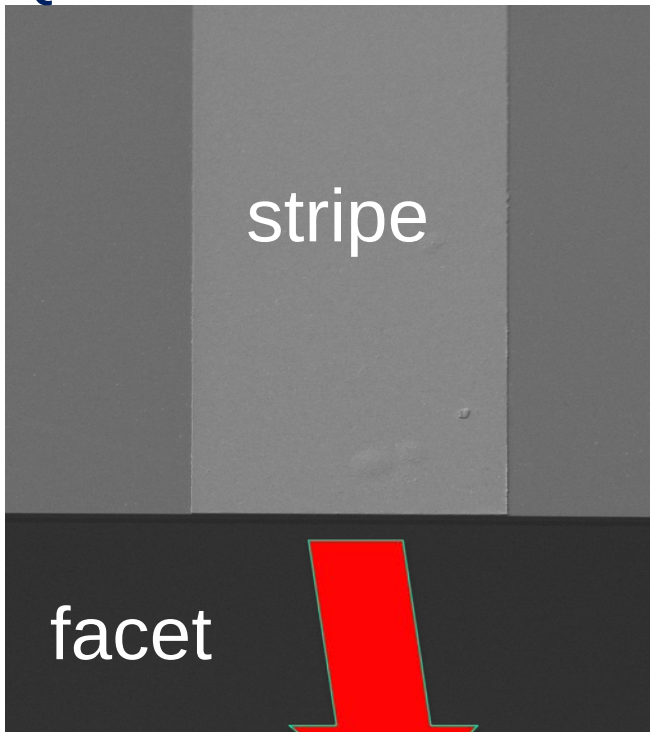

emission

Minimal current spreading:
Laser cavity defined by the electrical contact.

Quantum Cascade Laser

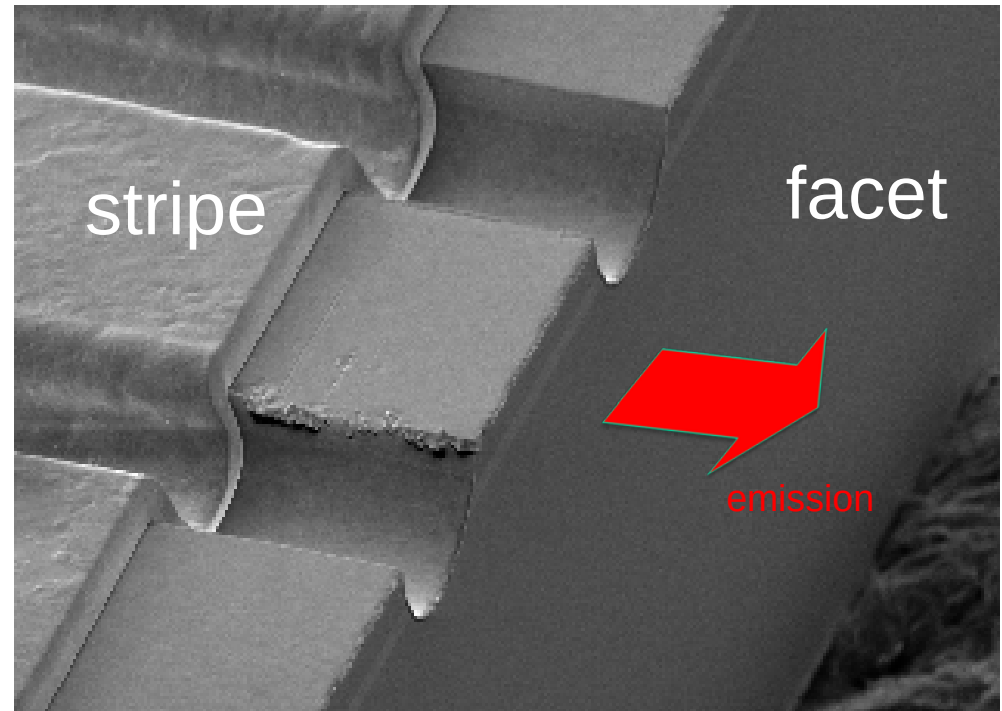


emission

Strong current spreading:
Trenches etched deeper than the active region.




Single to Multi-Transverse Modes

Narrow ridge $< 10\mu\text{m}$
Stable fundamental mode

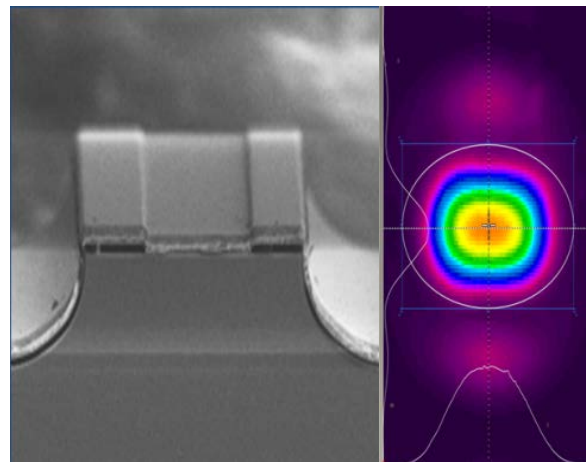

Widen the ridge $> \sim 10\mu\text{m}$
Higher order modes appear.

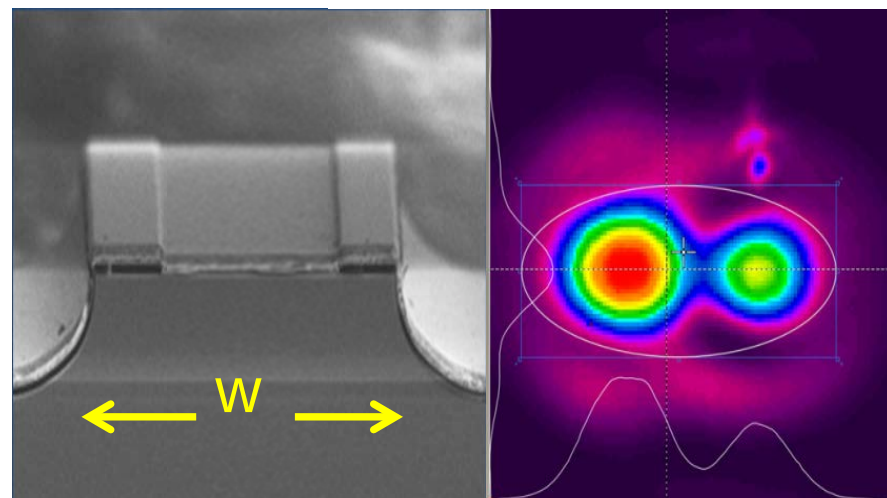




High-Order Transverse Modes

The modes can also be considered as two plane waves cycling through the rectangular “box” cavity.

$$E \sim e^{\pm i(2\pi n \sin \theta / \lambda)x}$$


n : refractive index
 θ : the angle measured within the cavity.

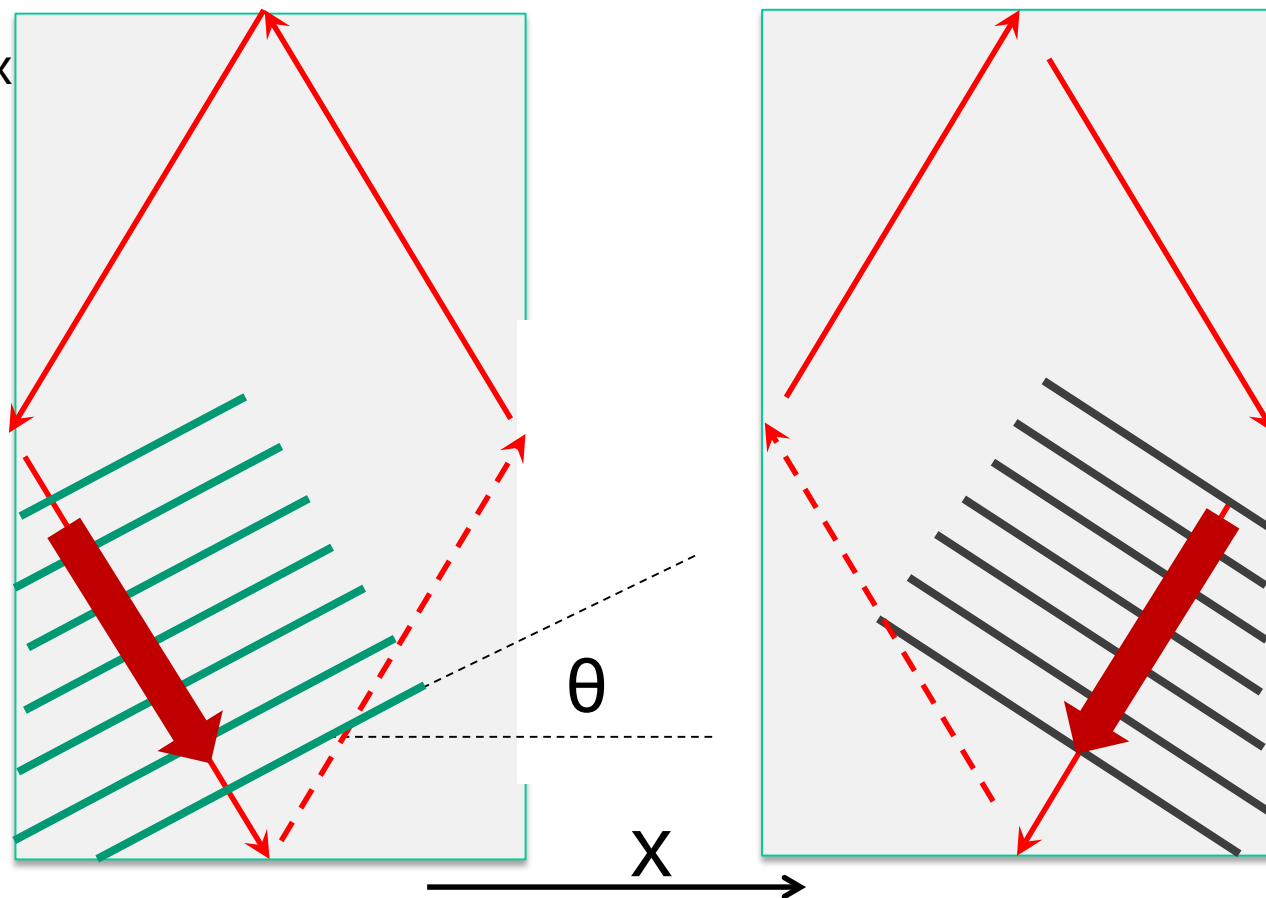

Transverse modes


Box resonator

$$E_m = \begin{cases} \text{odd} : & \cos\left(\frac{M\pi x}{w}\right) \\ \text{even} : & \sin\left(\frac{M\pi x}{w}\right) \end{cases} \leftarrow x$$

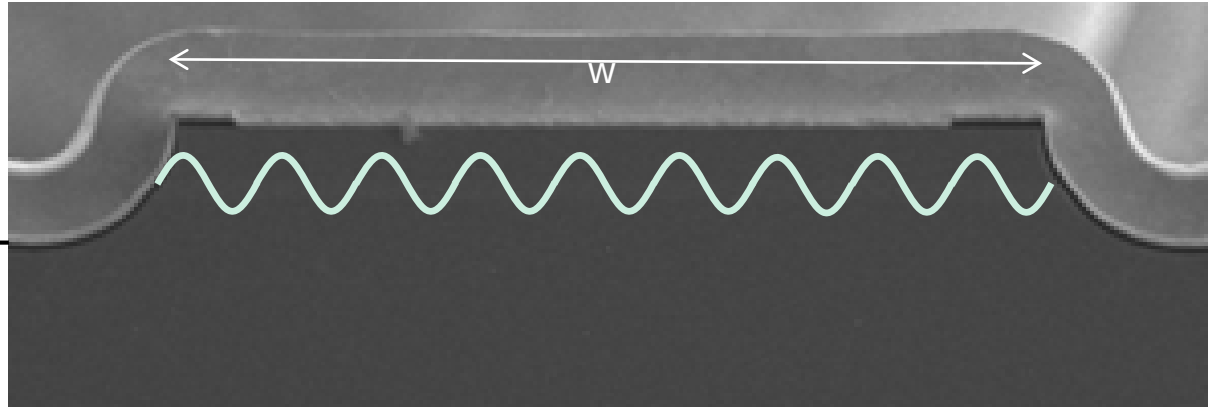

Expect the electric field to be an **incoherent** superposition of each mode

$$E = \sum_m E_m$$

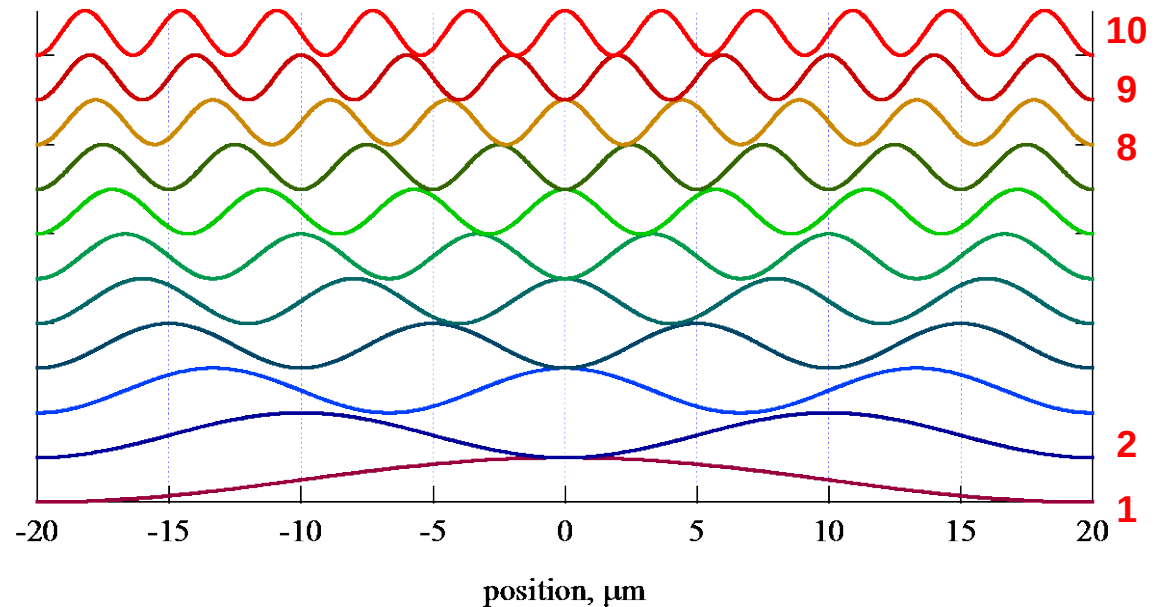



2 Dimensional Geometry Model

Plane waves self-reproduce on each cycle.

Define a lateral and longitudinal mode number.


M is the lateral mode number.

N is the diamond mode number.

Mode Number Equations:

$$\sin \phi_M = \frac{\lambda M}{2nw} \quad \text{and} \quad \tan(\phi) = \frac{Nw}{L}$$



Restricts modes in cavity

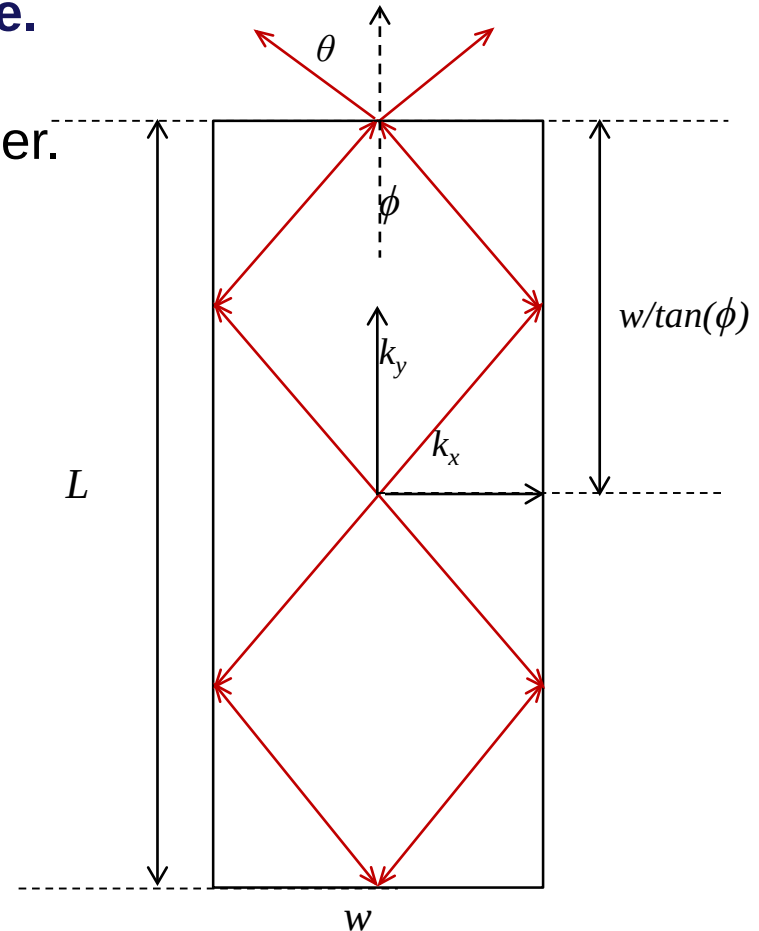



40 μ m BA-QCL

- 40 μ m stripe width.
- Over 5W power.
- 500ns pulses / 0.5% duty cycle
- Near field image of the facets.
- Mode number, M = 9
- Intensity of antinodes isn't uniform.

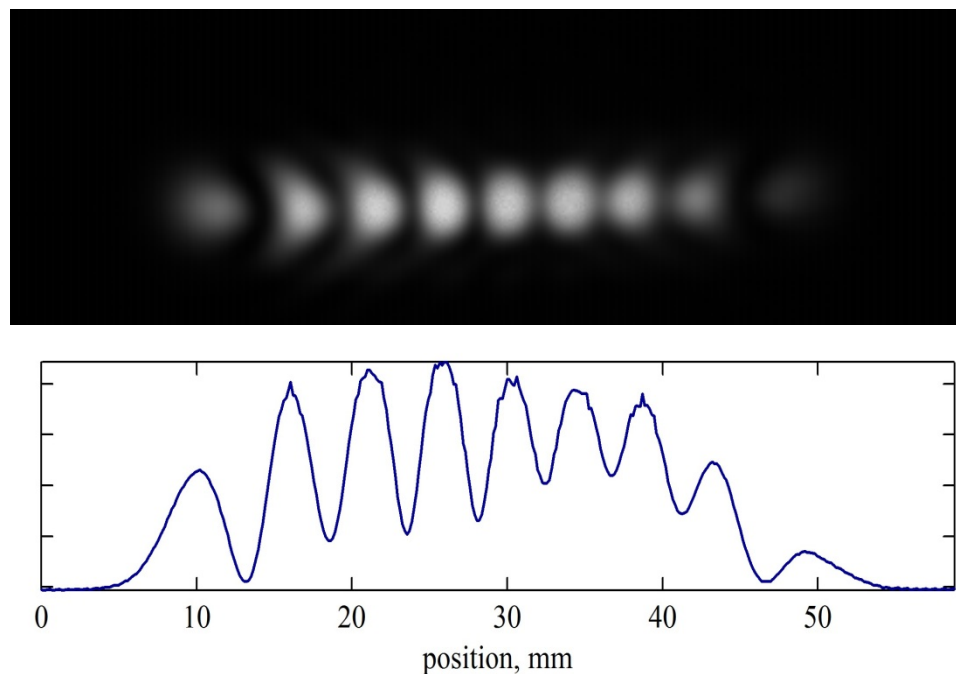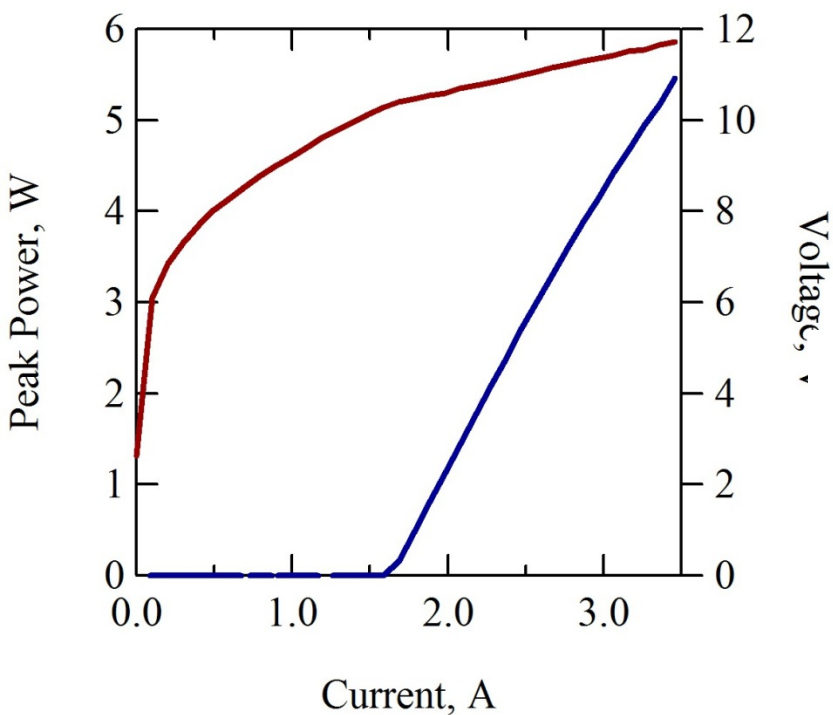

Line scan through image.




Far-Field BA-QCL beam



Single high order transverse mode exhibited in numerous QCLs

AFRL


100 μ m
stripe
QCL

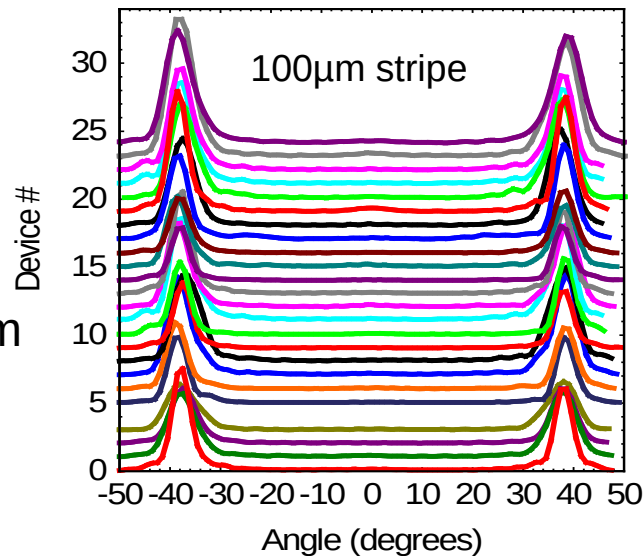

Northwestern
University

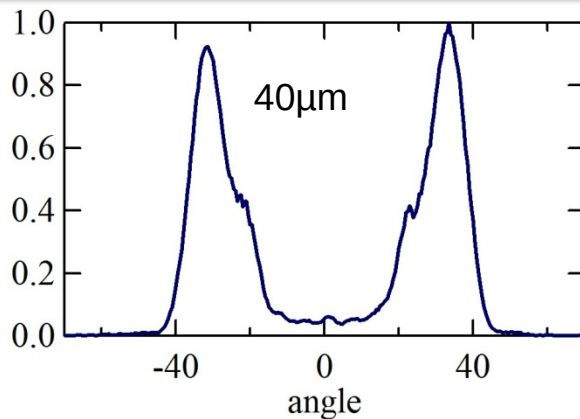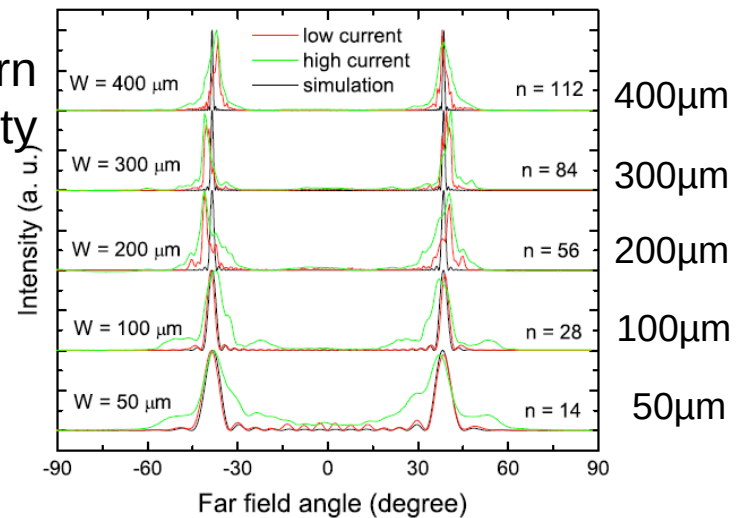

*But not
always
simple:*

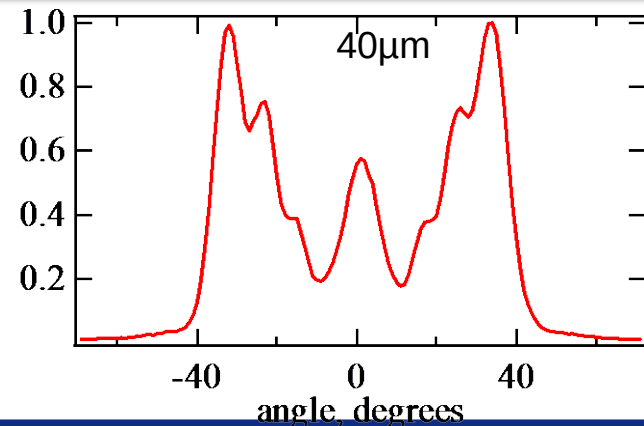



Feedback into a QCL?

Feedback: Injecting the laser with a fraction of its emitted light.

- Feedback control of the transverse modes?
 - Can we create a new mode?
 - Can we steer the beam?
 - **Can we make a high brightness and high power QCL?**

- Feedback Dynamics?
 - What are the time scales?
 - Can we lock irregular pulsations?
 - Will feedback incite chaotic dynamics?



Lang-Kobayashi equations for external cavity feedback

Single longitudinal and transverse laser subject to external cavity feedback:

$$\frac{dE(s)}{ds} = (1 + i\alpha) NE(s) + \eta e^{i\varphi} E(s - \tau_c)$$

$$\varepsilon \frac{dN(s)}{ds} = J - N(s) - (2N(s) + 1) |E(s)|^2$$

- $E(s)$ is composed of transverse and longitudinal modes.
- α , the linewidth enhancement factor, $\alpha \sim 0$ in QCLs
 - $\alpha = 3$ to 5 in QW lasers
- $\varepsilon = \tau_s / \tau_p$ where τ_s = carrier lifetime = few ps.
 - $\varepsilon \sim 100 - 1000$ in QW lasers & $\varepsilon \sim 1 - 10$ in QCLs

N is the dimensionless excess carrier number (inversion).

η is the feedback ratio. J is the excess pumping rate.

Feedback phase ϑ and round trip time, τ_c . $s = t/\tau_p$, dimensionless time.




Feedback Modeling and experiments

- Historical work
 - Almost always using diode lasers. Recent work with QCLs
 - Usually assumes **single** longitudinal mode
 - Laser cavity is **single** transverse mode
 - Modeling can be demanding but tractable

- Broad area feedback
 - **Multi**-longitudinal and transverse modes
 - Not yet modeled – quite complicated
 - No QCL studies and very limited diode experimental work



Experimental Arrangement

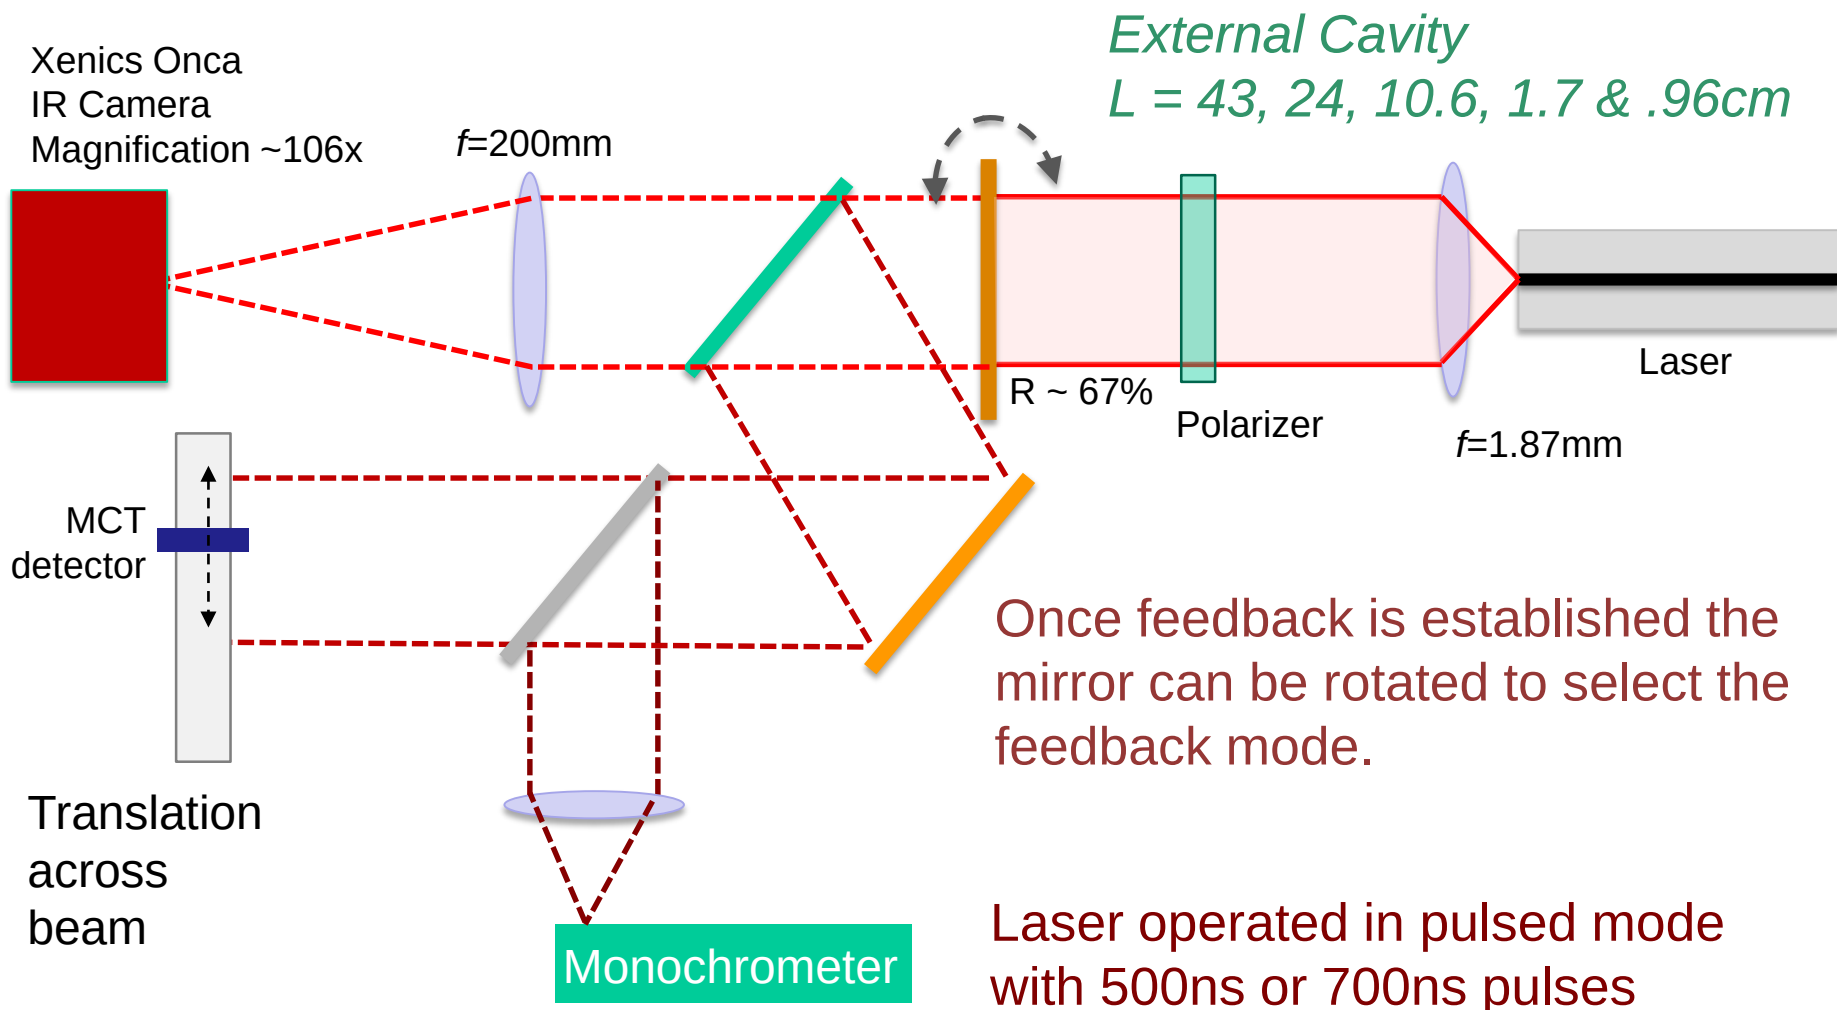




Beam Control




Simple visualization

- Feedback incidence angle is adjustable
- External cavity length plays a role
- Feedback intensity can be set with polarizer
- Feedback can stabilize the existing mode or induce new modes.


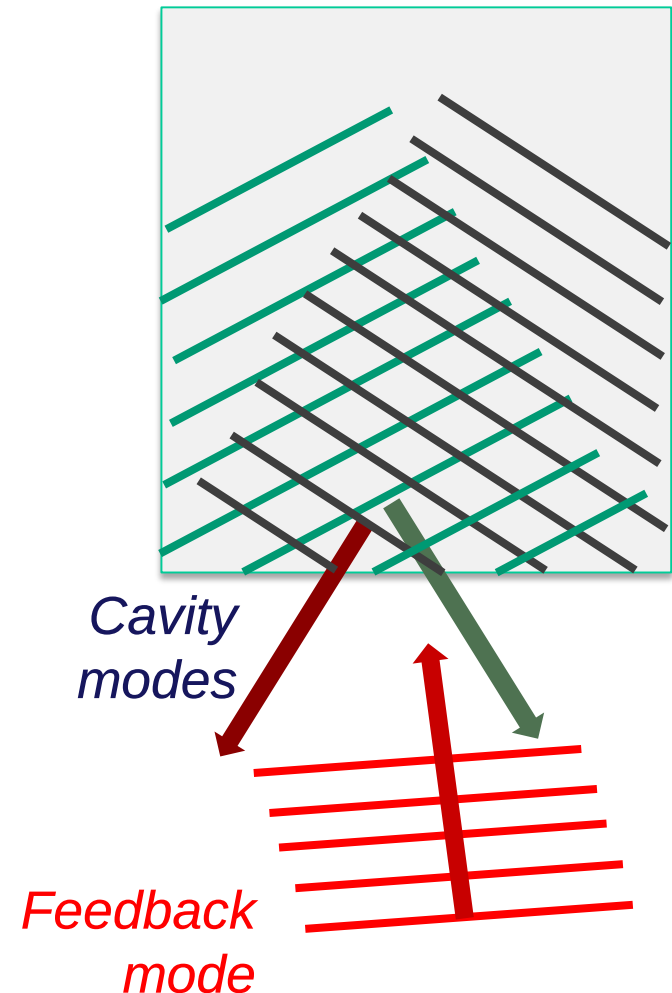




Success!

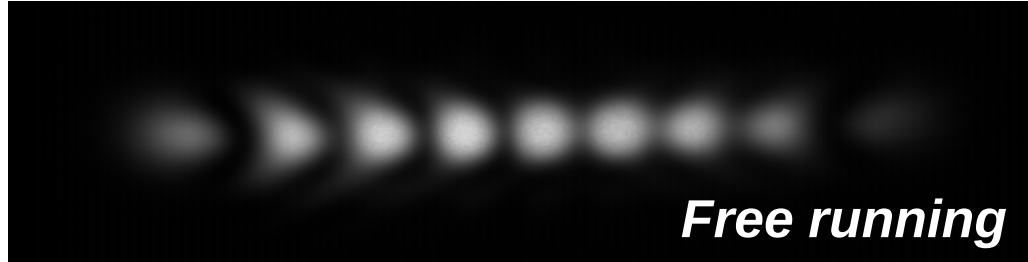

QCL facet near-field images show selection of different modes of operation based on the feedback incidence angle.

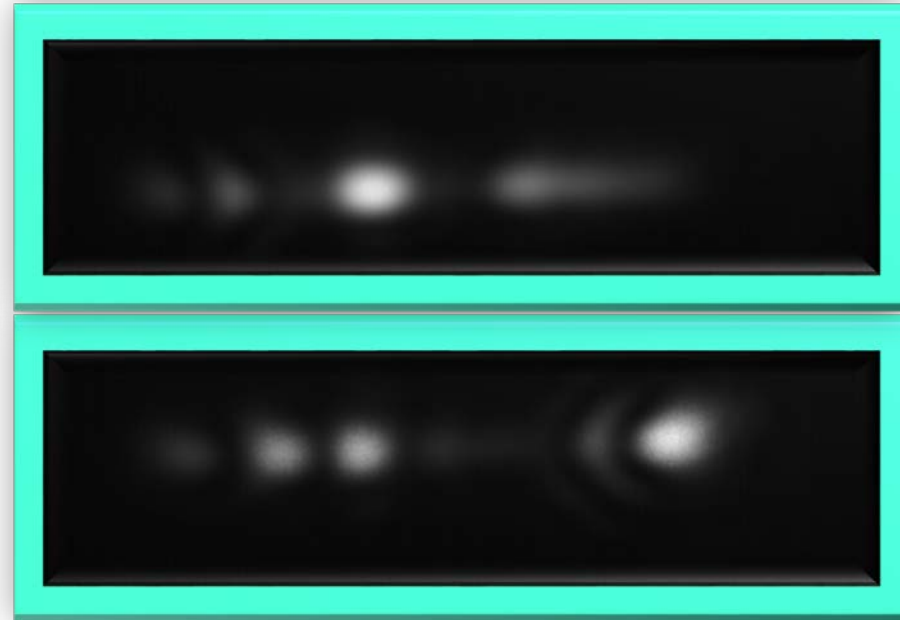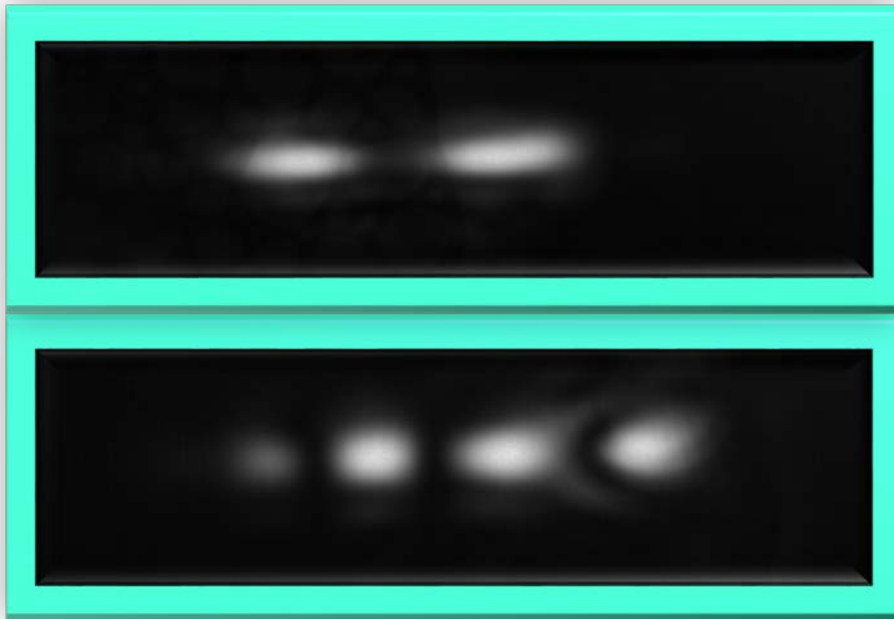




Line Scans from camera in a 24cm cavity


Mirror angle is rotated to select certain modes.




No
Feedback

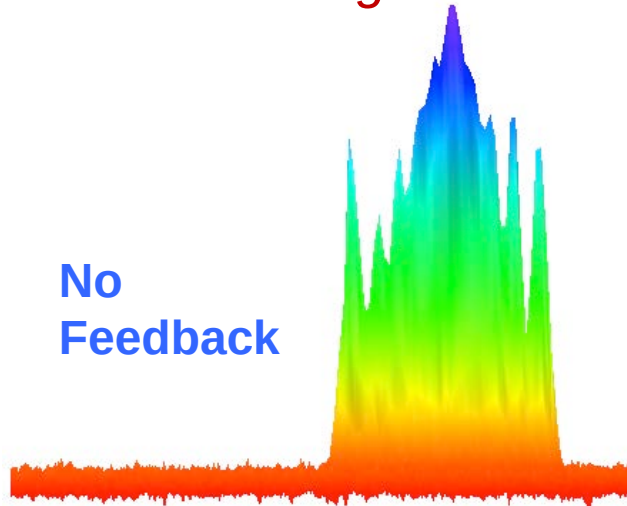


Centered
Feedback

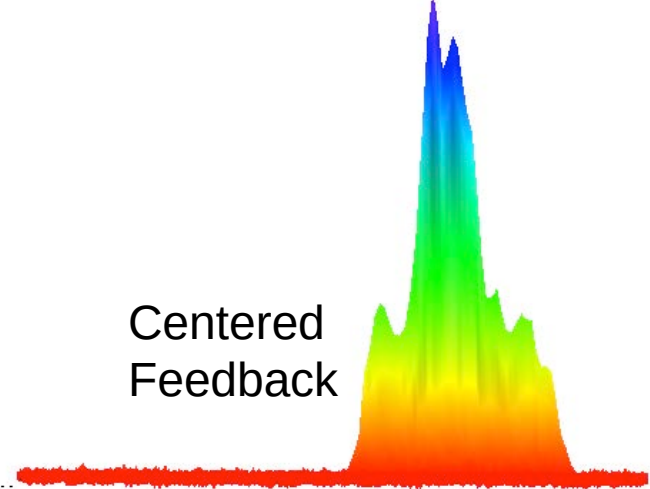

Even
Feedback

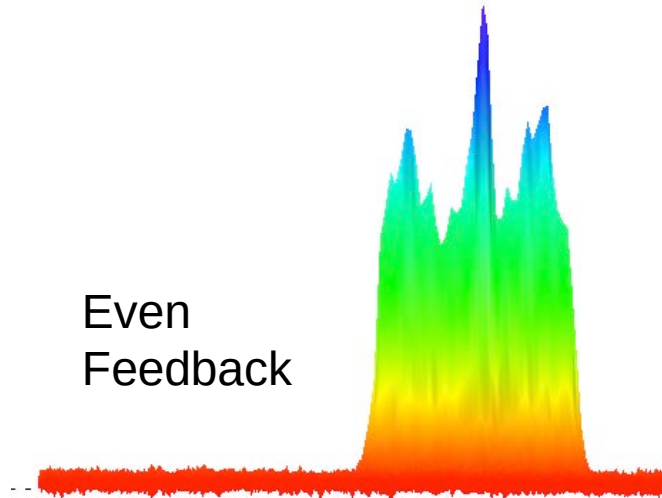




Off-centered
Feedback

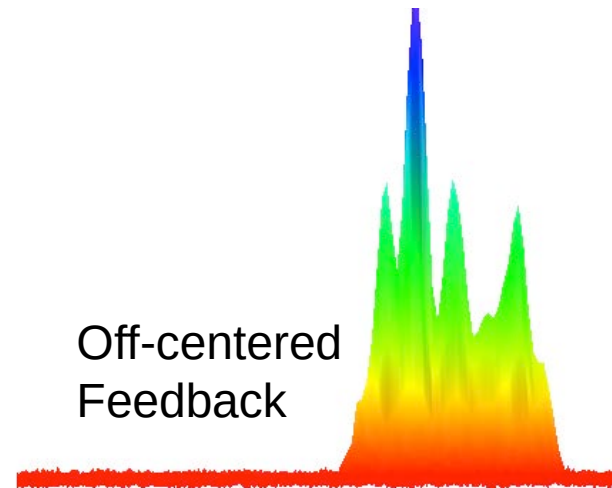

*Collaboration with
Prof. Frederic Grillot ,
Louise Jumpertz and
Matthieu Carras.*




Maximizing Brightness

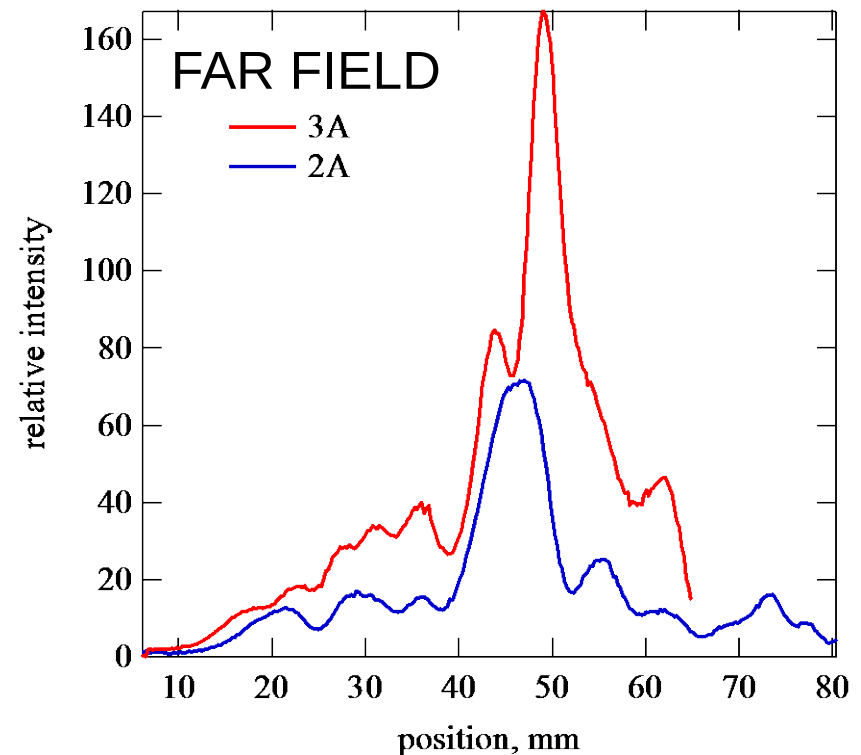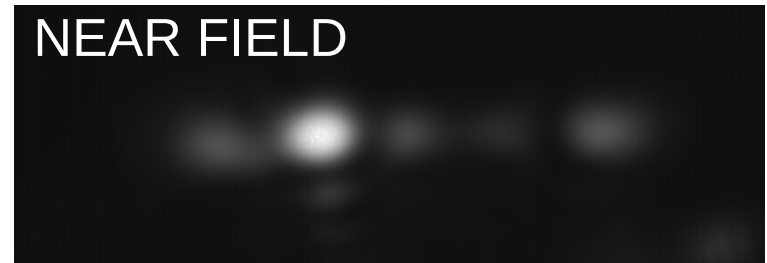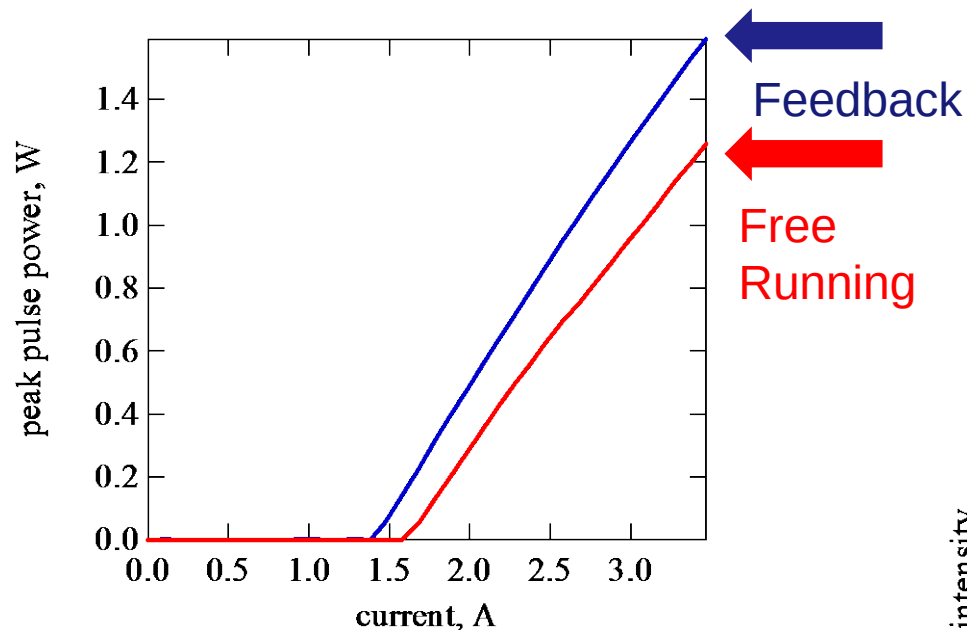

- 13% decrease in threshold.
- Increase in power.
- Far Field at 2m shows a strong single lobe.
- 10.6cm cavity length.




Temporal Dynamics

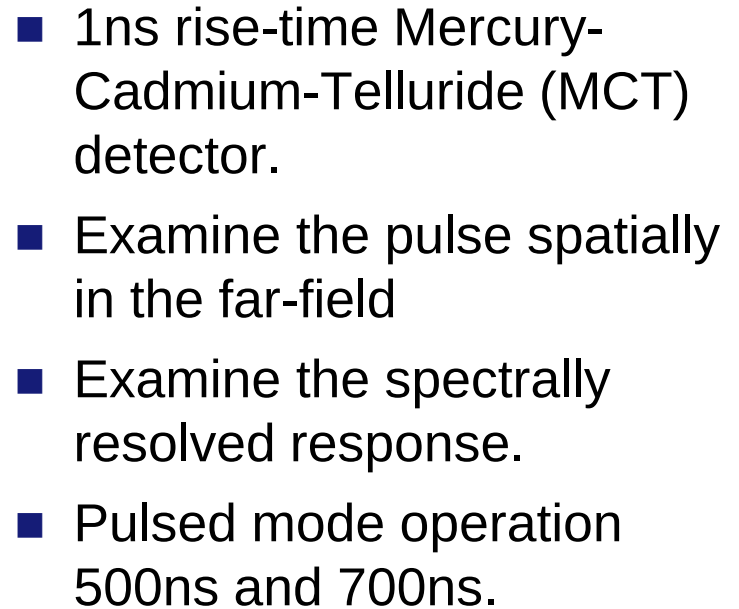



Free Running QCL – Spectra & Time Series

- Pulsed operation
- Longitudinal mode oscillations
- Irregular probably stochastic oscillations.


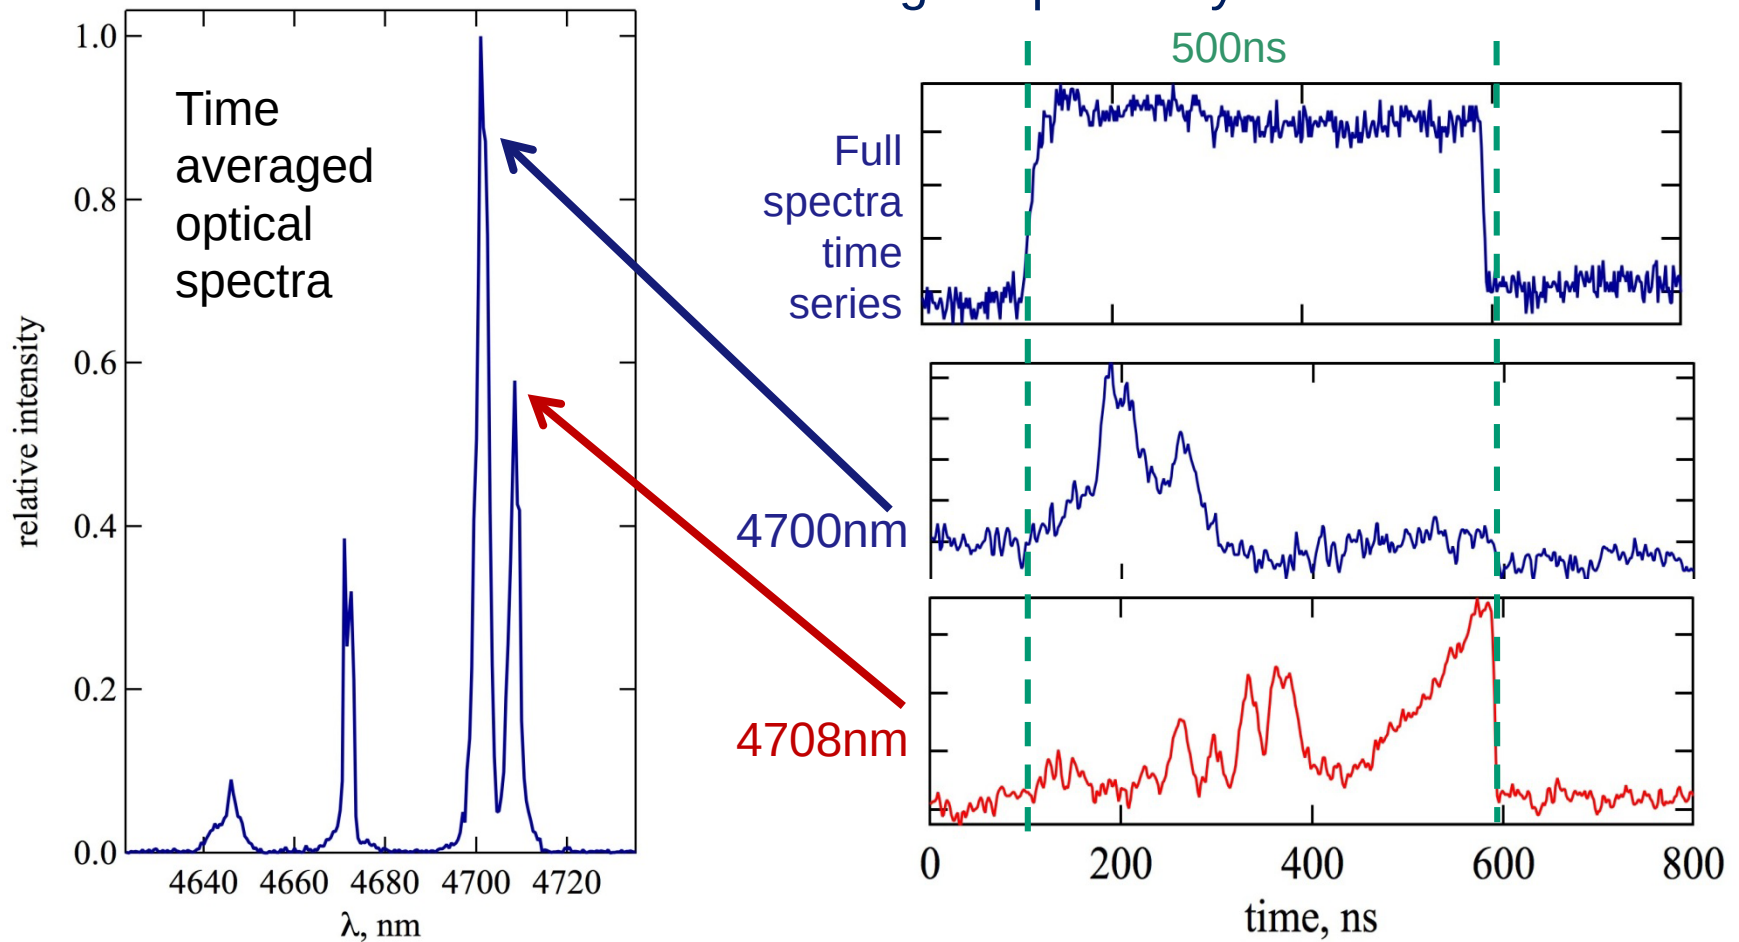




Longitudinal Mode Pulsations under feedback

Near-Field

- Wavelength fixed at 4758nm
- 8- to 10ns pulse widths
- 10.6mm cavity

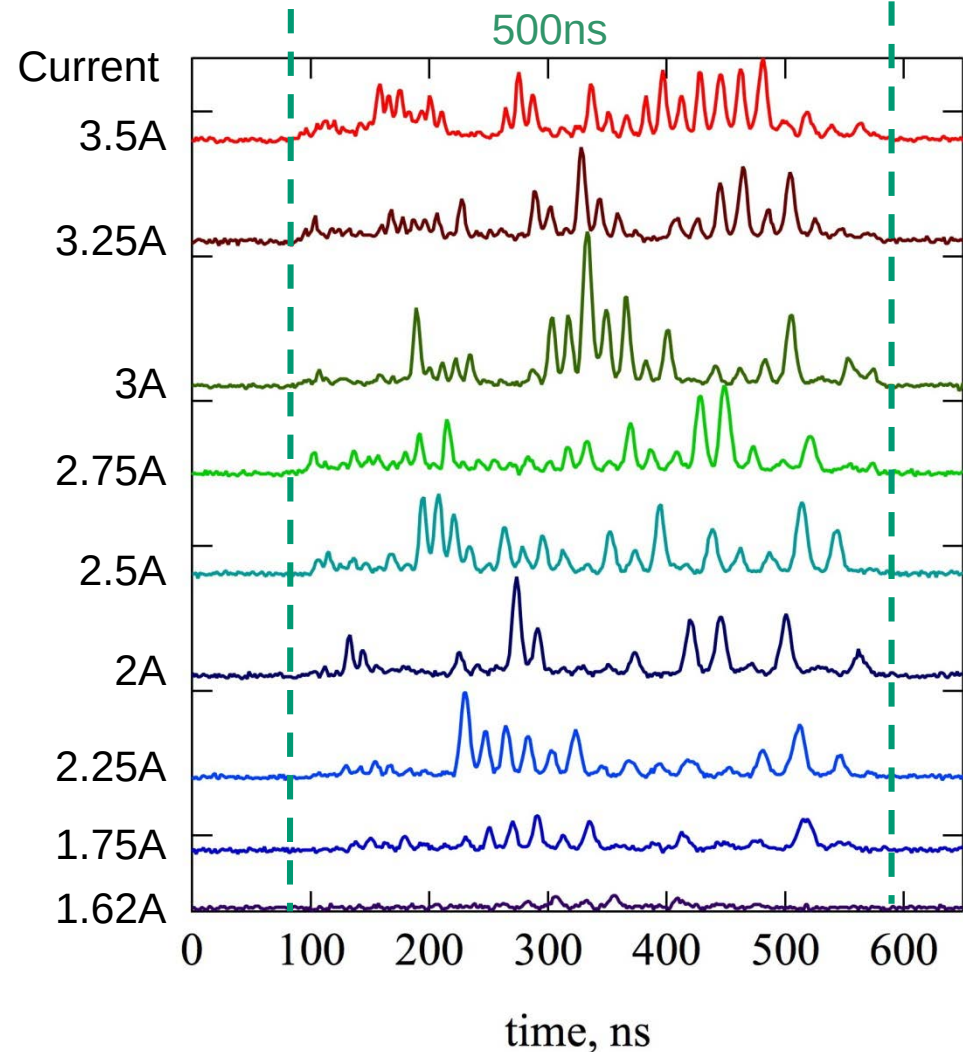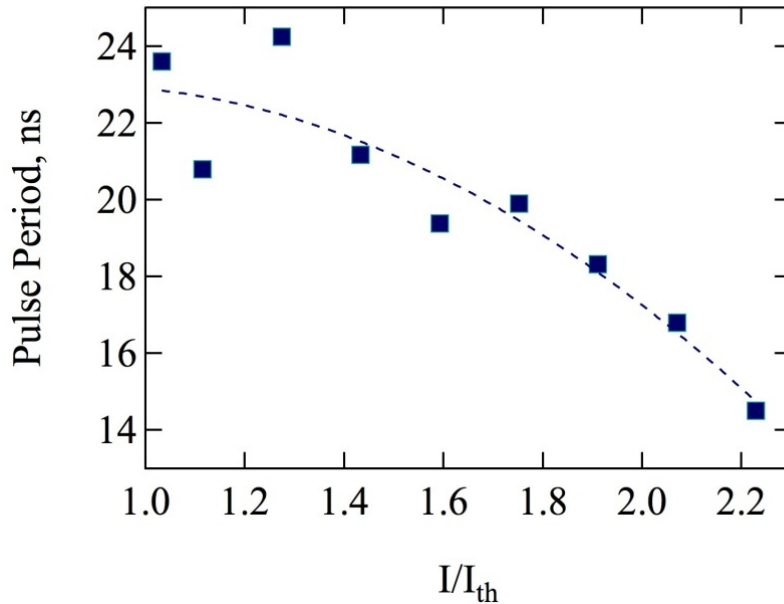




Transverse Mode Competition


Far-Field Spatial beam profile

Extract the time series at two locations.

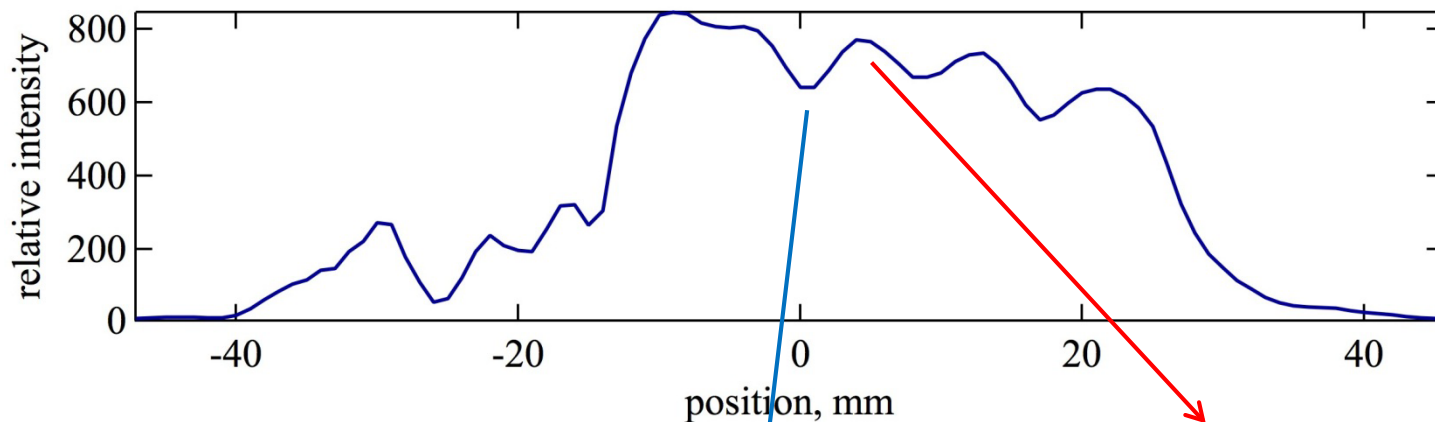

Oscillation interval: ~ 56 ns
(17 MHz)
17 mm cavity length

Near-Field


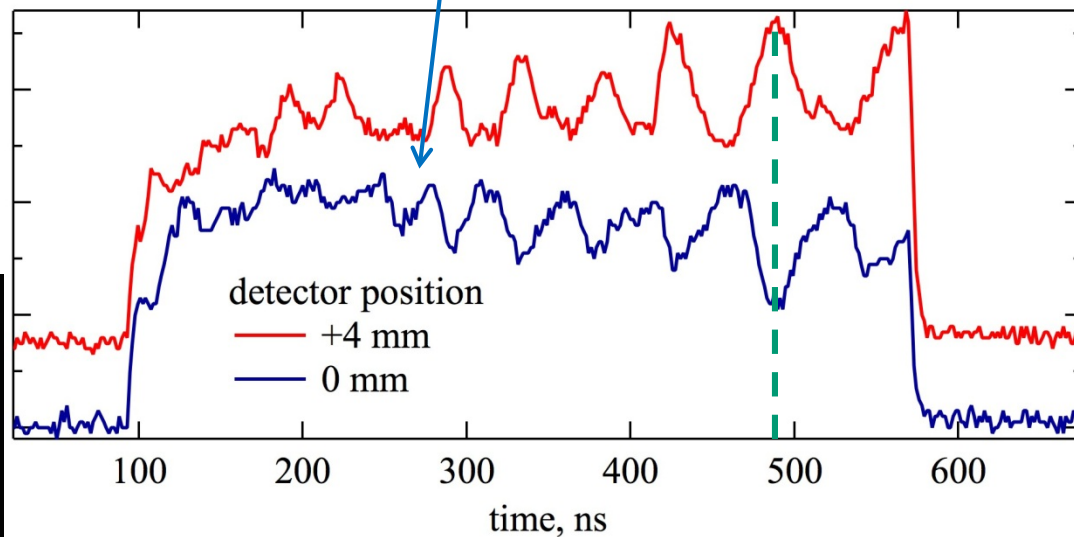




Very Strong Beating

9.6mm cavity
Dual lobes


Near-Field

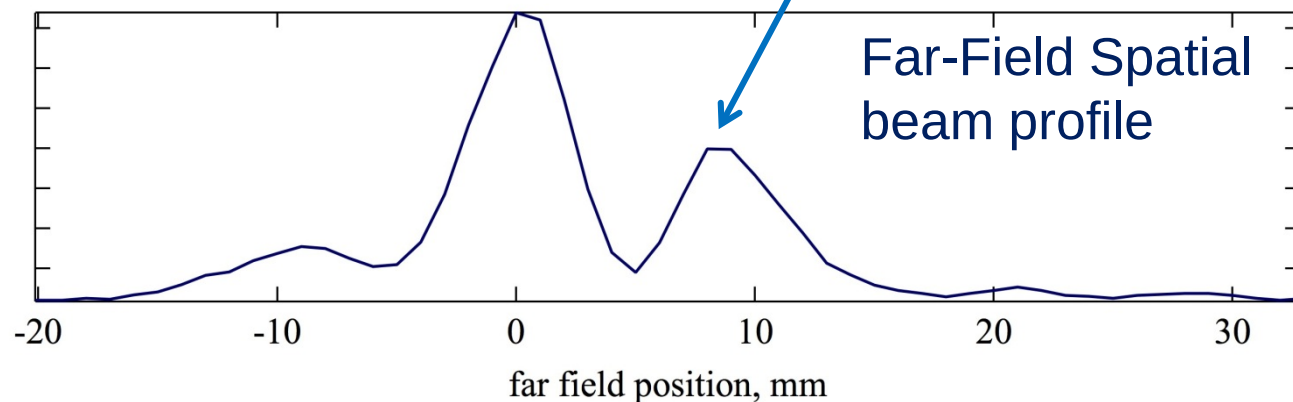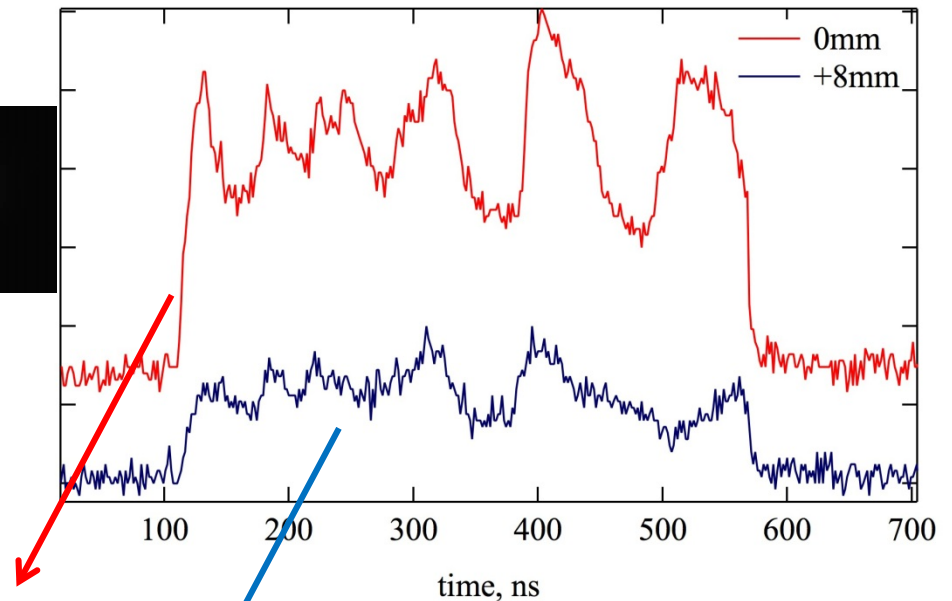



Time Scales

- Oscillations in the Far-Field.
- At $I \sim I_{th}$ $f \sim 30$ to 40 MHz.
- High pumping $f \sim 67$ MHz.
- Doesn't correspond to relaxation oscillations.
- No clear relationship with an external cavity round-trip oscillation.


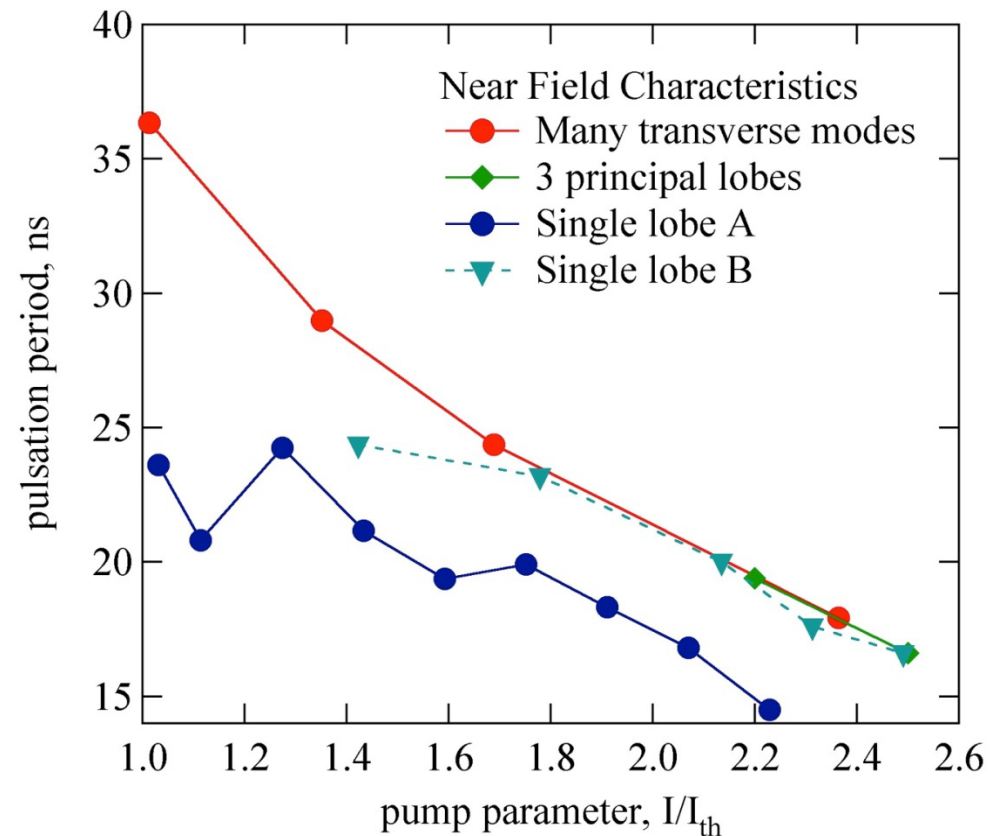




Nonlinear Dynamics


Near-Field

Observe high frequency fluctuations in the time domain and in a Fast Fourier Transform (FFT)

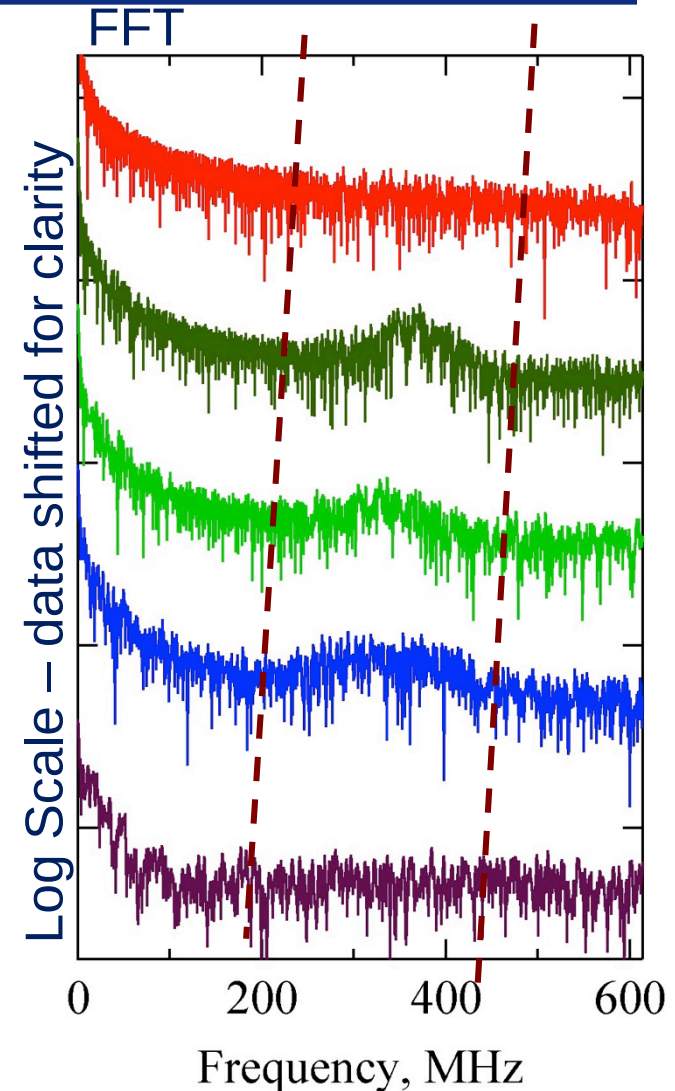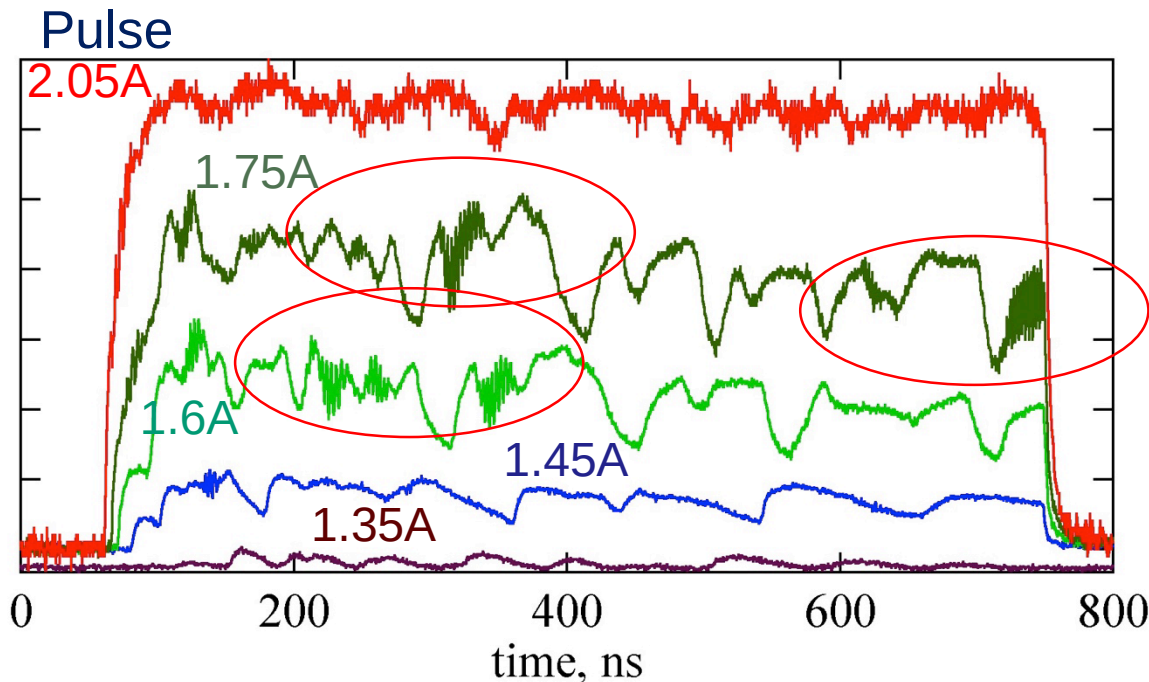




Nonlinear Dynamics

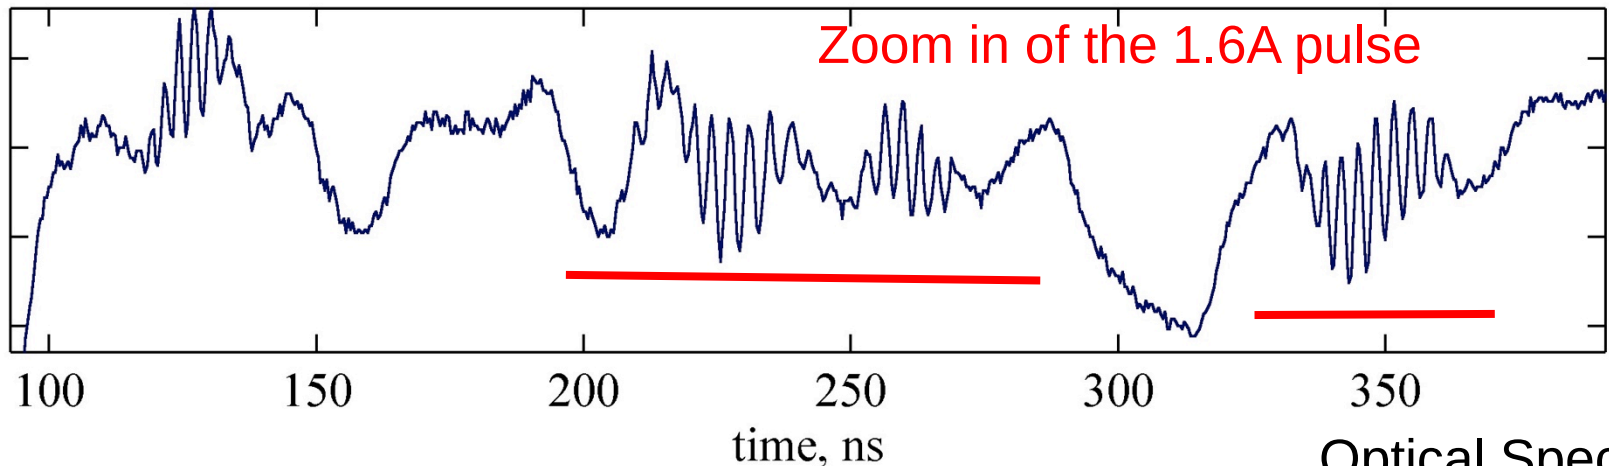

- Limited temporal resolution. Oscillations digitized to be 300 to 500MHz
 - **Aliasing of the actual fast oscillations**
- Undamping of an external cavity round-trip oscillation. $f \sim 4.8\text{GHz}$
- Probably not chaotic oscillations.
- Alignment is critical to observe these.

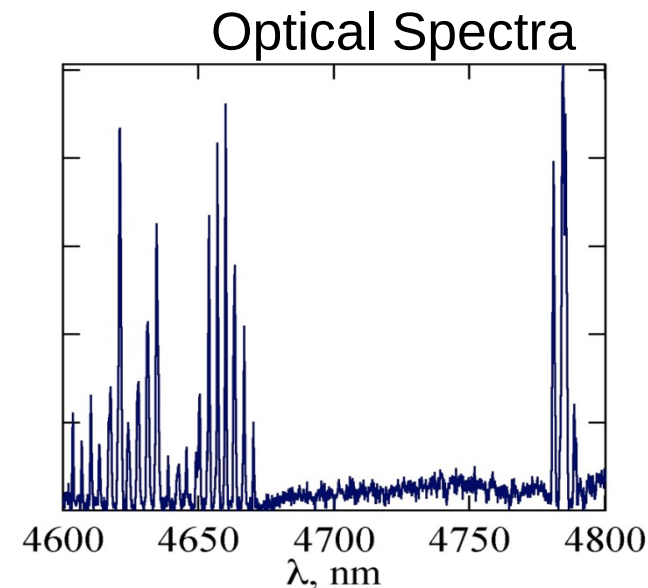



Summary I

- BA-QCLs prefer to oscillate in a single transverse mode.
Partially explained from self-reproduction in the cavity.
- BA-QCLs laser on a number of longitudinal modes.
- With low levels of feedback the mode number stays the same.
The laser fluence can be concentrated into a few of the antinodes.
- With high levels of feedback other transverse modes can be excited.
- Beam steering in the far-field is easy to achieve.
- Increasing the brightness of the QCL is possible.



Summary II


- Power switching between longitudinal mode occurs with and without feedback. The time scales are in the 10s of ns.
- Transverse mode switching time scales are on the order of 10s of nanoseconds and pump dependent.
- Transverse mode competition arises from
 - Spatial overlap of the mode with the gain
 - Four-wave mixing couples the transverse modes.
- In the right conditions, the feedback angle of incidence, external cavity oscillations become undamped.
 - The regime to witness these is small.
- The 1ns rise time of the detector limits the ability to resolve the high frequency fluctuations. Aliasing of the digitized signal occurs.



Talbot & Self-Fourier Cavities


- A linear array of emitters (>3) are phase locked by proper feedback.
- Feedback effects shown above suggest the cavity will be stable in time.

Talbot

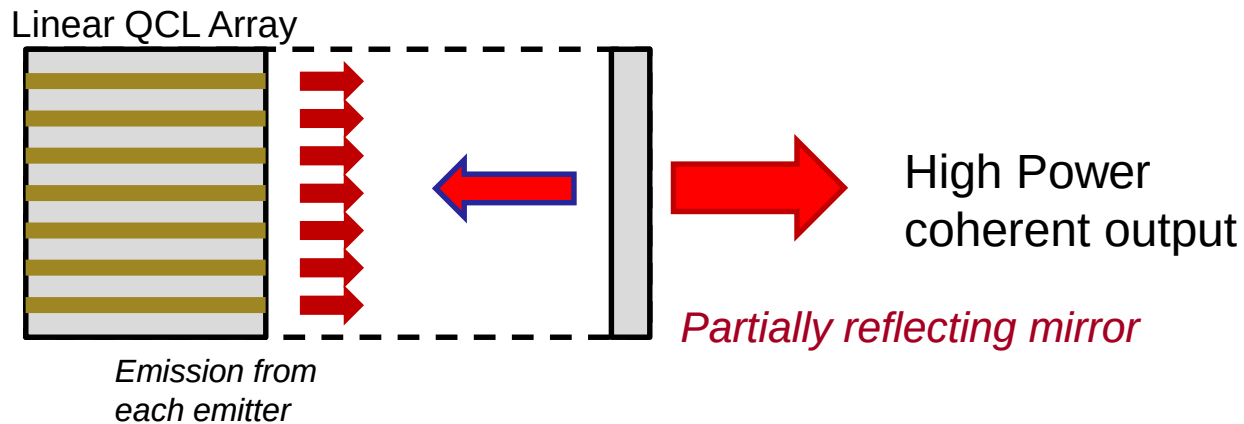

Feedback couples into each emitter

Self-Fourier

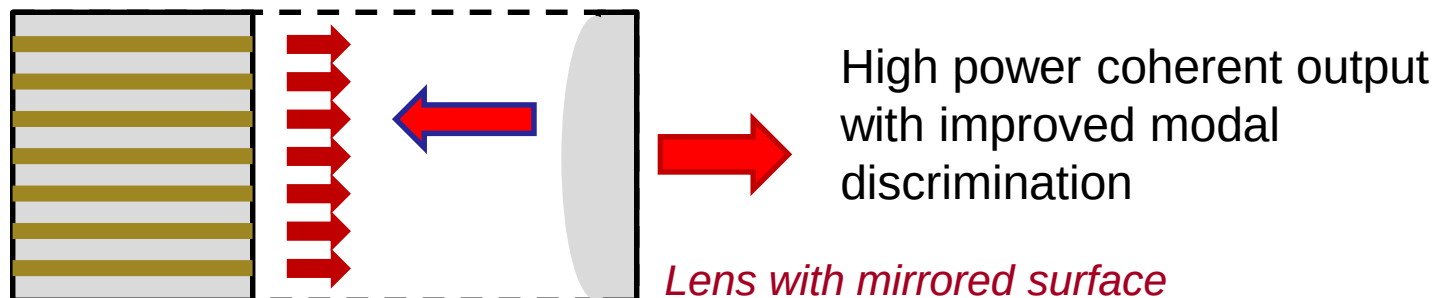

DISTRIBUTION LIST

DTIC/OCF	
8725 John J. Kingman Rd, Suite 0944	
Ft Belvoir, VA 22060-6218	1 cy
AFRL/RVIL	
Kirtland AFB, NM 87117-5776	1 cy
Chunte Lu	
Official Record Copy	
AFRL/RDLT	1 cy