

REPORT DOCUMENTATION PAGE			Form Approved OMB NO. 0704-0188	
The public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA, 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.				
1. REPORT DATE (DD-MM-YYYY)		2. REPORT TYPE		3. DATES COVERED (From - To)
		New Reprint		-
4. TITLE AND SUBTITLE Brain-to-text: decoding spoken phrases from phone representations in the brain			5a. CONTRACT NUMBER	
			W911NF-14-1-0440	
			5b. GRANT NUMBER	
6. AUTHORS Dominic Heger, Adriana de Pestors, Christian Herff, Dominic Telaar, Peter Brunner, Gerwin Schalk, Tanja Schultz			5c. PROGRAM ELEMENT NUMBER	
			611102	
			5d. PROJECT NUMBER	
			5e. TASK NUMBER	
			5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAMES AND ADDRESSES Health Research, Inc. @ Wadsworth 150 Broadway, Suite 560 Menands, NY 12204 -2719			8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS (ES) U.S. Army Research Office P.O. Box 12211 Research Triangle Park, NC 27709-2211			10. SPONSOR/MONITOR'S ACRONYM(S) ARO	
			11. SPONSOR/MONITOR'S REPORT NUMBER(S) 62347-LS.1	
12. DISTRIBUTION AVAILABILITY STATEMENT Approved for public release; distribution is unlimited.				
13. SUPPLEMENTARY NOTES The views, opinions and/or findings contained in this report are those of the author(s) and should not be construed as an official Department of the Army position, policy or decision, unless so designated by other documentation.				
14. ABSTRACT It has long been speculated whether communication between humans and machines based on natural speech related cortical activity is possible. Over the past decade, studies have suggested that it is feasible to recognize isolated aspects of speech from neural signals, such as auditory features, phones or one of a few isolated words. However, until now it remained an unsolved challenge to decode continuously spoken speech from the neural substrate associated with speech and language processing. Here, we show for the first time that continuously spoken speech can be decoded into the expressed words from intracranial electrocorticography (ECoG) recordings. Specifically,				
15. SUBJECT TERMS ECoG; automatic speech recognition; brain-computer interface; broadband gamma; electrocorticography; pattern recognition; speech decoding; speech production				
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT	15. NUMBER OF PAGES
a. REPORT	b. ABSTRACT	c. THIS PAGE	UU	19a. NAME OF RESPONSIBLE PERSON
UU	UU	UU		Gerwin Schalk
				19b. TELEPHONE NUMBER
				518-486-2559

Report Title

Brain-to-text: decoding spoken phrases from phone representations in the brain

ABSTRACT

It has long been speculated whether communication between humans and machines based on natural speech related cortical activity is possible. Over the past decade, studies have suggested that it is feasible to recognize isolated aspects of speech from neural signals, such as auditory features, phones or one of a few isolated words. However, until now it remained an unsolved challenge to decode continuously spoken speech from the neural substrate associated with speech and language processing. Here, we show for the first time that continuously spoken speech can be decoded into the expressed words from intracranial electrocorticographic (ECoG) recordings. Specifically, we implemented a system, which we call Brain-To-Text that models single phones, employs techniques from automatic speech recognition (ASR), and thereby transforms brain activity while speaking into the corresponding textual representation. Our results demonstrate that our system can achieve word error rates as low as 25% and phone error rates below 50%. Additionally, our approach contributes to the current understanding of the neural basis of continuous speech production by identifying those cortical regions that hold substantial information about individual phones. In conclusion, the Brain-To-Text system described in this paper represents an important step toward human-machine communication based on imagined speech.

REPORT DOCUMENTATION PAGE (SF298) (Continuation Sheet)

Continuation for Block 13

ARO Report Number 62347.1-LS

Brain-to-text: decoding spoken phrases from ph...

Block 13: Supplementary Note

© 2015 . Published in Frontiers in Neuroscience, Vol. Ed. 0 9, (0) (2015), (, (0). DoD Components reserve a royalty-free, nonexclusive and irrevocable right to reproduce, publish, or otherwise use the work for Federal purposes, and to authroize others to do so (DODGARS §32.36). The views, opinions and/or findings contained in this report are those of the author(s) and should not be construed as an official Department of the Army position, policy or decision, unless so designated by other documentation.

Approved for public release; distribution is unlimited.

Brain-to-text: Decoding spoken phrases from phone representations in the brain

Christian Herff, Dominic Heger, Adriana de_Pesters, Dominic Telaar, Peter Brunner, Gerwin Schalk and Tanja Schultz

Journal Name:	Frontiers in Neuroengineering
ISSN:	1662-6443
Article type:	Original Research Article
Received on:	09 Apr 2015
Accepted on:	18 May 2015
Provisional PDF published on:	18 May 2015
Frontiers website link:	www.frontiersin.org
Citation:	Herff C, Heger D, De_pesters A, Telaar D, Brunner P, Schalk G and Schultz T(2015) Brain-to-text: Decoding spoken phrases from phone representations in the brain. <i>Front. Neuroeng.</i> 8:6. doi:10.3389/fneng.2015.00006
Copyright statement:	© 2015 Herff, Heger, De_pesters, Telaar, Brunner, Schalk and Schultz. This is an open-access article distributed under the terms of the Creative Commons Attribution License (CC BY) . The use, distribution and reproduction in other forums is permitted, provided the original author(s) or licensor are credited and that the original publication in this journal is cited, in accordance with accepted academic practice. No use, distribution or reproduction is permitted which does not comply with these terms.

This Provisional PDF corresponds to the article as it appeared upon acceptance, after rigorous peer-review. Fully formatted PDF and full text (HTML) versions will be made available soon.



Brain-to-text: Decoding spoken phrases from phone representations in the brain

Christian Herff^{1*}, Dominic Heger^{1*}, Adriana de Pestors^{2,4}, Dominic Telaar¹, Peter Brunner^{2,3}, Gerwin Schalk^{2,3,4}, Tanja Schultz¹

¹ Cognitive Systems Lab, Institute for Anthropomatics and Robotics, Karlsruhe Institute of Technology, Karlsruhe, Germany

² National Center for Adaptive Neurotechnologies, Wadsworth Center, New York State Department of Health, Albany, NY, USA

³ Department of Neurology, Albany Medical College, Albany, USA

⁴ Department of Biomedical Sciences, State University of New York at Albany, Albany, NY, USA

Correspondence*:

Christian Herff
Cognitive Systems Lab, Institute for Anthropomatics and Robotics, Karlsruhe Institute of Technology, Adenauerring 4, 76131 Karlsruhe, Germany, christian.herff@kit.edu

Dominic Heger
Cognitive Systems Lab, Institute for Anthropomatics and Robotics, Karlsruhe Institute of Technology, Adenauerring 4, 76131 Karlsruhe, Germany, dominic.heger@kit.edu

* These authors contributed equally to this work.

ABSTRACT

It has long been speculated whether communication between humans and machines based on natural speech related cortical activity is possible. Over the past decade, studies have suggested that it is feasible to recognize isolated aspects of speech from neural signals, such as auditory features, phones or one of a few isolated words. However, until now it remained an unsolved challenge to decode continuously spoken speech from the neural substrate associated with speech and language processing. Here, we show for the first time that continuously spoken speech can be decoded into the expressed words from intracranial electrocorticographic (ECoG) recordings. Specifically, we implemented a system, which we call *Brain-To-Text* that models single phones, employs techniques from automatic speech recognition (ASR), and thereby transforms brain activity while speaking into the corresponding textual representation. Our results demonstrate that our system achieved word error rates as low as 25% and phone error rates below 50%. Additionally, our approach contributes to the current understanding of the neural basis of continuous speech production by identifying those cortical regions that hold substantial information about individual phones. In conclusion, the Brain-To-Text system described in this paper represents an important step towards human-machine communication based on imagined speech.

Keywords: electrocorticography, ECoG, speech production, automatic speech recognition, brain-computer interface, speech decoding, pattern recognition, broadband gamma

1 INTRODUCTION

Communication with computers or humans by thought alone, is a fascinating concept and has long been a goal of the brain-computer interface (BCI) community (Wolpaw et al. (2002)). Traditional BCIs use motor imagery (McFarland et al. (2000)) to control a cursor or to choose between a selected number of options. Others use event-related potentials (ERPs) (Farwell and Donchin (1988)) or steady-state evoked potentials (Sutter (1992)) to spell out texts. These interfaces have made remarkable progress in the last years, but are still relatively slow and unintuitive. The possibility of using covert speech, i.e. imagined continuous speech processes recorded from the brain for human-computer communication may improve BCI communication speed and also increase their usability. Numerous members of the scientific community, including linguists, speech processing technologists, and computational neuroscientists have studied the basic principles of speech and analyzed its fundamental building blocks. However, the high complexity and agile dynamics in the brain make it challenging to investigate speech production with traditional neuroimaging techniques. Thus, previous work has mostly focused on isolated aspects of speech in the brain.

Several recent studies have begun to take advantage of the high spatial resolution, high temporal resolution and high signal-to-noise ratio of signals recorded directly from the brain (electrocorticography (ECoG)). Several studies used ECoG to investigate the temporal and spatial dynamics of speech perception (Kubanek et al. (2013); Canolty et al. (2007)). Other studies highlighted the differences between receptive and expressive speech areas (Towle et al. (2008); Fukuda et al. (2010)). Further insights into the isolated repetition of phones and words has been provided in (Leuthardt et al. (2011b); Pei et al. (2011b)). Pasley et al. (2012) showed that auditory features of perceived speech could be reconstructed from brain signals. In a study with a completely paralyzed subject, Guenther et al. (2009) showed that brain signals from speech-related regions could be used to synthesize vowel formants. Following up on these results, Martin et al. (2014) decoded spectrotemporal features of overt and covert speech from ECoG recordings. Evidence for a neural representation of phones and phonetic features during speech perception was provided in Chang et al. (2010) and Mesgarani et al. (2014), but these studies did not investigate continuous speech production. Other studies investigated the dynamics of the general speech production process (Crone et al. (2001a,b)). A large number of studies have classified isolated aspects of speech processes for communication with or control of computers. Deng et al. (2010) decoded three different rhythms of imagined syllables. Neural activity during the production of isolated phones was used to control a one-dimensional cursor accurately (Leuthardt et al. (2011a)). Formisano et al. (2008) decoded isolated phones using functional magnetic resonance imaging (fMRI). Vowels and consonants were successfully discriminated in limited pairings in Pei et al. (2011a). Blakely et al. (2008) showed robust classification of four different phonemes. Other ECoG studies classified syllables (Bouchard and Chang (2014)) or a limited set of words (Kellis et al. (2010)). Extending this idea, the imagined production of isolated phones was classified in Brumberg et al. (2011). Recently, Mugler et al. (2014b) demonstrated the classification of a full set of phones within manually segmented boundaries during isolated word production.

To make use of these promising results for BCIs based on continuous speech processes, the analysis and decoding of isolated aspects of speech production has to be extended to continuous and fluent speech processes. While relying on isolated phones or words for communication with interfaces would improve current BCIs drastically, communication would still not be as natural and intuitive as continuous speech. Furthermore, to process the content of the spoken phrases, a textual representation has to be extracted instead of a reconstruction of acoustic features. In our present study, we address these issues by analyzing and decoding brain signals during continuously produced overt speech. This enables us to reconstruct continuous speech into a sequence of words in textual form, which is a necessary step towards human-computer communication using the full repertoire of imagined speech. We refer to our procedure that implements this process as *Brain-to-Text*. Brain-to-Text implements and combines understanding from neuroscience and neurophysiology (suggesting the locations and brain signal features that should be utilized), linguistics (phone and language model concepts), and statistical signal processing and machine learning. Our results suggest that the brain encodes a repertoire of phonetic representations that can be

71 decoded continuously during speech production. At the same time, the neural pathways represented within
 72 our model offer a glimpse into the complex dynamics of the brain's fundamental building blocks during
 73 speech production.

2 MATERIAL & METHODS

2.1 SUBJECTS

74 Seven epileptic patients at Albany Medical Center (Albany, New York, USA) participated in this study.
 75 All subjects gave informed consent to participate in the study, which was approved by the Institutional
 76 Review Board of Albany Medical College and the Human Research Protections Office of the US Army
 77 Medical Research and Materiel Command. Relevant patient information is given in Figure 1.

2.2 ELECTRODE PLACEMENT

78 Electrode placement was solely based on clinical needs of the patients. All subjects had electrodes
 79 implanted on the left hemisphere and covered relevant areas of the frontal and temporal lobes. Electrode
 80 grids (Ad-Tech Medical Corp., Racine, WI; PMT Corporation, Chanhassen, MN) were composed of
 81 platinum-iridium electrodes (4 mm in diameter, 2.3 mm exposed) embedded in silicon with an inter-
 82 electrode distance of 0.6-1 cm. Electrode positions were registered in a post-operative CT scan and
 83 co-registered with a pre-operative MRI scan. Figure 1 shows electrode positions of all 7 subjects and the
 84 combined electrode positions. To compare average activation patterns across subjects, we co-registered
 85 all electrode positions in common Talairach space. We rendered activation maps using the NeuralAct
 86 software package (Kubaneck and Schalk (2014)).

87 **Figure 1.** Electrode positions for all seven subjects. Captions include age (years old (y/o)) and sex
 88 of subjects. Electrode locations were identified in a post-operative CT and co-registered to preoperative
 89 MRI. Electrodes for subject 3 are on an average Talairach brain. Combined electrode placement in joint
 90 Talairach space for comparison of all subjects. Participant 1 (yellow), subject 2 (magenta), subject 3
 91 (cyan), subject 5 (red), subject 6 (green) and subject 7 (blue). Participant 4 was excluded from joint
 92 analysis as the data did not yield sufficient activations related to speech activity (see Section 2.4).

2.3 EXPERIMENT

93 We recorded brain activity during speech production of seven subjects using electrocorticographic (ECoG)
 94 grids that had been implanted as part of presurgical procedures preparatory to epilepsy surgery. ECoG
 95 provides electrical potentials measured directly on the brain surface at a high spatial and temporal
 96 resolution, unfiltered by skull and scalp. ECoG signals were recorded by BCI2000 (Schalk et al. (2004))
 97 using eight 16-channel g.USBamp biosignal amplifiers (g.tec, Graz, Austria). In addition to the electrical
 98 brain activity measurements, we recorded the acoustic waveform of the subjects' speech. Participant's
 99 voice data was recorded with a dynamic microphone (Samson R21s) and digitized using a dedicated
 100 g.USBamp in sync with the ECoG signals. The ECoG and acoustic signals were digitized at a sampling
 101 rate of 9600 Hz.

102 During the experiment, text excerpts from historical political speeches (i.e., Gettysburg Address (Roy
 103 and Basler (1955)), JFK's Inaugural Address (Kennedy (1989)), a childrens' story (Crane et al. (1867))
 104 or *Charmed* fan-fiction (unknown (2009)) were displayed on a screen in about 1 m distance from the
 105 subject. The texts scrolled across the screen from right to left at a constant rate. This rate was adjusted
 106 to be comfortable for the subject prior to the recordings (rate of scrolling text: 42-76 words/min). During
 107 this procedure, subjects were familiarized with the task.

108 Each subject was instructed to read the text aloud as it appeared on the screen. A session was repeated
 109 2 – 3 times depending on the mental and physical condition of the subjects. Table 1 summarizes data

recording details for every session. Since the amount of data of the individual sessions of subject 2 is very small, we combined all three sessions of this subject in the analysis.

Table 1. Data recording details for every session.

Participant	Session	Text	Number of phrases	Total recording length (s)
1	1	Gettysburg address	36	279.87
	2	JFK inaugural	38	326.90
2	1	Humpty Dumpty	21	129.87
	2	Humpty Dumpty	21	129.07
	3	Humpty Dumpty	21	126.37
3	1	Charmed fan-fiction	42	310.27
	2	Charmed fan-fiction	40	310.93
	3	Charmed fan-fiction	41	307.50
4	1	Gettysburg address	38	299.67
	2	Gettysburg address	38	311.97
5	1	JFK inaugural	49	341.77
	2	Gettysburg address	39	222.57
6	1	Gettysburg address	38	302.83
7	1	JFK inaugural	48	590.10
	2	Gettysburg address	38	391.43

We cut the read-out texts of all subjects into 21 to 49 phrases, depending on the session length, along pauses in the audio recording. The audio recordings were phone-labeled using our in-house speech recognition toolkit BioKIT (Telaar et al. (2014)) (see Section 2.5). Because the audio and ECoG data were recorded in synchronization (see Figure 2), this procedure allowed us to identify the ECoG signals that were produced at the time of any given phones. Figure 2 shows the experimental setup and the phone labeling.

Figure 2. Synchronized recording of ECoG and acoustic data. Acoustic data are labeled using our in-house decoder BioKIT, i.e. the acoustic data samples are assigned to corresponding phones. These phone labels are then imposed on the neural data.

2.4 DATA PRE-SELECTION

In an initial data pre-selection, we tested whether speech activity segments could be distinguished from those with no speech activity in ECoG data. For this purpose, we fitted a multivariate normal distribution to all feature vectors (see Section 2.6 for a description of the feature extraction) containing speech activity derived from the acoustic data and one to feature vectors when the subject was not speaking. We then determined whether these models could be used to classify general speech activity above chance level, applying a leave-one-phrase-out validation. Based on this analysis, both sessions of subject 4 and session 2 of subject 5 were rejected, as they did not show speech related activations that could be classified significantly better than chance (t-test, $p > 0.05$). To compare against random activations without speech production, we employed the same randomization approach as described in Section 2.11.

2.5 PHONE LABELING

131 Phone labels of the acoustic recordings were created in a three-step process using an English automatic
132 speech recognition (ASR) system trained on broadcast news. First, we calculated a Viterbi forced
133 alignment (Huang et al. (2001)), which is the most likely sequence of phones for the acoustic data samples
134 given the words in the transcribed text and the acoustic models of the ASR system. In a second step, we
135 adapted the Gaussian mixture model (GMM)-based acoustic models using maximum likelihood linear
136 regression (MLLR) (Gales (1998)). This adaptation was performed separately for each session to obtain
137 session-dependent acoustic models specialized to the signal and speaker characteristics, which is known
138 to increase ASR performance. We estimated a MLLR transformation from the phone sequence computed
139 in step one and used only those segments which had a high confidence score that the segment was emitted
140 by the model attributed to them. Third, we repeated the Viterbi forced alignment using each session's
141 adapted acoustic models yielding the final phone alignments. The phone labels calculated on the acoustic
142 data are then imposed on the ECoG data.

143 Due to the very limited amount of training data for the neural models, we reduced the amount of distinct
144 phone types and grouped similar phones together for the ECoG models. The grouping was based on
145 phonetic features of the phones. See Table 2 for the grouping of phones.

Table 2. Grouping of phones. English phones are based on the International Phonetic Alphabet (IPA).

Grouped Phone	IPA phones
aa	ɑ æ ʌ
b	b
ch	tʃ ʃ ʒ
eh	ɛ ɜː eɪ
f	f
hh	h
ih	i ɪ
jh	dʒ ɡ j
k	k
l	l
m	m
n	n ŋ
ow	oʊ ɔ
p	p
r	r
s	s z ʒ θ
t	t d
uw	u ʊ
v	v
w	w
Diphtongs	
ow ih	ɔɪ
aa ih	aɪ
aa ow	aʊ

2.6 FEATURE EXTRACTION

146 We segmented the neural signal data continuously into 50 ms intervals with an overlap of 25 ms, which
147 enabled us to capture the fast cortical processes underlying phones, while being long enough to extract

148 broadband (70–170 Hz) gamma activity reliably. Each of the 50 ms intervals was labeled with the
 149 corresponding phone obtained from the audio phone labeling. We extracted broadband-gamma activations
 150 as they are known to be highly task-related for motor tasks (Miller et al. (2007)), music perception (Potes
 151 et al. (2012)), auditory processes (Pasley et al. (2012); Pei et al. (2011b)) and word repetition (Leuthardt
 152 et al. (2011b)). Broadband-gamma features were extracted from the ECoG electrical potentials as follows:
 153 linear trends in the raw signals were removed from each channel. The signals were down-sampled from
 154 9600 Hz to 600 Hz sampling rate. Channels strongly affected by noise were identified and excluded from
 155 further processing. Specifically, we calculated the energy in the frequency band 58-62 Hz (line noise) and
 156 removed channels with more noise energy than two interquartile ranges above the third quartile of the
 157 energy of all channels in the data set. This way, an average of 7.0 (std 6.5) channels were removed per
 158 subject.

159 The remaining channels were re-referenced to a common average (i.e., CAR filtering). Elliptic IIR low-
 160 pass and high-pass filters were applied to represent broadband gamma activity in the signals. An elliptic
 161 IIR notch filter (118-122 Hz, filter order 13) was applied to attenuate the first harmonic of 60 Hz line
 162 noise, which is within the broadband gamma frequency range.

163 Resulting 50 ms intervals are denoted as $X_{i,c}(t)$ and consist of n samples ($t \in [1, \dots, n]$). For each
 164 interval i and channel c , the signal energy $E_{i,c}$ was calculated and the logarithm was applied to make the
 165 distribution of the energy features approximately Gaussian: $E_{i,c} = \log(\frac{1}{n} \sum_{t=1}^n X_{i,c}(t)^2)$. The logarithmic
 166 broadband gamma power of all channels were concatenated into one feature vector $E_i = [E_{i,1}, \dots, E_{i,d}]$.
 167 To integrate context information and temporal dynamics of the neural activity for each interval, we
 168 included neighboring intervals up to 200 ms prior to and after the current interval, similar context sizes
 169 have been found relevant in speech perception studies (Sahin et al. (2009)). Therefore, each feature vector
 170 was stacked with four feature vectors in the past and four feature vectors in the future. Stacked feature
 171 vectors $F_i = [E_{i-4}, \dots, E_i, \dots, E_{i+4}]^T$ were extracted every 25 ms over the course of the recording
 172 sessions and the fitting phone label (ground truth from acoustic phone labeling) was associated.

2.7 IDENTIFICATION OF DISCRIMINABILITY

173 The high temporal and spatial resolution of ECoG recordings allowed us to trace the temporal dynamics
 174 of speech production through the areas in the brain relevant for continuous natural speech production. To
 175 investigate such cortical regions of high relevance, we calculated the mean symmetrized Kullback-Leibler
 176 divergence (KL-div) among the phone models for each electrode position and at every time interval.

177 The Kullback-Leibler divergence (KL-div) is a measure of the difference between two distributions P
 178 and Q . It can be interpreted as the amount of discriminability between the neural activity models in bits. It
 179 is non-symmetric and does not satisfy the triangle inequality. The KL-div can be interpreted as the amount
 180 of extra bits needed to code samples from P when using Q to estimate P . When both distributions P and
 181 Q are normal distributions with means μ_0 and μ_1 and covariances Σ_0 and Σ_1 , respectively, the KL-div can
 182 be easily calculated as

$$D_{KL}(N_0||N_1) = \frac{1}{2}(tr(\Sigma_1^{-1}\Sigma_0) + (\mu_1 - \mu_0)^T \Sigma_1^{-1}(\mu_1 - \mu_0) - d - \log_2(\frac{\det(\Sigma_0)}{\det(\Sigma_1)})) \quad (1)$$

183 with d being the dimensionality of the distributions. The closed-form of the KL-div enables us to calculate
 184 the difference between two phone models. To estimate the discriminability of a feature $E_{i,c}$ (log broadband
 185 gamma power of a particular channel and time interval) for the classification of phones, we calculate the
 186 mean KL-div between all pairs of phones for this particular feature. The mean between all divergences
 187 symmetrizes the KL-div and yields one number in bits as the estimation of the discriminability of this
 188 particular feature $E_{i,c}$.

2.8 FEATURE SELECTION

We selected features with the largest average distance between phone models based on the mean KL-div (cf. previous section) in the training data during each run of the leave-one-phrase-out validation. The number of features selected was automatically determined based on the distribution of KL-div for this specific run as follows: We normalized the mean KL-div values d_k for every feature k by their average ($\hat{d}_k = \frac{d_k}{\sum_k d_k}$). Then, we sorted the values in descending order and selected features with large normalized mean KL-div until the sorted sequence did not decline more than a threshold $t = -0.05$: $\arg \max_l \text{sort}(\hat{d}_k)_l - \text{sort}(\hat{d}_k)_{l+1} < t$. The threshold value $t = -0.05$ corresponds to a very low decline in KL-div and thus reflected the point after which little additional information was present. This way, only the l most relevant features are selected to limit the feature space.

Note that features are selected solely based on the Kullback-Leibler divergence in the training data and do not include any prior assumptions on the suitability of specific regions for phone discrimination. We further reduced the feature space dimensionality by linear discriminant analysis (LDA) (Haeb-Umbach and Ney (1992)) using the phone labels on the training data.

2.9 ECOG PHONE MODEL TRAINING

Each phone was modeled in the extracted feature space by a normal distribution. Thus, models characterized the mean contribution and variance of the neural activity measured at each electrode. We represented the stacked cortical activity feature vectors F_i of each phone j by a model λ_j as a multivariate Gaussian probability density function $p(F_i|\lambda_j) \sim \mathcal{N}(\mu_j, \Sigma_j)$ determined by the mean feature vectors μ_j and their diagonal variance matrix Σ_j calculated from training data. Gaussian models were chosen as they represent the underlying feature distribution suitably well. Furthermore, Gaussian models can be robustly calculated from a small amount of data, they are computationally very efficient and allow a closed form calculation of the Kullback-Leibler-Divergence.

2.10 DECODING APPROACH

Following a common idea of modern speech recognition technology (Rabiner (1989); Schultz and Kirchhoff (2006)), we combined the information about the observed neural activity with statistical language information during the decoding process by Bayesian updating (Rabiner (1989)). Simplified, the process can be understood (Gales and Young (2008)) as finding the sequence of words $W = w_1 \dots w_L$ which is most likely given the observed ECoG feature segments $X = F_1 \dots F_T$. This probability $P(W|X)$ can be transformed using Bayes' rule:

$$\hat{W} = \arg \max_W \{P(W|X)\} = \arg \max_W \{p(X|W)P(W)\} \quad (2)$$

Here, the likelihood $p(X|W)$ is given by the ECoG phone models and $P(W)$ is calculated using a language model. The likelihood of ECoG phone models $p(X|W)$ given a word W is calculated by concatenating ECoG phone models to form words as defined in a pronunciation dictionary. Specifically, we employed a pronunciation dictionary containing the mapping of phone sequences to words, for example, describing that the word 'liberty' comprises of the phone sequence '/l/ /ih/ /b/ /er/ /t/ /iy/'. We constructed a minimized and determinized search graph consisting of the phone sequences for each recognizable word. To capture important syntactic and semantic information of language, we used a statistical language model (Jelinek (1997); Stolcke (2002)) that predicts the next word given the preceding words. In N-gram language modeling, this is done by calculating probabilities of single words and probabilities for predicting words given the $n - 1$ previous words. Probabilities for single word occurrence ($n = 1$) are called uni-grams. Probabilities for the co-occurrence of two words ($n = 2$) are called bi-grams. For the *Brain-to-Text* system, we estimate bi-grams on the texts read by the subjects. It is important to

note that even though this results in very specialized models, the correctness of our results is still assured, as the same language models are utilized for both the real as well as for the control analyses.

Finally, the decoding of spoken phrases from neural data X is performed by finding the word sequence $\hat{W}$ in the search graph that has the highest likelihood for producing the neural data with respect to the ECoG phone models and language information given by pronunciation dictionary and language model.

Figure 3 illustrates the different steps of decoding continuously spoken phrases from neural data. *ECoG signals over time* are recorded at every electrode and divided into 50ms segments. For each 50 ms interval of recorded *broadband gamma activity*, stacked feature vectors are calculated (*Signal processing*). For each *ECoG phone model* calculated on the training data, the likelihood that this model emitted a segment of ECoG features can be calculated, resulting in *phone likelihoods over time*. Combining these Gaussian *ECoG phone models* with language information in the form of a *dictionary* and an *n-gram language model*, the *Viterbi* algorithm calculates the *most likely word sequence* and corresponding *phone sequence*. To visualize the decoding path, the *most likely phone sequence* can be shown in the *phone likelihoods over time* (red marked areas). The system outputs the decoded word sequence. Overall, the system produces a textual representation from the measured brain activity (see also Supplementary Video).

Figure 3. Overview of the *Brain-to-Text* system: ECoG broadband gamma activities (50ms segments) for every electrode are recorded. Stacked broadband gamma features are calculated (Signal processing). Phone likelihoods over time can be calculated by evaluating all Gaussian ECoG phone models for every segment of ECoG features. Using ECoG phone models, a dictionary and an n-gram language model, phrases are decoded using the Viterbi algorithm. The most likely word sequence and corresponding phone sequence are calculated and the phone likelihoods over time can be displayed. Red marked areas in the phone likelihoods show most likely phone path. See also Supplementary video.

2.11 EVALUATION

For the evaluation of our *Brain-to-Text* system, we trained neural phone models using all but one phrase of a recording session and decoded the remaining phrase. This evaluation process was repeated for each phrase in the session. Through this leave-one-phrase-out validation, we make sure that all feature selection, dimensionality reduction and training steps are only performed on the training data while the test data remains completely unseen. For comparison, we performed the decoding with randomized phone models. This is a baseline that quantifies how well the language model and dictionary decode phrases without any neural information. To obtain an estimate for chance levels in our approach, we shifted the training data by half its length in each iteration of the leave-one-phrase-out validation while the corresponding labels remained unchanged. This way, the data for the random comparison models still have the typical properties of ECoG broadband gamma activity, but do not correspond to the underlying labels. Furthermore, as the labels are not changed, prior probabilities remain the same for the random and the actual model case. As the shifting point is different for all iterations of the specific session, we get an estimate of the chance level performance for every phrase. The mean over all these results thus allows a robust estimation of the true chance level (randomization test).

It is also important to bear in mind that *Brain-to-Text* is still at a disadvantage compared to traditional speech recognition systems as our data contained only several minutes of ECoG signals for each subject. This limited model complexity compared to traditional speech recognition systems, which are usually trained on thousands of hours of acoustic data and billions of words for language model training.

We evaluated the performance of our *Brain-to-Text* system with different dictionary sizes. For this purpose, we created new dictionaries for every test phrase including the words that were actually spoken plus a set of randomized set of words from the full dictionary. Created dictionaries were the same for *Brain-To-Text* and randomized models to ensure that the words chosen had no influence on the comparison between models. The language model was limited to the words in the dictionary accordingly. This approach allowed us to perpetually increase the dictionary size.

3 RESULTS

3.1 REGIONS OF DISCRIMINABILITY

Figure 4 illustrates the spatio-temporal dynamics of the mean KL-div between the phone models on a joint brain surface (Talairach model (Talairach and Tournoux (1988))) for nine temporal intervals with co-registered electrodes of all subjects. KL-div values plotted in Figure 4 exceed 99% of the KL-div values with a randomized phone-alignment (data shifted by half its length while the labels remain the same).

Figure 4. Mean Kullback-Leibler Divergences between models for every electrode position of every subject. Combined electrode montage of all subjects except subject 4 in common Talairach space. Heat maps on rendered average brain shows regions of high discriminability (red). All shown discriminability exceeds chance level (larger than 99% of randomized discriminabilities). The temporal course of regions with high discriminability between phone models shows early differences in diverse areas up to 200 ms before the actual phone production. Phone models show high discriminability in sensorimotor cortex 50 ms before production and yield different models in auditory regions of the superior temporal gyrus 100 ms after production.

Starting 200 ms before the actual phone production, we see high KL-div values in diverse areas including Broca's area, which is generally associated with speech planning (Sahin et al. (2009)). 150 ms prior to the phone production, Broca's area still has high KL-div scores, but additionally sensorimotor areas and regions in the superior temporal gyrus associated with auditory and language function show increasing discriminability. Subsequently, activations in Broca's area vanish and motor area discriminability increases until peaking at the interval between 0 and 50 ms (which corresponds to the average length of phones). Discriminability increases in auditory regions until approximately 150 ms after phone production.

3.2 DECODING RESULTS

For each phrase to be decoded, the most likely phone-path can be efficiently calculated using Viterbi decoding (Rabiner (1989)). Comparing the extracted phone labels for each feature vector with the baseline labels from the audio alignment, we calculate single-frame accuracies for the decoding of phones from continuous speech production. Reducing the size of the dictionary to 10 words, including those that are to be evaluated, *Brain-to-Text* yielded significantly higher accuracies (two-sided t-test, $p < 0.05$ for all sessions) for single phone decoding in all sessions compared to random models. Figure 5 (a) shows average phone recognition accuracies (green) and average random recognition accuracies (orange) for each session. The best session resulted in average accuracies above 50% for the correct classification of 20 phones plus SILENCE. While all sessions resulted in significantly higher accuracies than random models, the results of subject 2 and subject 7 clearly outperform those of all other subjects. The outstanding performance of subject 7 might be explained by the high-density grid on the superior temporal gyrus. We further investigate the results of subject 7, session 1 (results for all other subjects and sessions can be found in the Supplementary Material) by investigating the confusion matrix (Figure 5 (b)) that shows which phones in the reference corresponded to which phones in the predicted phrase. The clearly visible diagonal in this confusion matrix illustrates that our approach reliably decodes the complete set of phones.

In *Brain-to-Text*, we decode entire word sequences of each test phrase. Even with a small dictionary size, a large number of different phrases can be produced, as the number of words may vary and words can be arbitrarily combined. Therefore, we utilize the Word Error Rate (WER) to measure the quality of a decoded phrase. The word error rate (WER) between a predicted phrase and the corresponding reference phrase consists of the number of editing steps in terms of substitutions, deletions and insertions of words necessary to produce the predicted phrase from the reference, divided by the amount of words in the reference.

Figure 5 (c) shows the average WER depending on dictionary size (green line). For all dictionary sizes, the performance is significantly better than randomized results (orange line). Significance was analyzed

using paired t-tests between the Word Error Rates of *Brain-To-Text* and the randomized models ($p < 0.001$, one-sided paired t-test). With 10 words in the dictionary, 75% of all words are recognized correctly. The approach scales well for increasing dictionary sizes. Average phone true positive rates remain rather stable even when dictionary sizes increase (bars in Figure 5 (c)).

Figure 5. Results: (A) Frame-wise accuracy for all sessions. All sessions of all subjects show significantly higher true positive rates for *Brain-To-Text* (green bars) than for the randomized models (orange bars). (B) Confusion matrix for subject 7, session 1. The clearly visible diagonal indicates that all phones are decoded reliably. (C) Word Error Rates depending on dictionary size (lines). Word error rates for *Brain-To-Text* (green line) are lower than the randomized models for all dictionary sizes. Average true-positive rates across phones depending on dictionary size (bars) for subject 7, session 1. Phone true positive rates remain relatively stable for all dictionary sizes and are always much higher for *Brain-To-Text* than for the randomized models.

4 DISCUSSION

4.1 ECOG PHONE MODELS

Gaussian models as a generative statistical representation for log-transformed broadband gamma power have been found well-suited for the observed cortical activity (e.g. Gasser et al. (1982); Crone et al. (2001b)). These models facilitate the analysis of the spatial and temporal characteristics of each phone model within its 450 ms context. Note that the modeling of phones does not contradict recent findings of articulatory features in neural recordings during speech perception (Mesgarani et al. (2014); Pulvermüller et al. (2006)) and production (Bouchard et al. (2013); Lotte et al. (2015)), since multiple representations of the same acoustic phenomenon are likely.

Note that only one context-independent model is trained for each phone, i.e., without consideration of preceding or succeeding phones due to the limited amount of data, even though effects of context have been shown in neural data (Mugler et al. (2014a)). While context dependent modeling is very common in acoustic speech recognition (Lee (1990)) and known to significantly improve recognition performance, it requires substantially more training data than available in our ECoG setting.

4.2 REGIONS OF DISCRIMINABILITY

In our approach, the phone representation through Gaussian models allows for detailed analysis of cortical regions, which have high discriminability among the different phones over time. The cortical locations identified using the KL-div criterion are in agreement with those that have been identified during speech production and perception in isolated phoneme or word experiments (Leuthardt et al. (2011a); Canolty et al. (2007)). These findings extend the state-of-the-art by showing for the first time the dynamics for single phone discriminability and decoding during continuous speech production.

As our experiments demand overt speech production from prompted texts, it is evident that multiple processes are present in the recorded neural data, including speech production, motor actions, auditory processing, and language understanding. By demonstrating that phones can be discriminated from each other, we show that such a phone-based representation is indeed a viable form of modeling cortical activity of continuous speech in this mixture of activation patterns.

4.3 DECODING RESULTS

The reported phone decoding accuracies are significantly higher for *Brain-to-Text* than for randomized models in all subjects, which shows that continuous speech production can be modeled based on phone representations. The clearly visible diagonal in the confusion matrix Figure 5 (B) emphasizes that the decoding performance is based on a reliable detection of all phones and not only on a selected subset.

Different conditions, such as varying task performance of the subjects, and different positions and densities of the electrode grids, yielded highly variable decoding performances for the different subjects, however the low WER (see Supplementary Material) and phone true positive rates for subject 1,2 and 7 imply the potential of *Brain-to-Text* for brain-computer interfaces.

4.4 CONCLUSION

Decoding overt speech production is a necessary first step towards human-computer interaction through imagined speech processes. Our results show that with a limited set of words in the dictionary, *Brain-to-Text* reconstructs spoken phrases from neural data. The computational phone models in combination with language information make it possible to reconstruct words in unseen spoken utterances solely based on neural signals (see Supplementary Video). Despite the fact that the evaluations in this article have been performed offline, all processing steps of *Brain-to-Text* and the decoding approach are well suited for eventual real-time online application on desktop computers. The approach introduced here may have important implications for the design of novel brain-computer interfaces, because it may eventually allow people to communicate solely based on brain signals associated with natural language function and with scalable vocabularies.

DISCLOSURE/CONFLICT-OF-INTEREST STATEMENT

The authors declare that the research was conducted in the absence of any commercial or financial relationships that could be construed as a potential conflict of interest.

ACKNOWLEDGEMENT

We thank Dr. Anthony Ritaccio for patient interactions, Dr. Aysegul Gunduz for help with data recording and Dr. Cuntai Guan for valuable discussions.

Funding: This work was supported by the NIH (EB00856, EB006356 and EB018783), the US Army Research Office (W911NF-08-1-0216, W911NF-12-1-0109, W911NF-14-1-0440) and Fondazione Neurone, and received support by the International Excellence Fund of Karlsruhe Institute of Technology. We acknowledge support by Deutsche Forschungsgemeinschaft and Open Access Publishing Fund of Karlsruhe Institute of Technology.

REFERENCES

- Blakely, T., Miller, K. J., Rao, R. P., Holmes, M. D., and Ojemann, J. G. (2008), Localization and classification of phonemes using high spatial resolution electrocorticography (ECoG) grids, in Engineering in Medicine and Biology Society, 2008. EMBS 2008. 30th Annual International Conference of the IEEE (IEEE), 4964–4967
- Bouchard, K. and Chang, E. (2014), Neural decoding of spoken vowels from human sensory-motor cortex with high-density electrocorticography, in Engineering in Medicine and Biology Society, 2014. EMBS 2014. 36th Annual International Conference of the IEEE (IEEE)
- Bouchard, K. E., Mesgarani, N., Johnson, K., and Chang, E. F. (2013), Functional organization of human sensorimotor cortex for speech articulation, *Nature*, 495, 7441, 327–332
- Brumberg, J. S., Wright, E. J., Andreasen, D. S., Guenther, F. H., and Kennedy, P. R. (2011), Classification of intended phoneme production from chronic intracortical microelectrode recordings in speech-motor cortex, *Frontiers in neuroscience*, 5

- Canolty, R. T., Soltani, M., Dalal, S. S., Edwards, E., Dronkers, N. F., Nagarajan, S. S., et al. (2007), Spatiotemporal dynamics of word processing in the human brain, *Frontiers in neuroscience*, 1, 14
- Chang, E. F., Rieger, J. W., Johnson, K., Berger, M. S., Barbaro, N. M., and Knight, R. T. (2010), Categorical speech representation in human superior temporal gyrus, *Nature neuroscience*, 13, 11, 1428–1432
- Crane, W., Gilbert, S., John, McConnell, W., Tenniel, S., John, Weir, H., and Zwecker, J. B. (1867), *Mother Gooses Nursery Rhymes. A Collection of Alphabets, Rhymes, Tales and Jingles* (London: George Routledge and Sons)
- Crone, N., Hao, L., Hart, J., Boatman, D., Lesser, R., Irizarry, R., et al. (2001a), Electrographic gamma activity during word production in spoken and sign language, *Neurology*, 57, 11, 2045–2053
- Crone, N. E., Boatman, D., Gordon, B., and Hao, L. (2001b), Induced electrographic gamma activity during auditory perception, *Clinical Neurophysiology*, 112, 4, 565–582
- Deng, S., Srinivasan, R., Lappas, T., and D’Zmura, M. (2010), Eeg classification of imagined syllable rhythm using hilbert spectrum methods, *Journal of neural engineering*, 7, 4, 046006
- Farwell, L. A. and Donchin, E. (1988), Talking off the top of your head: toward a mental prosthesis utilizing event-related brain potentials, *Electroencephalography and clinical Neurophysiology*, 70, 6, 510–523
- Formisano, E., De Martino, F., Bonte, M., and Goebel, R. (2008), ” who” is saying” what”? brain-based decoding of human voice and speech, *Science*, 322, 5903, 970–973
- Fukuda, M., Rothmel, R., Juhász, C., Nishida, M., Sood, S., and Asano, E. (2010), Cortical gamma-oscillations modulated by listening and overt repetition of phonemes, *Neuroimage*, 49, 3, 2735–2745
- Gales, M. and Young, S. (2008), The application of hidden markov models in speech recognition, *Foundations and Trends in Signal Processing*, 1, 3, 195–304
- Gales, M. J. (1998), Maximum likelihood linear transformations for hmm-based speech recognition, *Computer speech & language*, 12, 2, 75–98
- Gasser, T., Bächer, P., and Möcks, J. (1982), Transformations towards the normal distribution of broad band spectral parameters of the eeg, *Electroencephalography and clinical neurophysiology*, 53, 1, 119–124
- Guenther, F. H., Brumberg, J. S., Wright, E. J., Nieto-Castanon, A., Tourville, J. A., Panko, M., et al. (2009), A wireless brain-machine interface for real-time speech synthesis, *PloS one*, 4, 12, e8218
- Haeb-Umbach, R. and Ney, H. (1992), Linear discriminant analysis for improved large vocabulary continuous speech recognition, in *Acoustics, Speech, and Signal Processing*, 1992. ICASSP-92., 1992 IEEE International Conference on, volume 1, volume 1, 13–16 vol.1, doi:10.1109/ICASSP.1992.225984
- Huang, X., Acero, A., and Hon, H.-W. (2001), *Spoken Language Processing: A Guide to Theory, Algorithm and System Development* (Prentice Hall PTR)
- Jelinek, F. (1997), *Statistical methods for speech recognition* (MIT press)
- Kellis, S., Miller, K., Thomson, K., Brown, R., House, P., and Greger, B. (2010), Decoding spoken words using local field potentials recorded from the cortical surface, *Journal of neural engineering*, 7, 5, 056007
- Kennedy, J. F. (1989), *Inaugural Addresses of the Presidents of the United States*. (Washington, DC) (Available online at: www.bartleby.com/124/)
- Kubaneck, J., Brunner, P., Gunduz, A., Poeppel, D., and Schalk, G. (2013), The tracking of speech envelope in the human cortex, *PloS one*, 8, 1, e53398
- Kubaneck, J. and Schalk, G. (2014), Neuralact: A tool to visualize electrocortical (ecog) activity on a three-dimensional model of the cortex, *Neuroinformatics*, 1–8
- Lee, K.-F. (1990), Context-dependent phonetic hidden markov models for speaker-independent continuous speech recognition, *Acoustics, Speech and Signal Processing, IEEE Transactions on*, 38, 4, 599–609
- Leuthardt, E. C., Gaona, C., Sharma, M., Szrama, N., Roland, J., Freudenberg, Z., et al. (2011a), Using the electrocorticographic speech network to control a brain–computer interface in humans, *Journal of neural engineering*, 8, 3, 036004

- Leuthardt, E. C., Pei, X.-M., Breshears, J., Gaona, C., Sharma, M., Freudenberg, Z., et al. (2011b), Temporal evolution of gamma activity in human cortex during an overt and covert word repetition task., *Frontiers in human neuroscience*, 6, 99–99
- Lotte, F., Brumberg, J. S., Brunner, P., Gunduz, A., Ritaccio, A. L., Guan, C., et al. (2015), Electrographic representations of segmental features in continuous speech, *Frontiers in Human Neuroscience*, 9, 97, doi:10.3389/fnhum.2015.00097
- Martin, S., Brunner, P., Holdgraf, C., Heinze, H.-J., Crone, N. E., Rieger, J., et al. (2014), Decoding spectrotemporal features of overt and covert speech from the human cortex, *Frontiers in Neuroengineering*, 7, 14, doi:10.3389/fneng.2014.00014
- McFarland, D. J., Miner, L. A., Vaughan, T. M., and Wolpaw, J. R. (2000), Mu and beta rhythm topographies during motor imagery and actual movements, *Brain topography*, 12, 3, 177–186
- Mesgarani, N., Cheung, C., Johnson, K., and Chang, E. F. (2014), Phonetic feature encoding in human superior temporal gyrus, *Science*, 1245994
- Miller, K. J., Leuthardt, E. C., Schalk, G., Rao, R. P., Anderson, N. R., Moran, D. W., et al. (2007), Spectral changes in cortical surface potentials during motor movement, *The Journal of neuroscience*, 27, 9, 2424–2432
- Mugler, E., Goldrick, M., and Slutzky, M. (2014a), Cortical encoding of phonemic context during word production, in Engineering in Medicine and Biology Society, 2014. EMBS 2014. 36th Annual International Conference of the IEEE (IEEE)
- Mugler, E. M., Patton, J. L., Flint, R. D., Wright, Z. A., Schuele, S. U., Rosenow, J., et al. (2014b), Direct classification of all american english phonemes using signals from functional speech motor cortex, *Journal of Neural Engineering*, 11, 3, 035015
- Pasley, B. N., David, S. V., Mesgarani, N., Flinker, A., Shamma, S. A., Crone, N. E., et al. (2012), Reconstructing speech from human auditory cortex, *PLoS biology*, 10, 1, e1001251
- Pei, X., Barbour, D. L., Leuthardt, E. C., and Schalk, G. (2011a), Decoding vowels and consonants in spoken and imagined words using electrocorticographic signals in humans, *Journal of neural engineering*, 8, 4, 046028
- Pei, X., Leuthardt, E. C., Gaona, C. M., Brunner, P., Wolpaw, J. R., and Schalk, G. (2011b), Spatiotemporal dynamics of electrocorticographic high gamma activity during overt and covert word repetition, *Neuroimage*, 54, 4, 2960–2972
- Potes, C., Gunduz, A., Brunner, P., and Schalk, G. (2012), Dynamics of electrocorticographic (ecog) activity in human temporal and frontal cortical areas during music listening, *NeuroImage*, 61, 4, 841–848, doi:http://dx.doi.org/10.1016/j.neuroimage.2012.04.022
- Pulvermüller, F., Huss, M., Kherif, F., del Prado Martin, F. M., Hauk, O., and Shtyrov, Y. (2006), Motor cortex maps articulatory features of speech sounds, *Proceedings of the National Academy of Sciences*, 103, 20, 7865–7870
- Rabiner, L. (1989), A tutorial on hidden markov models and selected applications in speech recognition, *Proceedings of the IEEE*, 77, 2, 257–286
- Roy, E. and Basler, P. (1955), The gettysburg address, in The Collected Works of Abraham Lincoln (New Brunswick, NJ: Rutgers University Press)
- Sahin, N. T., Pinker, S., Cash, S. S., Schomer, D., and Halgren, E. (2009), Sequential processing of lexical, grammatical, and phonological information within brocas area, *Science*, 326, 5951, 445–449
- Schalk, G., McFarland, D. J., Hinterberger, T., Birbaumer, N., and Wolpaw, J. R. (2004), Bci2000: a general-purpose brain-computer interface (bci) system, *Biomedical Engineering, IEEE Transactions on*, 51, 6, 1034–1043
- Schultz, T. and Kirchhoff, K. (2006), Multilingual Speech Processing (Elsevier, Academic Press)
- Stolcke, A. (2002), Srilman extensible language modeling toolkit, in Proceedings of the 7th International Conference on Spoken Language Processing (ICSLP 2002)
- Sutter, E. E. (1992), The brain response interface: communication through visually-induced electrical brain responses, *Journal of Microcomputer Applications*, 15, 1, 31–45
- Talairach, J. and Tournoux, P. (1988), Co-planar stereotaxic atlas of the human brain. 3-Dimensional proportional system: an approach to cerebral imaging (Thieme)

- 496 Telaar, D., Wand, M., Gehrig, D., Putze, F., Amma, C., Heger, D., et al. (2014), BioKIT - real-
497 time decoder for biosignal processing, in The 15th Annual Conference of the International Speech
498 Communication Association (Interspeech 2014)
- 499 Towle, V. L., Yoon, H.-A., Castelle, M., Edgar, J. C., Biassou, N. M., Frim, D. M., et al. (2008), Ecog
500 gamma activity during a language task: differentiating expressive and receptive speech areas, *Brain*,
501 131, 8, 2013–2027
- 502 unknown (2009), "Traitor among us" and "Split Feelings" (available on <https://www.fanfiction.net/>)
- 503
- 504 Wolpaw, J. R., Birbaumer, N., McFarland, D. J., Pfurtscheller, G., and Vaughan, T. M. (2002), Brain-
505 computer interfaces for communication and control, *Clinical neurophysiology*, 113, 6, 767–791

Figure 1.JPEG

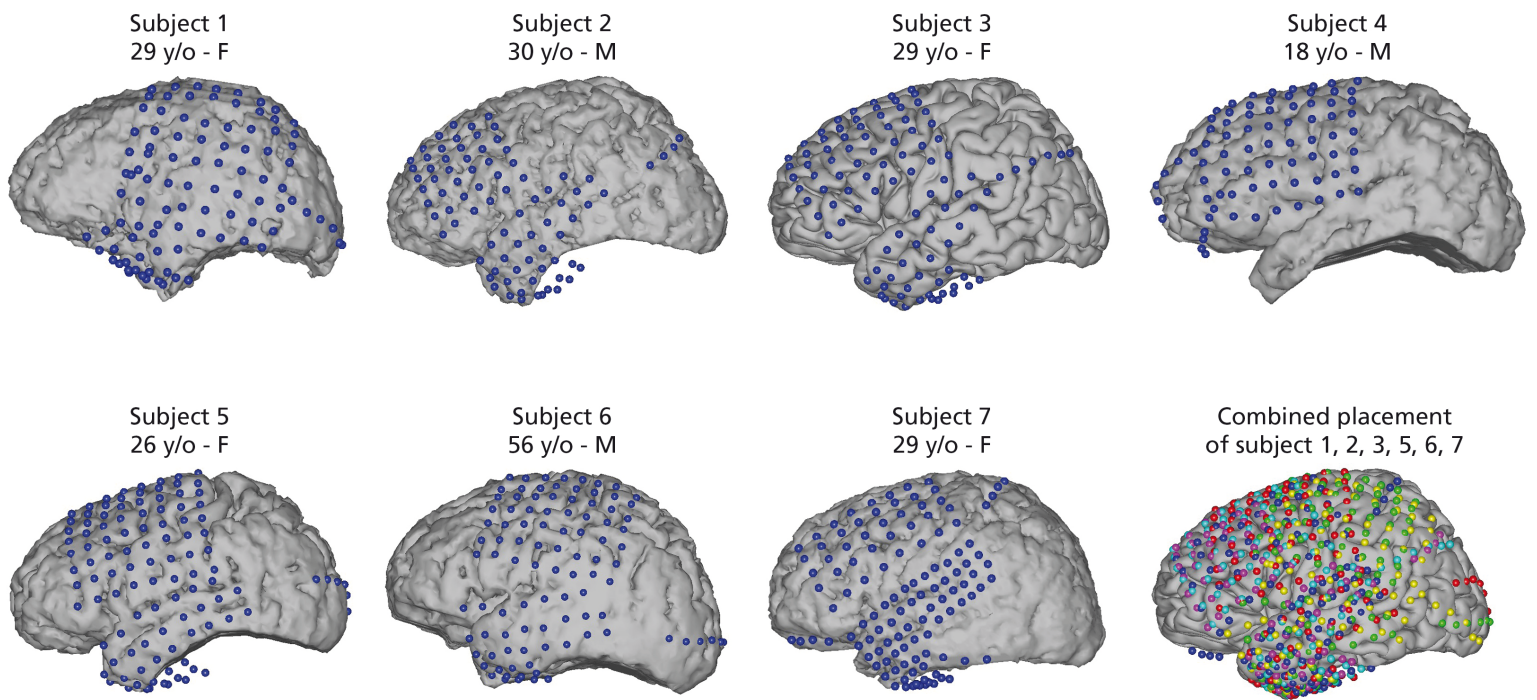


Figure 2.JPEG

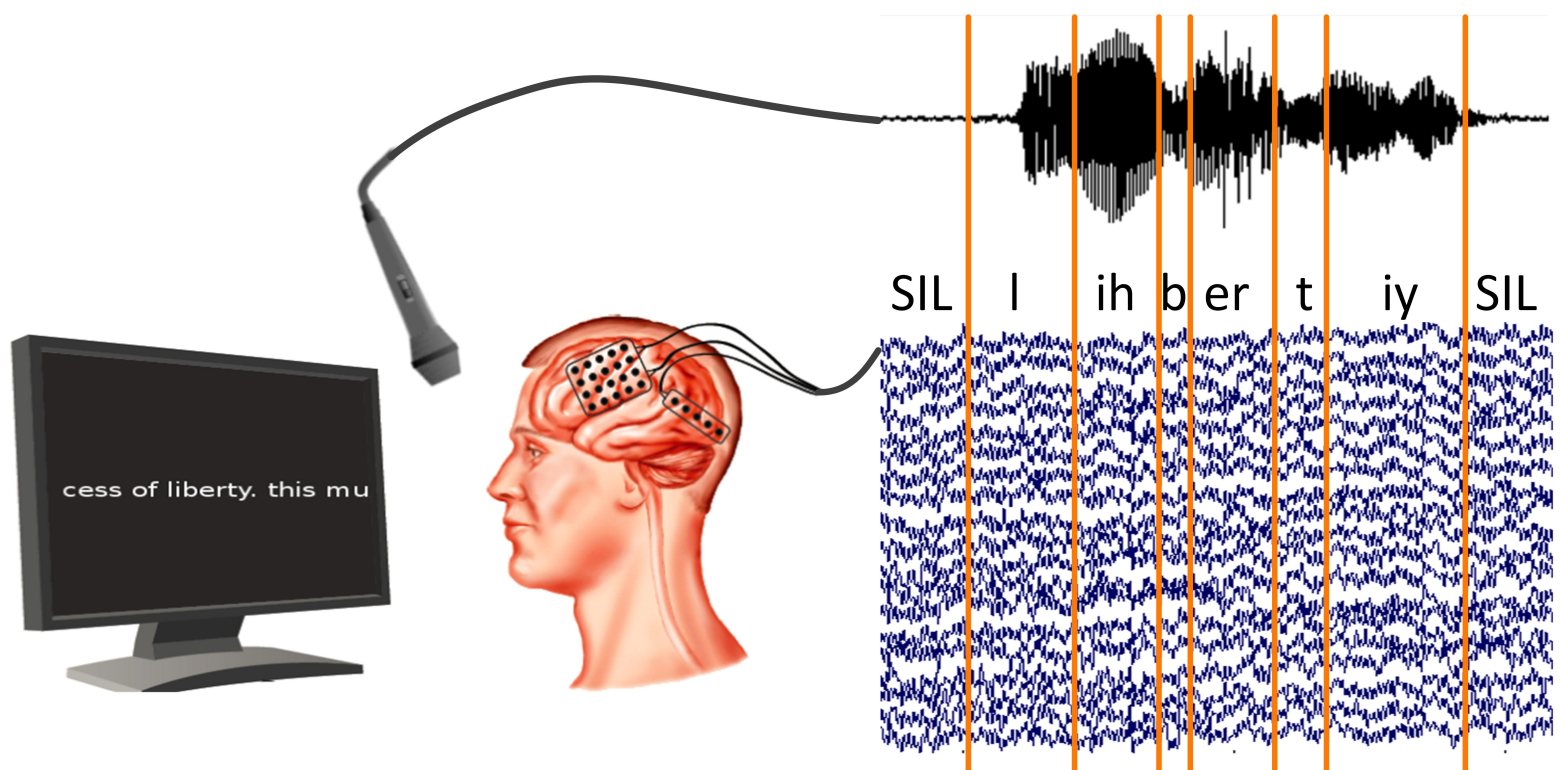


Figure 3.JPEG

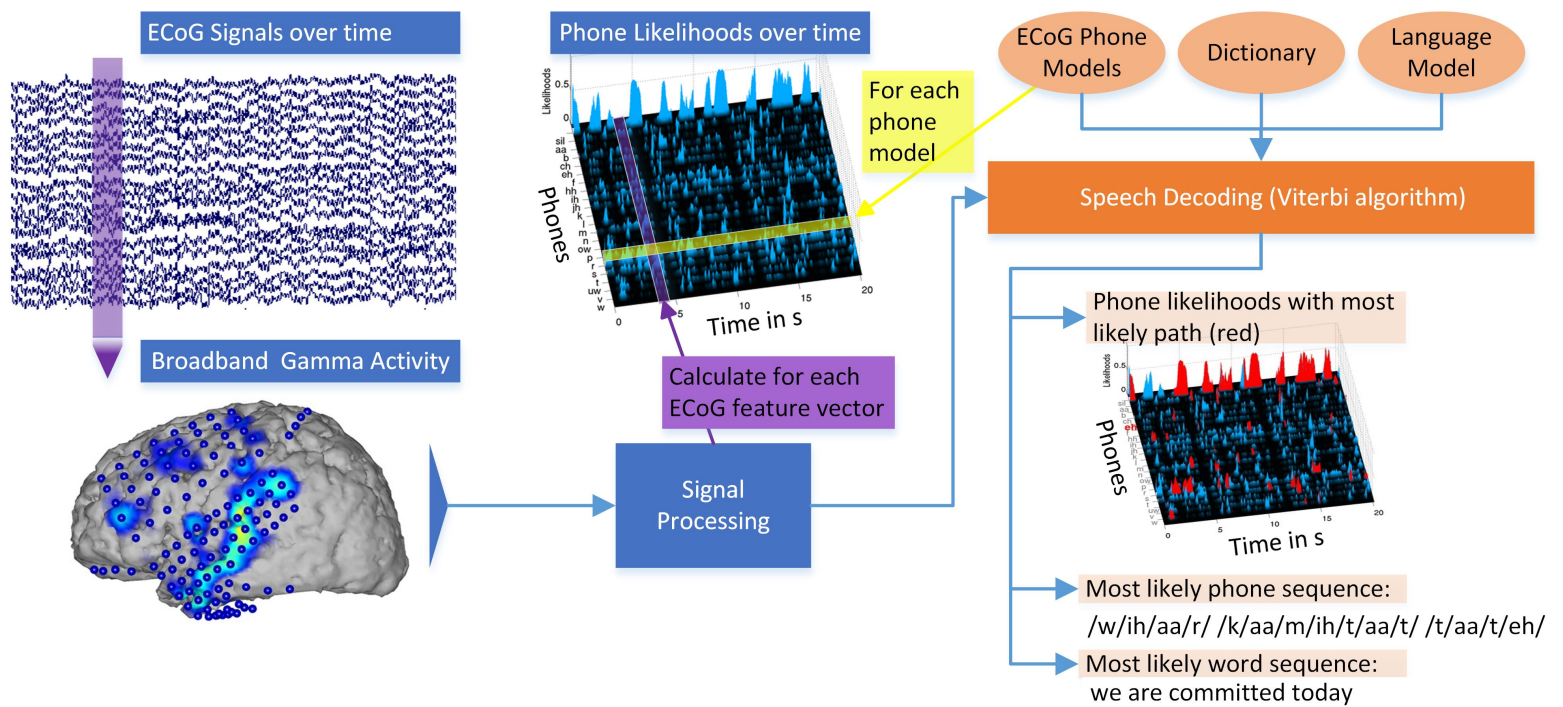


Figure 4.JPEG

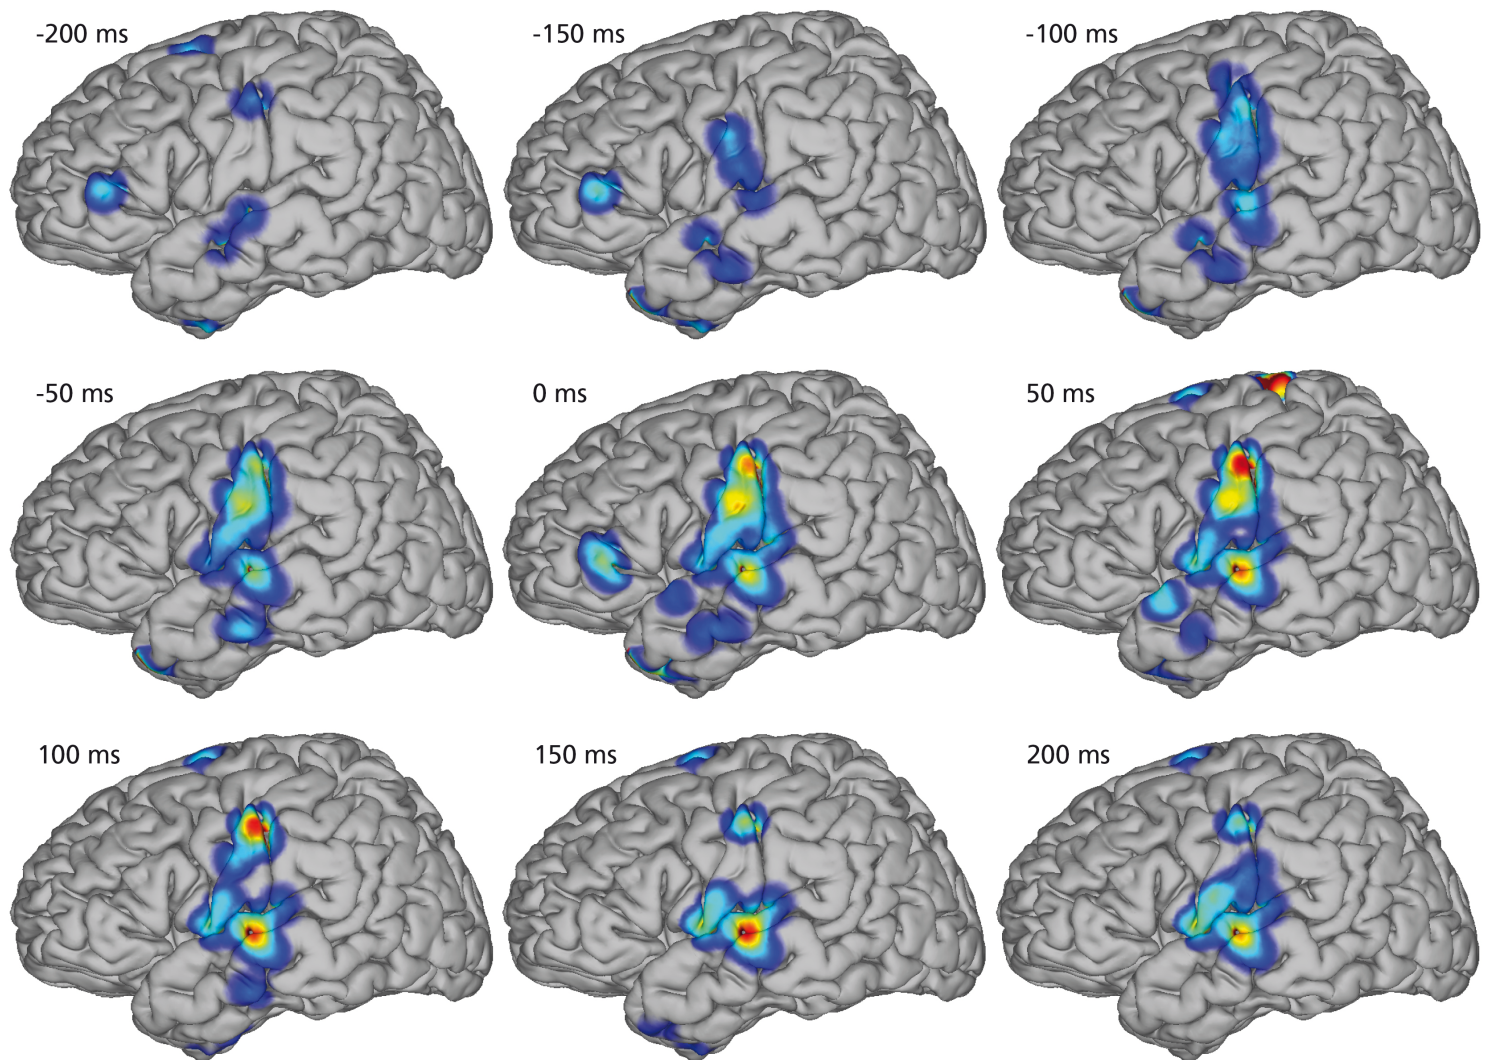


Figure 5.JPEG

