



Nanoporous Aluminum Oxide Templates of Arbitrary Thickness on Silicon Carrier Wafers

5/30/19

Gibson Scisco



Approved for public release; distribution is unlimited.
412TW-PA-19261

Talk Outline

- Anodized aluminum oxide (AAO)
 - Manufacturing and uses
- AAO on silicon
 - Challenges of thick coatings
- Present work: Solving thick AAO-on-Si challenge using macroscale thermal bonding


Anodized Aluminum Oxide (AAO) - History

- More than 70 years of research
- Physical properties, corrosion resistance, mechanism of formation → nanotechnology
- Ordered AAO has seminal works from the mid to late 1990s from Masuda et al. and Jessensky et al.

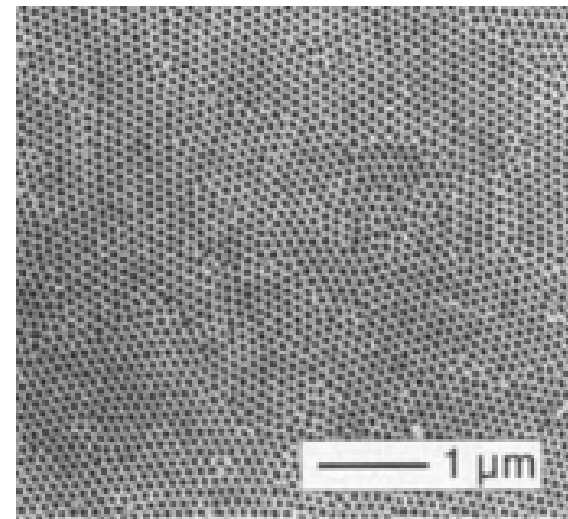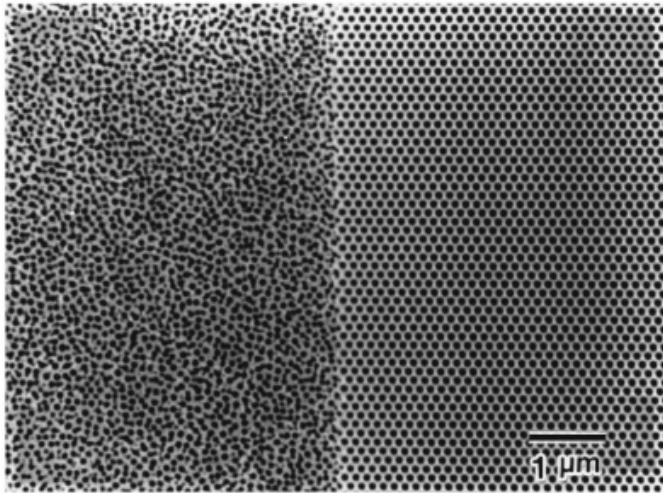



H. Masuda et al., *Appl. Phys. Lett.*, **71** (1997)
O. Jessensky, *J. Electrochem. Soc.*, **145** (1998).

Ordered AAO – Two-Step Process

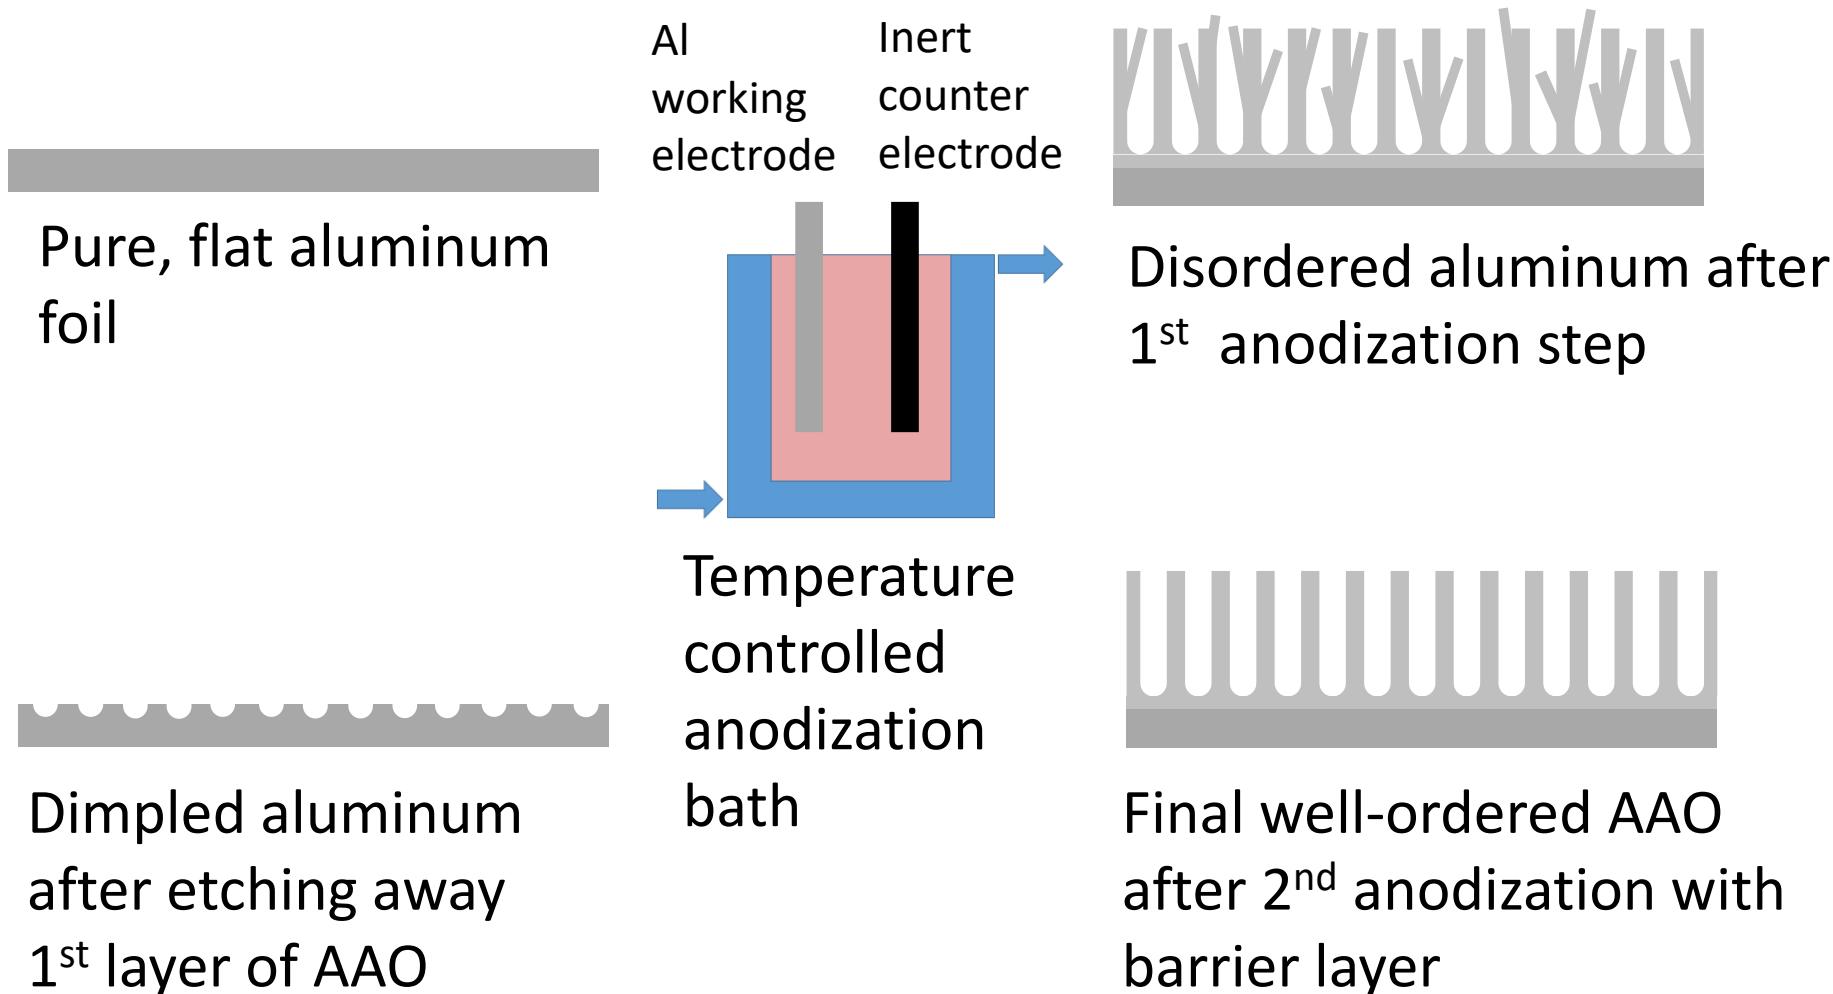




Anodized Aluminum Oxide (AAO)

- Highly-ordered, high-aspect ratio, porous layer
- Controllable pore size <20 to >200 nm
- Controllable pore spacing
- Thickness dependent on anodization time

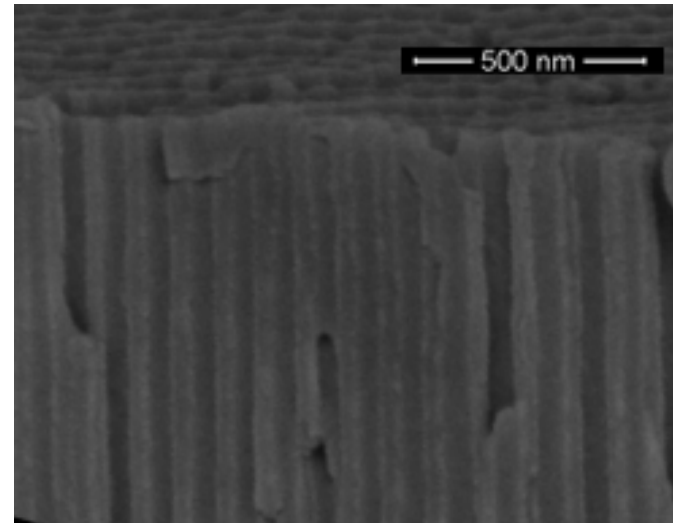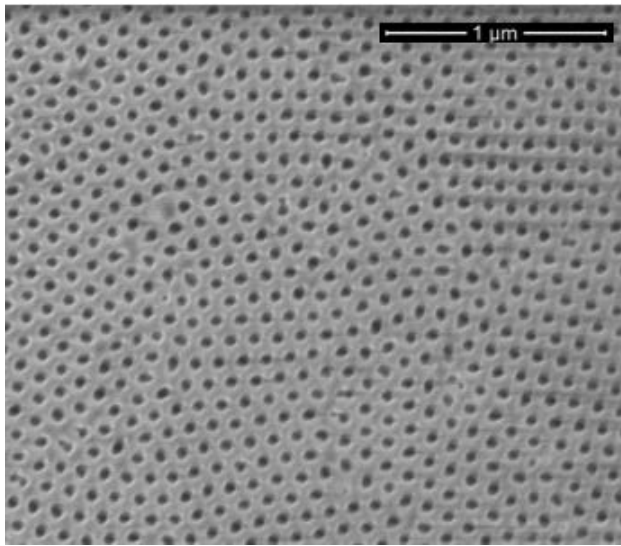

AAO Allows for Templated Nanomanufacturing

- Pd nanowires for hydrogen sensing¹
- Bi₂Te₃ for enhanced thermoelectrics²
- Carbon nanotubes for supercapacitors

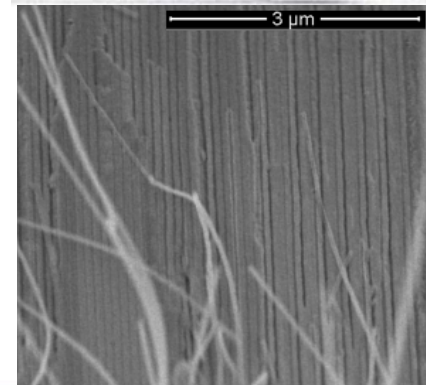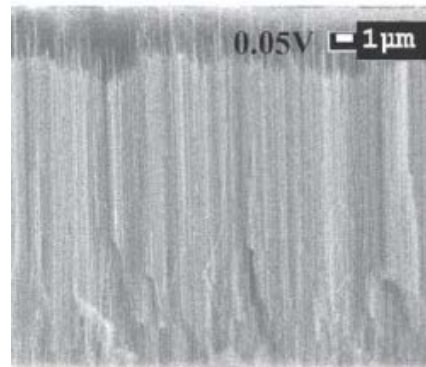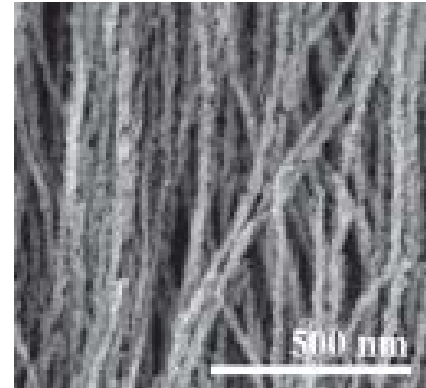


¹L. Du et al., *ACS Appl. Nano Mater.*, **2**, 1178–1184 (2019)

²W. Li et al., *Nanotechnology*, **30** (2019)

AAO on Si Widens Applications of Systems-on-a-Chip

- Pd nanowires for hydrogen sensing¹
 - All-in-one detection and warning
- Bi₂Te₃ for confined thermoelectrics²
 - Efficient heat sink energy scavenging
- Carbon nanotubes for supercapacitors
 - Highly cyclable on-chip power

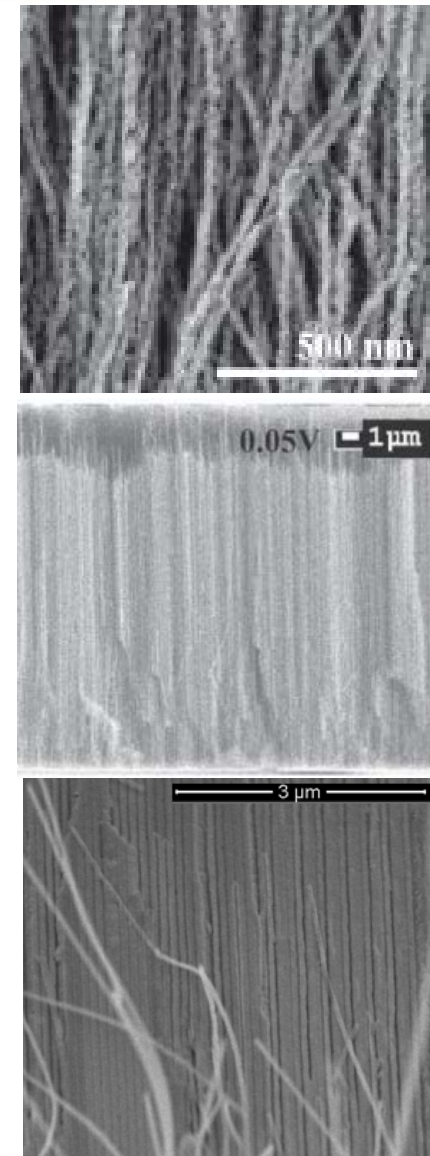

¹L. Du et al., *ACS Appl. Nano Mater.*, **2**, 1178–1184 (2019)

²W. Li et al., *Nanotechnology*, **30** (2019)

Current Methods of AAO on Si are Limited

- Template transfer¹
 - Grow AAO on aluminum foil
 - Remove AAO from aluminum through etching/electrochemistry
 - Transfer to new substrate
 - Problem: Scalability
- Film deposition²
 - Evaporate/sputter aluminum directly onto substrate
 - Grow AAO on substrate
 - Problem: Only thin films (few micrometers)

¹H. Y. Jung et al., *Appl. Phys. Lett.*, **89**, 1–4 (2006)




²N. Berger et al., *Appl. Phys. A Mater. Sci. Process.* (2016)

Scalable Thick-Film AAO-on-Si is Desirable



- Thin films limit the performance of technologies which rely on large volume/surface area.
 - Sensors
 - Thermoelectrics
 - Supercapacitors
- Thicker AAO films would allow for greater on-chip sensor sensitivity, energy generation, and energy storage per unit planar area.

Thick AAO on Si: Two Methods

- Al-Si bonding before anodization

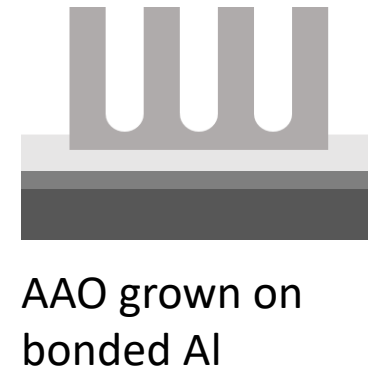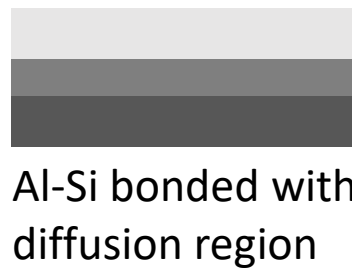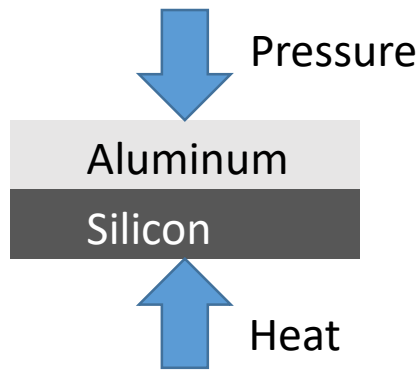


- Al-Si bonding after anodization

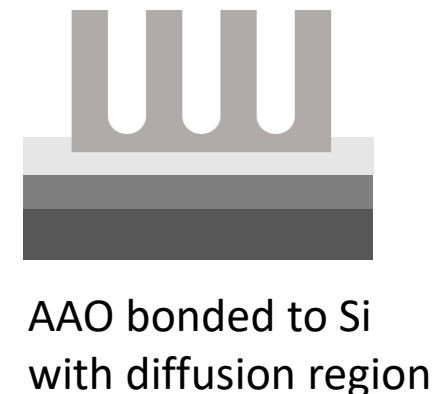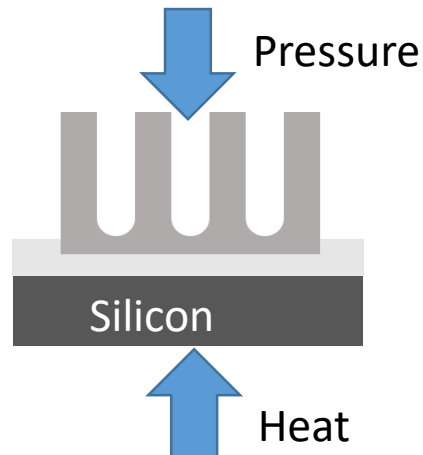

Diffusion Bonding of Al and Si

- Temperatures near the AlSi eutectic of 577°C were targeted
- All treatments under flowing argon

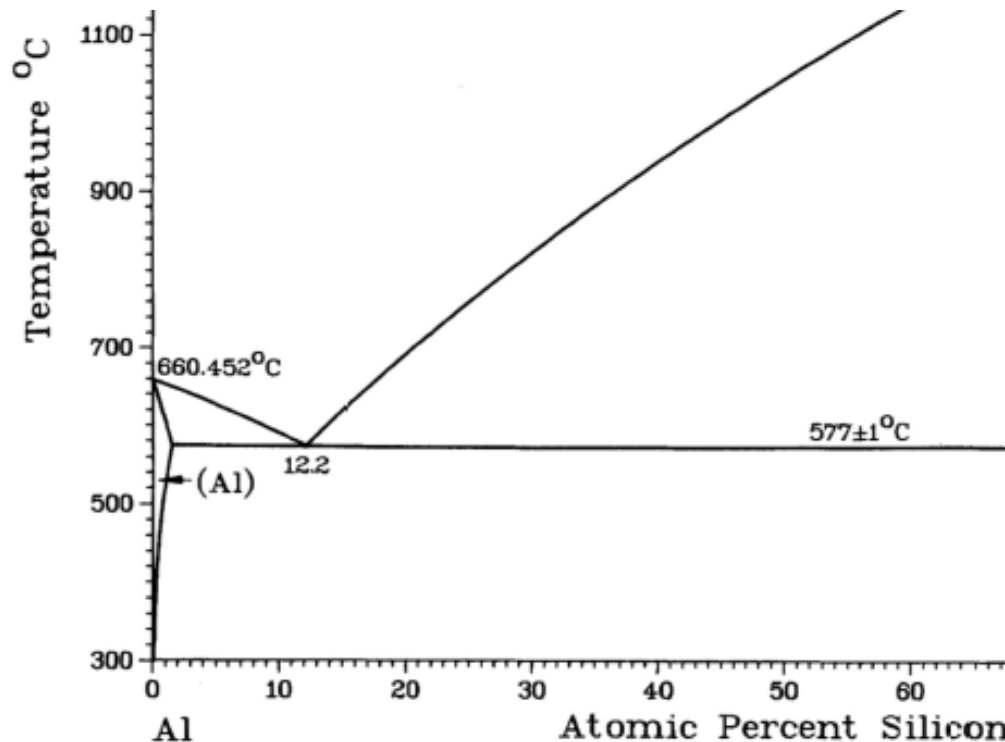

Results of Heat Treatments

- Temperatures near the AlSi eutectic of 577°C were targeted
- All treatments under flowing argon


Temperature (°C)	Time (min)	Bonding	Pristine Surface
570	5	No	Yes
570	10	No	Yes
570	20	Delicate	Yes
570	40	Delicate	Yes
570	80	Yes	No
580	5	No	Yes
580	10	No	Yes
580	20	Yes	Yes
580	40	Yes	No
580	80	Yes	No

Bonding Before Anodizing Maintains Ordering and Decreases Pore Diameter

- 2nd anodization: 40 V, 0.3 M Oxalic Acid, 15°C


- Bulk Al

- Avg Dp: 51 nm

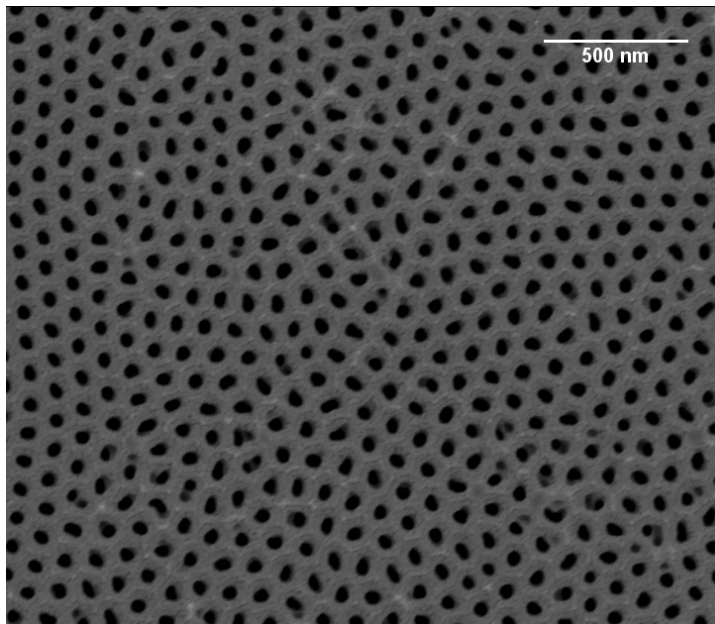

- Bonded Al



- Avg Dp: 34 nm

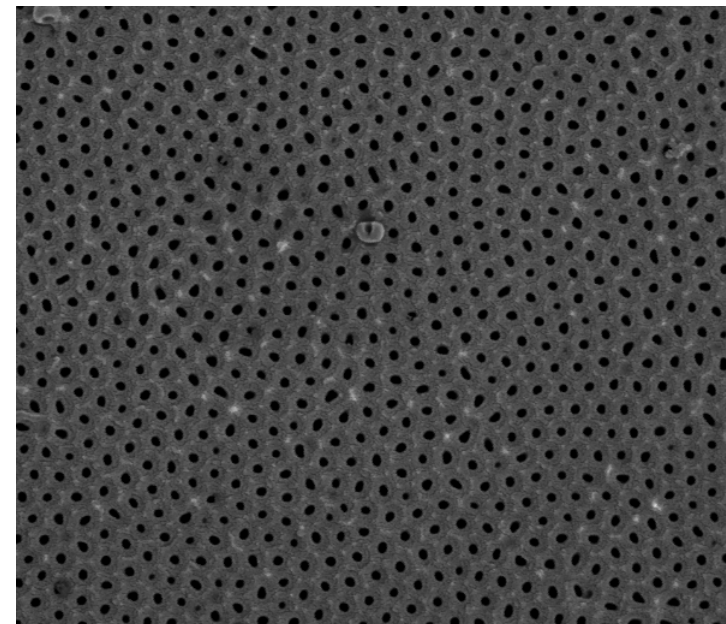

Eutectic Reaction at Al-Si Interface


Aluminum

Silicon

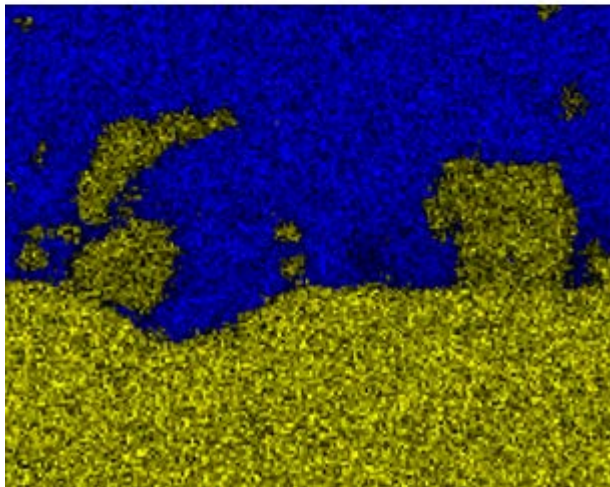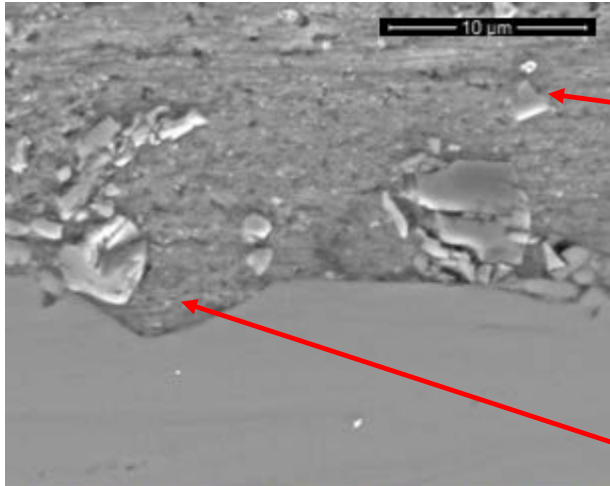

Si particles are embedded into Al during polishing, not precipitates.

Aluminum diffusion spikes into silicon provides strong bond

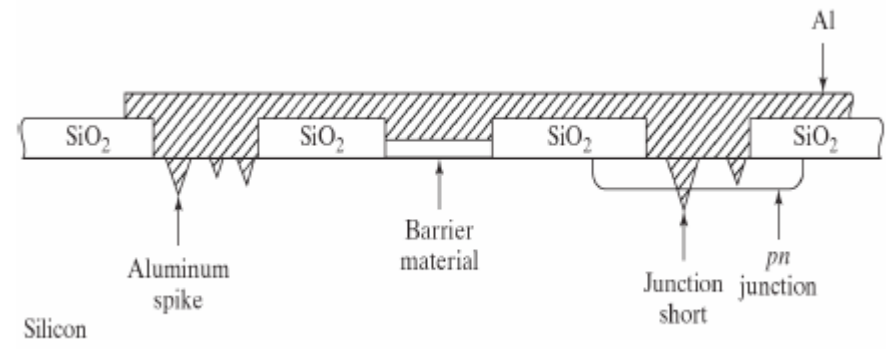


Thick AAO on Si: Two Methods


- Al-Si bonding before anodization



- Al-Si bonding after anodization

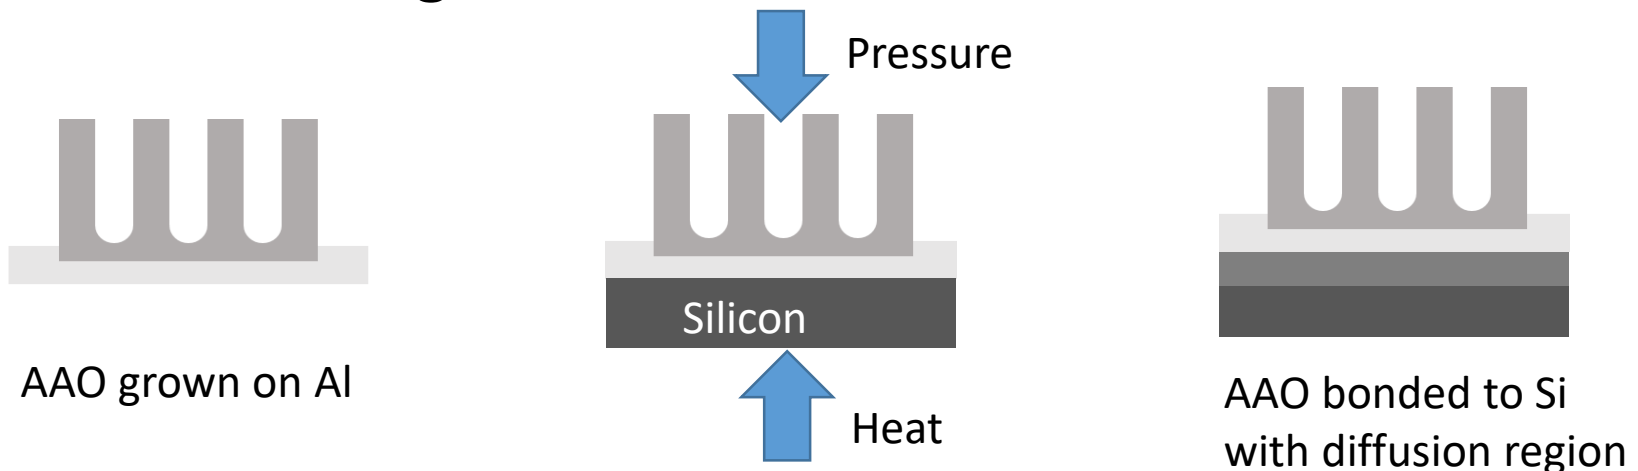


Bonding After Anodization


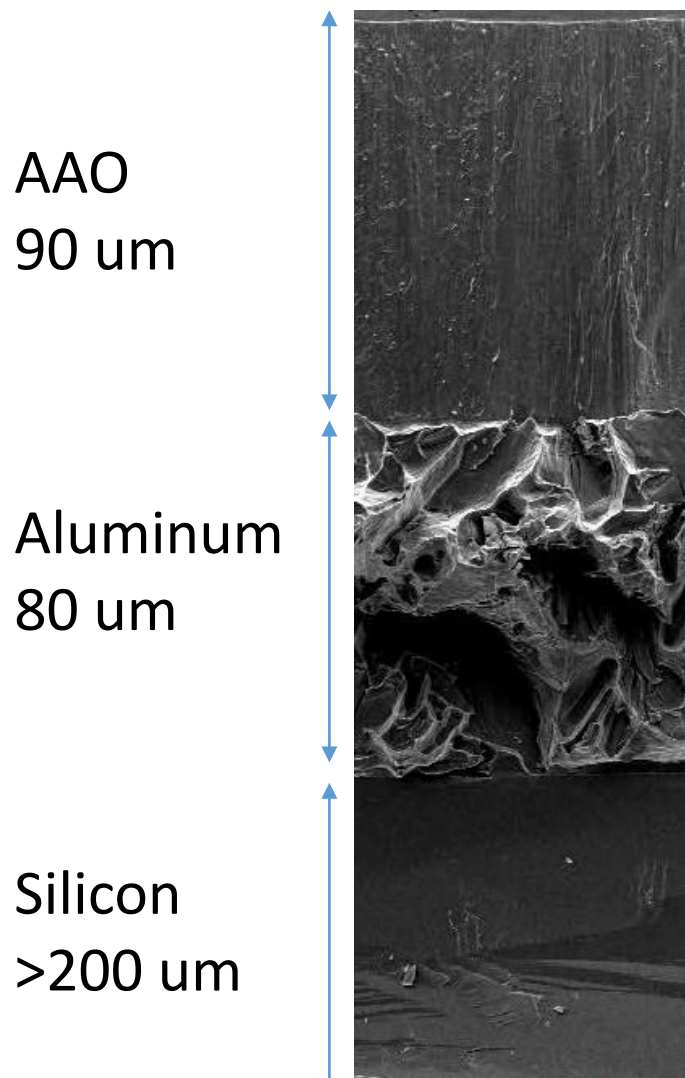


- 24 hour 1st anodization, 16 hour 2nd anodization
- 40 V, 0.3 M Oxalic acid, 15°C
- Increasing the anodization time consumes more Al and brings the AAO closer to the silicon interface.

Pore Structure Unaffected


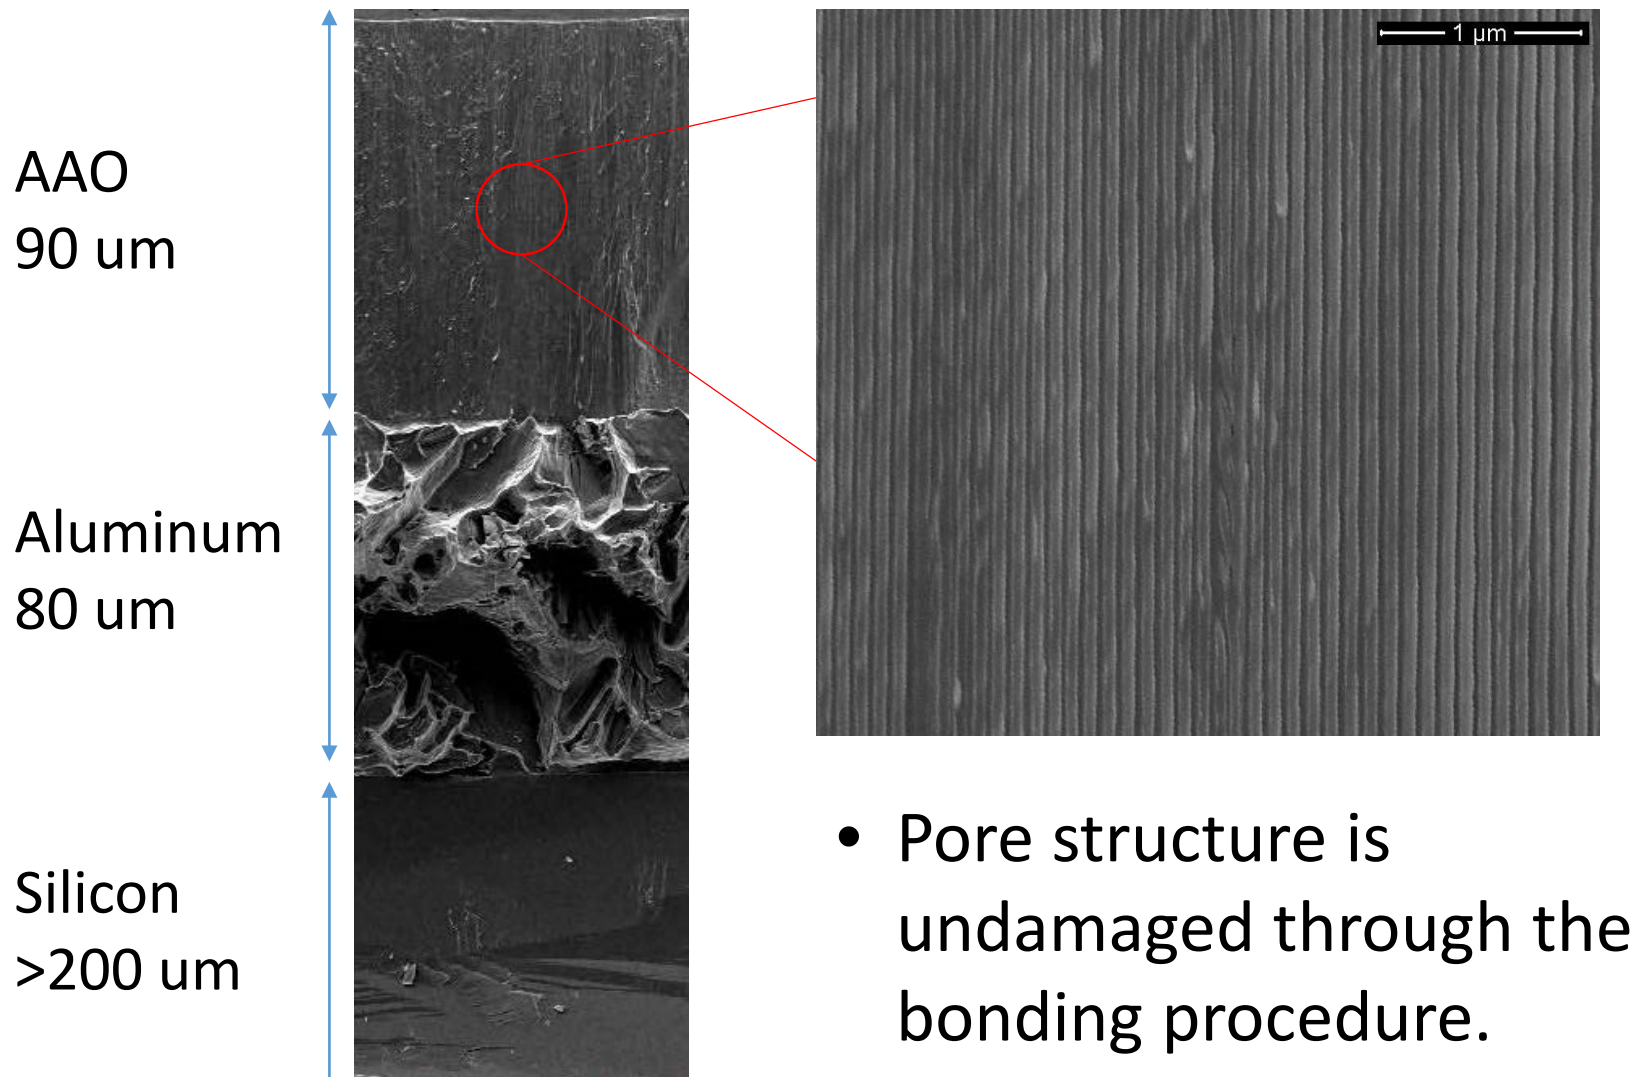


Barrier Layer Remains Intact

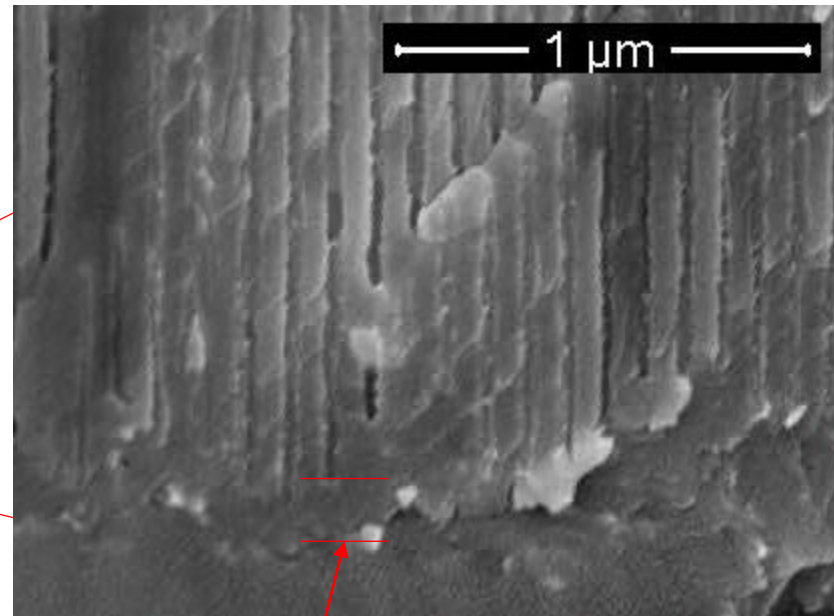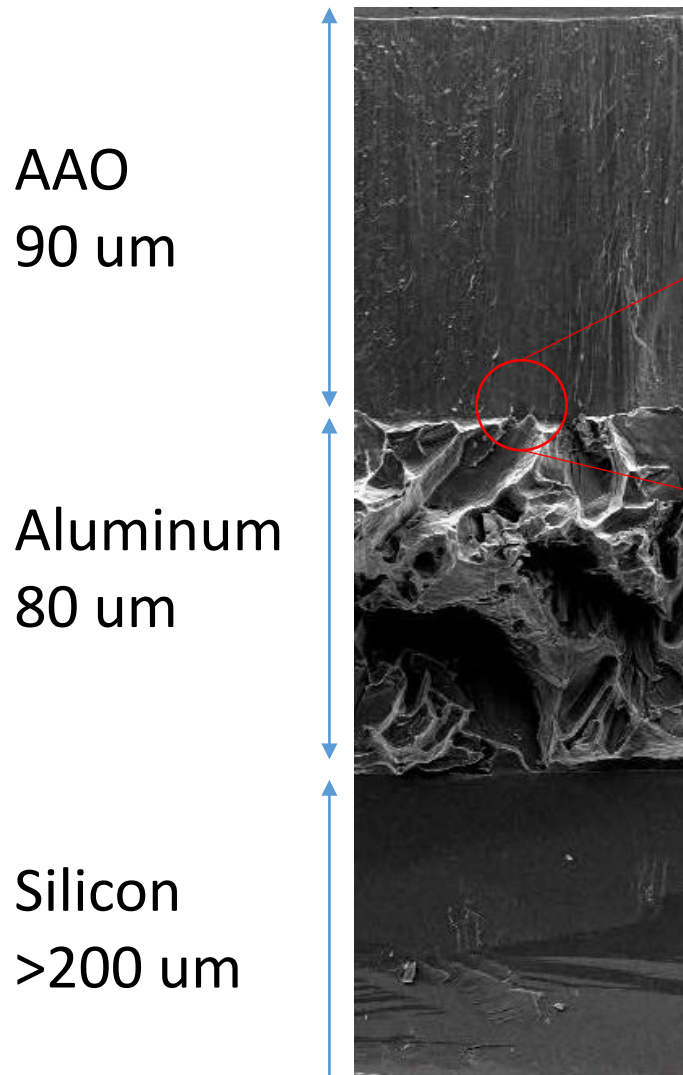

- Barrier layer at the bottom of the pores is unchanged


Al-Si Interface: Mixed Voids and Fusion

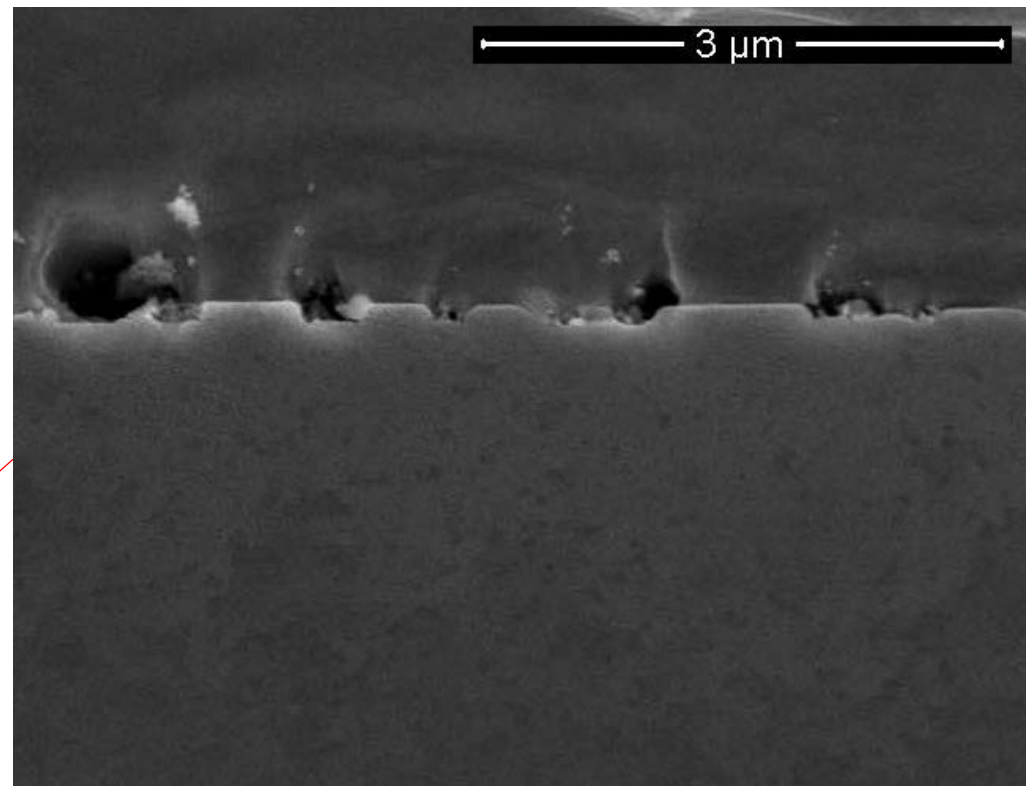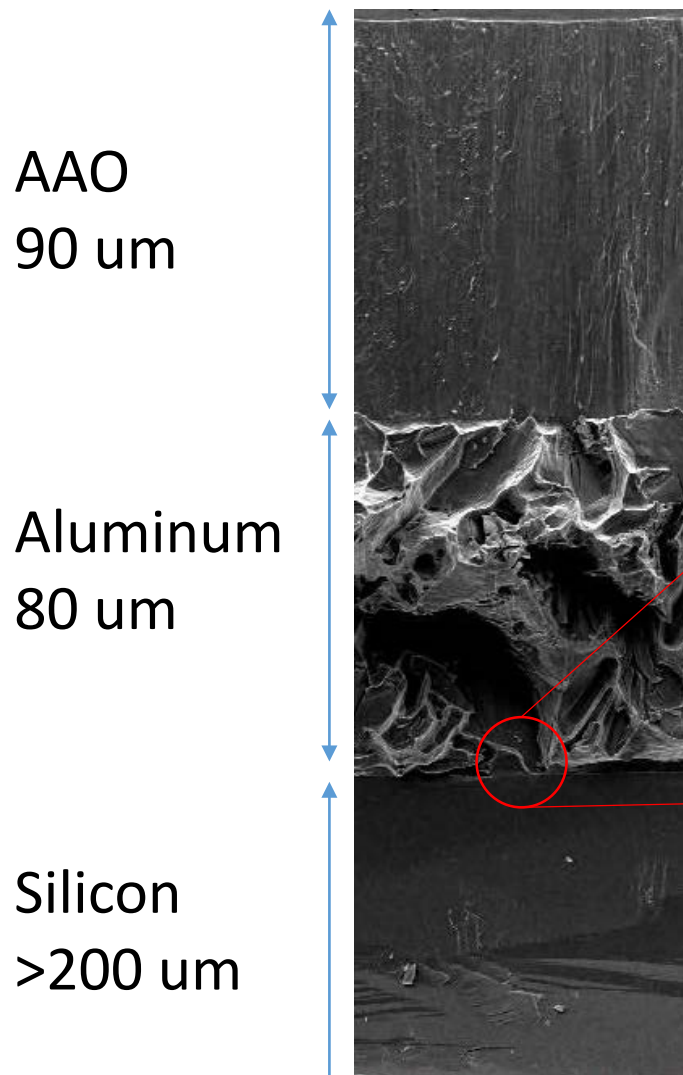

- Al-Si interface characterized by mixed voids and reaction zones.
- Perfectly planarized Al would likely decrease void content.


Chemical Vapor Deposition of Carbon Nanotubes in AAO-on Si

- Carbon nanotubes deposited in AAO following Ahn et al.¹
- Bulk scale pouch cell devices were made and capacitance was calculated from cyclic voltammograms.

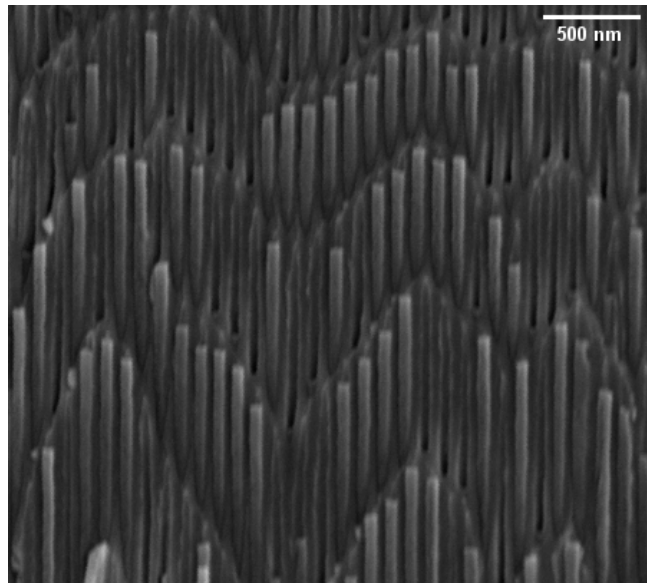


¹H. J. Ahn et al., *Electrochem. commun.*, **8** (2006)

Cyclic Voltammetry Shows Promising Capacitance

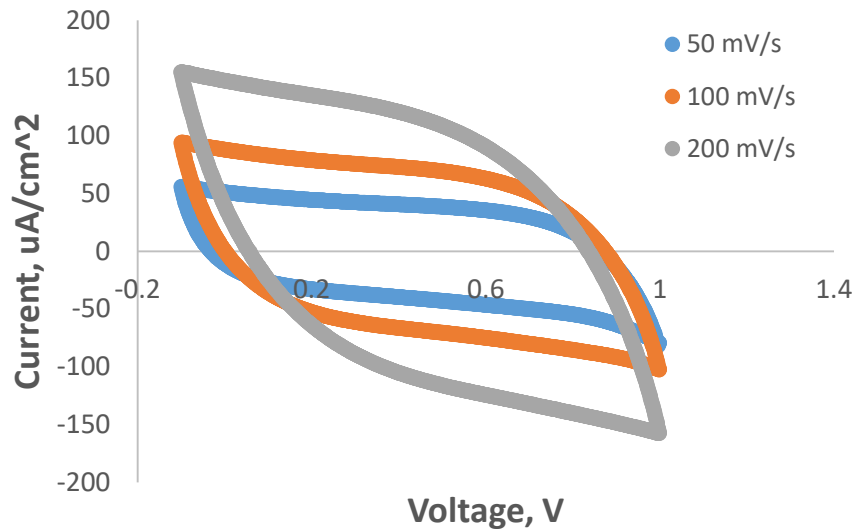

- Voltage range: -0.1 – 1 V
- Sweep rate: 50 – 200 mV/s
- Maximum capacitance of 695 uF/cm² based on planar area

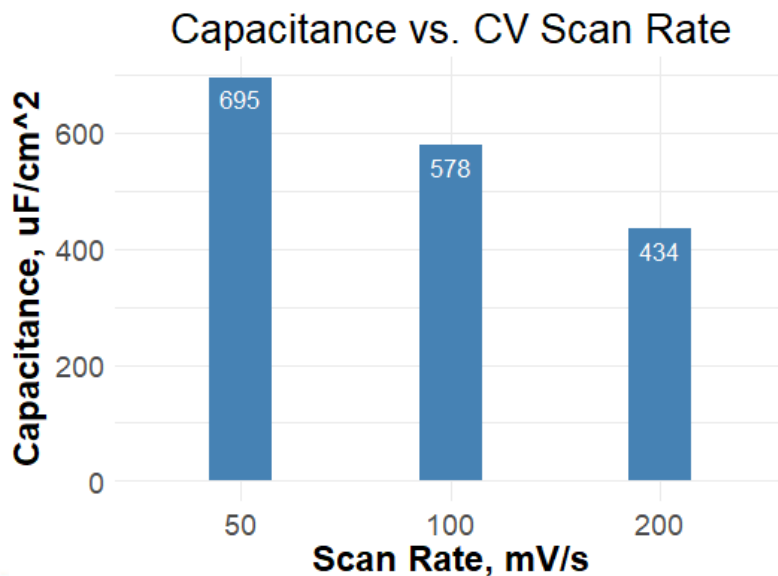

Conclusion

- Simple pressurized heat treatments offer a viable solution to producing thick templates of AAO bonded to silicon.
- Bonding either before or after anodization is possible allowing for great flexibility in nanomanufacturing.
- Thick AAO-on-Si offers a viable platform for on-chip supercapacitors with as much as 695 uF/cm^2 or more based on planar silicon area.

REPORT DOCUMENTATION PAGE				Form Approved OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing this collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.					
1. REPORT DATE (DD-MM-YYYY) Date of Approval (when PA # issued)		2. REPORT TYPE Briefing slides		3. DATES COVERED (From - To) May 26, 2019 – May 30, 2019	
4. TITLE AND SUBTITLE Nanoporous Aluminum Oxide Templates of Arbitrary Thickness on Silicon Carrier Wafers				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S) Gibson Scisco, Anna Skinner, J.J. Hill, K.S. Jones, K.J. Ziegler				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) AND ADDRESS(ES) Full name and address (this can be the same as box 9) University of Florida P.O. Box 116005 Gainesville, FL 32611				8. PERFORMING ORGANIZATION REPORT NUMBER 412TW-PA-19261	
9. SPONSORING / MONITORING AGENCY NAME(S) AND ADDRESS(ES) 412th Test Wing 195 E Popson Ave Edwards AFB CA 93524				10. SPONSOR/MONITOR'S ACRONYM(S) N/A	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION / AVAILABILITY STATEMENT Approved for public release A: distribution is unlimited.					
13. SUPPLEMENTARY NOTES 235 th Electrochemical Society Meeting in Dallas, Texas. This will take place May 26-30, 2019.					
14. ABSTRACT There is a great interest to grow AAO templates directly on silicon as a carrier wafer, however most attempts rely on film deposition techniques that are generally suited for depositions on the order of 1 µm. Thicker aluminum films are desirable in order to achieve better ordering of the AAO pores through two-step anodization and for greater aspect ratio for applications where surface area is the dominant factor such as solar cell and supercapacitor devices. Here, AlSi alloys are used as adhesion layers between aluminum foils and silicon wafers as a solution to the thin film problem. High purity aluminum foils and silicon wafers are pressed together as a diffusion couple. The couple is then annealed under argon atmosphere at temperatures from 550°C to 650°C (from below the AlSi eutectic temperature of 577°C to just below the Al melting temperature of 660°C) for various times. Cross sections of these couples are examined under scanning electron microscopy (SEM) to determine the thickness of the diffusion region and to check for the presence of voids. Bonded Al-AlSi-Si composites are anodized in oxalic acid using a two-step process, and the final AAO morphology is examined under SEM.					
15. SUBJECT TERMS AAO(anodized aluminum oxide), thick film, supercapacitor, CNT(carbon nanotubes)					
16. SECURITY CLASSIFICATION OF: Unclassified			17. LIMITATION OF ABSTRACT None	18. NUMBER OF PAGES 23	19a. NAME OF RESPONSIBLE PERSON 412 TENG/EN (Tech Pubs)
a. REPORT Unclassified	b. ABSTRACT Unclassified	c. THIS PAGE Unclassified			19b. TELEPHONE NUMBER (include area code) 661-277-8615