

REPORT DOCUMENTATION PAGE			Form Approved OMB NO. 0704-0188		
The public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA, 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.					
1. REPORT DATE (DD-MM-YYYY) 05-07-2018		2. REPORT TYPE Final Report		3. DATES COVERED (From - To) 15-Sep-2015 - 14-Sep-2016	
4. TITLE AND SUBTITLE Final Report: Toward Accurate Models of Wet Granular Media in Nature			5a. CONTRACT NUMBER W911NF-15-1-0598		
			5b. GRANT NUMBER		
			5c. PROGRAM ELEMENT NUMBER 611102		
6. AUTHORS			5d. PROJECT NUMBER		
			5e. TASK NUMBER		
			5f. WORK UNIT NUMBER		
7. PERFORMING ORGANIZATION NAMES AND ADDRESSES Massachusetts Institute of Technology (MIT) 77 Massachusetts Avenue NE18-901 Cambridge, MA 02139 -4307			8. PERFORMING ORGANIZATION REPORT NUMBER		
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS (ES) U.S. Army Research Office P.O. Box 12211 Research Triangle Park, NC 27709-2211			10. SPONSOR/MONITOR'S ACRONYM(S) ARO		
			11. SPONSOR/MONITOR'S REPORT NUMBER(S) 67891-EV.1		
12. DISTRIBUTION AVAILABILITY STATEMENT Approved for public release; distribution is unlimited.					
13. SUPPLEMENTARY NOTES The views, opinions and/or findings contained in this report are those of the author(s) and should not be construed as an official Department of the Army position, policy or decision, unless so designated by other documentation.					
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT UU	15. NUMBER OF PAGES	19a. NAME OF RESPONSIBLE PERSON Kenneth Kamrin
a. REPORT UU	b. ABSTRACT UU	c. THIS PAGE UU			19b. TELEPHONE NUMBER 617-715-4157

RPPR Final Report

as of 22-Aug-2018

Agency Code:

Proposal Number: 67891EV

Agreement Number: W911NF-15-1-0598

INVESTIGATOR(S):

Name: Kenneth N Kamrin
Email: kkamrin@mit.edu
Phone Number: 6177154157
Principal: Y

Organization: **Massachusetts Institute of Technology (MIT)**

Address: 77 Massachusetts Avenue, Cambridge, MA 021394307

Country: USA

DUNS Number: 001425594

EIN: 042103594

Report Date: 14-Dec-2016

Date Received: 05-Jul-2018

Final Report for Period Beginning 15-Sep-2015 and Ending 14-Sep-2016

Title: Toward Accurate Models of Wet Granular Media in Nature

Begin Performance Period: 15-Sep-2015

End Performance Period: 14-Sep-2016

Report Term: 0-Other

Submitted By: Kenneth Kamrin

Email: kkamrin@mit.edu

Phone: (617) 715-4157

Distribution Statement: 1-Approved for public release; distribution is unlimited.

STEM Degrees:

STEM Participants:

Major Goals: This short project was aimed at discrete and continuum simulation methods for wet granular materials. The project explored modeling of slightly wet grains (i.e. the pendular regime) and fully saturated grains. These two areas were treated as two separate problems.

On the partially wet side, the first goal was to write a novel and robust discrete element method that captures fluid bridging, fluid transfer during contact breaking, and time-dependence of bridge formation, simultaneous with frictional contact modeling of grain-on-grain interaction. Once achieved, the discrete method can be used like an experiment to identify homogenized continuum relations.

On the fully saturated side, our aim was to develop an effective LBM-DEM method that could be used to provide inputs to a poro-plastic type continuum model. The goal was to cast the continuum model within a meshless numerical framework that permits huge deformations. Transitioning a finite-element poro-plastic approach to a meshless one would utilize the consultation of Prof David Henann at Brown, a finite-element expert. Geoscientist Dr. Colin Stark at NYU would help with the selection of natural particle-scale input parameters.

Accomplishments: Many of the goals proposed were accomplished, though some of them materialized after the close date of the short grant.

On the discrete side, we were able to write and implement a custom method that tracks the fluid layer thickness on each grain as a separate degree of freedom. During contact, the layer thicknesses of the contact pairs evolve dynamically as fluid is (viscously) driven into the bridge. As the bridge is forming, the strength of the bridge itself is evolving with it as a function of bridge volume. The current bridge volume is appended to the discrete system as a new "contact" variable. This approach not only captures the effect of fluid viscosity on bridge dynamics, but also guarantees fluid mass conservation and realistic fluid redistribution onto grains when bridges break. Using this method we were able to identify a rheological form based on two dimensionless numbers: The inertial number I_1 and the wetness number I_2 . The number I_1 is standard from dry granular flow, and it measures the competition between the time-scale of the macroscopic strain-rate and the pressure-driven rearrangement time. The number I_2 invokes the fluid surface tension and compares it against the system pressure. We were able to identify the normalized flow resistances in terms of these two numbers to provide a closed rheology.

As for the fully saturated work, we identified several nuances in the LBM-DEM framework that required close attention and specialized numerical conditioning. These helped us simulate saturated particles flowing through complex and deformable geometries. A broad continuum simulation effort was started in parallel that worked to

RPPR Final Report as of 22-Aug-2018

transition existing poro-plastic FEM modeling into a meshless mixture theory. This mixture approach broadens the theory by not requiring quasi-static fluid balance, and numerically the meshless method, based on the Material Point Method (MPM), enables us to go to extreme deformations beyond the FEM limit. We have recently completed this model and numerical approach, but its genesis was during this short project period. We are now capable of simulating arbitrary grain sediment problems in the continuum, tracking both the homogenized fluid motion and the separate homogenized grain motion.

Training Opportunities: The grant was used to co-fund two postdoc (Ramin Ghelichi and Patrick Mutabaruka) and co-fund one graduate student (Sachith Dunatunga). During this period these three personnel attended conferences and presented their work across the US.

Results Dissemination: The results were disseminated in multiple conference presentations (APS and SES). No journal articles were submitted during the one-year duration of the award, though afterward, the work done during the award duration resulted in two published/submitted papers.

Honors and Awards: Kamrin received the Eshelby Mechanics Award for Young Faculty during the award duration. This distinction is awarded jointly by ASME and the University of Houston.

Protocol Activity Status:

Technology Transfer: Nothing to Report

PARTICIPANTS:

Participant Type: Faculty

Participant: David Henann

Person Months Worked: 2.00

Project Contribution:

International Collaboration:

International Travel:

National Academy Member: N

Other Collaborators:

Funding Support:

Participant Type: Staff Scientist (doctoral level)

Participant: Colin Stark

Person Months Worked: 1.00

Project Contribution:

International Collaboration:

International Travel:

National Academy Member: N

Other Collaborators:

Funding Support:

Participant Type: Postdoctoral (scholar, fellow or other postdoctoral position)

Participant: Patrick Mutabaruka

Person Months Worked: 4.00

Project Contribution:

International Collaboration:

International Travel:

National Academy Member: N

Other Collaborators:

Funding Support:

Participant Type: Postdoctoral (scholar, fellow or other postdoctoral position)

Participant: Ramin Ghelichi

Person Months Worked: 3.00

Project Contribution:

Funding Support:

RPPR Final Report
as of 22-Aug-2018

International Collaboration:
International Travel:
National Academy Member: N
Other Collaborators:

Participant Type: Graduate Student (research assistant)






Participant: Sachith Dunatunga


Person Months Worked: 3.00

Funding Support:

Project Contribution:
International Collaboration:
International Travel:
National Academy Member: N
Other Collaborators:

Partially-wet regimes:

wetness regime		morphology	liquid content
humidity	asperities		$W = 0.0$ to 0.026
	roughness		
pendular			W_{cb}
funicular			W^*
		clusters	0.026 to 0.08
		bicontinuous	0.08 to 0.28
bubbles			0.28 to saturation

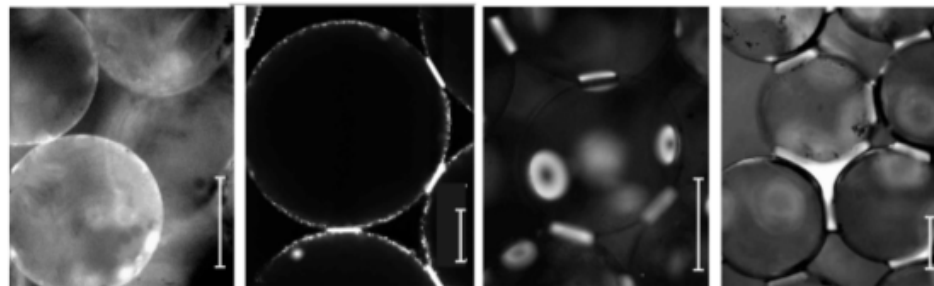


(a)

(b)

(c)



(d)

Mitirai and Nori (2007)

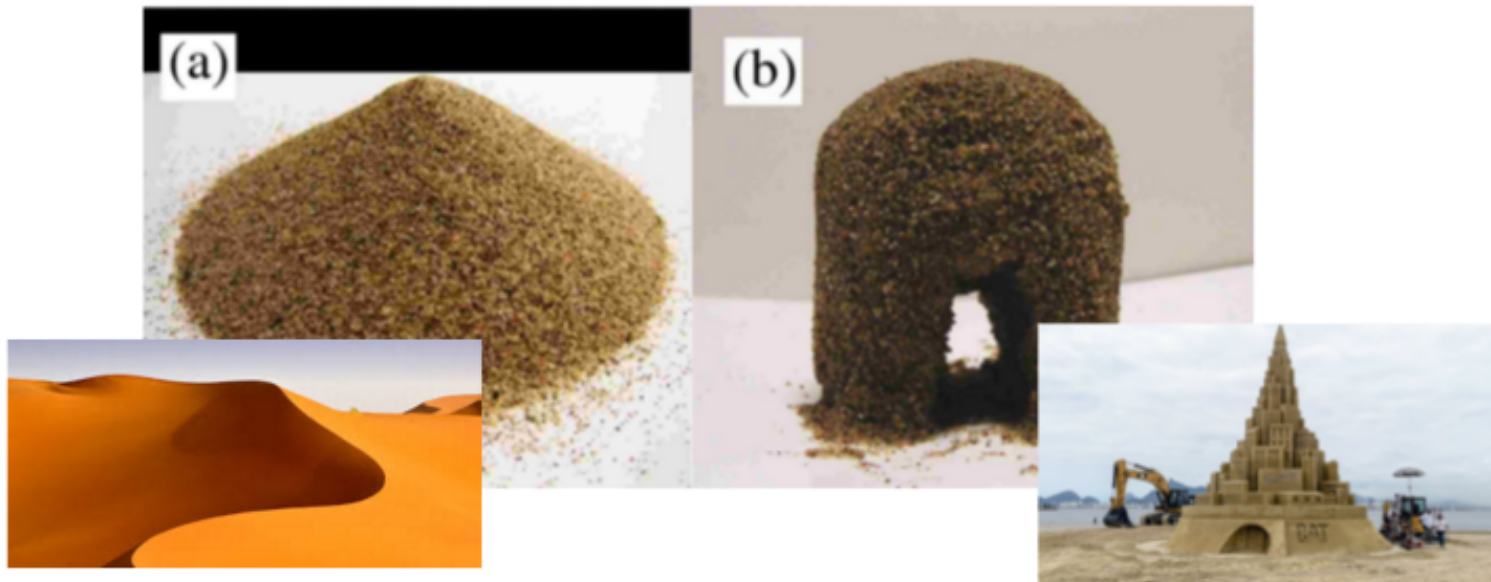


Mitirai and Nori (2007)

Capillary bridge force

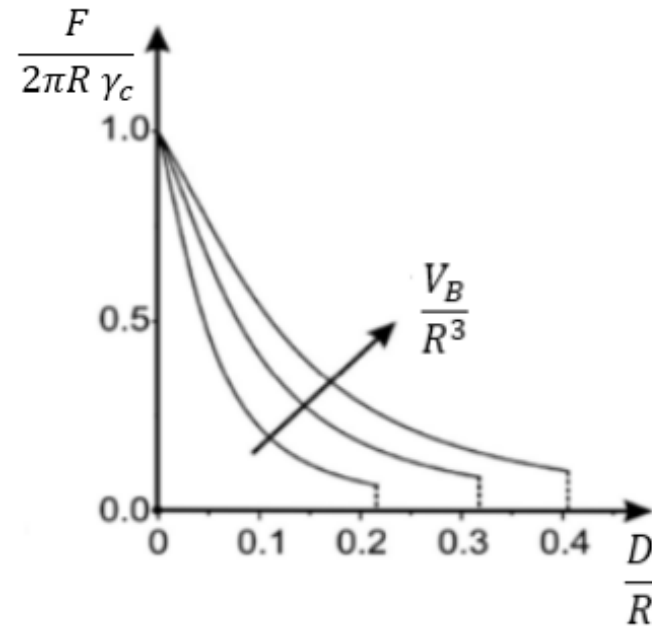
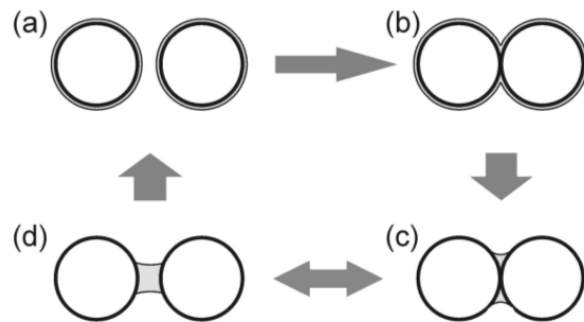


Herminghaus (2005)

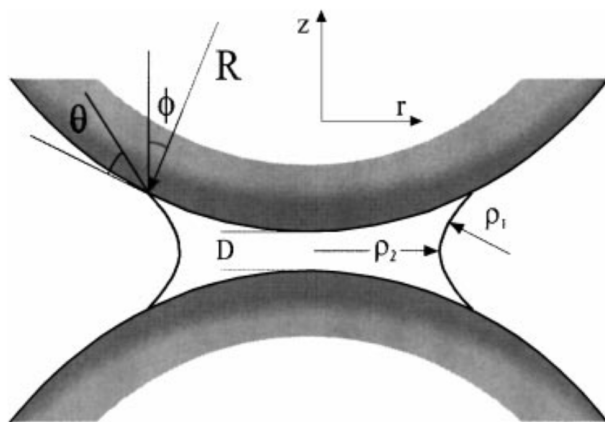

$$F_{cap} \approx 2\pi R \gamma_c \left[1 - \frac{1}{\sqrt{1 + \frac{2V_B}{2RD^2}}} \right]$$


Bridge Volume

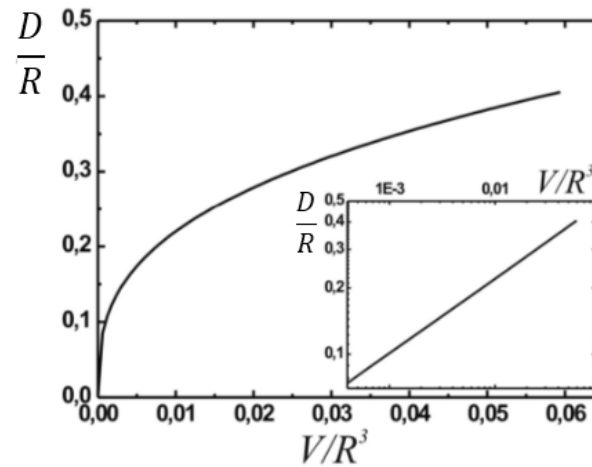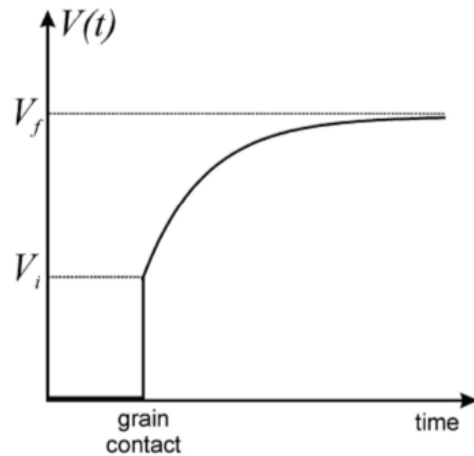

Herminghaus (2005)

$$V_B(t) = V_f \left[1 - \exp\left(-\frac{C_0 h_{ij}^3}{V_f \eta} t\right) \right]$$

$$D_c \approx R \left(1 + \frac{\theta}{2} \right) V_B^{1/3}$$

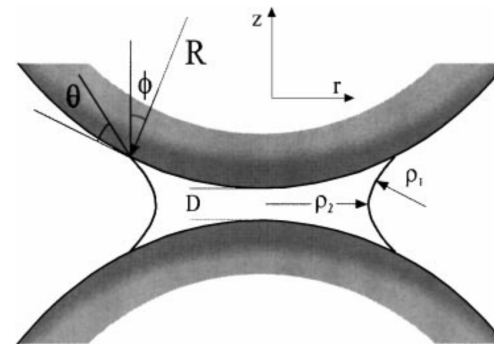

Customized DEM

A customized potential added to LAMMPS:

- $F_{cap} = 2\pi R\gamma_c \left[1 - \frac{1}{\sqrt{1 + \frac{2V_B}{2RD^2}}} \right]$

- $V(t) = V_m \left[1 - \exp\left(-\frac{C_0 h_{ij}^3}{V_m \eta} t \right) \right]$


- $S_c = R \left(1 + \frac{\theta}{2} \right) V^{1/3}$

- $F_{vis} = -\frac{3}{2}\pi\eta R^2 \frac{1}{D} \frac{dD}{dt}$


- $F_{Bridge} = F_{cap} + F_{vis}$

- Particle Hookean contact with friction and rotation.


- Conserving the volume of the water in the system

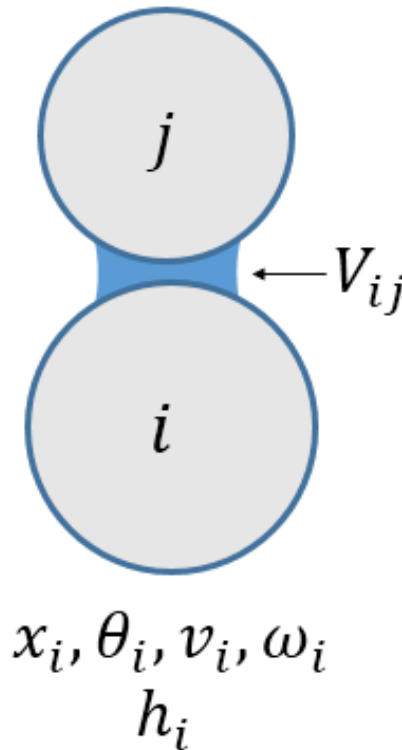


Fluid-extended DEM interaction:

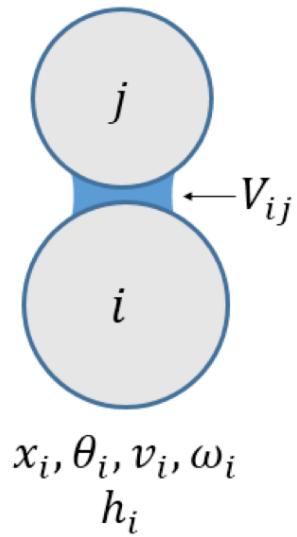


Fast collision
of wet grains

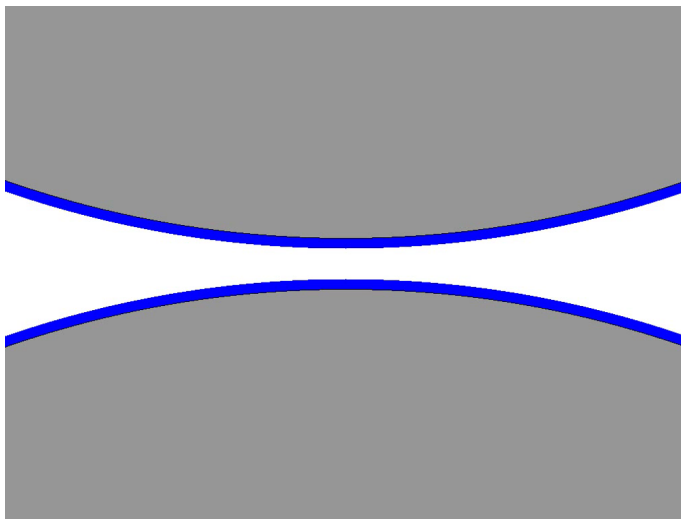


Slow collision
of wet grains

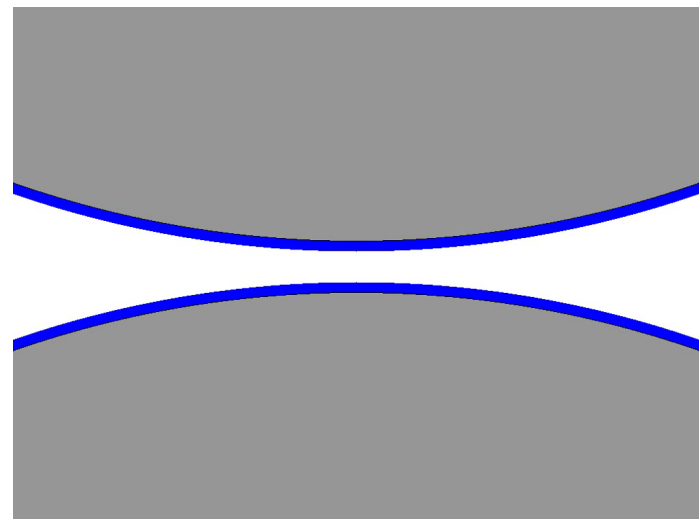


Hunting for a
homogenized wet
grain rheology:

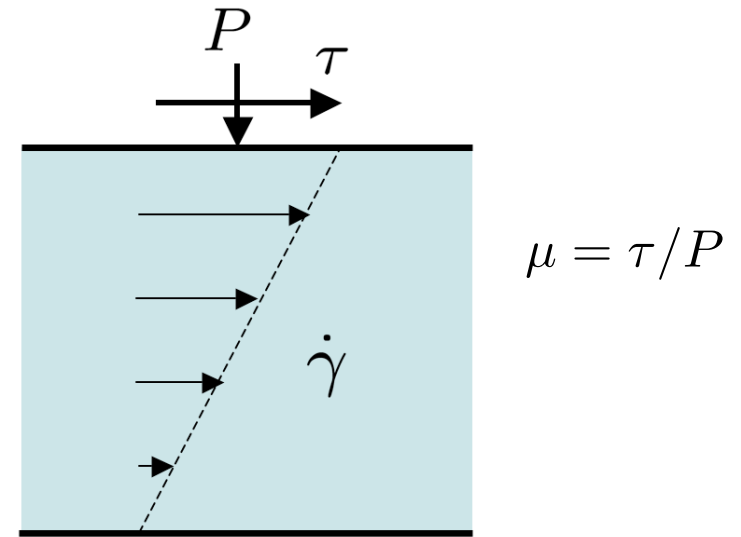


Dry

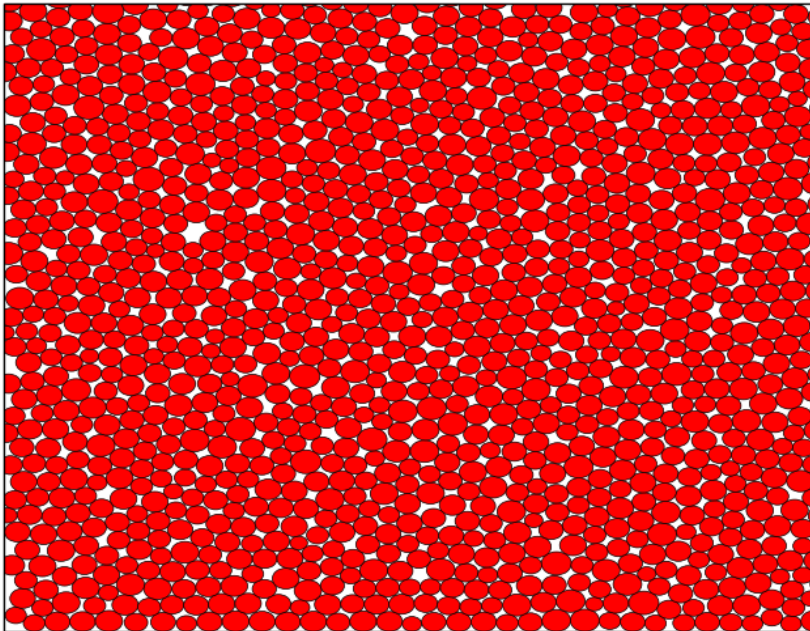

Wet

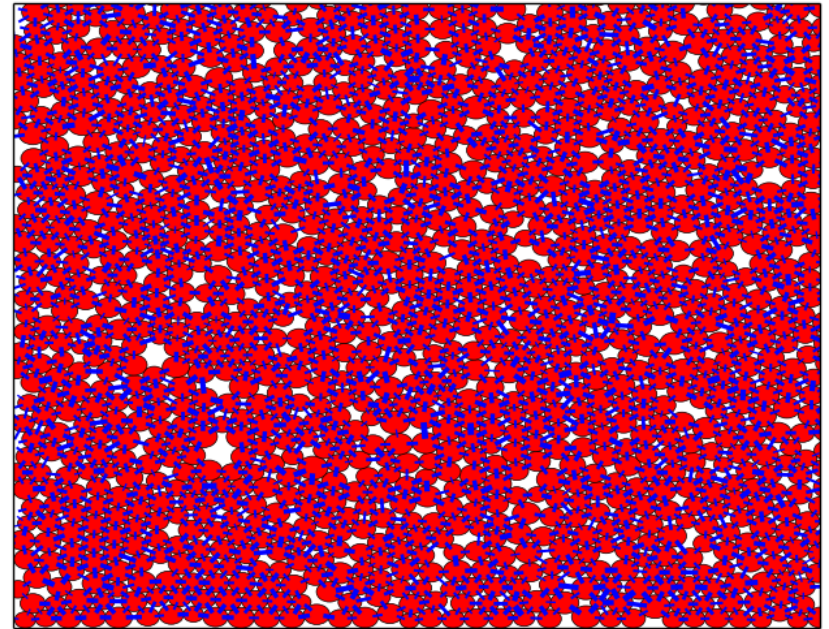

Results

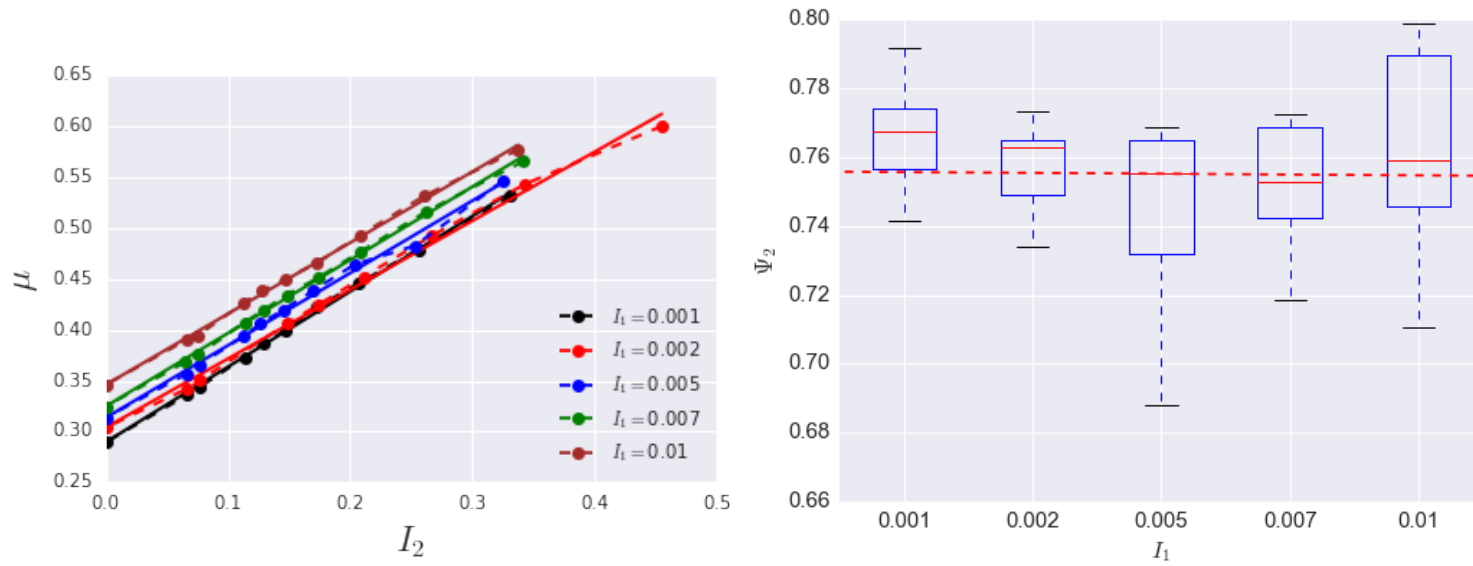

$$I_1 = \epsilon_{xy} \sqrt{\frac{m}{P}}, I_2 = \frac{\gamma_c}{P_d}$$

$$\tau = P\hat{\Psi}_1(I_1) + P I_2 \hat{\Psi}_2(I_1) \Rightarrow \Psi_2(I_1) = \frac{\langle d \rangle (\tau - P\hat{\Psi}_1(I_1))}{\gamma_c}$$