

SHIP PRODUCTION COMMITTEE
FACILITIES AND ENVIRONMENTAL EFFECTS
SURFACE PREPARATION AND COATINGS
DESIGN/PRODUCTION INTEGRATION
HUMAN RESOURCE INNOVATION
MARINE INDUSTRY STANDARDS
WELDING
INDUSTRIAL ENGINEERING
EDUCATION AND TRAINING

September 1979
NSRP 0006

THE NATIONAL SHIPBUILDING RESEARCH PROGRAM

Proceedings of the REAPS Technical Symposium


Paper No. 12: Network Scheduling of Shipyard Production, Engineering, and Material Procurement

U.S. DEPARTMENT OF THE NAVY
CARDEROCK DIVISION,
NAVAL SURFACE WARFARE CENTER

Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE SEP 1979		2. REPORT TYPE N/A		3. DATES COVERED -	
4. TITLE AND SUBTITLE The National Shipbuilding Research Program Proceedings of the REAPS Technical Symposium Paper No. 12: Network Scheduling of Shipyard Production, Engineering, and Material Procurement				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Naval Surface Warfare Center CD Code 2230 - Design Integration Tools Building 192 Room 128 9500 MacArthur Blvd Bethesda, MD 20817-5700				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release, distribution unlimited					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT SAR	18. NUMBER OF PAGES 16	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

DISCLAIMER

These reports were prepared as an account of government-sponsored work. Neither the United States, nor the United States Navy, nor any person acting on behalf of the United States Navy (A) makes any warranty or representation, expressed or implied, with respect to the accuracy, completeness or usefulness of the information contained in this report/manual, or that the use of any information, apparatus, method, or process disclosed in this report may not infringe privately owned rights; or (B) assumes any liabilities with respect to the use of or for damages resulting from the use of any information, apparatus, method, or process disclosed in the report. As used in the above, "Persons acting on behalf of the United States Navy" includes any employee, contractor, or subcontractor to the contractor of the United States Navy to the extent that such employee, contractor, or subcontractor to the contractor prepares, handles, or distributes, or provides access to any information pursuant to his employment or contract or subcontract to the contractor with the United States Navy. ANY POSSIBLE IMPLIED WARRANTIES OF MERCHANTABILITY AND/OR FITNESS FOR PURPOSE ARE SPECIFICALLY DISCLAIMED.

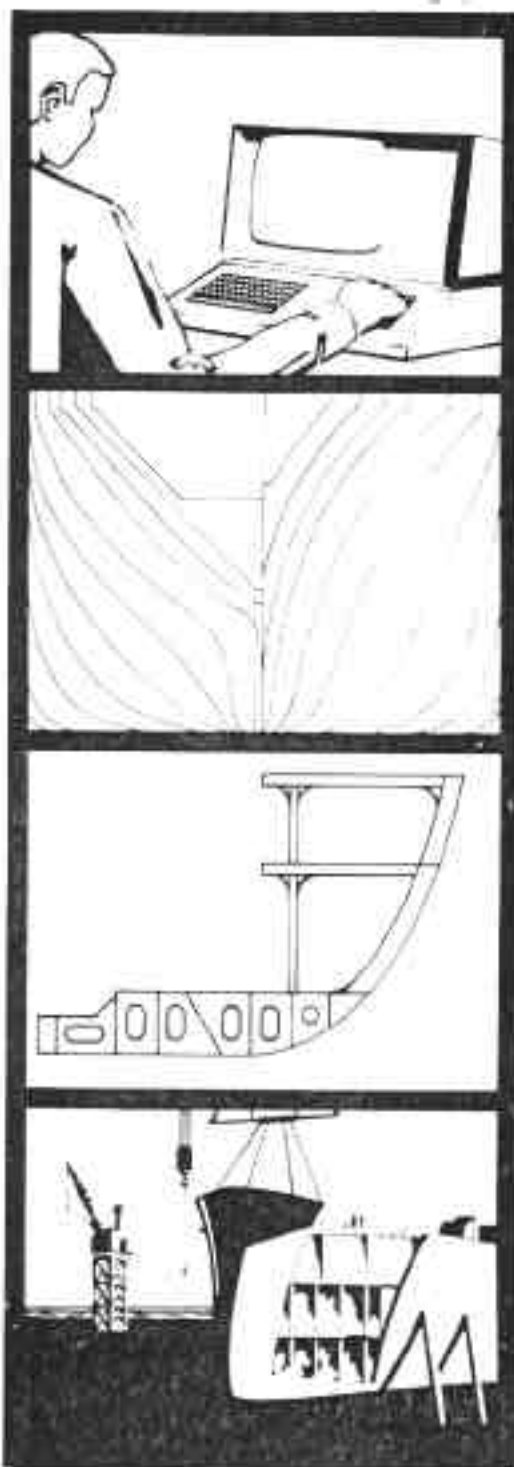

R RESEARCH
E AND
A ENGINEERING
P FOR
S AUTOMATION
 AND
 PRODUCTIVITY
 IN
 HIGHBUILDING

Proceedings of the
REAPS Technical Symposium
 September 11-13, 1979
 San Diego, California

**NETWORK SCHEDULING OF SHIPYARD PRODUCTION,
ENGINEERING AND MATERIAL PROCUREMENT**

**Marc Boucher
Director, Shipyard Planning Services
SPAR Associates Incorporated
Annapolis, Maryland**

As Director of Shipyard Planning Services, Mr. Boucher is currently responsible for production planning and control services in shipyards, as well as system development and research. For the past 7 years, he has been involved in assisting various shipyards in the United States and Canada to improve their planning techniques and cost/schedule control systems. SPAR is currently engaged in providing production scheduling services to a number of yards in support of their planning staffs.

Prior to his involvement with SPAR, Mr. Boucher studied business administration and worked in management consulting.

PERT-PAC FEATURES

- * Random network node numbering
- * Multiple starting/ending, networks
- * Sub-network, processing
- * Multiple network processing
- * Automatic network, loop detection
- * Positive or negative activity lead time
- * Automatic holiday and/or weekend schedule adjustment
- * Automatic work week or shift adjustments
- * Various activity sort list options
- * Activity schedule bar charts
- * Detailed node event schedule reports
- * Summary milestone event schedule reports
- * Critical activities analysis reports
- * Activity cataloguing to work breakdown structure, production work centers, ship zone, and/or steel unit.

PERT-PAC

SPECIAL BENEFITS


- * Direct access to WORK-PAC and performance information
- * Simultaneous processing of preliminary planning work packages with actual, detailed production work packages
- * Automatic re-scheduling of WORK-PAC options
- * Automatic network updating; manual progress assessments not required
- * Automated in-progress work adjustments
- * Automated completed work adjustments
- * Automated lead time adjustments
- * Management visibility through schedule summary reports

Milestone Report


Critical Activity Report

- * Schedule variance reporting
 - ' Automatic comparison of planned versus actual and current projected schedules
 - Total Project Slippage Report
- * Automatic impact visibility of change orders and design changes

FIGURE 5
PERT-PAC SLIPPAGE ADJUSTMENTS
SAMPLE 27 ACTIVITY NETWORK

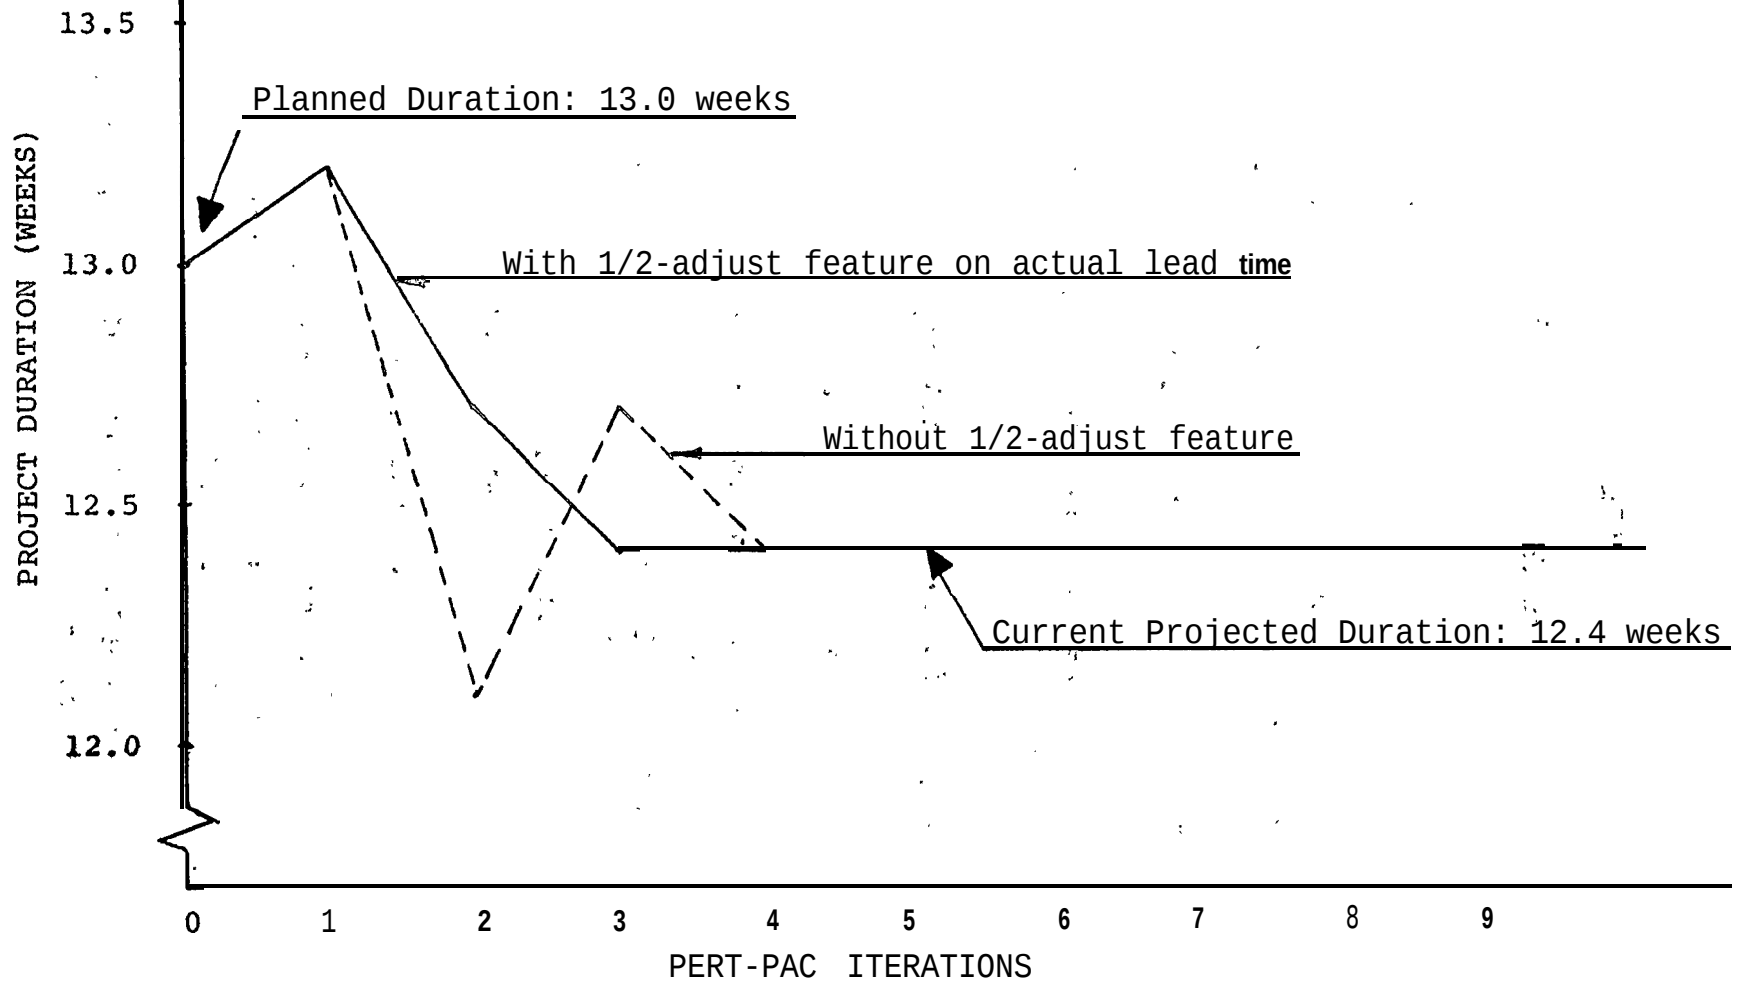

AUTOMATED ADJUSTMENTS

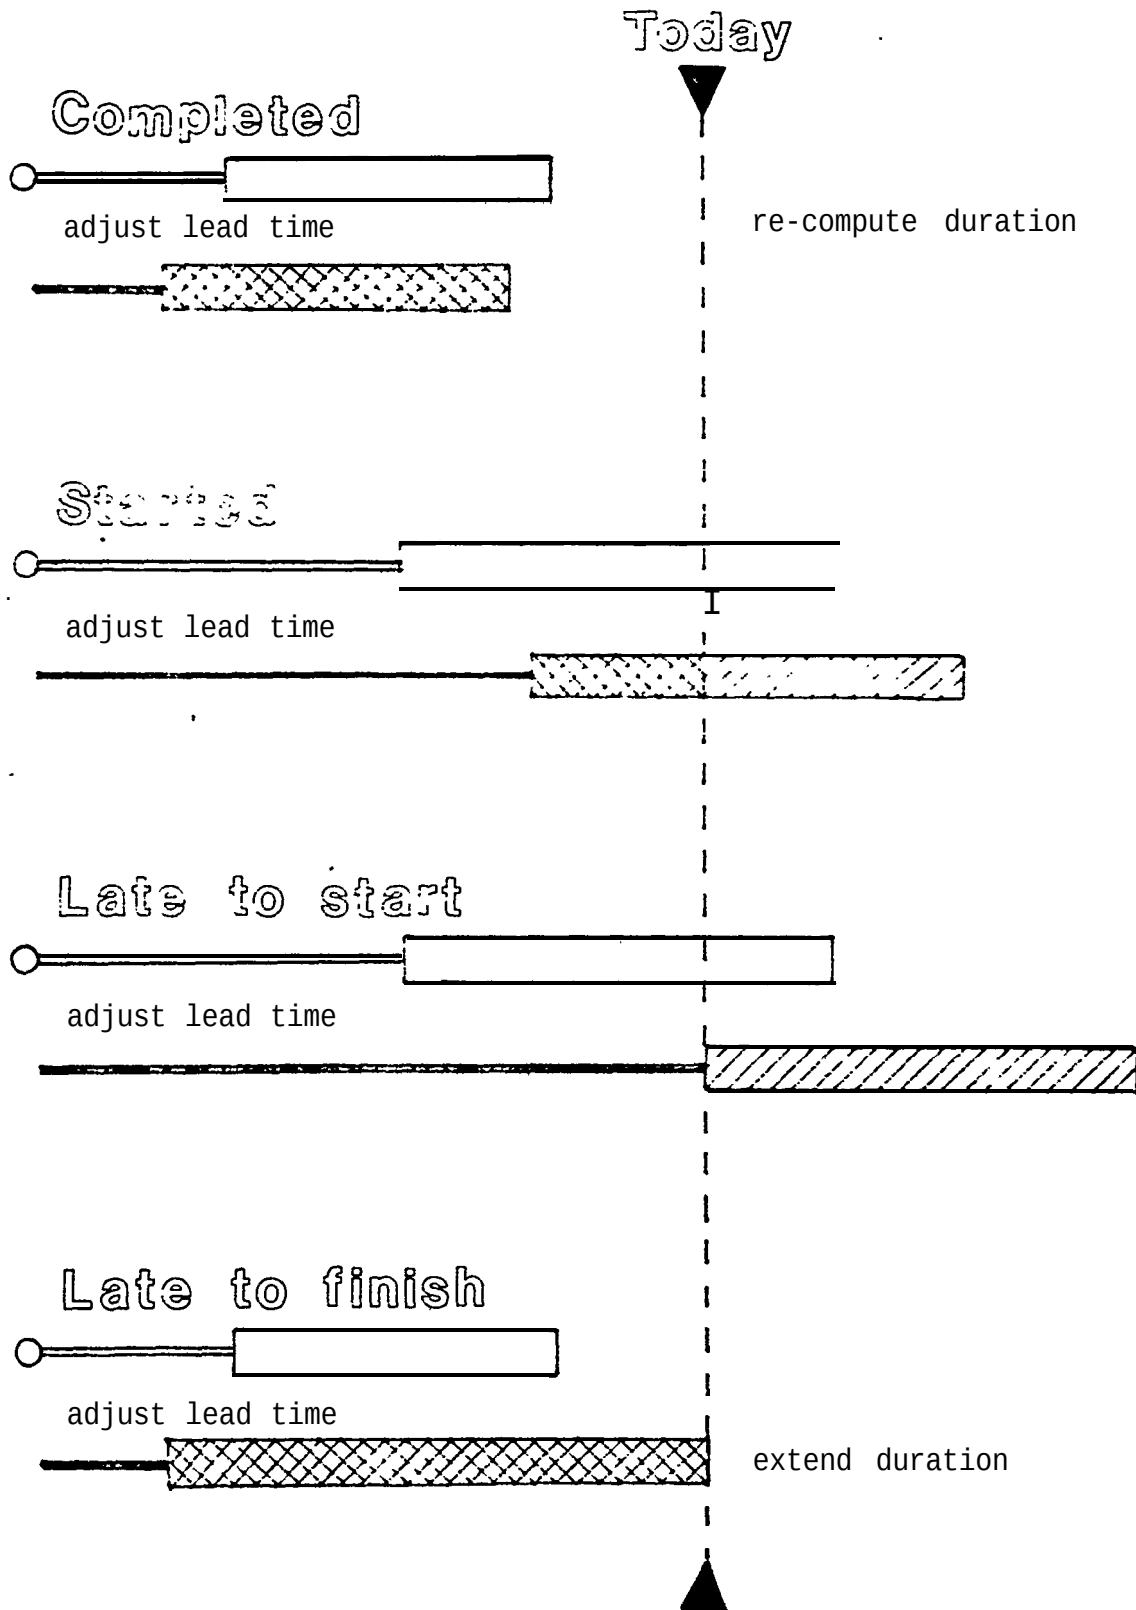

PERT-PAC CRITICAL ACTIVITY ANALYSIS

2/ 1/0

PAGE 1

HULL W/C	PRG		PLANNED			CURRENT		WKS	DELAY
			START	FINISH		START	FINISH	STAKT	FINISH
1980.	0.	300.	REMOVE REFRACTIMATRL	1/ 5/0	1/15/0 C	1/ 3/0	1/14/0	-0.3	-0.1
1980.	0.	300.	REMOVE AIR REGISTERS	1/ 1/0	1/ 4/0 C	1/ 5/0	1/ 7/0	0.6	0.4
1980.	30.	400.	INITIAL HYDRO TEST	1/ 1/0	1/ 5/0 C	1/ 2/0	1/ 7/0	C.1	0.3
1980.	0.	1300.	REPAIR INNER CASING	1/15/0	3/ 7/0 S	1/11/0	3/ 3/0	-0.6	-0.6
1980.	0.	2300.	CHEM CLEAN TURBINE	3/ 7/0	3/11/0	3/ 3/0	3/ 7/0	-0.6	-0.6
1980.	0.	2400.	PRELIM HYDRO TEST	3/11/0	3/19/0	3/ 7/0	3/15/0	-0.6	-0.6
1980.	0.	2600.	INSTALL DRUM INTRNLS	3/19/0	3/28/0	3/15/0	3/24/0	-0.6	-0.6
1980.	0.	2700.	FINAL HYDRO TEST	3/28/0	4/ 1/0	3/24/0	3/27/0	-0.6	-0.7
1980.	0.	2800.	INSTL PLASTIC REFPAC	4/ 1/0	4/ 1/0	3/27/0	3/28/0	-0.7	-0.6
1980.	0.	1100.	EXPLORATORY BLOCK	1/15/0	1/30/0 S	1/15/0	2/ 1/0	0.0	0.3
1980.	0.	1700.	R-R SPR HT TUBES	1/30/0	3/ 1/0	2/ 2/0	3/ 2/0	0.4	0.1
1980.	0.	2100.	REPAIR OUTER CASING	3/ 7/0	4/ 1/0	3/ 3/0	3/27/0	-0.6	-0.7
1980.	0.	500.	REPAIR BILGE CASING	1/16/0	2/22/0 S	1/17/0	2/22/0	0.1	0.0
1980.	0.	200.	REMOVE BILGE CASING	1/ 1/0	1/16/0 C	1/ 3/0	1/17/0	0.3	0.1
1980.	0.	1200.	FINISH REPAIR CASING	2/22/0	3/25/0	2/22/0	3/26/0	0.0	0.1
1980.	0.	900.	REMOVE DRUM INTRNLS	1/ 5/0	1/ 8/0 C	1/ 3/0	1/ 9/0	-0.3	0.1
1980.	0.	2200.	RE-BRICK	3/ 7/0	3/17/0	3/ 3/0	3/13/0	-0.6	-0.6
1980.	0.	2500.	INSTALL AIR REGISTRS	3/17/0	3/25/0	3/13/0	3/21/0	-0.6	-0.6
1980.	0.	1800.	R-R SUPPORT TUBES	1/30/0	3/ 1/0 S	1/27/0	2/25/0	-0.4	-0.6
1980.	0.	1000.	REPAIR SLIDING SEAT	1/23/0	2/22/0 S	1/20/0	2/18/0	0.4	-0.6
1980.	0.	600.	INSPECT SLIDING SEAT	1/16/0	1/23/0 S	1/17/0	2/ 1/0	0.1	1.3 *

CURRENT SCHEDULE SLIPPAGES HAVE CAUSED NETWORK TO SLIP -0.57 WORK WEEKS = -2.8 WORK DAYS

TOTAL DURATION 1/ 1/0 THRU 3/28/0

12.43 WORK WEEKS =

62.14 WORK DAYS)

FIGURE 8: PERT-PAC Critical Activity Analysis

MANPOWER PLANNING & CONTROL

From scheduled work packages, WORK-PAC develops

- * Planned manpower
- * Actual manpower expended to-date
- * Projected manpower using production performance data

Special options include:

- * Monthly averaging
- * Trade breakdown detail
- * Manpower Levelling
- * Automatic generation of manhour "S" curve:
 - : planned
 - : actual
 - : projected

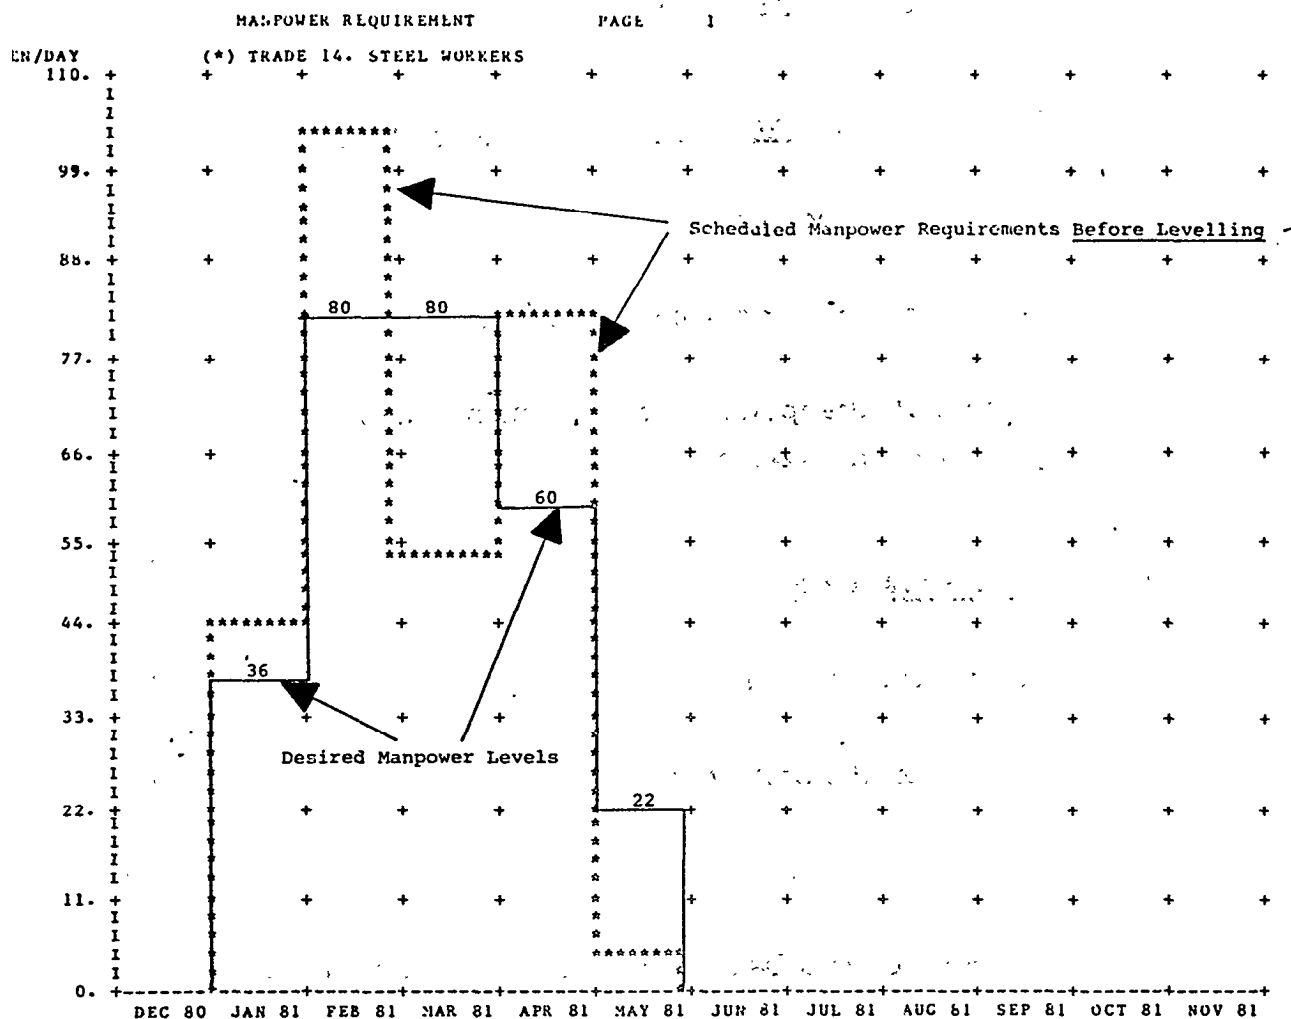


FIGURE 5c: Computer Generated (PERT-PAC) Manloading With Desired Manload Levels Superimposed

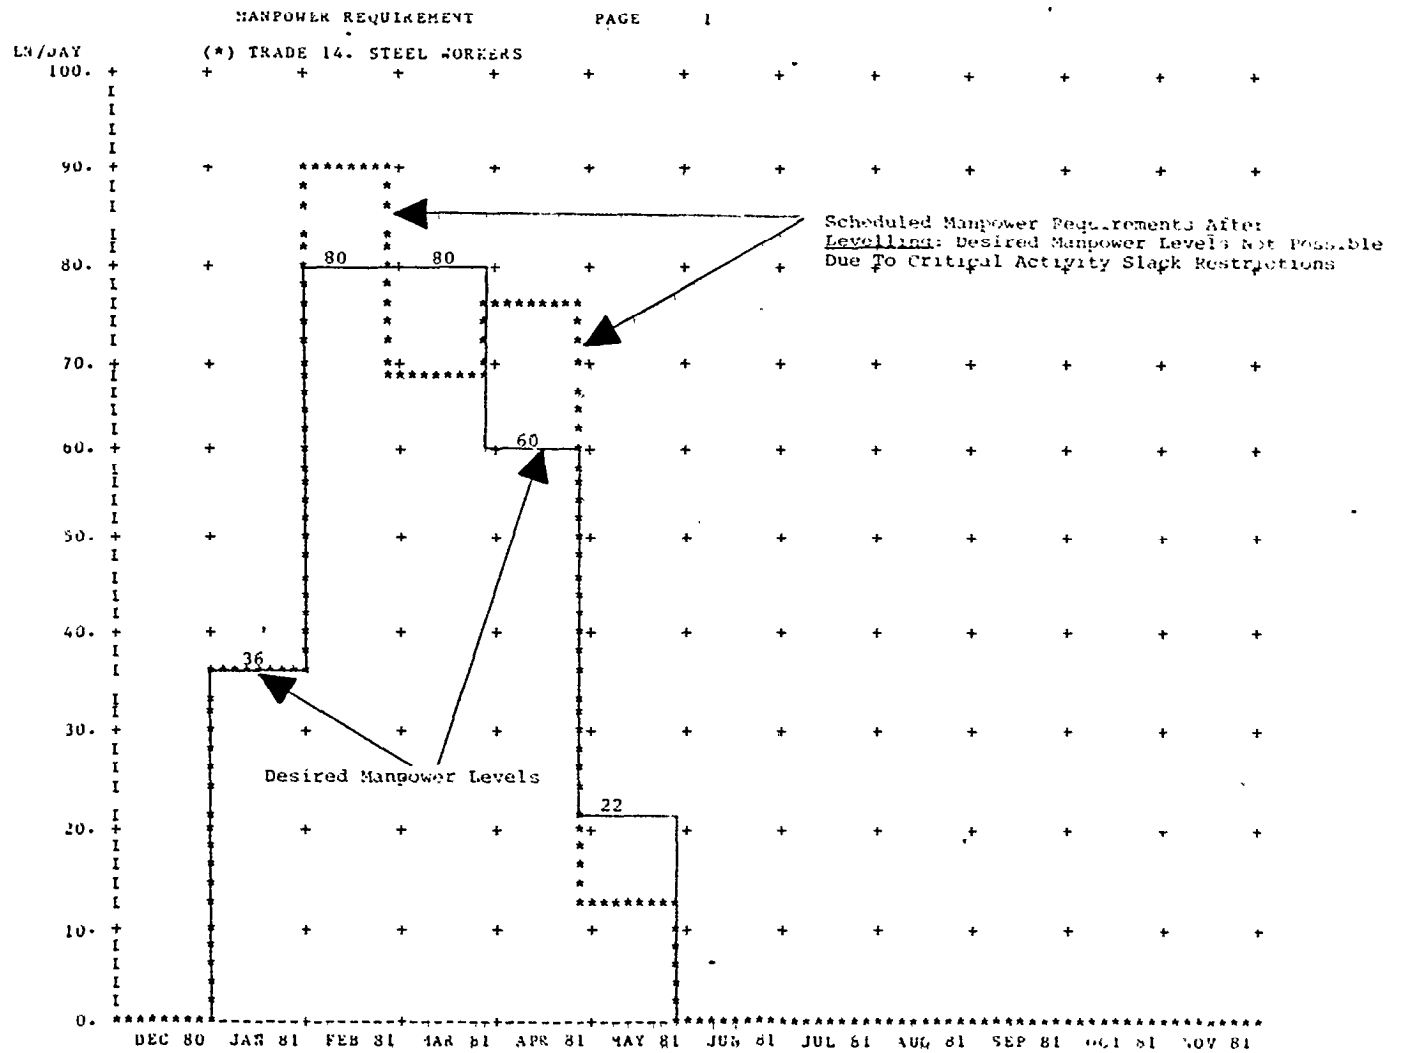


FIGURE 5d: Computer Generated (PERT-PAC) Levelling Of Manload Within Constraints Of Critical Delivery Schedules

MICRONETS

Pre-developed sub-networks:

- * Can be used for any number of projects
- * Can be used as often as needed within a given project
- * Can be linked to other micronets

major Benefits:

- * Increased Confidence in Network By Production and Management
- * Reduced Network Development, Efforts
- * Reduced Data Errors
- * Reduced Opportunities To Neglect Important Activities

Disciplined & Orderly Network Logic:


- * 'Improved Visibility Even With More Detail
- * Easier Networks To Modify'

Special Feature

- * Automated Activity Numbering
- * Automated Node Numbering
- * Automated Activity Budget Computations
- * Automated Activity Duration Computations

MICRO-NET

PROJECT NETWORK

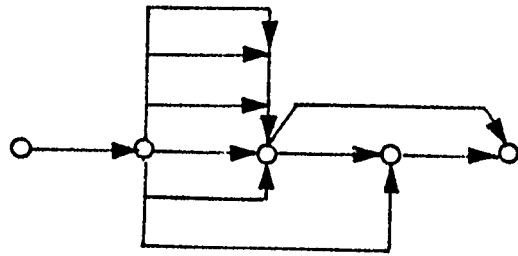

Cloned & Modified
Micro-net



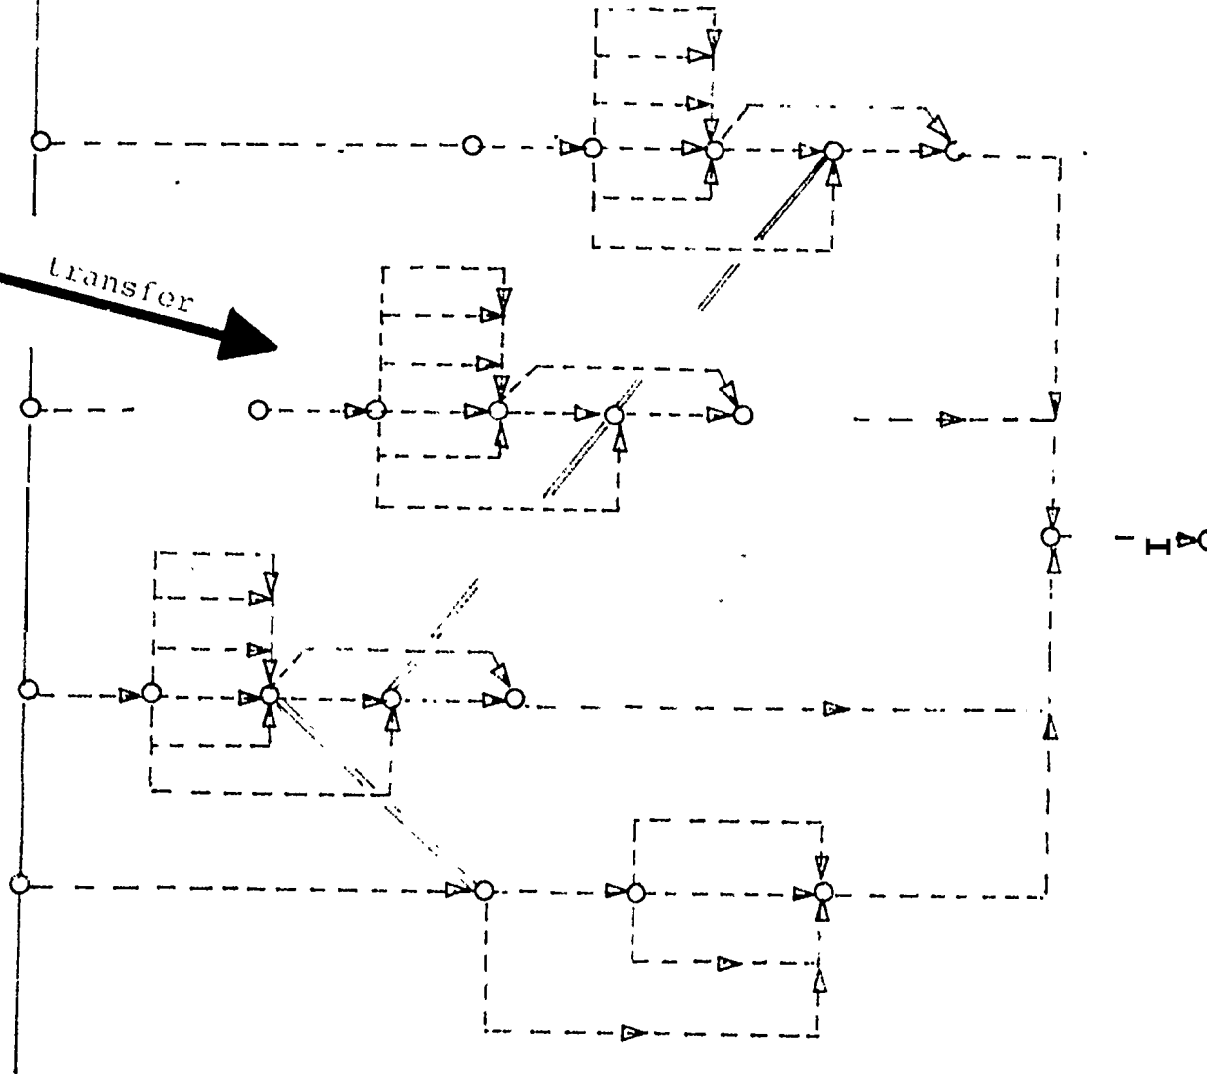


Figure 1: Transfer of micro-net from library to project network

PROPELLER, STERN TUBE, SHAFTING & GEAR BOX

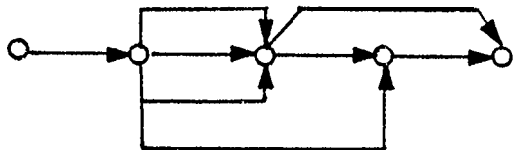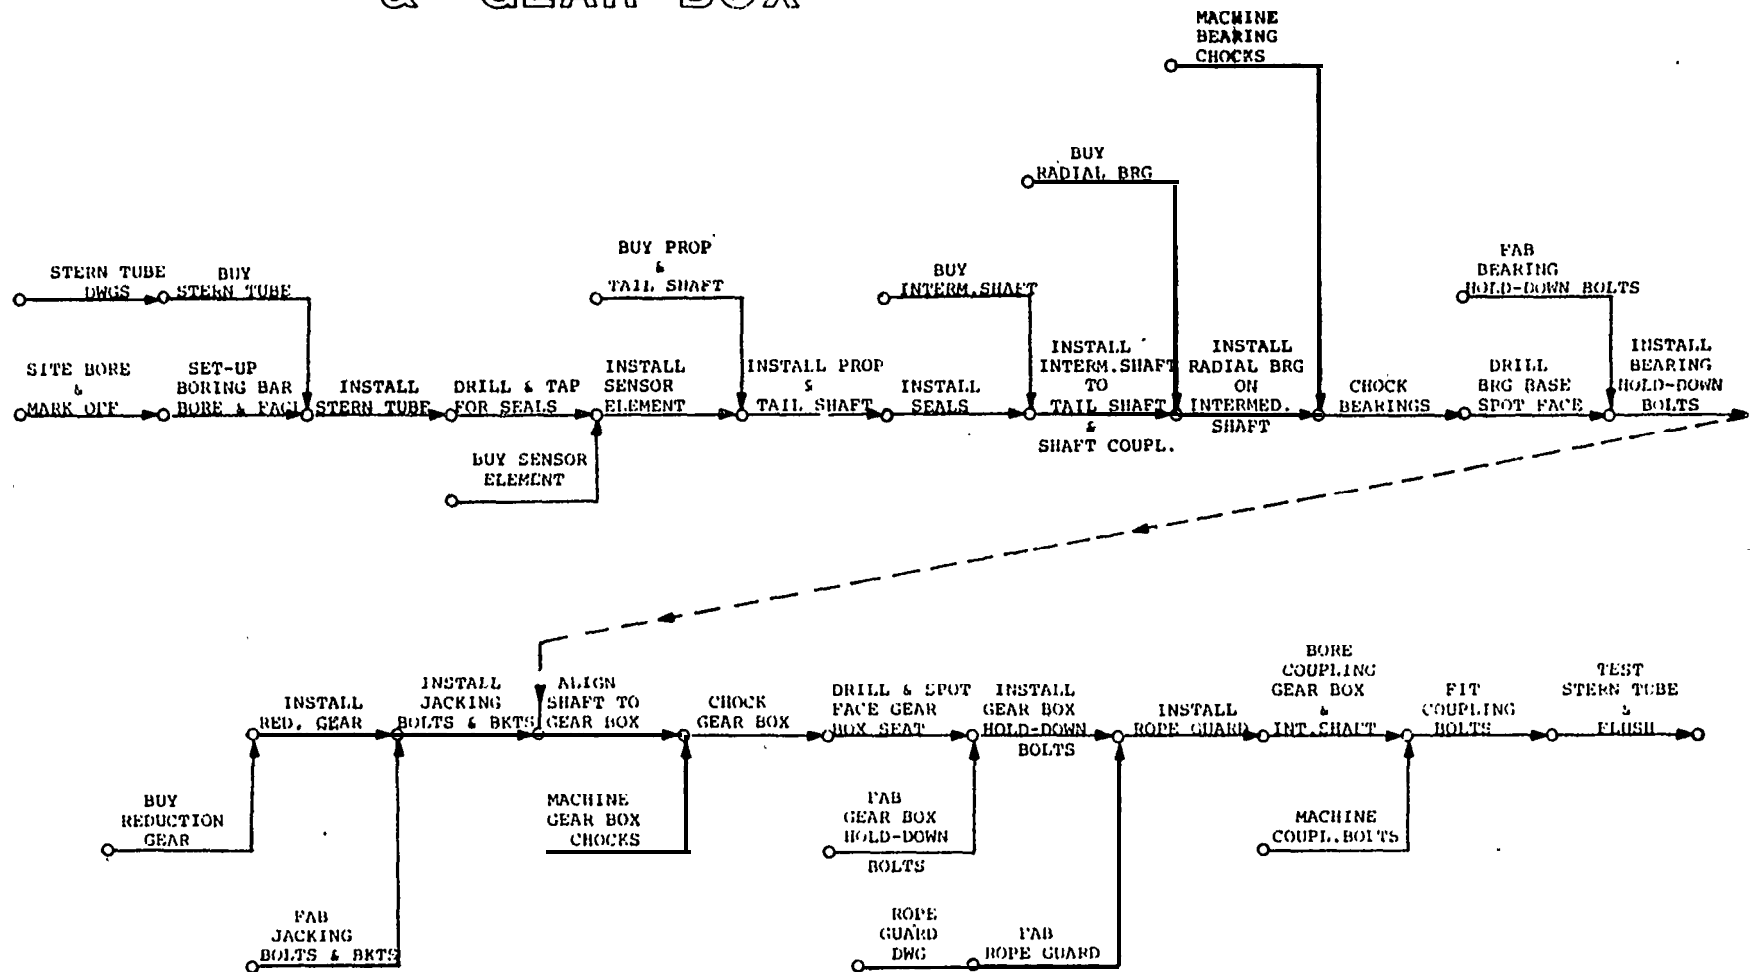

SPAR ASSOCIATES INC

Additional copies of this report can be obtained from the
National Shipbuilding Research and Documentation Center:

<http://www.nsnet.com/docctr/>

Documentation Center
The University of Michigan
Transportation Research Institute
Marine Systems Division
2901 Baxter Road
Ann Arbor, MI 48109-2150

Phone: 734-763-2465
Fax: 734-763-4862
E-mail: Doc.Center@umich.edu