



National Defense Center for
Energy and Environment

Photovoltaic (PV) Power Systems for Enhancing Energy Security

Clark Boriack, NDCEE/CTC
E2S2, New Orleans
May 24, 2012



DoD Executive Agent

Office of the
Assistant Secretary
of the Army for
Installations, Energy
and Environment

The NDCEE is operated by **CTC**  *Concurrent
Technologies
Corporation*

Technology Transition – Supporting DoD Readiness, Sustainability, and the Warfighter

Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE 24 MAY 2012		2. REPORT TYPE		3. DATES COVERED 00-00-2012 to 00-00-2012	
4. TITLE AND SUBTITLE Photovoltaic (PV) Power Systems for Enhancing Energy Security				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) National Defense Center for Energy and Environment (NDCEE), Concurrent Technologies Corporation, 100 CTC Drive, Johnstown, PA, 15904				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited					
13. SUPPLEMENTARY NOTES Presented at the NDIA Environment, Energy Security & Sustainability (E2S2) Symposium & Exhibition held 21-24 May 2012 in New Orleans, LA. U.S. Government or Federal Rights License					
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT Same as Report (SAR)	18. NUMBER OF PAGES 23	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

Outline

- Demonstration Overview
 - Camp Katuu Site Review
 - Camp Katuu Demonstration Goals
- Development and Design Considerations
 - PV Layout Development
 - Component Selection
 - Operating Modes
 - Operating Environment
 - Availability
- System Options
 - Palau PV System Results
 - Alternative Systems to Enhance Energy Security

Site Review



- Camp Katuu, located near Koror, Palau; latitude of 7° 30' North
- Remote location
 - Fragile local electrical utility powered by diesel generation
 - High electricity costs
- Corrosive environment
- Abundant sunshine

Demonstration Goals

- Camp Katuu Installation
 - Increase civil outreach and nation building with Palau Government
 - Reduce environmental footprint at Camp Katuu
 - Increase use of alternative energy
 - Demonstrate the feasibility of using alternative energy in the region
 - Quantify PV system performance/capability
 - Train 249th Engineer Battalion to install photovoltaic systems
 - Train Palau Civic Action Team to operate and maintain system
 - Validate camp electrical costs reduction
- Future Installations
 - Leverage design aspects for other remote installations (grid frequency and voltage regulation, corrosion, high electricity costs)
 - Next generation to include off-grid operation capability with energy storage

PV Layout Development





- Sustainability Considerations
 - Safety, maintenance, and reliability
 - Access ways for installation, maintenance, repair
- Performance
 - Simple, intuitive, and robust installation
 - Reliability and electrical costs reduction
 - Roof mounting maximizes capability given limited camp footprint



Camp Katuu Builder's Shop – PV Array Installation Location

PV Layout Development (cont.)

- PV System Layout Options Considered

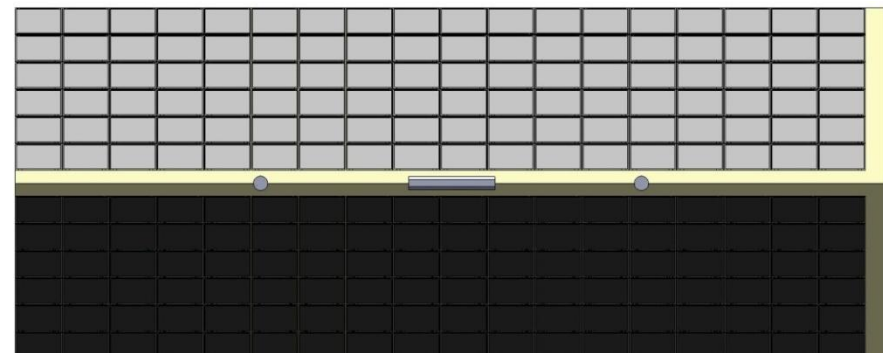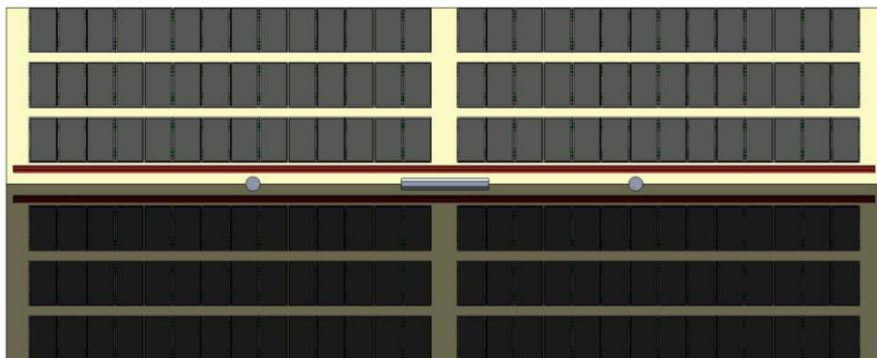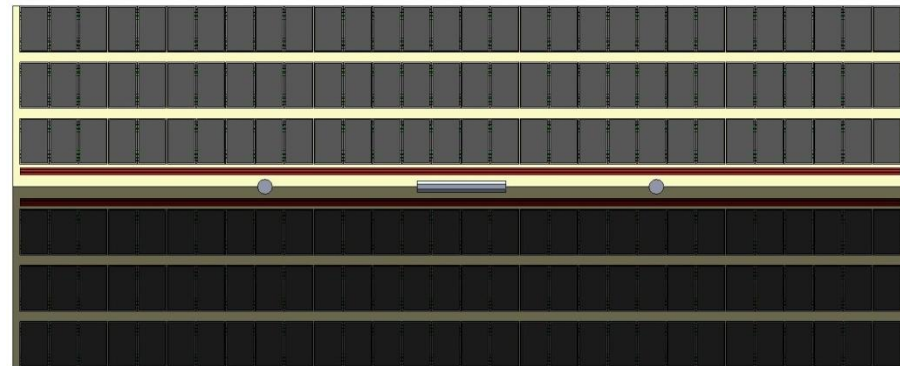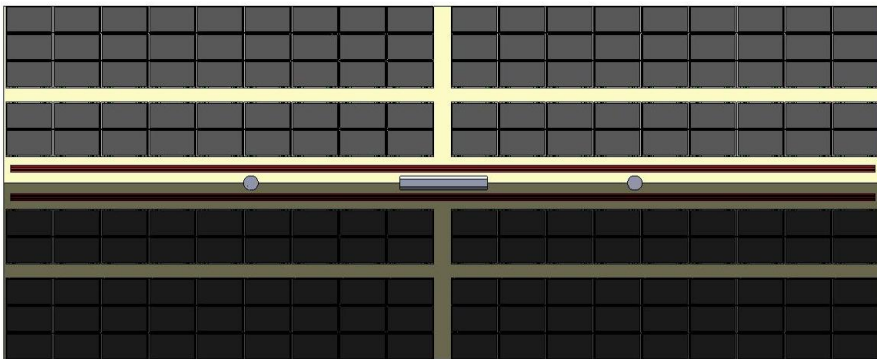

PV Layout Development (cont.)

- PV System Layout Considerations and Comparisons

PV LAYOUT OPTION SUMMARY					
No.	Consideration	Option 1	Option 2	Option 3	Option 4
		5 Horizontal Rows	3 Vertical Rows	3 Vertical Rows with Center Walkway	6 Vertical Rows
1	Amount of rail mounting (lf)	1440'	1800'	1800'	1440'
2	Ease of rail installation	some rail cutting required to clear walkway	requires two level rail mounting system	requires two level rail mounting system	no rail cutting required
3	Ease of wiring	Intuitive circuit pattern	Very Intuitive circuit pattern	Very Intuitive circuit pattern	odd circuit pattern
4	Maintenance access	21" horizontal & vertical walkway, does not have direct access to all panels	Accessible with 15" walkways	Direct access to each panel and has a center walkway	No direct access to most panels
5	System DC Rating (kW DC) [1]	42.300	42.300	39.480	50.760
6	System AC rating (kW AC) [2]	32.571	32.571	30.400	39.085
7	Fall Protection System	accommodates rail system	accommodates rail system	accommodates rail system	does not accommodate rail system
8					

Color Legend

most favorable

more favorable


least favorable

Note [1] System DC Rating based upon use of 235W solar panels

Note [2] System AC Rating based upon typical .77 conversion factor from DC power to AC power

PV Layout Selected – Option 1

- Easiest to Implement and Sustain
 - Safety rails
 - Access ways (beginning to be required)
 - Intuitive circuitry/wiring
- Performance
 - Met power requirements

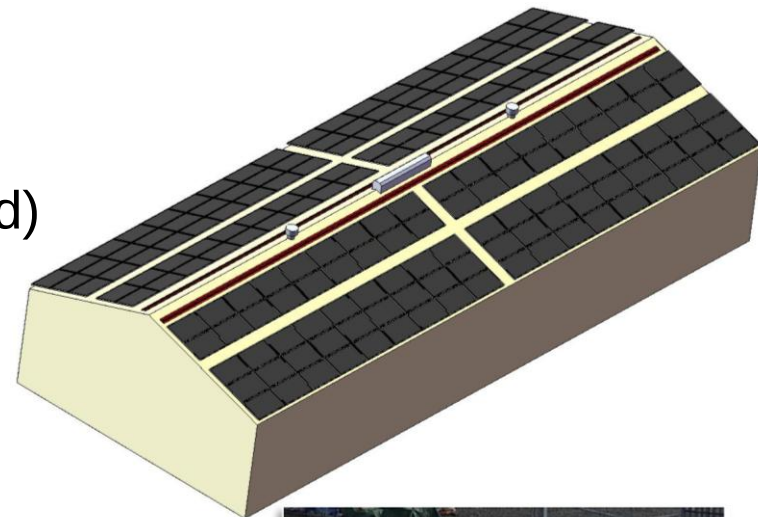

OPTION 1 CONSIDERATIONS

No.	Consideration	Impact
1	Amount of rail mounting (lf)	1440'
2	Ease of rail installation	some rail cutting required to clear walkway
3	Ease of wiring	Intuitive circuit pattern
4	Maintenance access	21" horizontal & vertical walkway, does not have direct access to all panels
5	System DC Rating (kW DC) [1]	41.400
6	System AC rating (kW AC) [2]	31.878
7	Fall Protection System	accommodates rail system

Color Legend

most favorable
 more favorable
 least favorable



Figure 7: Rail Type Fall Protection System

Component Selection

PV Module



Canadian Solar

CS6P

220/225/230/235/240/245/250P



Key Features

- Top ranked PVUSA (PTC) rating in California for higher energy production
- 6 years product warranty (materials and workmanship); 25 years module power output warranty
- Industry leading plus only power tolerance: +5W (+2%)
- Strong framed module, passing mechanical load test of 5400Pa to withstand heavier snow load
- Ultra reliable in corrosive atmosphere, verified by IEC61701 "Salt Mist Corrosion Testing"
- The 1st manufacturer in the PV industry certified for ISO:TS16949 (The automotive quality management system) in module production since 2003
- ISO17025 qualified manufacturer owned testing lab, fully complying to IEC, TUV, UL testing standards

On-grid Module

CS6P is a robust solar module with 60 solar cells. These modules can be used for on-grid solar applications. Our meticulous design and production techniques ensure a high-yield, long-term performance for every module produced. Our rigorous quality control and in-house testing facilities guarantee Canadian Solar's modules meet the highest quality standards possible.

Applications

- On-grid residential roof-tops
- On-grid commercial/industrial roof-tops
- Solar power stations
- Other on-grid applications

Quality Certificates

- IEC 61215, IEC 61730, IEC 61701, UL 1703, CEC Listed, CE, KEMCO and MCS
- ISO9001: 2008: Standards for quality management systems
- ISO/TS16949:2009: The automotive quality management system
- QC080000 HSPM: The Certification for Hazardous Substances Regulations

- Best value (\$/watt)
- Tested for corrosion
- Stock item
- **Common Attributes!!**

PV Module Specifications	Canadian Solar
Mechanical Attributes	CS6P-235P
Length(in)	64.5
Width (in)	38.7
Thickness (in)	1.57
Weight (lbs)	44.1
Electrical Attributes [1]	
Nominal Maximum Power Output at STC (Pmax)	235 Watts
Voltage at Pmax (Vmp)	29.8 Volts
Current at Pmax (Imp)	7.9 Amps
Open Circuit Voltage (Voc)	36.9 Volts
Short Circuit Current (Isc)	8.09 Amps
[1] Standard Test Conditions for panel ratings: 1,000 Watts/M ² , AM 1.5, 25 C	

Component Selection

Inverter




- Six SMA 7000US inverters for grid-tied system
- Reliable product
- Very low maintenance
- Rated for outdoors use
- Simple, informative interface
- Integral DC disconnect
- Stock item
- Can accommodate electricity grids with poor voltage and frequency regulation

Component Compatibility

Issue – Utility upper operating frequency range exceeds inverter default settings; *nuisance trips will occur!!*

Solution – Increase inverter operating frequency range based upon electrical utility operations and input

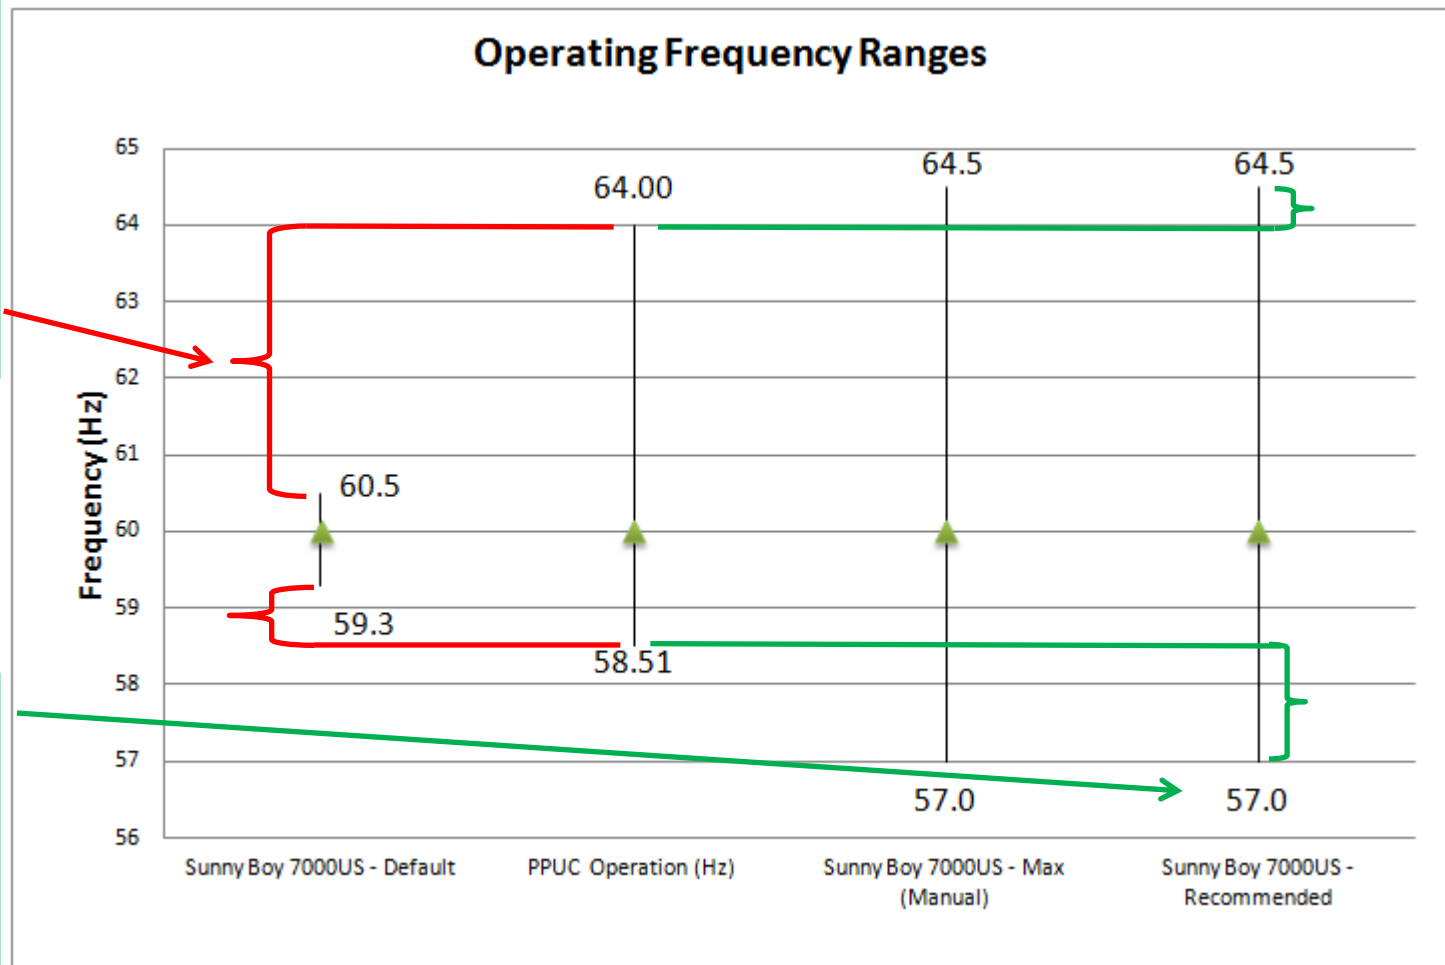

Default Frequency Operating Range is not compatible

Camp Katuu Results

- Installed by 249th Engineering Battallion (Prime Power) and Camp Katuu Civic Action Team

- *All wiring correct per installation drawings*
- *Very quick commissioning*




- System Reliability During 6 Month Sustainment Period:
 - *No failures or repairs*
 - *System automatically restarted after each grid outage*

Camp Katuu Results (cont.)


- System Performance During 6 Month Sustainment Period:
 - Electrical cost savings exceeded estimates by*
Adjusted: 17% (\$25.5k versus \$21.8k annually)
Actual: 10% (\$23.9k versus \$21.8k annually)
 - Production met expectations, given rainy season, achieving 94% of annual estimate (53.9MWh versus 57.9MWh)*

Camp Energy Consumption by Supply
8/16/2011 - 2/19/2012

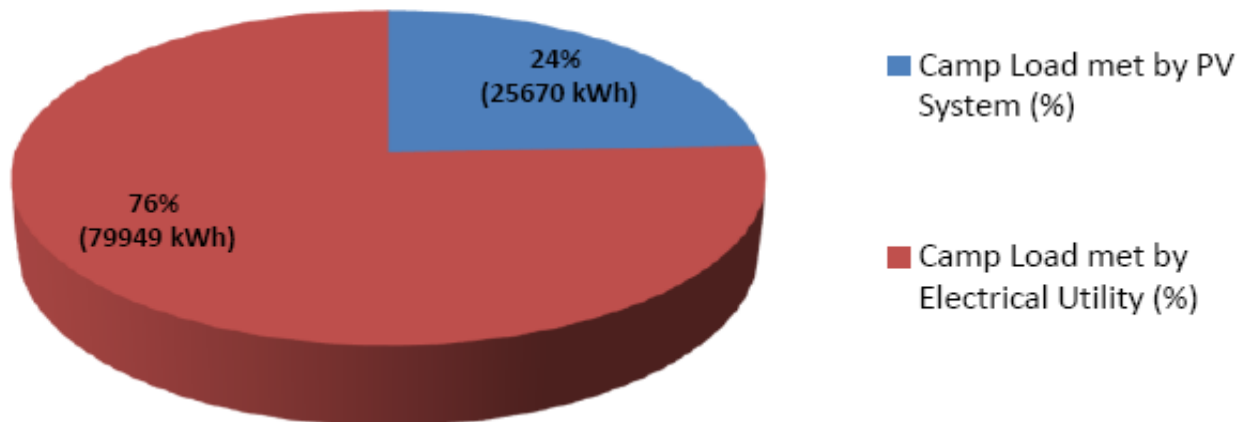


Camp Katuu Results (cont.)

- System Performance During 6 Month Sustainment Period:
 - *Energy cost estimate without PV array :* **\$49.8k**
 - *Energy cost with PV array:* **\$37.5k**
 - *Camp energy cost reduction by PV array:* **25%**

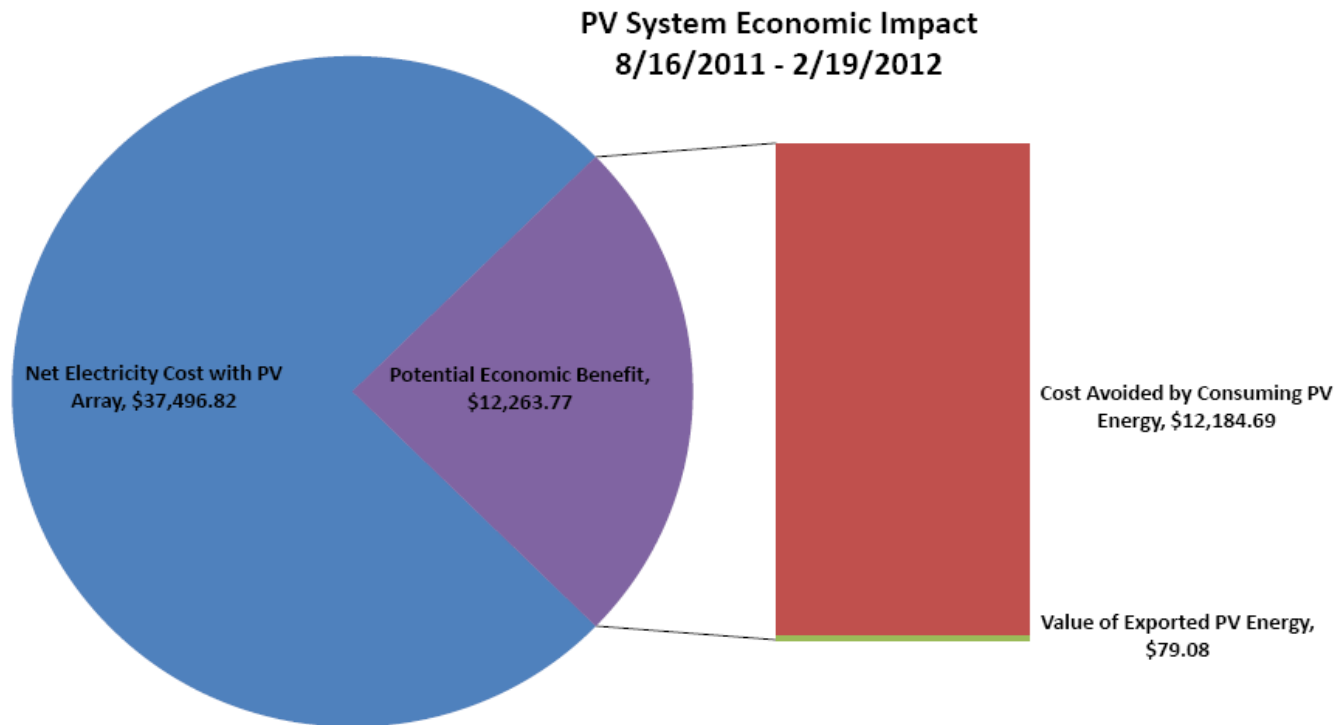

System Options

- Grid - Tied System
 - Camp Katuu System

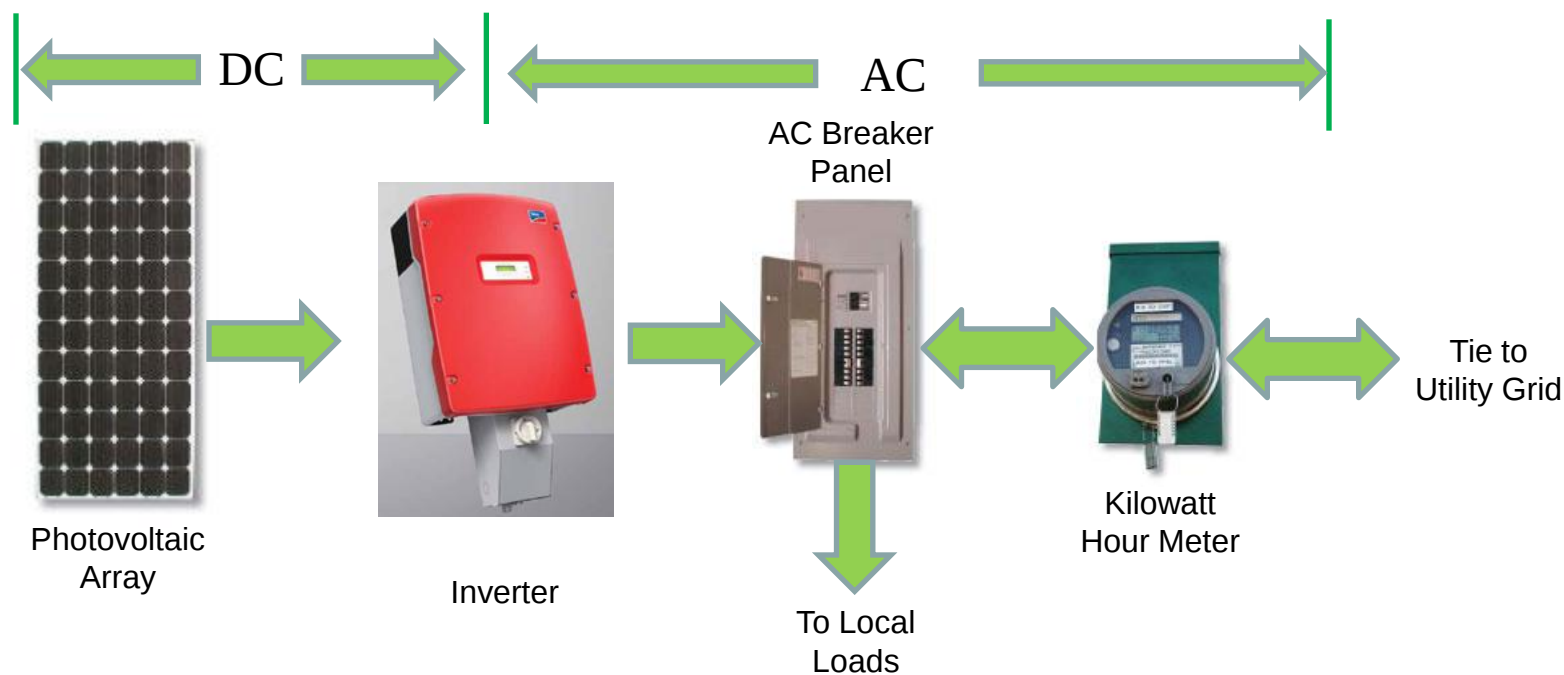


Alternative Systems to Enhance Energy Security

- Grid - Tied System
 - Key Benefits
 - Simple to install
 - Easy to maintain
 - Reduces electrical costs
 - Grid can serve as a load for exporting excess renewable energy
 - Very sustainable
 - Key Considerations
 - Requires grid to operate
 - Very few products compatible with unstable grids

SMA's Sunny Island


- Major Components:
 - Battery bank w/ monitoring
 - Sunny Island
- Can be configured to accept a generator input or utility

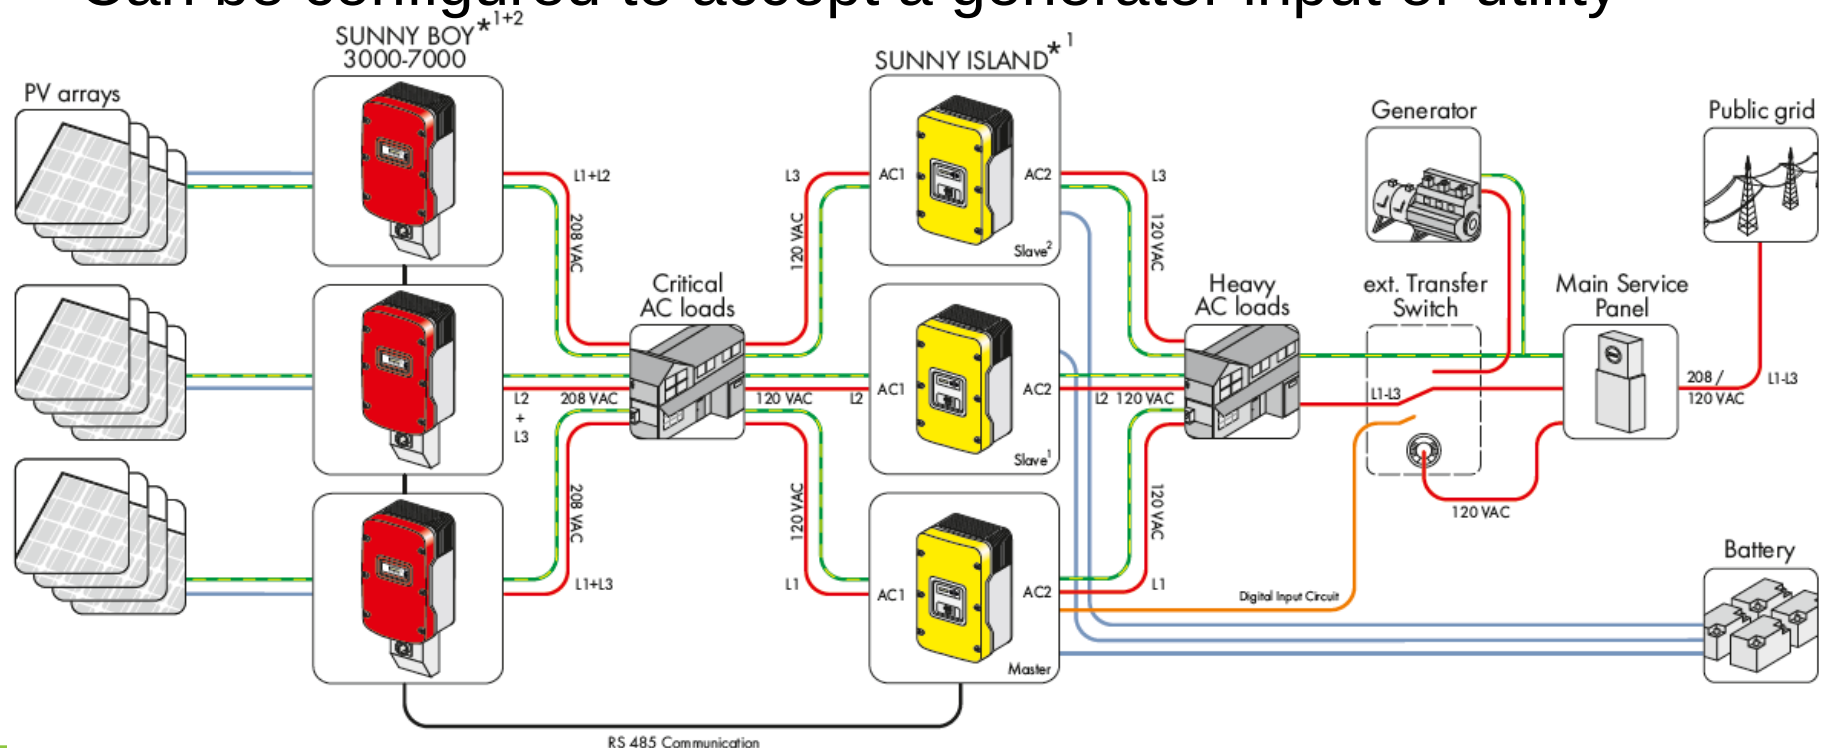

SMA's Sunny Island

- Island System - SMA
 - Leverages multiple energy sources
 - Wind, solar
 - Battery bank
 - Generator or utility
 - Key Considerations
 - Not intended for export
 - Number of components to build system
 - Desired system voltage:
 - Single phase 120/240VAC
 - Three phase 120/208, 277/480

Outback's Radian Inverter

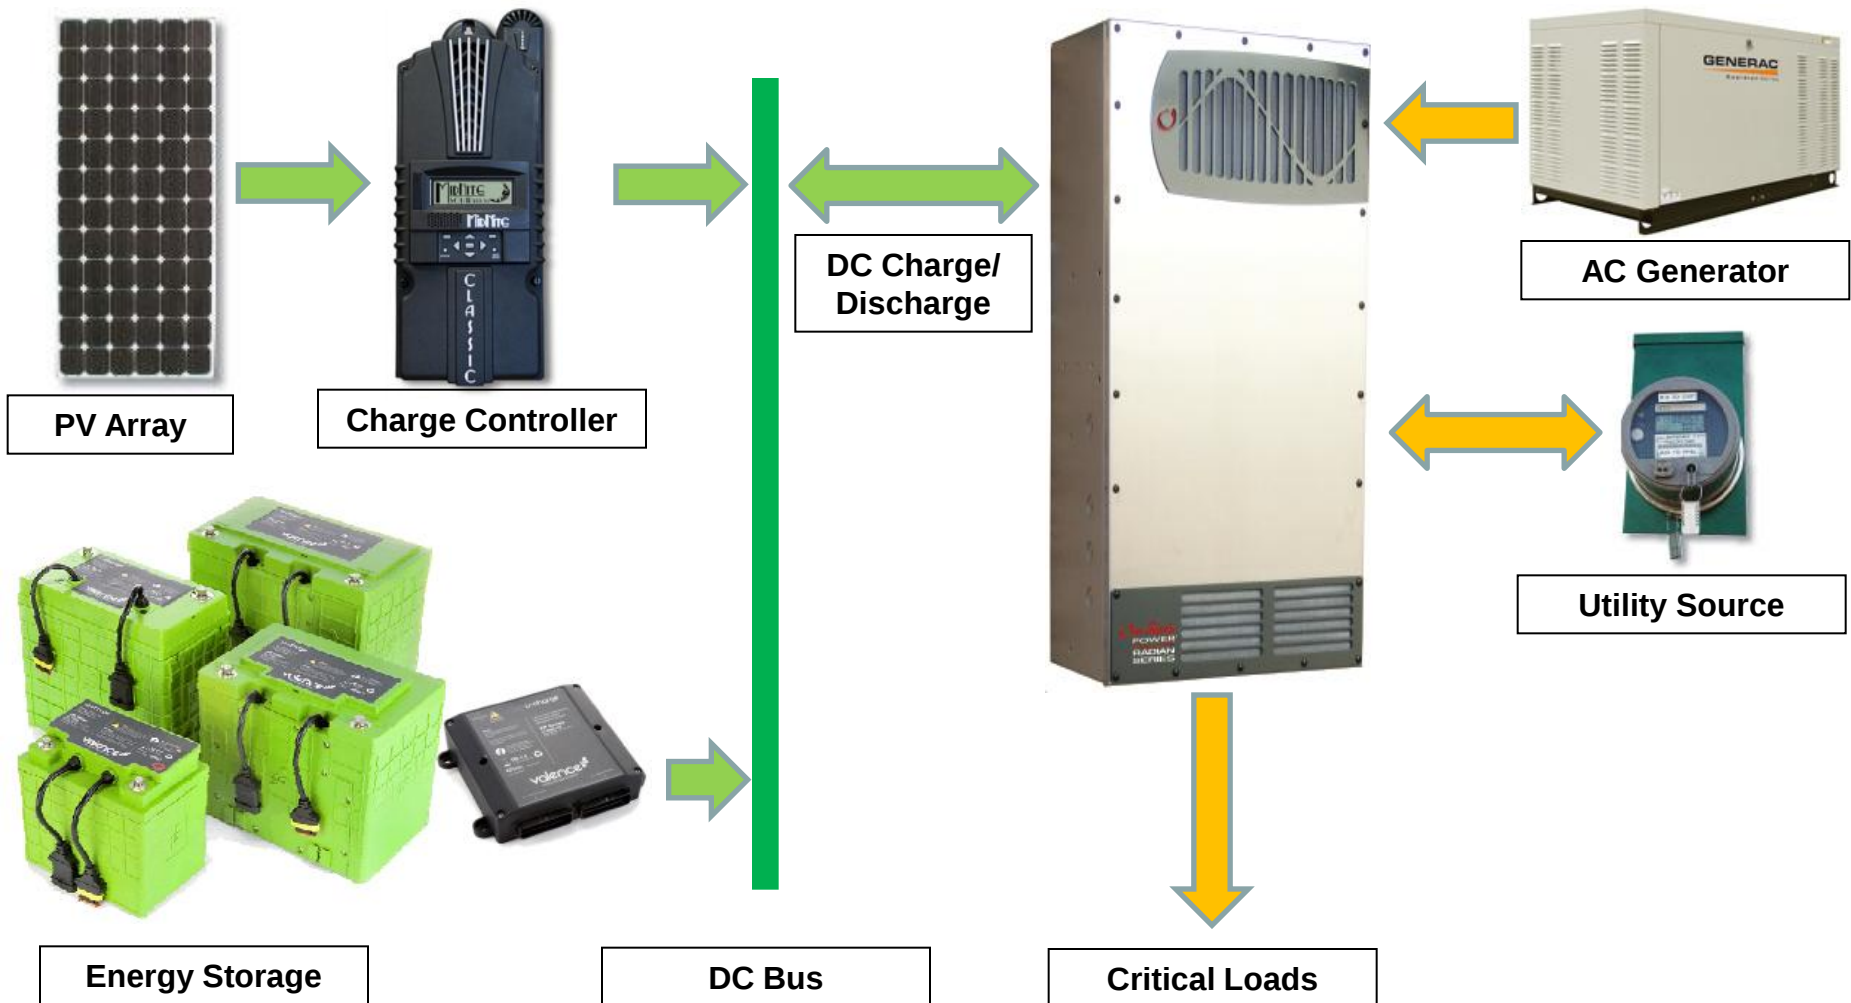

System Options

- Hybrid System - Outback
 - Leverages Multiple Energy Sources
 - Solar
 - Battery bank, bi-directional
 - Generator
 - Utility
 - Can export
 - Key Considerations
 - Must meet UL1741 for export
 - 120/240 VAC rated system

Summary

- Power Systems to Enhance Energy Security Include:
 - Grid - Tied: simple, few components, no off-grid support
 - Off - Grid: simple, more components than off-grid, requires energy storage
 - Hybrid Systems: few options, but can leverage numerous energy resources to achieve energy security



Questions?

Palau PV System Ribbon Cutting Ceremony Celebrating:
*Nation building through the successful implementation of
renewable energy systems*



Left to right: Ambassador Helen Reed-Rowe, SFC Daniel Husak, 1st Lt Melissa Jumper, LCDR Grant Watanabe, Clark Boriack (CTC Technical Lead)



National Defense Center for
Energy and Environment



DoD Executive Agent

Office of the
Assistant Secretary
of the Army for
Installations, Energy and
Environment

www.ndcee.ctc.com

Points of Contact

- **NDCEE Technical Monitor**
John Horstmann
ARCENT
Phone: (803) 885-8206
Email: john.horstmann@arcent.army.mil
- **Technical Lead**
Clark Boriack
Phone: (814) 262-2381
Email: boriackc@ctc.com
- **CTC Project Manager**
Elizabeth Keysar
Phone: (770) 631-0137
Email: keysare@ctc.com

This work was funded through the Office of the Assistant Secretary of the Army for Installations, Energy and Environment and conducted under contract W91ZLK-10-D-0005 Task 0720. The views, opinions, and/or findings contained in this paper are those of the author(s) and should not be construed as an official Department of the Army position, policy, or decision unless so designated by other official documentation.