



NDCEE

National Defense Center for Energy and Environment

Evaluation of Alternative Particle Filtration Designs to Reduce RDX Losses in Dewatering Operations

Ms. Jessica Grembi, CTC/NDCEE



DoD Executive Agent

Office of the
Assistant Secretary
of the Army
(Installations and
Environment)

The NDCEE is operated by:  *Concurrent Technologies Corporation*

Technology Transfer – Supporting DoD Readiness, Sustainability, and the Warfighter

Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE MAY 2009		2. REPORT TYPE		3. DATES COVERED 00-00-2009 to 00-00-2009	
4. TITLE AND SUBTITLE Evaluation of Alternative Particle Filtration Designs to Reduce RDX Losses in Dewatering Operations				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) National Defense Center for Energy and Environment, Concurrent Technologies Corp, 100 CTC Drive, Johnstown, PA, 15904				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited					
13. SUPPLEMENTARY NOTES Presented at the NDIA Environment, Energy Security & Sustainability (E2S2) Symposium & Exhibition held 4-7 May 2009 in Denver, CO.					
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT Same as Report (SAR)	18. NUMBER OF PAGES 22	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

Acknowledgements

- Mr. Don Yee, Program Executive Office for Ammunition (PEO Ammo)
- Mr. Gregory O'Connor, Project Manager for Joint Services (PM JS)
- Ms. Pam Wigle, Holston Army Ammunition Plant (AAP)
- Mr. Jeff Dill, BAE Systems OSI
- Mr. Bill May, BAE Systems OSI
- Mr. Bill Miller, BAE Systems OSI
- Mr. Brandon Quesinberry, BAE Systems OSI
- Mr. Roger Williams, BAE Systems OSI
- Mr. Bob Winstead, BAE Systems OSI

Holston Army Ammunition Plant (AAP) Description

- Falls under the Joint Munitions Command and is a government-owned, contractor-operated (GOCO) facility
- Manufactures a wide range of secondary detonating explosives including Royal Demolition eXplosive (RDX), High Melting eXplosive (HMX), Triaminotrinitrobenzene (TATB), Nitro Triazolene (NTO), and related formulations
- U.S. Army Production Plant for Energetic Explosive Materials



Background

- Morristown 50 miles downstream of Holston Army Ammunition Plant (AAP) uses Holston River as their drinking water source
 - Center for Health Promotion and Preventive Medicine (CHPPM) determined in 2005-2006, RDX level at Morristown meets standards of <2 parts per billion (ppb)
- New municipal drinking water intake proposed for Church Hill, 5 miles downstream of Holston AAP must meet same <2 ppb RDX limit



Problem Statement


- Motivated by the newly proposed Church Hill drinking water plant, the State of Tennessee has proposed a <12.2 pounds (lbs) RDX per day discharge permit limit for Holston AAP with a 5-year implementation schedule
- The current RDX manufacturing process sends up to 90 lbs of unrecovered (sparingly soluble) RDX per day through wastewater treatment
- **The RDX in wastewater is lost product!**

Integrated Process Team Approach


- System approach to identify problem in each phase of RDX manufacturing, including final treatment:
 - Manufacturing and Handling Operation
 - Recovery (Pollution Prevention)
 - Treatment (New Technology)
 - Integration of total operation
- Identify specific nature of the problem
- Evaluate current IWTP operations to determine efficiency of dilute dissolved RDX removal
- Evaluate manufacturing process to determine minimization of RDX entering wastewater stream
- Evaluate additional treatment options for concentrated RDX (prior to mixing with other waste streams at IWTP)

Project Focus Area: RDX Manufacturing

Multi-Prong Approach of IPT (in GREEN)

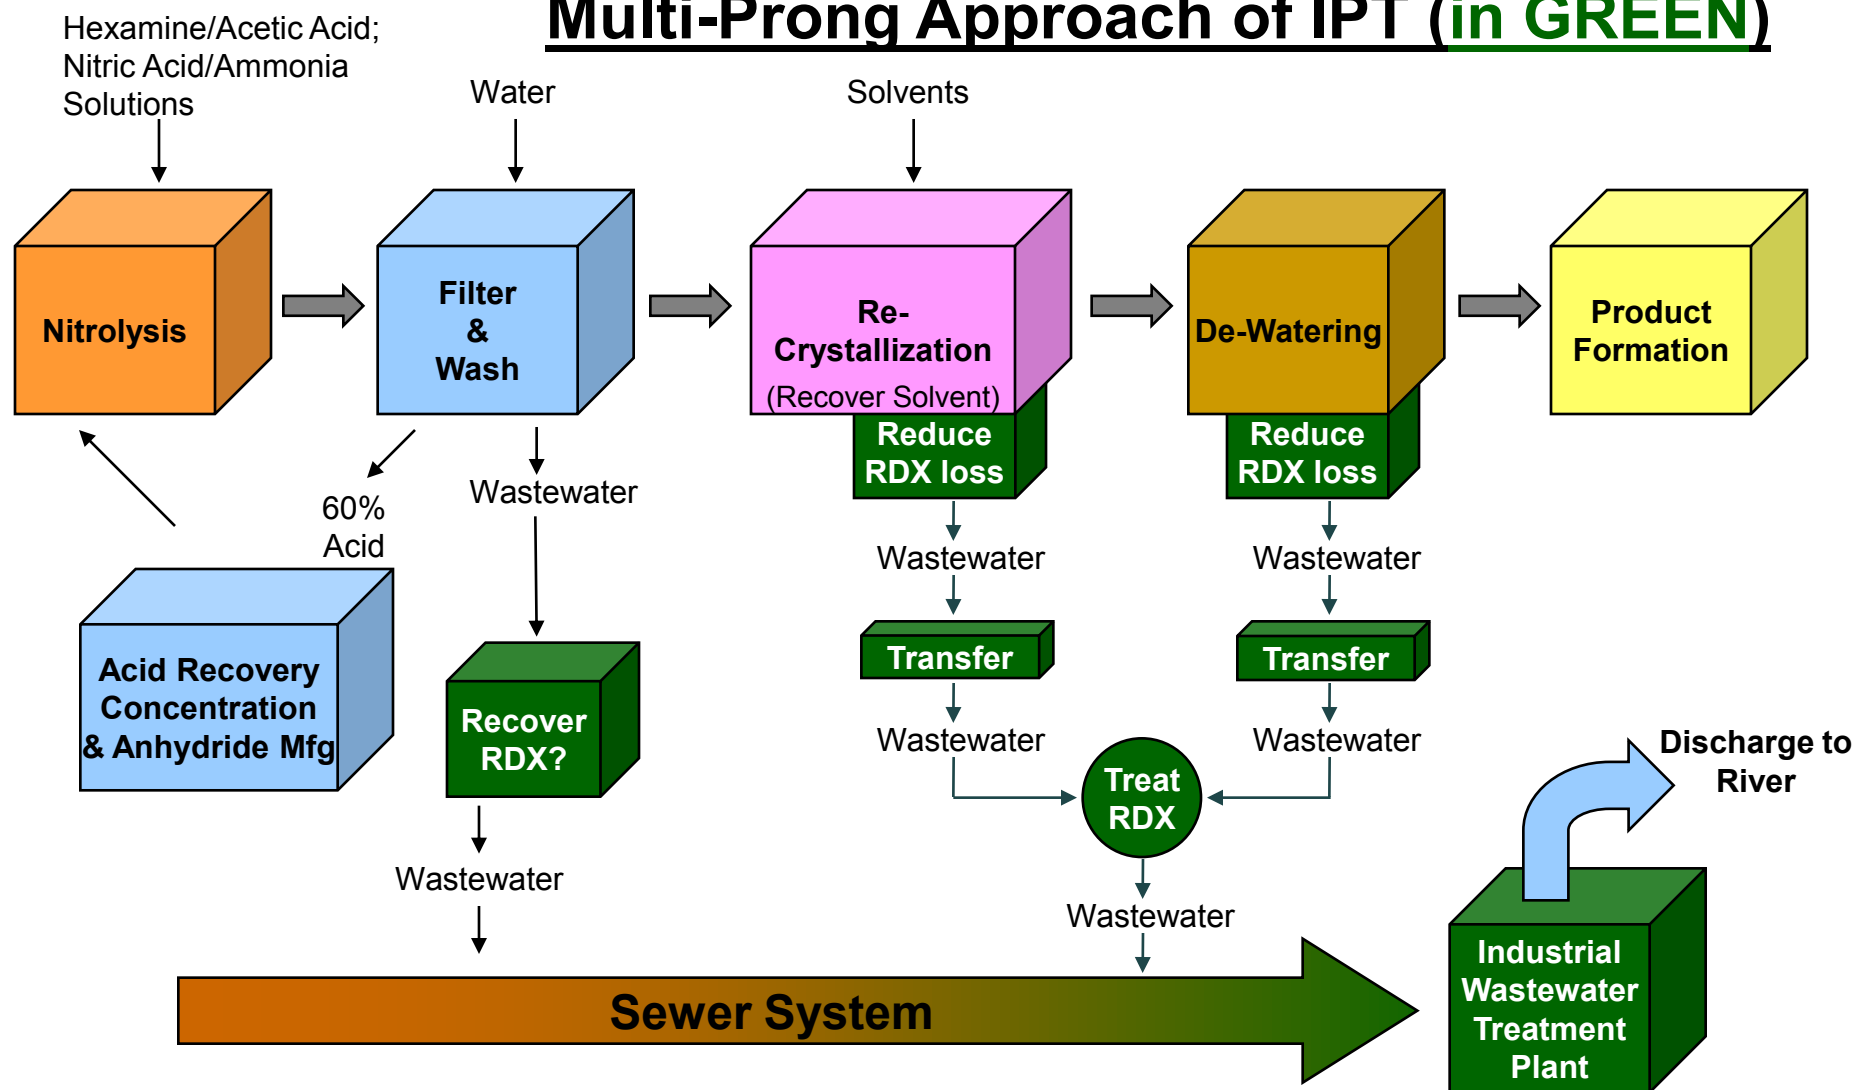

Integrated Process Team Members

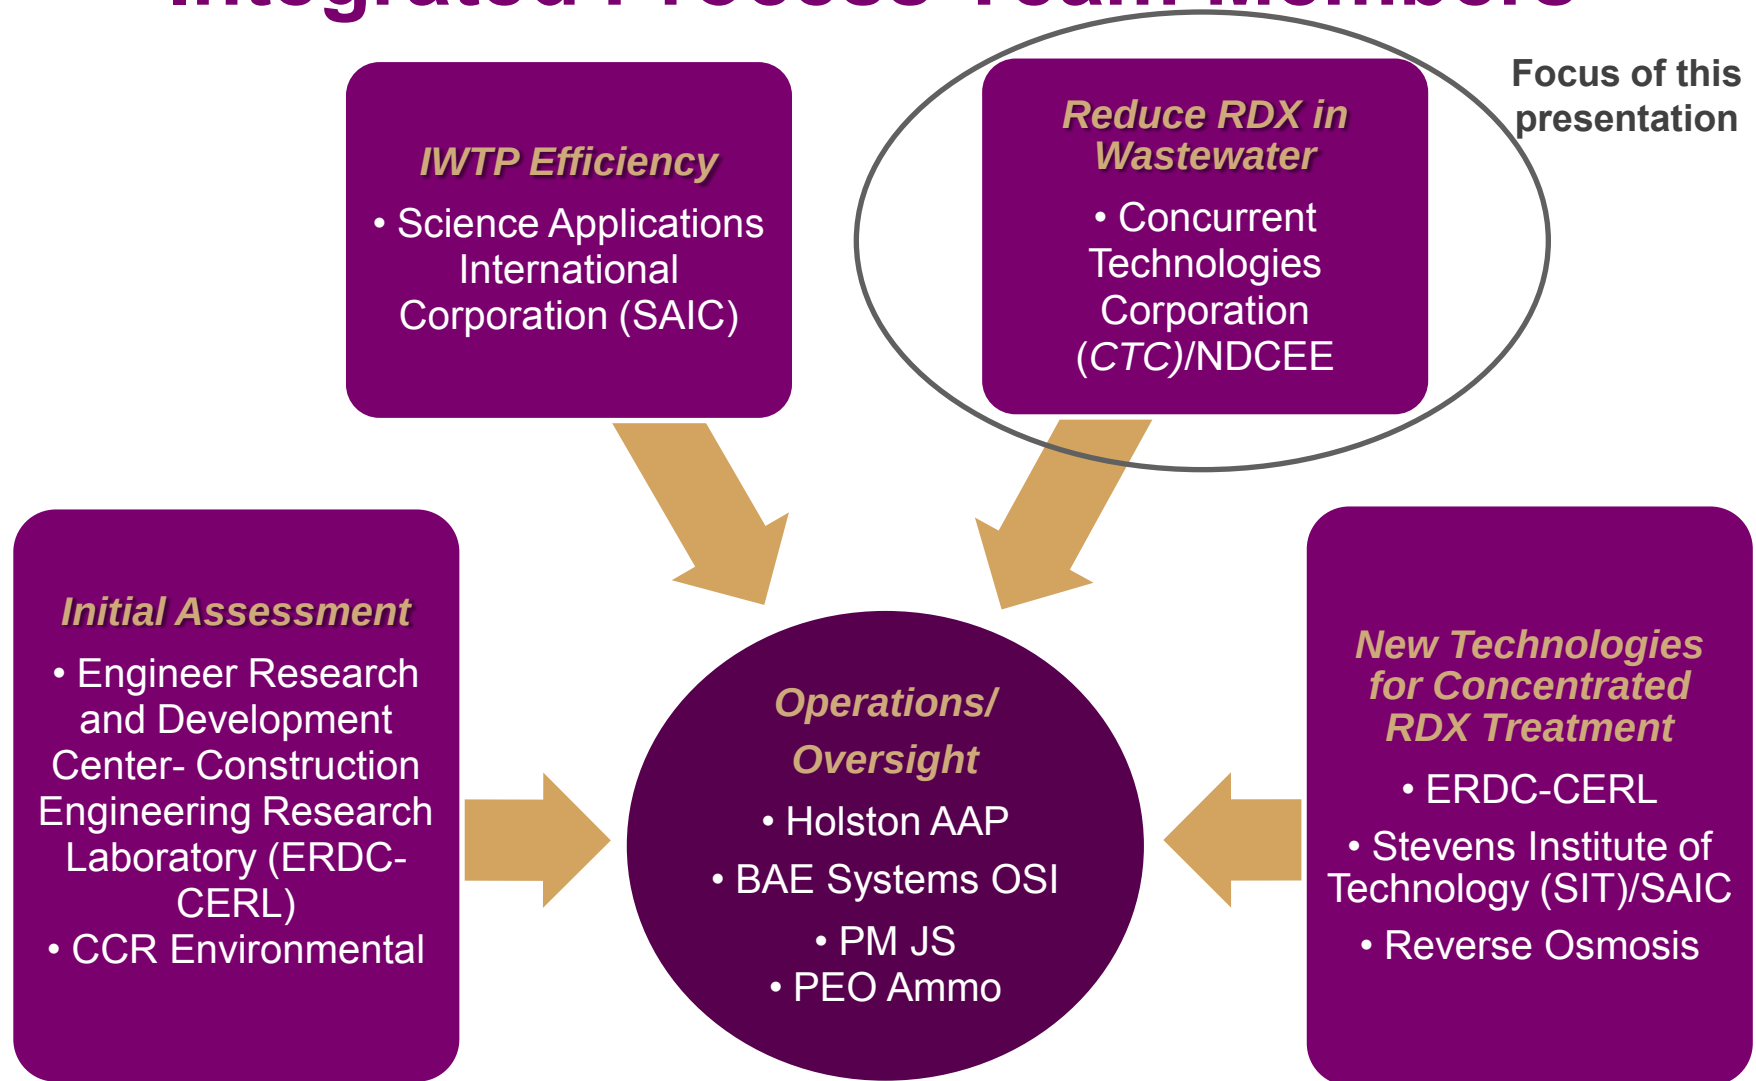

Identify Specific Needs for RDX

■ Study to determine


Solids dropping from sock probes were being washed into wastewater stream

Consensus to eliminate solids dropping onto floor

BAE Systems OSI had previously designed a modified nutsche without the problematic sock probes and tested it on a small scale with good results. They then designed two updated versions.



Dewatering Process Overview

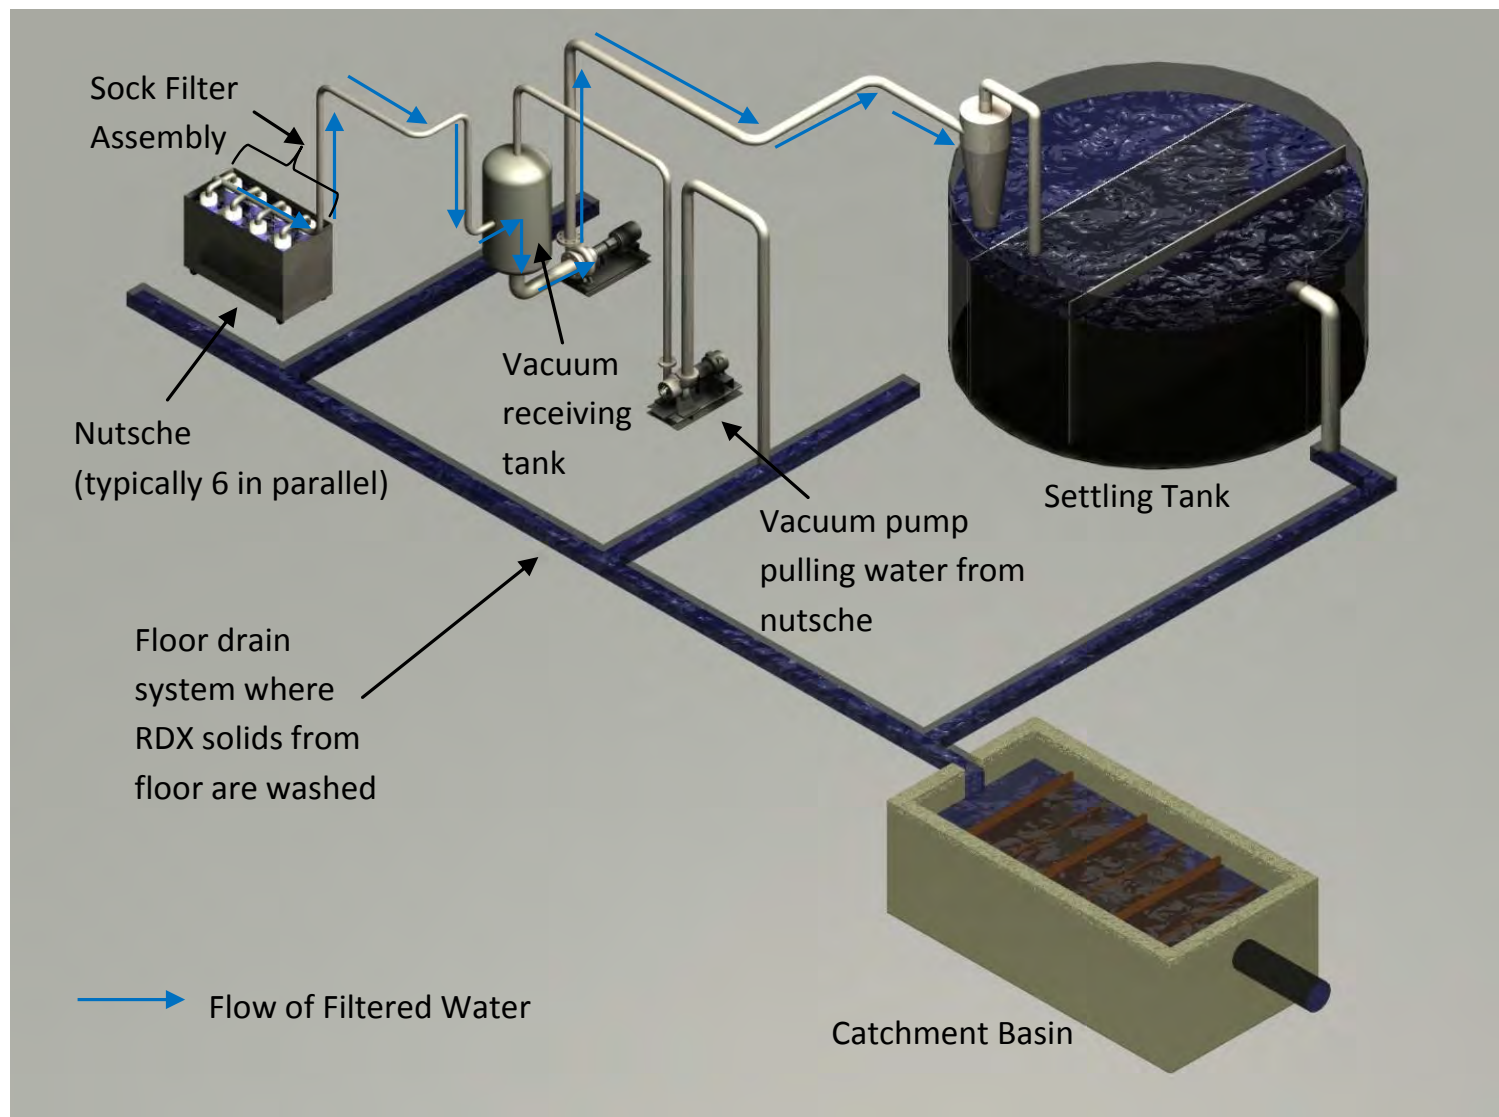

Design Alternatives


- 4 different alternatives will be evaluated in this demonstration/validation (dem/val) project
- 2 have already been used in the RDX manufacturing process at Holston AAP
 - Design #1: Status Quo
 - Design #4: Grid Bottom with Gooseneck
- 2 prototypes were designed by BAE Systems OSI and constructed for this dem/val
 - Design #2: False Bottom Nutsche
 - Design #3: Grid Bottom Nutsche

Design #1: Status Quo


- Noted Problems
 - Non-uniform drying of RDX
 - Water heel in nutsche bottom
 - RDX solids falling to floor




Design #2: False Bottom Nutsche

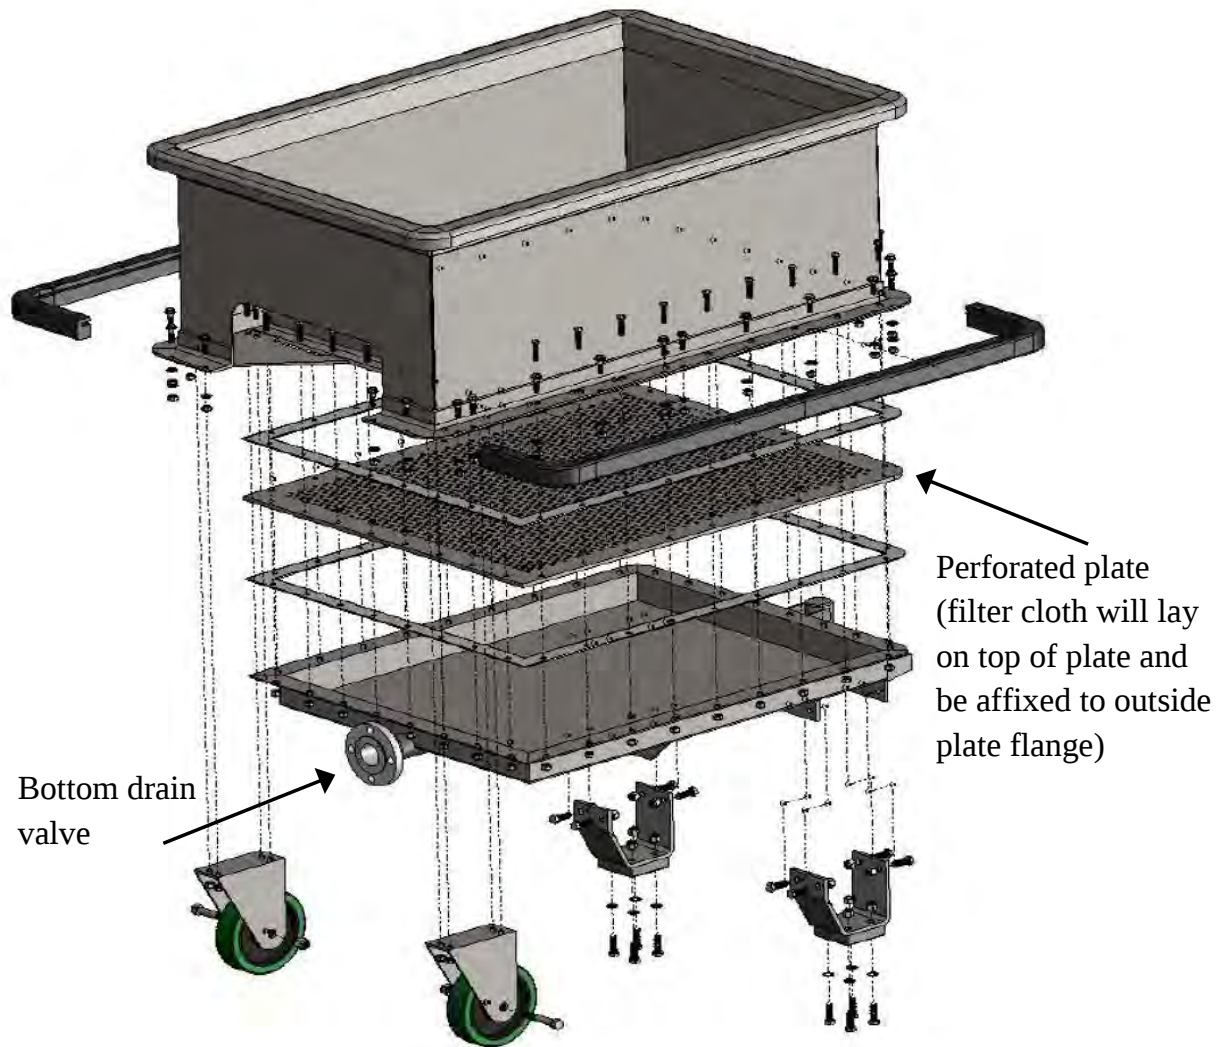

Design #3: Grid Bottom Nutsche

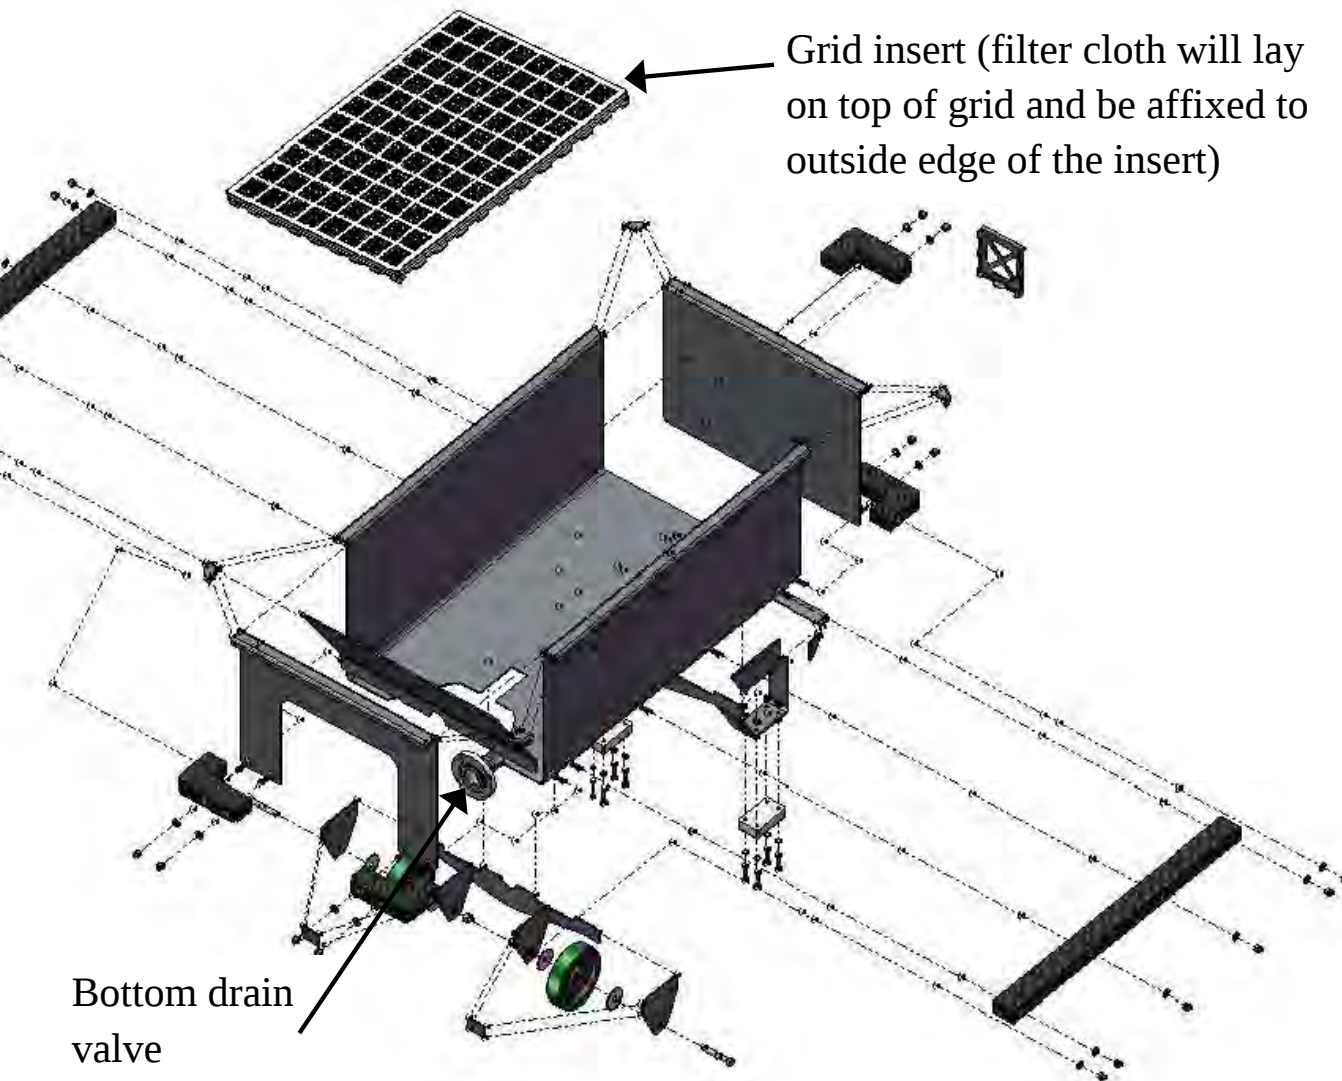

Design #4: Grid Bottom with Gooseneck

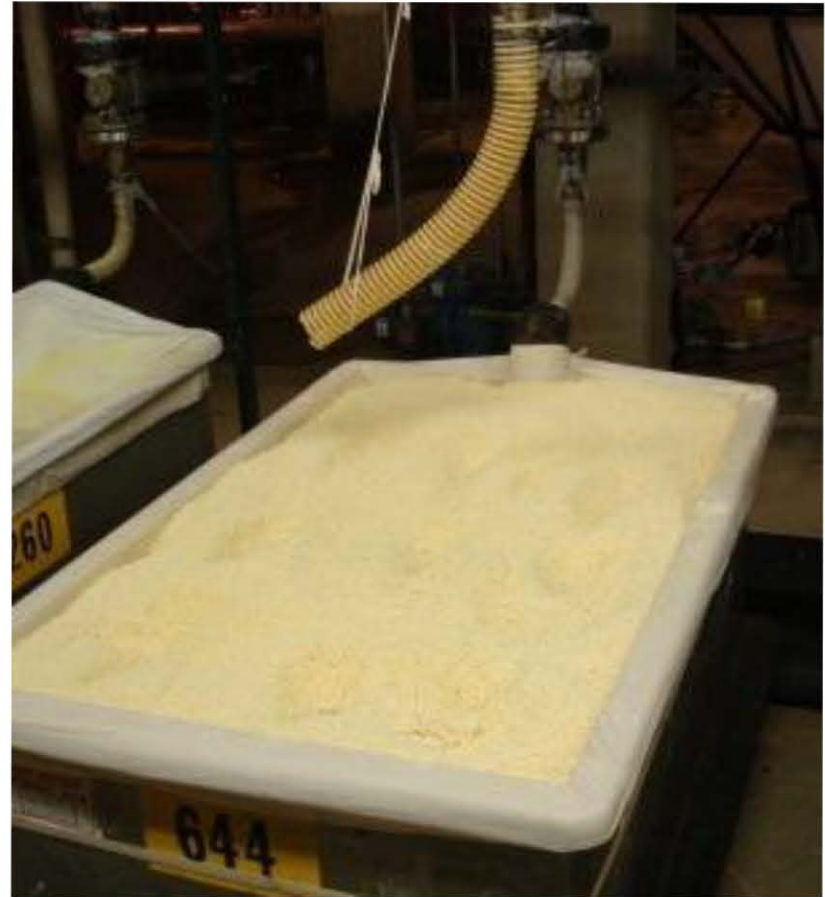

Qualifying Test Run

- Designs #1 & #4 already used on-site at Holston AAP
- Designs #2 & #3 prototypes manufactured and delivered
- For Designs #2 & #3, safety evaluation procedures had to be followed to allow for use of new equipment in process
 - Prototype validation and familiarization
 - Safety Team review
 - Static test run
 - Transport test run



Qualifying Test Run Lessons Learned

- Sealing corners was difficult on Design #3 (Grid Bottom)
- O-ring vs. Gore-Tex® only seal



More Lessons Learned



- Torque requirements need established for flanges where top and bottom pieces are secured for Design #2 (False Bottom)

- Filter fabric restricting flow thru bottom drain; new method to secure fabric required for Design #3 (Grid Bottom)



Dem/Val Testing

- Phase I: Evaluate RDX Dewatering Efficiency
 - Evaluate moisture removal
 - Evaluate processing time to dewater RDX
 - Evaluate RDX concentration reduction in water
 - Evaluate quantity of RDX solids falling to floor/ending up in wastewater
 - Evaluate additional dewatering after transport

Dem/Val Testing (continued)

- Phase II: Assess Operations and Maintenance Impacts
 - Estimate quantity of water used in floor clean-up
 - Estimate quantity of water used in sock probe hydraulics
 - Determine optimal dewatering time
 - Determine impacts to next process steps (drying time)
 - Determine time to filter fouling
 - Determine filter useful life
 - Assess impacts to vacuum pump
 - Other Operations and Maintenance (O&M) impacts (as determined during testing)

Expected Outcomes

- Due to preliminary testing, it is expected that Designs #2, #3, and #4 will provide a more uniform dewatering of RDX and possibly reduce the time required for dewatering and drying
- If one of the new nutsche designs is implemented, the following are expected:
 - Water savings will be realized in the elimination of the hydraulic lifts for the sock probes (estimated at 6000 gallons per day per building) and also in housekeeping operations to clean up RDX from the floor
 - Lower wastewater volume, which should have an additional cost savings to Holston AAP
 - Impacts to the concentration of RDX in wastewater stream

Contact Information

■ NDCEE Technical Monitor (TM)

Task: 0473-A1 Wastewater Microfiltration for RDX Recycling

Name: Mr. Donald Yee

Organization: PEO Ammo

E-mail: donald.w.yee@us.army.mil

Phone Number: (973) 724-6286

■ NDCEE Project Manager (PM)

Name: Paul Brezovec

Organization: CTC/NDCEE

E-mail: brezovec@ctc.com

Phone Number: (814) 269-2844

www.ndcee.ctc.com

■ PM for Joint Services

Name: Gregory O'Connor

E-mail: gregory.j.oconnor@us.army.mil

Phone Number: (973) 724-5008

This work was funded through the Office of the Assistant Secretary of the Army (Installations and Environment) and conducted under contract W74V8H-04-D-0005 Task 0473. The views, opinions, and/or findings contained in this paper are those of the author and should not be construed as an official Department of the Army position, policy, or decision unless so designated by other official documentation.