

Report Documentation Page

Form Approved
OMB No. 0704-0188

Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.

1. REPORT DATE JUN 1989	2. REPORT TYPE N/A	3. DATES COVERED -			
4. TITLE AND SUBTITLE Foil Implosion Studies On Pegasus		5a. CONTRACT NUMBER			
		5b. GRANT NUMBER			
		5c. PROGRAM ELEMENT NUMBER			
6. AUTHOR(S)		5d. PROJECT NUMBER			
		5e. TASK NUMBER			
		5f. WORK UNIT NUMBER			
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Los Alamos National Laboratory Physics Division P.O. Box 1663, MS E526 Los Alamos, New Mexico 87545		8. PERFORMING ORGANIZATION REPORT NUMBER			
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)		10. SPONSOR/MONITOR'S ACRONYM(S)			
		11. SPONSOR/MONITOR'S REPORT NUMBER(S)			
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release, distribution unlimited					
13. SUPPLEMENTARY NOTES See also ADM002371. 2013 IEEE Pulsed Power Conference, Digest of Technical Papers 1976-2013, and Abstracts of the 2013 IEEE International Conference on Plasma Science. Held in San Francisco, CA on 16-21 June 2013. U.S. Government or Federal Purpose Rights License.					
14. ABSTRACT PEGASUS is a 1.5 MJ capacitor bank facility used in the Los Alamos Trailmaster foil implosion program. The experiments on this facility are to serve as a diagnostic testbed and foil physics benchmark for foil implosions with explosive generators as drivers. During the first year of operation, foil implosions have been driven by discharging the bank directly into a very thin Aluminum 2500 A thick free-standing foil without any pulse sharpening techniques; so-called "direct drive." These direct drive experiments have served as initial tests to optimize bank performance and foil implosion experimental techniques. The results to date are presented below.					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT SAR	18. NUMBER OF PAGES 2	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

FOIL IMPLOSION STUDIES ON PEGASUS*

J. C. Cochrane, R. R. Bartsch, F. Begay, H. W. Kruse,
H. Oona, J. V. Parker, and P. J. Turchi**

Los Alamos National Laboratory
Physics Division
P.O. Box 1663, MS E526
Los Alamos, New Mexico 87545

Abstract

PEGASUS is a 1.5 MJ capacitor bank facility used in the Los Alamos Trillmaster foil implosion program. The experiments on this facility are to serve as a diagnostic testbed and foil physics benchmark for foil implosions with explosive generators as drivers. During the first year of operation, foil implosions have been driven by discharging the bank directly into a very thin Aluminum 2500 Å thick free-standing foil without any pulse sharpening techniques; so-called "direct drive." These direct drive experiments have served as initial tests to optimize bank performance and foil implosion experimental techniques. The results to date are presented below.

PEGASUS Facility

The PEGASUS pulsed power facility is a 1.5 MJ, 216 μf , 120 kV capacitor bank. With our present load chamber, which is designed for use on explosive generators as well as with the capacitor bank, the rise time of the current is $\sim 4 \mu\text{s}$. Total inductance is 27 nH and the bank inductance is $\sim 4 \text{ nH}$. The capacitors are Maxwell 60 kV, 6 μf capacitors arranged into four modules on the periphery of a 20-ft diameter radial transmission line. The modules, similar to the Maxwell Shiva modules, are charged to a maximum of $\pm 60 \text{ kV}$ forming a two stage Marx. For the data presented here, the capacitors are protected from excessive ringing by a 100 m Ω SS foil resistor connected between the plates of the transmission line to the addition inherent resistance of the PEGASUS bank of 0.5 m Ω . The modules were switched via detonator switches. For reasons given below, Maxwell rail-gap switches have now been installed as start switches.

The maximum current of the capacitor bank into the load chamber in present use is $\sim 10 \text{ MA}$. To date, a peak current of 7 MA has been delivered into a dummy load at 88 kV charge voltage. With direct drive experiments, the foil implodes in $\sim 2 \mu\text{s}$ or less at about half the quarter-cycle time of the bank. Thus, generating more current means more energy is dissipated in the load chamber as diminishing returns are realized in foil energy as voltage and current are raised. Our next set of experiments will use a Plasma Flow Switch as a pulse sharpening device so that it will be possible to drive the foil implosion at the peak current of the capacitor bank and deliver maximum energy into the foil.

Detonator switches were chosen initially for reasons of cost, because their current and coulomb capacities are very high, and because of their high reliability. (Detonator switched operation has not resulted in any pre-fires during the past year.)

However, jitter has proven with the detonator switches to be a problem. We have made continuing improvements in the switches but there remains a "foot" where \dot{i} initially is less than expected by $\sim 30\text{-}50\%$ for a period of 300-500 ns. Since a precisely known current vs. time profile is required to investigate 2-D effects of foil instabilities during the implosion, we are replacing the detonator switches with rail gaps. Because of the coulomb limit of the rail-gap switches, detonator-switched crowbars will be used for capacitor bank operation at voltages significantly above 80 kV.

The load chamber (powerflow channel) is shown below in Figure 1. The coaxial section, $\sim 40 \text{ cm}$ diameter, mounts onto either our capacitor bank or an explosive generator. The negative electrode (Aluminum) is soft-anodized and the channel is routinely hi-potted to 160 kV DC before use on a foil implosion.

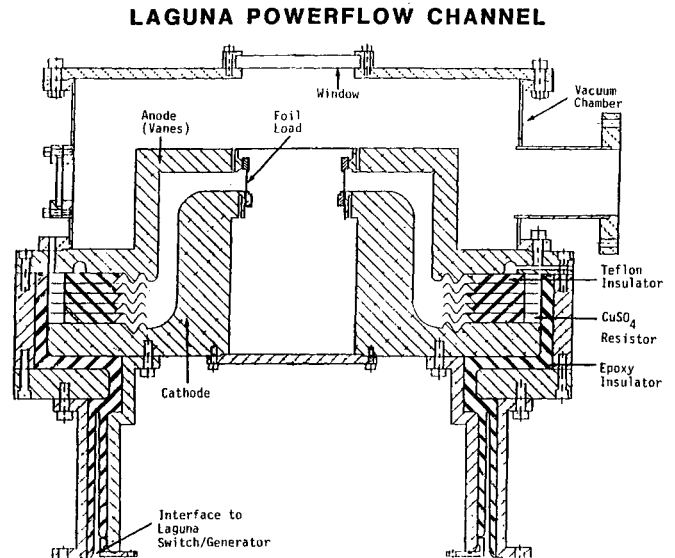


Figure 1. Powerflow Channel.

Vacuum pressures are typically mid- 10^{-5} torr when we fire. We have not observed shorting of the channel during the initial 1/4-cycle of the current rise. The foil mounting rings are held in place by spring loaded fingers, which are under load when the foil manufacturing mandrel is removed. (The mandrel has similar spring loaded fingers to grip the foil rings.) This technique allows the free standing, 2500 Å thick, 2-cm high, 10-cm diameter Aluminum foil to be installed with a minimum of wrinkles.

*Work supported by the U. S. Department of Energy.

**R&D Associates, Alexandria, Virginia, 22314.

Experimental Results

Diagnostics fielded on the experiments include a Rogowski, a capacitive V probe, several channels of Faraday-rotation current measurements, a four-channel XRD array, an x-ray pinhole camera, a single channel bolometer, VUV spectrometer, and optical cameras. Current (I) vs. Time data (shown in Figure 2 below) shows the effect of the foil implosion as an ~ 50% notch at ~ 2 μ sec on the rise of the current.

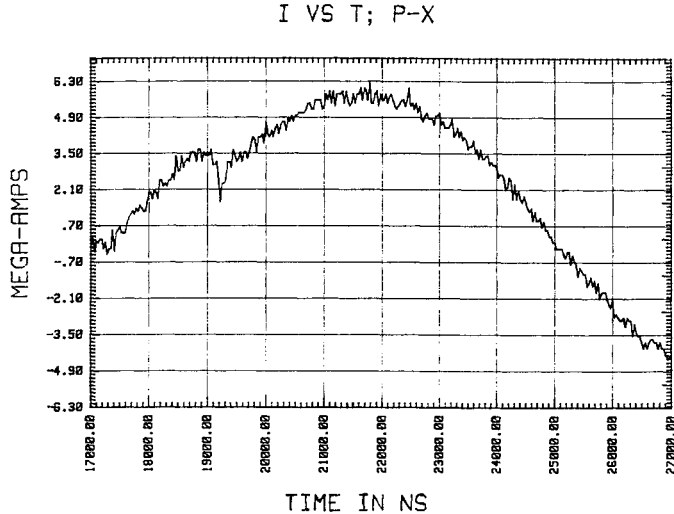


Figure 2. Effect of the foil implosion at the rise of the current.

Calculated, slug-model implosions occur about 100-300 ns earlier than experimentally observed; however, the detonator switches are believed to have a resistive phase which retards the initial rise of the current. The current values at implosion time and magnitude of the current dip are in agreement between the experimental and calculated values. The slug-model implosion on the whole appears to characterize the coarse features of the foil implosion.

The bolometer measured 39 kJ of radiated energy for shot no. 10 from 50 eV to 2 keV. An energy estimate made from the above current dip yields ~ 100 kJ into foil kinetic energy. The capacitive voltage probe located on the powerflow channel (halfway along the feed system inductance) showed a 400 kV spike at foil implosion time. XRD data shows an x-ray burst at implosion time with width of 200 ns. The burst has two peaks. These results are typical. The twin peaks (at the beginning to end of the pulse) possibly suggest a precursor of foil mass arriving on axis before the main implosion. A typical width is 200 ns, though we have had a width of 150 ns on one shot. Effective blackbody temperature of ~ 20 eV is inferred from the XRD data assuming a 1 cm diameter source. Efforts are presently underway to measure the diameter of this source.

Summary

Direct-drive foil implosion shots fired to date on PEGASUS have provided results in good agreement with slug model calculations. Instability issues and 2-D effects will be addressed in a series of shots using the newly installed Maxwell rail-gap start switches. This upcoming shot series will conclude direct drive experiments by providing implosion data for benchmarking codes capable of tracking Raleigh-Taylor instabilities.

Pulse-sharpened plasma-flow switch experiments which follow will be designed and analyzed utilizing these codes.

Acknowledgements

We acknowledge the expert help of B. Anderson, H. Reed, G. Sandoval, and M. Trujillo.

References

- [1] J. H. Degnan, et al., IEEE Trans. Plasma Sci., Vol. PS-15, No. 6, pp. 760-756, 1987.