

UNCLASSIFIED

AD NUMBER

ADB022524

LIMITATION CHANGES

TO:

Approved for public release; distribution is unlimited.

FROM:

Distribution authorized to U.S. Gov't. agencies only; Test and Evaluation; 12 AUG 1977. Other requests shall be referred to Electronics Systems Division, Attn: AFSC, Hanscom AFB, MA 01731.

AUTHORITY

USAFGL ltr, 7 Sep 1982

THIS PAGE IS UNCLASSIFIED

AD B.022524

AUTHORITY:

USAFGL

1tr 7 Sep 82





**E-SYSTEMS**  
Montek Division



2<sup>mc</sup>

Report No. 131500-614  
12 August 1977

L

ADB022524

HUMIDITY TEST REPORT  
FOR THE  
AN/TRN-41 TACAN NAVIGATIONAL SET

Distribution limited to U. S. Government agencies only;  
Reason: Test and Evaluation. 12 August 1977. Other  
requests for this document must be referred to  
Department of the Air Force, Headquarters Electronic  
Systems Division (AFSC), Hanscom Air Force Base,  
Massachusetts 01731, Attention: PPG.

DDC  
RECEIVED  
NOV 8 1977  
F

Prepared for:  
Department of the Air Force  
Headquarters Electronic Systems Division (AFSC)  
Hanscom Air Force Base  
Massachusetts 01731

Prepared by:  
✓ E-Systems, Inc., Montek Division  
2268 South 3270 West  
Salt Lake City, Utah 84119

✓  
Contract No. F19628-75-C-0200  
CDRL Item A00Y

AD No. \_\_\_\_\_  
DDC FILE COPY

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER ESD-TR-77-311	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER 14 1-1500-614
4. TITLE (and Subtitle) Humidity Test Report for the AN/TRN-41 TACAN Navigational Set		5. TYPE OF REPORT & PERIOD COVERED
7. AUTHOR(s) NONE		6. PERFORMING ORG. REPORT NUMBER
9. PERFORMING ORGANIZATION NAME AND ADDRESS E-Systems, Inc., Montek Division 2268 South 3270 West Salt Lake City, Utah 84119		8. CONTRACT OR GRANT NUMBER(s) 15 F29028-75-C-0000
11. CONTROLLING OFFICE NAME AND ADDRESS Electronic Systems Division (AFSC) Hanscom AFB, Ma 01731		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		12. REPORT DATE 11 12 August 1977
		13. NUMBER OF PAGES 12 43p.
		15. SECURITY CLASS. (of this report) Unclassified
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Distribution limited to U.S. Government agencies only; Reason: Test and Evaluation. 12 August 1977. Other requests for this document must be referred to Department of the Air Force, Hq ESD (AFSC), Hanscom AFB, Ma01731, Attention: DRI.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) AN/TRN-41 TACAN Navigational Set		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) This report describes the humidity test as defined in the Equipment Test Plan for Navigational Set, AN/TRN-41.		

402 354

# HUMIDITY TEST REPORT

## for the NAVIGATIONAL SET, TACAN, AN/TRN-41

This report describes the humidity test as defined in the Equipment Test Plan for Navigational Set, TACAN, AN/TRN-41, 131500-415.

1. **Test Identification.** Humidity test as defined in Appendix IV-E (humidity test procedure) of the Equipment Test Plan for Navigational Set, TACAN, AN/TRN-41.
2. **Functional Purpose of Test.** This test forms a part of the AN/TRN-41 system qualification tests.
3. **Test Objectives.** To demonstrate that the AN/TRN-41 will meet the humidity requirements of paragraphs 3.2.5.1.2 and 4.2.1.4.3.3 of Specification No. 404L-701-5017A, Part 1 of 2 parts (20 August 1976).

4. **Description of Test Article.** The AN/TRN-41 system consisting of the following was used for the tests:

Receiver-Transmitter	RT-1202/T
Antenna	AS-3132/T
Antenna Support	AB-1237/T
Filter, DC Power	F-1439/T
Interconnecting Cables	

ACCESSION for	Wire Section <input type="checkbox"/>	Buff Section <input type="checkbox"/>
NTIS		
DOC		
UNANNOUNCED		
JUSTIFICATION		
BY	DISTRIBUTION/AVAILABILITY CODES	
Dist.		SP. CIAL

**B**

5. **Summary of Test Results.** The AN/TRN-41 showed no functional degradation during the humidity test. Some parts showed rust during the test. These parts are being replaced with corrosion resistant parts.
6. **Description of Test Facilities and Procedures.** The test facilities and test procedures are described in Appendix IV-E of the Equipment Test Plan.
7. **Test Setup Diagrams.** The test setup diagrams are provided in Appendix IV-E of the Equipment Test Plan.

8. **Test equipment.** See Attachment 1 for test equipment used for the humidity test and the pre-test, test, and post-test operational tests.

9. **Test Data.** Attachment 2 contains the data sheets for the humidity test, pre-test, test, and post-test operational tests and the temperature charts from the chamber controller and recorder.

10. **Test Conditions.** The system was conditioned and operated under conditions given in Appendix IV-E of the Equipment Test Plan.

11. **Test Results Analysis.** Comparison of the pre-test, test, and post-test operational data showed no functional degradation during the humidity test. Some parts, as described on the humidity test data sheet in Attachment 2, exhibited rust. These parts were expedited for use on preproduction systems and did not meet the requirements of the specification control drawings. The parts used on production systems will have proper corrosion resistant characteristics. Moist air was evident inside the RT when it was opened; however, no indication of condensation was observed that would affect performance.

12. **Certification.** The data sheets shown in Attachment 2 have been signed by a Montek Quality Assurance representative and a DCAS representative, certifying that the test results are authentic, accurate, current and in accordance with the related test plan.

**ATTACHMENT 1**  
**TEST EQUIPMENT**

## TEST EQUIPMENT

<u>Description/Manufacturer</u>	<u>Model</u>	<u>Calibration Due Date</u>
Oscilloscope, Tektronix	465	7/6/77
Signal Generator, RF. H.P.	612A	6/23/77
Peak Power Meter, HP	8900B	9/19/77
Pulse Generator, Data Pulse	110B	5/12/77
Counter, Fluke	1953	8/12/77
Half-Ampl. Det. Montek	131500-702	N/A
RF Detector, Montek	135203-100	N/A
Monitor Ant., Montek	006300	N/A
Test Box - Interconnection - Montek	131500-703	N/A
Power Supply HP	6274B	1/16/78
Power Supply Acopian		12/9/77
Power Supply, Sorensen	QR4075A	9/19/77
Directional Coupler 20 dB, Narda	3042B	N/A
Directional Coupler 10 dB, Microlab	CBA-78	N/A
Variable Attenuator, Weinschel 0-10 dB	905	N/A
RF Attenuator, Weinschel	10 dB	N/A
Multimeter, Fluke	8120A	8/2/77
Humidity Chamber, Conrad	WD-640-705	9/2/77

**ATTACHMENT 2**

**DATA SHEETS**

APPENDIX IV-K  
DATA SHEET  
ENVIRONMENTAL TEST

131500-415

June 30, 1976

TEST Humidity \_\_\_\_\_  
SYSTEM 003 \_\_\_\_\_

from 15 April 1977  
DATE to 30 April 1977  
ACCEPTABLE   X    
NOT ACCEPTABLE \_\_\_\_\_

REMARKS

At the conclusion of the humidity test, the system operated properly. There was no degradation in performance based on comparison of test data. Listed below are the noted mechanical discrepancies observed during visual inspection. Engineering (Mechanical) is presently evaluating parts noted for corrective action, and resolution prior to production.

Note: Upon opening Receiver-Transmitter there was evidence of moist air inside unit. However, no indication of condensation was observed which would affect performance.

DISCREPANCIES

- The spring pin, P/N MS16562-216 shows evidence of rust, used on tripod leg.
- The thumb screw, P/N 910569-001 used on tripod leg shows evidence of rust.
- The 1/4 tyrn fasteners D- Ring, P/N .930048, used on the tripod base for mounting the receiver transmitter to the tripod is rusted.
- The receiver cover, P/N 149042-002, shows some very minor evidence of blistering.

SIGN OFF INFORMATION

ENVIRONMENTAL TEST ENGINEER J. Dickinson DATE 5/6/77

REPRESENTATIVE ENGINEER B. D. Taylor DATE 5/6/77

QA REPRESENTATIVE M. B. Hunt DATE 5/6/77

DCASD OR AF CONCURRENCE Phil M. ... DATE 5-6-77

DATA SHEET  
OPERATIONAL TESTS  
AN/TRN-41

JUNE 30, 1976

ITL 157 19-Apr-77  
20 Apr 77  
21 Apr 77

Test PRE - HUMIDITY

Date April 19, 1977

System SIN -001- TRIPUS  
003      004 - ANTENNA  
                 001 RT

DC Filter s/n 001

Time 8:10 am

Tech 4-21-77  
4/20/77

Para. No.	Description	Pre Test	24 Hr Test	44 Hr Test	Requirements	Units
6.1	Calibrated RF insertion loss $P_L = 31.3$ dB Used in determining RF peak power.	N/A	N/A	N/A	N/A	N/A
6.2	System turn on normal operation	✓	✓	✓	Check if OK	N/A
6.3.1	Antenna radiated signal 15 Hz	✓	✓	✓	Check if OK	N/A
	135 Hz	✓	✓	✓	Check if OK	N/A
6.3.2	Antenna Speed				66.667 ± .133	ms
6.4.1.1	Correct identity code	✓	✓	✓	Check if OK	N/A
6.4.1.2	Identity period	66.667	66.665	66.666	37.5 ± 3.75	Seconds
6.4.2	Peak power (1) Reading of peak power meter $P_m =$ (2) Convert to dBm - $10 \log P_m \times 10^3 = P_{in} \text{ dBm}$ Total power output in dBm $P_{m \text{ dBm}} + P_L =$ *Insertion loss see 6.1 above.	84 mw 19.24 dBm 50.54 dBm	82 mw 19.316 dBm 50.44 dBm	83 mw 19.19 dBm 50.49	N/A N/A 50 dBm	Watts dBm dB
6.4.3.3	Pulse count	7180	7181	7185	7200 ± 180	Counts
6.4.4.2	Pulse shape Width (50%) Rise time (10-90%) Fall time (90-10%)	3.6 $\mu$ s 2.0 $\mu$ s 2.45 $\mu$ s	3.6 $\mu$ s 2.0 $\mu$ s 2.4 $\mu$ s	3.6 $\mu$ s 2.0 $\mu$ s 2.5 $\mu$ s	3.5 ± 0.5 2 ± 0.25 2.5 ± 0.5	$\mu$ s $\mu$ s $\mu$ s
6.4.4.4	Pulse spacing	12.0 $\mu$ s	12.0 $\mu$ s	12.0 $\mu$ s	12.0 ± 0.1	$\mu$ s
6.4.5.2	Delay - 60 ± 10 $\mu$ s 15 Hz trig to first burst pulse.	✓	✓	✓	Check if OK	

June 30, 1976

DATA SHEET  
OPERATIONAL TESTS  
AN/TKN-41 (Continued)

Para. No.	Description	Pre Test	Test	Post Test	Requirements	Units
6.4.5.3	Correct north Burst - 12 pulse pairs spaced $30 \pm 0.1 \mu s$	✓	✓	✓	Check if OK	
6.4.5.5	Delay $60 \pm 10 \mu s$ - 135 Hz trig to first burst pulse	✓	✓	✓	Check if OK	
6.4.5.6	Correct Aux burst - 6 pulse pairs spaced $24 \pm 0.1 \mu s$	✓	✓	✓	Check if OK	
6.4.6.5	RT replies to 3300 interrogations	2477	2474	2530	$\geq 2310$ (Counts/Second)	
6.4.6.7	Demand only mode - times to switch from ON to STBY within 70 seconds	✓	✓	✓	Check if OK	
6.4.6.8	STBY mode	✓	✓	✓	Check if OK	
6.4.6.9	Demand Only mode - time to switch from STBY to ON $\leq 15$ sec	*	✓	✓	Check if OK	
6.4.6.10	ON AIR mode	✓	✓	✓	Check if OK	
6.4.7.1	DME ONLY mode	✓	✓	✓	Check if OK	
6.4.7.2	Switch from DME to TACAN	✓	✓	✓	Check if OK	
6.4.8.1	Antenna Alarm - Within four seconds	✓	✓	✓	Check if OK	
6.4.8.2	Alarm Reset	✓	✓	✓	Check if OK	
6.4.8.3	RT Alarm - Within five seconds	✓	✓	✓	Check if OK	
6.4.8.4	Alarm Reset	✓	✓	✓	Check if OK	

\* NOTE - TURNS ON IN 16 SECONDS,  
PROCEEDS WAI IN ERROR

DATA SHEET  
OPERATIONAL TESTS  
AN/TRN-41

June 30, 1976 *PCBS*  
22 April Witness *TWB*

Test HUMIDITY  
System 001 TRIPOD  
          004 ANTENNA  
          003 001 RT

Date 22 APRIL 1977  
Time 10.15 AM  
Tech

Para. No.	Description	4/22/77 Test ms	4/23/77 Test ms	4/27/77 Test	Requirements	Units
6.1	Calibrated RF insertion loss $P_L = 3.3$ dB Used in determining RF peak power.	N/A	N/A	N/A	N/A	N/A
6.2	System turn on normal operation	✓	✓	✓	Check if OK	N/A
6.3.1	Antenna radiated signal 15 Hz	✓	✓	✓	Check if OK	N/A
	135 Hz	✓	✓	✓	Check if OK	N/A
6.3.2	Antenna Speed	66.667	66.669	66.668	66.667 ± .133	ms
6.4.1.1	Correct identity code	✓	✓	✓	Check if OK	N/A
6.4.1.2	Identity period	✓	✓	✓	37.5 ± 3.75	Seconds
6.4.2	Peak power (1) Reading of peak power meter $P_m =$ (2) Convert to dBm - 10 log $P_m \times 10^3 = P_m \text{ dBm}$ Total power output in dBm $P_{ndBm} + P_L =$ *Insertion loss see 6.1 above.	* 70mw 77.5mw 18.86 dBm 50.16 dBm	77mw 18.86 dBm 50.16 dBm	77 18.86 dBm 50.16 dBm	N/A N/A 50 dBm	Watts dBm dB
6.4.3.3	Pulse count	7180	7181	7181	7200 ± 180	Counts
6.4.4.2	Pulse shape Width (50%) Rise time (10-90%) Fall time (90-10%)	3.6 us 2.0 us	3.6 us 2.1 us	3.5 2.0	3.5 ± 0.5 2 ± 0.25 2.5 ± 0.5	us us us
6.4.4.4	Pulse spacing	12.0 us 12.0 us	12.0 us 12 us	12.5 12 us	12.0 ± 0.1	us
6.4.5.2	Delay - 60 ± 10 us 15 Hz trig to first burst pulse.	✓	✓	✓	Check if OK	

DATA SHEET  
 OPERATIONAL TESTS  
 AN/TRN-41 (Continued)

Para. No.	Description	Pre Test	Test	Post Test	Requirements	Units
6.4.5.3	Correct north Burst - 12 pulse pairs spaced 30 ± 0.1 μs	✓	✓	✓	Check if OK	
6.4.5.5	Delay 60 ± 10 μs - 135 Hz trig to first burst pulse	64 μs ✓	✓	✓	Check if OK	
6.4.5.6	Correct Aux burst - 6 pulse pairs spaced 24 ± 0.1 μs	✓	✓	✓	Check if OK	
6.4.6.5	RT replies to 3300 interrogations	2503	2690	2670	≥ 2310 (Counts/Second)	
6.4.6.7	Demand only mode - times to switch from ON to STBY within 70 seconds	✓	✓	✓	Check if OK	✓
6.4.6.8	STBY mode	✓	✓	✓	Check if OK	
6.4.6.9	Demand Only mode - time to switch from STBY to ON	✓	✓	✓	Check if OK	
6.4.6.10	ON AIR mode	✓	✓	✓	Check if OK	
6.4.7.1	DME ONLY mode	✓	✓	✓	Check if OK	
6.4.7.2	Switch from DME to TACAN	✓	✓	✓	Check if OK	
6.4.8.1	Antenna Alarm - Within four seconds	✓	✓	✓	Check if OK	
6.4.8.2	Alarm Reset	✓	✓	✓	Check if OK	
6.4.8.3	RT Alarm - Within five seconds	✓	✓	✓	Check if OK	
6.4.8.4	Alarm Reset	✓	✓	✓	Check if OK	

510 sec  
20  
4/19/77

DATA SHEET  
OPERATIONAL TESTS  
AN/TRN-41

Test *Humidity Test*  
System *001 Tripod*  
*004 Antenna*  
*001 RT*  
*System 003*

*w/ Tripod*  
*w/ Tripod*  
Date *April 25, 1977*  
Time *8:10 am*  
Tech *W. Thiese*

Para. No.	Description	<del>4-25-77</del>	<del>4/26/77</del>	<del>4-27-77</del>	Requirements	Units
		Test MBK	Test MBK	Post Test		
6.1	Calibrated RF insertion loss $P_L = 36.3$ dB Used in determining RF peak power.	N/A	N/A	N/A	N/A	N/A
6.2	System turn on normal operation	✓	✓	✓	Check if OK	N/A
6.3.1	Antenna radiated signal 15 Hz	✓	✓	✓	Check if OK	N/A
	135 Hz	✓	✓	✓	Check if OK	N/A
6.3.2	Antenna Speed	<i>66.667</i>	<i>66.667</i>	<i>66.667</i>	$66.667 \pm .133$	ms
6.4.1.1	Correct identity code	✓	✓	✓	Check if OK	N/A
6.4.1.2	Identity period	✓	✓	✓	$37.5 \pm 3.75$	Seconds
6.4.2	Peak power (1) Reading of peak power meter $P_m =$ (2) Convert to dBm - $10 \log$ $P_m \times 10^3 = P_m \text{ dBm}$ Total power output in dBm $P_{m \text{ dBm}} + P_L =$ *Insertion loss see 6.1 above.	<i>76 mw</i>  <i>18.80</i>  <i>50.11</i>	<i>76 mw</i>  <i>18.80</i>  <i>50.11</i>	<i>76 mw</i>  <i>19.80</i>  <i>50.11</i>	N/A N/A  $50 \text{ dBm}$	Watts dBm dB
6.4.3.3	Pulse count	<i>7186</i>	<i>7184</i>	<i>7194</i>	$7200 \pm 180$	Counts
6.4.4.2	Pulse shape Width (50%) Rise time (10-90%) Fall time (90-10%)	<i>3.6 us</i> <i>2.1 us</i> <i>2.5 us</i>	<i>3.6 us</i> <i>2.1 us</i> <i>2.5 us</i>	<i>3.7</i> <i>2.1</i> <i>2.5</i>	$3.5 \pm 0.5$ $2 \pm 0.25$ $2.5 \pm 0.5$	$\mu\text{s}$ $\mu\text{s}$ $\mu\text{s}$
6.4.4.4	Pulse spacing	<i>12 us</i>	<i>12 us</i>	<i>12</i>	$12.0 \pm 0.1$	$\mu\text{s}$
6.4.5.2	Delay - $60 \pm 10 \mu\text{s}$ 15 Hz trig to first burst pulse.	✓	✓	✓	Check if OK	

June 30, 1976

DATA SHEET  
OPERATIONAL TESTS  
AN/IRN-41 (Continued)

Para. No.	Description	4/15/77 Pre Test	4/26/77 Test	4/27-77 Post Test	Requirements	Units
6.4.5.3	Correct north Burst - 12 pulse pairs spaced 30 ± 0.1 μs	✓	✓	✓	Check if OK	
6.4.5.5	Delay 60 ± 10 μs - 135 Hz trig to first burst pulse	✓	✓	✓	Check if OK	
6.4.5.6	Correct Aux burst - 6 pulse pairs spaced 24 ± 0.1 μs	✓	✓	✓	Check if OK	
6.4.6.5	RT replies to 3300 interrogations	2488	2680	2,500	≥ 2310 (Counts/Second)	
6.4.6.7	Demand only mode - times to switch from ON to STBY within 70 seconds	✓	✓	✓	Check if OK	
6.4.6.8	STBY mode	✓	✓	✓	Check if OK	
6.4.6.9	Demand Only mode - time to switch from STBY to ON	✓	✓	✓	Check if OK	
6.4.6.10	ON AIR mode	✓	✓	✓	Check if OK	
6.4.7.1	DME ONLY mode	✓	✓	✓	Check if OK	
6.4.7.2	Switch from DME to TACAN	✓	✓	✓	Check if OK	
6.4.8.1	Antenna Alarm - Within four seconds	✓	✓	✓	Check if OK	
6.4.8.2	Alarm Reset	✓	✓	✓	Check if OK	
6.4.8.3	RT Alarm - Within five seconds	✓	✓	✓	Check if OK	
6.4.8.4	Alarm Reset	✓	✓	✓	Check if OK	

June 30, 1976

DATA SHEET  
OPERATIONAL TESTS  
AN/TRN-41

Test *Humidity Test*  
System *001 Tripod  
004 Antenna  
001 RT*

*System 103*

Date *4-28-77*  
Time *10:50 AM DST*  
Tech *[Signature]*

Para. No.	Description	4-28-77 Pre Test	4-29-77 Test	4-30-77 Post Test	Requirements	Units
6.1	Calibrated RF insertion loss $P_L = 31.3$ dB Used in determining RF peak power.	N/A	N/A	N/A	N/A	N/A
6.2	System turn on normal operation	✓	✓	✓	Check if OK	N/A
6.3.1	Antenna radiated signal 15 Hz	✓	✓	✓	Check if OK	N/A
	135 Hz	✓	✓	✓	Check if OK	N/A
6.3.2	Antenna Speed	✓	✓	66.668	66.667 ± .133	ms
6.4.1.1	Correct identity code	✓	✓	✓	Check if OK	N/A
6.4.1.2	Identity period	38 sec	38 sec	38	37.5 ± 3.75	Seconds
6.4.2	Peak power (1) Reading of peak power meter $P_m =$ (2) Convert to dBm - $10 \log$ $P_m \times 10^3 = P_m \text{ dBm}$ Total power output in dBm $P_{tot} \text{ dBm} + P_L =$ *Insertion loss see 6.1 above.	76 mw 18.80 dBm 50.11 dBm	76 mw 18.8 dBm 50.11 dBm	76mw 18.8 dBm 50.11 dBm	N/A N/A 50 dBm	Watts dBm dB
6.4.3.3	Pulse count	7180	7180	7184	7200 ± 180	Counts
6.4.4.2	Pulse shape Width (50%) Rise time (10-90%) Fall time (90-10%)	3.7 us 2.1 us 2.5 us	3.7 us 2.1 us 2.5 us	3.6 us 2.1 us 2.5 us	3.5 ± 0.5 2 ± 0.25 2.5 ± 0.5	us us us
6.4.4.4	Pulse spacing	12.0 us	12.1	12.0 us	12.0 ± 0.1	us
6.4.5.2	Delay - 60 ± 10 us 15 Hz trig to first burst pulse.	✓	✓	✓	Check if OK	

DATA SHEET  
 OPERATIONAL TESTS  
 AN/IRN-41 (Continued)

Para. No.	Description	Pre Test	Test	4-20-77 Post Test	Requirements	Units
6.4.5.3	Correct north Burst - 12 pulse pairs spaced 30 ± 0.1 μs	✓	✓	✓	Check if OK	
6.4.5.5	Delay 60 ± 10 μs - 135 Hz trig to first burst pulse	✓	✓	✓	Check if OK	
6.4.5.6	Correct Aux burst - 6 pulse pairs spaced 24 ± 0.1 μs	✓	✓	✓	Check if OK	
6.4.6.5	RT replies to 3300 interrogations	2585	2520	2670	≥ 2310 (Counts/Second)	
6.4.6.7	Demand only mode - times to switch from ON to STBY within <del>70</del> <sup>80</sup> seconds	✓	✓	✓	Check if OK	✓
6.4.6.8	STBY mode	✓	✓	✓	Check if OK	
6.4.6.9	Demand Only mode - time to switch from STBY to ON <del>150</del> <sup>20</sup> sec 4/19/77	✓	✓	✓	Check if OK	
6.4.6.10	ON AIR mode	✓	✓	✓	Check if OK	
6.4.7.1	DME ONLY mode	✓	✓	✓	Check if OK	
6.4.7.2	Switch from DME to TACAN	✓	✓	✓	Check if OK	
6.4.8.1	Antenna Alarm - Within four seconds	✓	✓	✓	Check if OK	
6.4.8.2	Alarm Reset	✓	✓	✓	Check if OK	
6.4.8.3	RT Alarm - Within five seconds	✓	✓	✓	Check if OK	
6.4.8.4	Alarm Reset	✓	✓	✓	Check if OK	

**ENVIRONMENTAL DATA SHEET**  
**ENVIRONMENTAL LABORATORY — DEPT. 330**

FACILITY:

C-II

A.O. 298K-143	ENV. TECH.	TEST SCHED. 4/15/77
ENGINEER OR Q.C. M. Rogers (E system)	PHONE	TEST COMPLETED 5/2/77
TECHNICIAN	PHONE	TEST REMOVED
UNIT TITLE AN/TEN-91 (TACAN)	SER.	QTY. 1
		TOTAL UTILIZATION

INSTRUCTIONS TO OPERATOR	TEST TO TERMINATE:	BY:	ENVIRONMENTAL LABORATORY SUPERVISORS APPROVAL
	1. High Temp 130°F for 24 hrs		
	2. 13°F, 50% humidity for 24 hrs		
	3. operate		
TEST Humidity	4. start cycle		
SPEC. Mil-S-810C			Signature
PAR. Proc. II			4/15/77
			DATE


DATE	TIME	CHRONOLOGICAL RECORD OF TEST	INITIALS (PRINT)
4/15/77	1600hr	set temp to 130°F for 24 hrs.	DWB
4/16/77	1800	change dry bulb Temp to 73°F + wet bulb to 62°F, change charts	DWB
4/18	1232	open door to conduct tests prior to Humidity cycling	DWB
4/19	835	start humidity cycling	DWB
4/20/77	8:33	change charts - W. Bulb chart slipped off pin, did not rotate. readjusted perpendicular band and reset to reduce Temp deviations	DWB
4/21/77	8:55AM	change charts	DWB
4/22/77	8:45AM	changed charts. Dry bulb chart did not rotate during the last 24 hr period.	DWB
4/23	1000	changed to chart #8, STD.	JCD
4/24	9:45	changed to chart #9 & wet bulb chart pen not on chart. it was left in a hold position at the change of number 8 chart; opened door to check wet bulb wick	DWB
4/25	10:00AM	changed charts & standardized	DWB
4/27	10:00AM	changed charts & standardized	DWB
4/28	10:00AM	change charts & standardized	DWB


VERIFIED & RELEASED BY:


Q.C. OR PROGRESS


COGNIZANT ENGINEER




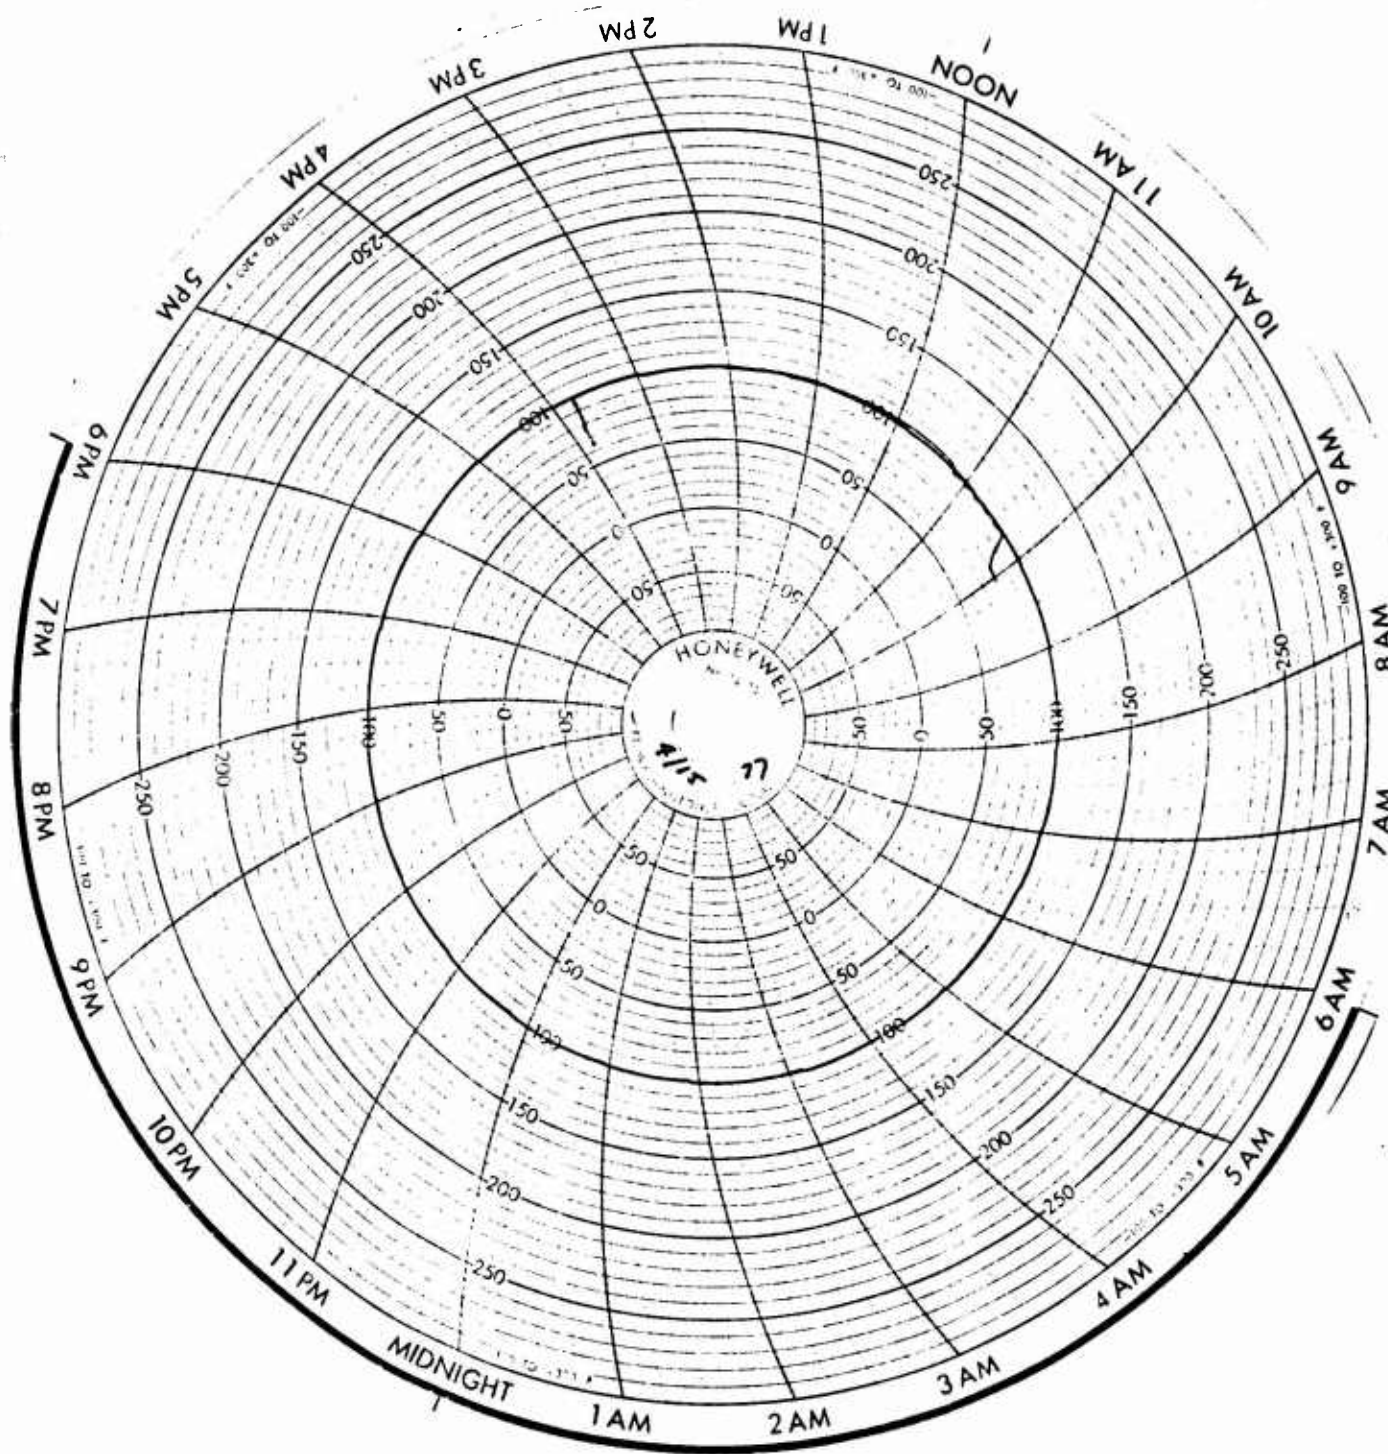


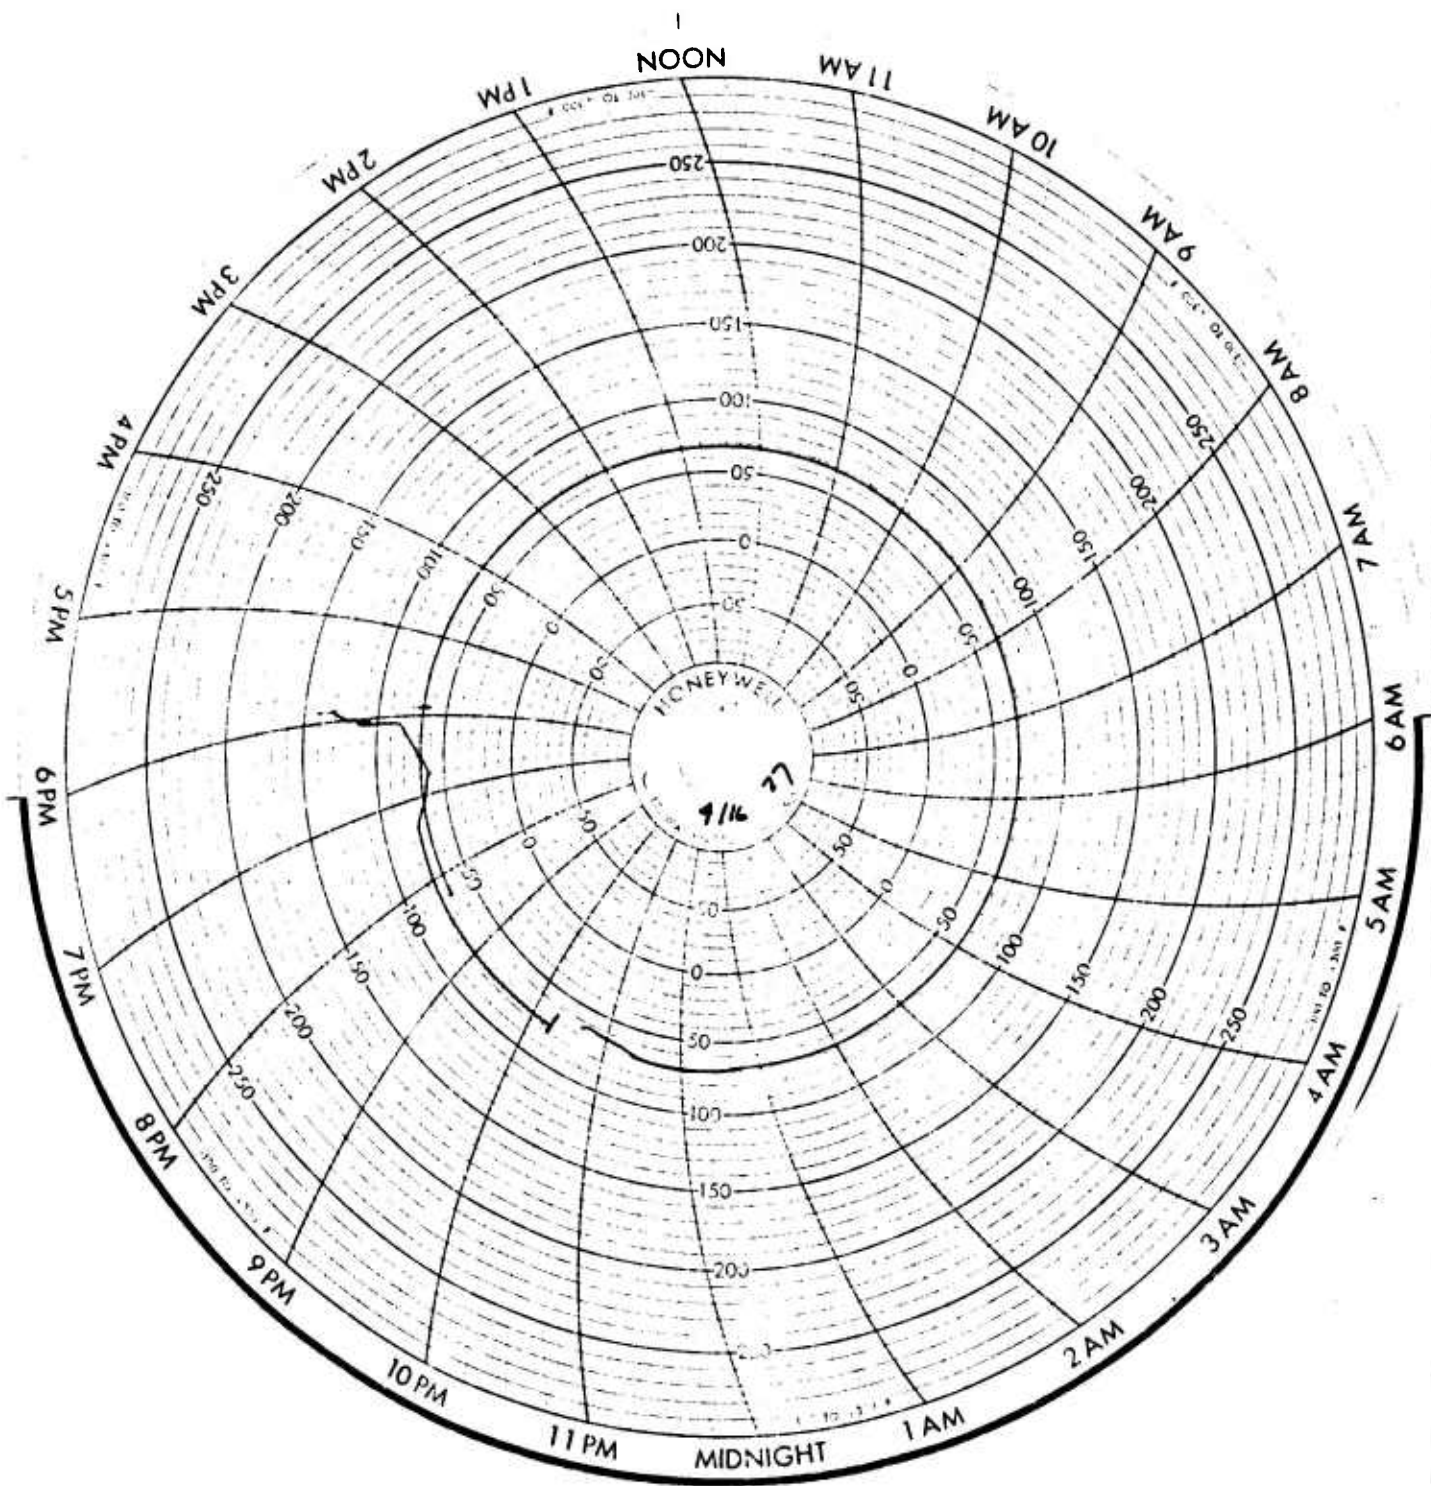


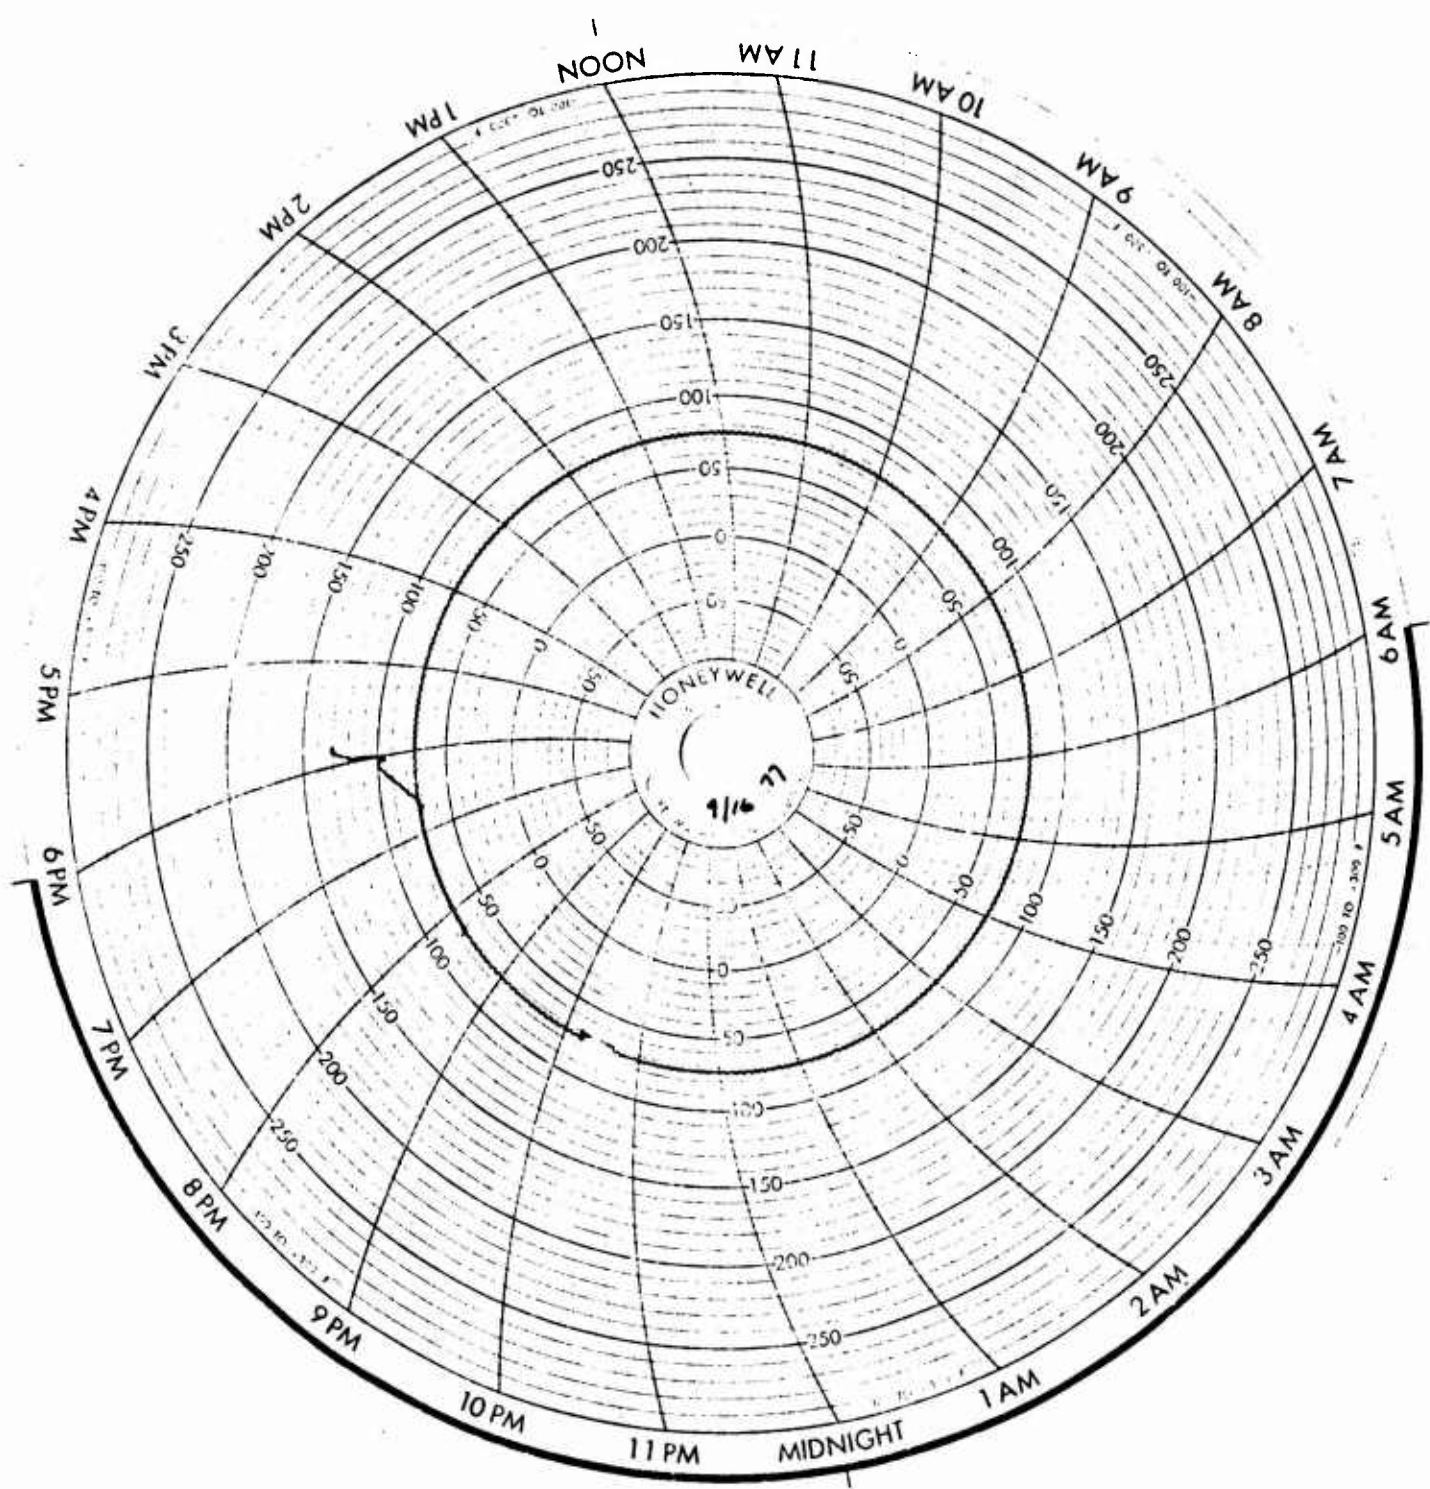


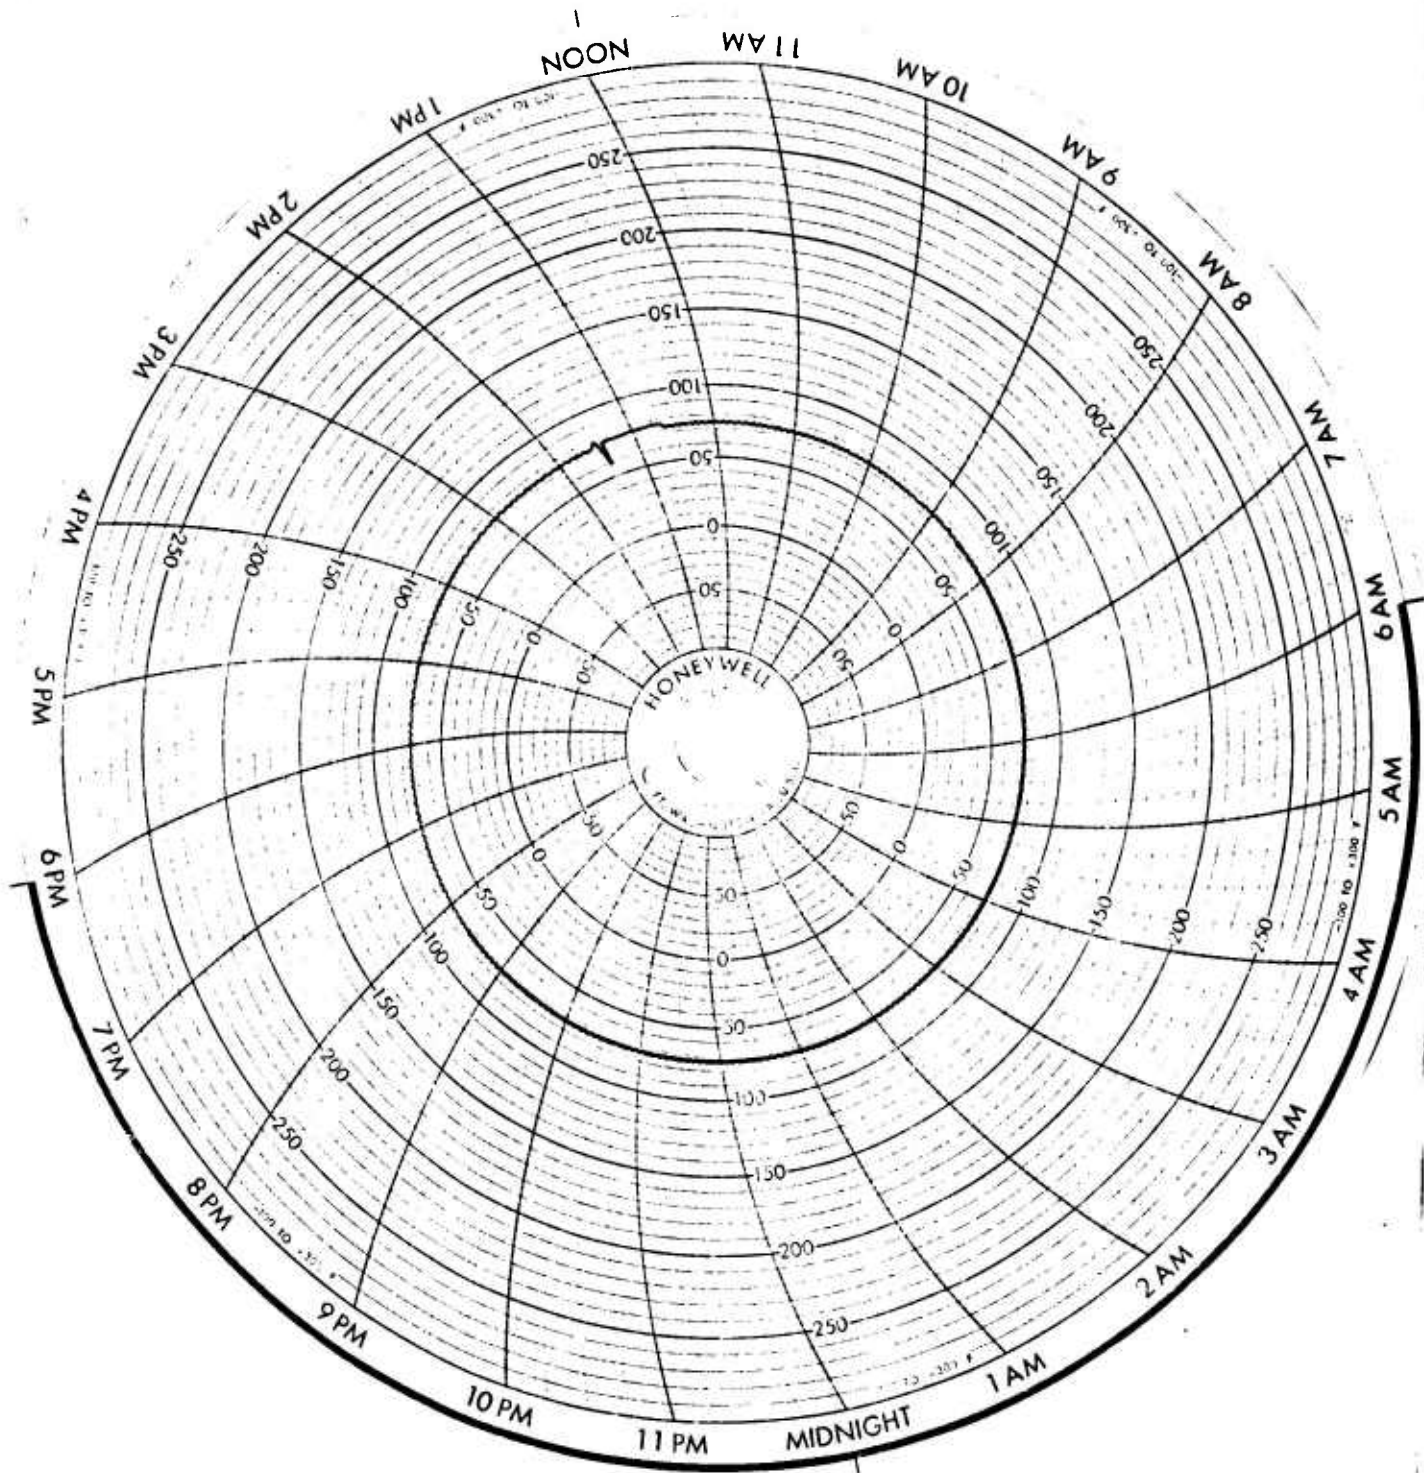


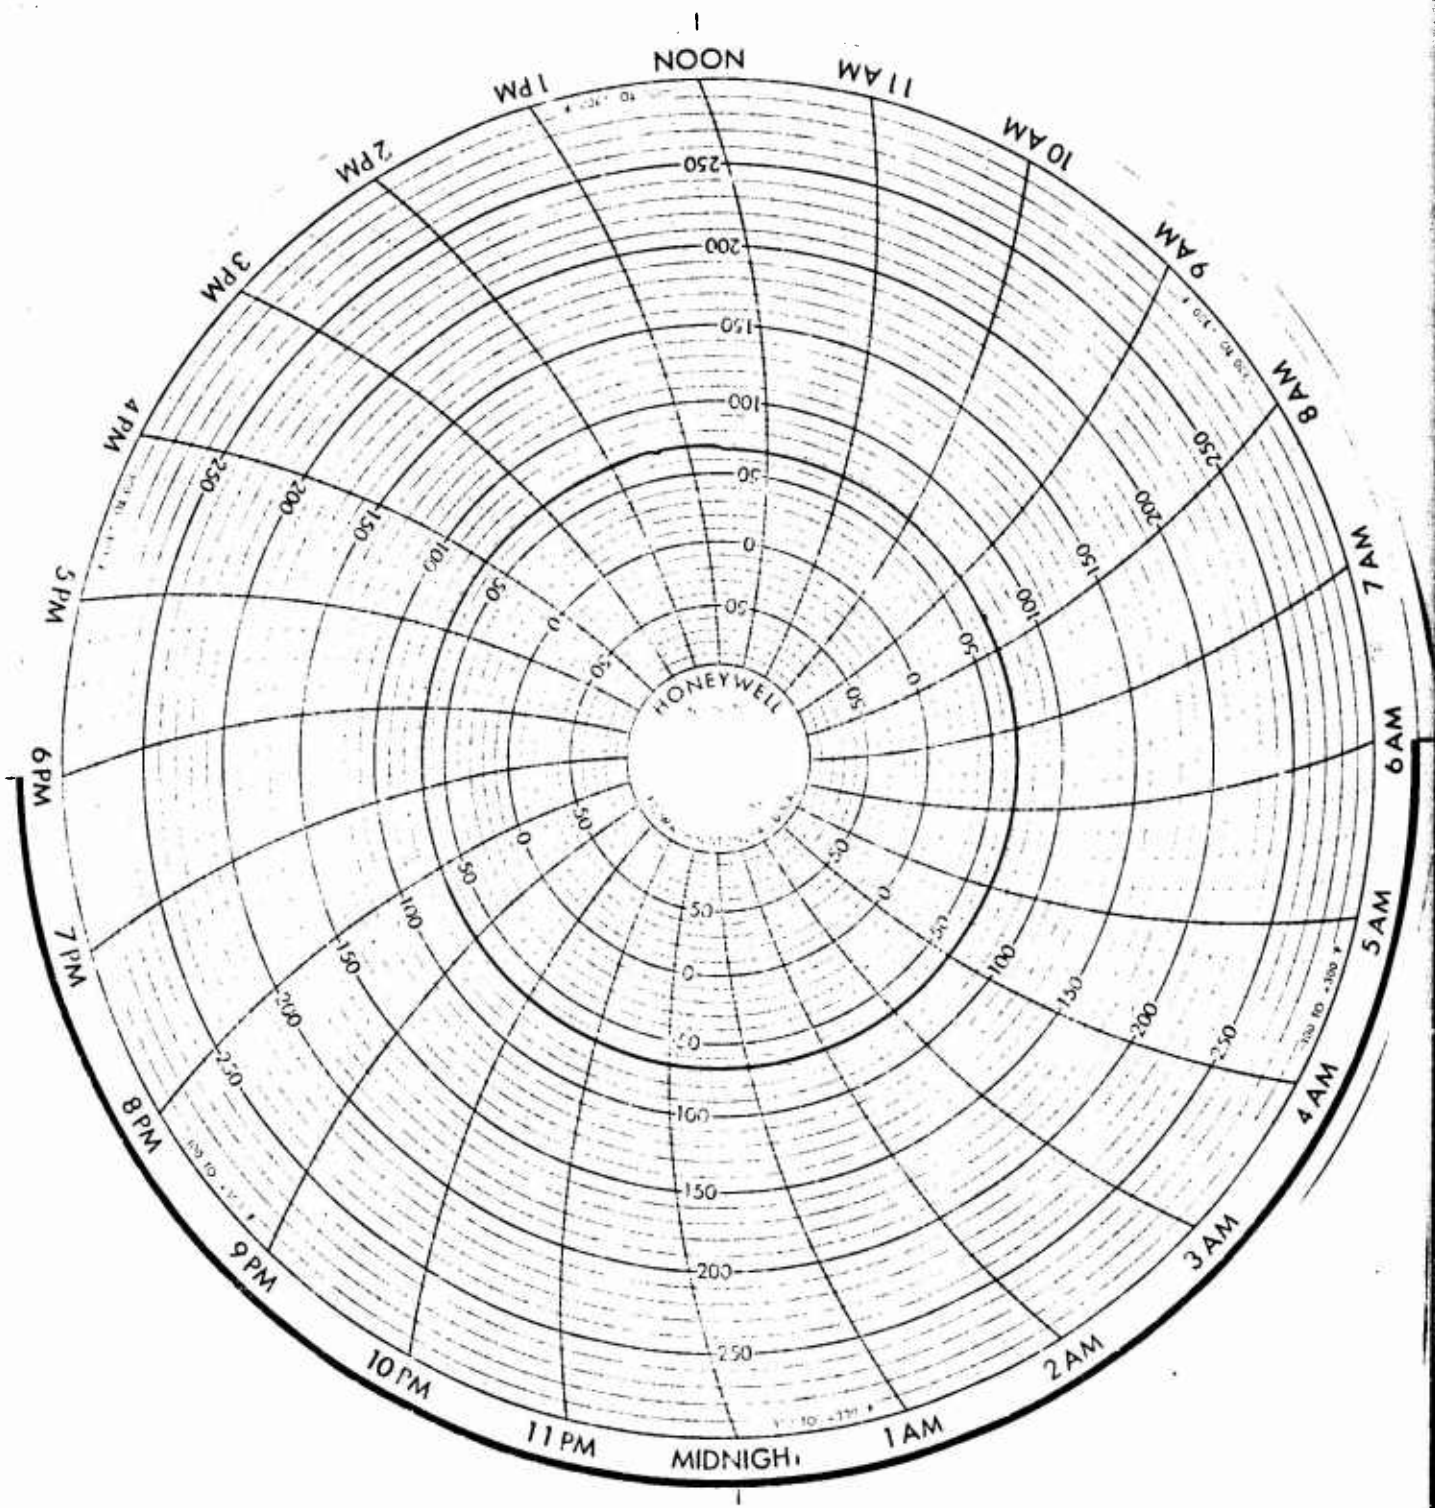


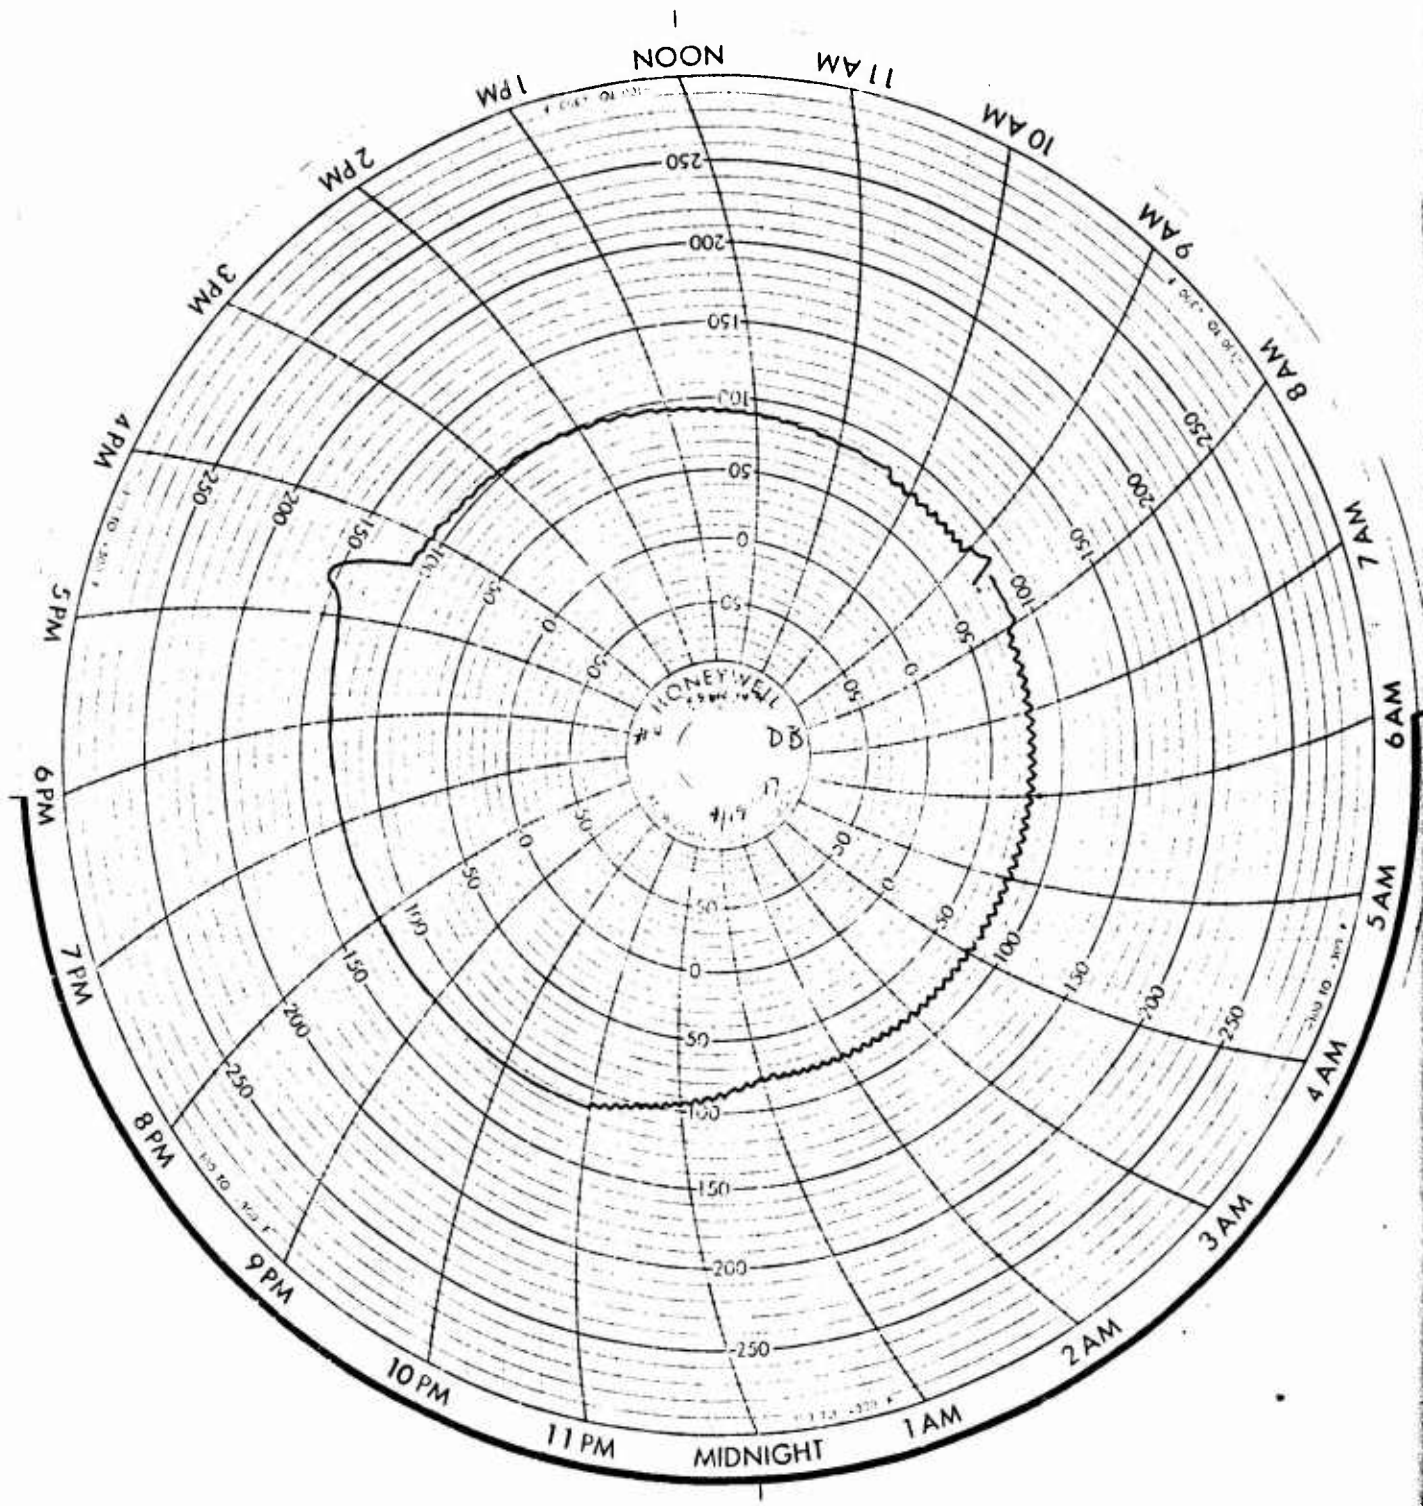


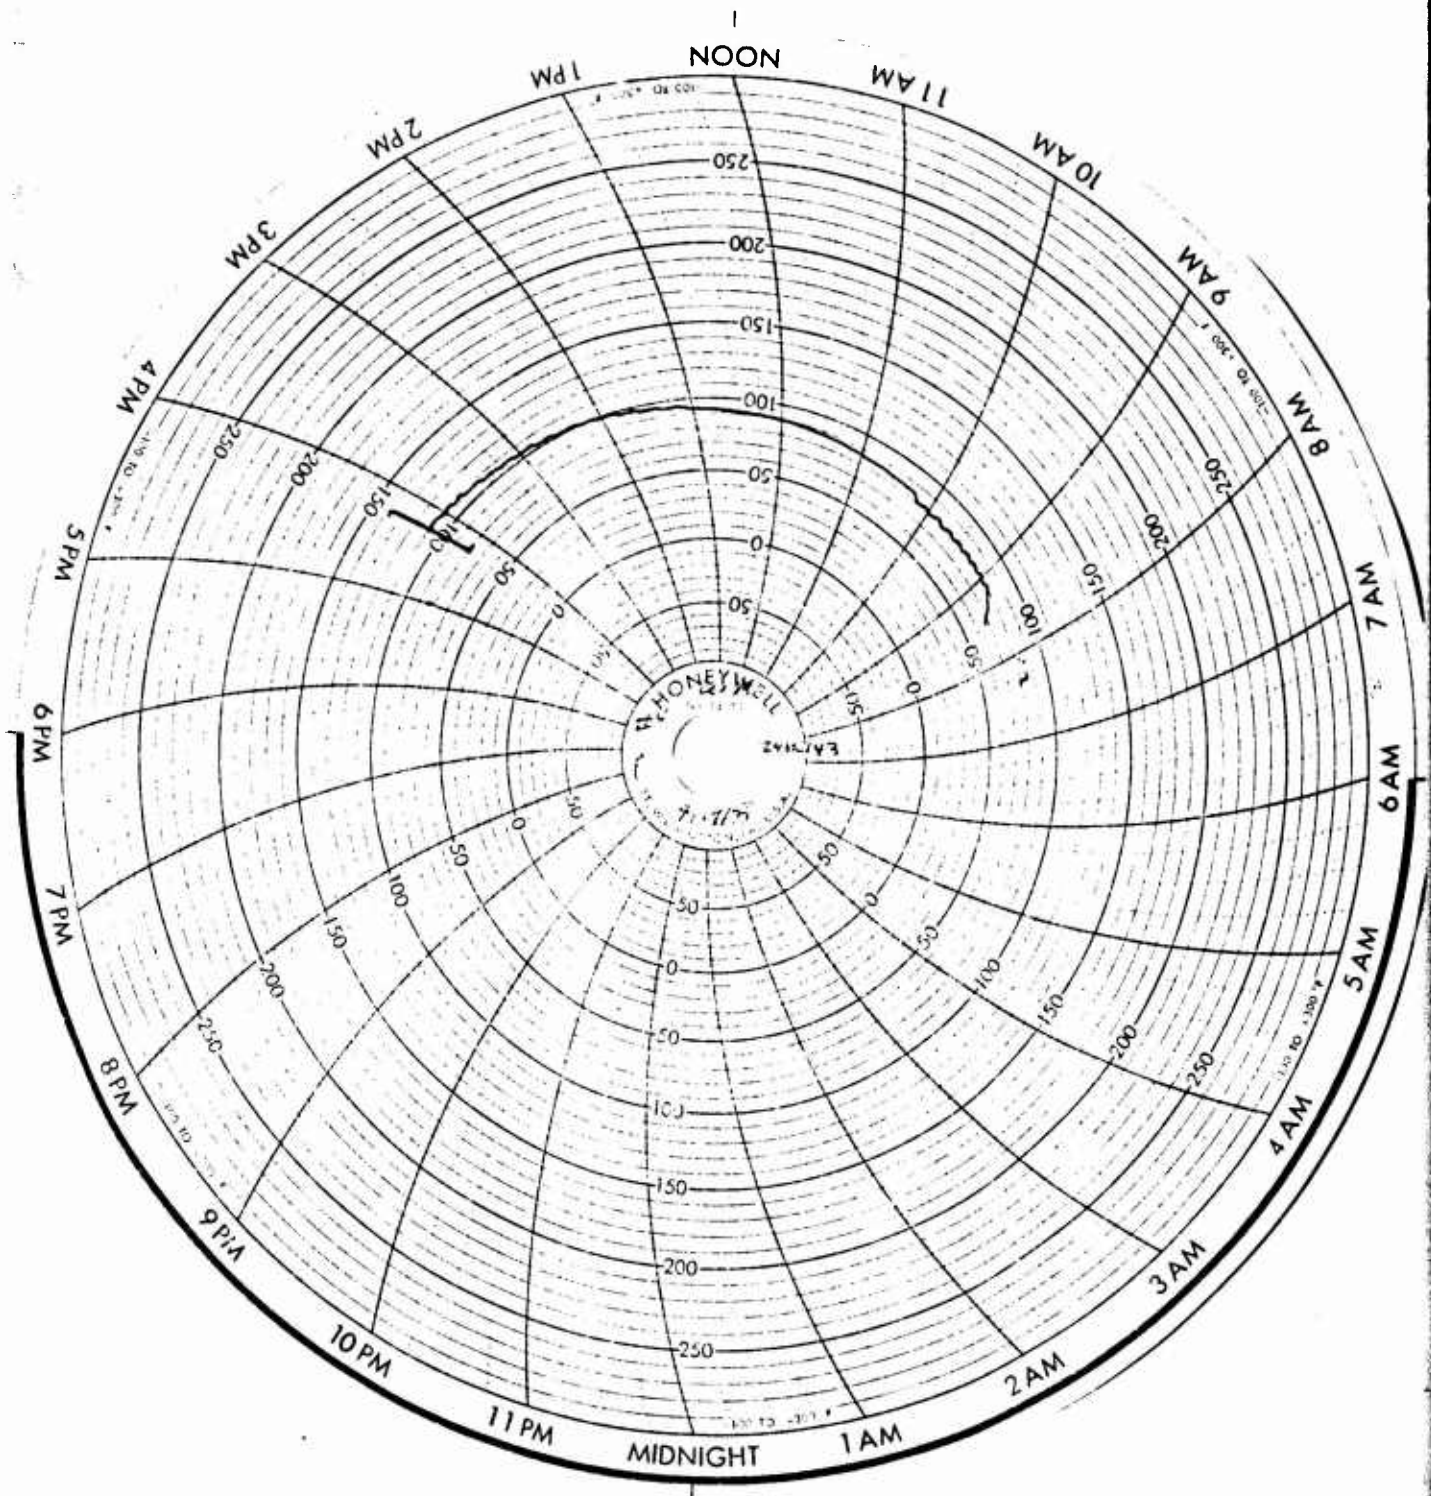


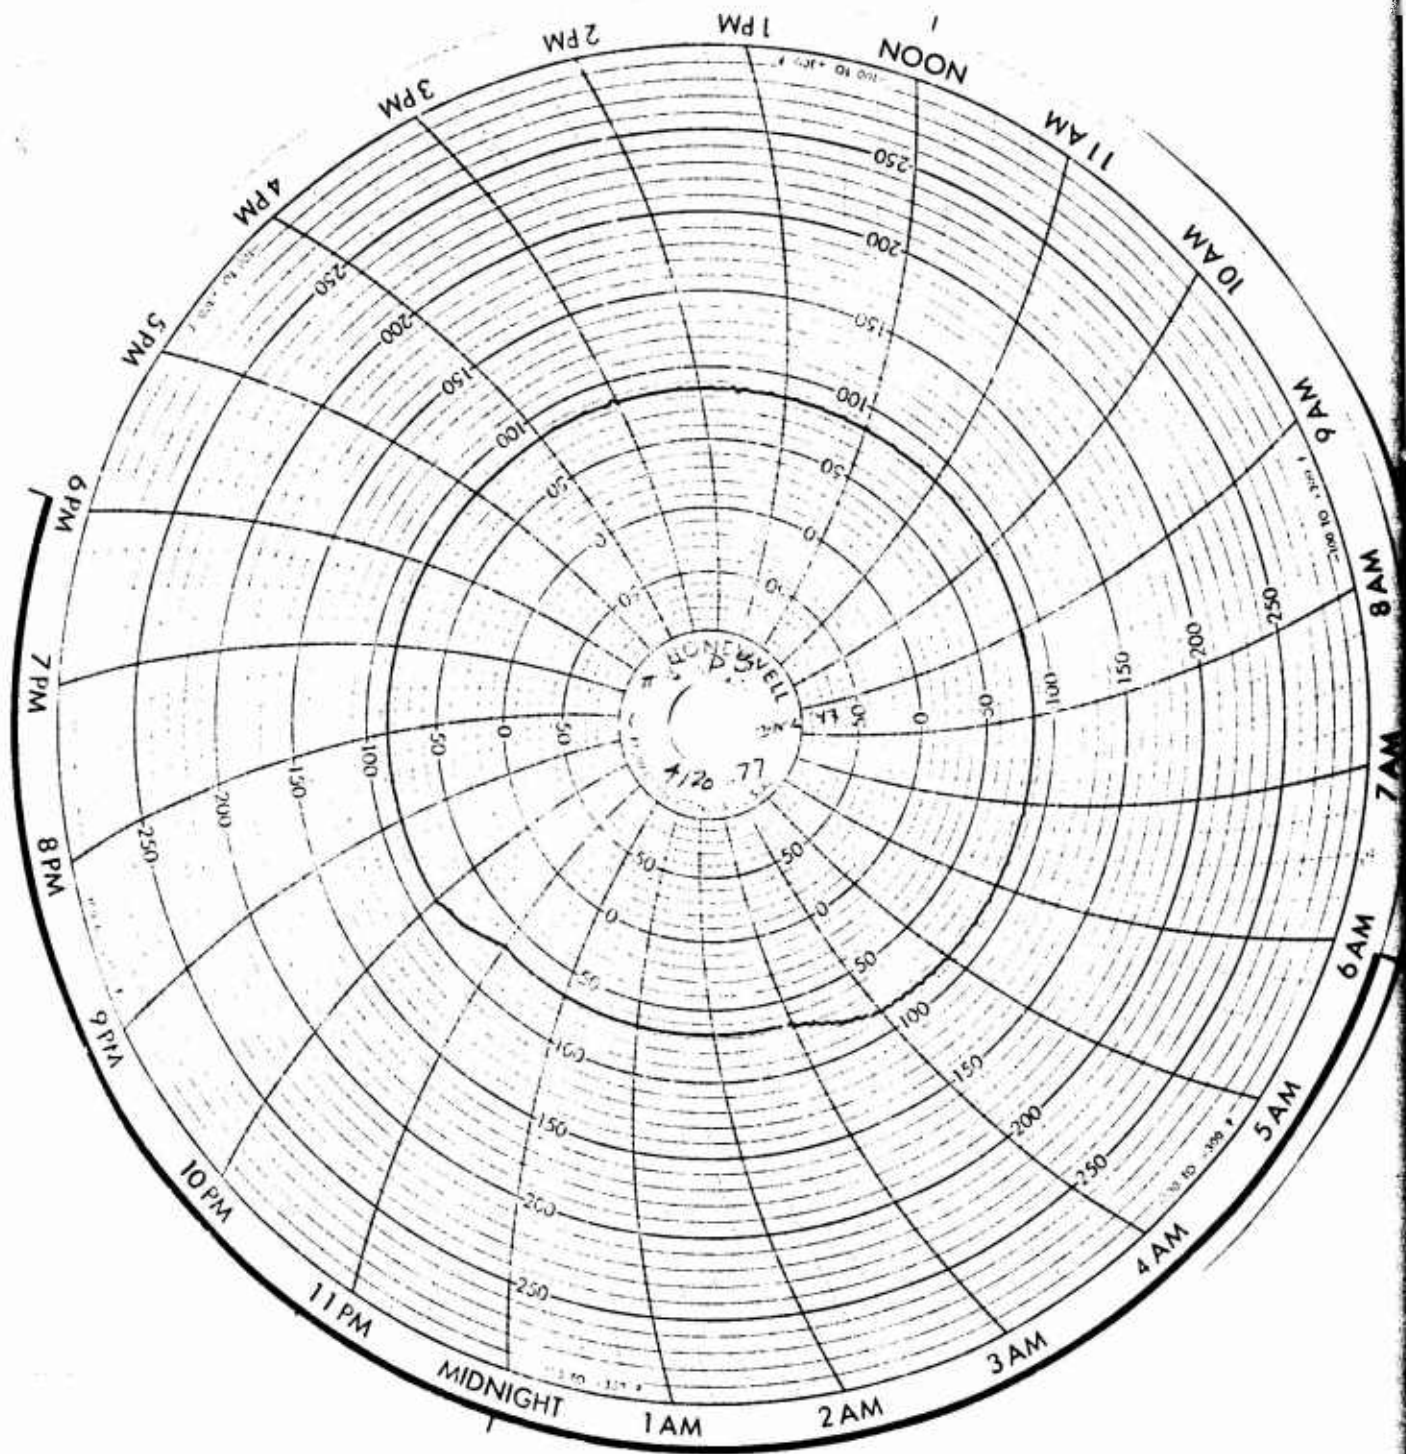


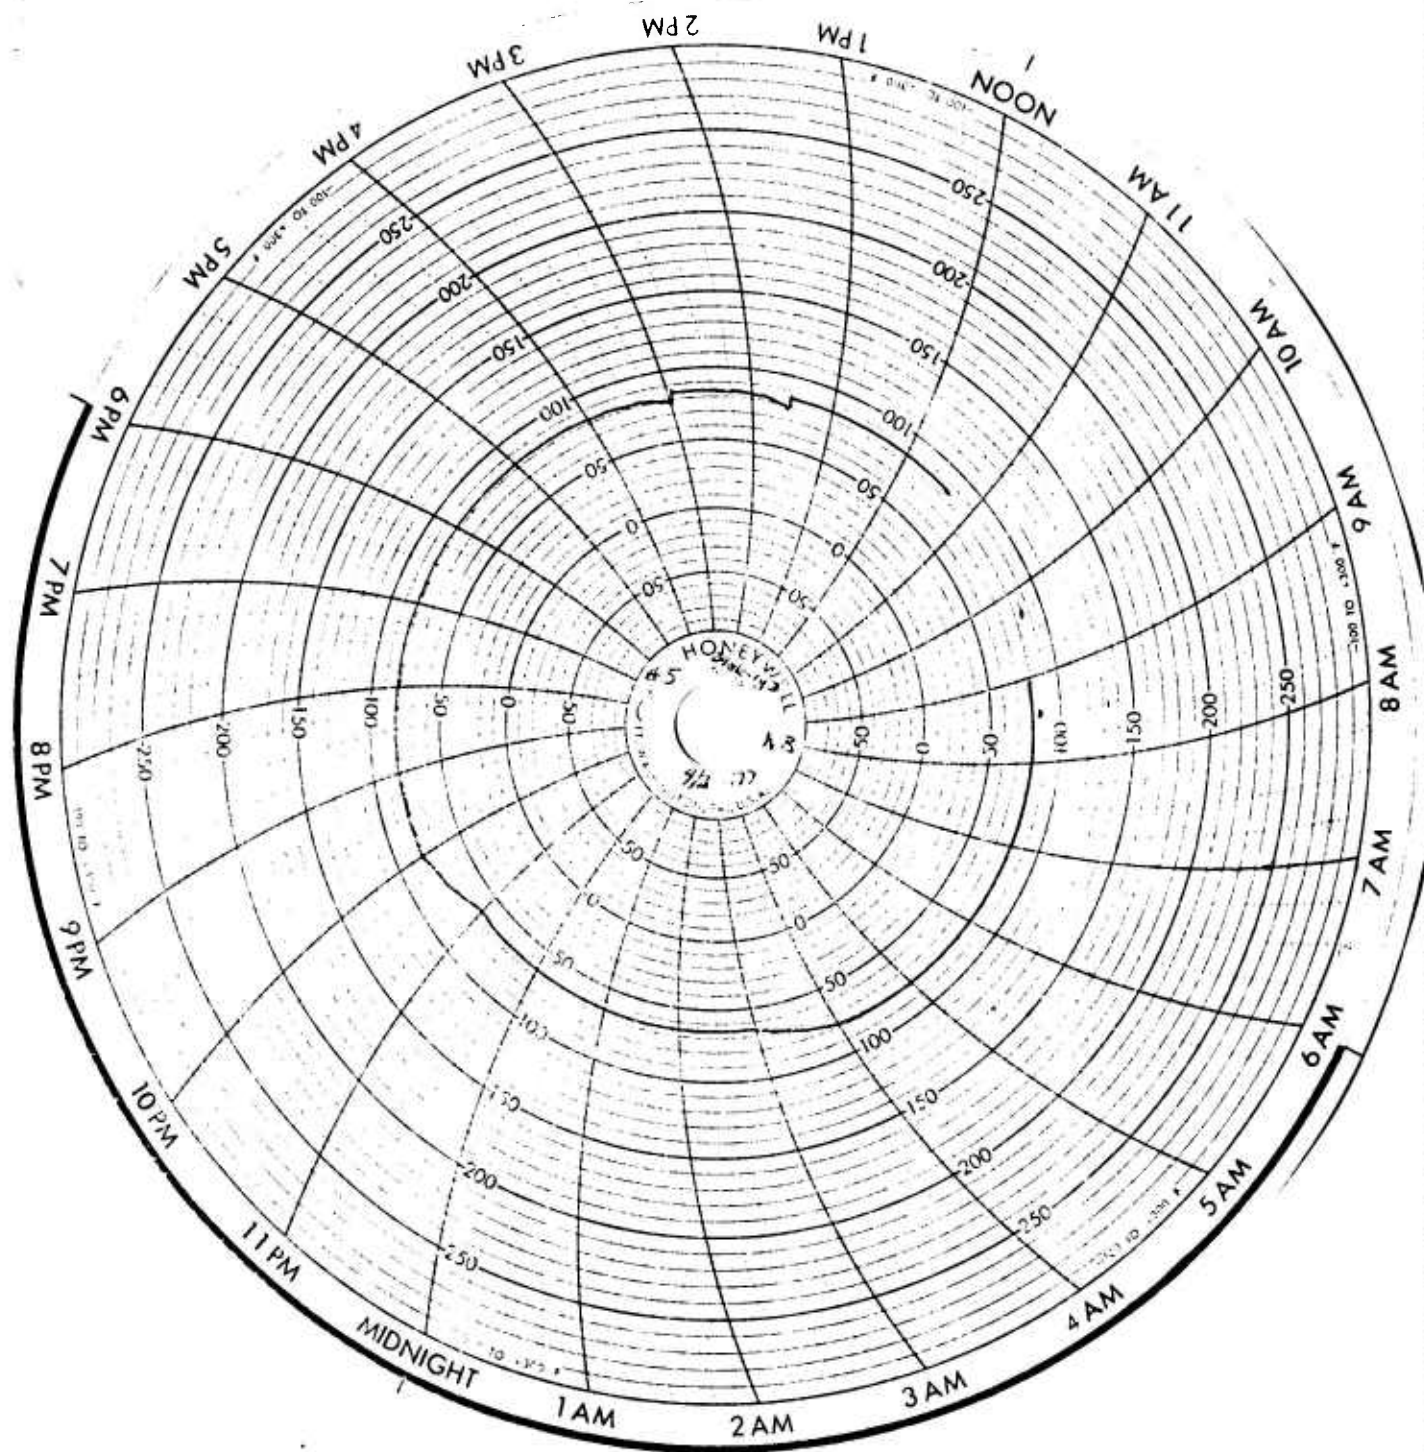


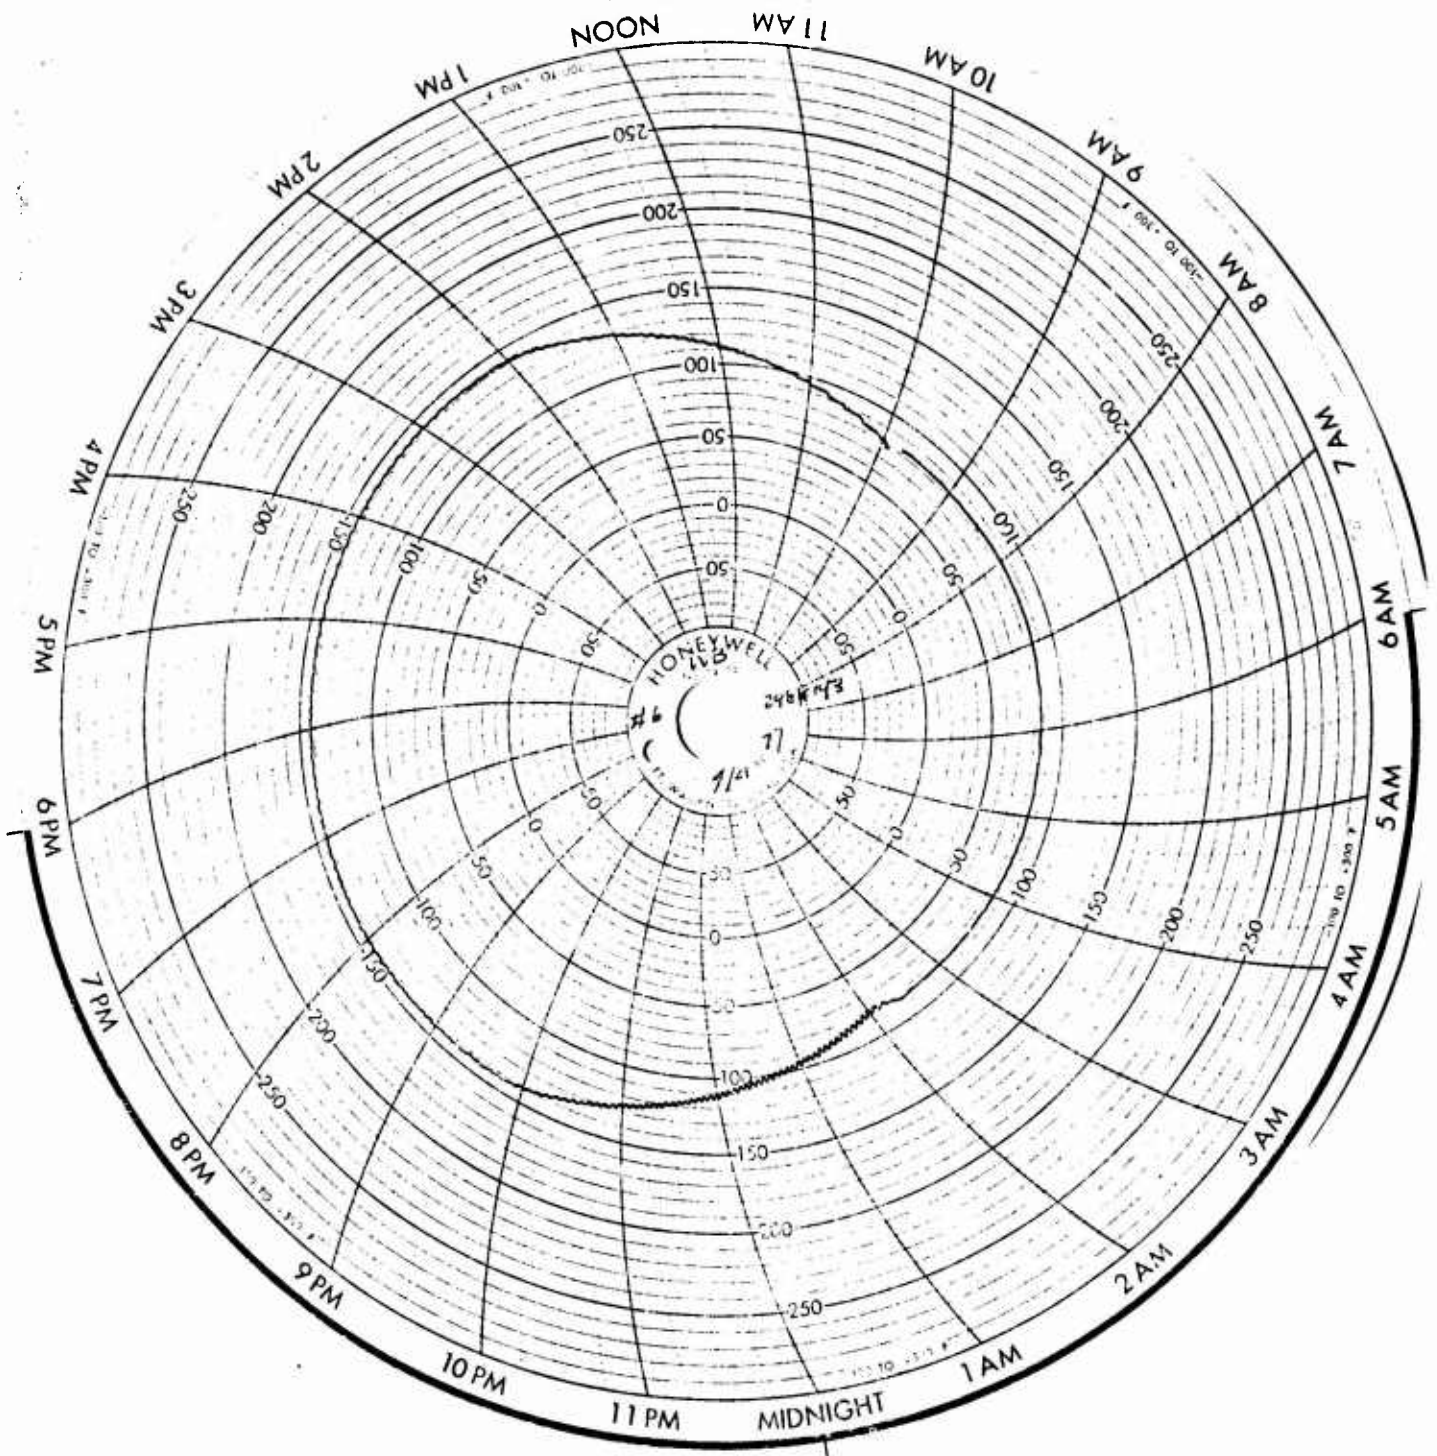


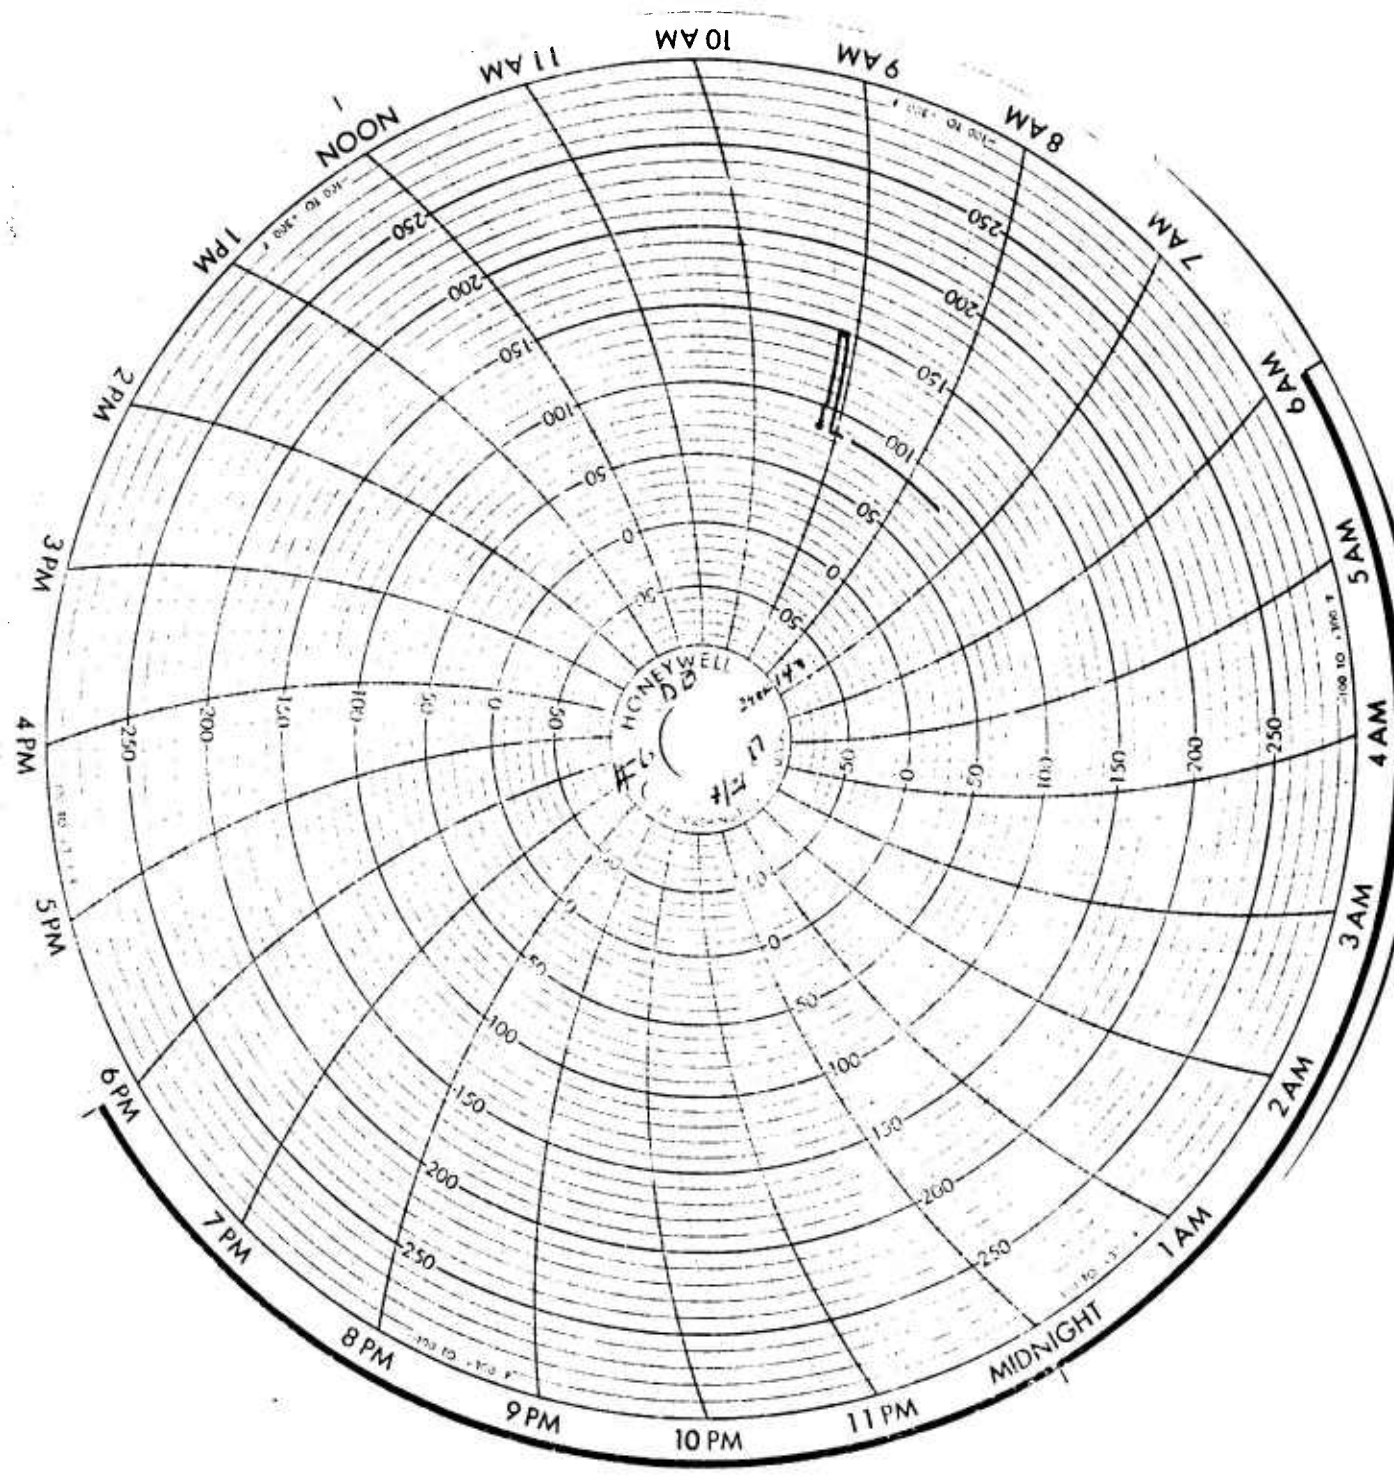


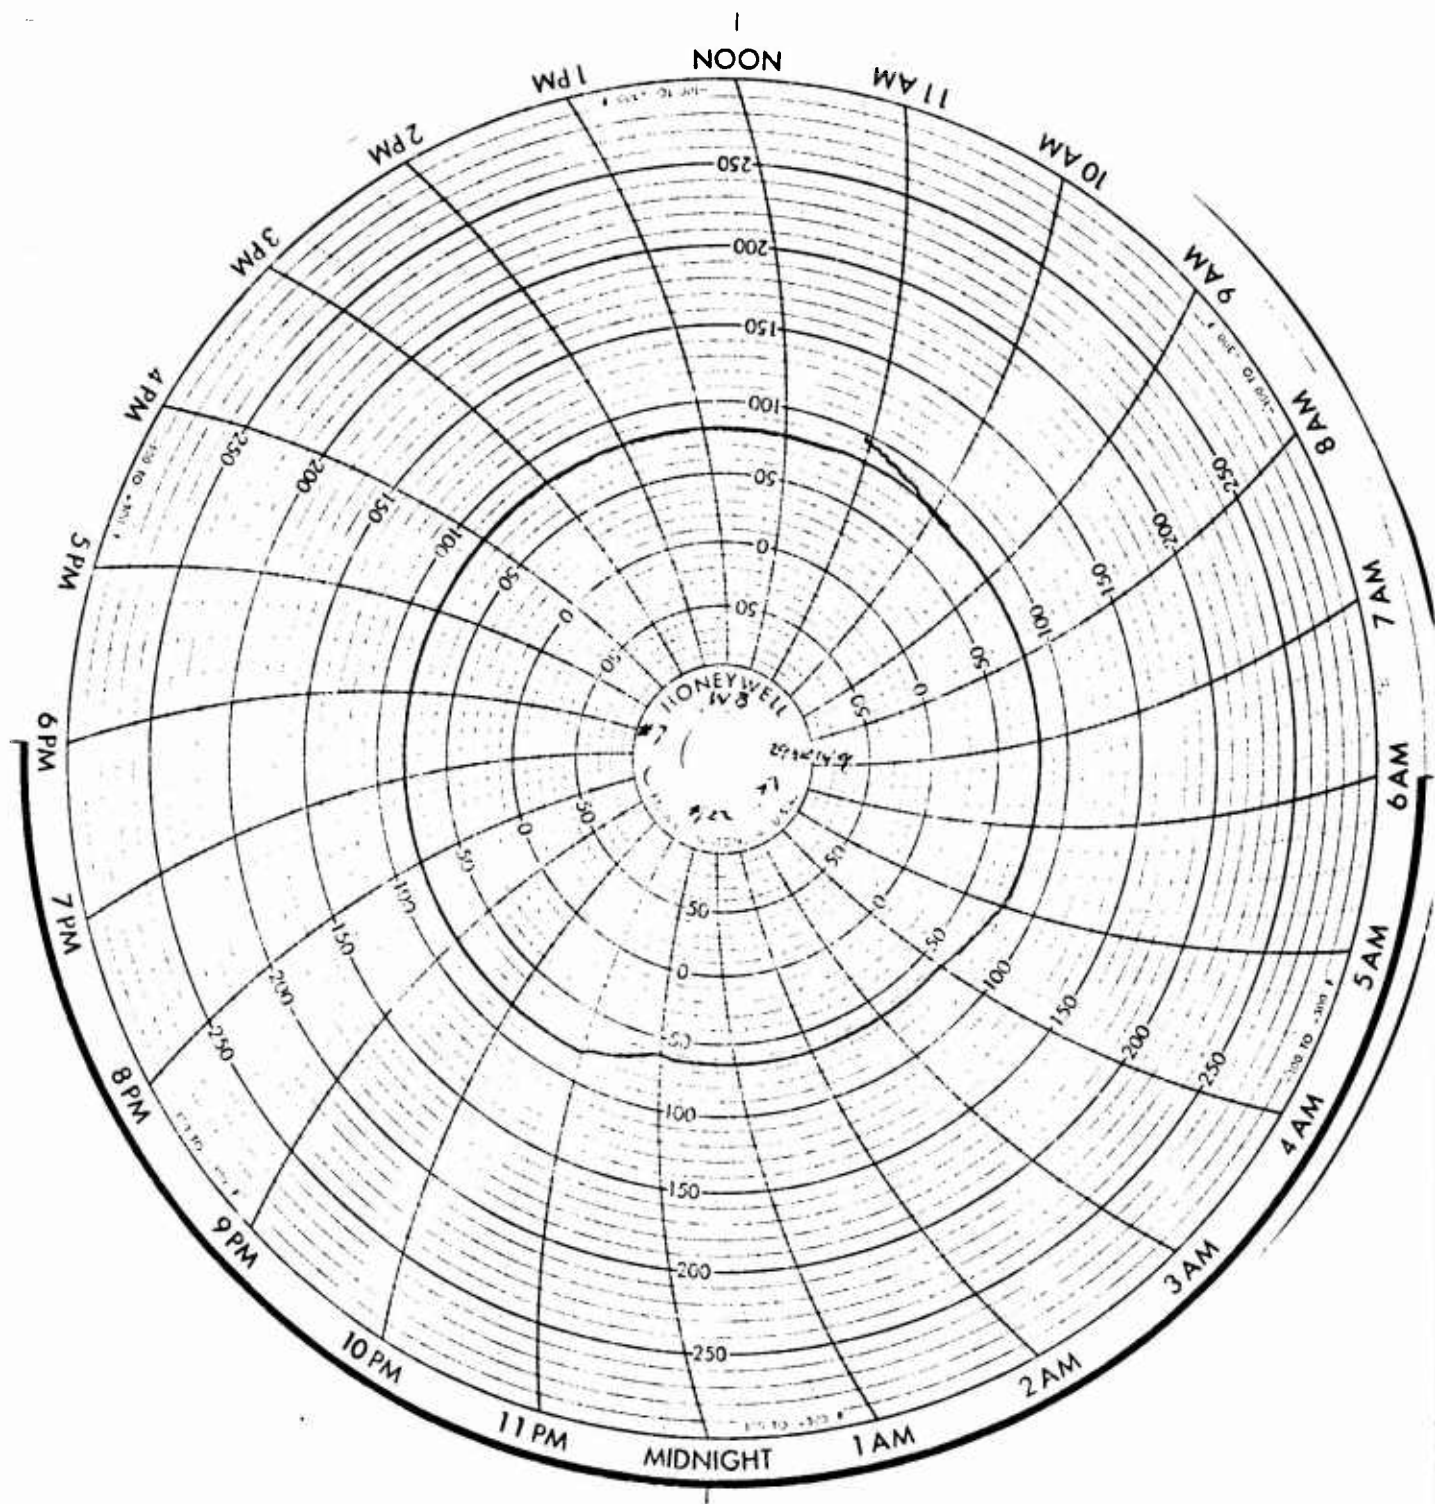


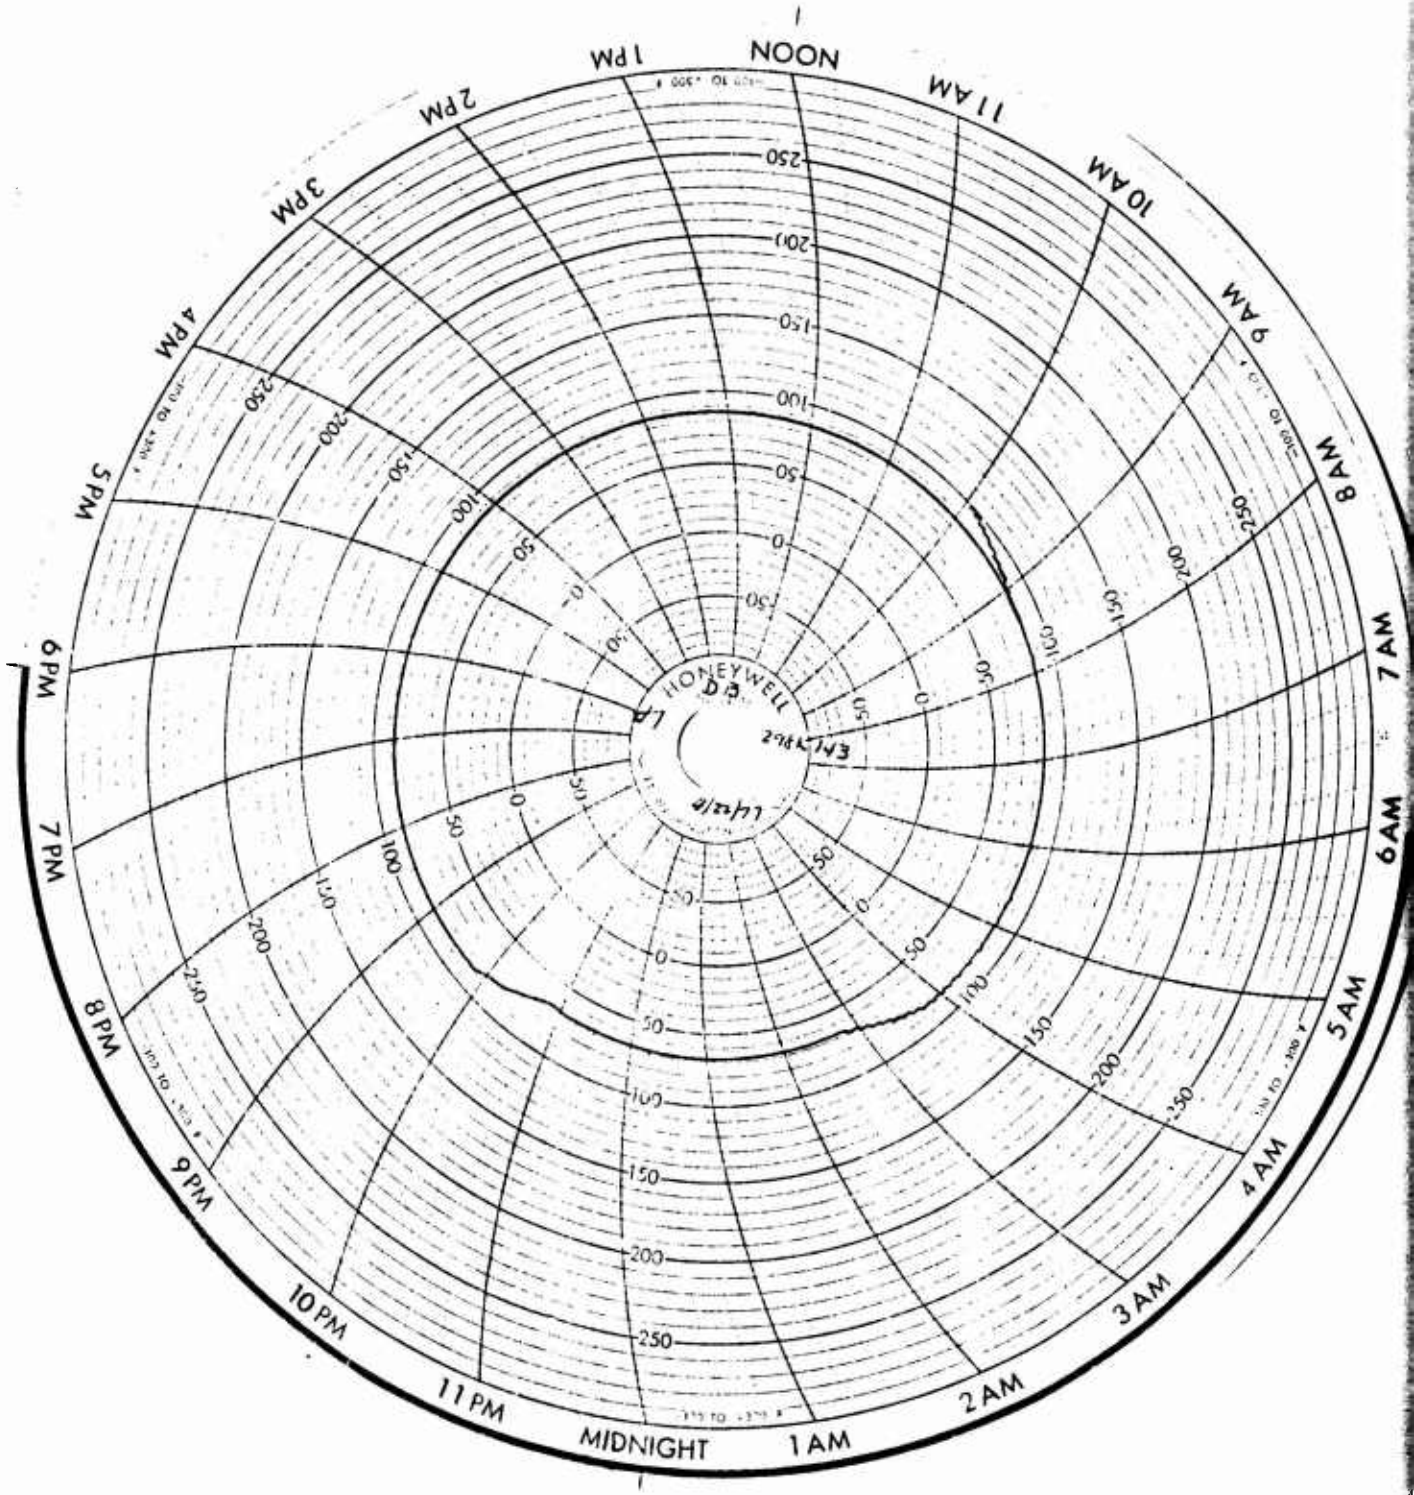


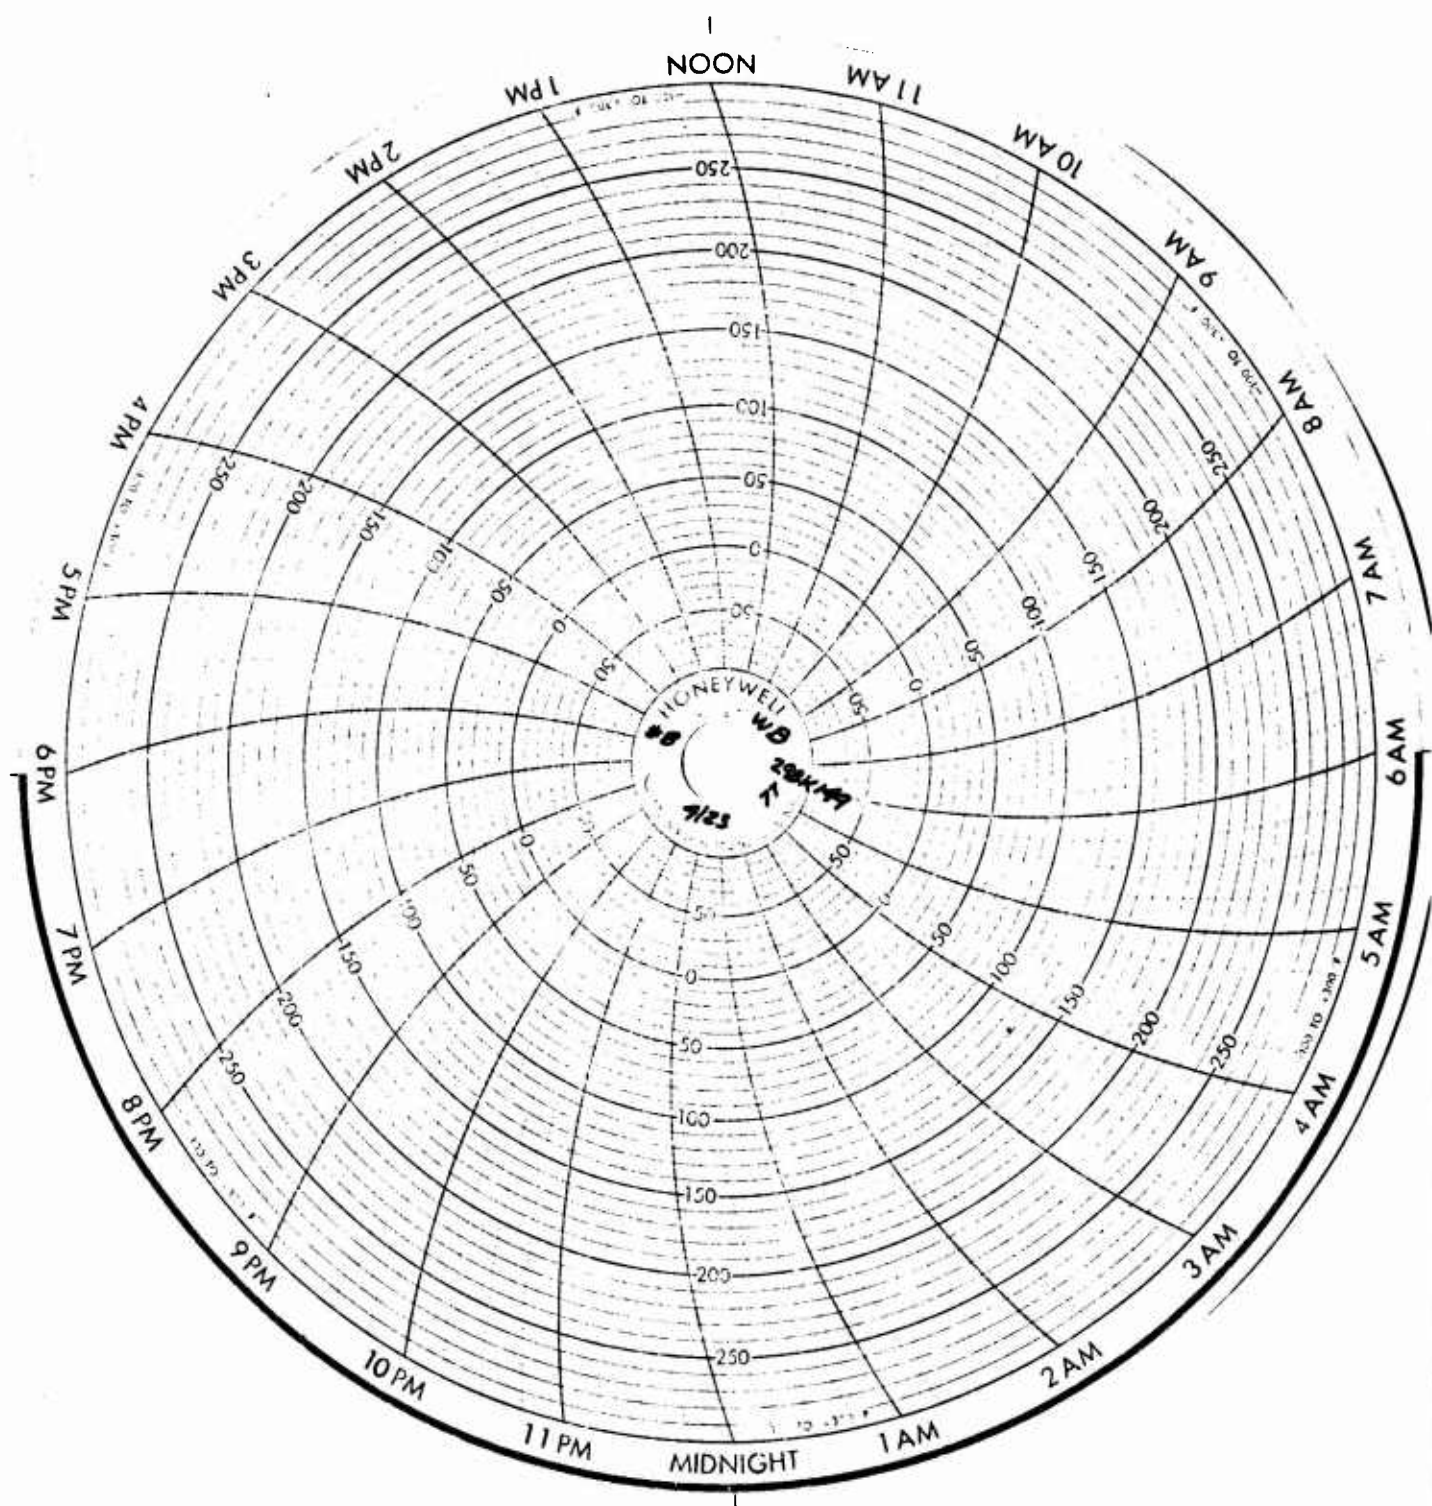


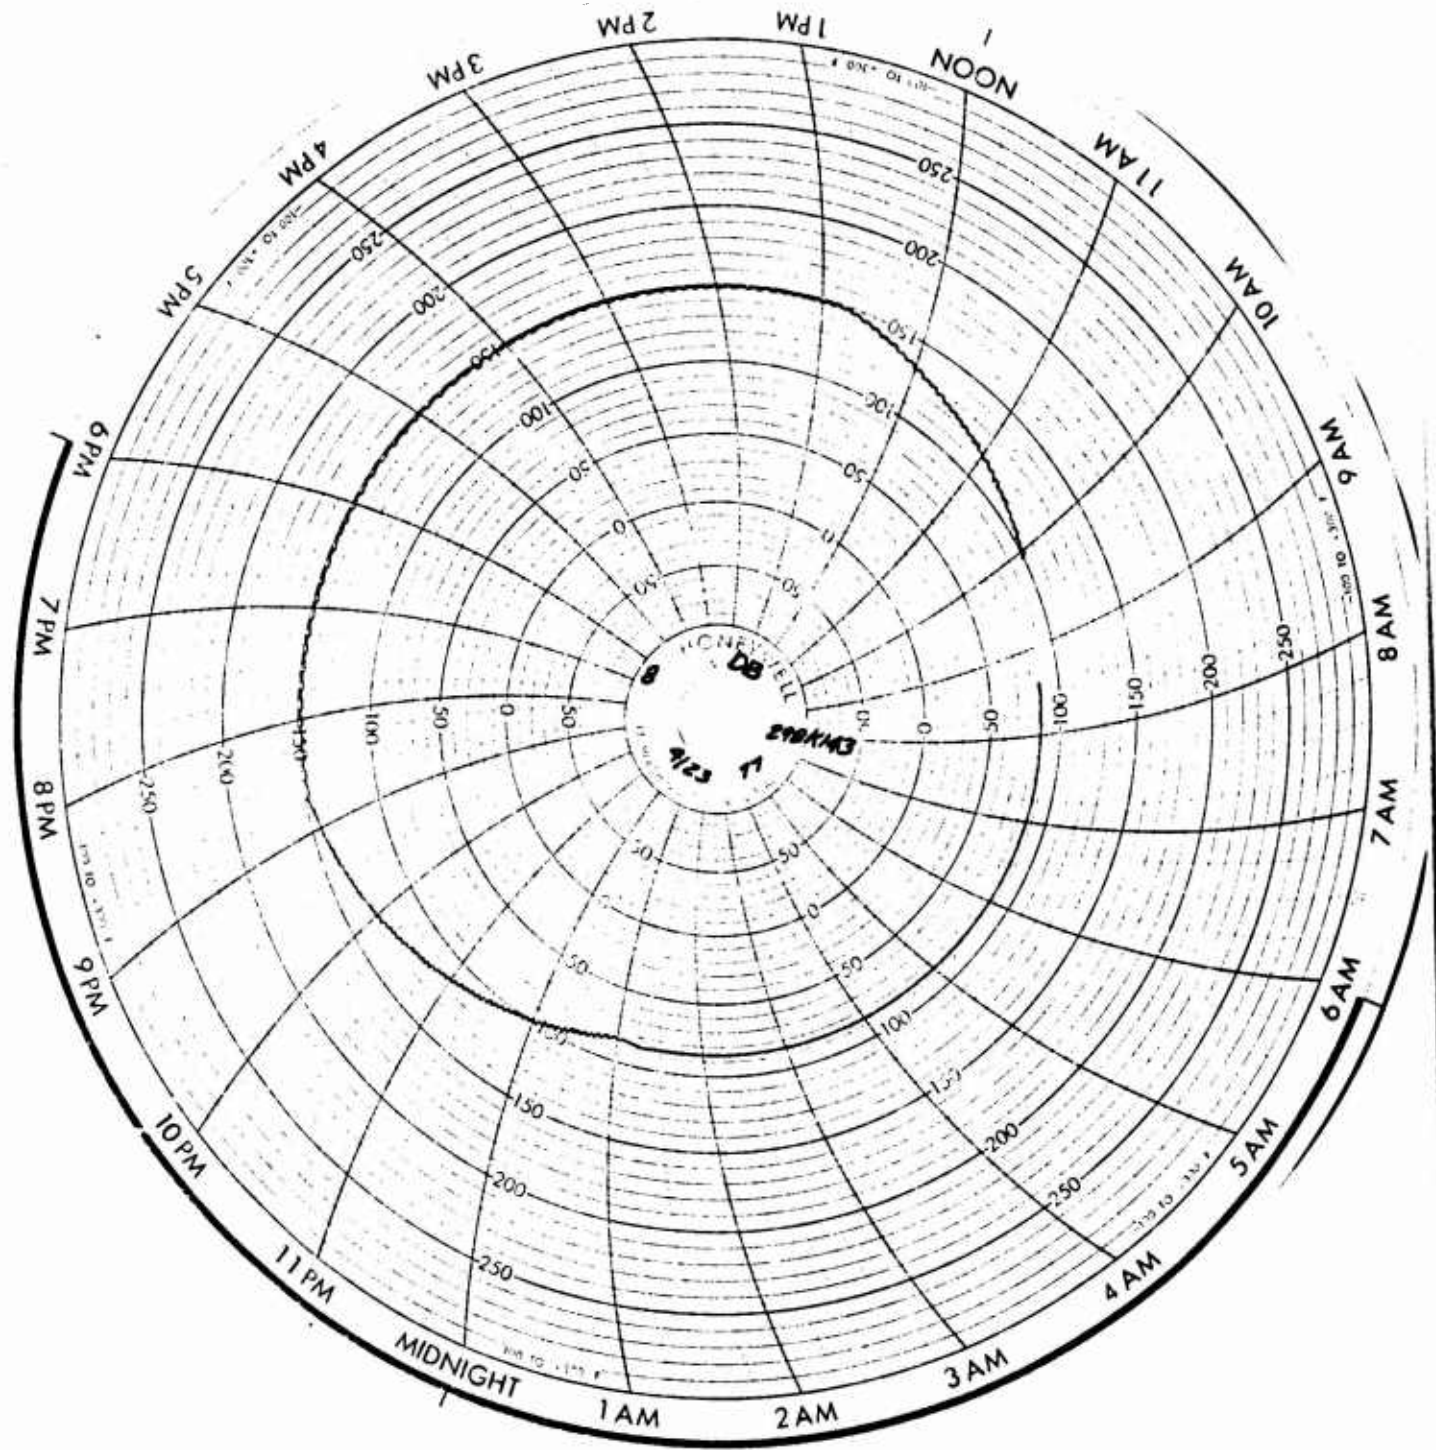


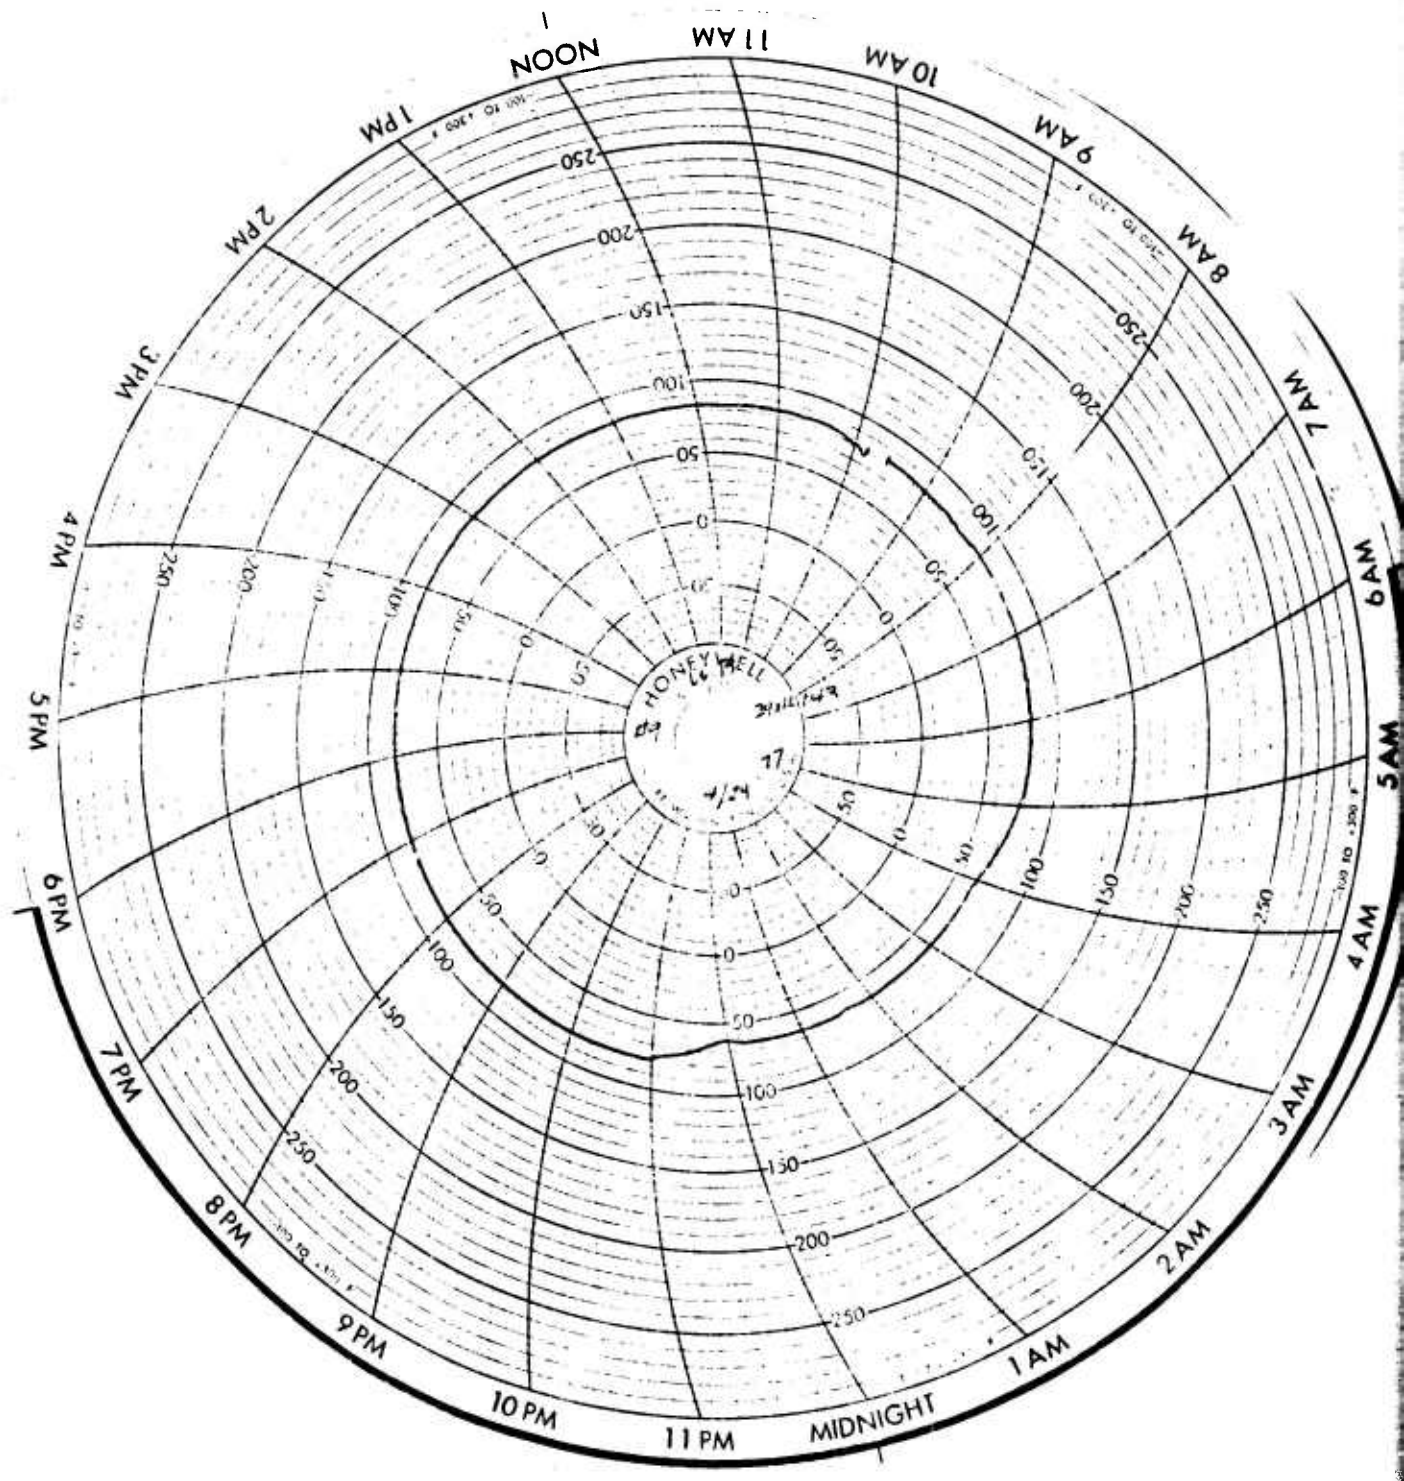


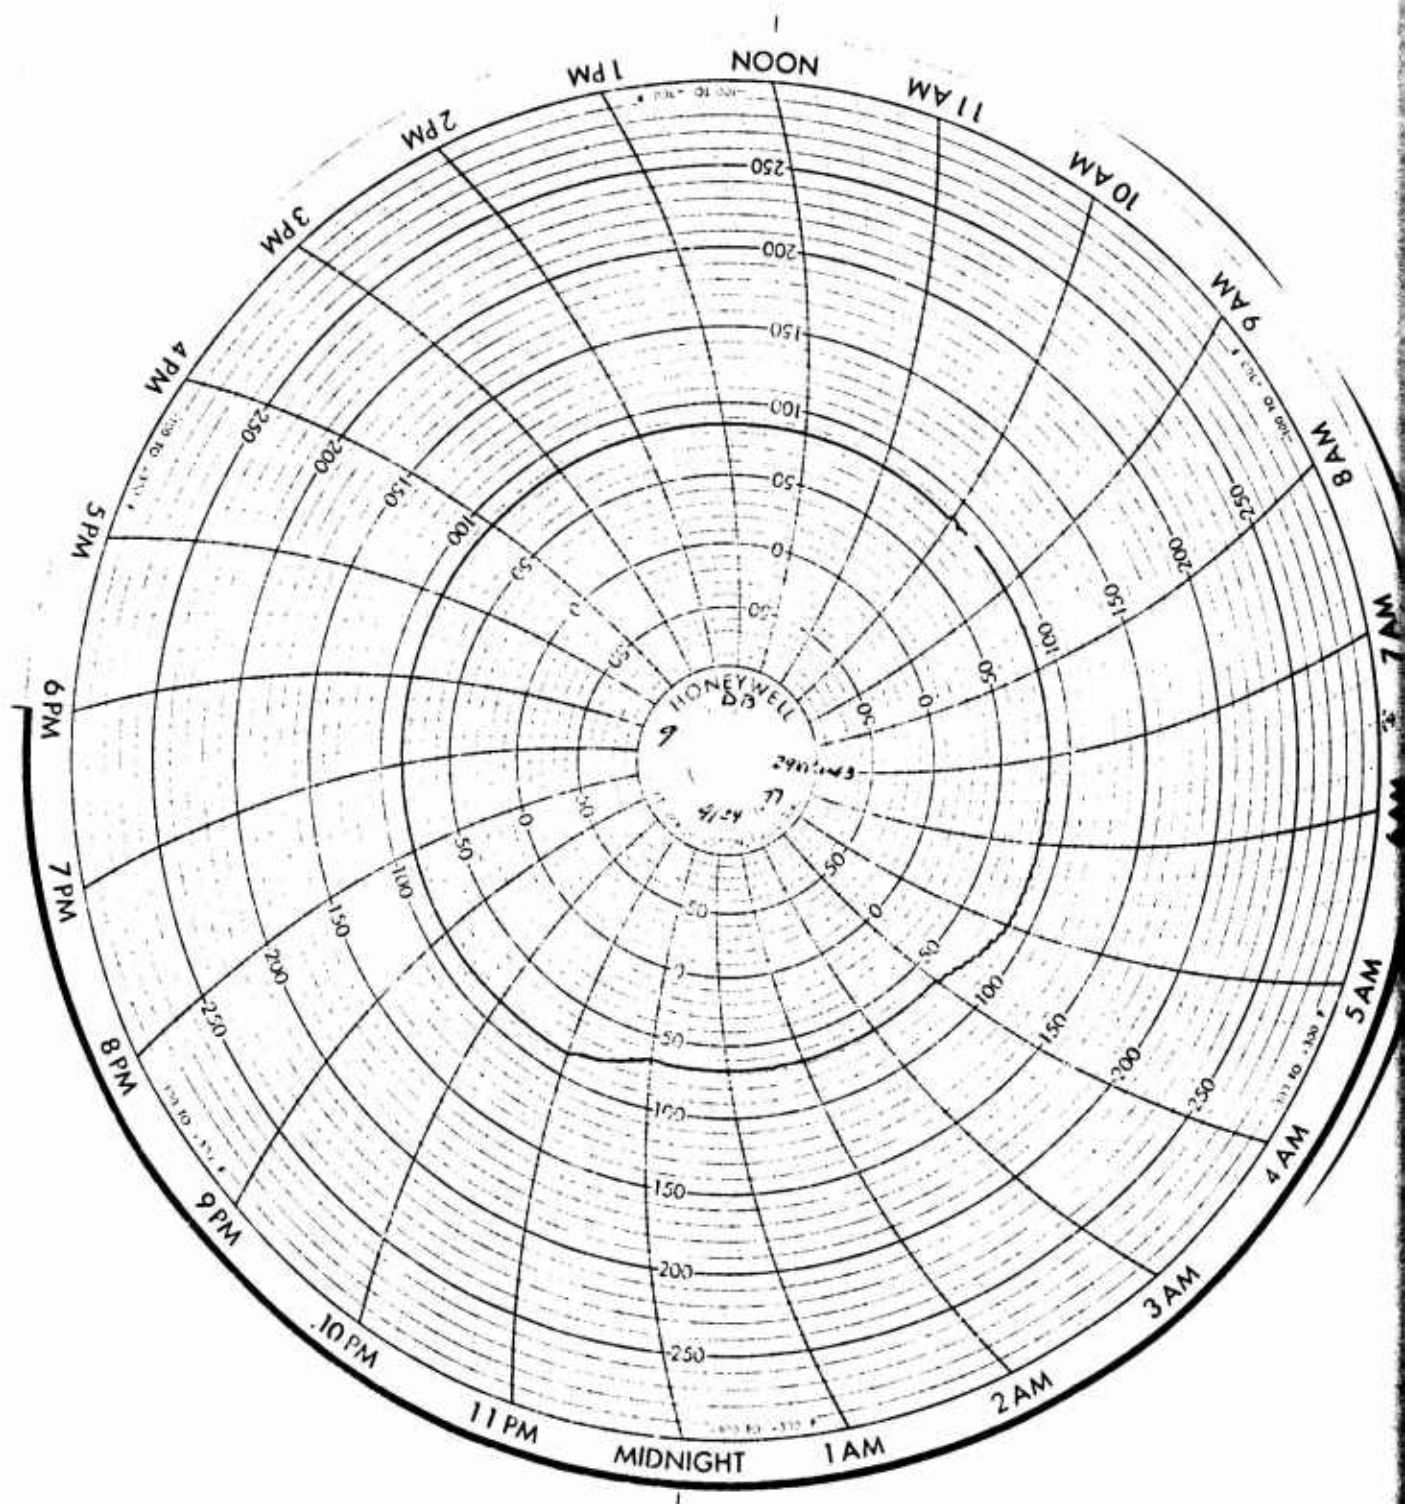


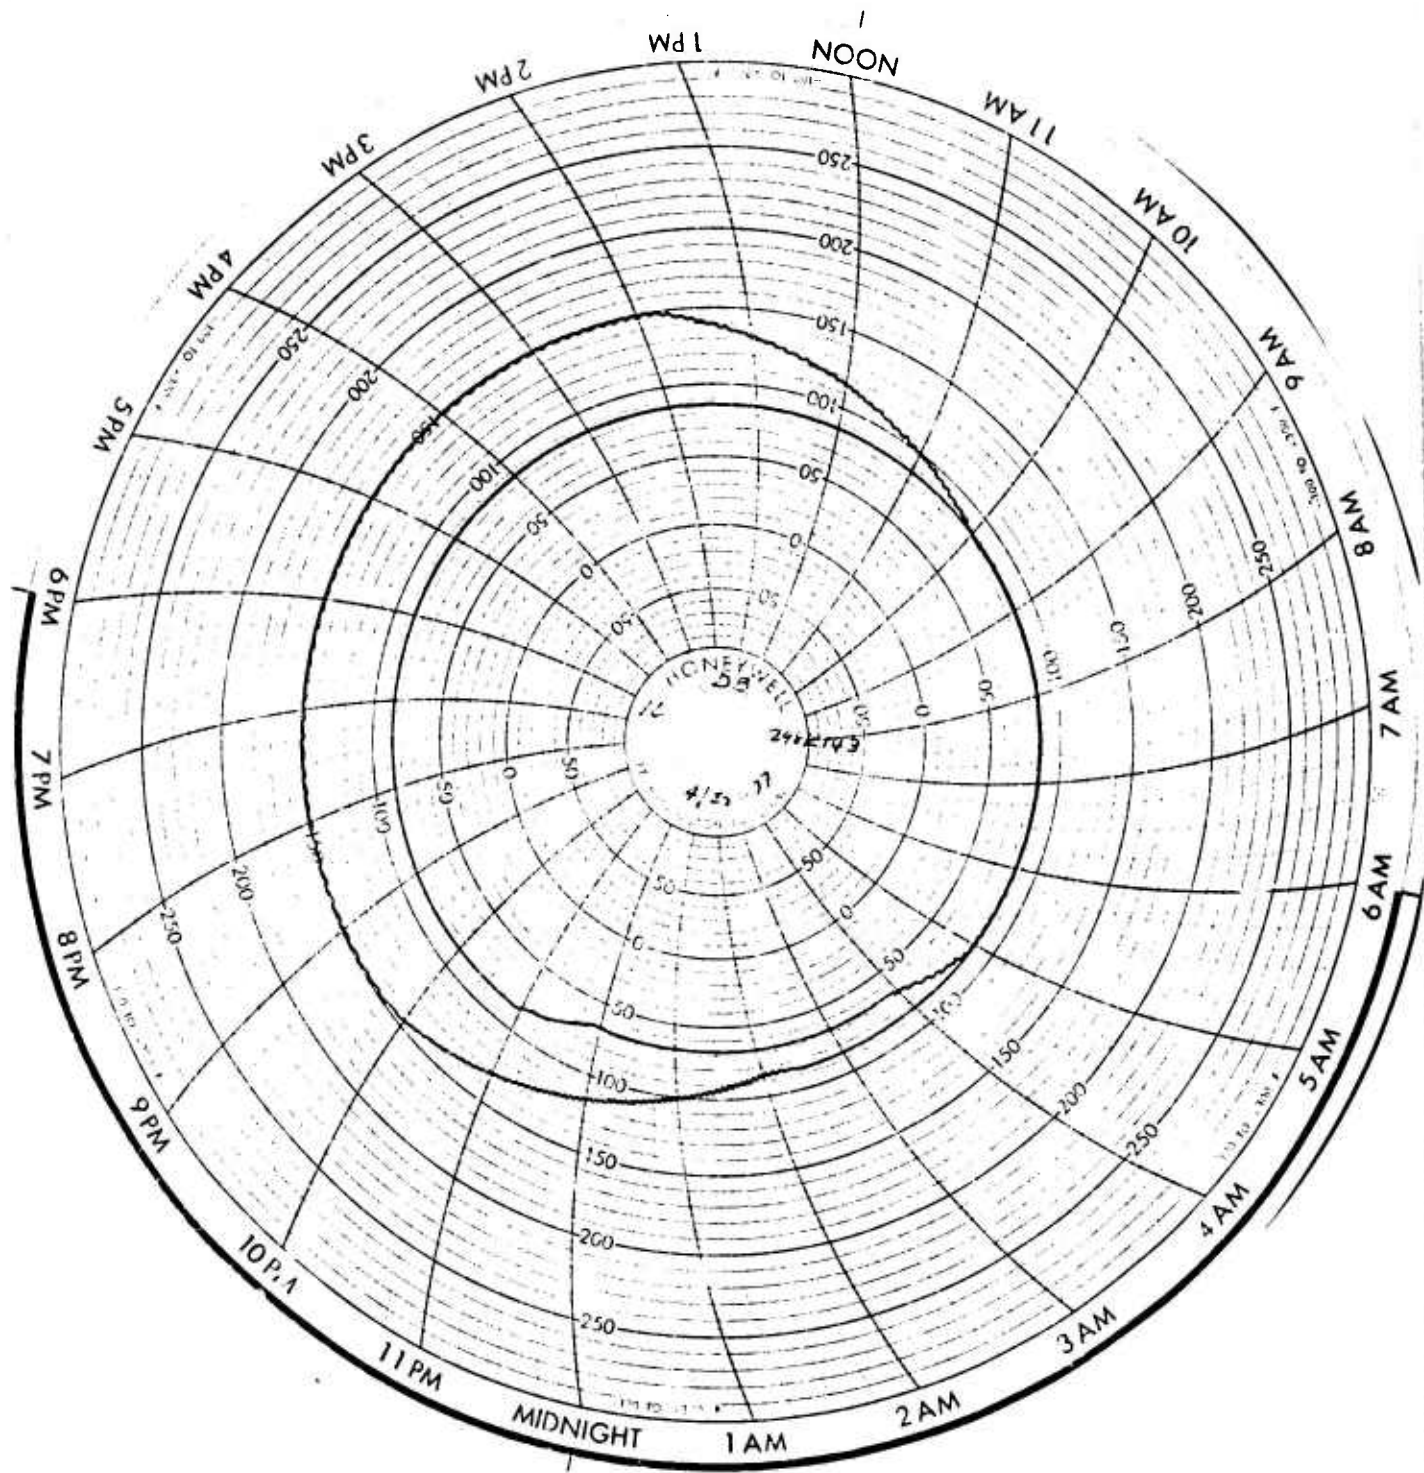


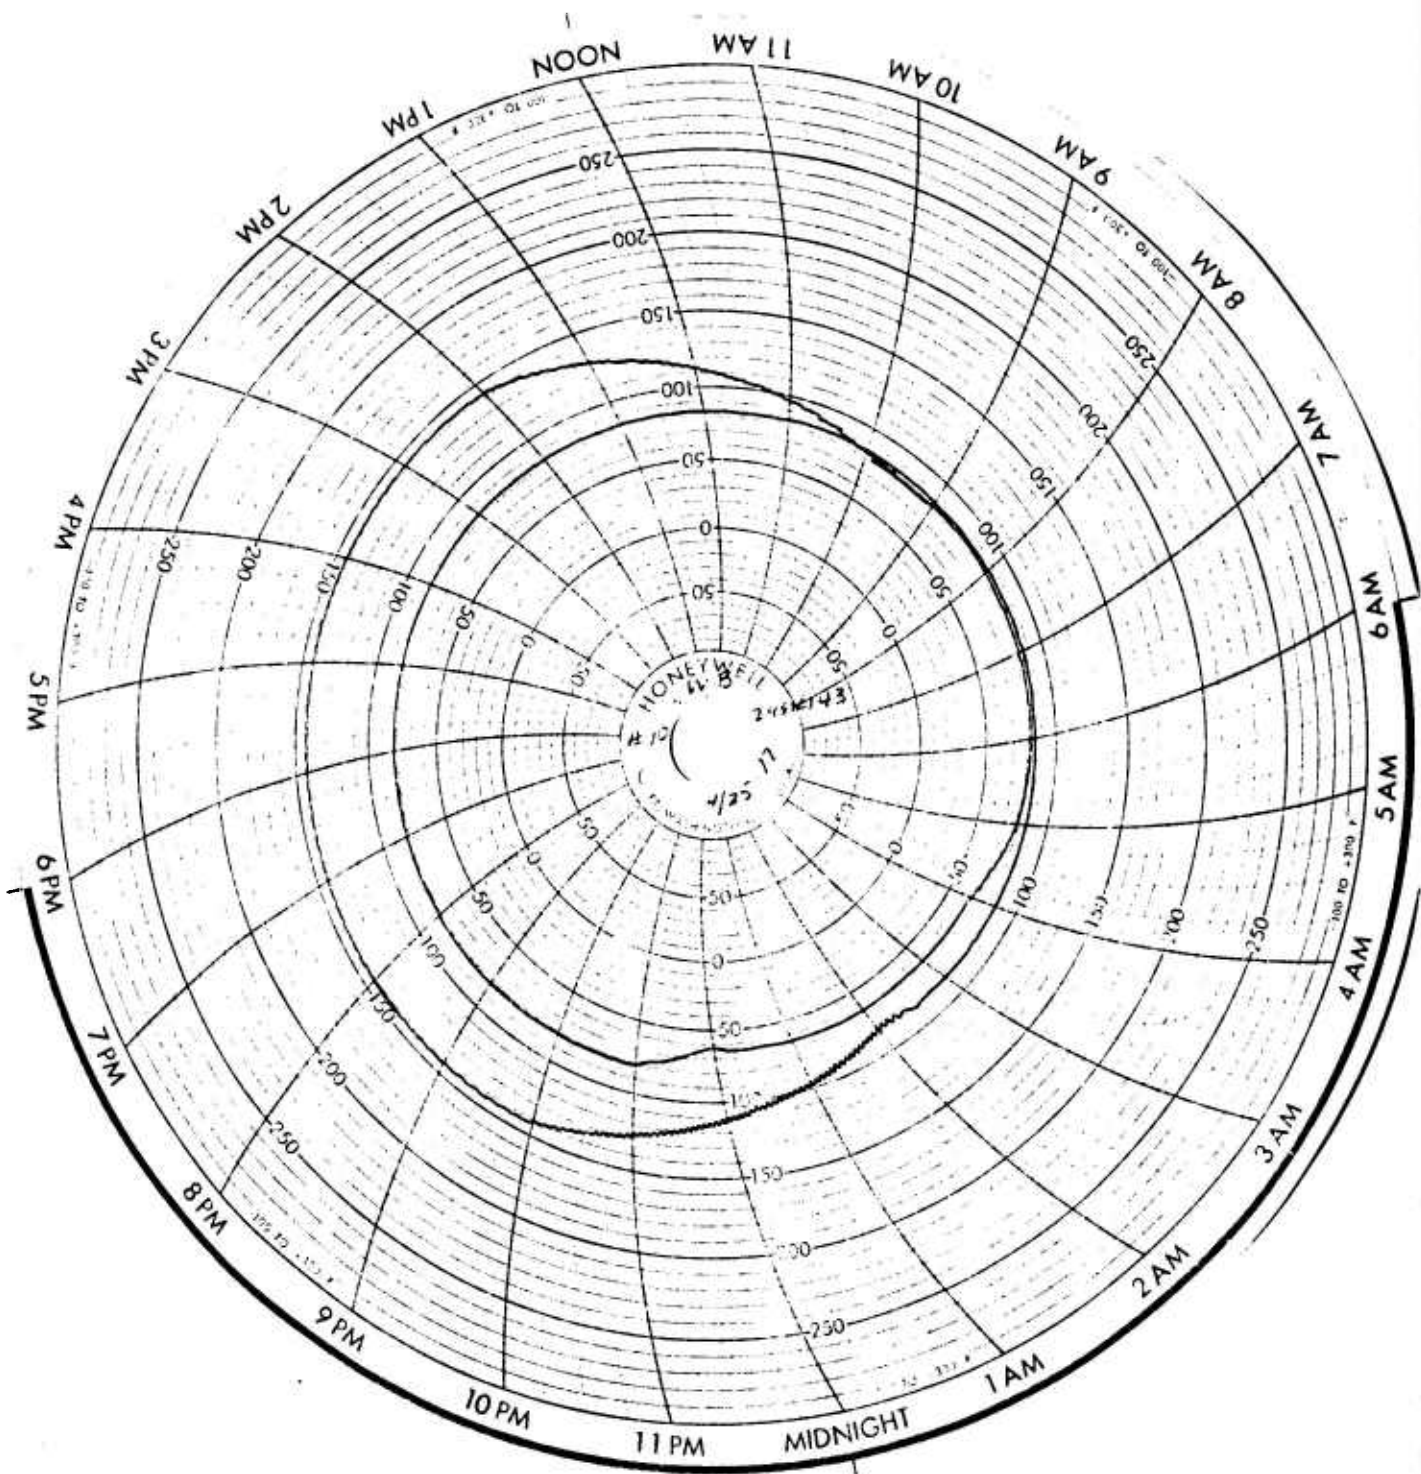


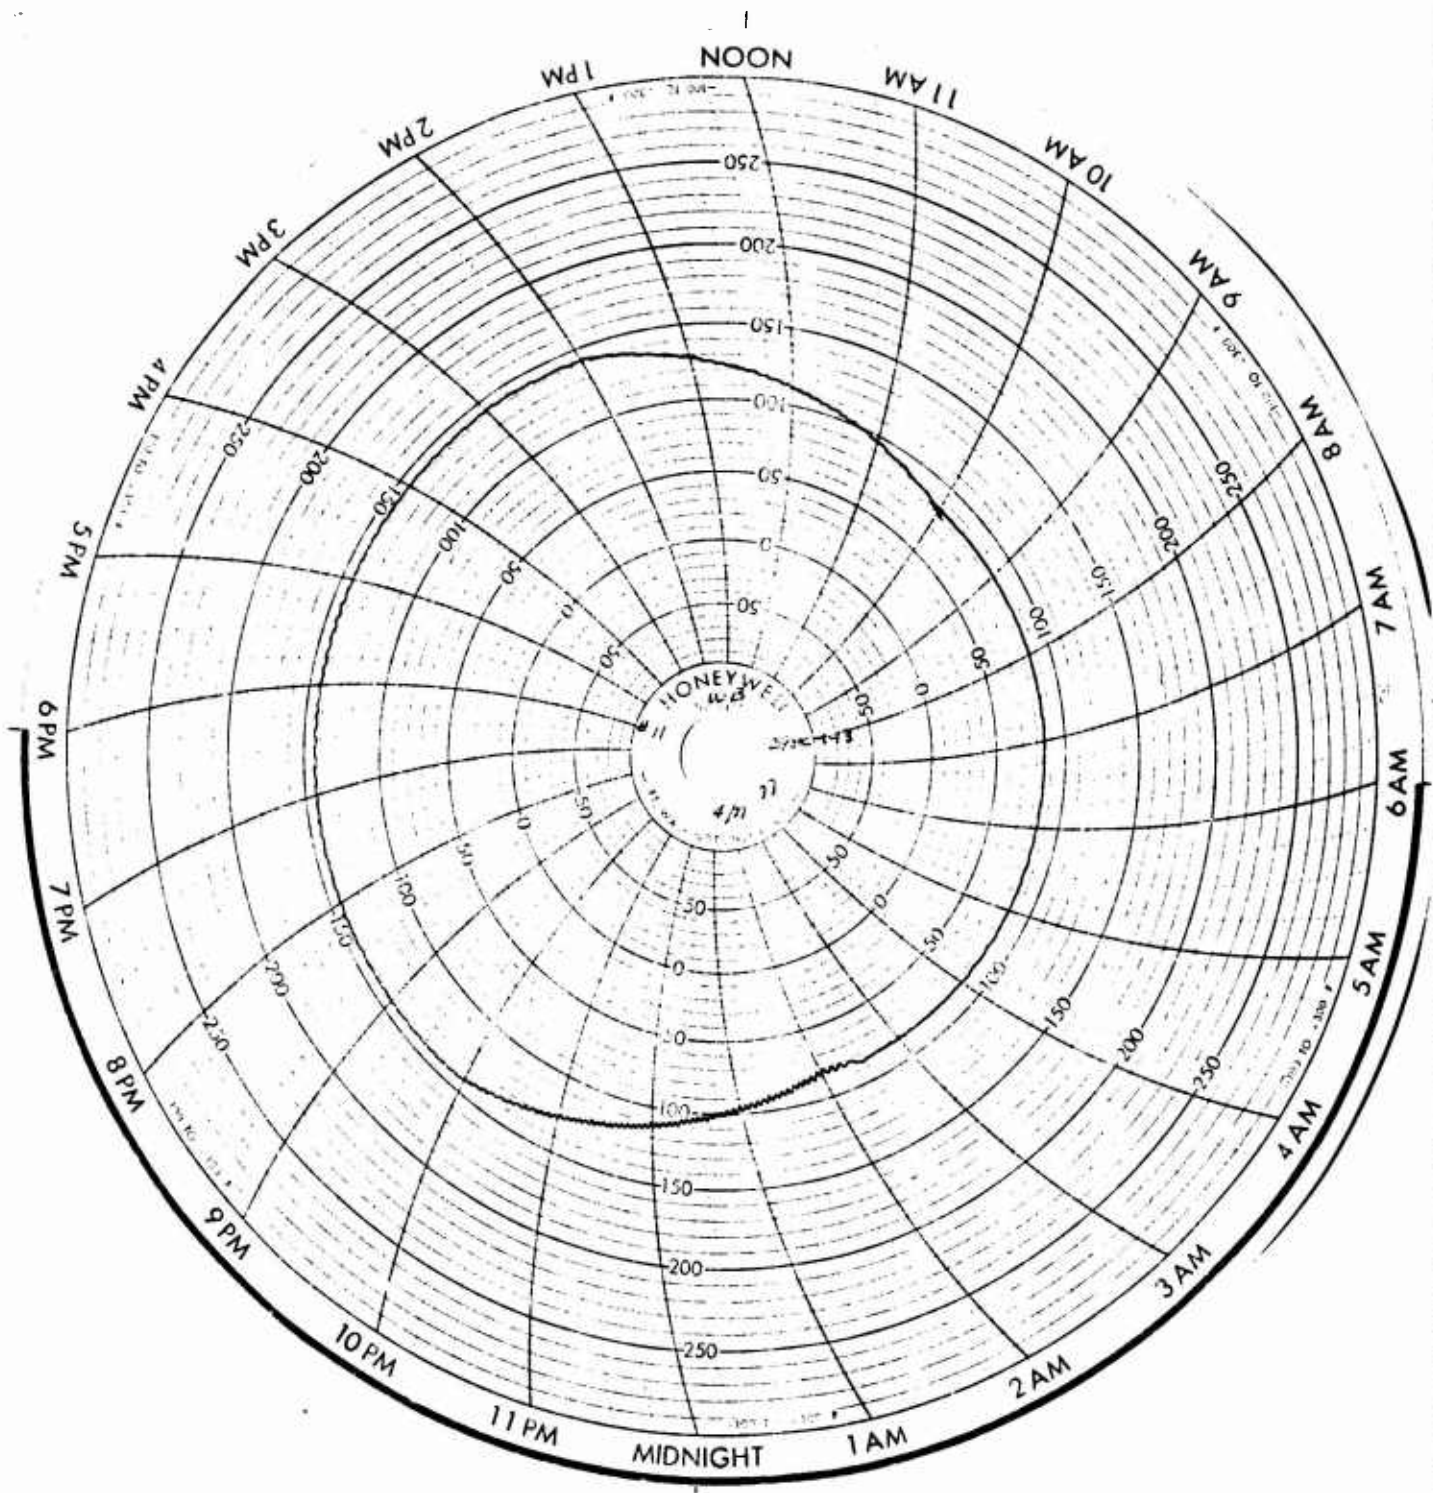


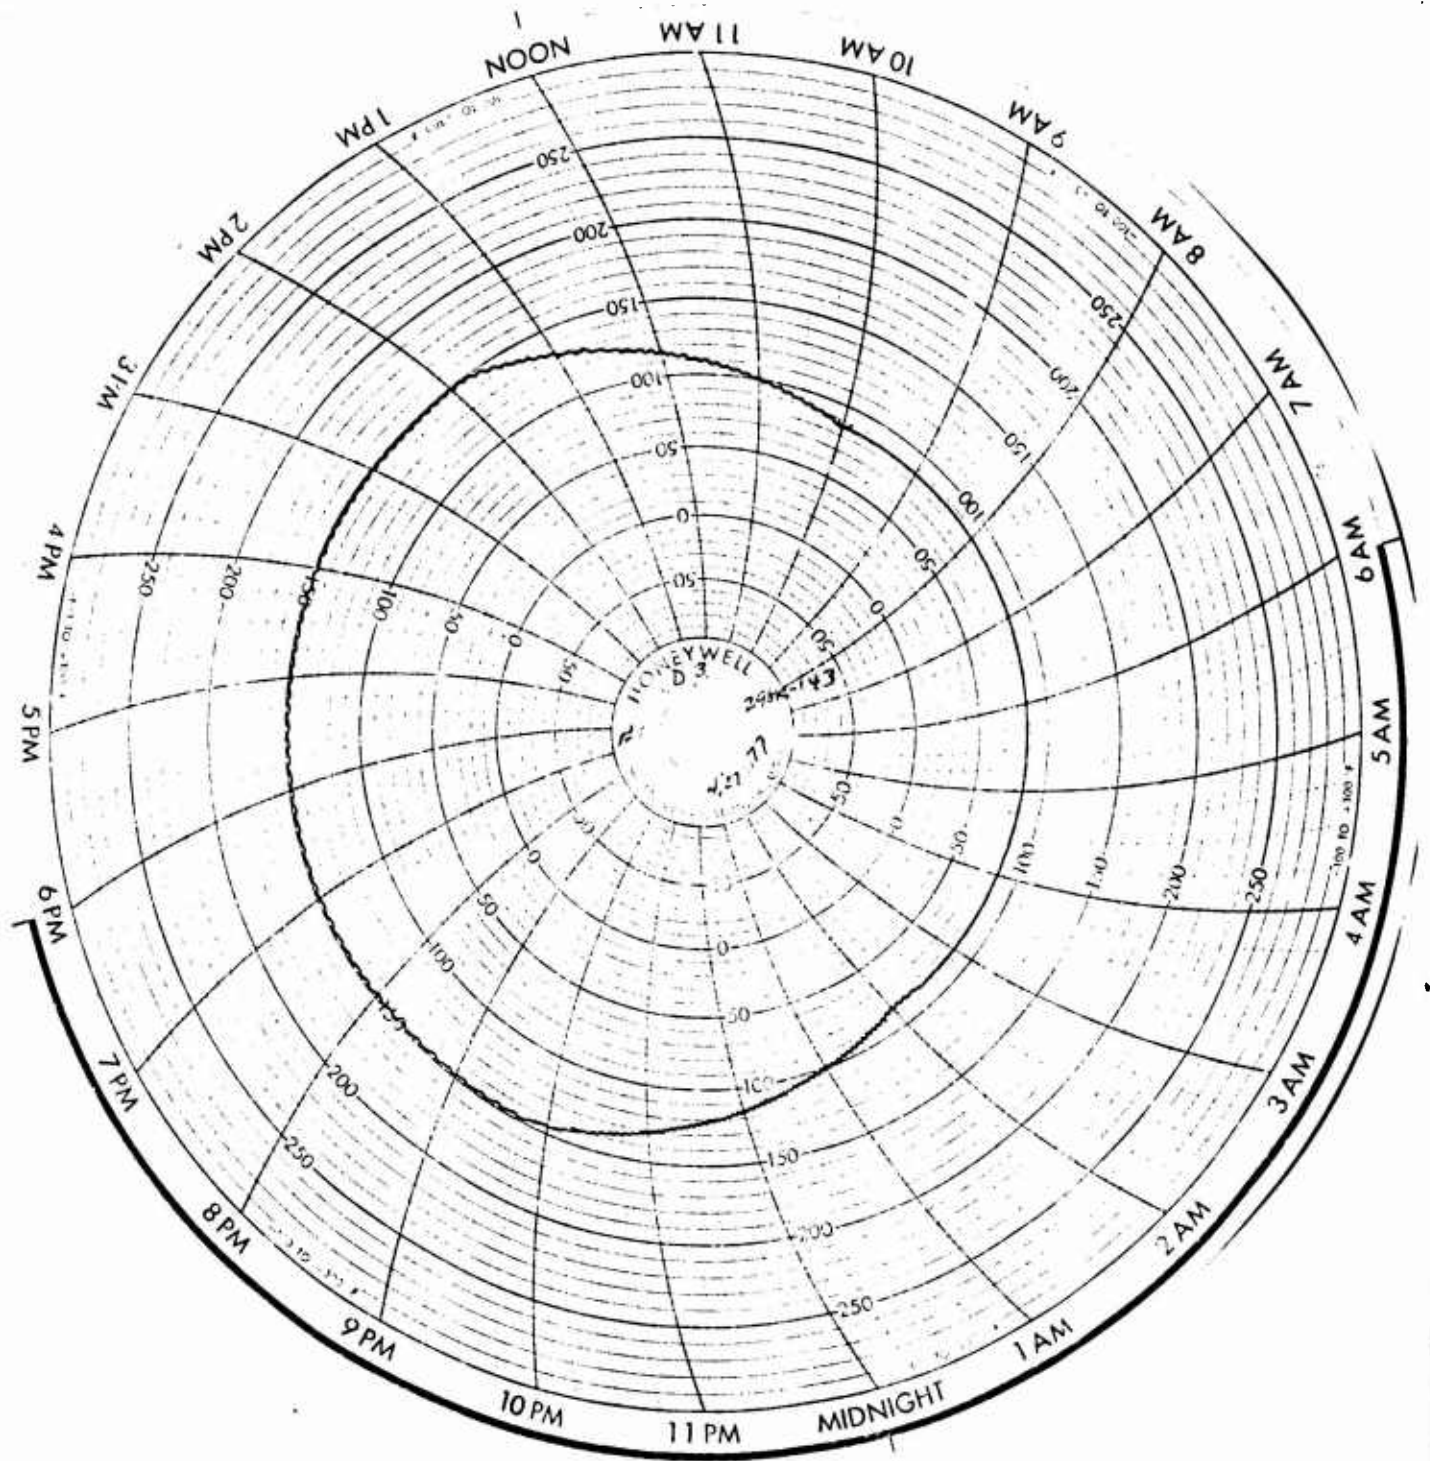

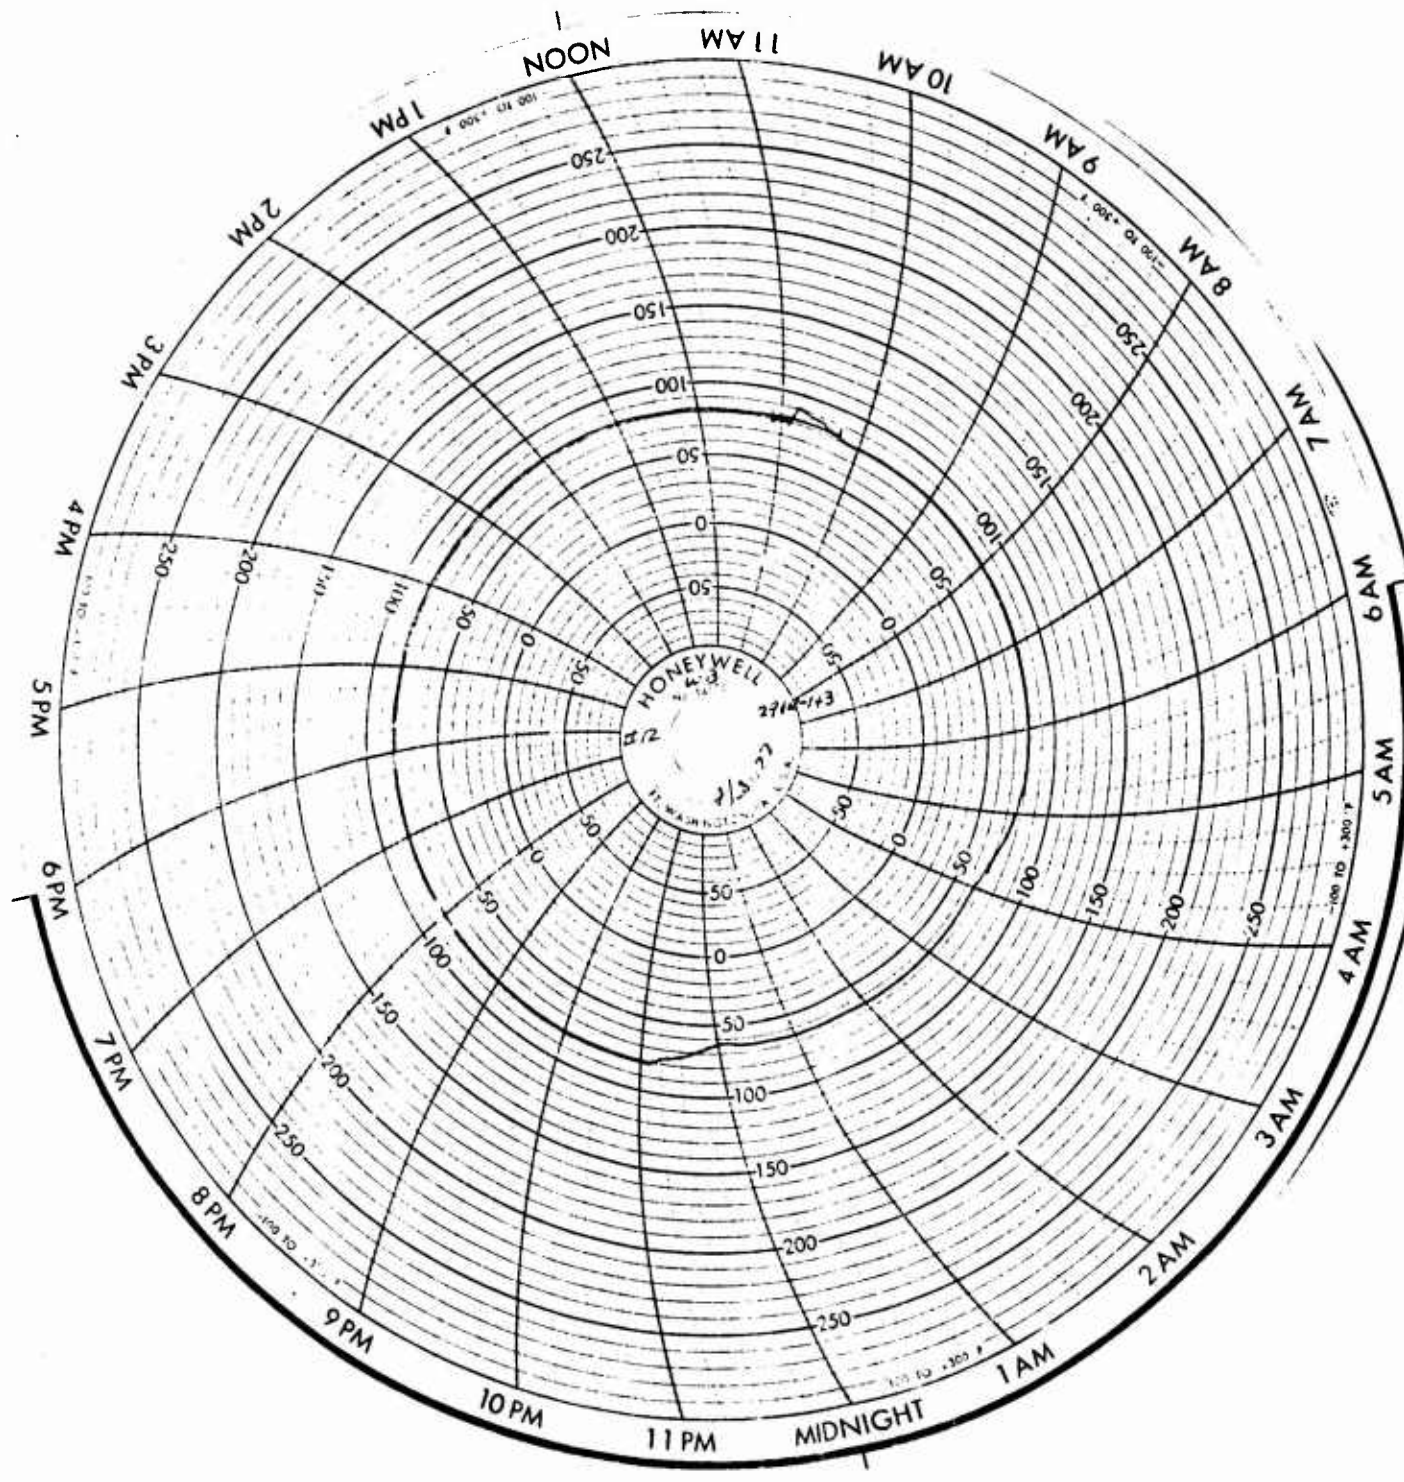

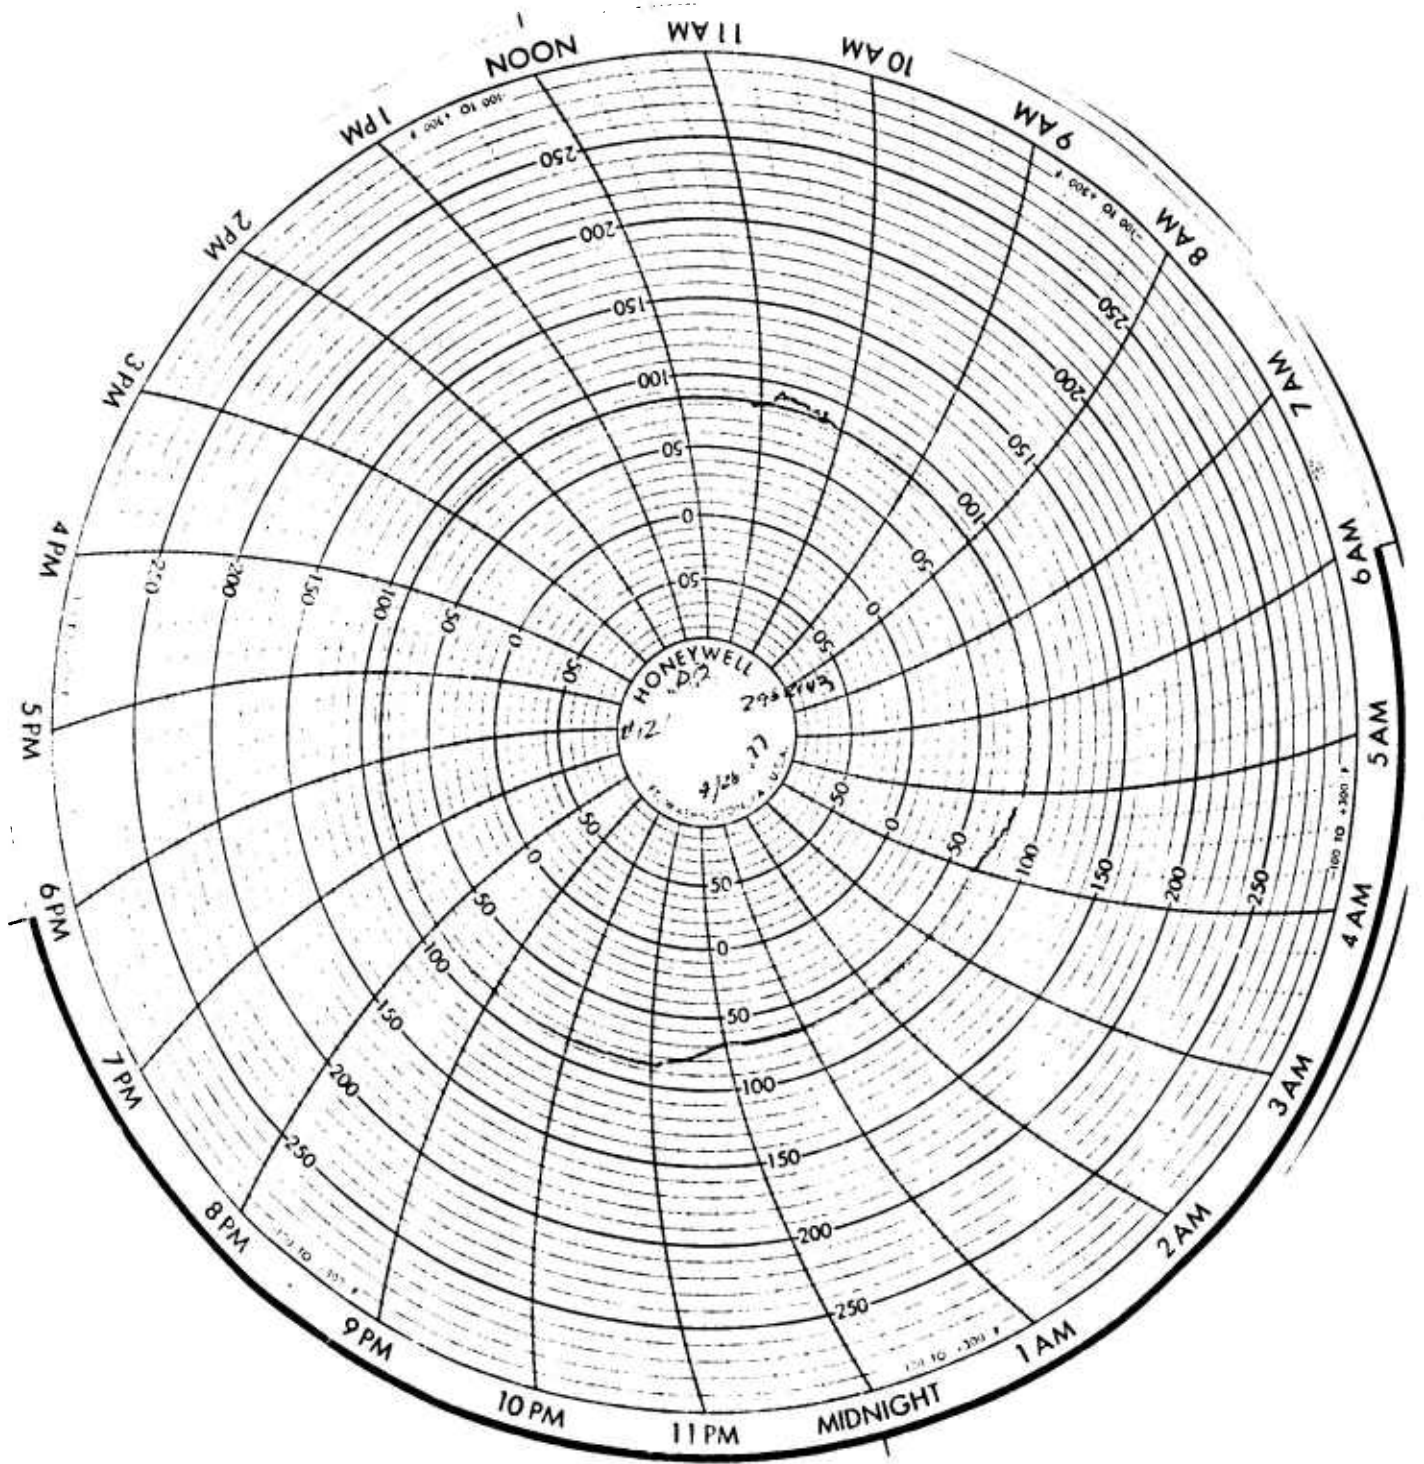

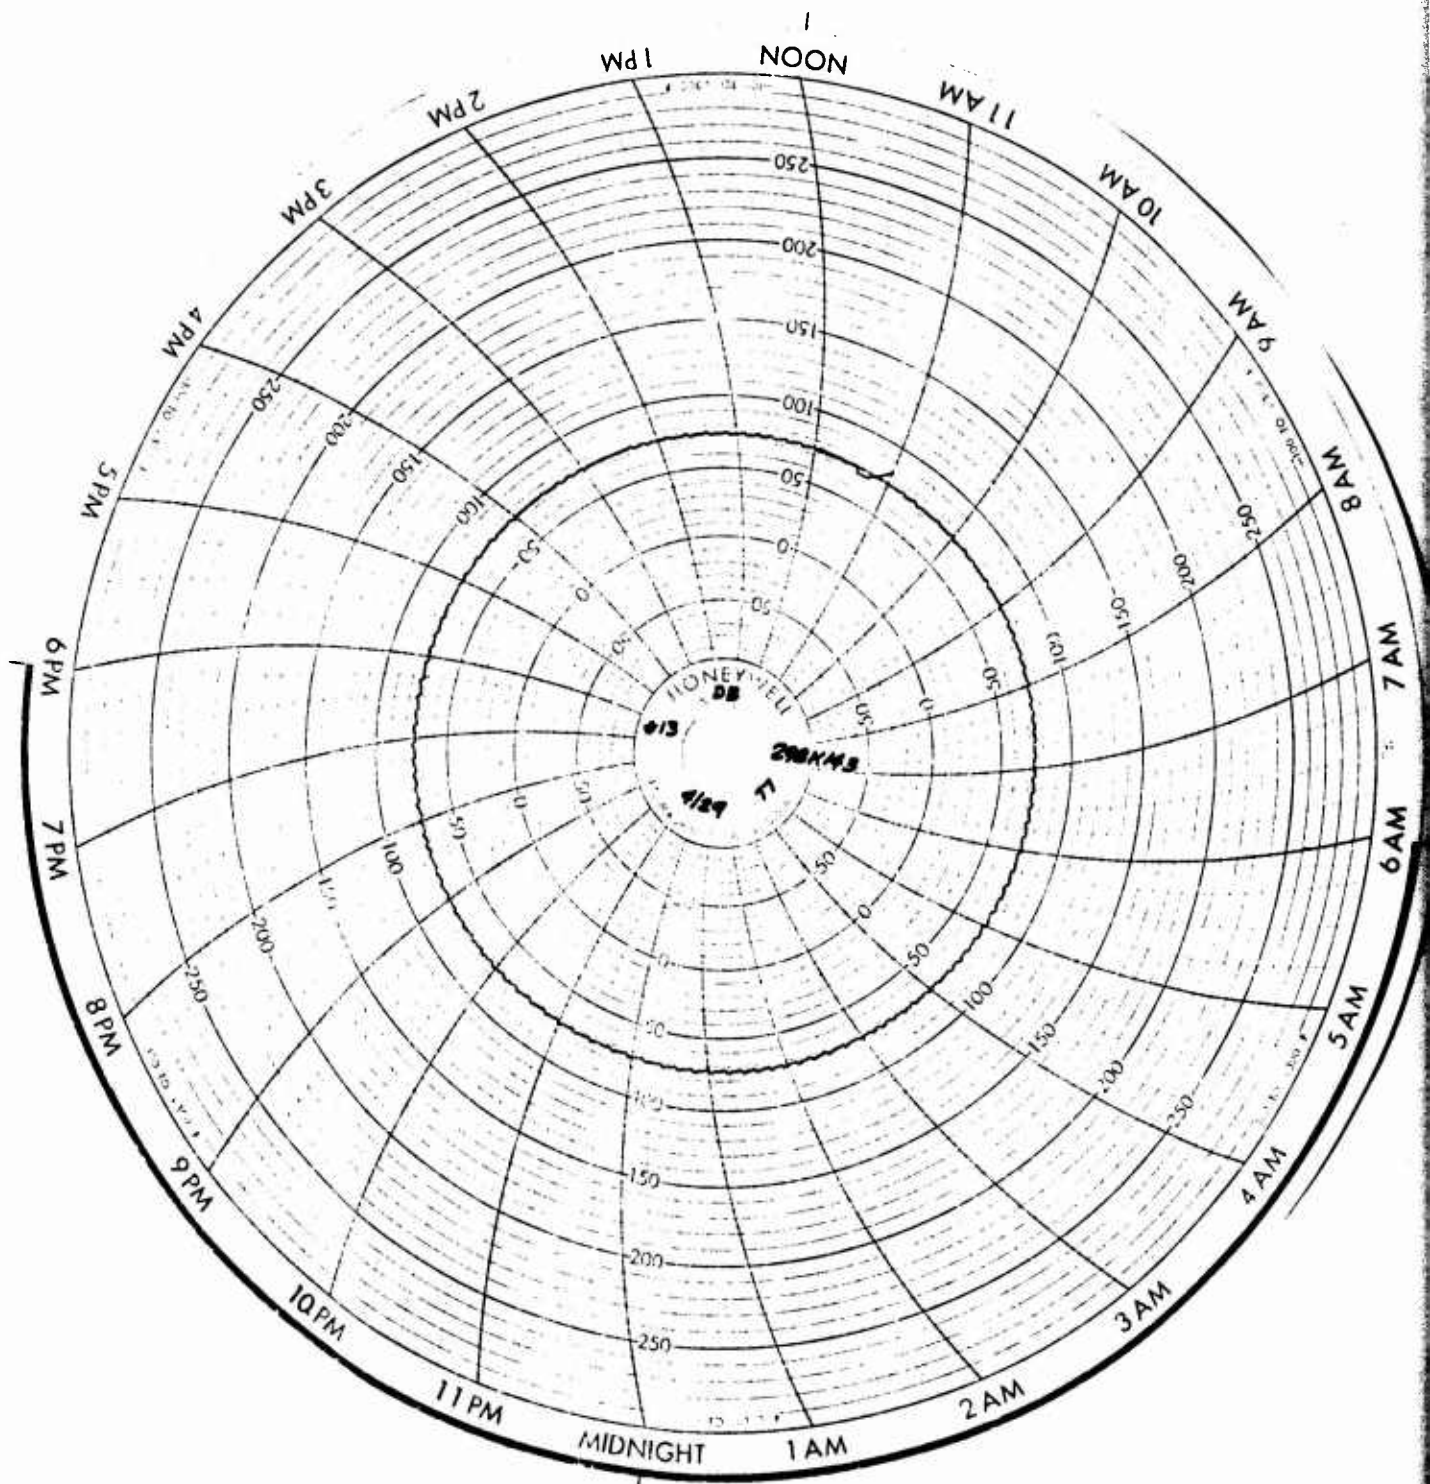

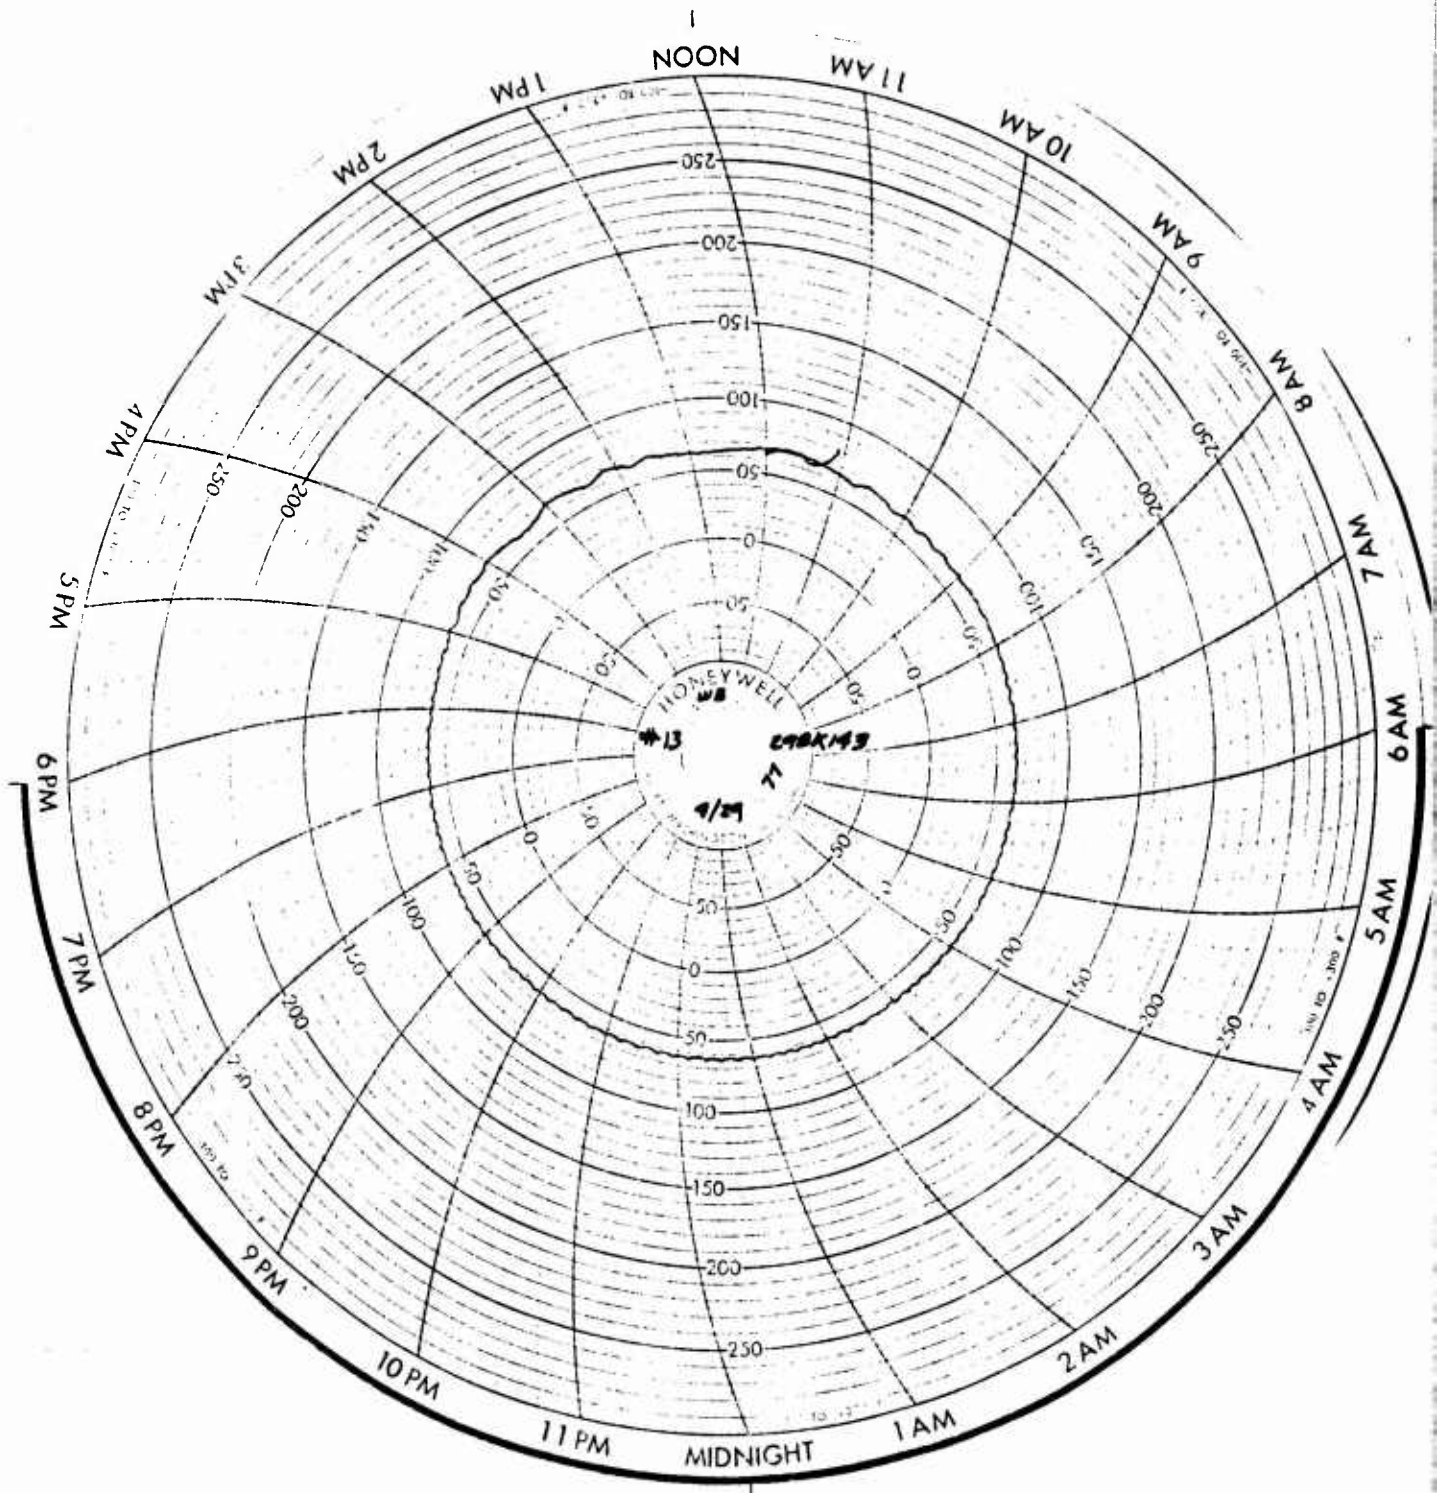

THIS REPORT HAS BEEN DELIMITED  
AND CLEARED FOR PUBLIC RELEASE  
UNDER DOD DIRECTIVE 5200.20 AND  
NO RESTRICTIONS ARE IMPOSED UPON  
ITS USE AND DISCLOSURE.

DISTRIBUTION STATEMENT A

APPROVED FOR PUBLIC RELEASE;  
DISTRIBUTION UNLIMITED.