

2.1 FG

6

ADA 014985



TECHNICAL REPORT RG-75-52

**CONCEPTS STUDY FOR NANOSECOND RISE TIME
MULTI-MEGAJOULE IMPULSE POWER SYSTEMS**

Darryl Holder
Guidance and Control Directorate
US Army Missile Research, Development and Engineering Laboratory
US Army Missile Command
Redstone Arsenal, Alabama 35809

12 June 1975

Approved for public release; distribution unlimited.



U.S. ARMY MISSILE COMMAND
Redstone Arsenal, Alabama

DDC
RECEIVED
SEP 22 1975
C

ACCESSION info	
NTIS	White Sect. <input checked="" type="checkbox"/>
DDC	Buff Section <input type="checkbox"/>
UNANNOUNCED	<input type="checkbox"/>
JUSTIFICATION.....	
BY.....	
DISTRIBUTION/AVAILABILITY CODES	
Dist.	AVAIL. and/or SPECIAL
A	

DISPOSITION INSTRUCTIONS

DESTROY THIS REPORT WHEN IT IS NO LONGER NEEDED. DO NOT RETURN IT TO THE ORIGINATOR.

DISCLAIMER

THE FINDINGS IN THIS REPORT ARE NOT TO BE CONSTRUED AS AN OFFICIAL DEPARTMENT OF THE ARMY POSITION UNLESS SO DESIGNATED BY OTHER AUTHORIZED DOCUMENTS.

TRADE NAMES

USE OF TRADE NAMES OR MANUFACTURERS IN THIS REPORT DOES NOT CONSTITUTE AN OFFICIAL INDORSEMENT OR APPROVAL OF THE USE OF SUCH COMMERCIAL HARDWARE OR SOFTWARE.

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM	
1. REPORT NUMBER 119 RG-75-52	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER	
4. TITLE (and Subtitle) CONCEPTS STUDY FOR NANOSECOND RISE TIME MULTI- MEGAJoule IMPULSE POWER SYSTEMS		5. TYPE OF REPORT & PERIOD COVERED Technical Report	
		6. PERFORMING ORG. REPORT NUMBER RG-75-52	
7. AUTHOR(s) Darryl Holder		8. CONTRACT OR GRANT NUMBER(s)	
9. PERFORMING ORGANIZATION NAME AND ADDRESS Commander Dc Army Missile Command Attn: AMSMI-RG Redstone Arsenal, Alabama 35819		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS (DA) IM362303A214 AMCMS Code 632303 11 21A08	
11. CONTROLLING OFFICE NAME AND ADDRESS DA-1-M-362303-A-214		12. REPORT DATE 12 Jun 75	
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		13. NUMBER OF PAGES 8	
		15. SECURITY CLASS. (of this report) UNCLASSIFIED	
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE	
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.			
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)			
18. SUPPLEMENTARY NOTES			
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Exploding wires High electrical energies Inductive voltage transients Impulse power systems			
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) This report considers the concepts, techniques, and limitations of means for controlling the flow of extremely high electric currents and the production of very rapid rates of change of current through a load. Impulse power systems are being incorporated in an increasing number of applications in military and research apparatus. As power and current risetime requirements are increased, more difficulties are encountered by the designer in producing an effective system.			


DD FORM 1473 1 JAN 73 EDITION OF 1 NOV 65 IS OBSOLETE

UNCLASSIFIED
SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

400409

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

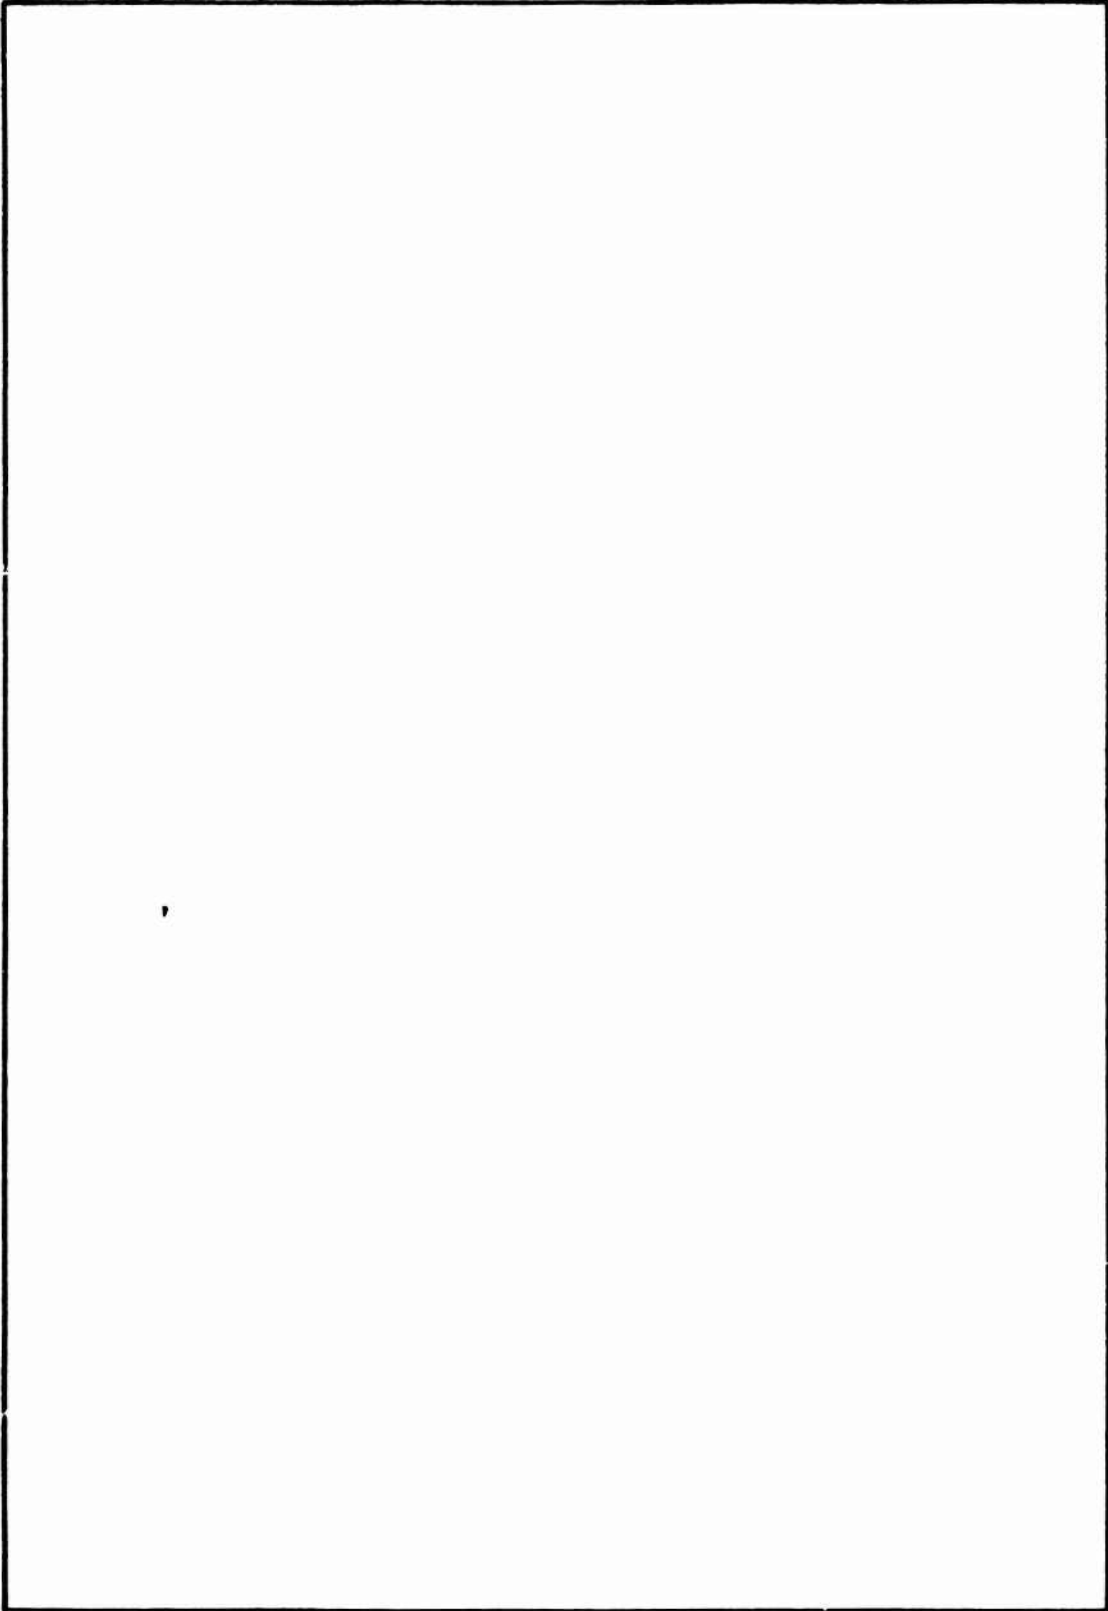

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

1. Objective

This report considers the concepts, techniques, and limitations of means for controlling the flow of extremely high electric currents and the production of very rapid rates of change of current through a load. Impulse power systems are being incorporated in an increasing number of applications in military and research apparatus. As power and current risetime requirements are increased, more difficulties are encountered by the designer in producing an effective system.

2. Background

Methods of control of high electrical energies fall into three categories. These categories will be discussed in the following paragraphs.

a. Circuit-Opening Switches

In attempting to halt the flow of a large electric current, one encounters the problem of inductive voltage transient. As one attempts to increase the speed of switching (larger values of di/dt), the transient voltage becomes even larger, ultimately causing switching failure. The cessation of large electric currents with fall times of nanoseconds is beyond the capability of switches with mechanically moving components.

The nonlinear series fuse element has, for many years, been used to stop the flow of electrical current, the most common application being the standard household fuse. This type of fusible link uses normal joule deposition (and the attendant resistivity changes) to heat the fuse material to its melting point. Such opening switches are easily designed and are quite effective as long as the current fall-times required are moderate. For larger values of di/dt , one must use a different technique, i.e., that of the "exploding wire" [1]. Exploding wires (and foils) are distinctly different from normal fuses. The current characteristic of a typical exploding wire is shown in Figure 1. As the electric current pulse is applied at time T_0 , the fuse-link rapidly heats through the fusion temperature and through the normal temperature of vaporization until at some time T_1 the internal pressures exceed the forces of magnetic pinch and inertia. At this point ("explosion"), the superheated vaporized fuse begins expansion and its electrical conductivity greatly decreases so that between times T_2 and T_3 ("pause time") very little current flows. As the vapor becomes less dense, it becomes possible for impact ionization to take place; if this happens, the path becomes very conductive between times T_3 and T_4 .

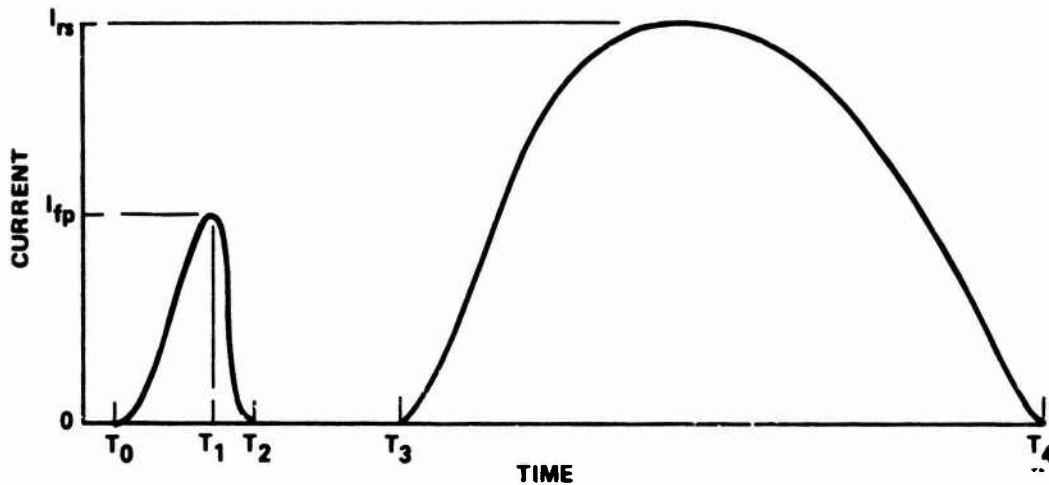


Figure 1. Current-time characteristic of a typical exploding wire.

("restrike"). The restrike current pulse must be eliminated or delayed, by enhancement of the pause time, beyond the period of interest in order for an exploding conductor to be used as an opening switch.

Several methods may be used to delay or eliminate the onset of the restrike current. The most direct method is to make the exploding link long so that the electric field is of such values that ionization of the expanding metallic vapor becomes unlikely. A practical limit of electric field for no restrike has been seen to be approximately 61 kV/m for copper wires in air [2]. For many applications, the simple lengthening of the exploding link is undesirable. It has been shown that the energy required to explode a link varies directly as the length of the link [3], moreover, the link inductance also varies directly as its length [4]. For circuits required to operate with large values of di/dt , the switch inductance must be kept to a minimum.

The application of a magnetic field to the exploding link can make possible higher working electric fields, i.e., shorter length for a given voltage. Researchers have shown that a magnetic field oriented axially to an exploding wire will make operation to approximately 68 kV/m possible [2]. A magnetic field applied transversely to the flow of current in the exploding link will also have a usable effect. In this instance a force exists governed by:

$$F = I \ell \times B \quad ,$$

where

- F = force in Newtons
- I = current in amps

l = the length of wire in the magnetic field in meters

B = the magnetic field intensity in Wb/m^2 .

Experiments performed with purposely-overstressed exploding copper wires in air field strengths ranging from 140 to 400 kV/m for axial and transverse magnetic field orientations [5] have shown the transverse field to be far more effective than the axial field in producing delay of restrike. A disadvantage of this method for enhancement of the performance of an exploding link is the requirement for either massive permanent magnet structures or power-consuming electromagnets.

The containment of the exploding link by dielectric media has shown to be at least as beneficial as the use of magnetic fields and can have several other desirable effects [6][7]. Generally, for containment-packaging, the exploding link is made into a thin foil and folded in a zig-zag pattern with dielectric sheets interleaved between the plates of a low-inductance parallel-plate transmission line. Such a configuration produces an extremely low inductance switch because each folded section tends to cancel the inductance of the last and the foil, being wide, produces an inductance characteristic inversely proportional to the width [4]. Experiments have shown that the inductance of a folded foil approaches a value of approximately one-third that of a foil of equal upstream-downstream dimensions, even though the foil active length can be many times longer for the folded configuration [8]. Experimental work has shown that a contained folded foil subjected to a fast rising current pulse can be made to open in approximately 100 nsec and will withstand 2.5 MV/m field strength without restrike [9]. These experiments were performed [10] using metallic fuses and have produced output voltages of approximately 0.5 MV, rising to this value in 20 to 30 nsec. In this case, the fuses took the form of thin foils wrapped around the end of an extension of the insulation (polyethylene) between conductors which form an inductive store.

The preceding data and trends show that an exploding link of proper configuration and design can be an effective circuit-opening switch for power levels into the terawatt regime. Moreover, such switching can be made quickly by this means.

b. Circuit-Closing Switches

To cause electric current flow in a circuit one must provide a completed low-resistance path. This is most often accomplished by mechanically inserting a metallic connection between the source terminal and the load terminal (i.e., a switch or relay). If the potentials are above a few hundred volts (as they usually are for high-power systems) one may use other means to accomplish circuit closure. If the source and load terminals are closely spaced but separated by some dielectric media, a nonconducting gap will be formed in the circuit. As the source voltage rises, the dielectric will be overstressed eventually and will break down electrically, permitting a highly-conductive

electric arc to form between source and load, thereby completing the circuit. Such spark-gap devices are capable of being designed to break down at very precise levels with rapid current risetimes and are repeatable without servicing if a gaseous or liquid dielectric is used.

The dielectric strength of insulators for slow to moderate values of dv/dt has been the subject of study by many. Accurate values of electric strength and general trends are known for many materials [11]. In the design of a spark-gap switch, one has several factors which may be varied to produce the desired performance. The resistive phase of spark-channel development is a major component of the transition time from the nonconductive state to the highly-conductive state of a spark-gap. For gas-insulated spark-gaps, the time duration of the resistive phase is [12]:

$$T_R = \frac{88}{Z^{1/3} F_1^{4/3}} \left(\frac{\rho}{\rho_0} \right)^{1/2} \text{ nsec}$$

where

Z = impedance of the source (ohms)

F_1 = electric field strength in the gap (10 kV/cm units)

ρ = density of the gas in the gap

ρ_0 = density of air at standard conditions.

For the designer of a spark-gap switch this shows what parameters must be controlled and what parameters may be varied to suit conditions. For example, to minimize T_R one can increase Z or F_1 or both. For any particular desired breakdown voltage, one may increase F_1 by using closer gap spacing and higher gas pressures. Although higher pressure will cause a larger value of ρ the net result on T_R is to decrease because F_1 is to the 4/3 power. Alternately, dielectric gases (as SF_6) may be used to permit closer gap spacing. The source impedance may be varied to higher values to aid in fast gap response, but this is not generally done because that factor is to the 1/3 power. If (as usually is the case) the source must deliver sizable electric energy to a load, the selection of source impedance is limited. The switching speed for gas-filled spark gaps at moderate power levels is quite rapid [13], but as high powers are required (necessitating changes of Z) they may become undesirably slow, taking up to several hundred nanoseconds.

Spark gaps are often built using liquid or solid dielectric media. Experiments with oil, water, and polythene [12] have substantiated the relation as

$$T_R = \frac{5}{Z^{1/3} F_2^{4/3}} \text{ nsec} ,$$

where F_2 is the electric field strength in the gap in megavolts/centimeter units. Because only a very small separation of electrodes is required in liquids and solids, these switches are much faster in operation than a gas-insulated switch. Solid dielectric switches are generally the fastest in operation. Various techniques of treatment and assembly of such spark gaps have produced current risetimes of a few nanoseconds of power levels of many thousands of megawatts. One such method is the stabbed polythene switch [14]. By this method, a matrix of sharp metal needles is stabbed to a precise depth into the dielectric producing extreme electric field concentrations at their tips and resultant quick breakdown.

Although any of the preceding spark gaps are often triggered into conduction by a third electrode or by photons or ionizing radiation, the switching time of a spark gap is shortest when it is subjected to an extremely fast dv/dt spike. Such a voltage spike permits extreme values of electric field strength to be developed before streamer closure and the subsequent beginning of formation of a highly conducting path. As has been discussed, this condition is most effective in minimizing gap switching time.

c. Combinations of Opening and Closing Switches

The combination of a circuit-opening switch and a circuit-closing switch has been shown to be an effective means for the control of output from an electrical energy source [6, 7]. Extreme difficulties are encountered in obtaining nanosecond risetimes of current from very high energy capacitive stores due to stray inductance and wave propagation time delays in the current conductors. If, however, the circuit of Figure 2 is used, the di/dt at the load may be many times greater than possible with direct use of the capacitor bank.

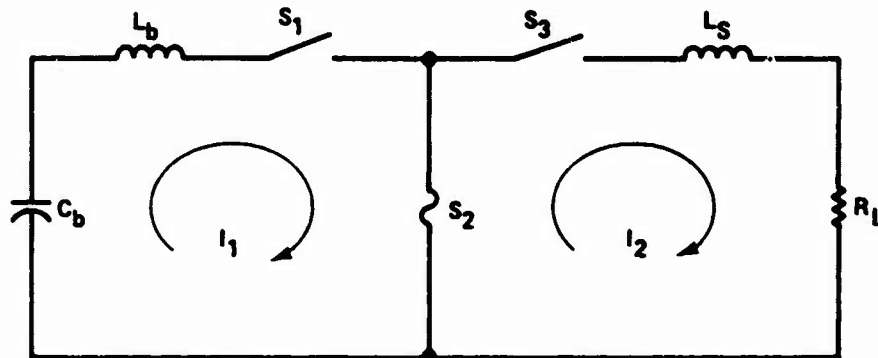


Figure 2. High-speed power system.

In Figure 2, C_b is the capacitance of the storage bank, L_b is the summed inductance of the capacitors and the bank output conductors, and S_1 is the main bank output switch. The circuit comprising of S_2 (a circuit-opening switch) and S_3 (a circuit-closing switch) is inserted between the energy storage bank and the load to be driven (R_L and the stray inductance L_S). One can see that if S_1 is closed, energy from C_b will flow through the exploding-fuse switch S_2 as,

$$I_1 = I_{10} \sin \left[\frac{2\pi}{(L_1 C_b)^{1/2}} t \right]$$

the normal discharge of an LC circuit. If S_2 changes to nonconducting at I_1 maximum and S_3 simultaneously closes, the rise of current through the load will be governed by:

$$I_2 = I_1 e^{-\left(\frac{R_L}{L_S}\right) t}$$

It is seen that the di/dt in the load is governed by the load and its connections rather than by the limits of the energy source. It must be realized from this simple model that S_2 and S_3 were assumed perfect switches and in any close analysis their losses and limitations must be taken into account. However, it has been shown in the previous section that the performance of the opening and closing switches are sufficiently high to be of real use in generating high energy fast risetime current pulses.

3. Conclusions

Note that at this point the high-speed power system of Figure 2 is no longer a simple capacitive source, but is instead a capacitively-charged inductive energy source. Inductive energy stores may take many forms, but all may be used in achieving compact, lightweight, inexpensive, high power deliveries. In the example discussed, the use of the energy stored in the bank stray inductance (L_b) to increase the total performance has turned what was once a disadvantage into an advantage. If the circuit-opening switch and the circuit-closing switch are developed further along the lines discussed and used with the proper energy source, it will open the way toward impulse-power systems with nanosecond-regime risetimes and energies measured in hundreds of megajoules.

REFERENCES

1. Chase, W. G. and Moore, H. K., Exploding Wires, Vols. 1, 2, 3, and 4, Plenum Press, Inc., New York, 1959-1967.
2. Sakurai, A., et al., "Effect of Applied Magnetic Field on the Exploding Wire Phenomenon-II", Exploding Wires, Vol. 4, p. 63.
3. Nash, C. P. and Olsen, C. W., "Factors Affecting the Time to Burst in Exploding Wires," Exploding Wires. Vol. 2, p. 5.
4. Knoepfel, Heinz, Pulsed High Magnetic Fields, Appendix 1, North-Holland Publishing Co., Amsterdam & London, pp. 312-324.
5. Holder, D., The Effect of Applied Magnetic Fields on the Pause Time Phenomenon of Exploding Wires, US Army Missile Command, Redstone Arsenal, Alabama, April 1974, Technical Report RG-74-22.
6. DiMarco, J. N. and Burkhardt, L. C., "Characteristics of Magnetic Energy Storage Systems Using Exploding Foils," J. Appl. Phys., Vol. 41, No. 9, p. 3874, August 1970.
7. Early and Martin, "Review of Scientific Instruments," Vol. 36, No. 7, p. 1000.
8. Holder, D., Inductances of Folded Foil Configurations, US Army Missile Command, Redstone Arsenal, Alabama, April 1974, Technical Report RG-74-8.
9. Ross, David P., Exploding Foils as Fast Opening Switches, Final Report Laboratory Research Cooperative Program, in publication as US Army Missile Command Technical Report, August 1974.
10. Aslin, H., "High Power Waveshaper - Vol. 1: Analytical and Experimental Program," PIFR-624, Physics International Company, prepared for US Army Missile Command, Redstone Arsenal, Alabama, Contract No. DAAH01-74-C-0283, August 1974.
11. Denholm, A. S., et al., Review of Dielectrics and Switching, Air Force Weapons Laboratory, Air Force Systems Command, February 1973, Technical Report AFWL-TR-72-88.
12. Martin, J. C., "Duration of the Resistive Phase and Inductance of Spark Channels," Switching Note No. 9, Atomic Weapons Research Establishment, Aldermaston, Great Britain, December 1965.
13. Champney, P., "Concepts Study for Advanced Concept Simulator," Final Report Appendix B, Pulser, Physics International Co., San Leandro, California, February 1972.

14. Aslin, H., "Preliminary Machine Tests and Beam Studies," Physics International Co., San Leandro, California, PIQR-266 and 277-1, pp. 19-26.