

AD-A023256

RIA-76-U338

AD A023256



AD A023256  
LIBRARY

# NEVER DRAIN ENGINE OIL TECHNOLOGY PHASE II

**AFLRL REPORT NO. 72**

by

**E. C. Owens  
S. J. Lestz  
R. D. Quillian, Jr.**

Approved for public release; distribution unlimited

Prepared by

**U.S. Army Fuels and Lubricants Research Laboratory  
Southwest Research Institute  
San Antonio, Texas**

Under contract to

**U.S. Army Mobility Equipment Research & Development Command  
Laboratory 2000  
Fort Belvoir, Virginia**

**Contract No. DAAK02-73-C-0221**

October 1975

### **Disclaimers**

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

Trade names cited in this report do not constitute an official endorsement or approval of the use of such commercial hardware or software.

### **DDC Availability Notice**

Qualified requestors may obtain copies of this report from Defense Documentation Center, Cameron Station, Alexandria, Virginia 22314.

### **Disposition Instructions**

Destroy this report when no longer needed. Do not return it to the originator.

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER AFLRL No. 72	2. GOVT ACCESSION NO. AD A023256	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) NEVER DRAIN ENGINE OIL TECHNOLOGY PHASE II		5. TYPE OF REPORT & PERIOD COVERED Interim Report December 1974–August 1975
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) E. C. Owens S. J. Lestz R. D. Quillian, Jr.		8. CONTRACT OR GRANT NUMBER(s)  DAAK02-73-C-0221
9. PERFORMING ORGANIZATION NAME AND ADDRESS U.S. Army Fuels & Lubricants Research Laboratory Southwest Research Laboratory San Antonio, Texas 78240		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
11. CONTROLLING OFFICE NAME AND ADDRESS U.S. Army Mobility Equipment Research & Development Command, DRXFB-GL, Ft. Belvoir, Virginia 22060		12. REPORT DATE October 1975
		13. NUMBER OF PAGES 147
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		15. SECURITY CLASS. (of this report)  Unclassified
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report)  Approved for public release, distribution unlimited		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number)		
L-141 Engine	Engine Oil	Piston Rings
M-151 Military Utility Tactical Truck	Long Life Oils	Oil Drain Interval
Blowby	Lubrication	
Low Blowby	Tactical Equipment	
20. ABSTRACT (Continue on reverse side if necessary and identify by block number)		
<p>As the second phase of a program to evaluate methods of extending the life of engine oils, an agreement was reached with Thompson-Ramo-Woolridge, Inc. (TRW) to evaluate an experimental low-blowby piston ring assembly in an L-141 engine. The rings were initially evaluated using an engine dynamometer and were then installed in an M-151 Military Utility Tactical Truck (MUTT) for an extended road evaluation. All tests were conducted using a qualified MIL-L-2104C/MIL-L-46152 grade 30 lubricant and unleaded gasoline meeting VV-G-001690A specifications.</p> <p>From the results of the 35,400-km (22,000-mile) road evaluation, it appears that these low-blowby piston rings, in conjunction with high-quality level MIL-L-2104C/MIL-L-46152 qualified oils, would allow no-drain</p>		

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

20. ABSTRACT


operation for its 32,000-km (20,000-mile) lifetime of the M-151 vehicle when operated in a high-mileage accumulation, high-temperature mode.

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

## FOREWORD

The work reported herein was conducted at the U.S. Army Fuels and Lubricants Research Laboratory (USAFLRL), located at Southwest Research Institute, San Antonio, Texas, under contract DAAK02-73-C-0221, during the period December 1974 through August 1975. The work was funded by U.S. Army Mobility Equipment Research and Development Command, Ft. Belvoir, Virginia. Project monitor was Mr. T.C. Bowen, USAMERADCOM, DRXFB-GL and contract monitor was Mr. F.W. Schaekel, USAMERADCOM, DRXFB-GL.

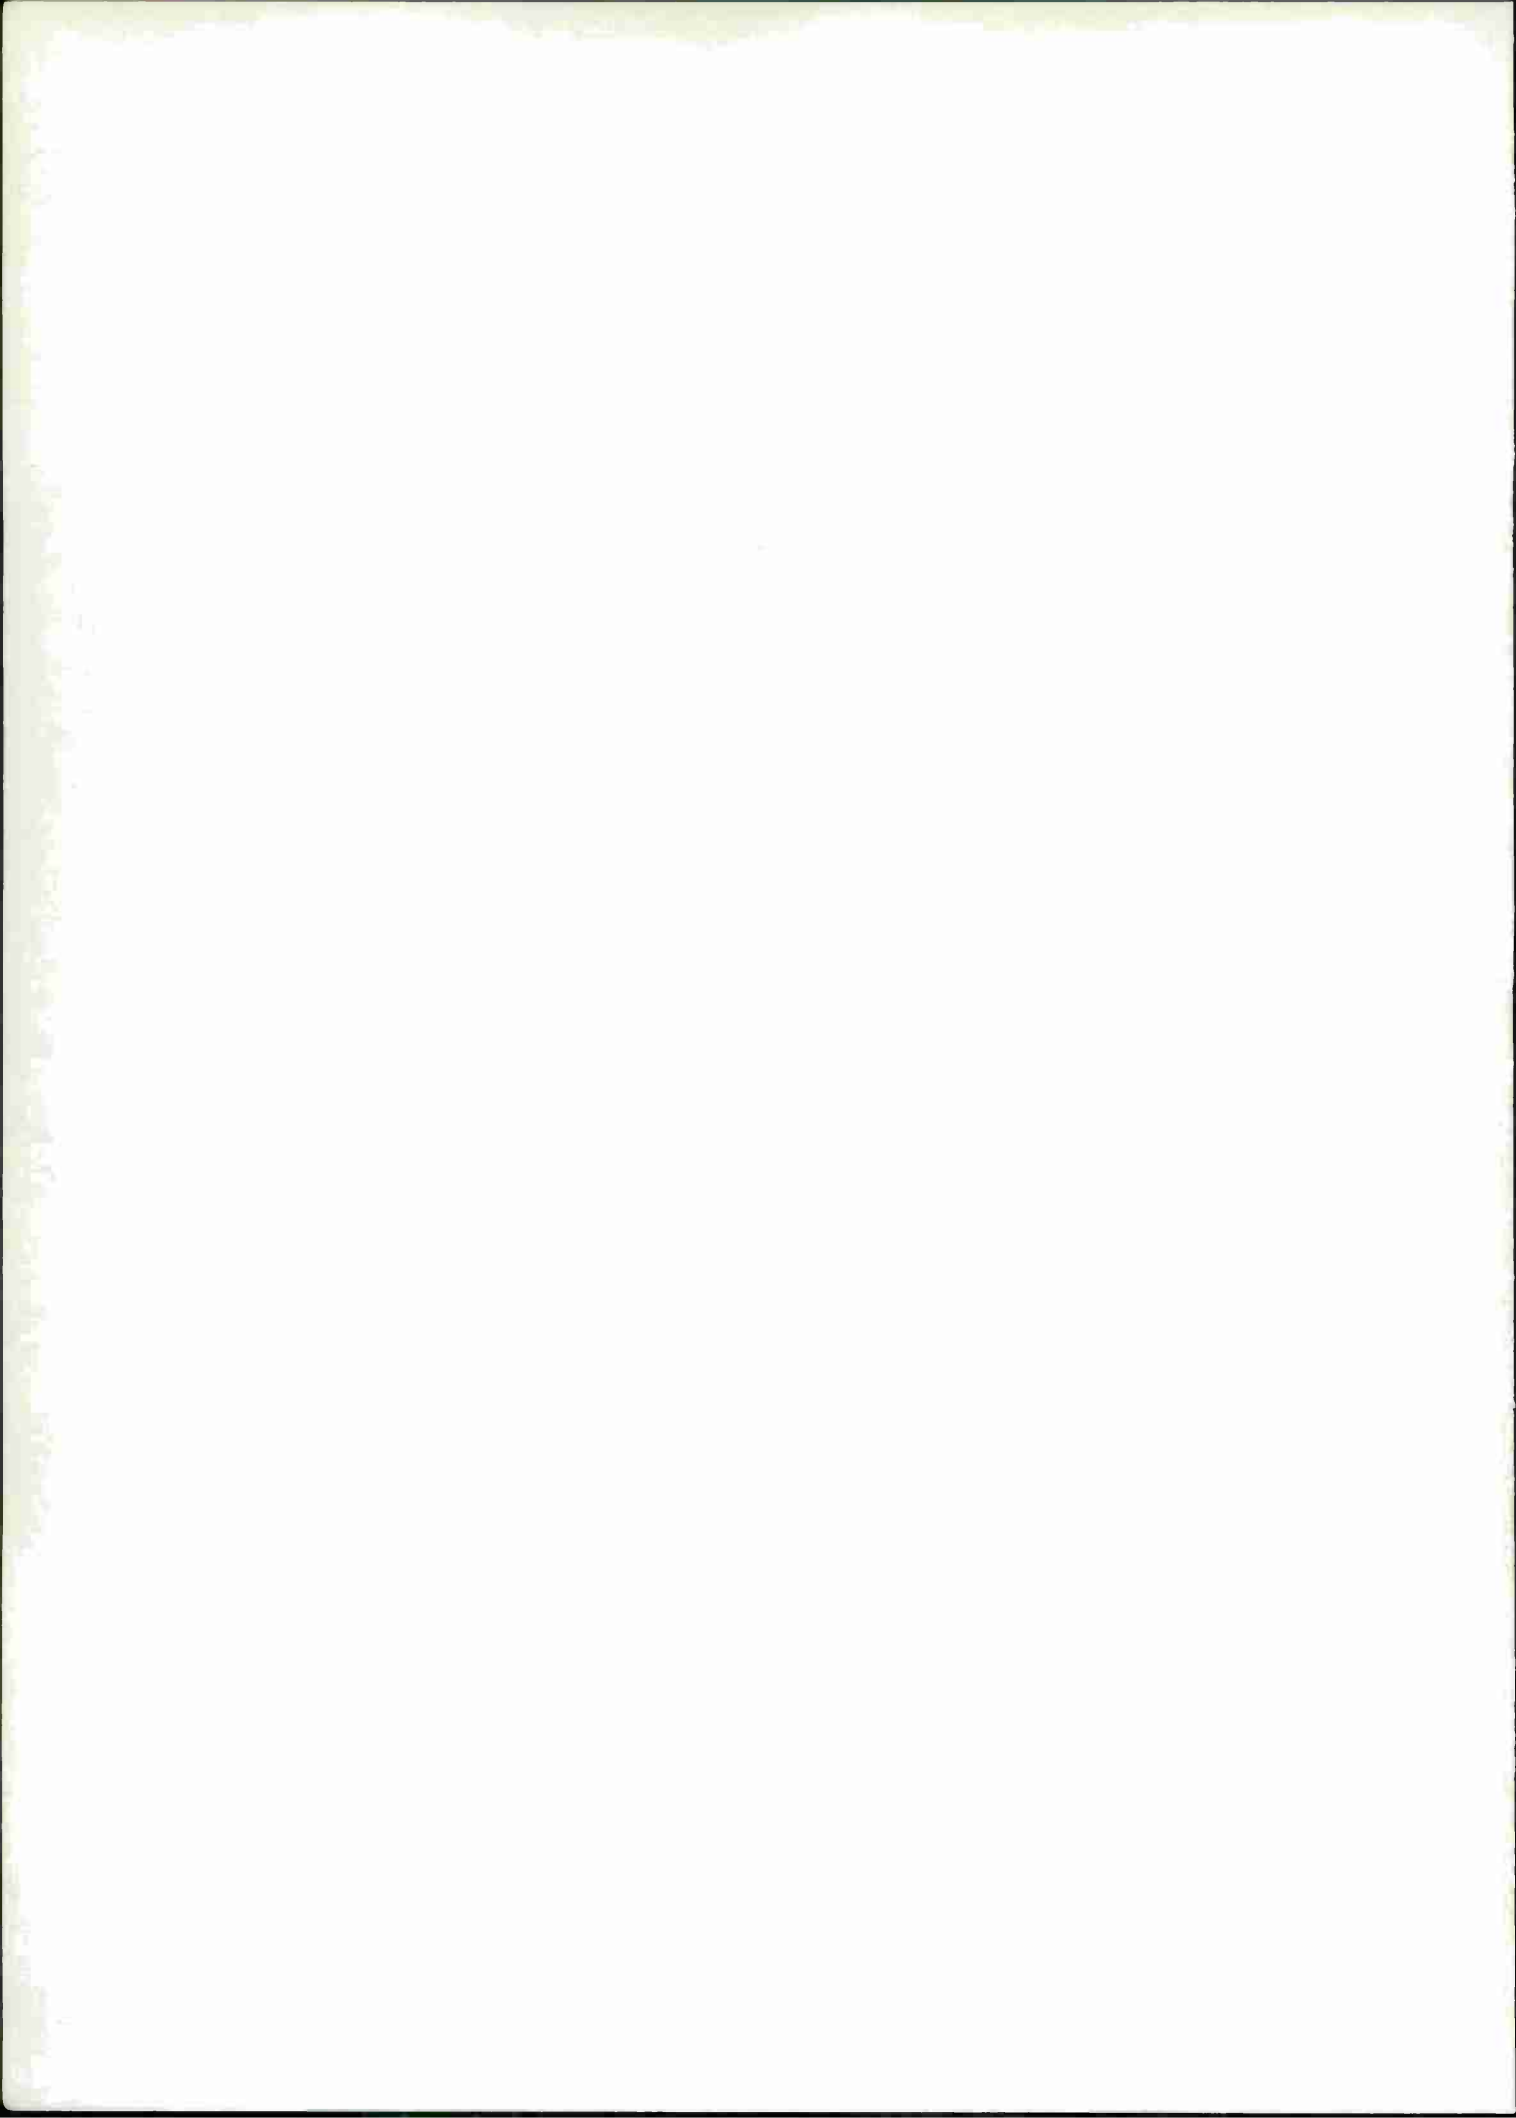

## TABLE OF CONTENTS

	<u>Page</u>
INTRODUCTION . . . . .	5
EXPERIMENTAL EQUIPMENT . . . . .	5
TEST PROCEDURES . . . . .	6
Dynamometer Evaluations . . . . .	6
Road Test . . . . .	7
DISCUSSION OF RESULTS . . . . .	7
Dynamometer Evaluation . . . . .	7
Road Test . . . . .	9
Correlation of Dynamometer and Vehicle Tests . . . . .	12
SUMMARY OF RESULTS . . . . .	13
CONCLUSIONS . . . . .	13
RECOMMENDATIONS . . . . .	14
REFERENCES . . . . .	14
APPENDIX A—Test Lubricant, MIL-L-2104C/MIL-L-46152 . . . . .	A-1
APPENDIX B—Commercial Test Fuels . . . . .	B-1
APPENDIX C—Dynamometer Test Cycle . . . . .	C-1
APPENDIX D—Dynamometer Test Results . . . . .	D-1
APPENDIX E—Road Test Course . . . . .	E-1
APPENDIX F—M-151 Road Test Results . . . . .	F-1

## LIST OF ILLUSTRATIONS

<u>Figure</u>		<u>Page</u>
1	TRW Low-Blowby Piston Ring Configuration . . . . .	5
2	Full Throttle Power and Specific Fuel Consumption, L-141 Engine . . . . .	8
3	Full Throttle Mean Effective Pressure and Blowby, L-141 Engine . . . . .	8
4	Change in TAN and TBN, Dynamometer Evaluation . . . . .	9
5	Engine Oil Viscosity at 99°C, M-151 Road Test . . . . .	9
6	Engine Oil Viscosity at 38°C, M-151 Road Test . . . . .	10
7	Cumulative Oil Consumption, M-151 Road Test . . . . .	10
8	Acid and Base Number Changes, M-151 Road Test . . . . .	10
9	Differential Infrared Analysis of Final Oil Samples, M-151 Road Test . . . . .	11
10	Insoluble Resins in Final Drain Samples, M-151 Road Test . . . . .	12
11	Wear in Babbit Overlay, M-151 Road Test . . . . .	12
12	Wear Metals Content of Engine Oils, M-151 Road Test . . . . .	13

## LIST OF TABLES

<u>Table</u>		<u>Page</u>
1	Average Operating Conditions, Dynamometer Evaluation . . . . .	8
2	Piston Ring End Gap Change, M-151 Road Test . . . . .	13

## INTRODUCTION

Within the last decade, there has been great concern over the means of disposing of used engine oils from both military and non-military sources. Techniques for recycling the oils or burning them in heating plants have met with continuing problems, particularly those related to the metals content of the used oils. However, a relatively unexplored approach is to extend the life of the lubricants in the engine so that draining becomes unnecessary. For the military, this approach can be particularly attractive in that along with environmental and cost savings, reduction or elimination of engine oil drains has the potential benefits of maintenance savings and increased readiness due to reduced downtime. This approach would also reduce the logistics problems involved with transporting supplies of fresh oils.

Much work done at AFLRL and elsewhere has shown that the primary causes of engine oil degradation are blowby and heat. While little can be done about heat, since the oil is used to help cool the pistons, blowby is the result of imperfect sealing of the combustion chamber. If blowby could be eliminated or substantially reduced, then the engine's oil should degrade more slowly. By increasing or eliminating the oil-drain interval, this would substantially reduce the amount of used oil that must be discarded, and would also potentially reduce the demand for virgin oil.

The first phase of the program<sup>(1,2,3,4)</sup> \* covered the operation of a M-151 Military Utility Tactical Truck (MUTT) under no-oil-drain conditions for 32,180 km (20,000 miles). That road test, over approximately the same course used in this work, indicated that current dual qualified MIL-L-2104C/MIL-L-46152<sup>(5,6)</sup> lubricants cannot control oil viscosity increases sufficiently to allow no-drain vehicle operation under moderate- to high-temperature operation. However, *except for oil viscosity increase*, the present L-141 engine in the M-151 vehicle, using MIL-L-2104C/MIL-L-46152 qualified lubricants, showed the potential for extended drain operation without formation of excessive deposits or wear.

This report, which covers the second phase of an on-going program to define methods of extending the life of engine oils by mechanical modifications to the engine, deals with an experimental piston ring configuration intended to substantially reduce the amount of blowby.

### EXPERIMENTAL EQUIPMENT

Thompson-Ramo-Woodridge, Inc. (TRW) provided four sets of a low-blowby piston ring configuration for the L-141 engine under a cooperative agreement with the U.S. Army Fuels and Lubricants Research Laboratory (AFLRL). This piston ring configuration (Figure 1) consists of conventional top and oil control rings plus two narrow rings and an elastomer seal in place of the normal second ring. The two rings, both tapered face type, are installed with their ring

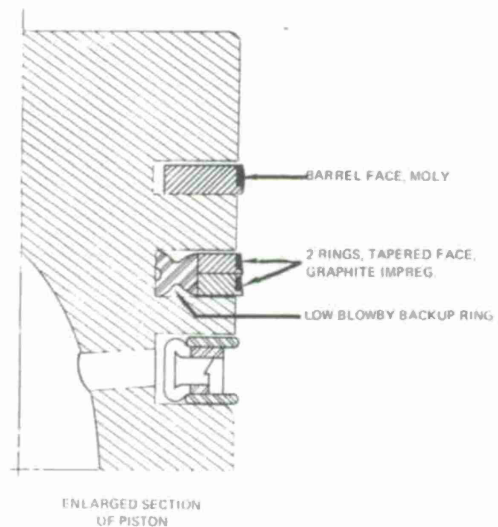


FIGURE 1. TRW LOW-BLOWBY PISTON RING CONFIGURATION

\*Superscript numbers in parentheses indicate references at the end of this report.

gaps 180 deg apart to seal the ring gap opening, and the elastomer seal, of semi-cloverleaf cross section, seals the blowby path around the back of the rings and also keeps them from rotating. The only piston modification required was slight widening and deepening of the second ring groove. Since the rings were molybdenum faced rather than the chrome and cast iron rings of the standard engine, the cylinder bore surface finish was smoothed to the 5- to 15- $\mu$ in. range, compared with the 15- to 40- $\mu$ in. range for the standard engine.

New L-141 engines, used in the M-151 Military Utility Tactical Truck (MUTT), were provided by TACOM, as were two complete M-151 vehicles which were used for the road evaluation phase of both this and the previous work.

For the laboratory phase of this work, an engine was installed on a 130-kW (175-hp) eddy current dynamometer with provisions for speed and load control. Engine speed was measured using a 60-tooth gear, magnetic pickup and digital frequency counter while load was measured by cradling the dynamometer and measuring its torque reaction with a BLH strain gauge-type load cell and digital indicator. The engine's fuel consumption was measured by a Flotron mass flowmeter capable of determining fuel flow rate to within 0.05 kg/hr (0.1 lb/hr). Engine blowby was measured by first removing the existing positive crankcase ventilation system and providing a vent in the crankcase that could be connected to a flowmeter. The blowby gases were routed through a jacket water-heated heat exchanger to keep the blowby gases from cooling below the dew point. The gases were then measured with a calibrated dry gas meter before being exhausted into the test cell. All blowby flow rates were corrected to 55°C (120°F).

REO-203, a qualified MIL-L-2104C/MIL-L-46152 grade 30 lubricant, was used throughout both the dynamometer and road evaluations. Physical inspection data from this oil are given in Appendix A. For the dynamometer portion, a VV-G-001690A<sup>(8)</sup> unleaded gasoline (coded AL-5473) was used, while during the road test phase a commercial product meeting VV-G-001690A specifications was utilized. Physical inspections and specification comparisons of the two fuels are given in Appendix B.

During the road test portion of this work, the modified engine was equipped with all standard components other than the special piston rings and was tuned to standard specifications.

## TEST PROCEDURES

### Dynamometer Evaluations

A dynamometer cycle based on road load measurements from the M-151 vehicles was used to evaluate differences in oil degradation rate with the low-blowby rings. This test cycle, Appendix C, simulated an 80-km/hr (50-mile/hr) road load period, a 56-km/hr (35-mile/hr) high-load period, and an idle period. A 100-hr period of operation with this cycle would thus represent 5430 km (3375 miles) traveled. Three tests were conducted in this manner, a 150-hr evaluation with the standard rings, and two 225-hr tests, one with low-blowby rings and the other with standard rings. Engine oil consumption was measured every 7.5 hr and oil samples taken every 15 hr.

Oil consumption was measured by draining the oil into a weighed container for a fixed length of time (5 min) during the same period in the test cycle. The weight of oil consumed was then determined and an equal amount of new oil added. The oil was then returned to the engine. Samples of used oil were taken prior to the fresh oil additions. At the end of each test, the engine was disassembled and measured for wear and rated for engine deposits. Since there is no

standardized rating method for field-operated spark ignition engines and the established spark ignition engine deposit rating practices (i.e., CRC Manual 9) have been found to be inadequate, the piston carbon and varnish deposits on both the laboratory and field test engines were rated in accordance with standard CRC diesel engine deposit rating methods. Complete test results are given in Appendix D.

### **Road Test**

After completion of the laboratory engine tests, two new L-141 engines were prepared for installation in M-151 vehicles by first disassembling and measuring the engines, then installing a low-blowby ring set in one engine. The two vehicles, which were loaded to their rated cross country capacity of 249 kg (550 lb), were operated over a 45.5-km (28.3-mile) course consisting of 34 percent unimproved roads and 18 percent highway speeds on level roads. The remainder was low-speed post-type operation. The two vehicles were driven 16 hr per day, 5 days per week and accumulated mileage at approximately 650 km (400 miles) per day. A summary of the operating conditions is given in Appendix F. Both vehicles were operated on unleaded gasoline (code AL-5894) meeting VV-G-001690A specifications.

Engine oil samples were taken every 4800 km (3000 miles), and the engines were tuned and road octane determinations made every 12,900 km (8000 miles). This was continued for the 35,700-km (22,200-mile) duration of the test.

## **DISCUSSION OF RESULTS**

### **Dynamometer Evaluation**

Initial full-throttle performance evaluations of the low-blowby rings (Figures 2 and 3) showed as much as a 65-percent reduction in blowby without a power- or fuel-consumption penalty. Although the low-blowby piston rings cause an additional line of bore contact, either the resultant friction is insignificant or the ring face coatings reduce friction from ring drag to approximately the level of the standard engine.

Three extended duration tests were then conducted, and detailed test results are given in Appendix D, while Table 1 summarizes the operating conditions for the tests. All three tests were completed without incident or unscheduled shutdowns. While power and specific fuel consumption were similar with the low-blowby rings, blowby at the loaded conditions was reduced as much as 80 percent, and the oil sump temperature was reduced 5 deg Celcius (9 deg F). Used oil analysis showed no significant differences in degradation rates except for a departure in acid and base number (Figure 4) for the standard ring-equipped engine's oil compared with that of the low-blowby ring-equipped engine after approximately 125 hr. The base number of the standard engine's oil decreased by 57 percent to 2.2 after 225 hr while in the same period the modified engine's oil had only a 6-percent decrease. This degradation was also observed in total acid number where the standard engine's oil increased 83 percent while the modified engine increased 33 percent.

There were no significant differences between the two ring systems in the rate of change in engine oil viscosity. By 195 test hours, both oils had increased by 23 percent to approximately 150 cSt at 38°C (100°F). While there was some difference in final oil viscosities between the two 225-hr tests, these appeared during the last 30 hr of the test, and further testing would be required to determine if these differences were significant.

TABLE 1. AVERAGE OPERATING CONDITIONS,  
DYNAMOMETER EVALUATION

Test No. Piston Ring Type Hours Completed Total Oil Consumed, kg (lb)	1 Standard 150 0.736 (1.62)	2 Low Blowby 225 1.76 (3.87)	3 Standard 225 2.04 (4.49)
<i>2800 RPM Mode</i>			
Torque, N-m (lb/ft)	127 (94)	126 (93)	125 (92)
Observed Power, kW (bHp)	37.5 (50.3)	37.1 (49.7)	36.7 (49.2)
Specific Fuel Consumption, kg/kW-hr (lb/bHp-hr)	0.331 (0.544)	0.330 (0.542)	0.317 (0.521)
Blowby at 49°C, m <sup>3</sup> /hr (ft <sup>3</sup> /hr)	1.35 (47.8)	0.27 (9.7)	1.29 (45.6)
Sump Temperature, °C (°F)	121 (250)	116 (241)	122 (251)
<i>2000 RPM Mode</i>			
Torque, N-m (lb/ft)	129 (95)	129 (95)	127 (94)
Observed Power, kW (bHp)	26.9 (36.1)	27.1 (36.3)	26.6 (35.7)
Specific Fuel Consumption kg/kW-hr (lb/bHp-hr)	0.352 (0.579)	0.344 (0.566)	0.332 (0.546)
Blowby at 49°C, m <sup>3</sup> /hr (ft <sup>3</sup> /hr)	1.00 (35.3)	0.25 (8.7)	0.909 (32.1)
Sump Temperature, °C (°F)	102 (216)	97 (207)	104 (220)
<i>Idle Mode</i>			
Torque, N-m (lb/ft)	0	0	0
Observed Power, kW (bHp)	0	0	0
Blowby at 49°C, m <sup>3</sup> /hr (ft <sup>3</sup> /hr)	0.249 (8.8)	0.062 (2.2)	0
Sump Temperature, °C (°F)	62 (144)	59 (139)	59 (138)

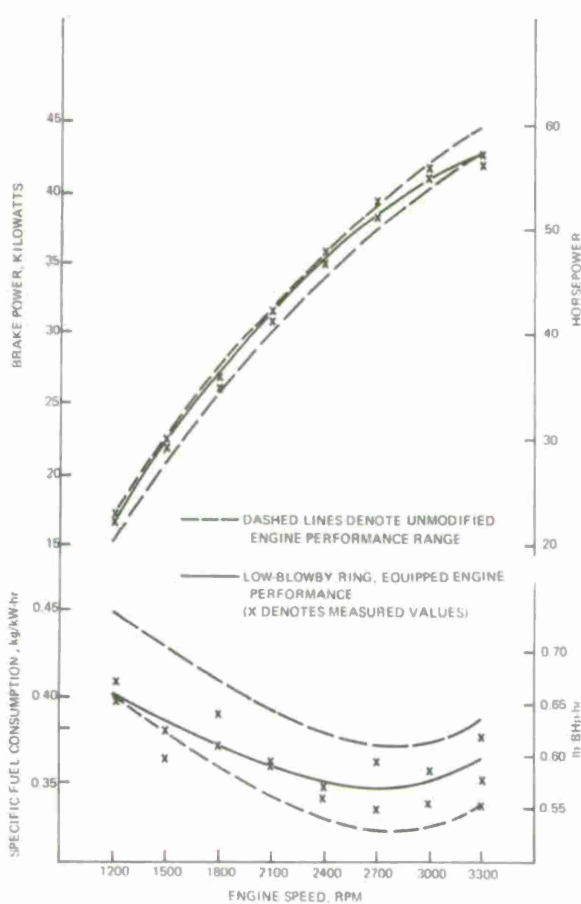


FIGURE 2. FULL THROTTLE POWER AND SPECIFIC FUEL CONSUMPTION L-141 ENGINE

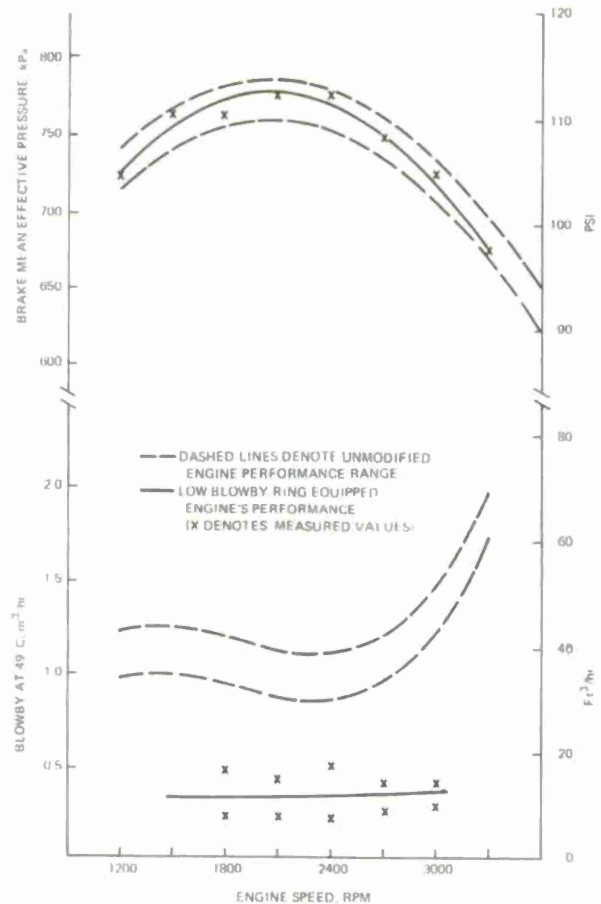


FIGURE 3. FULL THROTTLE MEAN EFFECTIVE PRESSURE AND BLOWBY L-141 ENGINE

Ring wear as evidenced by changes in end gap was negligible, and there were no signs of distress nor was there any evidence of deterioration of the elastomer seal. Deposits were light, with the piston deposits for the two 225-hr tests falling in the range of 10 to 20 when rated using the AFLRL modified deposit rating method, which assigns a demerit rating ranging from a clean of 0 to as much as 700 conceivable for a totally carbon-encrusted piston. Detailed oil analysis data and deposit and wear measurements are given in Appendix D.

### Road Test

When the dynamometer evaluations were completed, a road test of the low-blowby ring package was conducted using two M-151 vehicles, one of which was to provide a standard for comparison. Both vehicles were operated without changing either the engine oil or oil filter and adding oil only when necessary. The road test route is summarized in Appendix E, and detailed results of the test are given in Appendix F.

While both vehicles completed the test without engine-related problems, there were significant differences between the two vehicles, with the viscosities of the engine oils being the limiting factor in no-drain operation.

Figures 5 and 6 show the oil viscosities throughout the test. Note that the end of test oil viscosity from the unmodified engine had increased from 12.61 cSt at 99°C (210°F) to 20.34 cSt at 99°C, a 61-percent increase that put the oil well into the SAE 50 grade range. The oil viscosity in the modified engine was in the SAE 40 grade range with 16.59 cSt at 99°C (210°F), an increase of 32 percent from the new oil. The oil viscosity at 38°C (100°F), often more sensitive to oil thickening, had increased 103 percent to 246.8 cSt in the standard engine and by 55 percent to 187.0 cSt in the modified engine. These viscosity increases, particularly that in the unmodified engine, were considered unacceptable.

Figure 7 shows the cumulative oil consumption for the two vehicles. The consumption rates, 11,400 km/liter (6700 miles/quart) for the

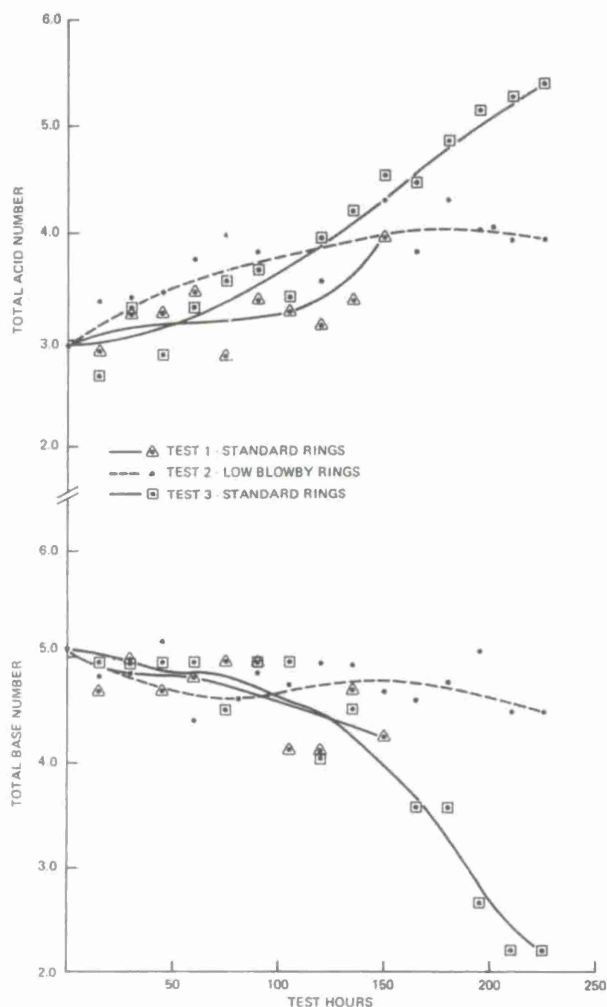


FIGURE 4. CHANGE IN TAN AND TBN DYNAMOMETER EVALUATION

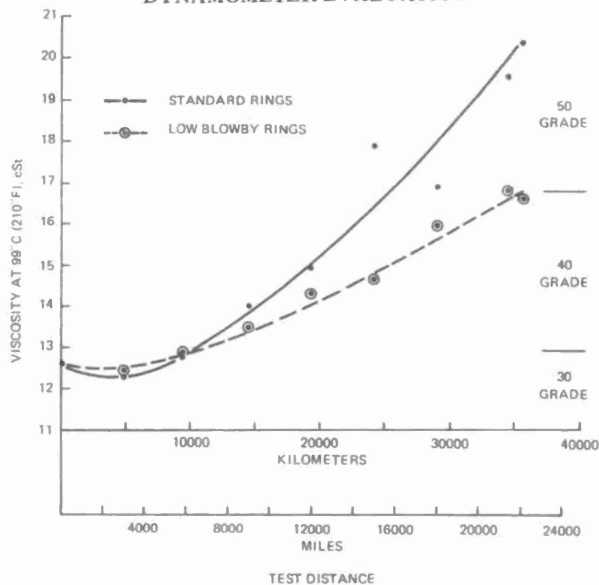


FIGURE 5. ENGINE OIL VISCOSITY AT 99°C M-151 ROAD TEST

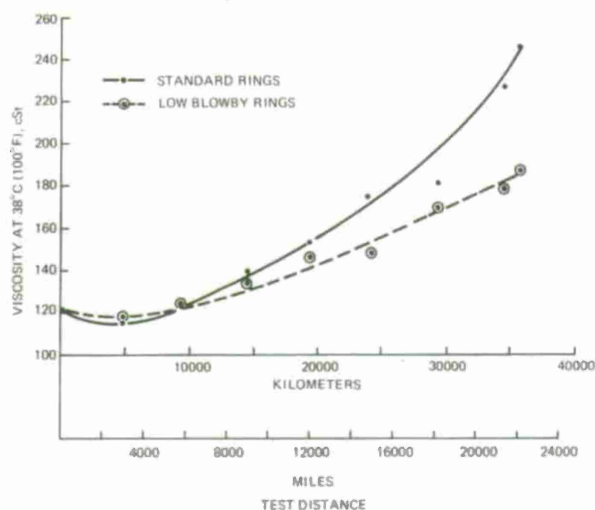


FIGURE 6. ENGINE OIL VISCOSITY AT 38°C M-151 ROAD TEST

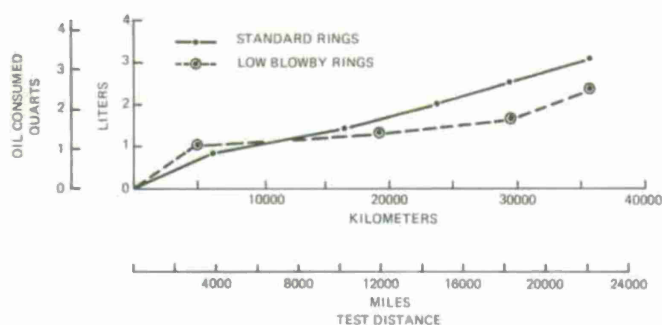


FIGURE 7. CUMULATIVE OIL CONSUMPTION M-151 ROAD TEST

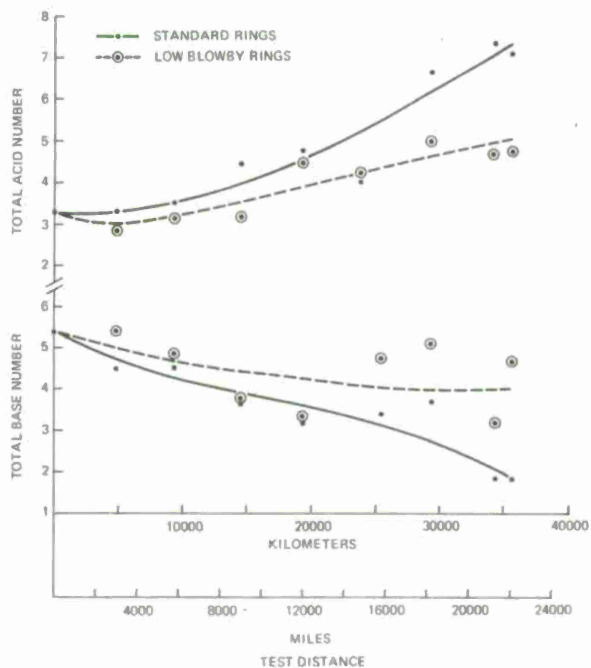


FIGURE 8. ACID AND BASE NUMBER CHANGES M-151 ROAD TEST

standard engine and 15,000 km/liter (8800 miles/quart) for the modified engine, were considered unusually low, and this lack of oil consumption and subsequent low oil addition rate contributed to the increased oil degradation. Earlier M-151 vehicle operation over this course<sup>(1)</sup> had averaged 10,000 km/liter (5800 miles/quart) and other studies<sup>(9)</sup> had shown consumption rates for this vehicle averaging as high as 560 km/liter (330 miles/quart).

Figure 8 shows the total acid number and total base number changes for the two engine oils. The more rapid increase in TAN with an associated TBN decrease indicates a more rapid oil additive depletion rate in the standard engine. Differential infrared analysis of the final oil drains, Figure 9, substantiate this by the larger increase in oxidation and nitration products in the oil of the unmodified engine. The oxidation products absorption peak at  $1720\text{ cm}^{-1}$  indicate approximately three times greater concentration of oxidation products in the standard engine's oil than in the modified engine's. There appears to be eight times as much nitration in the standard engine as in the modified engine, based on the nitrogen compound absorption peak at  $1640\text{ cm}^{-1}$ . This is substantiated by other nitrogen compound absorption peaks throughout the spectrum, particularly that at  $860\text{ cm}^{-1}$ . This picture of reduced oil degradation in the low-blowby ring equipped engine is again shown in the pentane and benzene insolubles content of the final oil drain. The arithmetic difference between procedure B pentane and benzene insolubles, Figure 10, which indicates the amount of insoluble resins in the oil, was three times higher in the standard engine than in the modified engine. These oil analysis data indicate that the low-blowby piston rings reduced oil degradation due to oxidation and nitration by at least a factor of two. The viscosity increases of the oils showed this engine severity reduction, but it appears that this reduction is not adequate to continually maintain

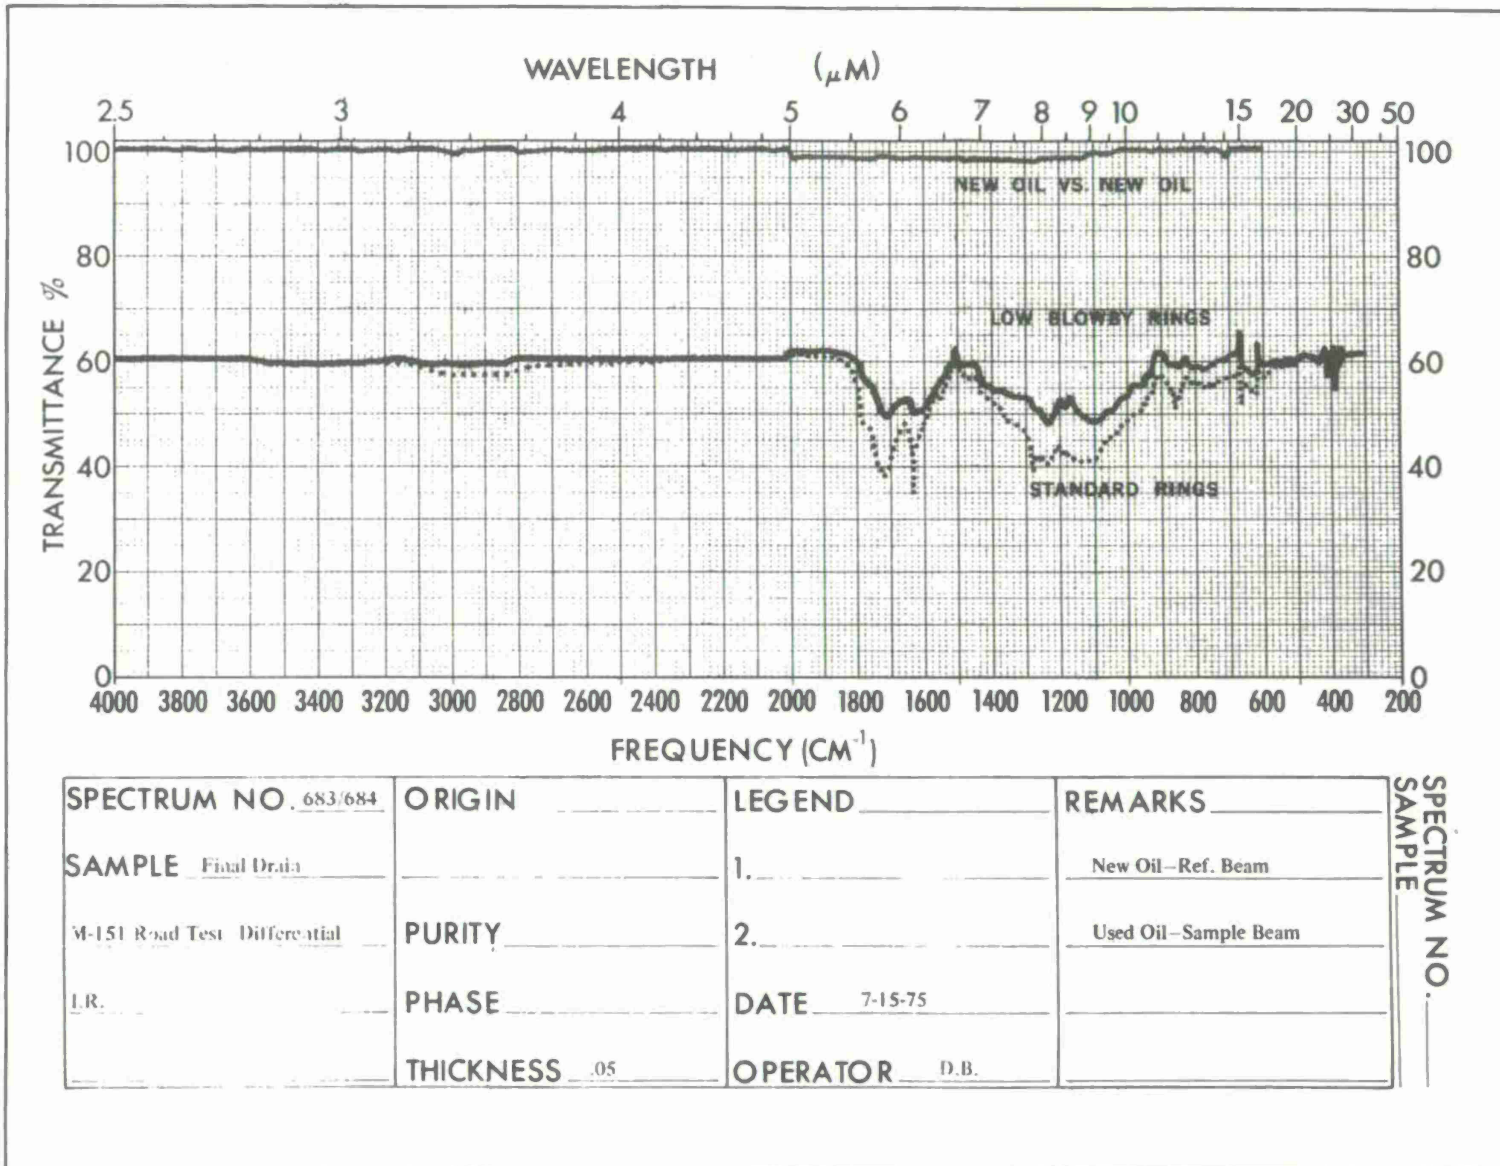


FIGURE 9. DIFFERENTIAL INFRARED ANALYSIS OF FINAL OIL SAMPLES, M-151 ROAD TEST



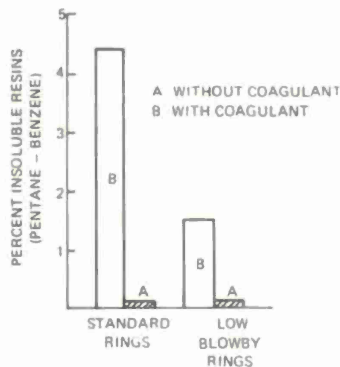


FIGURE 10. INSOLUBLE RESINS IN FINAL DRAIN SAMPLES, M-151 ROAD TEST

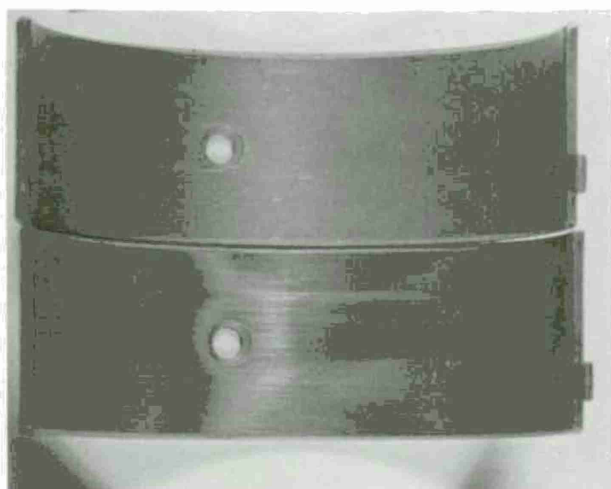

*Low Blowby Rings*

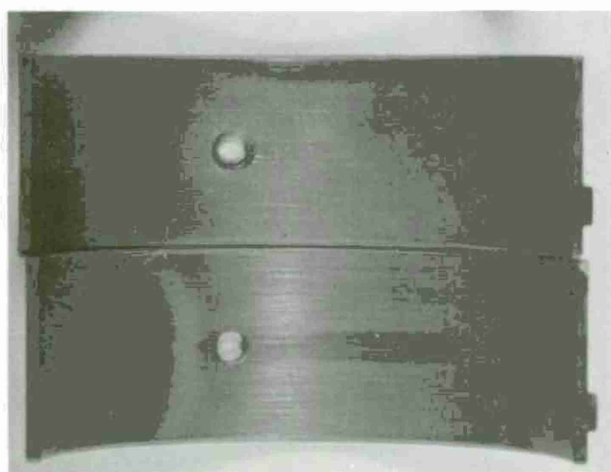

*Standard Rings*

FIGURE 11. WEAR IN BABBIT OVERLAY, M-151 ROAD TEST

the engine oil viscosity at acceptable levels under no-drain operation. However, an increase in oil consumption would tend to help control this viscosity increase.

Reduced blowby and reduced oil degradation should be reflected in a reduction in varnish and deposits in the engine. While both engines were very clean, indicative of the high quality level oil used during the tests, there were differences in deposits between the two engines. The average piston skirt and relief area demerit rating of the standard engine was 2.1 while the average demerit rating of the low-blowby modified engine was 0.6 for the skirts and 0.7 for the relief areas, where 0 is clean. The pistons were also rated using the AFLRL modified deposit rating method, which provides a single demerit number indication of the deposit levels on the piston ring zone and undercrown. The standard engine had an average rating, with the

second ring groove excluded, of 210 while on the same basis, the modified engine had an average rating of 107, a lower and thus cleaner rating. The second ring groove was excluded from the rating because the elastomer seal behind the second rings of the low-blowby configuration made deposit determination difficult. Complete ratings are given in Appendix F.

Wear in both engines was normal and acceptable, although the ring gap increases in the standard engine (Table 2) were greater than those of the modified engine, partially due to the difference in ring face materials. While the connecting rod bearings were normal in both engines, more of the babbitt overlay in the highly loaded areas had been removed in the standard engine than in the modified engine (Figure 11). Iron and copper content of the used oil samples (Figure 12) show that while the iron contents were essentially equal by the end of the road test, there appears to be a difference in copper wear rates.

#### Correlation of Dynamometer and Vehicle Tests

Based on road load measurements and M-151 vehicle gear ratios, 100 hr of the dynamometer test cycle represent 5430 km or 3375 miles of vehicle operation. However, when comparisons are made of the amount and rate of engine oil degradation, the dynamometer cycle appears to be approximately twice as severe as the above mileage figures indicate. Based on the change in total acid and base numbers in the standard engine's oil compared to the results from the

TABLE 2. PISTON RING END GAP CHANGE, M-151 ROAD TEST

	Piston number											
	1			2			3			4		
	1	2t	2b	1	2t	2b	1	2t	2b	1	2t	2b
Standard, mm	0.229	0.203	--	0.178	0.305	--	0.127	0.254	--	0.127	0.229	--
Rings, (in.)	(0.009)	(0.008)	--	(0.007)	(0.012)	--	(0.005)	(0.010)	--	(0.005)	(0.009)	--
Low-Blowby, mm	0.102	0.102	0.076	0.152	0.178	0.127	0.152	0.152	0.178	0.127	0.102	0.178
Rings, (in.)	(0.004)	(0.004)	(0.003)	(0.006)	(0.007)	(0.005)	(0.006)	(0.006)	(0.007)	(0.005)	(0.004)	(0.007)

M-151 road tests, the dynamometer cycle degraded the oil at a rate of 10,940 km (6800 miles) per 100 test hours. When comparisons are made using the changes in oil viscosity at both 38°C (100°F) and 99°C (210°F), the oil appears to degrade at a rate such that 100 test hr is equivalent to 9800 km (6100 miles). Based on these two figures, the 225-hr dynamometer test represents 23,500 km (14,600 miles) of operation over the test course used.

**SUMMARY OF RESULTS**

The TRW, Inc. low-blowby ring package, by substantially reducing the amount of blowby entering the sump of the L-141 engine, significantly reduced oil degradation as evidenced by a smaller viscosity increase, reduced oxidation and nitration products in the drained oil, and lower deposit levels in the modified engine as compared to the standard engine. However, the oil viscosity in the modified engine, while increasing at half the rate of the standard engine, did not appear to be stabilizing at any constant value.

This piston ring system, while not allowing unlimited no-drain operation, does appear to extend the useful life of the oil without any performance or economy penalty. No performance loss was detected during dynamometer evaluations, and the overall fuel mileage for both vehicles averaged 13.5 liters per 100 km (17.4 miles/gal.) during the road test. If the engine oil drain criteria is a 35-percent increase in the viscosity at 99°C (210°F), then the standard engine's oil would be drained at approximately 22,500 km (14,000 miles), which slightly exceeds the drain interval of 19,300 km (12,000 miles) presently specified. Based on this same 35-percent viscosity increase criteria, the modified engine's oil would be drained at approximately 35,400 km (22,000 miles), a 57-percent increase in oil life and greater than the expected 33,000 km (20,000 mile) vehicle lifetime. However, these drain intervals apply only to

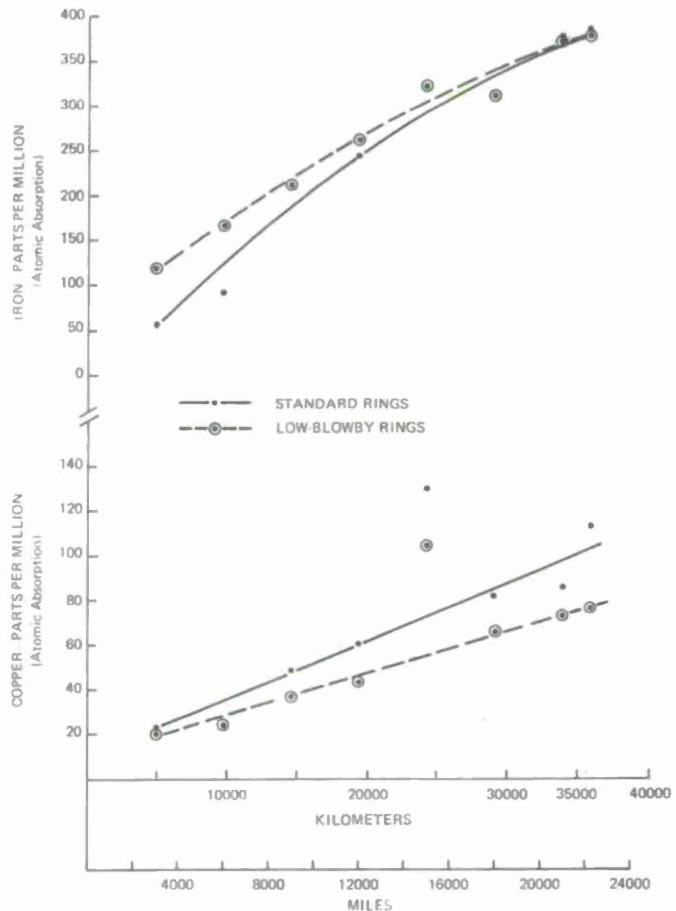


FIGURE 12. WEAR METALS CONTENT OF ENGINE OILS, M-151 ROAD TEST

this accelerated mileage accumulation cycle and would require further evaluation before being applied to vehicles with other driving cycles.

The main and connecting rod bearings of both engines were acceptable, although the babbitt layer had been removed. Other wear was also acceptable, and the engines were considered to be in good condition, although the modified engine had a lower level of deposits.

### CONCLUSIONS

- The TRW, Inc. low-blowby piston rings substantially reduce the amount of blowby reaching the oil sump of the L-141 engine without reducing engine power or increasing fuel or oil consumption.
- This reduction in blowby decreases the engine oil degradation 50 percent or more during medium- to high-temperature operation as evidenced by oil oxidation and nitration, viscosity increase, and engine deposits.
- These low-blowby rings, in conjunction with a high quality level single-grade MIL-L-2104C/MIL-L-46152 qualified oil, appear to make no-drain operation feasible for the 33,000-km (20,000-mile) expected life of the M-151 vehicle when operated in a temperate zone where seasonal drains are unnecessary.
- However, these rings do not allow no-drain operation in areas where wide temperature extremes dictate seasonal drains of the single-grade oil required by the M-151 vehicle lubrication order.


### RECOMMENDATIONS

- Further evaluation of this piston ring package should be carried out under more varied climatic and operating conditions. In particular, cold weather operation with its associated low-temperature oil contamination and degradation should be examined.
- Studies should be conducted using multiviscosity and synthetic engine oils in conjunction with these rings as methods of eliminating seasonal oil drain requirements.
- Studies of blowby control in diesel engines should be initiated to determine the potential benefits with this engine type. Particular attention should be given to reductions in soot contamination.

### REFERENCES

1. E.C. Owens, S.J. Lestz, R.D. Quillian, Jr., "Never-Drain Engine Oil Technology," USAFLRL Interim Report No. 49, ADA012777, June 1975.
2. J.T. Gray, "Study and Evaluation in the Field of Environmental Pollution Relative to the Utilization of Army Material," USAFLRL Final Summary Report No. 50, AD003335, Contract DAAD05-72-C-0053, October 1974.

3. Status Report of AFLRL Position Paper on Single Lubricant/Never-Drain Engine Oil Concept, Letter (File: F7-3672 and G3-7372) AFLRL to USAMERDC, STSFB-GL, dated 13 August 1974.
4. AFLRL Position Paper, "Single Lubricant/Never-Drain Engine Oil Concept," Letter (File F7-3672 and G3-7372) AFLRL to USAMERDC, STSFB-GL, dated 17 October 1974.
5. U.S. Military Specification MIL-L-2104C, "Lubricating Oil, Internal Combustion Engine, Tactical Service," November 1970.
6. U.S. Military Specification MIL-L-46152, "Lubricating Oil, Internal Combustion Engine, Administrative Service," November 1970.
7. Contract No. DAAD05-72-C-0053, U.S. Army Mobility Equipment Research and Development Center, Fort Belvoir, Virginia 22060.
8. Federal Specification VV-G-001690A, "Gasoline, Low Lead or Unleaded," April 1974.
9. J. O'Flaherty, R.J. O'Rorke, Sr., "Fuel and Oil Costs for Army Equipment," Contract No. DA44-188-ARO-1, AD844049.

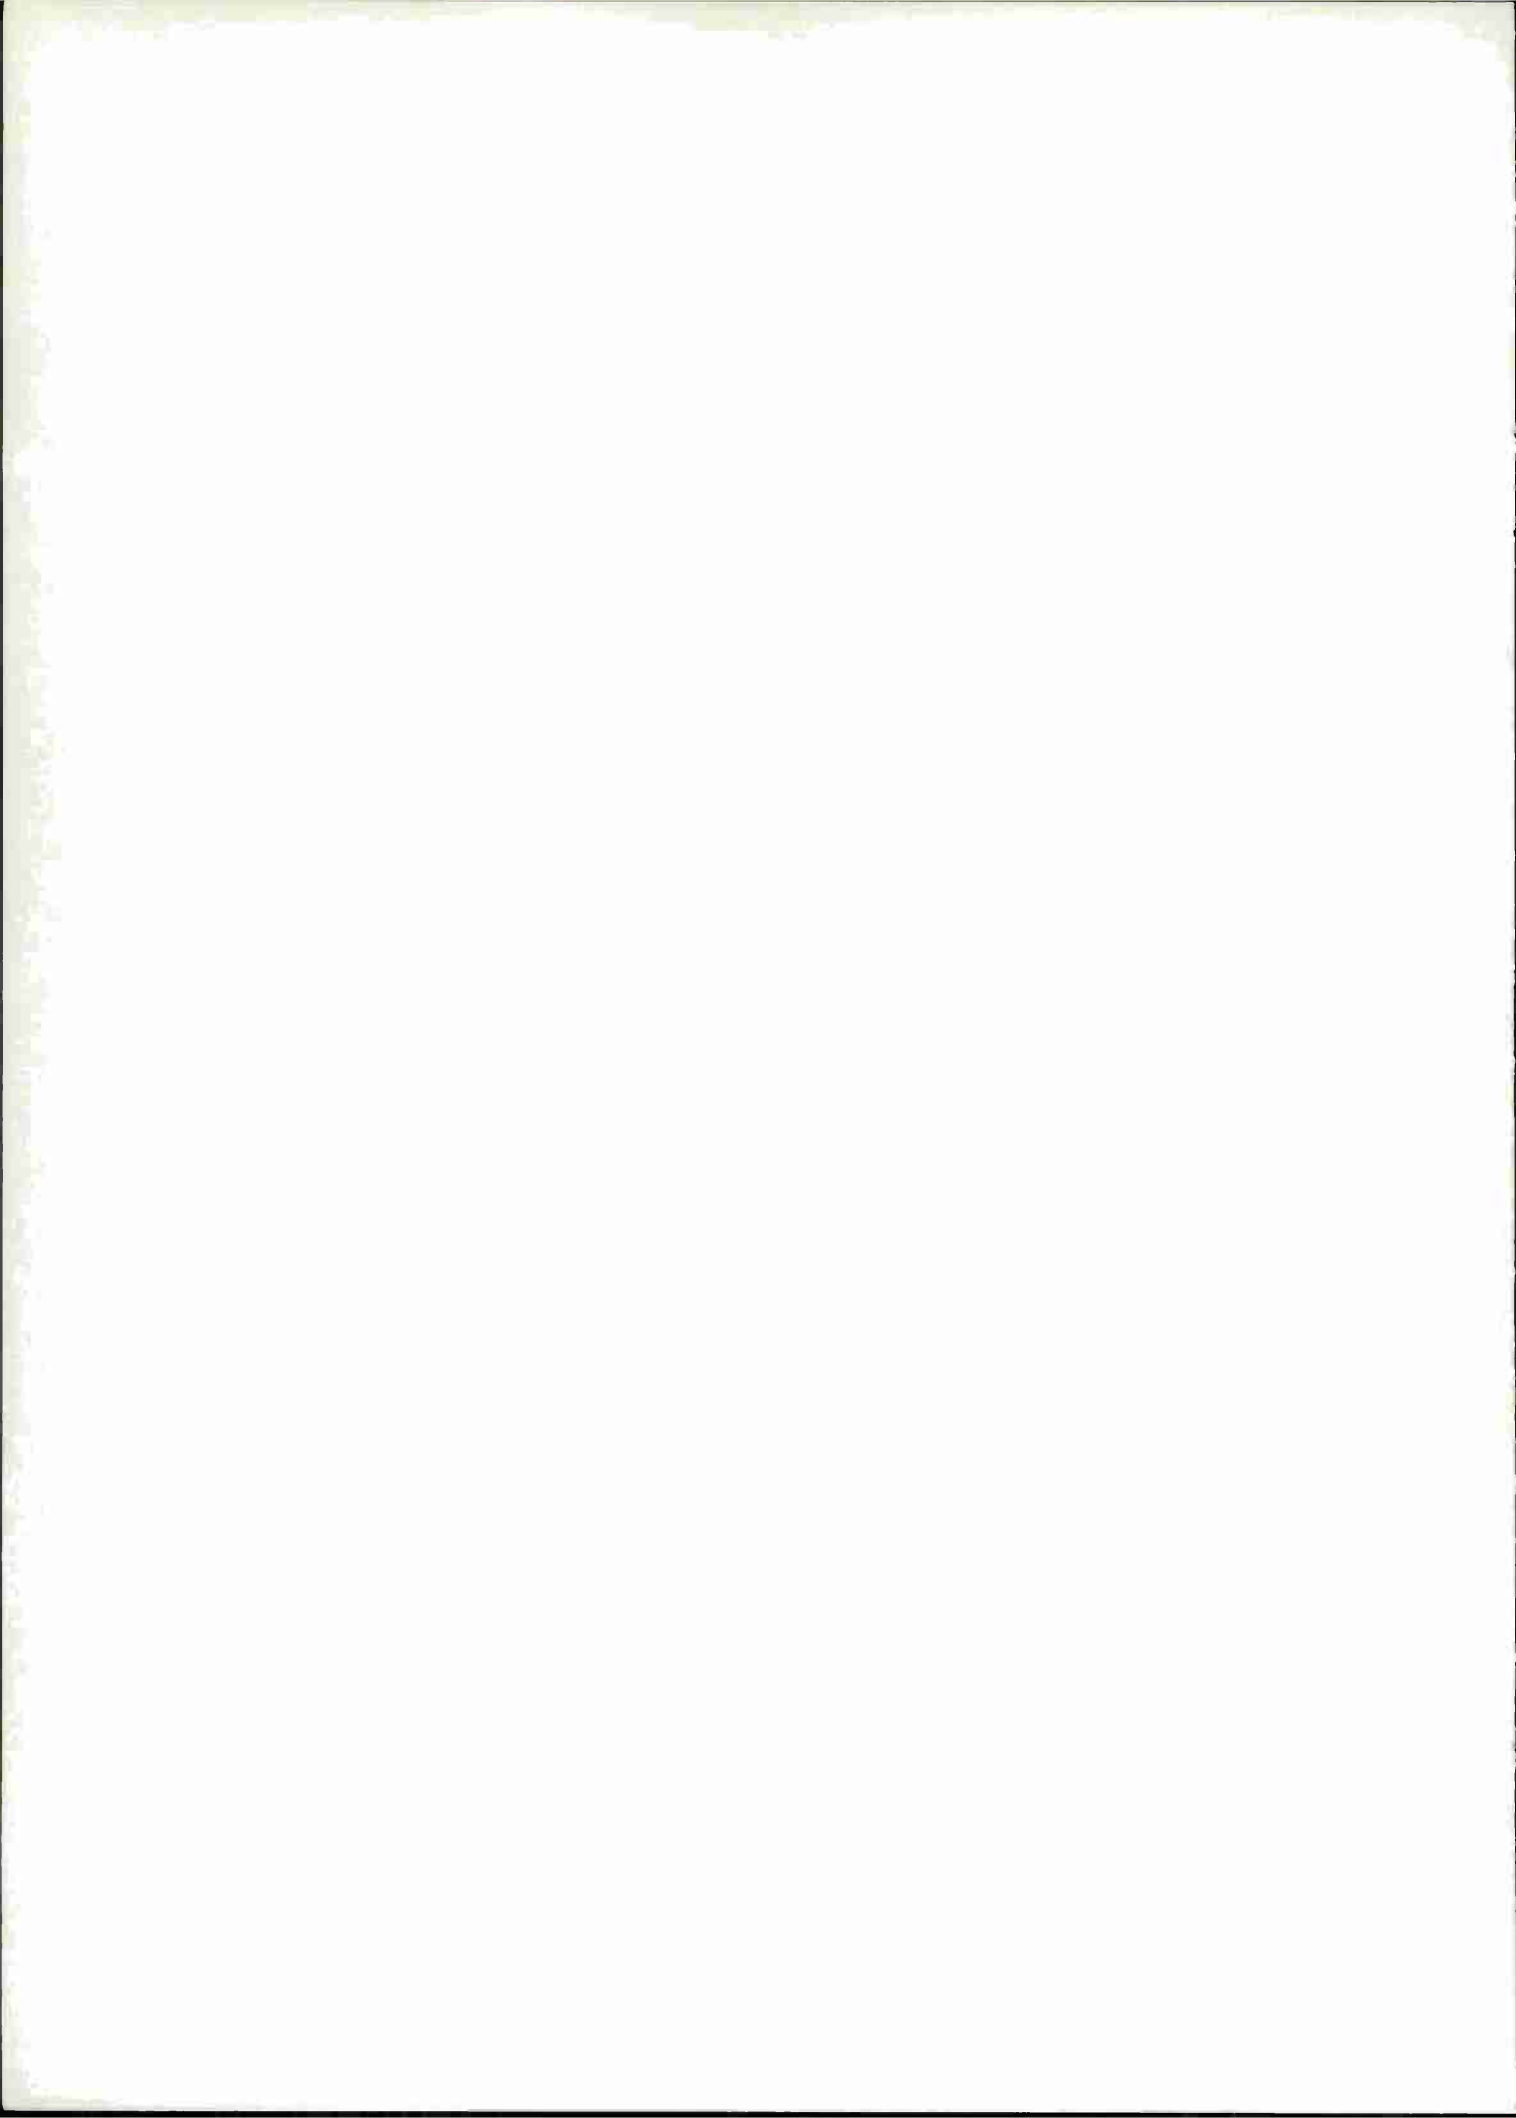

APPENDIX A


TEST LUBRICANT, MIL-L-2104C/MIL-L-46152

The first part of the document discusses the importance of maintaining accurate records of all transactions. It emphasizes that every entry, no matter how small, should be recorded to ensure the integrity of the financial data. This includes not only sales and purchases but also expenses and income. The document provides a detailed list of items that should be tracked, such as inventory levels, accounts payable, and accounts receivable. It also outlines the procedures for recording these transactions, including the use of journals and ledgers. The second part of the document focuses on the reconciliation process, which is essential for identifying and correcting errors. It describes how to compare the company's records with bank statements and other external sources to ensure that the numbers match. The document also discusses the importance of regular audits and the role of management in overseeing the financial reporting process. Finally, the document concludes with a summary of the key points and a call to action for the reader to implement the recommended practices.

## APPENDIX A

## Test Lubricant, MIL-L-2104C/MIL-L-46152

<u>Property</u>	<u>REO-203 (CCL-L-759)</u>	<u>Specification Requirements MIL-L-2104C/MIL-L-46152</u>
Viscosity, cS		
at 99°C (210°F)	12.61	9.6 - 12.9
at 38°C (100°F)	121.6	Report
Viscosity Index	94	75 min
Flash Point, °C (°F)	241 (465)	218(425)min
Pour Point, °C (°F)	-21 (-5)	-18(0) max
Gravity, °API	27.4	Report
Carbon Residue, %	1.19	Report
Sulfated Ash, %	0.93	Report
Total Acid Number	3.3	Report
Total Base Number	5.4	Report
Additive Content, %wt		
Zinc	0.093	Report
Calcium	0.24	Report
Barium	nil	Report

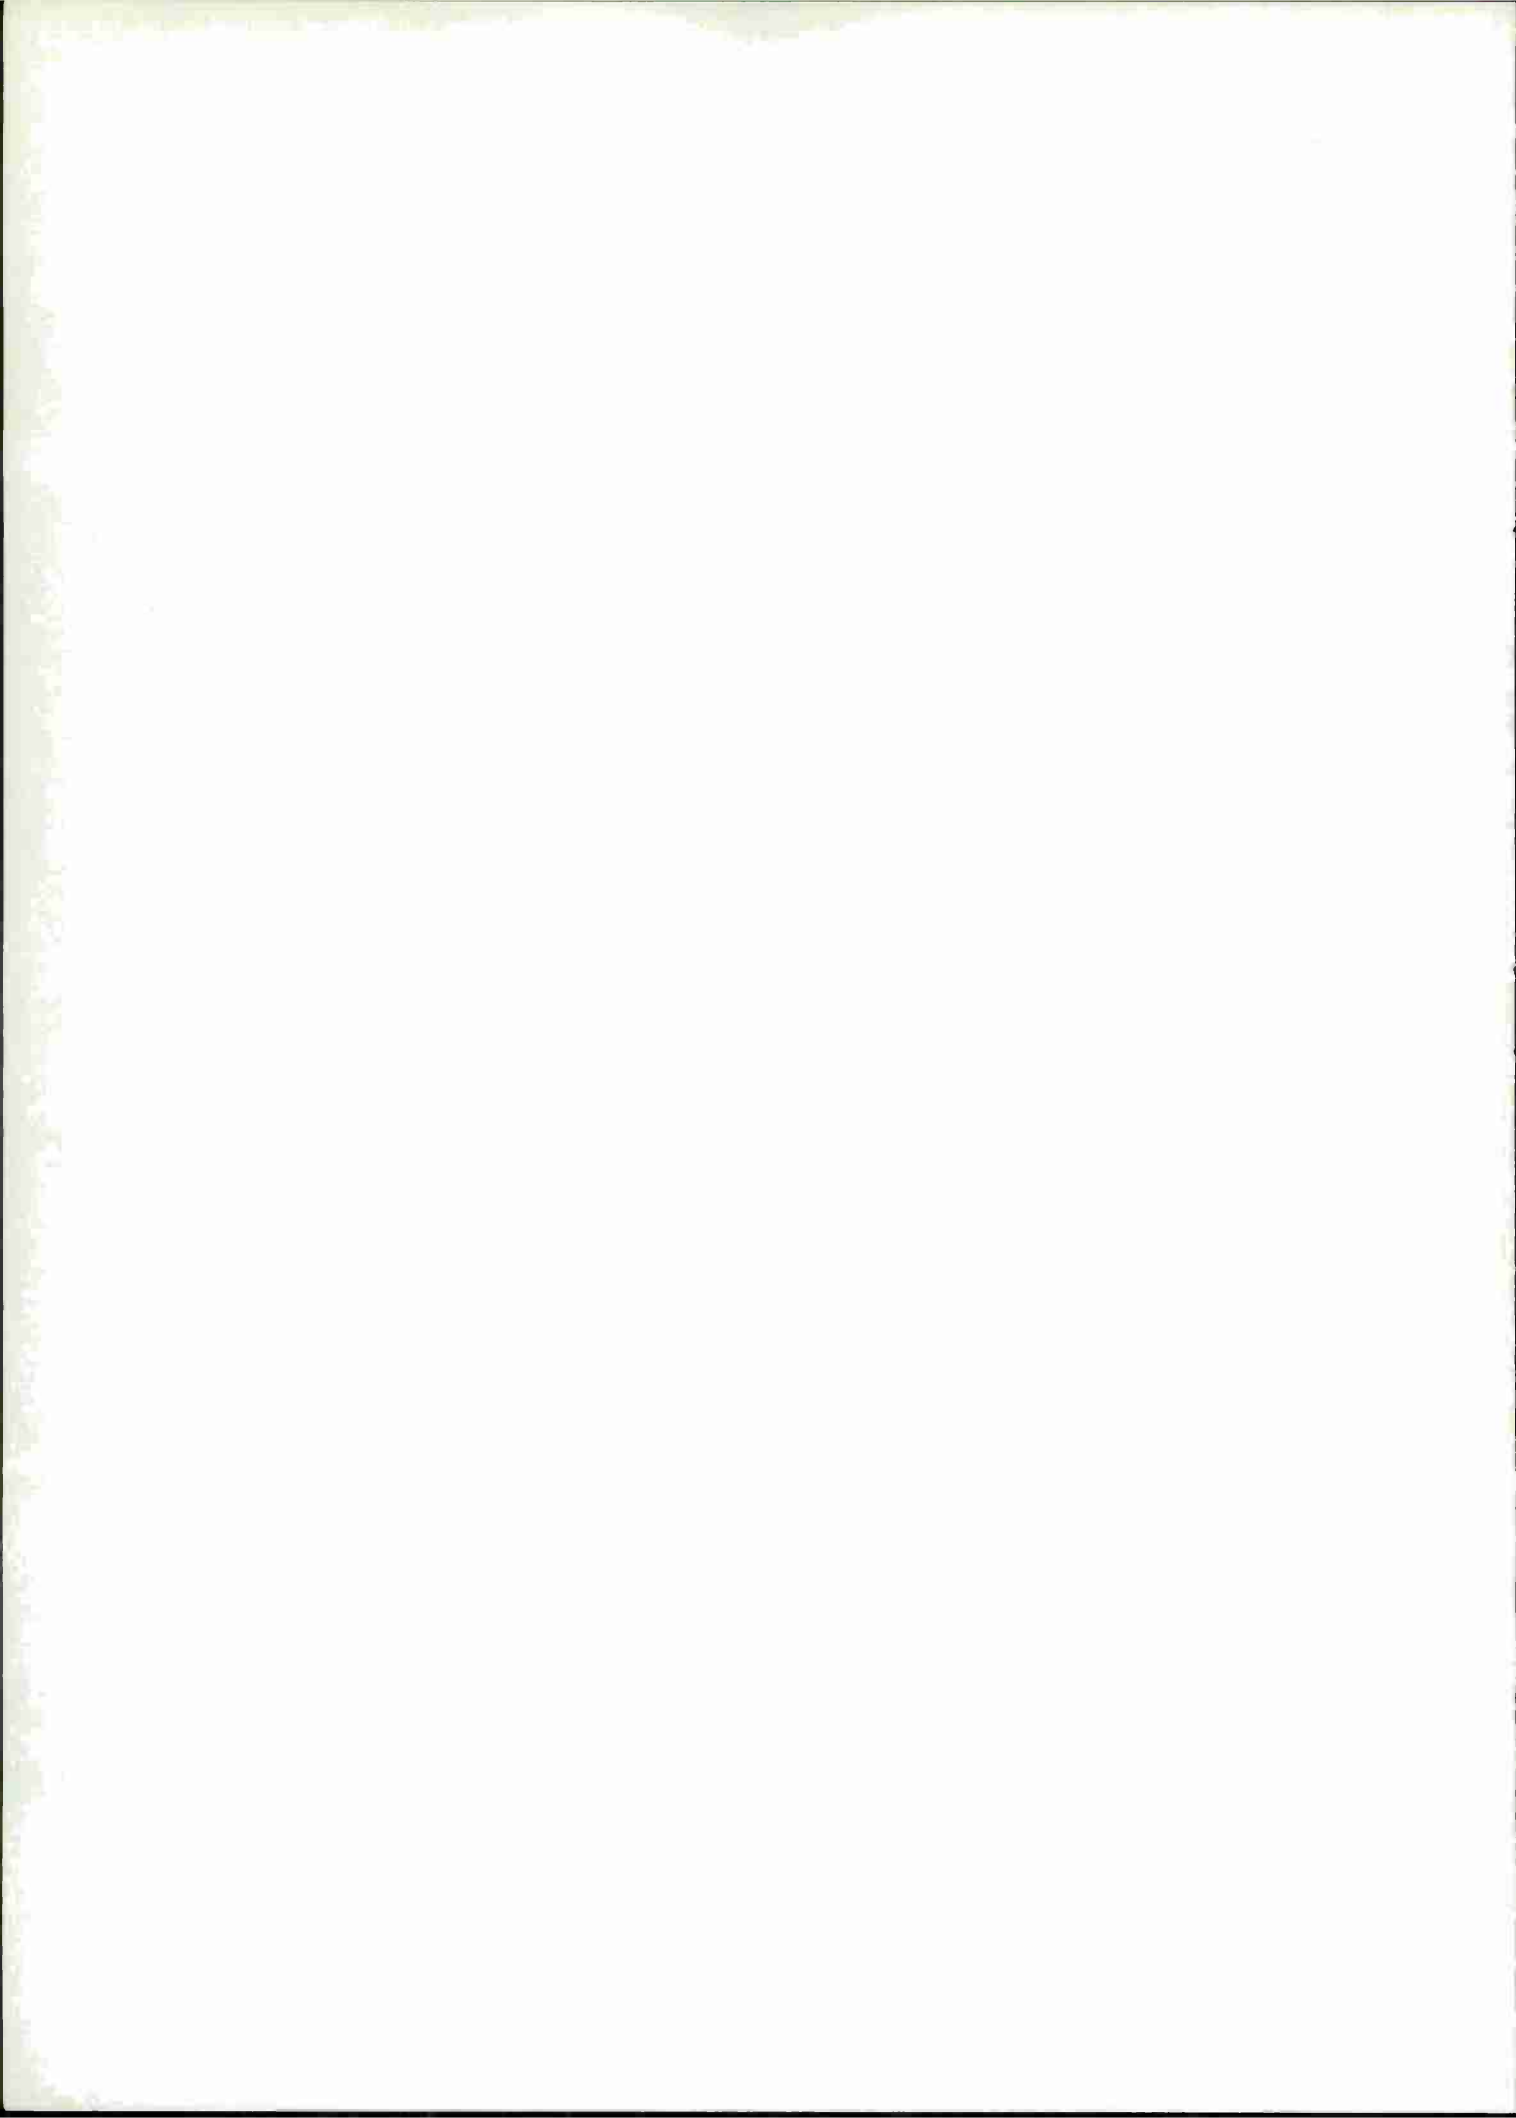

APPENDIX B  
COMMERCIAL TEST FUELS

The first part of the document discusses the importance of maintaining accurate records of all transactions. It emphasizes that every entry, no matter how small, should be recorded to ensure the integrity of the financial statements. This includes not only sales and purchases but also expenses and income. The document provides a detailed list of items that should be tracked, such as inventory levels, accounts payable, and accounts receivable. It also outlines the procedures for reconciling these accounts and resolving any discrepancies.

The second part of the document focuses on the classification of expenses. It explains how to distinguish between capital expenditures and operating expenses, and how to allocate costs to different departments or projects. This section includes a table with various expense categories and their corresponding accounting treatments. The document also discusses the impact of depreciation and amortization on the financial statements and provides formulas for calculating these values.


The final part of the document covers the preparation of financial statements. It provides a step-by-step guide for calculating the net income, gross profit, and other key financial metrics. It also includes a sample income statement and balance sheet to illustrate the format and content of these statements. The document concludes with a summary of the key points and a list of references for further reading.

## APPENDIX B

## Test Fuels, Commercial

<u>Property</u>	<u>Laboratory Fuel</u>	<u>Road Test Fuel</u>	<u>VV-G-001690 Specification</u>
Fuel code	AL-5473	AL-5894	
Gravity, °API	57.5	59.8	
Reid Vapor Pressure	8.9	11.1	11.5 max
Distillation, °C (°F)			
IBP	31 (88)	29 (85)	
10% evap.	53 (127)	45 (113)	60 (140) max
20% evap.	68 (155)	56 (132)	
50% evap.	106 (222)	94 (201)	116 (240) max
90% evap.	162 (323)	168 (335)	185 (365) max
EP	182 (360)	202 (395)	225 (437) max
Recovered, %	97.4	98.0	
Residue, %	1.1	1.0	
Loss, %	1.5	1.0	
Existent Gum, mg/100 ml			
Unwashed	95.7*	3.5	10.0 max
Washed	0.0	1.8	4.0 max
Oxidation Stability, min.	>1440	350	240 min
Sulfur, wt %	0.004	0.028	0.10 max
Lead, g/gal	0.0084	0.004	0.05 max
Phosphorus, mg/gal	0.96	<0.04	5.0 max
Aromatic, % (FIA)	32.2	28.9	45.0 max
Olefins, % (FIA)	3.6	18.6	Report
Saturate, % (FIA)	64.2	52.5	
Research Octane No.	93.2	92.7	
Motor Octane No.	82.9	82.0	

\*High value for unwashed existent gum due to additive package. Allowable under specification.

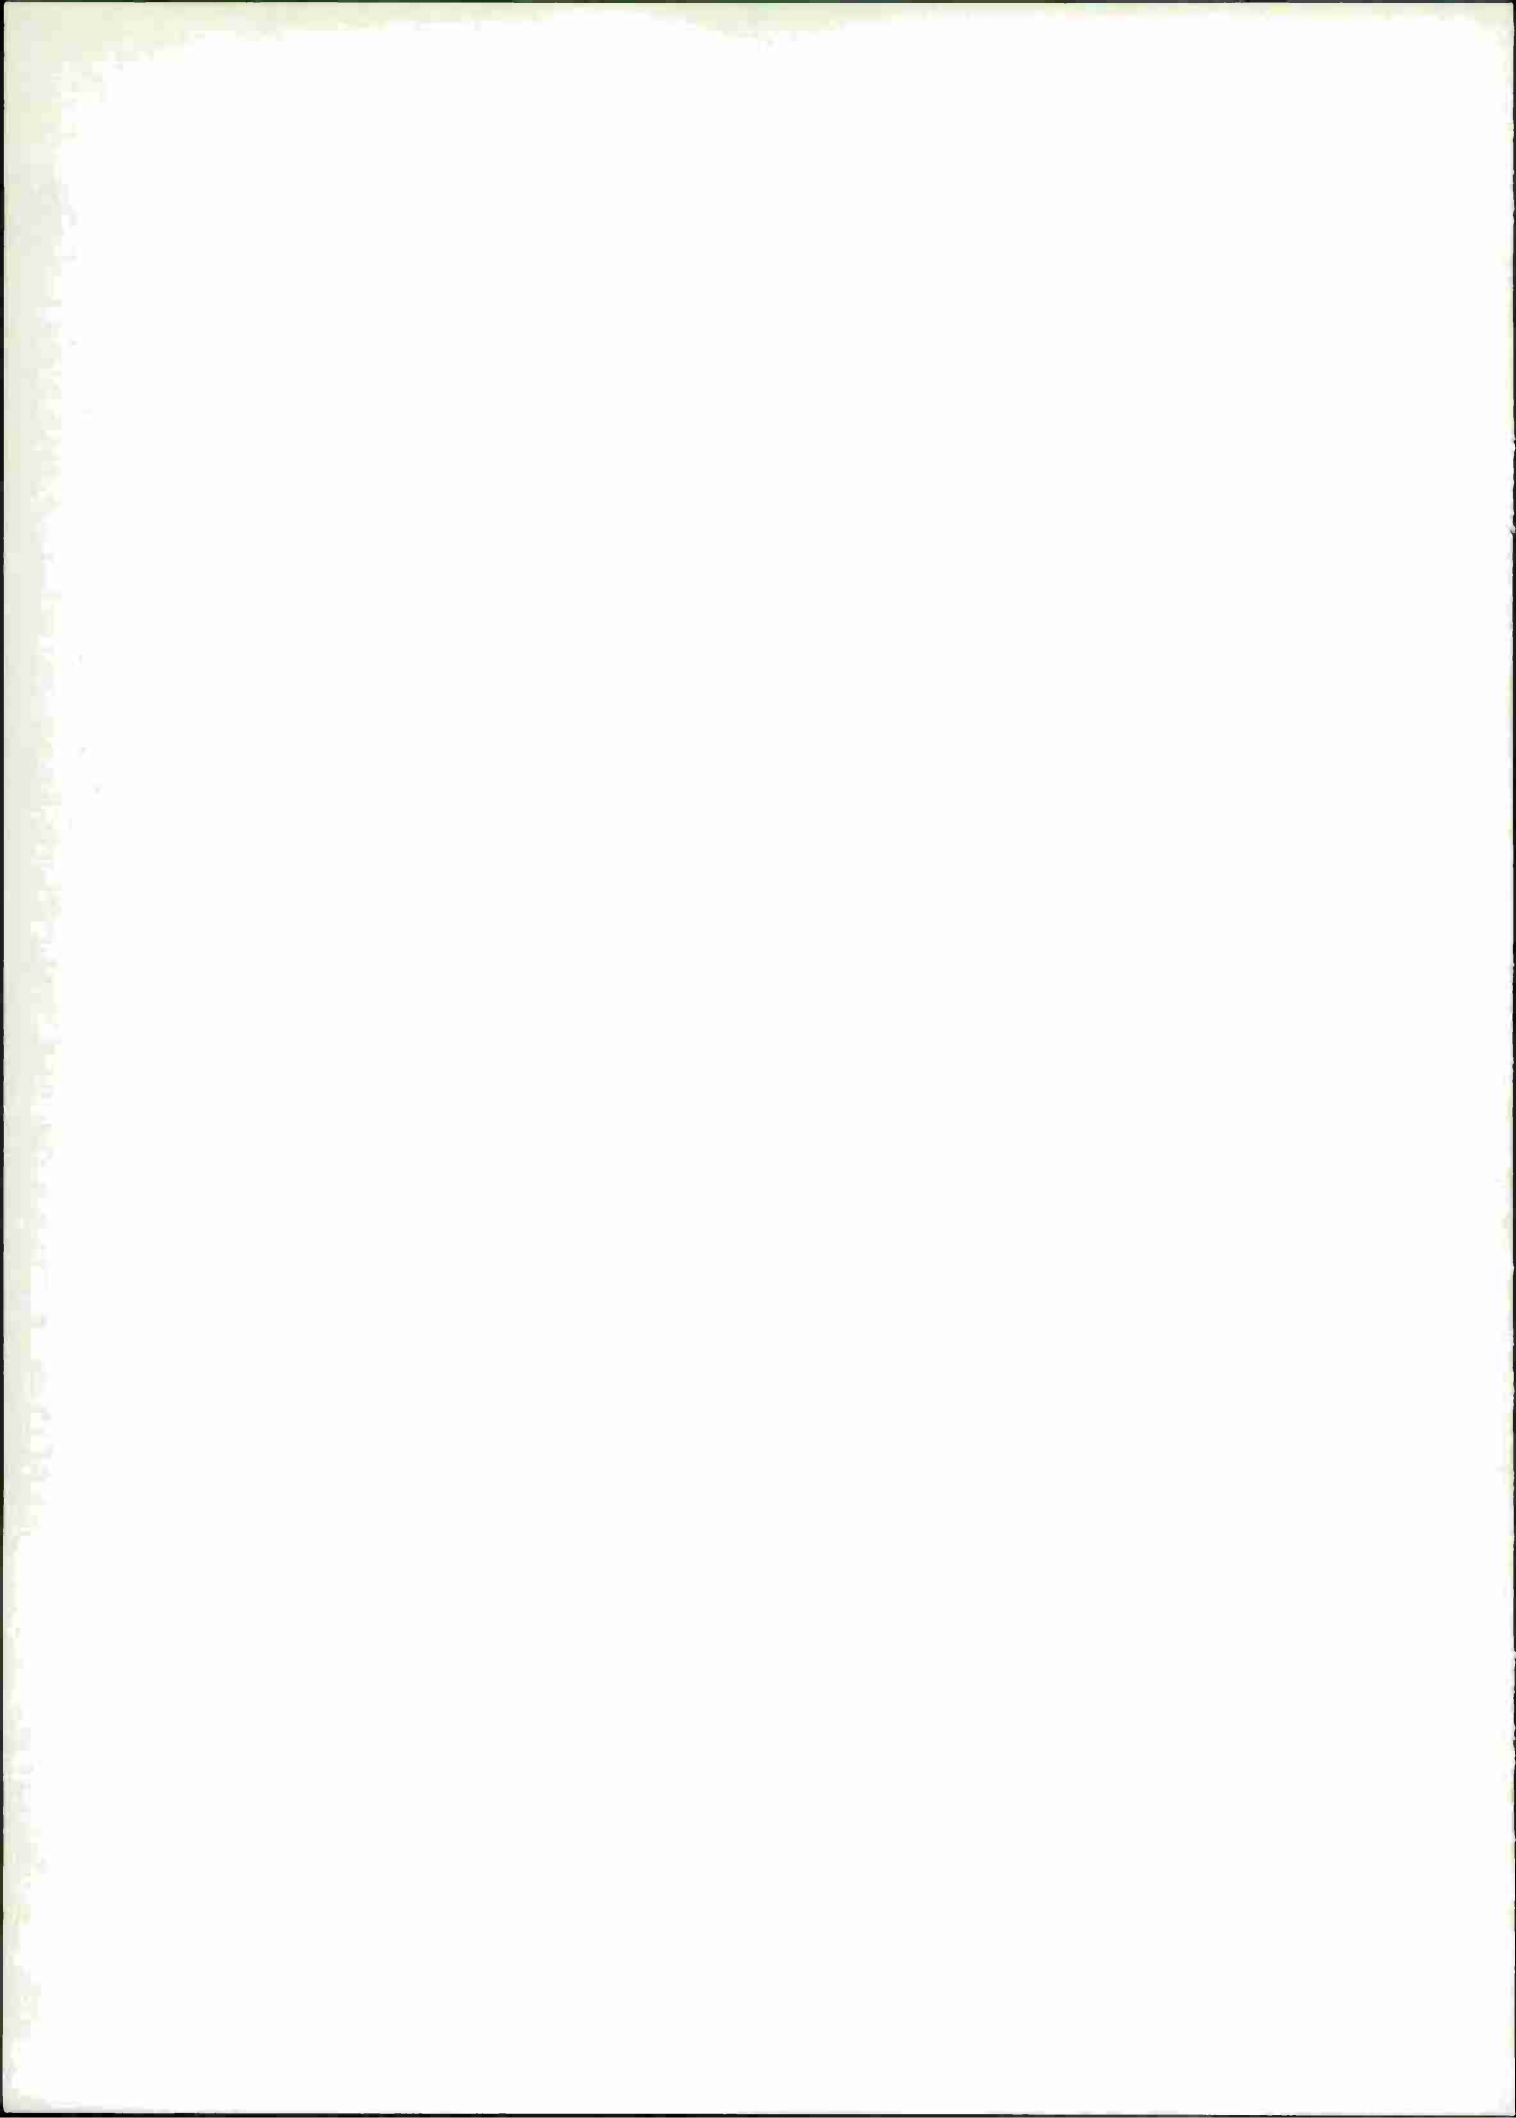

APPENDIX C  
DYNAMOMETER TEST CYCLE

The first part of the document discusses the importance of maintaining accurate records of all transactions. It emphasizes that every entry, no matter how small, should be recorded to ensure the integrity of the financial statements. This includes not only sales and purchases but also expenses, transfers, and adjustments. The text suggests that a systematic approach to record-keeping is essential for identifying trends and potential areas of concern.

In the second section, the author addresses the common challenge of reconciling bank statements with the company's internal records. It provides a step-by-step guide to identifying discrepancies, such as timing differences or errors in recording. The importance of regular reconciliation is highlighted to prevent small errors from accumulating and causing significant issues at the end of the period.

The third part of the document focuses on budgeting and variance analysis. It explains how a well-defined budget serves as a benchmark for performance. By comparing actual results against the budget, management can quickly identify areas where costs are exceeding expectations or revenues are falling short. This analysis is crucial for making informed decisions and adjusting operations to stay on track.

Finally, the document touches upon the importance of clear communication and transparency in financial reporting. It stresses that stakeholders, including investors and creditors, rely on accurate and timely information to make their decisions. Therefore, it is vital to ensure that all financial data is presented clearly and honestly, with any uncertainties or risks being disclosed.

## APPENDIX C

### Dynamometer Test Cycle

Controlled Variables	Cycle Phase		
	1	2	3*
Time per cycle, mins.	30	60	30
Engine speed, rpm	2000	2800	600
Load, N-m (ft-lb)	129 (95)	127 (94)	0
Water temp., °C (°F)	82 (180)	82 (180)	38 (100)


\*Every fourth idle cycle omitted for oil sampling and consumption measurements.

This cycle was repeated for 16 hours, followed by an eight hour shut-down. This twenty-four hour cycle is repeated as necessary to obtain the desired test duration. Of the total 24 hours, only 15 hours is to be counted as engine operating time.


#### Cycle Significance:

Based on road load measurements from an M-151 vehicle loaded to its rated cross-country capacity of 250 kg (550 lbs), the 2000 rpm phase was intended to represent 56 kilometers per hour (35 mph) high load operation while the 2800 rpm period was to represent 80 kilometer per hour (50 mph) level road operation. Based on this, a 100 hour period of operation would represent 5430 kilometers (3375 miles) traveled.

Based on the change in total acid and base numbers in the standard engine's oil, and compared to the results from the M-151 road tests, this dynamometer test degraded the oil at a rate of 6800 miles per 100 test hours. When comparisons are made using the changes in oil viscosity at 38°C (100°F) and 99°C (210°F), the oil appears to degrade at a rate such that 100 test hours is equivalent to 6100 miles.

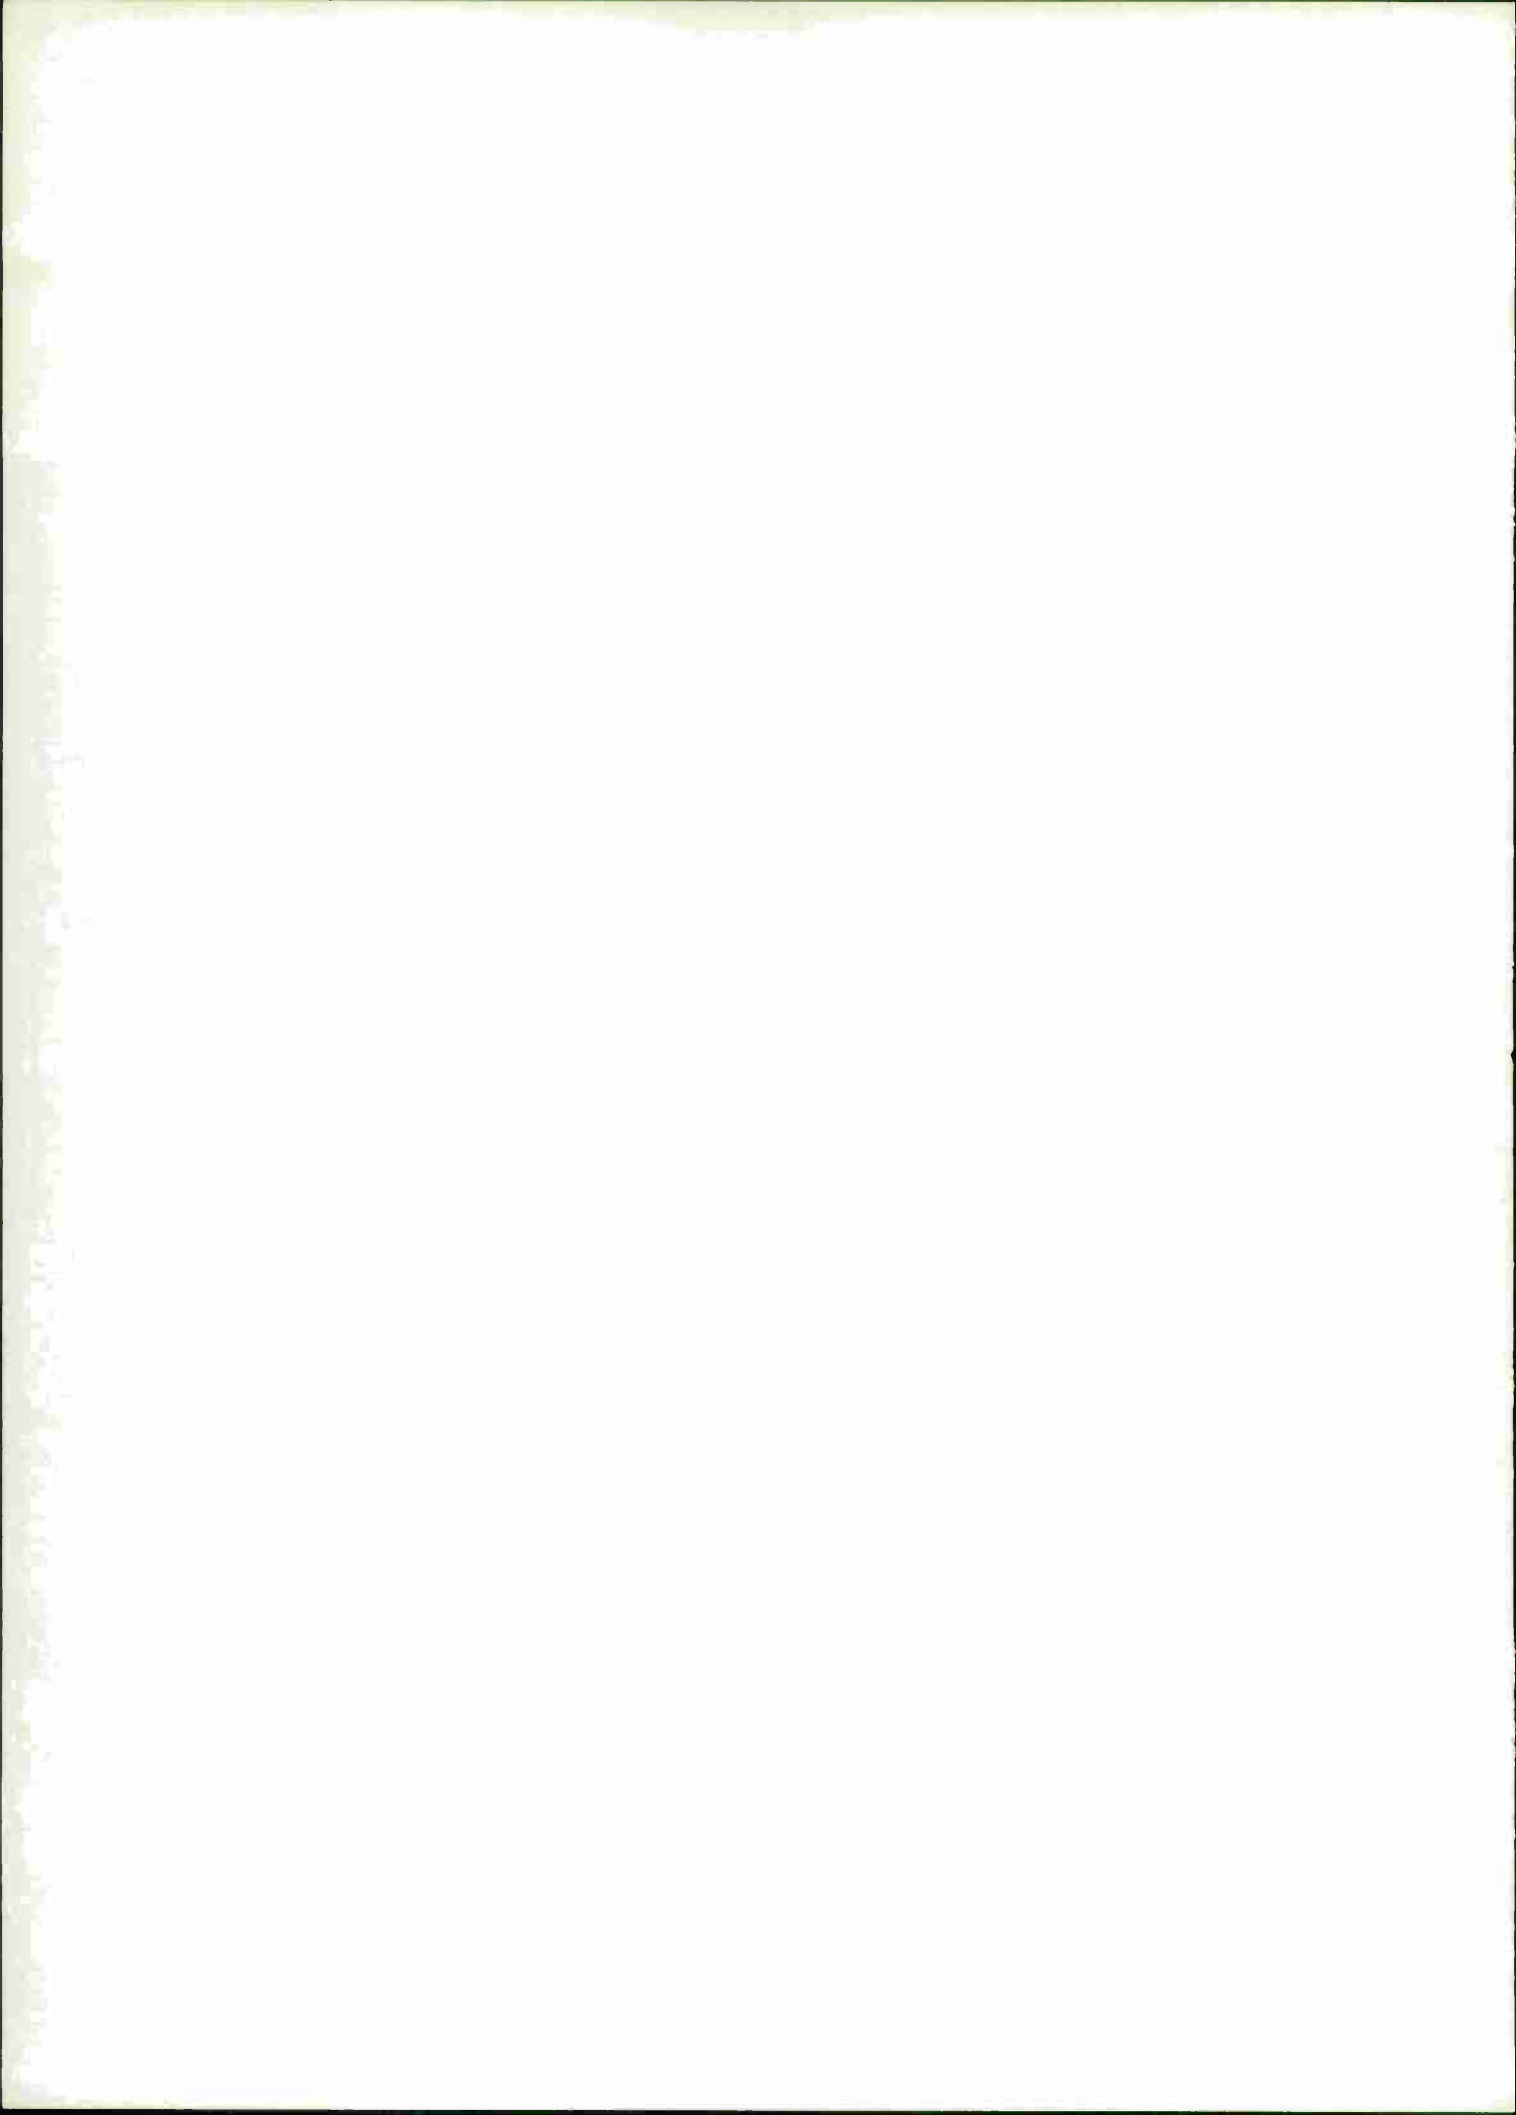

APPENDIX D  
DYNAMOMETER TESTS RESULTS

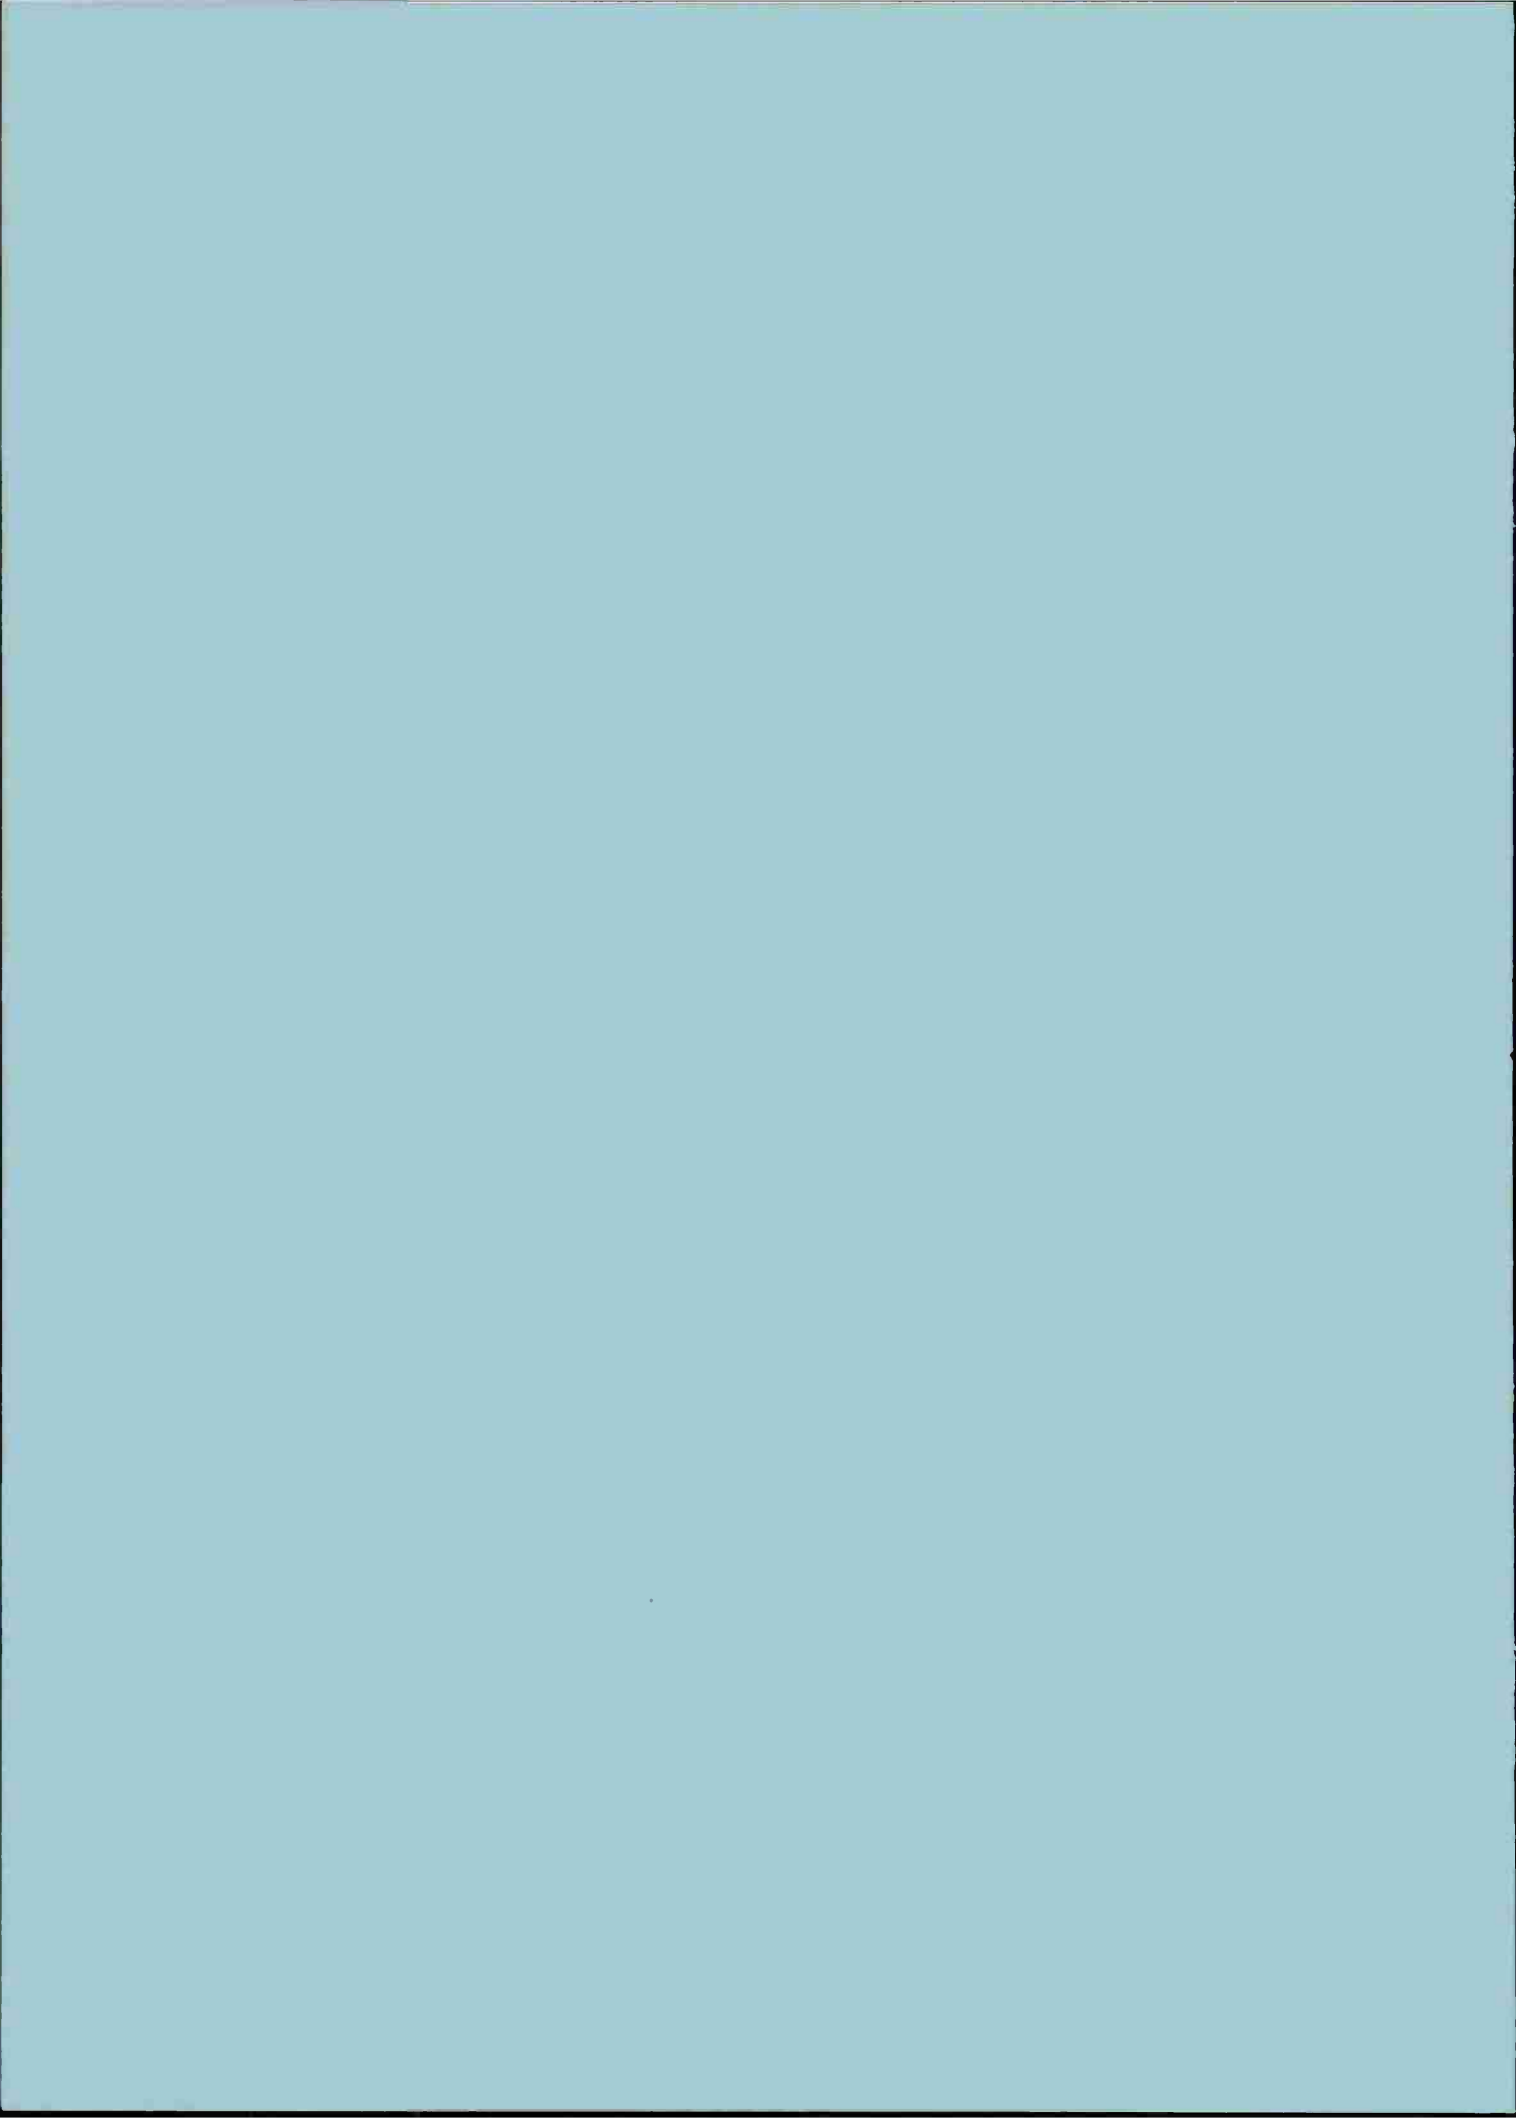

**TEST 1-150 HOURS**


**STANDARD PISTON RINGS**

**Fuel:** VV-G-001690A (AL-5473)

**Lubricant:** REO-203

**Date**

**Completed:** 23 December 1974

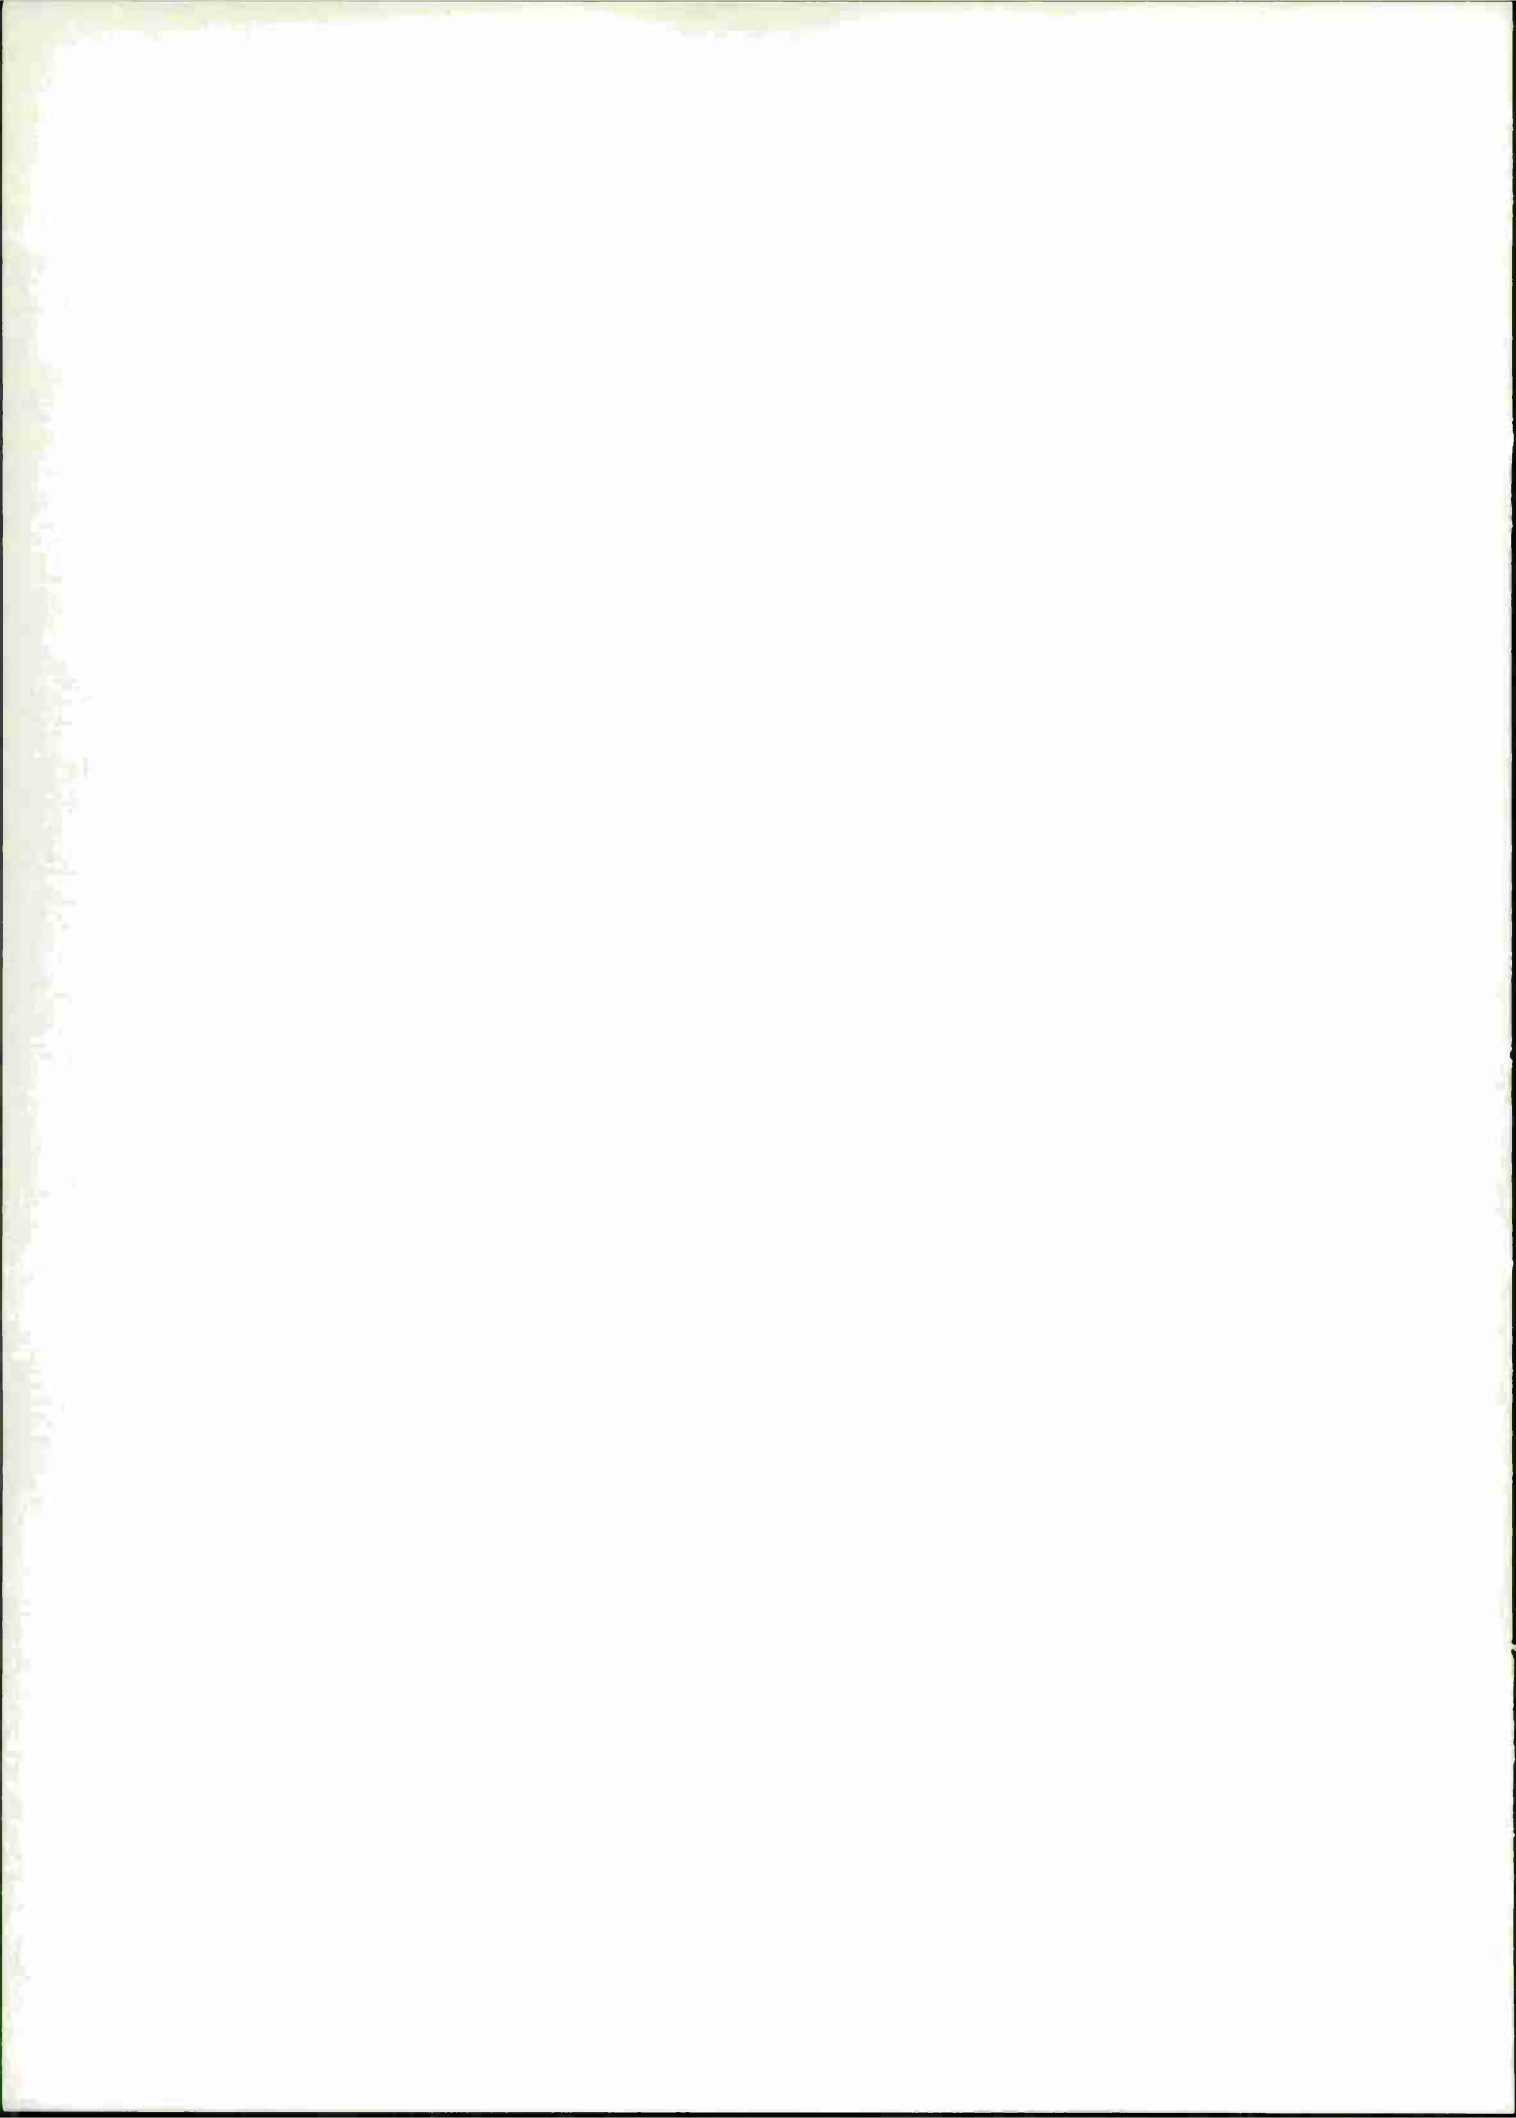

TEST 1  
Standard Piston Rings  
150 hours

Summary of Operating Conditions


<u>2800 RPM Mode</u>	<u>AVG</u>	<u>MIN</u>	<u>MAX</u>
Torque, N-m (ft-lb)	127 (94)	126 (93)	130 (96)
Power, OBS, kilowatts (BHp)	37.5 (50.3)	36.9 (49.5)	38.2 (51.3)
Specific Fuel Cons., kg/kW-hr (lbs/BHp-hr)	.331 (.544)	.259 (.425)	.351 (.577)
Blowby @ 49C (120F), m <sup>3</sup> /h (cu.ft./hr)	1.35 (47.8)	.932 (32.9)	1.57 (55.4)
Sump Temperature, C (F)	121 (250)	114 (238)	124 (256)
Manifold Vacuum, kPa (In. Hg.)	10.5 (3.1)	9.1 (2.7)	11.1 (3.3)
<u>2000 RPM Mode</u>	<u>AVG</u>	<u>MIN</u>	<u>MAX</u>
Torque, N-m (ft-lb)	129 (95)	114 (84)	133 (98)
Power, OBS, kilowatts (BHp)	26.9 (36.1)	23.8 (32.0)	27.8 (37.3)
Specific Fuel Cons., kg/kW-hr (lbs/BHp-hr)	.352 (.579)	.274 (.450)	.369 (.606)
Blowby @ 49C (120F), m <sup>3</sup> /h (cu.ft./hr)	1.00 (35.3)	.770 (27.2)	1.25 (44.3)
Sump Temperature, C (F)	102 (216)	88 (191)	107 (225)
Manifold Vacuum, kPa (In.Hg.)	10.1 (3.0)	9.5 (2.8)	11.8 (3.5)
<u>600 RPM Mode</u>	<u>AVG</u>	<u>MIN</u>	<u>MAX</u>
Torque, N-m (ft-lb)	0	0	0
Power, OBS, kilowatts (BHp)	0.0	0.0	0.0
Blowby @ 49C (120F), m <sup>3</sup> /h (cu.ft./hr)	.249 (8.8)	.198 (7.0)	.331 (11.7)
Sump Temperature, C (F)	62 (144)	51 (124)	69 (156)
Manifold Vacuum, kPa (In. Hg.)	60.4 (17.9)	51.0 (15.1)	68.2 (20.2)

TEST 1  
Standard Piston Rings  
150 hours

Used Oil Analysis

<u>Test Hour</u>	<u>Viscosity, cS</u>		<u>Total Acid No.</u>	<u>Total Base No.</u>	<u>Fuel Dilu., %</u>	<u>Water Dilu., %</u>
	<u>38°C(100°F)</u>	<u>99°C(210°F)</u>				
New	121.6	12.61	2.97	5.08	-	-
15	104.15	11.56	2.90	4.69	1.4	0.05
30	107.49	11.86	3.27	4.97	0.4	
45	112.02	11.93	3.27	4.69	0.6	
60	116.03	12.23	3.43	4.81	0.4	
75	117.82	12.40	2.85	4.97	nil	0.05
90	122.55	12.66	3.38	4.97		
105	123.70	12.86	3.27	4.13		
120	127.34	13.08	3.12	4.13		
135	130.47	13.32	3.38	4.69		
150	138.74	13.84	3.96	4.24	0.8	0.03


D-4

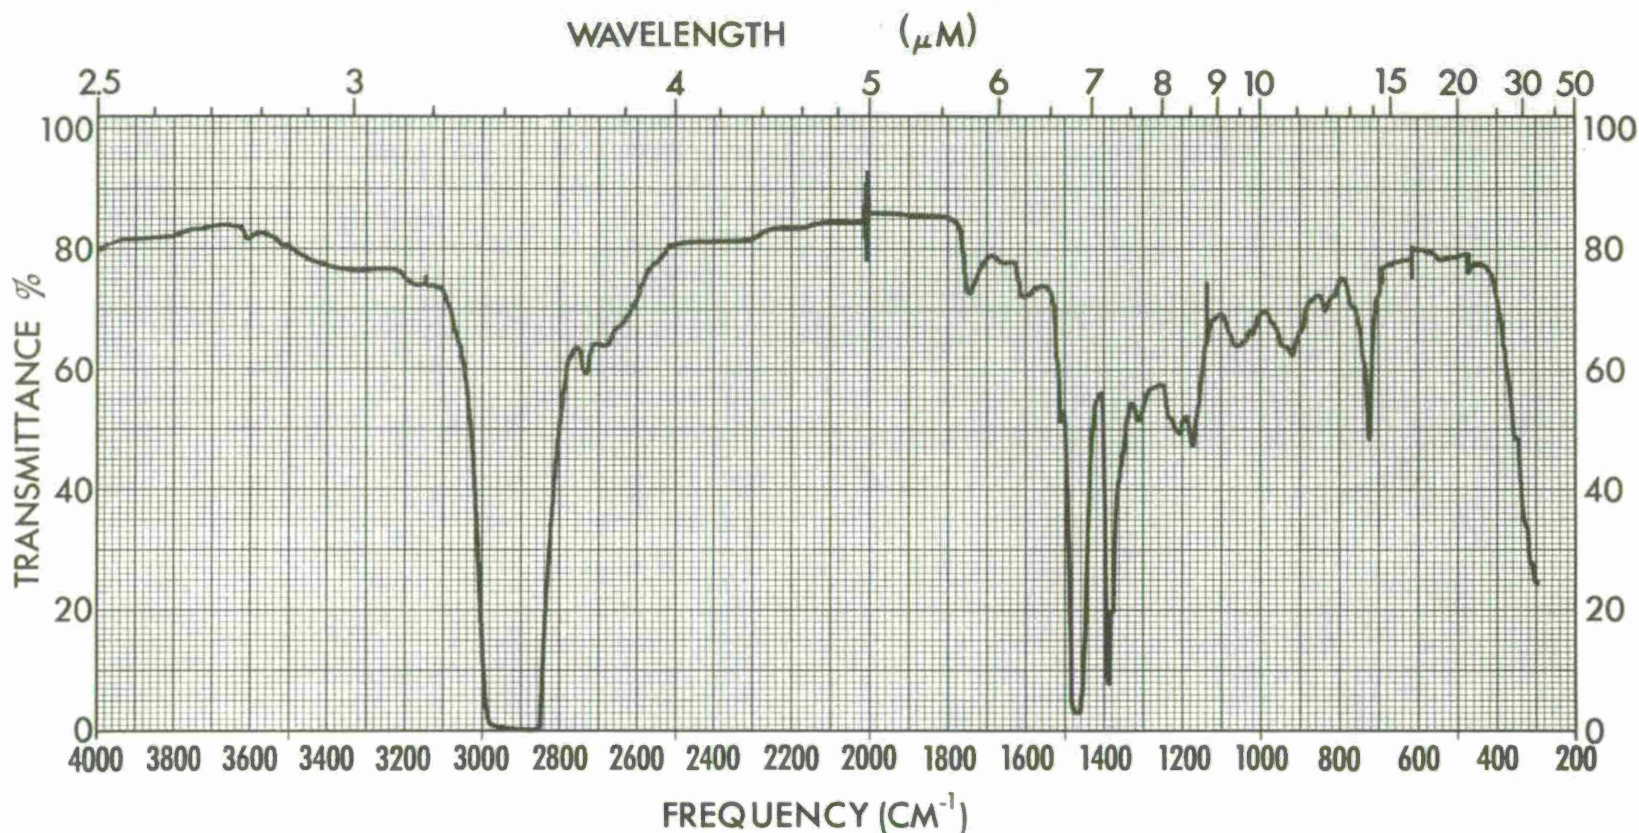

SPECTRUM NO. <u>569</u>	ORIGIN _____	LEGEND _____	REMARKS _____
SAMPLE <u>REO-203</u>		1. _____	
<u>NEW</u>	PURITY _____	2. _____	
	PHASE _____	DATE <u>12-16-74</u>	
	THICKNESS <u>.05</u>	OPERATOR <u>D.B.</u>	

SPECTRUM NO. \_\_\_\_\_  
SAMPLE


D-5

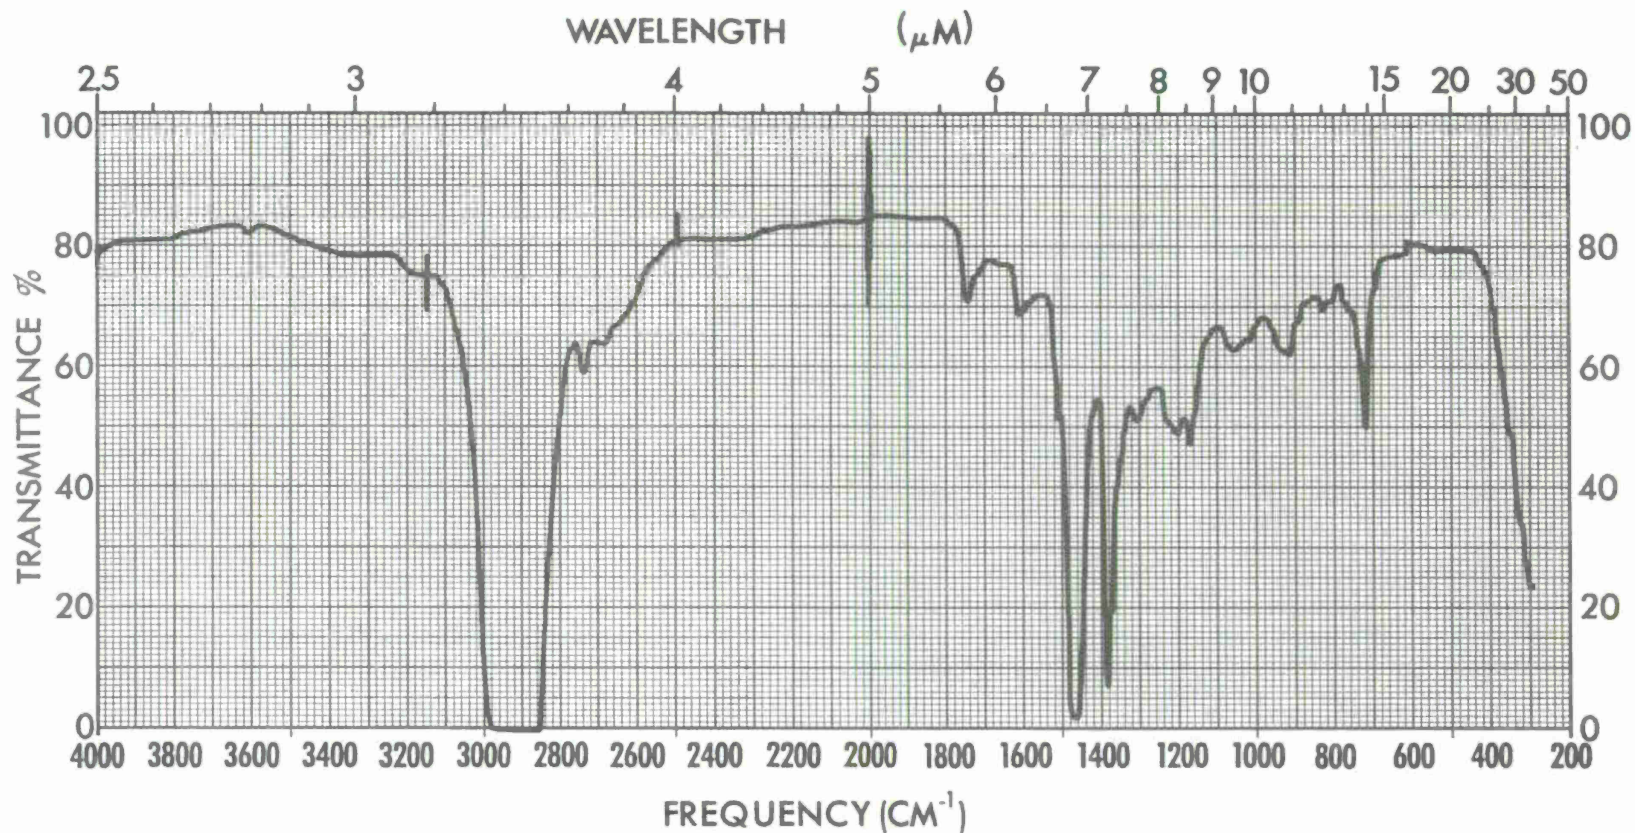

SPECTRUM NO. <u>570</u>	ORIGIN _____	LEGEND _____	REMARKS _____
SAMPLE <u>REO-203</u>		1. _____	
<u>15 HR</u>	PURITY _____	2. _____	
	PHASE _____	DATE <u>12-16-74</u>	
	THICKNESS <u>.05</u>	OPERATOR <u>D.B.</u>	

SPECTRUM NO. \_\_\_\_\_  
SAMPLE \_\_\_\_\_


D-6

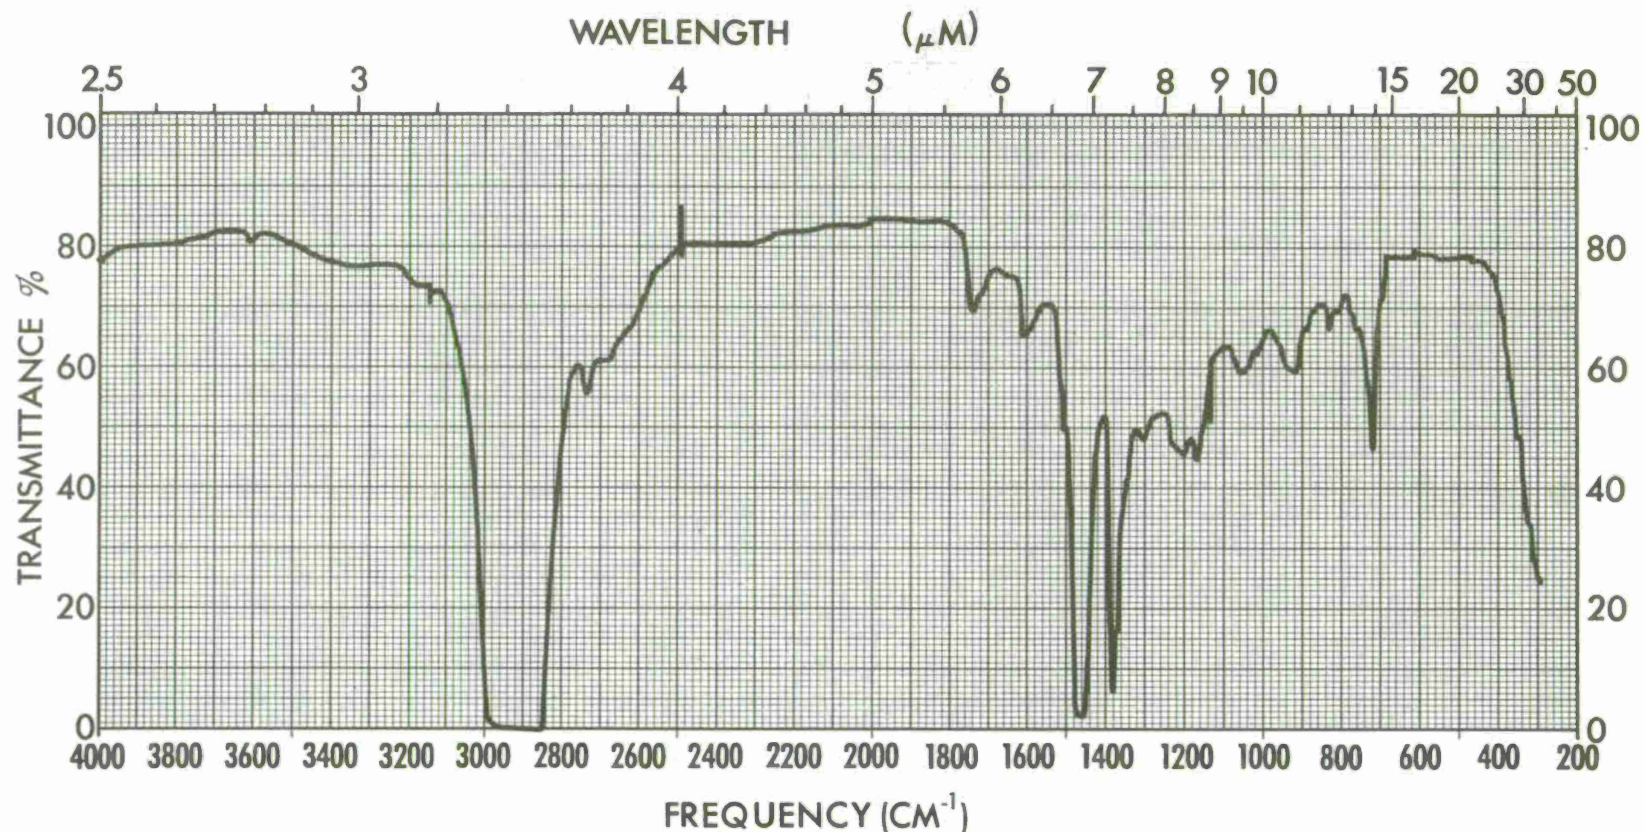

SPECTRUM NO. <u>571</u>	ORIGIN _____	LEGEND _____	REMARKS _____
SAMPLE <u>REO-203</u>	_____	1. _____	
<u>30-HR</u>	PURITY _____	2. _____	
_____	PHASE _____	DATE <u>12-16-74</u>	
_____	THICKNESS <u>.05</u>	OPERATOR <u>D.B.</u>	

SPECTRUM NO. \_\_\_\_\_  
SAMPLE \_\_\_\_\_


D-7

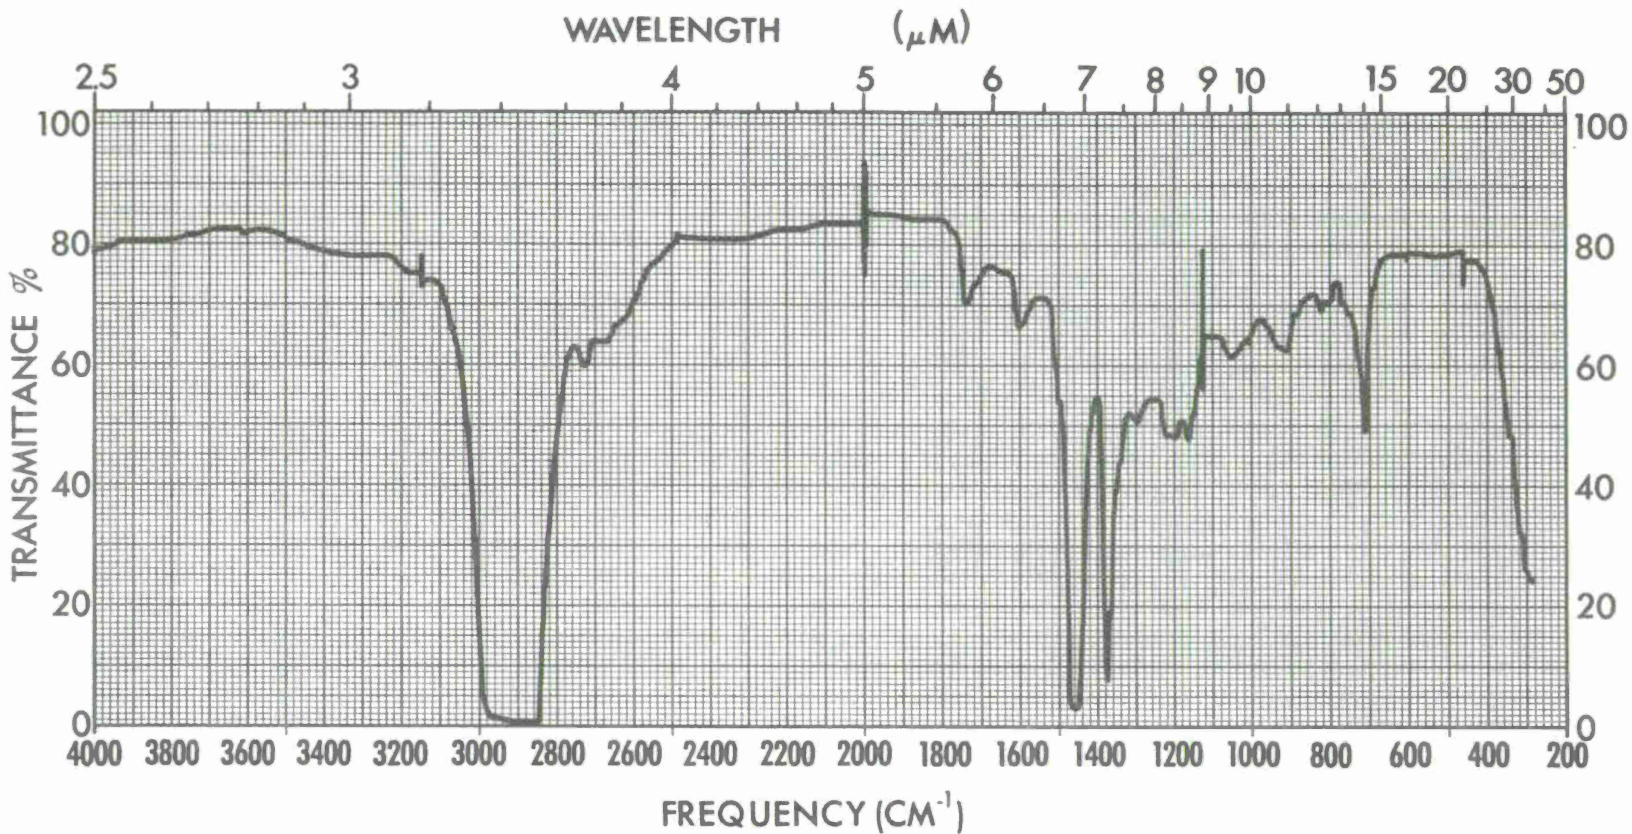

SPECTRUM NO. <u>572</u>	ORIGIN _____	LEGEND _____	REMARKS _____
SAMPLE <u>REO-203</u>		1. _____	
<u>45 HR</u>	PURITY _____	2. _____	
	PHASE _____	DATE <u>12-17-74</u>	
	THICKNESS <u>.05</u>	OPERATOR <u>D.B.</u>	

SPECTRUM NO. \_\_\_\_\_  
SAMPLE


D-8

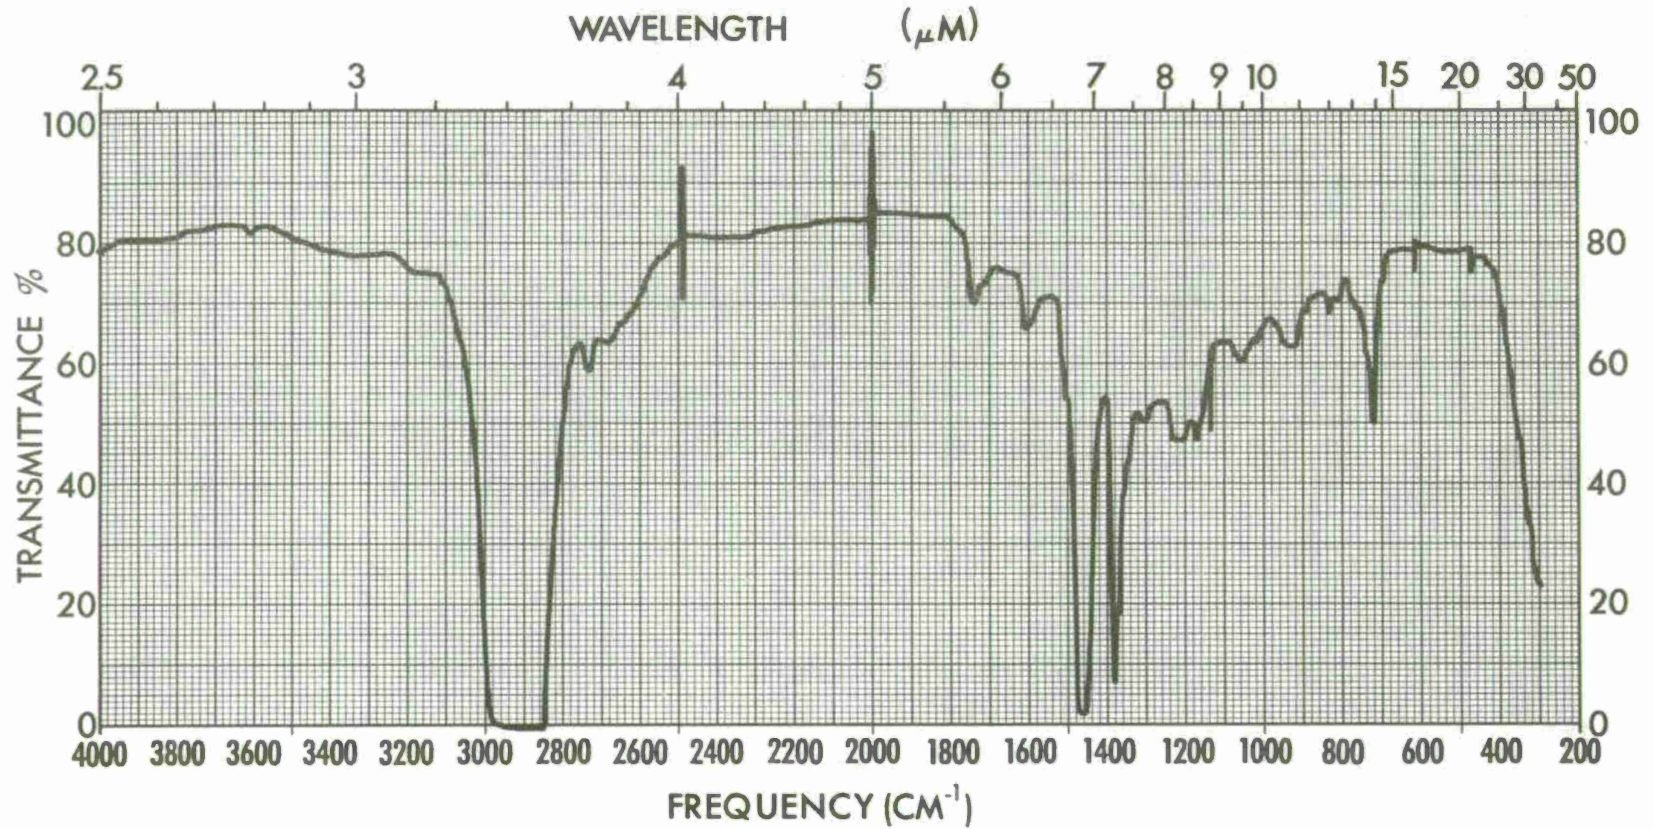

SPECTRUM NO. <u>573</u>	ORIGIN _____	LEGEND _____	REMARKS _____
SAMPLE <u>REO-203</u>		1. _____	
<u>60 HR</u>	PURITY _____	2. _____	
	PHASE _____	DATE <u>12-17-74</u>	
	THICKNESS <u>.05</u>	OPERATOR <u>D.B.</u>	

SPECTRUM NO. \_\_\_\_\_  
SAMPLE \_\_\_\_\_


D-9

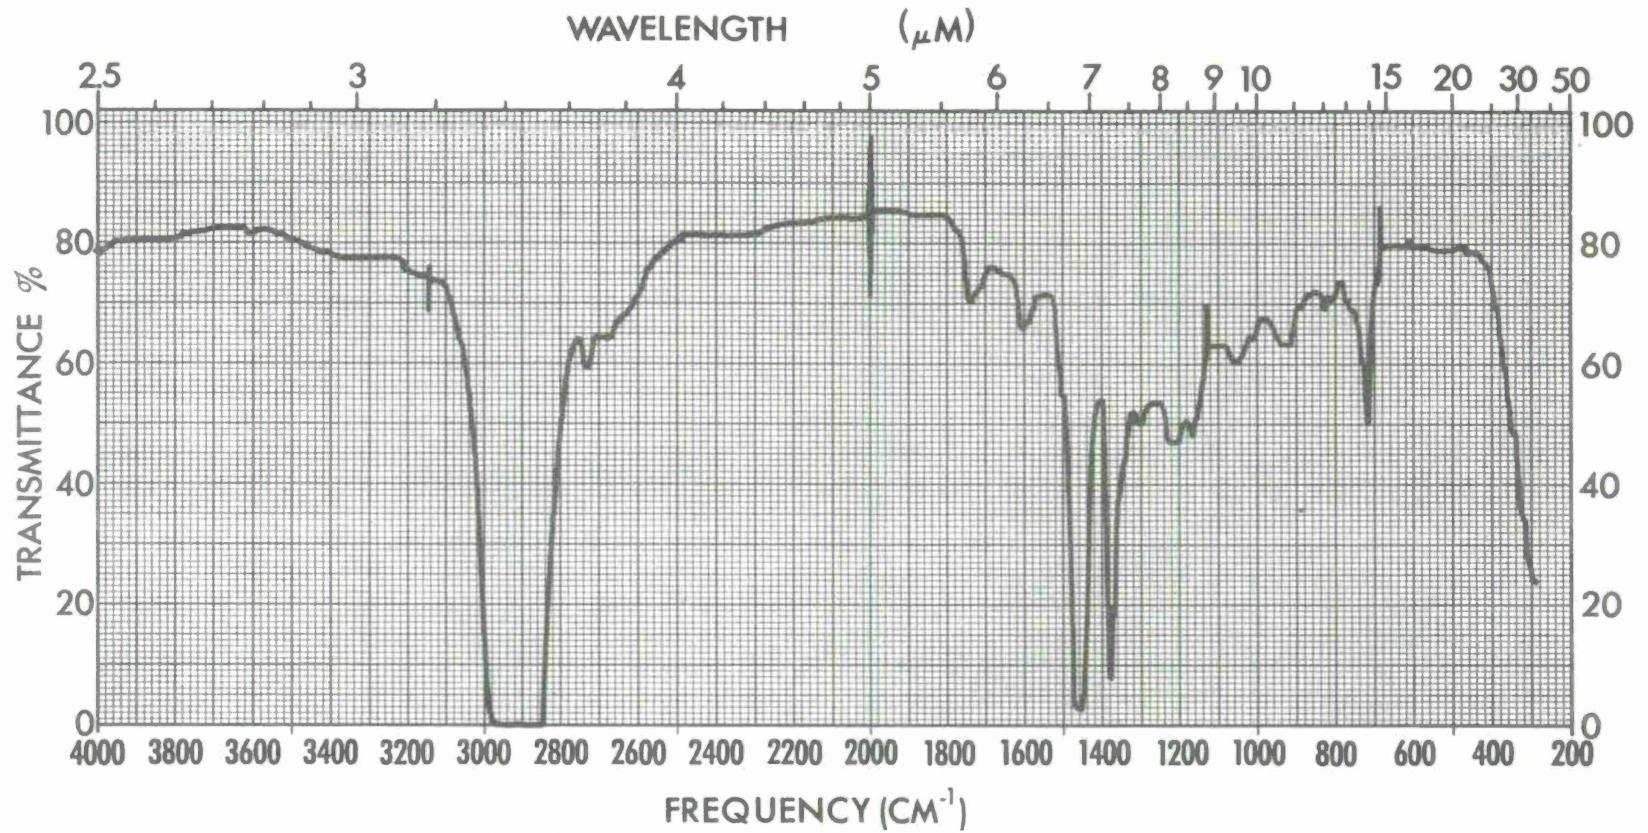

SPECTRUM NO. <u>574</u>	ORIGIN _____	LEGEND _____	REMARKS _____
SAMPLE <u>REO-203</u>		1. _____	
<u>75 HR</u>	PURITY _____	2. _____	
	PHASE _____	DATE <u>12-17-74</u>	
	THICKNESS <u>.05</u>	OPERATOR <u>D.B.</u>	

SPECTRUM NO. \_\_\_\_\_  
 SAMPLE \_\_\_\_\_


D-10

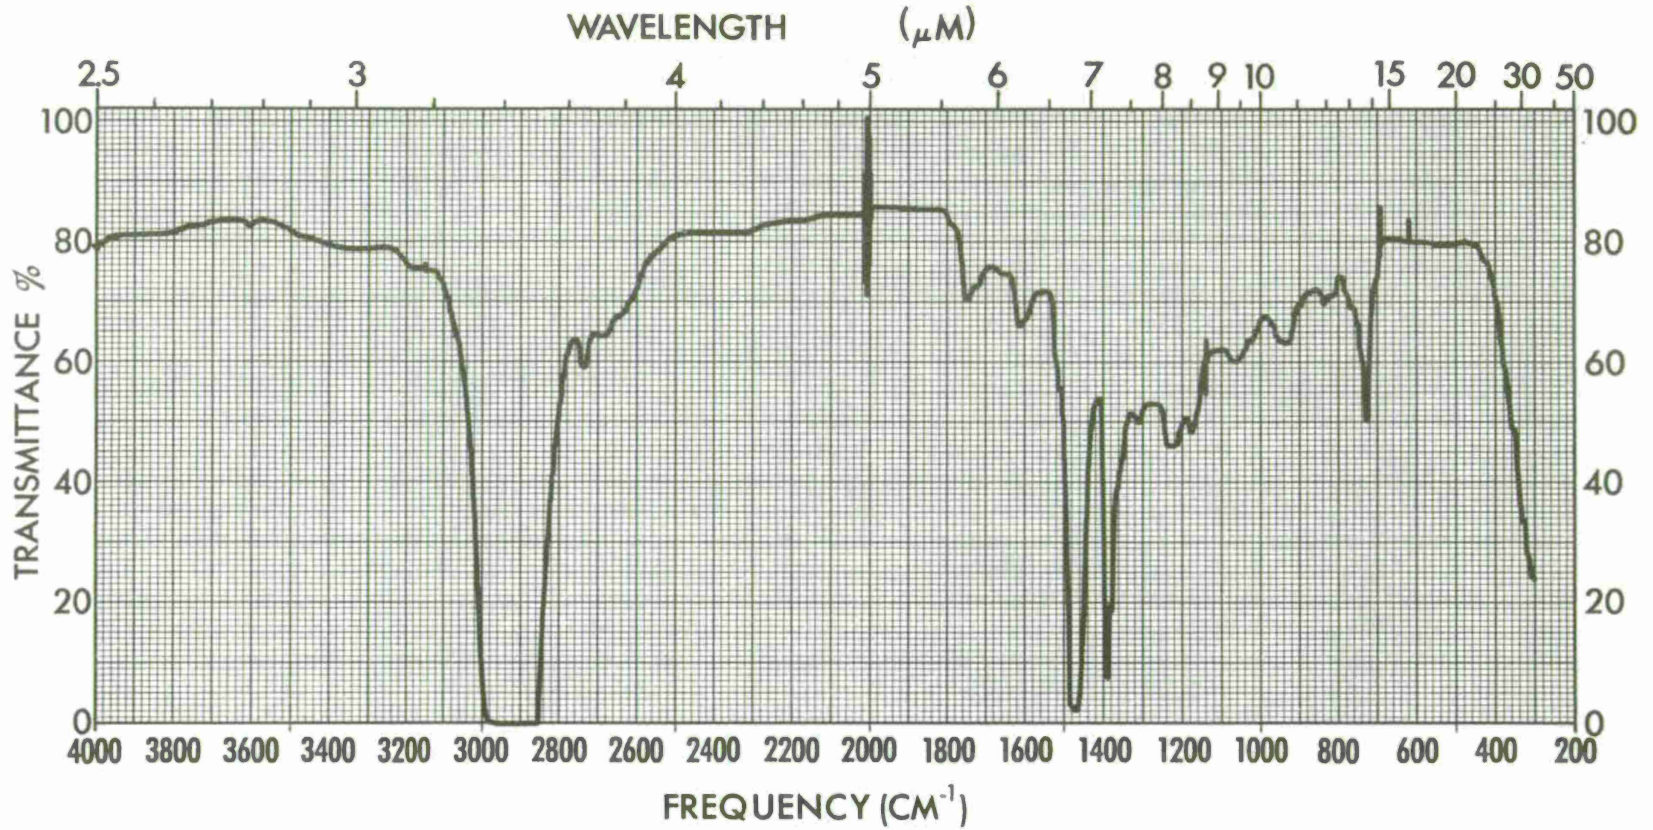

SPECTRUM NO. <u>575</u>	ORIGIN _____	LEGEND _____	REMARKS _____
SAMPLE <u>REO-203</u>		1. _____	
<u>90 HR</u>	PURITY _____	2. _____	
	PHASE _____	DATE <u>12-17-74</u>	
	THICKNESS <u>.05</u>	OPERATOR <u>D.B.</u>	

SPECTRUM NO. \_\_\_\_\_  
 SAMPLE \_\_\_\_\_


D-11

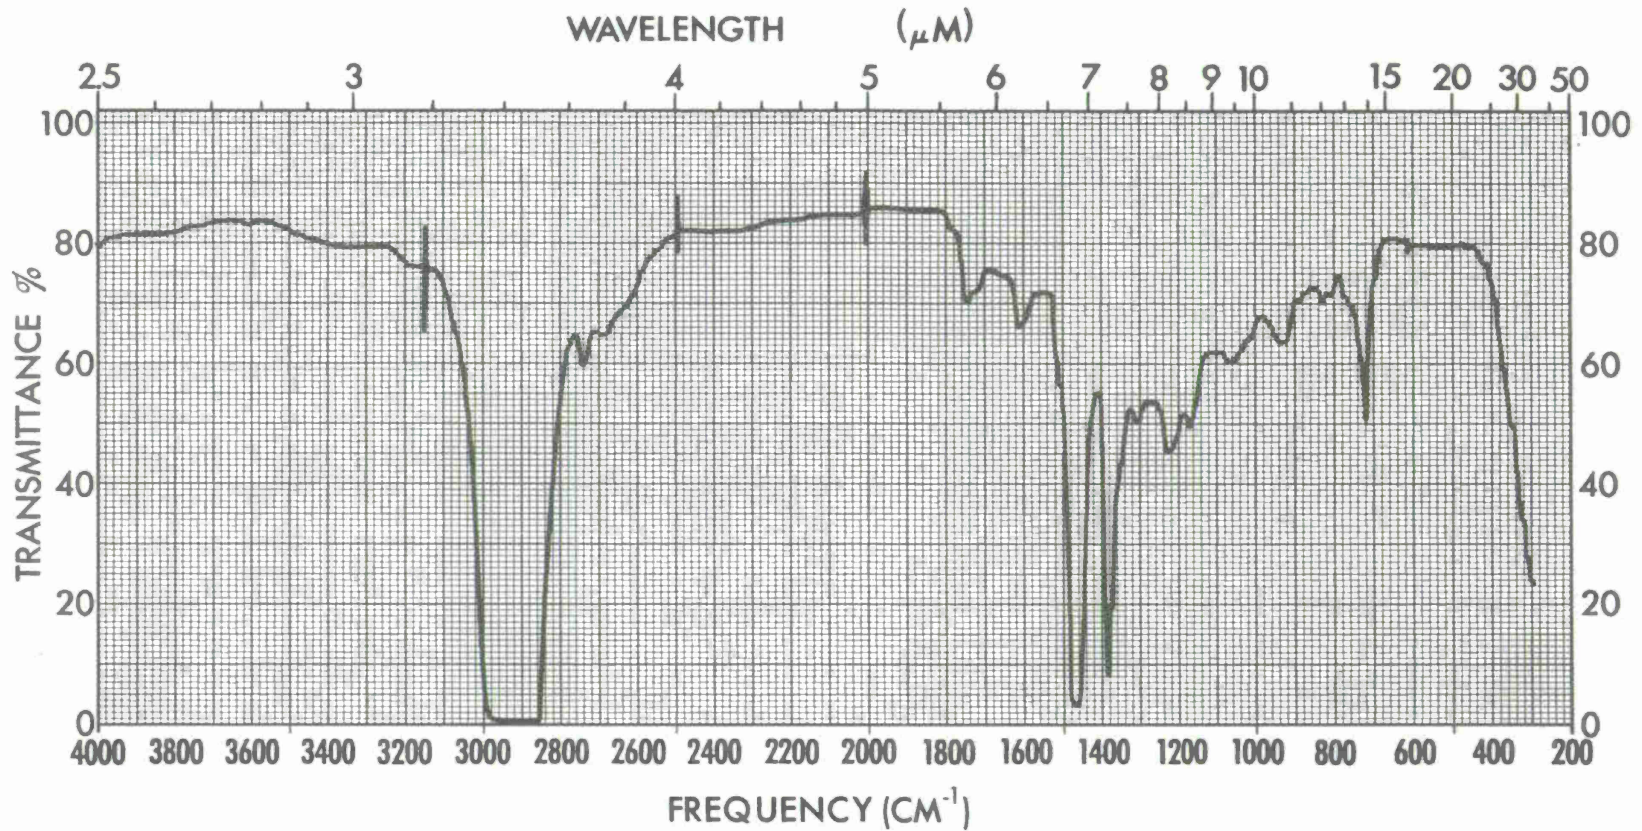

SPECTRUM NO. <u>576</u>	ORIGIN _____	LEGEND _____	REMARKS _____
SAMPLE <u>REQ-203</u>		1. _____	
<u>105 HR</u>	PURITY _____	2. _____	
	PHASE _____	DATE <u>12-18-74</u>	
	THICKNESS <u>.05</u>	OPERATOR <u>D.B.</u>	

SPECTRUM NO. \_\_\_\_\_  
SAMPLE


D-12

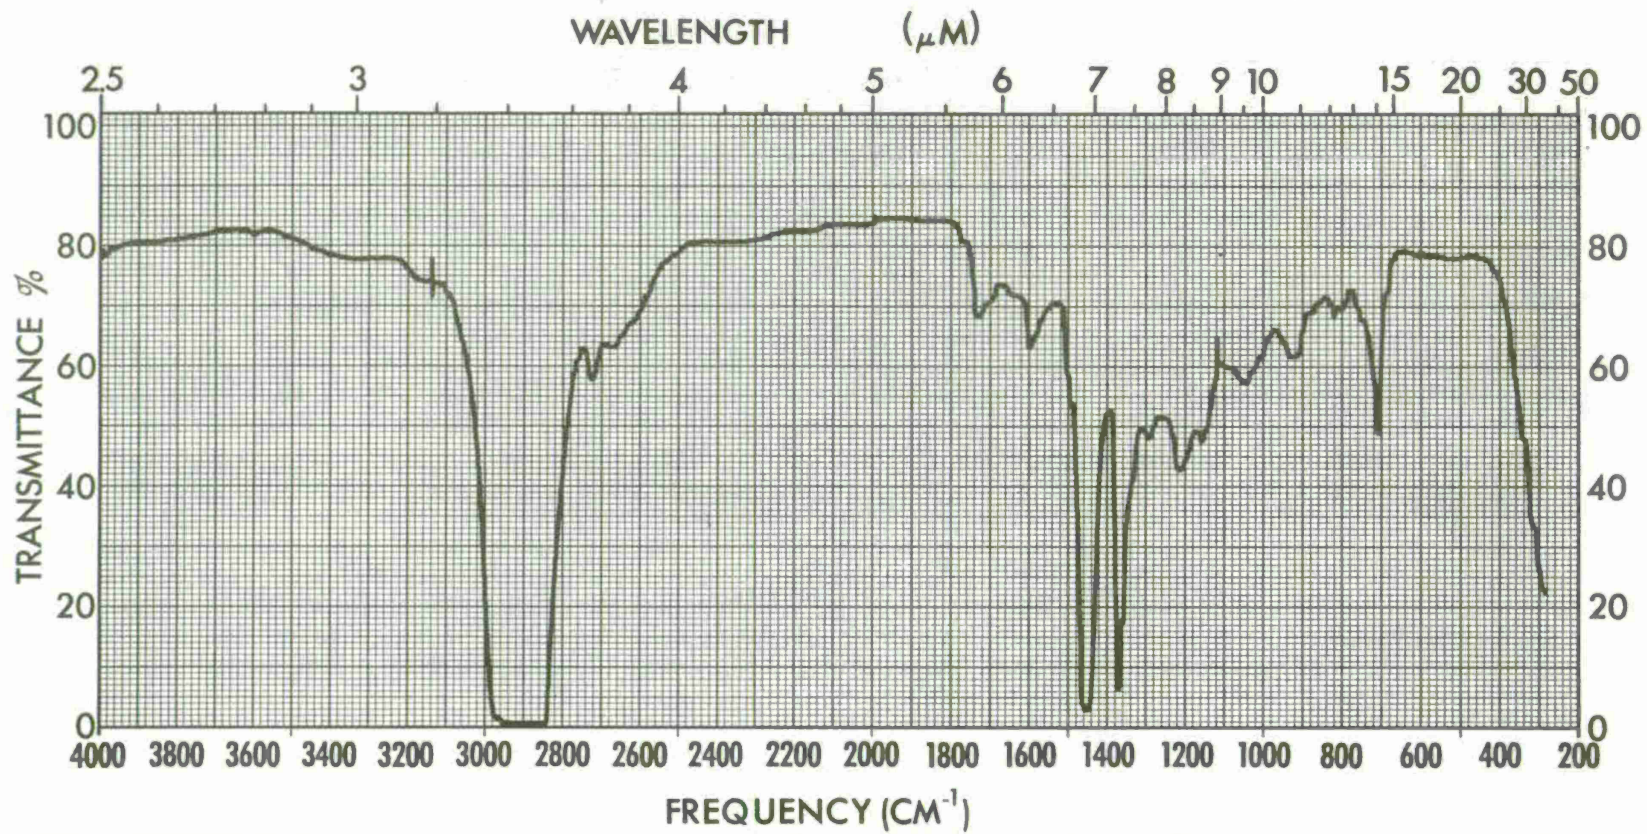

SPECTRUM NO. <u>577</u>	ORIGIN _____	LEGEND _____	REMARKS _____
SAMPLE <u>REO-203</u>		1. _____	
<u>120 HR</u>	PURITY _____	2. _____	
	PHASE _____	DATE <u>12-19-74</u>	
	THICKNESS <u>.05</u>	OPERATOR <u>D.B.</u>	

SPECTRUM NO. \_\_\_\_\_  
SAMPLE \_\_\_\_\_


D-13

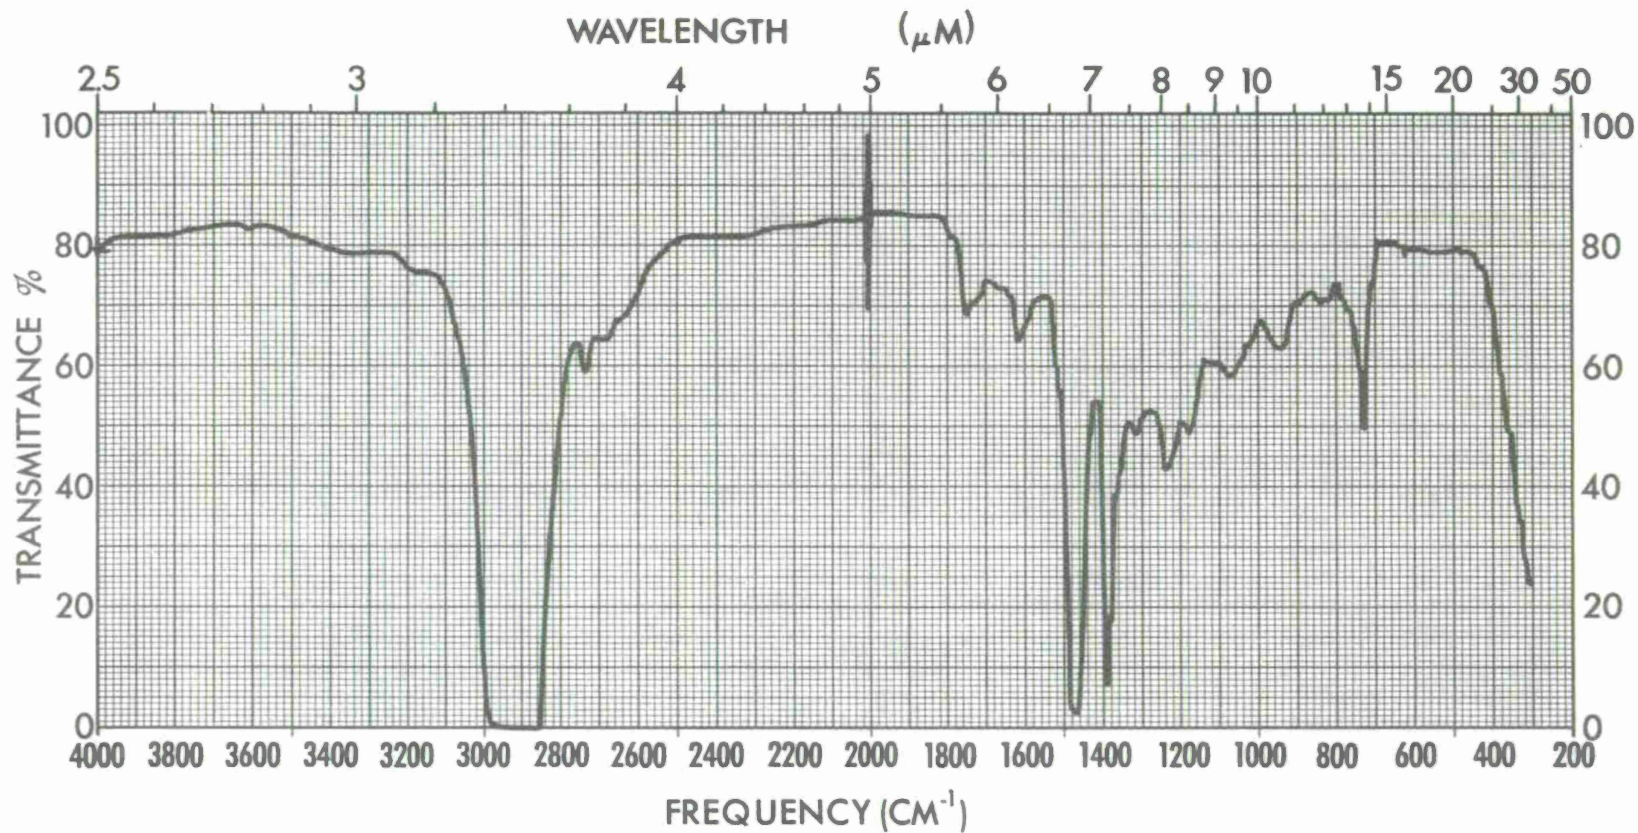

SPECTRUM NO. <u>578</u>	ORIGIN _____	LEGEND _____	REMARKS _____
SAMPLE <u>REO-203</u>		1. _____	
<u>135 HR</u>	PURITY _____	2. _____	
	PHASE _____	DATE <u>12-20-74</u>	
	THICKNESS <u>.05</u>	OPERATOR <u>D.B.</u>	

SPECTRUM NO. \_\_\_\_\_  
SAMPLE \_\_\_\_\_

D-14

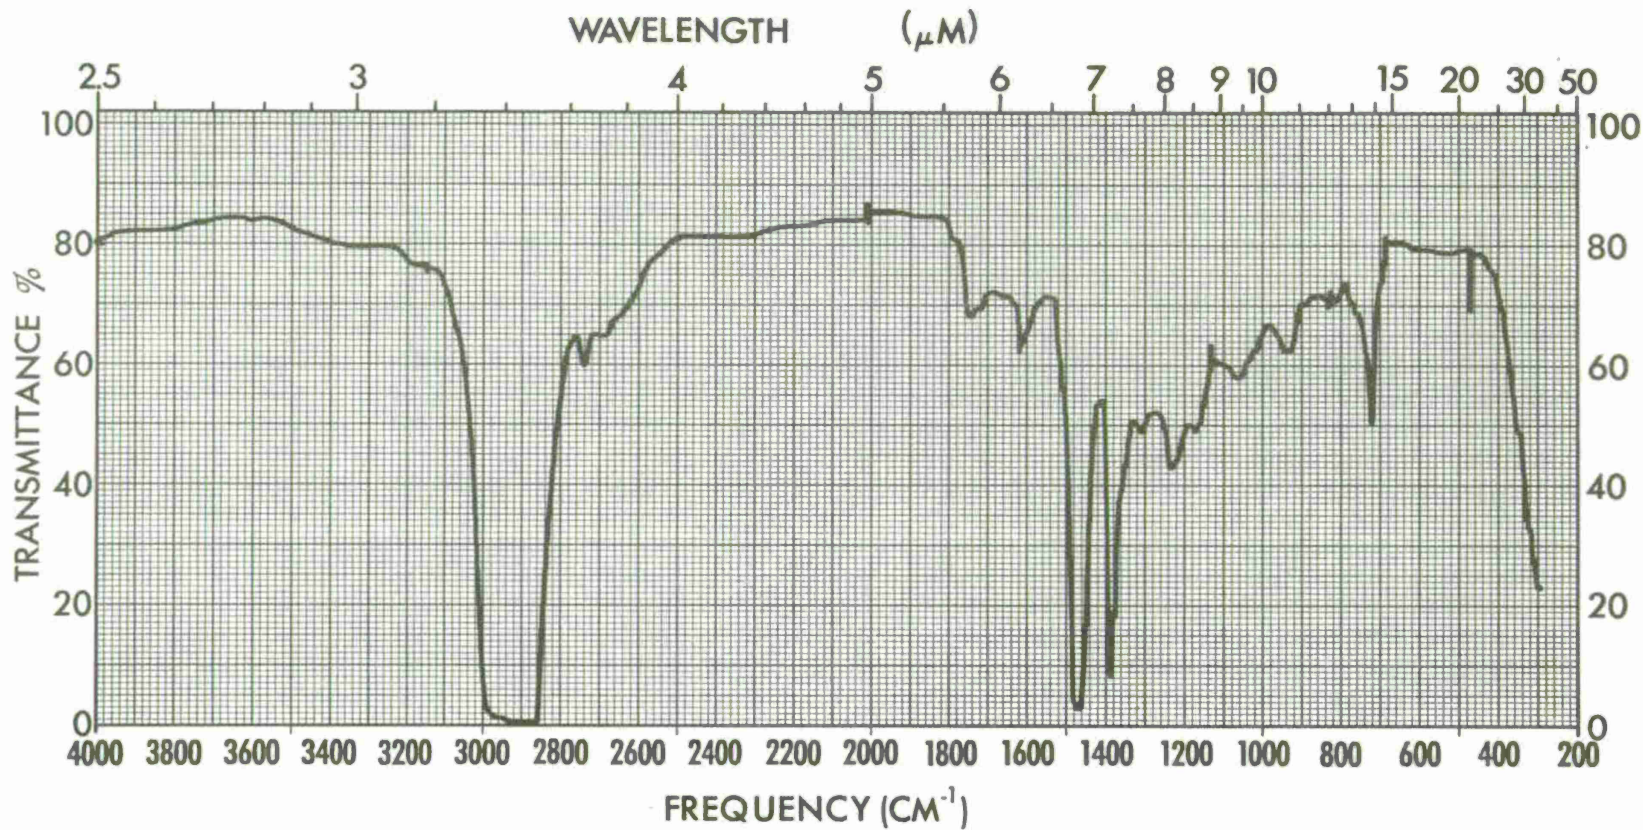

SPECTRUM NO. <u>579</u>	ORIGIN _____	LEGEND _____	REMARKS _____
SAMPLE <u>REO-203</u>		1. _____	
<u>150 HR</u>	PURITY _____	2. _____	
	PHASE _____	DATE <u>12-26-74</u>	
	THICKNESS <u>.05</u>	OPERATOR <u>D.B.</u>	

SPECTRUM NO. \_\_\_\_\_  
SAMPLE \_\_\_\_\_

TEST 1  
Standard Piston Rings  
150 hours

Oil Consumption

<u>Test Hours</u>	<u>Oil Consumed</u> kilograms (lbs)	<u>Sample Removed</u> kilograms (lbs)	<u>Oil Added</u> kilograms (lbs)
7.5	0	0	0
15	.005 (.01)	.045 (.10)	.050 (.11)
22.5	0	0	0
30	0	.036 (.08)	.036 (.08)
37.5	.009 (.02)	0	.009 (.02)
45	0	.032 (.07)	.032 (.07)
52.5	0	0	0
60	.027 (.06)	.041 (.09)	.068 (.15)
67.5	0	0	0
75	0	.036 (.08)	.036 (.08)
82.5	.132 (.29)	0	.132 (.29)
90	0	.041 (.09)	.041 (.09)
97.5	0	0	0
105	0	.036 (.08)	.036 (.08)
112.5	0	0	0
120	0	.055 (.12)	.055 (.12)
127.5	.027 (.06)	0	.027 (.06)
135	0	.045 (.10)	.045 (.10)
142.5	0	0	0
150	0	0	0

initial fill - 3.91 kg (8.60 lbs)  
 final drain - 3.10 kg (6.82 lbs)  
 change in filter wt. - 0.27 kg (0.60 lbs)  
 total oil consumed - 0.74 kg (1.62 lb)

Piston Ring Measurements

Test No.1  
 Engine Model: L-141      Ring Configuration: Standard  
 Serial No.: 5029085      Dates: 12/4/74 - 1/2/75  
 Fuel: AL-5473      Lubricant: REO-203      Observer: Jungman

		End Gaps, cm (inches)			
		Piston Number			
Piston Ring		1	2	3	4
Top Ring	before	.056 (.022)	.043 (.017)	.048 (.019)	.053 (.021)
	after	.056 (.022)	.048 (.019)	.053 (.021)	.056 (.022)
	change	0	.005 (.002)	.005 (.002)	.003 (.001)
Second Ring	before	.058 (.023)	.061 (.024)	.056 (.022)	.061 (.024)
	after	.061 (.024)	.061 (.024)	.058 (.023)	.061 (.024)
	change	.003 (.001)	0	.003 (.001)	0

		Side Clearance, cm (inch x 10 <sup>-3</sup> )			
		Piston Number			
Piston Ring		1	2	3	4
Top Ring	before	.005 (2)	.008 (3)	.005 (2)	.005 (2)
	after	.008 (3)	.008 (3)	.005 (2)	.005 (2)
	change	.003 (1)	0	0	0
Second Ring	before	.008 (3)	.008 (3)	.005 (2)	.008 (3)
	after	.008 (3)	.005 (2)	.005 (2)	.008 (3)
	change	0	-.003 (-1)	0	0

TEST NO. 1  
 PISTON AND CYLINDER BORE MEASUREMENTS

		Cylinder Bore, cm (in.)			
		Piston Number			
Measurement	Location	1	2	3	4
<i>1.1 cm from Top</i>					
Transverse	before	9.8461 (3.8764)	9.8486 (3.8774)	9.8453 (3.8761)	9.8450 (3.8760)
	after	9.8461 (3.8764)	9.8478 (3.8771)	9.8453 (3.8761)	9.8458 (3.8763)
	change	0	-0.0008 (-0.0003)	0	0.0008 (0.0003)
Longitudinal	before	9.8463 (3.8765)	9.8476 (3.8770)	9.8453 (3.8761)	9.8455 (3.8762)
	after	9.8463 (3.8765)	9.8471 (3.8768)	9.8450 (3.8760)	9.8455 (3.8762)
	change	0	-0.0005 (-0.0002)	-0.0003 (-0.0001)	0
<i>5.87 cm from Top</i>					
Transverse	before	9.8463 (3.8765)	9.8476 (3.8770)	9.8453 (3.8761)	9.8453 (3.8761)
	after	9.8463 (3.8765)	9.8471 (3.8768)	9.8450 (3.8760)	9.8453 (3.8761)
	change	0	-0.0005 (-0.0002)	-0.0003 (-0.0001)	0
Longitudinal	before	9.8450 (3.8760)	9.8473 (3.8769)	9.8450 (3.8760)	9.8453 (3.8761)
	after	9.8445 (3.8758)	9.8468 (3.8767)	9.8448 (3.8759)	9.8453 (3.8761)
	change	-0.0005 (-0.0002)	-0.0005 (-0.0002)	-0.0003 (-0.0001)	0

**TEST 2-225 HOURS**

**LOW-BLOWBY PISTON RINGS**

**Fuel:** VV-G-001690A (AL-5473)  
**Lubricant:** REO-203  
**Date**  
**Completed:** 23 January 1975

TEST 2

Low Blowby Piston Rings  
225 Hours  
Summary of Operating Conditions

2800 RPM MODE	AVG	MIN	MAX
Torque, n-m (ft-lb)	126(93)	123(91)	130(96)
Power, OBS, kilowatts (BHp)	37.1(49.7)	36.2(48.5)	38.3(51.3)
Specific Fuel Cons., kg/kW-hr (lbs/BHp-hr)	.330(.542)	.295(.485)	.348(.572)
Blowby @ 49C (120F), m <sup>3</sup> /hr (cu.ft./hr)	.275(9.7)	.105(3.7)	.643(22.7)
Sump Temperature, C (F)	116(241)	98(208)	119(246)
Manifold Vacuum, kPa (in.hg.)	10.1(3.0)	8.1(2.4)	12.8(3.8)

2800 RPM MODE	AVG	MIN	MAX
Torque, n-m (ft-lbs)	129(95)	123(91)	138(102)
Power, OBS, kilowatts (BHp)	27.1(36.3)	25.9(34.7)	28.9(38.7)
Specific Fuel Cons., kg/kW-hr (lbs/BHP-hr)	.344(.566)	.295(.485)	.370(.608)
Blowby @ 49C (120F), m <sup>3</sup> /hr (cu.ft./hr)	.246(8.7)	0.0	.827(29.2)
Sump Temperature, C (F)	97(207)	90(194)	102(216)
Manifold Vacuum, kPa (in.hg.)	9.5(2.8)	6.1(1.8)	11.1(3.3)

600 RPM MODE	AVG	MIN	MAX
Torque, n-m (ft-lb)	0	0	0
Power, OBS, kilowatts (BHp)	0.0	0.0	0.0
Blowby @ 49C (120F), m <sup>3</sup> /hr (cu.ft./hr)	.062(2.2)	0.0	.509(18.0)
Sump Temperature, C (F)	59(139)	51(123)	73(164)
Manifold Vacuum, kPa (in.hg.)	62.8(18.6)	57.1(16.9)	65.8(19.5)


TEST 2

Low Blowby Piston Rings  
225 hours

Used Oil Analysis

Test Hour	Viscosity, cS		Total Acid No.	Total Base No.	Insolubles, w/coag.	
	38°C(100°F)	99°C(210°F)			Pentane	Benzene
New	121.6	12.61	2.97	5.08	-	-
15	108.03	11.68	3.37	4.81	0.0	0.0
30	111.93	12.01	3.40	4.86	0.01	0.02
45	113.94	12.09	3.45	5.14	0.03	0.03
60	115.73	12.24	3.78	4.40	0.06	0.03
75	121.20	12.60	3.98	4.51	0.05	0.03
90	125.38	12.97	3.82	4.86	0.05	0.02
105	128.17	13.08	3.40	4.73	0.04	0.03
120	131.73	13.36	3.56	4.95	0.05	0.03
135	134.78	13.52	4.20	4.92	0.07	0.07
150	139.41	14.03	4.30	4.68	0.07	0.06
165	141.05	14.13	3.82	4.59	0.08	0.08
180	143.86	14.28	4.30	4.75	0.10	0.06
195	148.55	14.41	4.02	5.05	0.09	0.06
210	144.91	14.30	3.93	4.49	0.09	0.06
225	141.52	14.13	3.93	4.49	0.11	0.08


D-19

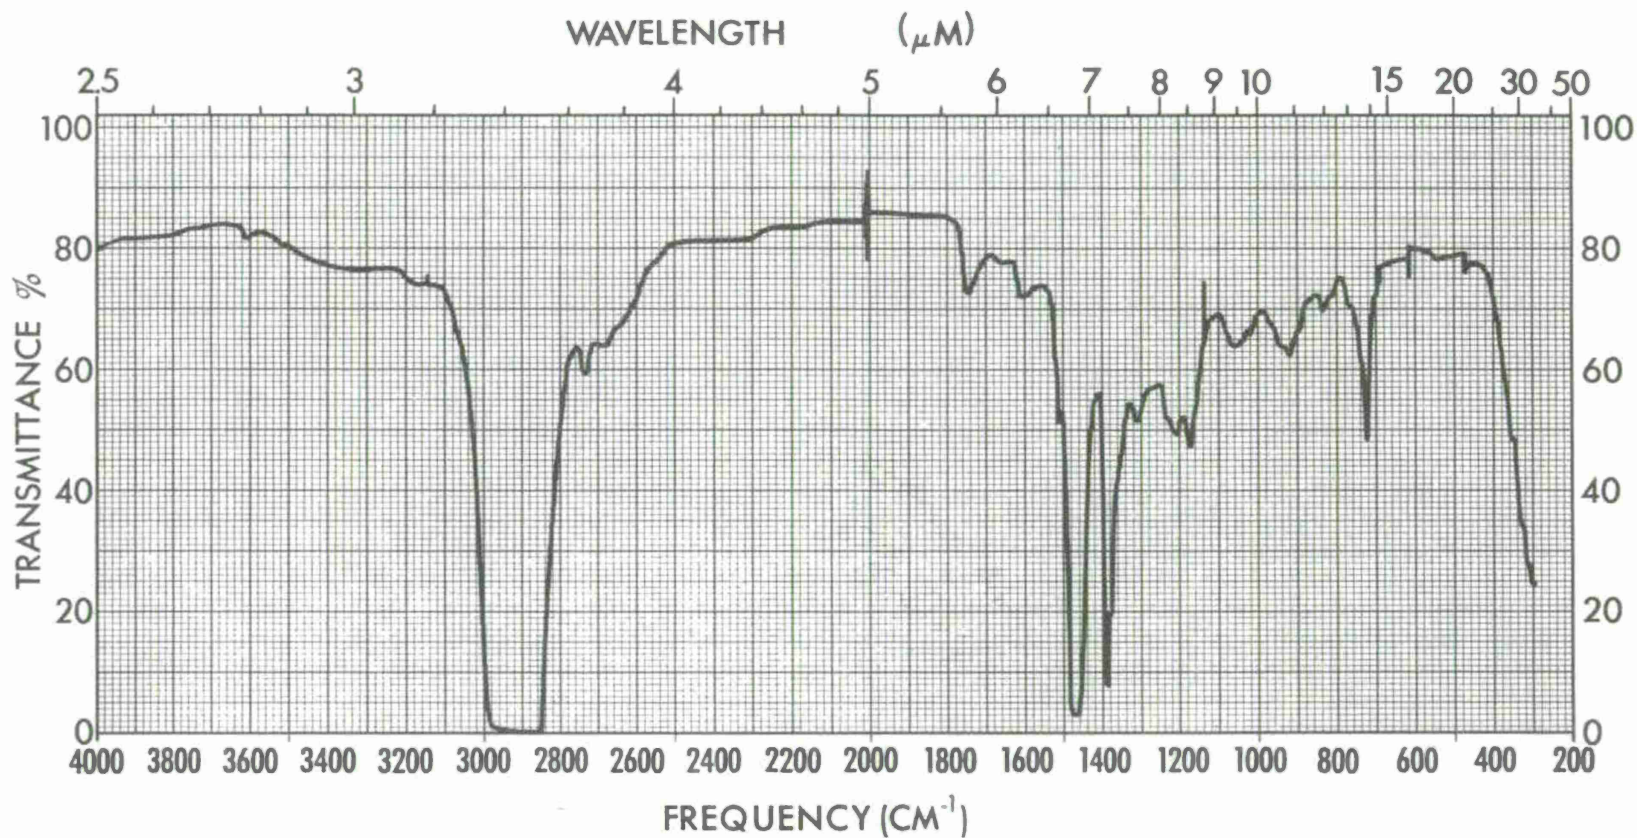

SPECTRUM NO. <u>569</u>	ORIGIN _____	LEGEND _____	REMARKS _____
SAMPLE <u>REO-203</u>		1. _____	
<u>NEW</u>	PURITY _____	2. _____	
	PHASE _____	DATE <u>12-16-74</u>	
	THICKNESS <u>.05</u>	OPERATOR <u>D.B.</u>	

SPECTRUM NO. \_\_\_\_\_  
SAMPLE \_\_\_\_\_


D-20

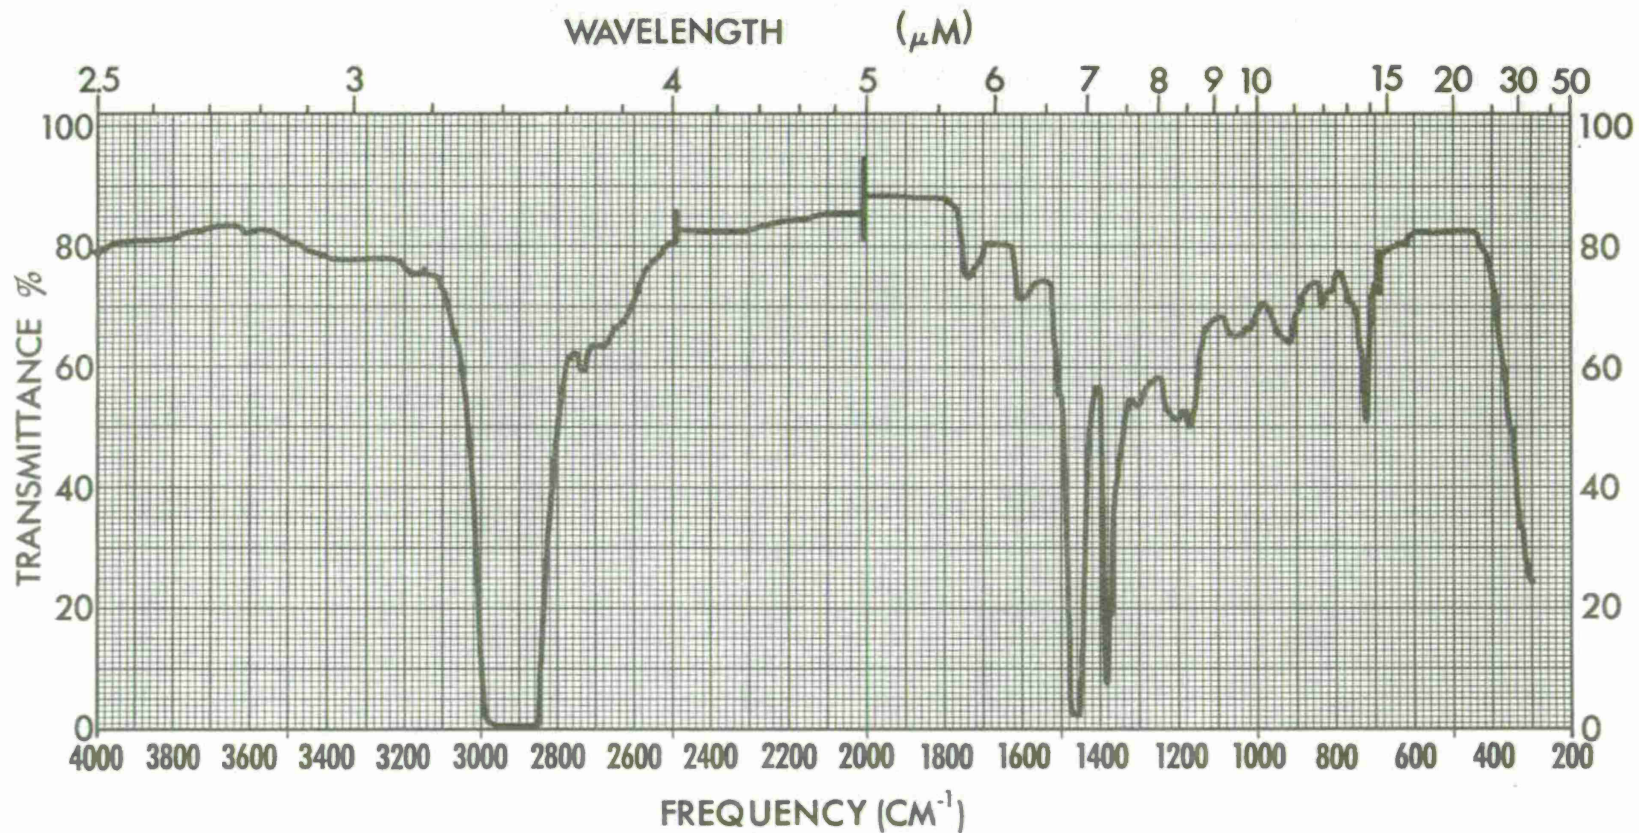

SPECTRUM NO. <u>594</u>	ORIGIN _____	LEGEND _____	REMARKS _____ _____ _____ _____
SAMPLE <u>REO-203</u>	_____	1. _____	
<u>15 HR</u>	PURITY _____	2. _____	
_____	PHASE _____	DATE <u>2-7-75</u>	
_____	THICKNESS <u>.05</u>	OPERATOR <u>D.B.</u>	

SPECTRUM NO. \_\_\_\_\_  
SAMPLE \_\_\_\_\_


D-21

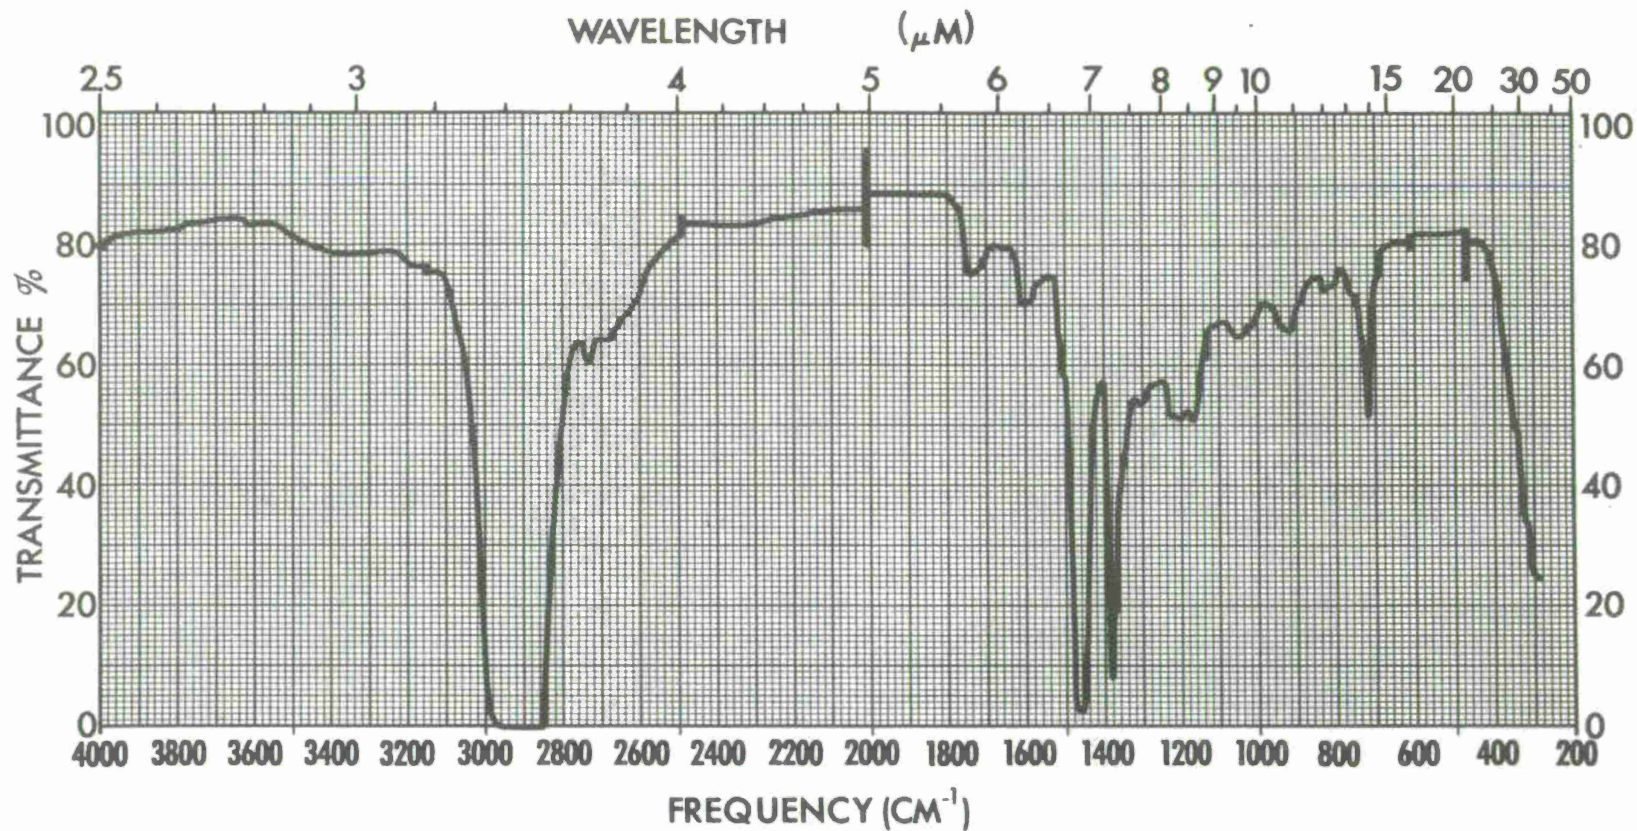

SPECTRUM NO. <u>595</u>	ORIGIN _____	LEGEND _____	REMARKS _____
SAMPLE <u>REO-203</u>		1. _____	
<u>45 HR</u>	PURITY _____	2. _____	
	PHASE _____	DATE <u>2-7-75</u>	
	THICKNESS <u>.05</u>	OPERATOR <u>D.B.</u>	

SPECTRUM NO. \_\_\_\_\_  
SAMPLE \_\_\_\_\_


D-22

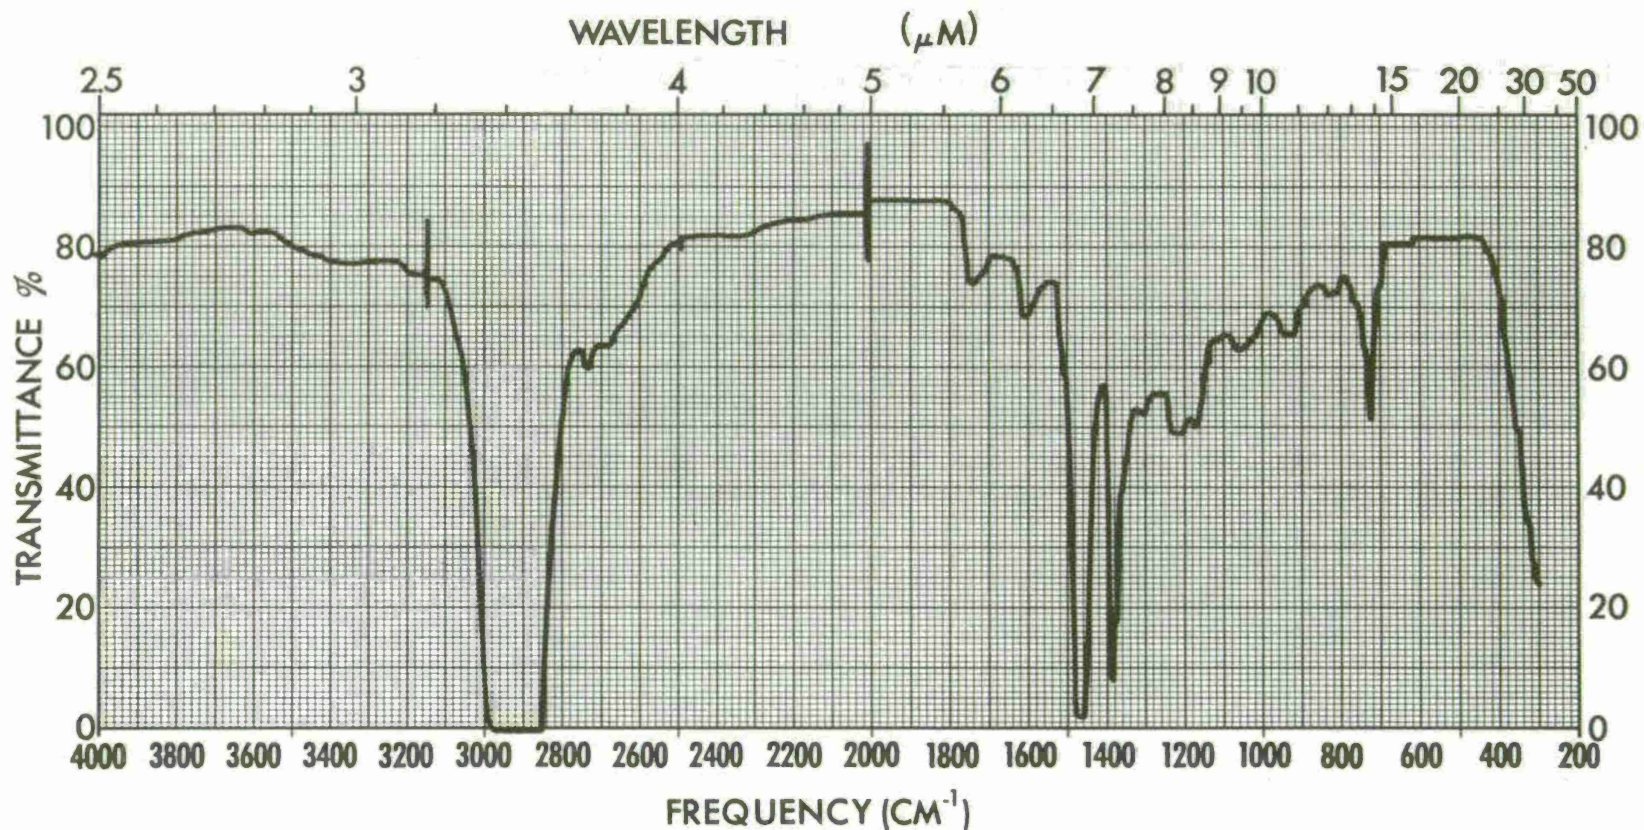

SPECTRUM NO. <u>596</u>	ORIGIN _____	LEGEND _____	REMARKS _____
SAMPLE <u>REO-203</u>		1. _____	
<u>75 HR</u>	PURITY _____	2. _____	
	PHASE _____	DATE <u>2-7-75</u>	
	THICKNESS <u>.05</u>	OPERATOR <u>D.B.</u>	

SPECTRUM NO. \_\_\_\_\_  
SAMPLE \_\_\_\_\_


D-23

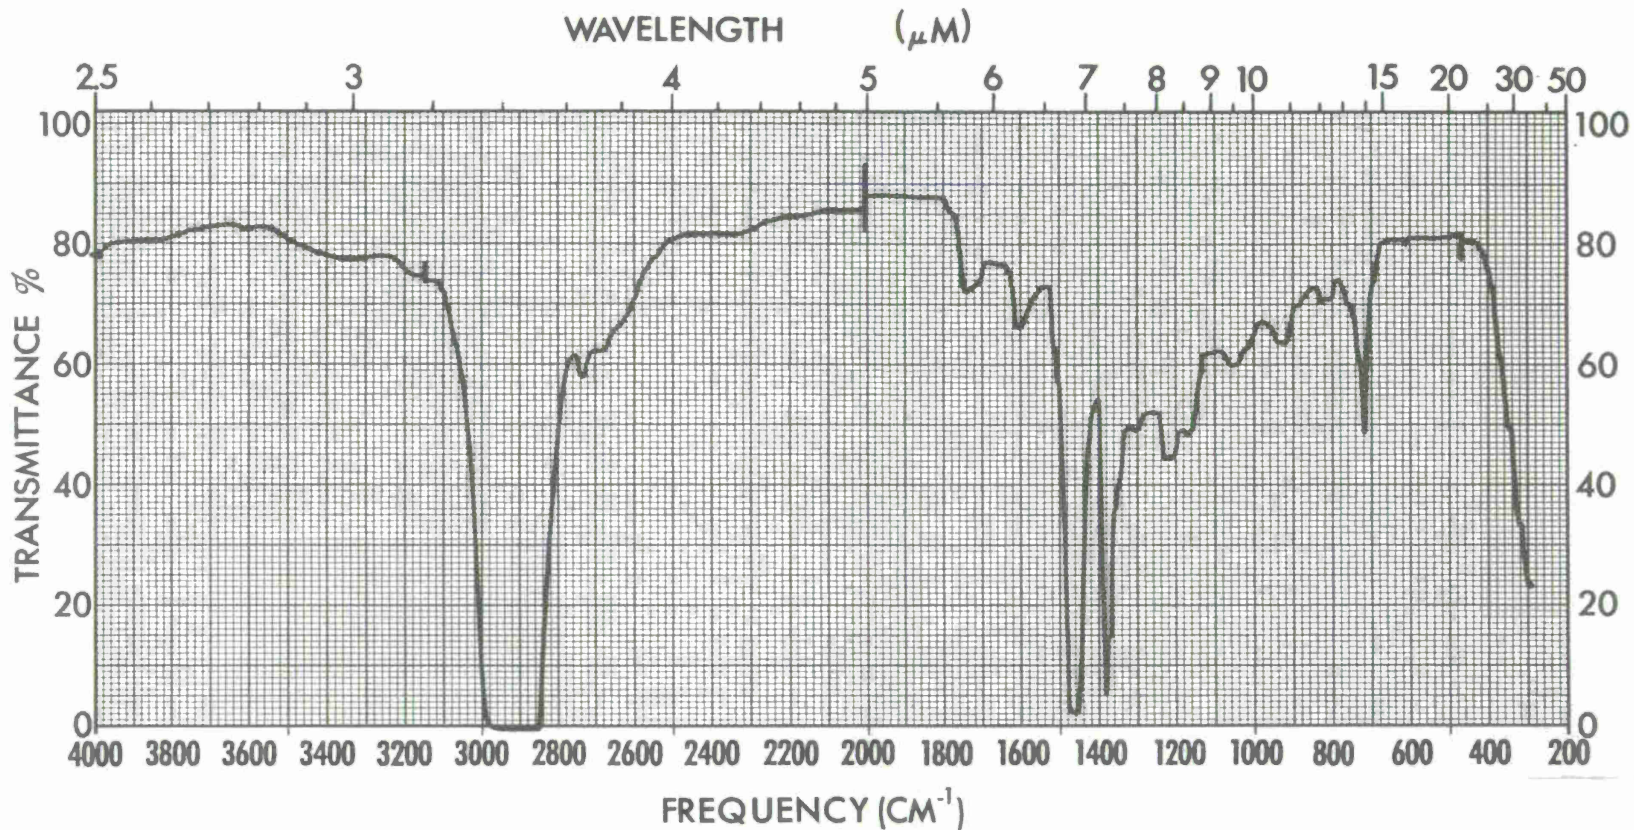

SPECTRUM NO. <u>597</u>	ORIGIN _____	LEGEND _____	REMARKS _____
SAMPLE <u>REO-203</u>		1. _____	
<u>105 HR</u>	PURITY _____	2. _____	
	PHASE _____	DATE <u>2-7-75</u>	
	THICKNESS <u>.05</u>	OPERATOR <u>D.B.</u>	

SPECTRUM NO. \_\_\_\_\_  
SAMPLE


D-24

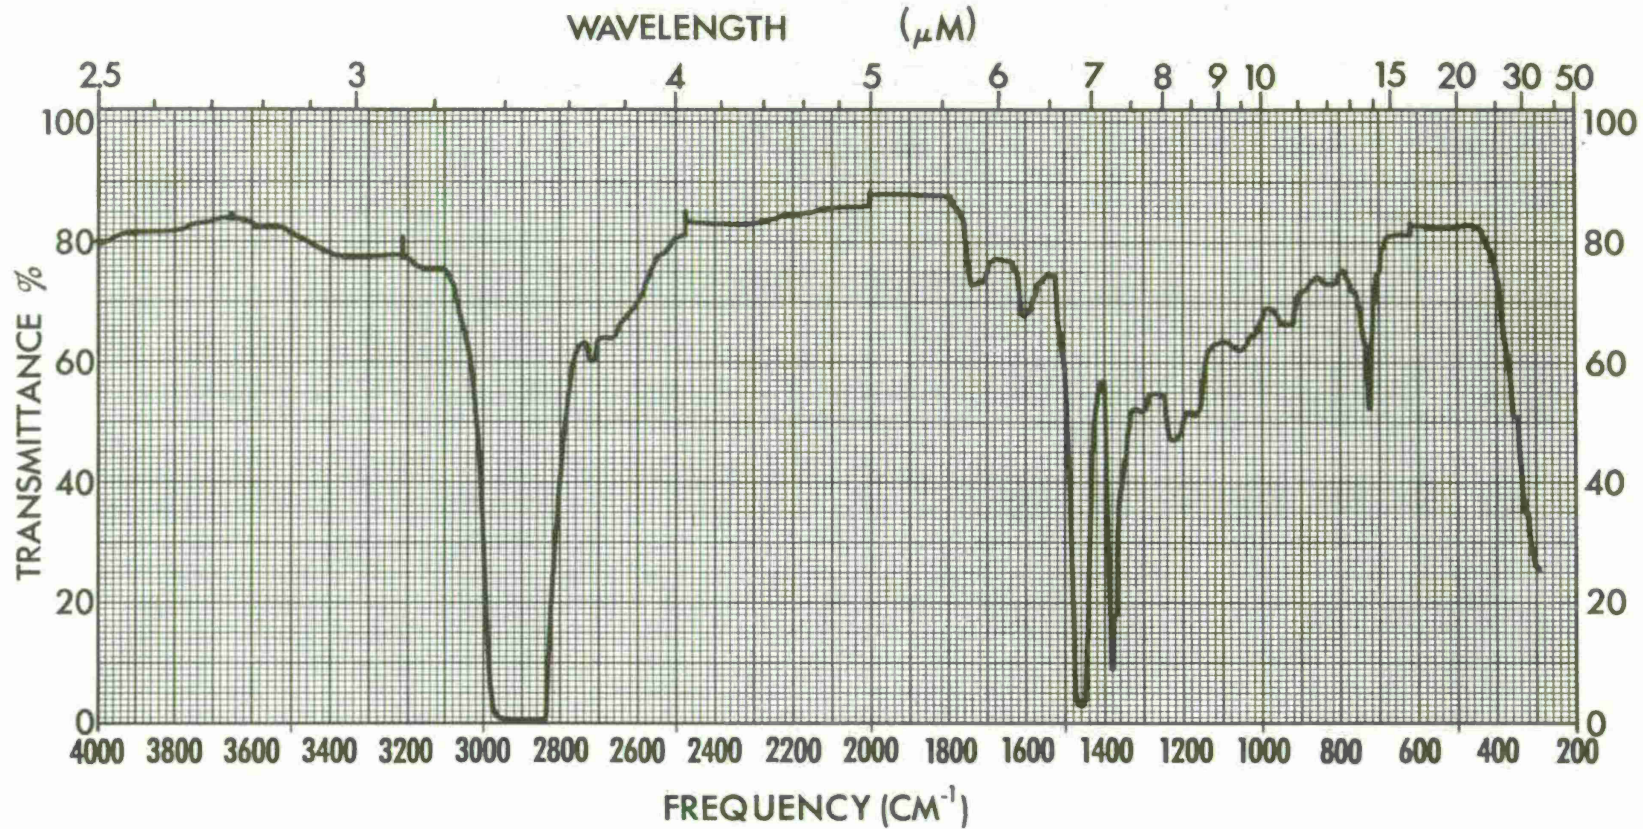

SPECTRUM NO. <u>598</u>	ORIGIN _____	LEGEND _____	REMARKS _____
SAMPLE <u>REO-203</u>		1. _____	
<u>135 HR</u>	PURITY _____	2. _____	
	PHASE _____	DATE <u>2-10-75</u>	
	THICKNESS <u>.05</u>	OPERATOR <u>D.B.</u>	

SPECTRUM NO. \_\_\_\_\_  
SAMPLE \_\_\_\_\_


D-25

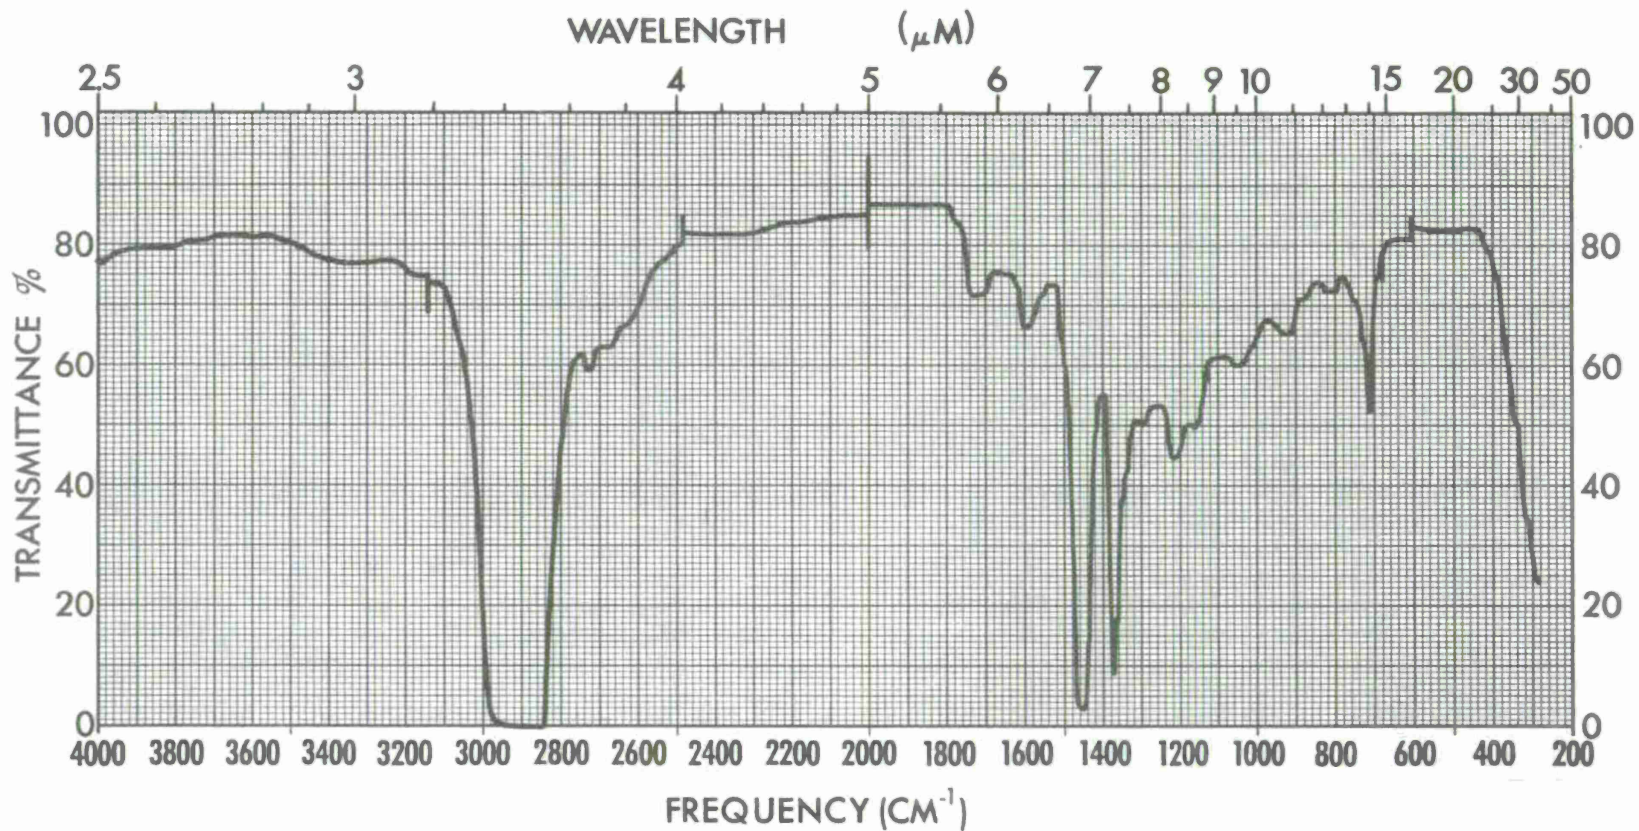

SPECTRUM NO. <u>599</u>	ORIGIN _____	LEGEND _____	REMARKS _____
SAMPLE <u>REO-203</u>		1. _____	
<u>165 HR</u>	PURITY _____	2. _____	
	PHASE _____	DATE <u>2-10-75</u>	
	THICKNESS <u>.05</u>	OPERATOR <u>D.B.</u>	

SPECTRUM NO. \_\_\_\_\_  
SAMPLE \_\_\_\_\_


D-26

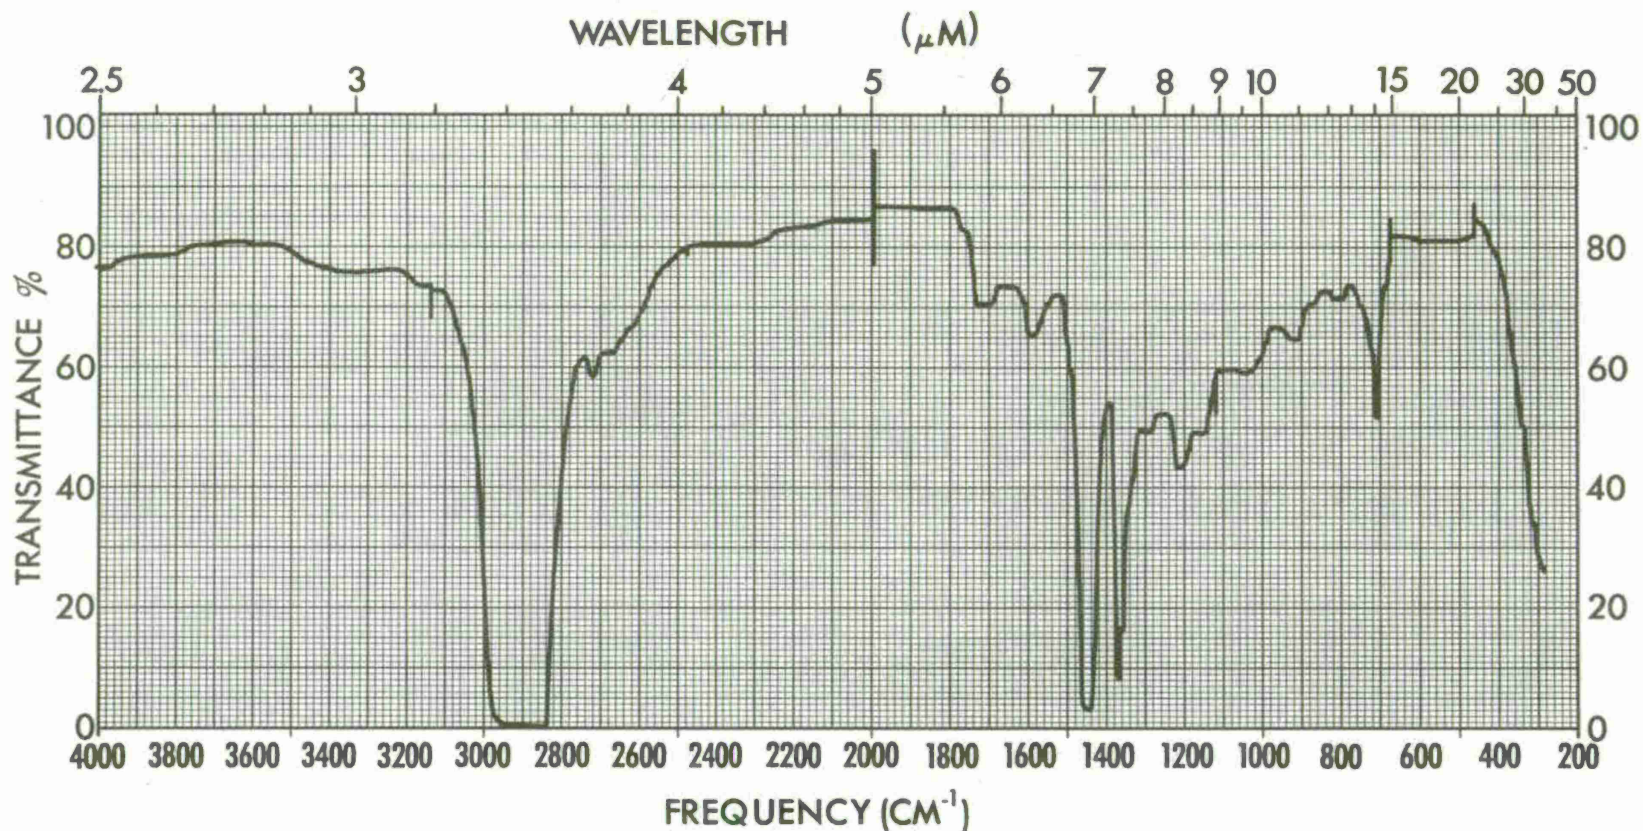

SPECTRUM NO. <u>600</u>	ORIGIN _____	LEGEND _____	REMARKS _____
SAMPLE <u>REO-203</u>		1. _____	
<u>195 HR</u>	PURITY _____	2. _____	
	PHASE _____	DATE <u>2-10-75</u>	
	THICKNESS <u>.05</u>	OPERATOR <u>D.B.</u>	

SAMPLE SPECTRUM NO. \_\_\_\_\_

D-27

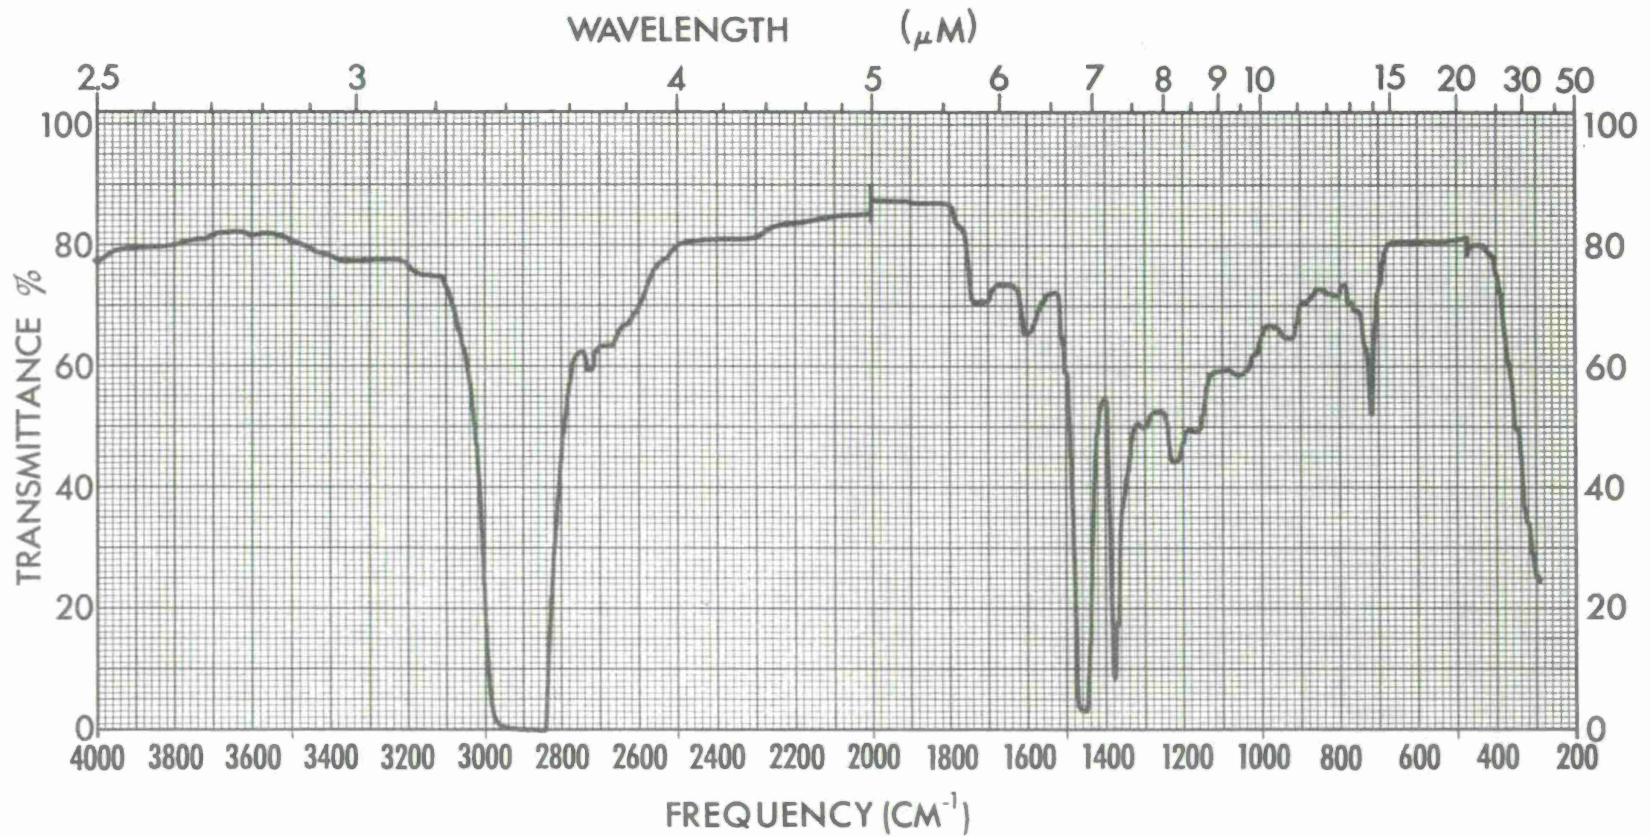

SPECTRUM NO. <u>601</u>	ORIGIN _____	LEGEND _____	REMARKS _____
SAMPLE <u>REO-203</u>	_____	1. _____	_____
<u>225 HR</u>	PURITY _____	2. _____	_____
_____	PHASE _____	DATE <u>2-10-75</u>	_____
_____	THICKNESS <u>.05</u>	OPERATOR <u>D.B.</u>	_____

SPECTRUM NO. \_\_\_\_\_  
SAMPLE \_\_\_\_\_

TEST 2

Low Blowby Piston Rings  
225 Hours

Oil Consumption

<u>Test Hours</u>	<u>Oil Consumed Kilograms (lbs)</u>	<u>Sample Removed Kilograms (lbs)</u>	<u>Oil Added Kilograms (lbs)</u>
7.5	0	0	0
15	.08 (.17)	.07 (.15)	.13 (.29)
22.5	0	0	0
30	0	.05 (.12)	.05 (.12)
37.5	0	0	0
45	.04 (.08)	.05 (.11)	.09 (.19)
52.5	0	0	0
60	.02 (.04)	.04 (.10)	.06 (.14)
67.5	0	0	0
75	.02 (.05)	.05 (.11)	.07 (.16)
82.5	0	0	0
90	.10 (.21)	.05 (.11)	.14 (.32)
97.5	0	0	0
105	0	.05 (.12)	.05 (.12)
112.5	.05 (.11)	0	.05 (.11)
120	.08 (.17)	.04 (.10)	.12 (.27)
127.5	0	0	0
135	.03 (.07)	.05 (.12)	.09 (.19)
142.5	.01 (.02)	0	.01 (.02)
150	.15 (.33)	.04 (.09)	.19 (.42)
157.5	.04 (.08)	0	.04 (.08)
165	.09 (.19)	.05 (.12)	.14 (.31)
172.5	0	0	0
180	.10 (.21)	.04 (.08)	.13 (.29)
187.5	0	0	0
195	.16 (.35)	.05 (.12)	.21 (.47)
202.5	.01 (.02)	0	.01 (.02)
210	.15 (.33)	.05 (.12)	.20 (.45)
217.5	.07 (.15)	0	.07 (.15)
225	.20 (.43)	0	0

initial fill - 3.90 kg (8.60 lbs)  
 final drain - 3.25 kg (7.15 lbs)  
 change in filter wt. - 0.27 kg (0.59 lbs)  
 total oil consumed - 1.76 kg (3.87 lb)

TEST 2

Low Blowby Piston Rings

Piston Ring Gap Measurements

Piston Ring		End Gap, centimeters (inches)			
		Piston No.			
		1	2	3	4
top ring	before	.058 (.023)	.064 (.025)	.061 (.024)	.061 (.024)
	after	.058 (.023)	.061 (.024)	.058 (.023)	.058 (.023)
	change	0	-.003 (-.001)	-.003 (-.001)	-.003 (-.001)
second ring top	before	.048 (.019)	.058 (.023)	.048 (.019)	.051 (.020)
	after	.038 (.015)	.046 (.018)	.036 (.014)	.043 (.017)
	change	-.010 (-.004)	-.013 (-.005)	-.013 (-.005)	-.008 (-.003)
second ring bottom	before	.048 (.019)	.061 (.024)	.051 (.020)	.056 (.022)
	after	.038 (.015)	.041 (.016)	.038 (.015)	.046 (.018)
	change	-.010 (-.004)	-.020 (-.008)	-.013 (-.005)	-.013 (-.005)

Piston Ring		Side Clearance, centimeters (in. x 10 <sup>-3</sup> )			
		Piston No.			
		1	2	3	4
top ring	before	.008 (3)	.008 (3)	.008 (3)	.008 (3)
	after	.005 (2)	.005 (2)	.015 (6)	.025 (10)
	change	-.003 (-1)	-.003 (-1)	.008 (3)	.018 (7)
second rings	before	.013 (5)	.010 (4)	.013 (5)	.013 (5)
	after	.015 (6)	.013 (5)	.015 (6)	.015 (6)
	change	.003 (1)	.003 (1)	.003 (1)	.003 (1)

TEST NO. 2  
Low Blowby Piston Rings -  
Piston and Cylinder Bore Measurements

		Piston No.			
		1	2	3	4
Cylinder Bore, cm (in.)					
1.1 cm from Top					
Transverse	before	9.8461 (3.8764)	9.8478 (3.8771)	9.8453 (3.8761)	9.8458 (3.8763)
	after	9.8473 (3.8769)	9.8491 (3.8776)	9.8461 (3.8764)	9.8463 (3.8765)
	change	0.0013 (0.0005)	0.0013 (0.0005)	0.0008 (0.0003)	0.0005 (0.0002)
Longitudinal	before	9.8450 (3.8760)	9.8471 (3.8768)	9.8450 (3.8760)	9.8455 (3.8762)
	after	9.8461 (3.8764)	9.8481 (3.8772)	9.8458 (3.8763)	9.8468 (3.8767)
	change	0.0010 (0.0004)	0.0010 (0.0004)	0.0008 (0.0003)	0.0013 (0.0005)
5.87 cm from Top					
Transverse	before	9.8461 (3.8764)	9.8471 (3.8768)	9.8450 (3.8760)	9.8453 (3.8761)
	after	9.8473 (3.8769)	9.8481 (3.8772)	9.8461 (3.8764)	9.8461 (3.8764)
	change	0.0013 (0.0005)	0.0010 (0.0004)	0.0010 (0.0004)	0.0008 (0.0003)
Longitudinal	before	9.8445 (3.8758)	9.8468 (3.8767)	9.8448 (3.8759)	9.8453 (3.8761)
	after	9.8455 (3.8762)	9.8481 (3.8772)	9.8455 (3.8762)	9.8461 (3.8764)
	change	0.0010 (0.0004)	0.0013 (0.0005)	0.0008 (0.0003)	0.0008 (0.0003)
Piston Diameter (T-AT), cm (in.)					
Bottom of oil ring	before	9.8340 (3.8740)	9.8394 (3.8738)	9.8379 (3.8732)	9.8382 (3.8733)
	after	9.8392 (3.8737)	9.8387 (3.8735)	9.8377 (3.8731)	9.8392 (3.8737)
	change	-0.0008 (-0.0003)	-0.0008 (-0.0003)	-0.0002 (-0.0001)	-0.0010 (-0.0004)
Skirt	before	9.8407 (3.8743)	9.8387 (3.8735)	9.8364 (3.8726)	9.8354 (3.8722)
	after	9.8379 (3.8732)	9.8379 (3.8732)	9.8356 (3.8723)	9.8323 (3.8710)
	change	-0.0028 (-0.0011)	-0.0008 (-0.0003)	-0.0008 (-0.0003)	-0.0030 (-0.0012)

due to second groove O-ring, rating not comparable

STANDARD COMPUTATION SHEET FOR PISTON RATING

TEST PROCEDURE \_\_\_\_\_  
 TEST HOURS 225  
 TEST LABORATORY \_\_\_\_\_  
 LUBRICANT REO-203

RATER EL DATE 1-29-75  
 LABORATORY TEST NUMBER 2  
 STAND NO. 2 ENGINE NO. 5029085  
 FUEL AL-5473-G

PISTON NO. 1

NO. 1 GROOVE, VOLUME-%	
PISTON WTD* RATING	7.61

DEPOSIT TYPE	DEPOSIT FACTOR	GROOVES								LANDS								UNDER-CROWN	
		NO. 1		NO. 2		NO. 3		NO. 4		NO. 1		NO. 2		NO. 3		NO. 4		AREA-%	DEMERIT
		AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT		
CARBON	HC	1.00																	
	MHC	0.75																	
	MC	0.50																	
	LC	0.25																	
	VLC	0.15																	
	CARBON RATING																		
VARNISH	BV	0.100	15	1.5						30	3.0								
	DBrV	0.075	15	1.13						5	.38								
	AV	0.050	20	1.0															
	LAV	0.025																	
	VLAV	0.010	50	.5								10	0.1						
	RV	0.001																	
	VARNISH RATING																		
CLEAN	0	0							65	0	90	0							
ZONAL RATING			4.13							3.38		0.1							
LOCATION FACTOR																			
WEIGHTED RATING																			

\*WEIGHTED TOTAL DEPOSITS 7.61

D-30

**STANDARD COMPUTATION SHEET FOR PISTON RATING**

TEST PROCEDURE \_\_\_\_\_  
 TEST HOURS 225  
 TEST LABORATORY \_\_\_\_\_  
 LUBRICANT REO-203

RATER EL DATE 1-29-75  
 LABORATORY TEST NUMBER 2  
 STAND NO. 2 ENGINE NO. 5029085  
 FUEL AL-5473-G

PISTON NO. 2

NO. 1 GROOVE, VOLUME-%	
PISTON WTD* RATING	6.55

DEPOSIT TYPE	DEPOSIT FACTOR	GROOVES								LANDS								UNDER-CROWN	
		NO. 1		NO. 2		NO. 3		NO. 4		NO. 1		NO. 2		NO. 3		NO. 4		AREA-%	DEMERIT
		AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT
CARBON	HC	1.00																	
	MHC	0.75																	
	MC	0.50																	
	LC	0.25																	
	VLC	0.15	5	0.75															
	CARBON RATING																		
VARNISH	BV	0.100	30	3.0						5	0.5								
	DBrV	0.075	10	.75						10	0.75								
	AV	0.050																	
	LAV	0.025																	
	VLAV	0.010	55	.55															
	RV	0.001																	
	VARNISH RATING																		
CLEAN	0									80	0	100	0						
ZONAL RATING		5.05								1.5									
LOCATION FACTOR																			
WEIGHTED RATING																			

\*WEIGHTED TOTAL DEPOSITS 6.55

STANDARD COMPUTATION SHEET FOR PISTON RATING

TEST PROCEDURE \_\_\_\_\_  
 TEST HOURS 225  
 TEST LABORATORY \_\_\_\_\_  
 LUBRICANT REO-203

RATER EL DATE 1-29-75  
 LABORATORY TEST NUMBER 2  
 STAND NO. 2 ENGINE NO. 5029085  
 FUEL AL-5473-G

PISTON NO. 3

NO. 1 GROOVE, VOLUME-%	
PISTON WTD* RATING	3.33

DEPOSIT TYPE	DEPOSIT FACTOR	GROOVES								LANDS								UNDER-CROWN	
		NO. 1		NO. 2		NO. 3		NO. 4		NO. 1		NO. 2		NO. 3		NO. 4		UNDER-CROWN	
		AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT
CARBON	HC	1.00																	
	MHC	0.75																	
	MC	0.50																	
	LC	0.25																	
	VLC	0.15	10	1.5															
	CARBON RATING																		
VARNISH	BV	0.100																	
	DBrV	0.075	5	.38															
	AV	0.050							10	0.5									
	LAV	0.025																	
	VLAV	0.010	85	0.85					10	0.1									
	RV	0.001																	
	VARNISH RATING																		
CLEAN	0								80	0	100	0							
ZONAL RATING		2.73							0.6		0								
LOCATION FACTOR																			
WEIGHTED RATING																			

\*WEIGHTED TOTAL DEPOSITS 3.33

**STANDARD COMPUTATION SHEET FOR PISTON RATING**

TEST PROCEDURE \_\_\_\_\_  
 TEST HOURS 225  
 TEST LABORATORY \_\_\_\_\_  
 LUBRICANT REO-203

RATER EL DATE 1-29-75  
 LABORATORY TEST NUMBER 2  
 STAND NO. 2 ENGINE NO. 5029085  
 FUEL AL-5473-G

PISTON NO. 4

NO. 1 GROOVE, VOLUME-%	
PISTON WTD* RATING	19.75

DEPOSIT TYPE	DEPOSIT FACTOR	GROOVES								LANDS								UNDER-CROWN	
		NO. 1		NO. 2		NO. 3		NO. 4		NO. 1		NO. 2		NO. 3		NO. 4		AREA-%	DEMERIT
		AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT
CARBON	HC	1.00																	
	MHC	0.75																	
	MC	0.50																	
	LC	0.25																	
	VLC	0.15																	
	CARBON RATING																		
VARNISH	BV	0.100	100	10.0						30	3.0	20	2.0						
	DBrV	0.075								10	0.75	5	.38						
	AV	0.050				20	1.0												
	LAV	0.025								60	1.5	25	.62						
	VLAV	0.010										50	0.5						
	RV	0.001																	
	VARNISH RATING																		
CLEAN	0					80	0			0		0		100					
ZONAL RATING			10.0				1.0				5.25		3.5						
LOCATION FACTOR																			
WEIGHTED RATING																			

\*WEIGHTED TOTAL DEPOSITS 19.75

## Test Number II

## RING FACE CONDITION

Engine Model L-141 Serial No. 5029085 Date 1-29-75  
 Fuel AL-5473-G Lubricant REO-203 Observer ERL

	Cylinder Number					
	1	2	3	4		
First Ring	N	N	N	N		
Second Ring	N	N	N	N		
Third Ring						
Fourth Ring	100	100	100	100		
Oil Ring Slots-% Open						

N-Normal

## PISTON SURFACE DEPOSITS

Engine Model L-141 Serial No. 5029085 Date 1-29-75  
 Fuel AL-5473-G Lubricant REO-203 Observer ERL

		Piston Number				
		1	2	3	4	
Top*		25A, HC 75 Clean	100 1/2A HC	100 1/2A HC	100 1/2A	
Combustion Chamber*		85A, HC 15 Clean	30A, HC 70 Clen	70A, HC 5-8 10-7, 15-0	95A, HC 5-0	
Under Head*		0	0	0	0	
Skirts*	Thrust	0	0	0	5-A 95-0	
	Anti-Thrust	0	0	0	0	
Relief Areas*		0	0	0	0	
Lands demerits	1	25-9 5-6, 5-8 65-0	5-9, 80-0 10-6 5-5	10-4 10-2 80-0	35-9, 25-3 5-7 5-6	
	2	10-2 90-0	100-0	100-0	10-9, 25-3 10-8, 50-2 5-7	
	3					
	4					

\*Carbon and Ash: Use Volume Factor  
 Indicate H, M, or S

PISTON RING GROOVE DEPOSITS

Engine Model L-141 Serial No. 5029085 Date 1-29-75  
 Fuel AL-5473-G Lubricant REO-203 Observer ERL

		Cylinder Number							
		1		2		3		4	
		CARB	VARN	CARB	VARN	CARB	VARN	CARB	VARN
Top of Groove*	1	0	2-9 98-0	0	0	0	0	0	0
	2	0	15-9 15-6 70-0	0	15-8 10-7 70-0	0	10-8 15-7 10-5 65-0	0	15-8 10-7 55-0
	3	0	*	0	*	0	*	0	0
	4								
Back of Groove†	1	0	15-9 15-7 20-5	5-RS 95-0	30-8 10-7 60-2	5-RS 5-A 90-0	5-7 95-2	0	100-9
	2	0	+	0	+	0	+	0	+
	3	0	0	0	0	0	0	0	20-5 80-0
	4								
Bottom of Groove*	1	0	0	0	0	0	0	0	0
	2	0	0	0	0	0	0	0	0
	3	0	*	0	*	0	*	0	*
	4								
Drain Holes—% Blocked									

\*Discolored, but does not look like varnish, maybe freating  
 †Unable to rate because of O-ring


D-36

**PISTON GROOVE INSIDE DIAMETER-% RING SUPPORTING CARBON**

Engine Model L-141 Serial No. 5029085 Date 1-29-75  
 Fuel AL-5473-G Lubricant REO-203 Observer ERL

Piston Ring	Quadrant	Piston Number					
		1	2	3	4		
1	1	0	0	0	0		
	2	0	0	0	0		
	3	0	0	0	0		
	4	0	0	0	0		
2	1	0	0	0	0		
	2	0	0	0	0		
	3	0	0	0	0		
	4	0	0	0	0		

D-37

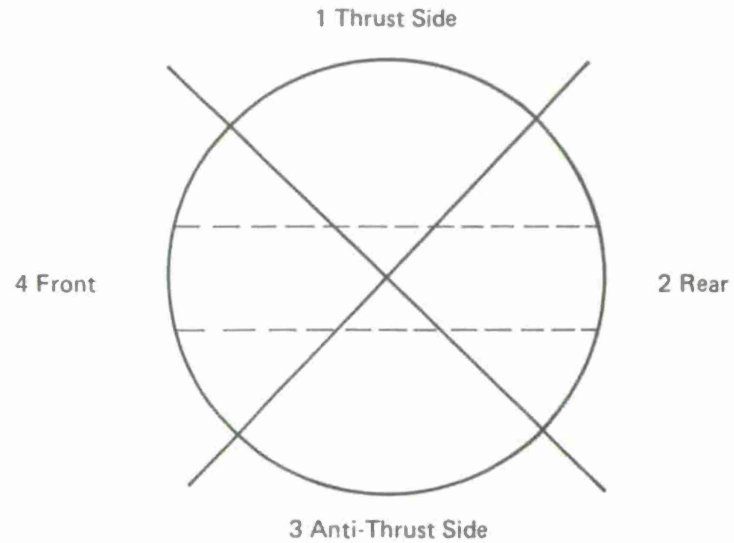

### PISTON SURFACE CONDITION

Engine Model L-141 Serial No. 5029085 Date 1-29-75  
 Fuel AL-5473-G Lubricant REO-203 Observer ERL

	Piston Number					
	1	2	3	4		
Top Land	N	N	N	N		
Skirt	N	N	N	N		
Piston Pin	N	N	N	N		

N-Normal

### RING STICKING

Engine Model L-141 Serial No. 5029085 Date 1-30-75  
Fuel AL-5473-G Lubricant REO-203 Observer ERL

Piston Number

Ring No.	1	2	3	4		
1	F	S	F	F		
2	F	F	F	F		
3	F	F	F	F		
4						

Indicate by letter—Free or Sluggish, or by number and letter—percent Pinched (cold stuck) or percent Hot stuck

D-39

### RING DEPOSITS

Engine Model L-141 Serial No. 5029085 Date 1-30-75  
 Fuel AL-5473-G Lubricant REO-203 Observer ERL

Cylinder Number		1		2		3		4							
		CARB	VARN	CARB	VARN	CARB	VARN	CARB	VARN						
Piston Ring	Top	1	0	0	0	0	0	10-4 90-0	0	0					
		2	0	0	0	2-5 98-0	0	0	0	0					
		3													
		4													
	ID	1	0	0	0	0	0	0	0	0					
		2	0	0	0	0	0	0	0	0					
		3													
		4													
	Bottom	1	0	0	0	0	0	0	0	0					
		2	0	0	0	0	0	0	0	10-4 90-0					
		3													
		4													

Areas previously rated for carbon, rate 0 for varnish

D-40

**TEST 3-225 HOURS**


**STANDARD PISTON RINGS**

**Fuel:** VV-G-001690A (AL-5473)

**Lubricant:** REO-203

**Date**

**Completed:** 24 February 1975

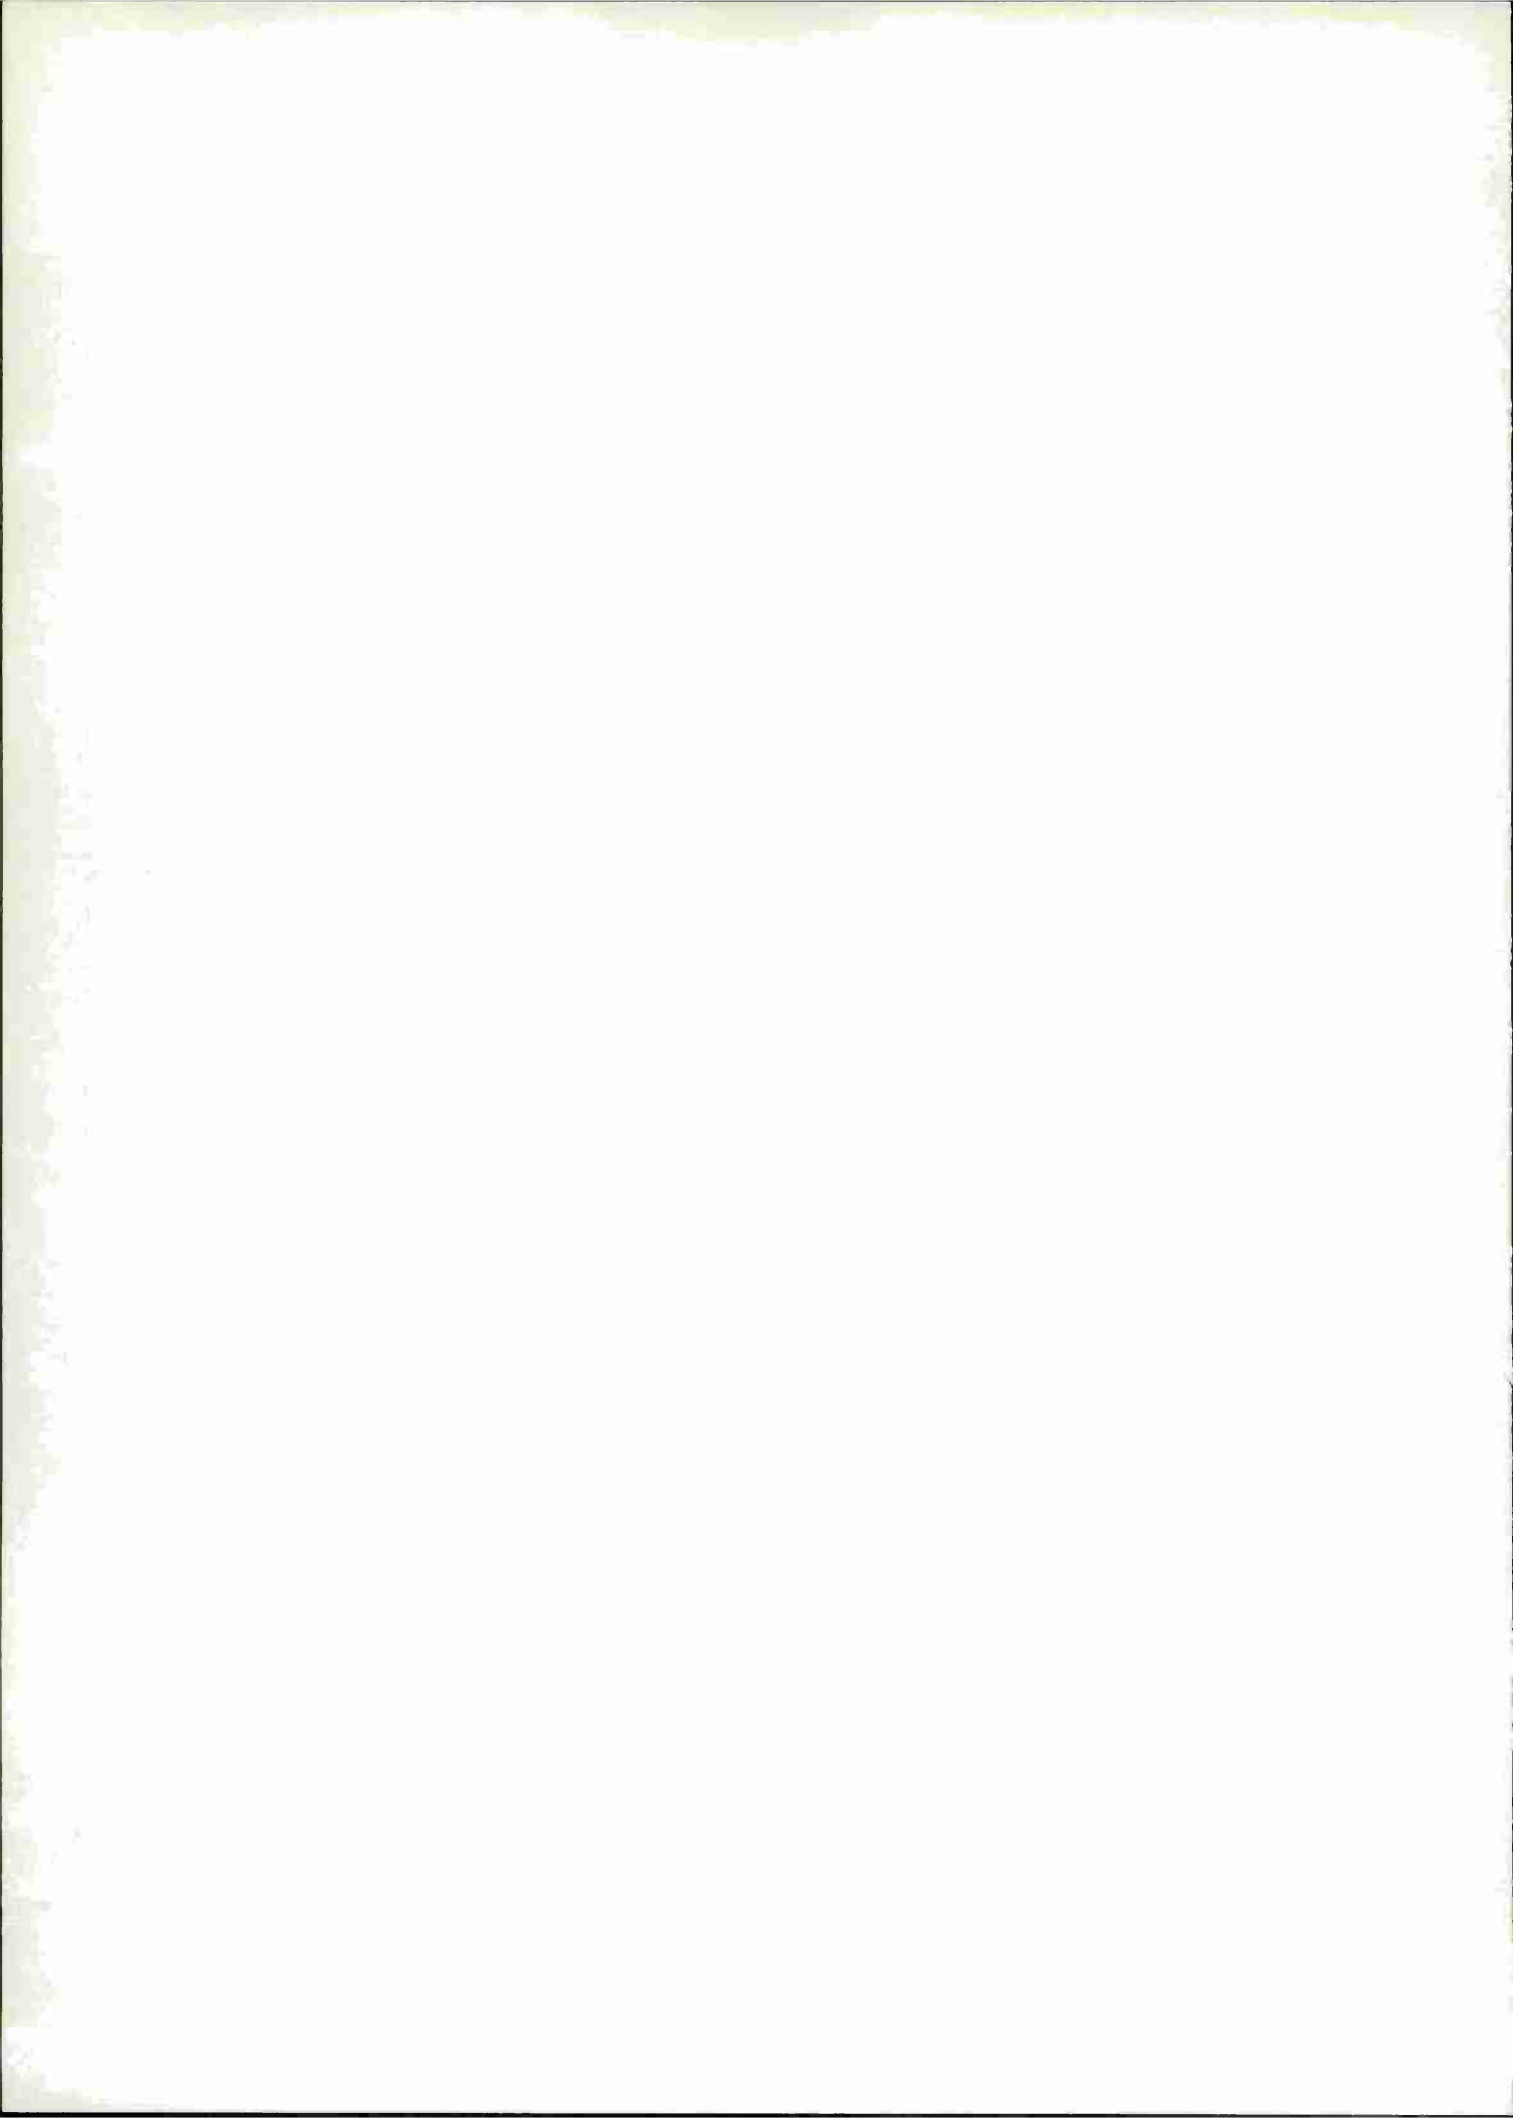

## TEST 3

Standard Piston Rings  
225 hours

## Summary of Operating Conditions

2800 RPM MODE	AVG	MIN	MAX
Torque, n-m (ft-lb)	125(92)	117(86)	136(100)
Power, OBS, kilowatts (BHp)	36.7(49.2)	34.1(45.7)	39.7(53.2)
Specific Fuel Cons., kg/kW-hr (lbs/BHp-hr)	.317(.521)	.294(.483)	.347(.571)
Blowby @ 49C (120F), m <sup>3</sup> /hr (cu.ft./hr)	1.29(45.6)	.73(25.9)	1.67(58.9)
Sump Temperature, C (F)	122(251)	114(238)	126(259)
Manifold Vacuum, kPa, abs. (in.hg.)	91.6 (2.8)	94.6(1.9)	89.2(3.5)
2000 RPM MODE	AVG	MIN	MAX
Torque, n-m (ft-lb)	127(94)	123(91)	130(96)
Power, OBS, kilowatts (BHp)	26.6(35.7)	25.9(34.7)	27.4(36.7)
Specific Fuel Cons., kg/kW-hr (lbs/BHp-hr)	.332(.546)	.284(.467)	.372(.612)
Blowby @ 49C (120F), m <sup>3</sup> /hr (cu.ft./hr)	.91(32.1)	.80(28.3)	1.18(41.7)
Sump Temperature, C (F)	104(220)	87(188)	114(238)
Manifold vacuum, kPa, abs. (in. hg.)	91.9(2.7)	96.0(1.5)	90.6(3.1)
600 RPM MODE	AVG	MIN	MAX
Torque, n-m (ft-lb)	0	0	0
Power, OBS, kilowatts (BHp)	0.0	0.0	0.0
Blowby @ 49C (120F), m <sup>3</sup> /hr (cu.ft./hr)	0.0	0.0	0.0
Sump Temperature, C (F)	59(138)	50(122)	72(162)
Manifold Vacuum, kPa, abs. (in.hg.)	51.4(14.7)	63.2(11.2)	35.2(19.5)


## TEST 3

Standard Piston Rings  
225 hours

## Used Oil Analysis

Test Hour	Viscosity, cS		Total Acid No.	Total Base No.	Insolubles w/coag.	
	38°C(100°F)	99°C(210°F)			Pentane	Benzene
New	121.6	12.61	2.97	5.08	--	--
15	108.66	11.80	2.66	4.96	0.061	0.024
30	107.49	11.63	3.30	4.96	0.036	0.029
45	108.48	N.D.	2.87	4.96	0.031	0.037
60	116.35	12.32	3.30	4.96	0.045	0.053
75	115.75	12.21	3.56	4.50	0.053	0.040
90	117.32	12.41	3.67	4.96	0.062	0.044
105	118.59	12.55	3.40	4.96	0.059	0.046
120	123.07	12.70	3.94	4.04	0.060	0.043
135	128.77	13.10	4.20	4.50	0.084	0.052
150	133.09	N.D.	4.52	N.D.	0.075	0.062
165	136.94	13.72	4.47	3.58	0.076	0.061
180	143.70	14.18	4.86	3.58	0.126	0.068
195	150.89	14.59	5.13	2.66	0.096	0.040
210	156.49	14.88	5.27	2.20	0.105	0.037
225	164.01	15.46	5.39	2.20	0.108	0.054


D-44

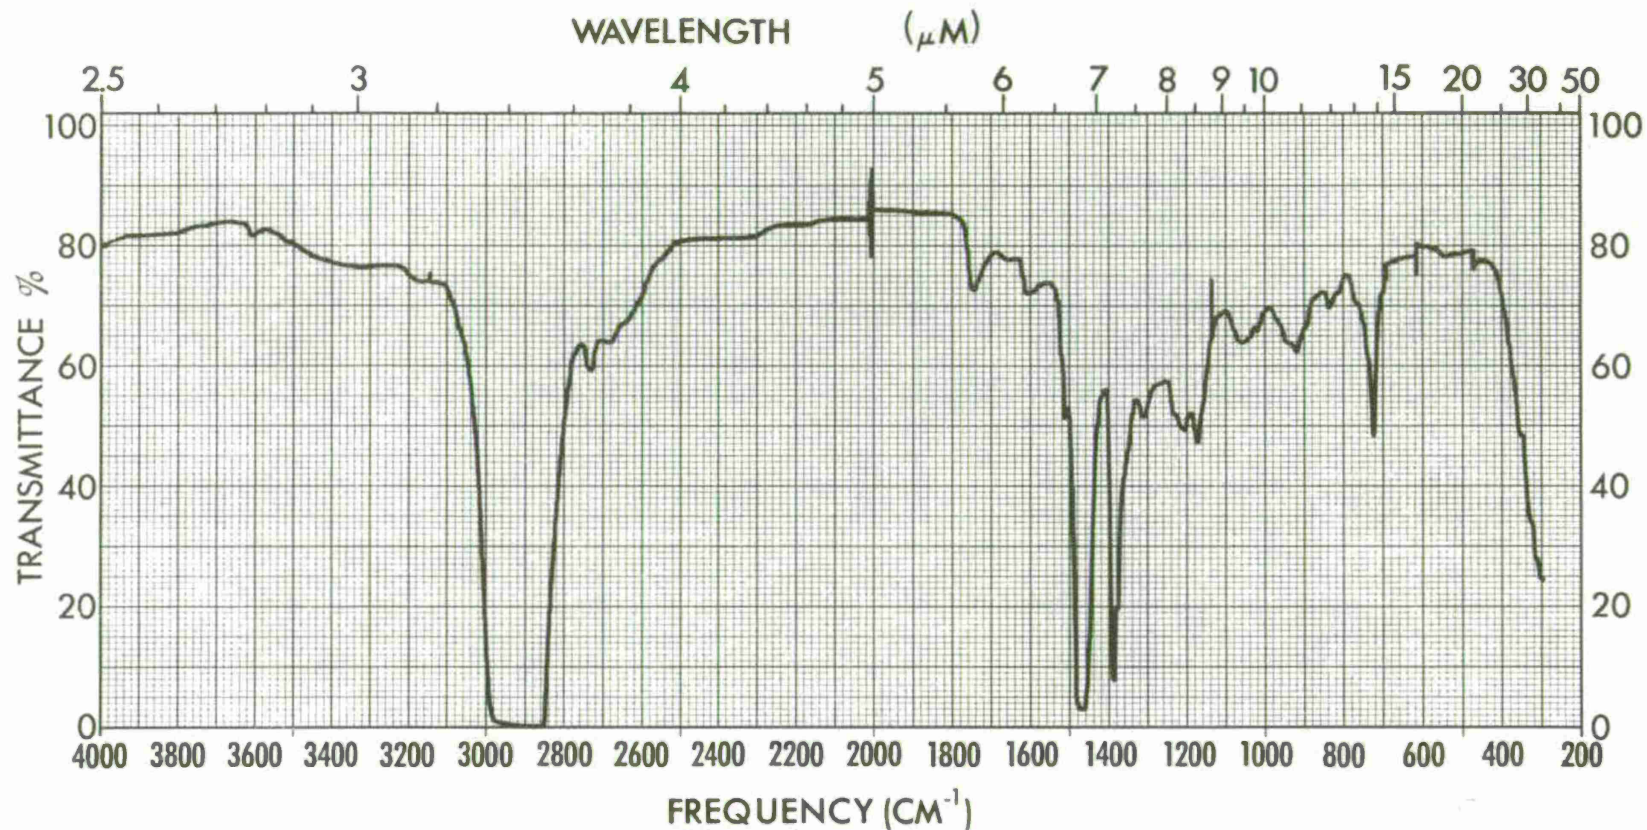

SPECTRUM NO. <u>569</u>	ORIGIN _____	LEGEND _____	REMARKS _____
SAMPLE <u>REO-203</u>		1. _____	
<u>NEW</u>	PURITY _____	2. _____	
	PHASE _____	DATE <u>12-16-74</u>	
	THICKNESS <u>.05</u>	OPERATOR <u>D.B.</u>	

SPECTRUM NO. \_\_\_\_\_  
SAMPLE \_\_\_\_\_


D-45

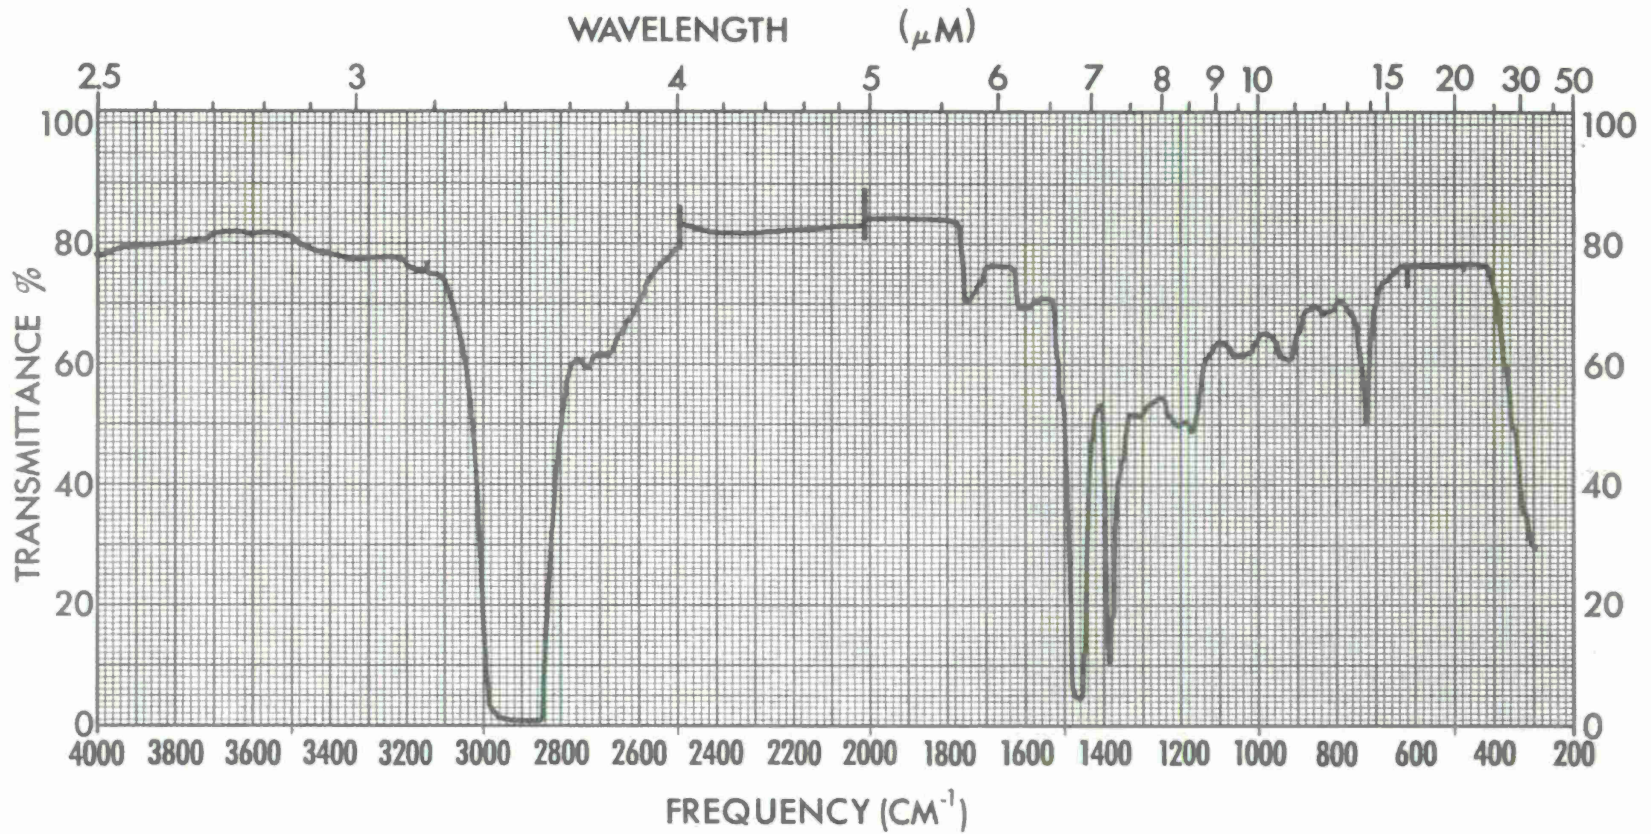

SPECTRUM NO. <u>607</u>	ORIGIN _____	LEGEND _____	REMARKS _____
SAMPLE <u>REO-203</u>		1. _____	
<u>15 HR Test 3</u>	PURITY _____	2. _____	
	PHASE _____	DATE <u>2-27-75</u>	
	THICKNESS <u>.05</u>	OPERATOR <u>D.B.</u>	

SPECTRUM NO. \_\_\_\_\_  
 SAMPLE \_\_\_\_\_


D-46

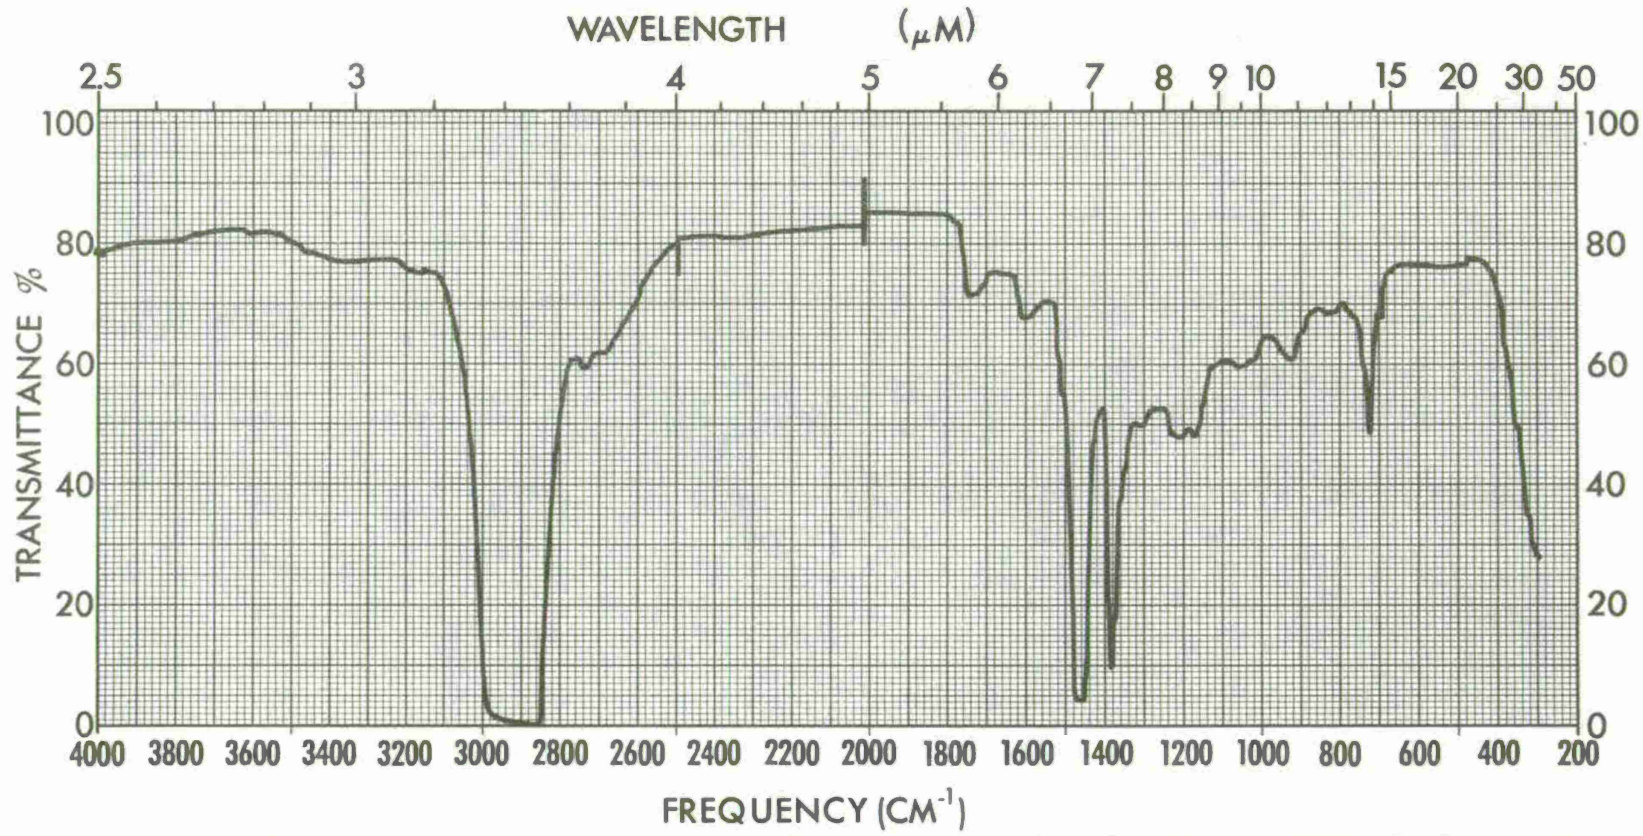

SPECTRUM NO. <u>608</u>	ORIGIN _____	LEGEND _____	REMARKS _____
SAMPLE <u>REO-203</u>		1. _____	
<u>45 HR Test 3</u>	PURITY _____	2. _____	
	PHASE _____	DATE <u>2-27-75</u>	
	THICKNESS <u>.05</u>	OPERATOR <u>D.B.</u>	

SPECTRUM NO. \_\_\_\_\_  
 SAMPLE \_\_\_\_\_


D-47

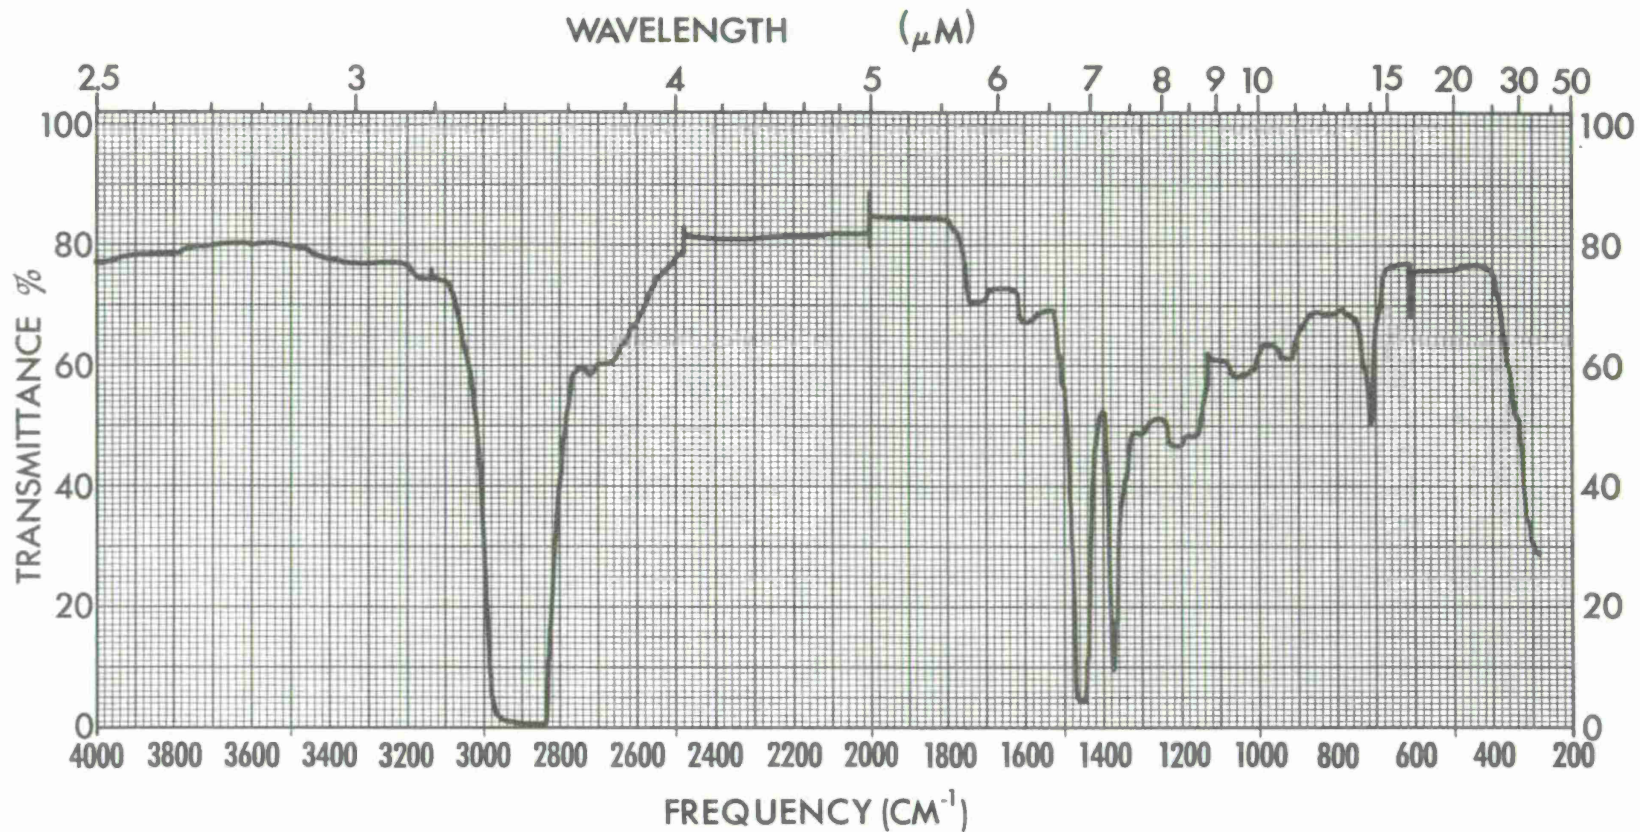

SPECTRUM NO. <u>609</u>	ORIGIN _____	LEGEND _____	REMARKS _____
SAMPLE <u>REO-203</u>		1. _____	
<u>75 HR Test 3</u>	PURITY _____	2. _____	
	PHASE _____	DATE <u>2-27-75</u>	
	THICKNESS <u>.05</u>	OPERATOR <u>D.B.</u>	

SPECTRUM NO. \_\_\_\_\_  
SAMPLE \_\_\_\_\_


D-48

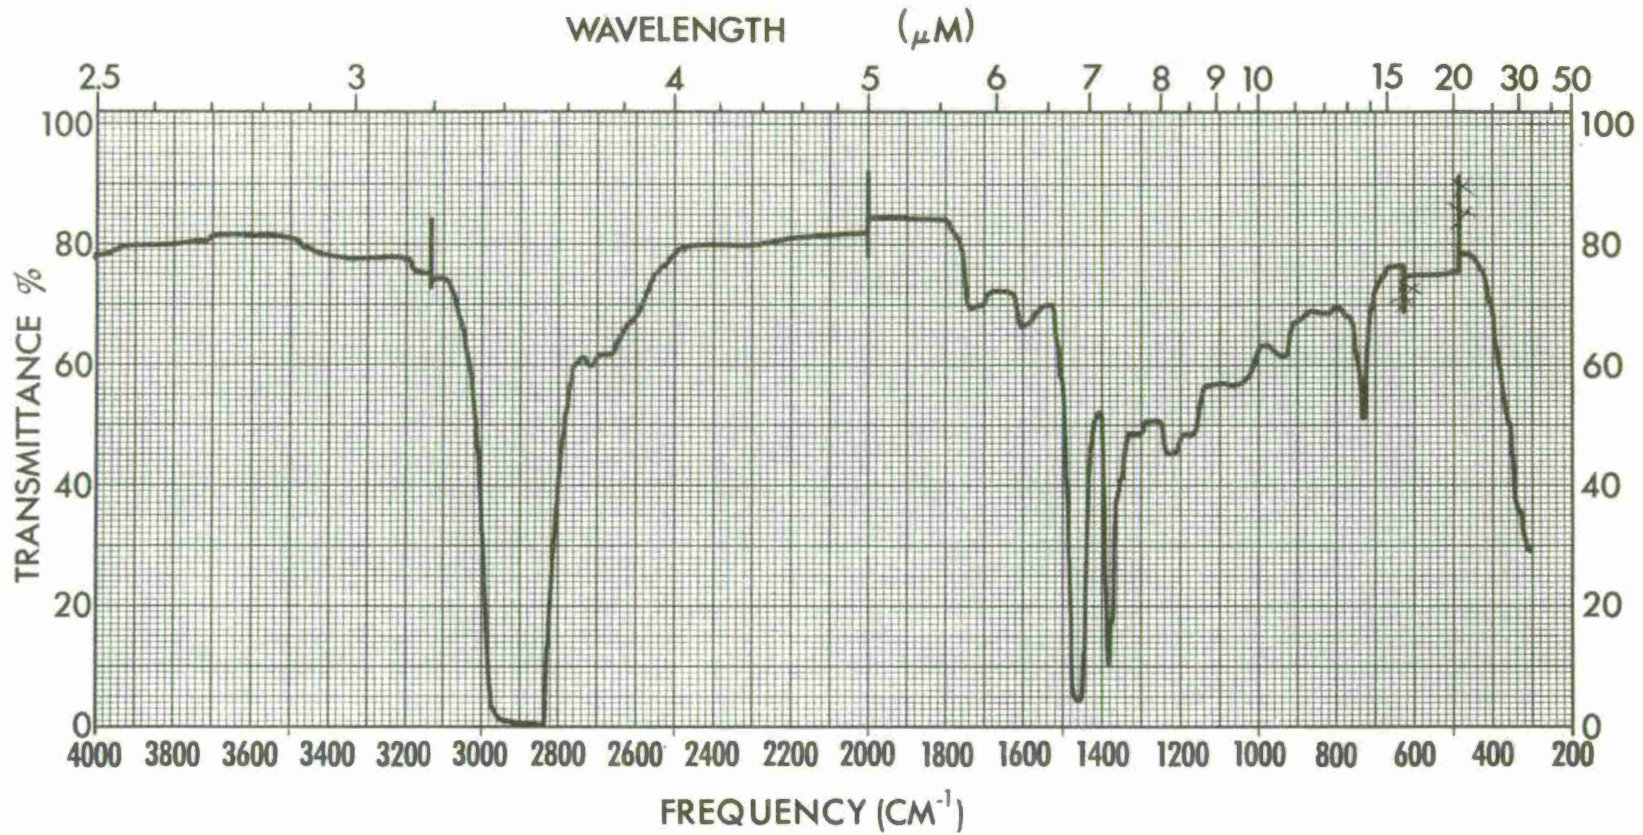

SPECTRUM NO. <u>.610</u>	ORIGIN _____	LEGEND _____	REMARKS _____
SAMPLE <u>REO-203</u>	_____	1. _____	_____
<u>105 HR Test 3</u>	PURITY _____	2. _____	_____
_____	PHASE _____	DATE <u>2-27-75</u>	_____
_____	THICKNESS <u>.05</u>	OPERATOR <u>D.B.</u>	_____

SPECTRUM NO. \_\_\_\_\_  
SAMPLE \_\_\_\_\_


D-49

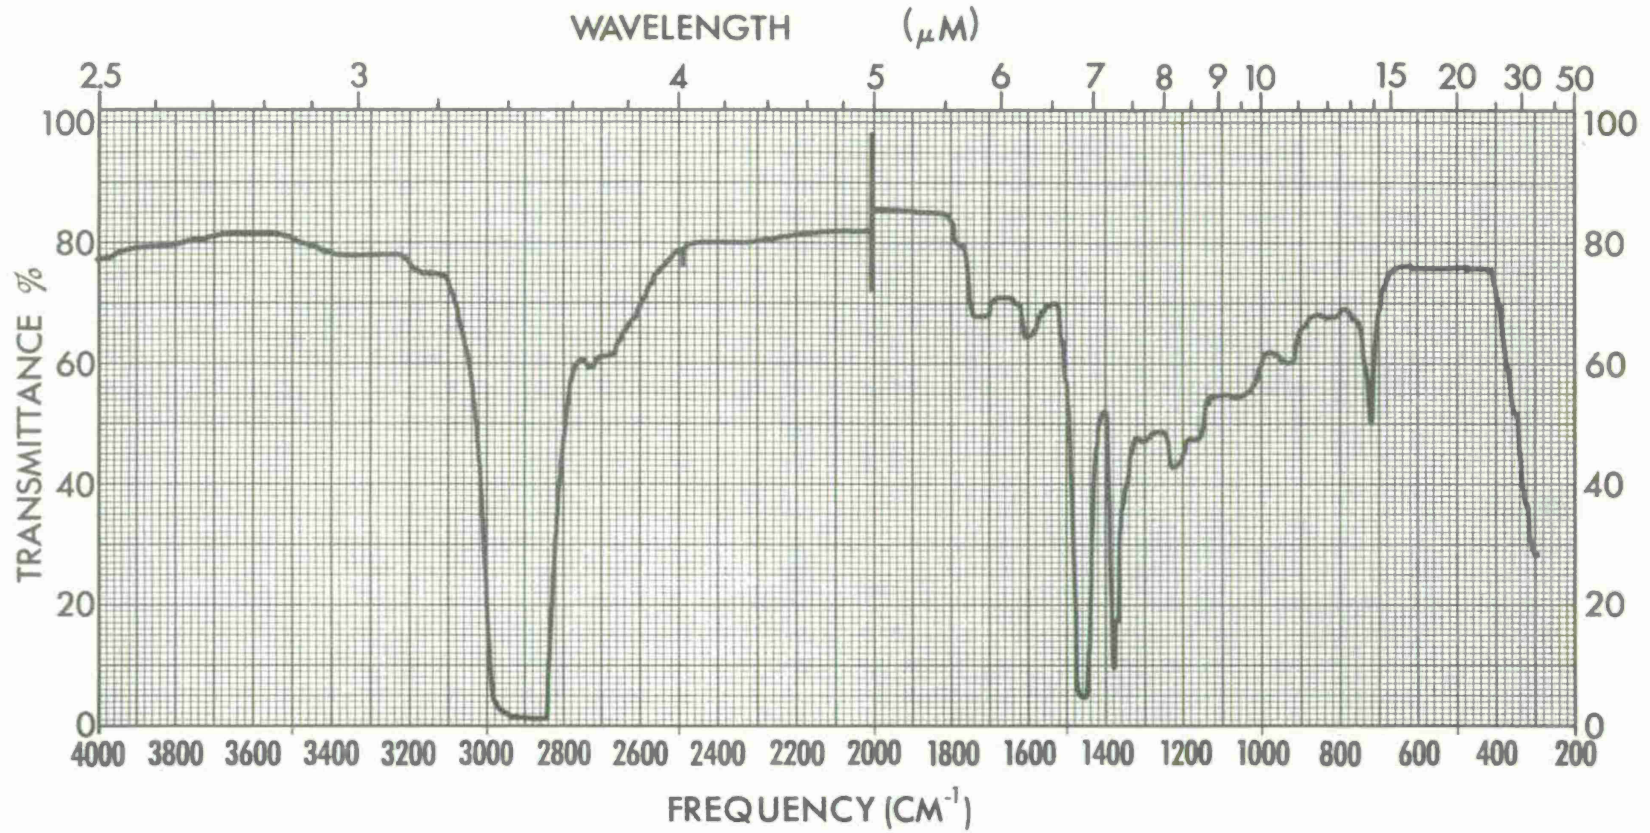

SPECTRUM NO. <u>611</u>	ORIGIN _____	LEGEND _____	REMARKS _____
SAMPLE <u>REO-203</u>		1. _____	
<u>135 HR Test 3</u>	PURITY _____	2. _____	
	PHASE _____	DATE <u>2-27-75</u>	
	THICKNESS <u>.05</u>	OPERATOR <u>D.B.</u>	

SPECTRUM NO. \_\_\_\_\_  
SAMPLE \_\_\_\_\_


D-50

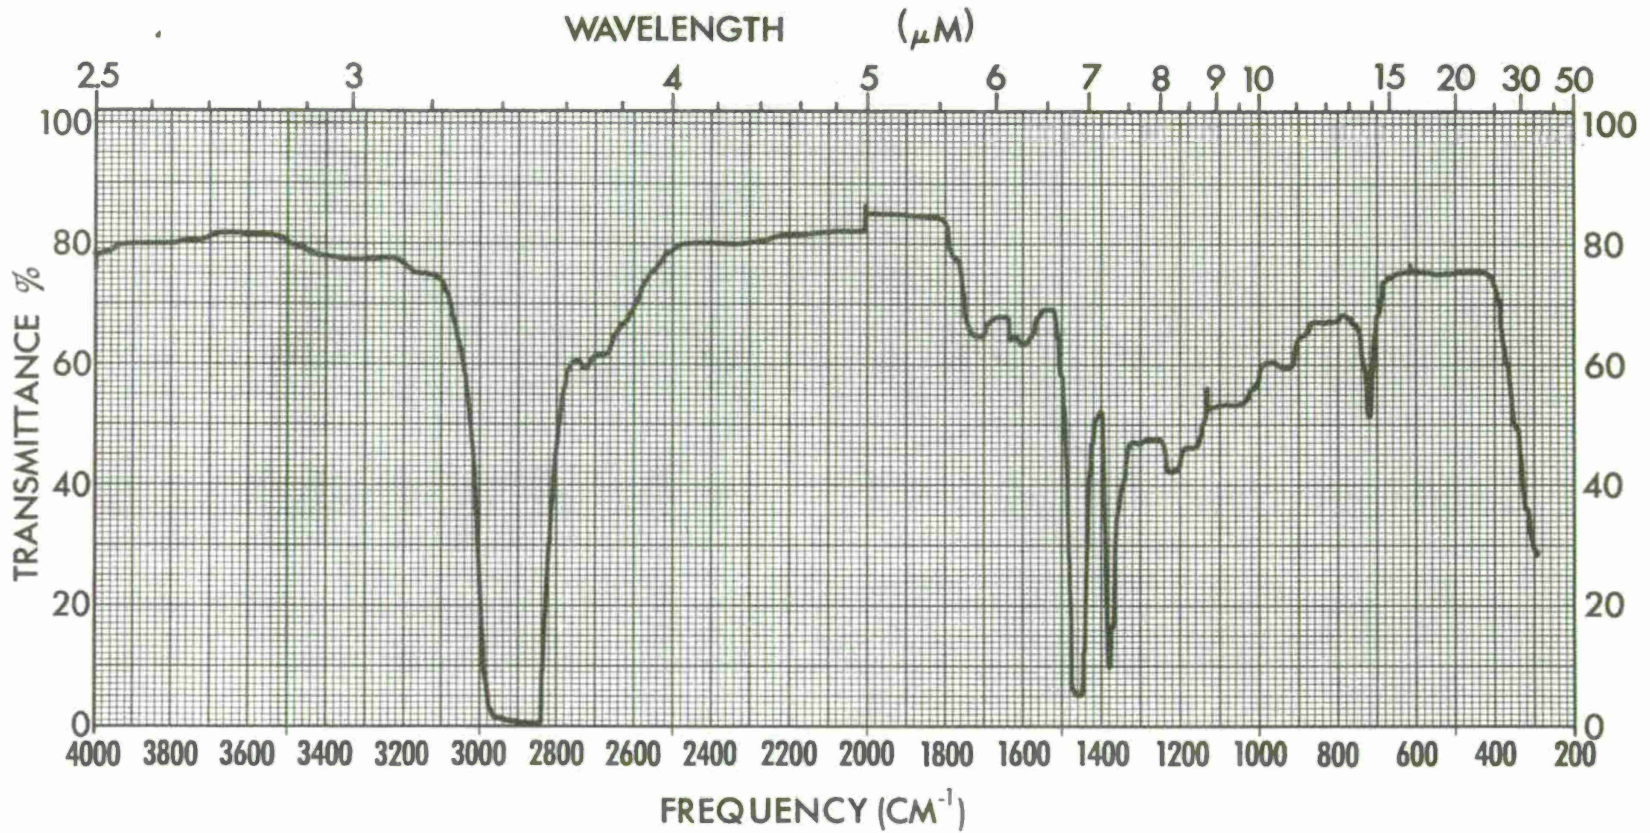

SPECTRUM NO. <u>612</u>	ORIGIN _____	LEGEND _____	REMARKS _____
SAMPLE <u>REO-203</u>		1. _____	
<u>165 HR Test 3</u>	PURITY _____	2. _____	
	PHASE _____	DATE <u>2-27-75</u>	
	THICKNESS <u>.05</u>	OPERATOR <u>D.B.</u>	


SPECTRUM NO. \_\_\_\_\_  
SAMPLE \_\_\_\_\_

D-51

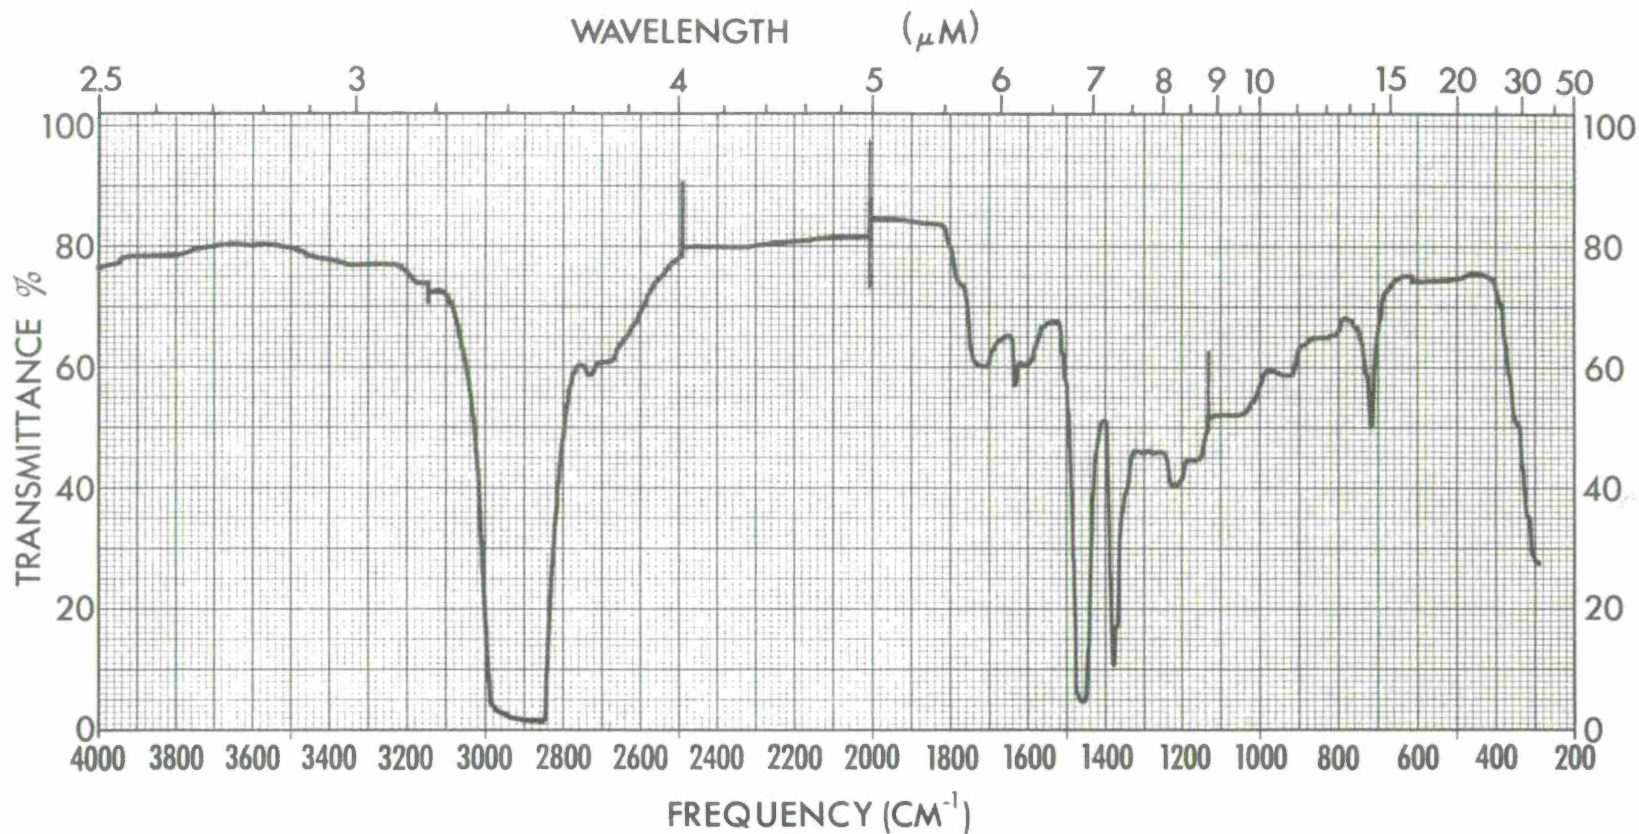

SPECTRUM NO. <u>613</u>	ORIGIN _____	LEGEND _____	SPECTRUM NO. _____ SAMPLE _____
SAMPLE <u>REO-203</u>	_____	1. _____	
<u>195 HR Test 3</u>	PURITY _____	2. _____	
_____	PHASE _____	DATE <u>2-27-75</u>	
_____	THICKNESS <u>.05</u>	OPERATOR <u>D.B.</u>	

D-52

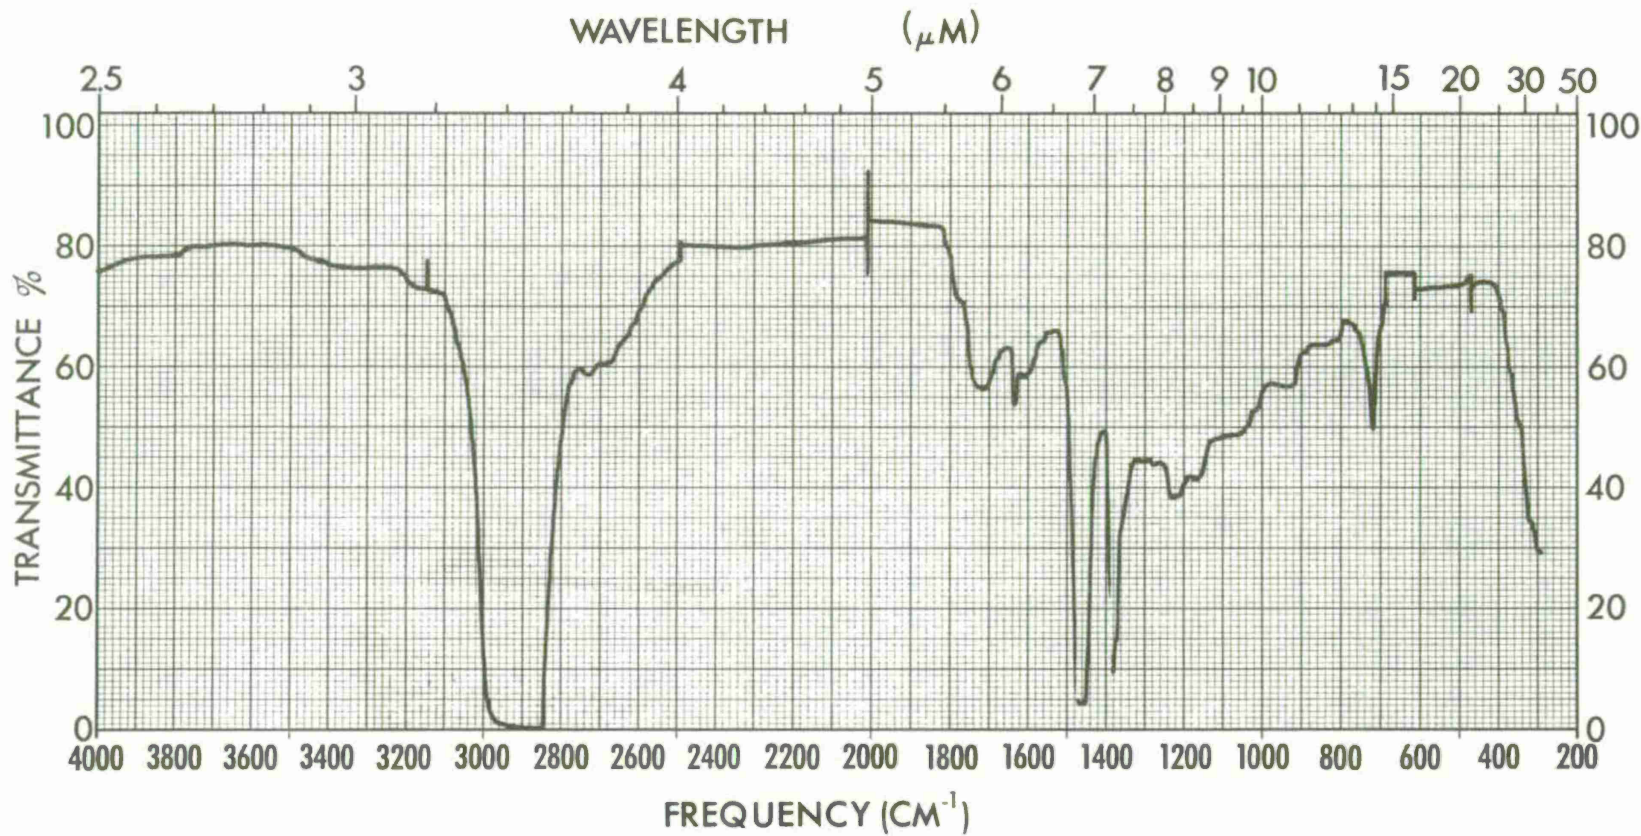

SPECTRUM NO. <u>614</u>	ORIGIN _____	LEGEND _____	REMARKS _____
SAMPLE <u>REO-203</u>	_____	1. _____	
<u>225 HR Test 3</u>	PURITY _____	2. _____	
_____	PHASE _____	DATE <u>2-29-75</u>	
_____	THICKNESS <u>.05</u>	OPERATOR <u>D.B.</u>	

SPECTRUM NO. \_\_\_\_\_  
SAMPLE \_\_\_\_\_

TEST 3

Standard Piston Rings  
225 hours

Oil Consumption

<u>Test Hours</u>	<u>Oil Consumed Kilograms (lbs)</u>	<u>Sample Removed Kilograms (lbs)</u>	<u>Oil Added Kilograms (lbs)</u>
7.5	.10 (.23)	0	.10 (.23)
15	.02 (.05)	.05 (.12)	.08 (.17)
22.5	0	0	0
30	.03 (.07)	.05 (.12)	.09 (.19)
37.5	.10 (.21)	0	.10 (.21)
45	0	.05 (.12)	.05 (.12)
52.5	.09 (.19)	0	.09 (.19)
60	0	.06 (.13)	.06 (.13)
67.5	.09 (.20)	0	.09 (.20)
75	.01 (.01)	.05 (.12)	.06 (.13)
82.5	.07 (.16)	0	.07 (.16)
90	.04 (.09)	.05 (.12)	.10 (.21)
97.5	0	0	0
105	0	.05 (.12)	.05 (.12)
112.5	0	0	0
120	.09 (.19)	.05 (.12)	.14 (.31)
127.5	.06 (.13)	0	.06 (.13)
135	0	.05 (.12)	.05 (.12)
142.5	.12 (.26)	0	.12 (.26)
150	.01 (.03)	.05 (.12)	.07 (.15)
157.5	0	0	0
165	0	.05 (.12)	.05 (.12)
172.5	0	0	0
180	.11 (.25)	.05 (.12)	.17 (.37)
187.5	.04 (.08)	0	.04 (.08)
195	.11 (.25)	.05 (.12)	.17 (.37)
202.5	0	0	0
210	0	.05 (.12)	.05 (.12)
217.5	0	0	0
225	.07 (.15)	0	0

initial fill - 3.90 kg (8.59 lb)  
 final drain - 2.74 kg (6.03 lb)  
 change in filter wt - 0.28 kg (0.62 lb)  
 total oil consumed - 2.04 kg (4.49 lb)

TEST 3

Standard Piston Rings  
225 hours

Piston Ring Gap Measurements

Piston Ring		End Gap, centimeters (inches)			
		Piston No.			
		1	2	3	4
top ring	before	.059(.023)	.061(.024)	.061(.024)	.064(.025)
	after	.056(.022)	.053(.021)	.056(.022)	.053(.021)
	change	-.003(-.001)	-.008(-.003)	-.050(-.002)	-.010(-.004)
second ring	before	.058(.023)	.074(.029)	.058(.023)	.066(.026)
	after	.061(.024)	.064(.025)	.058(.023)	.061(.024)
	change	.003(.001)	-.010(-.004)	0	-.005(-.002)

Piston Ring		Side Clearance, centimeters (inch x 10 <sup>-3</sup> )			
		Piston No.			
		1	2	3	4
top ring	before	.008(3)	.010(4)	.008(3)	.008(3)
	after	.005(2)	.005(2)	.005(2)	.005(2)
	change	-.003(-1)	-.005(-2)	-.003(-1)	-.003(-1)
second ring	before	.008(3)	.010(4)	.005(2)	.010(4)
	after	.005(2)	.005(2)	.005(2)	.005(2)
	change	-.003(-1)	-.005(-2)	0	-.005(-2)

Piston and Cylinder Bore Measurements

		Piston No.			
		1	2	3	4
Cylinder Bore, cm (in.)					
<i>1.11 cm from Top</i>					
Transverse	before	9.8473 (3.8769)	9.8491 (3.8776)	9.8463 (3.8765)	9.8463 (3.8765)
	after	9.8461 (3.8764)	9.8483 (3.8773)	9.8455 (3.8762)	9.8453 (3.8761)
	change	-0.0013 (-0.0005)	-0.0008 (-0.0003)	-0.0008 (-0.0003)	-0.0010 (-0.0004)
Longitudinal	before	9.8461 (3.8764)	9.8481 (3.8772)	9.8458 (3.8763)	9.8468 (3.8767)
	after	9.8455 (3.8762)	9.8481 (3.8772)	9.8450 (3.8760)	9.8455 (3.8762)
	change	-0.0005 (-0.0002)	0	-0.0008 (-0.0003)	-0.0013 (-0.0005)
<i>5.87 cm from Top</i>					
Transverse	before	9.8473 (3.8769)	9.8481 (3.8772)	9.8461 (3.8764)	9.8461 (3.8764)
	after	9.8463 (3.8765)	9.8473 (3.8769)	9.8453 (3.8761)	9.8453 (3.8761)
	change	-0.0010 (-0.0004)	-0.0008 (-0.0003)	-0.0008 (-0.0003)	-0.0008 (-0.0003)
Longitudinal	before	9.8455 (3.8762)	9.8481 (3.8772)	9.8455 (3.8762)	9.8461 (3.8764)
	after	9.8445 (3.8758)	9.8471 (3.8768)	9.8448 (3.8759)	9.8453 (3.8761)
	change	-0.0010 (-0.0004)	-0.0010 (-0.0004)	-0.0008 (-0.0003)	-0.0008 (-0.0003)
Piston Diameter, cm (in.)					
Bottom of oil ring	before	9.8379 (3.8732)	9.8379 (3.8732)	9.8400 (3.8740)	9.8377 (3.8731)
	after	9.8369 (3.8728)	9.8389 (3.8736)	9.8394 (3.8738)	9.8384 (3.8734)
	change	-0.0010 (-0.0004)	0.0010 (0.0004)	-0.0005 (-0.0002)	0.0008 (0.0003)
Skirt	before	9.8384 (3.8734)	9.8405 (3.8742)	9.8379 (3.8732)	9.8372 (3.8729)
	after	9.8384 (3.8734)	9.8415 (3.8746)	9.8394 (3.8738)	9.8369 (3.8728)
	change	0	0.0010 (0.0004)	0.0015 (0.0006)	-0.0003 (-0.0001)

**STANDARD COMPUTATION SHEET FOR PISTON RATING**

TEST PROCEDURE \_\_\_\_\_  
 TEST HOURS 225  
 TEST LABORATORY \_\_\_\_\_  
 LUBRICANT REO-203

RATER ERL DATE 2-26-75  
 LABORATORY TEST NUMBER 3  
 STAND NO. 2 ENGINE NO. 5029083  
 FUEL AL-5473-G

PISTON NO. 1

NO. 1 GROOVE, VOLUME-%	
PISTON WTD* RATING	15

Average = 20.5

DEPOSIT TYPE	DEPOSIT FACTOR	GROOVES								LANDS								UNDER-CROWN	
		NO. 1		NO. 2		NO. 3		NO. 4		NO. 1		NO. 2		NO. 3		NO. 4			
		AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT
CARBON	HC	1.00																	
	MHC	0.75																	
	MC	0.50																	
	LC	0.25																	
	VLC	0.15																	
	CARBON RATING																		
VARNISH	BV	0.100									25	2.5							
	DBrV	0.075																	
	AV	0.050	85	4.25	100	5.0			40	2.0	25	1.25							
	LAV	0.025																	
	VLAV	0.010																	
	RV	0.001																	
	VARNISH RATING																		
CLEAN	0					100	0			60	0	50	0	100	0			100	0
ZONAL RATING		4.25		5.0		0		0		2.0		3.75							
LOCATION FACTOR																			
WEIGHTED RATING																			

\*WEIGHTED TOTAL DEPOSITS

**STANDARD COMPUTATION SHEET FOR PISTON RATING**

TEST PROCEDURE \_\_\_\_\_  
 TEST HOURS 225  
 TEST LABORATORY \_\_\_\_\_  
 LUBRICANT REO-203

RATER ERL DATE 2-26-75  
 LABORATORY TEST NUMBER 3  
 STAND NO. 2 ENGINE NO. 5029083  
 FUEL AT-5473-G

PISTON NO. 2

NO. 1 GROOVE, VOLUME-%	
PISTON WTD* RATING	24.5

DEPOSIT TYPE	DEPOSIT FACTOR	GROOVES								LANDS								UNDER-CROWN	
		NO. 1		NO. 2		NO. 3		NO. 4		NO. 1		NO. 2		NO. 3		NO. 4		AREA-%	DEMERIT
		AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT
CARBON	HC	1.00	5	5															
	MHC	0.75																	
	MC	0.50	5	2.5															
	LC	0.25																	
	VLC	0.15																	
	CARBON RATING																		
VARNISH	BV	0.100								30	3.0	30	3.0						
	DBrV	0.075																	
	AV	0.050	90	4.5	100	5.0				10	0.5	20	1.0						
	LAV	0.025																	
	VLAV	0.010																	
	RV	0.001																	
	VARNISH RATING																		
CLEAN	0	0		0		100	0			60	0	50	0	100	0				
ZONAL RATING			12.0		5.0		0		0		3.5		4.0		0				
LOCATION FACTOR																			
WEIGHTED RATING																			

\*WEIGHTED TOTAL DEPOSITS

**STANDARD COMPUTATION SHEET FOR PISTON RATING**

TEST PROCEDURE \_\_\_\_\_  
 TEST HOURS 225  
 TEST LABORATORY \_\_\_\_\_  
 LUBRICANT REO-203

RATER ERL DATE 2-26-75  
 LABORATORY TEST NUMBER 3  
 STAND NO. 2 ENGINE NO. 5029083  
 FUEL AL-5473-9

PISTON NO. 3

NO. 1 GROOVE, VOLUME-%	
PISTON WTD* RATING	22.5

DEPOSIT TYPE	DEPOSIT FACTOR	GROOVES								LANDS								UNDER-CROWN	
		NO. 1		NO. 2		NO. 3		NO. 4		NO. 1		NO. 2		NO. 3		NO. 4		AREA-%	DEMERIT
		AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT		
CARBON	HC	1.00	10	10															
	MHC	0.75																	
	MC	0.50																	
	LC	0.25																	
	VLC	0.15																	
	CARBON RATING																		
VARNISH	BV	0.100								15	1.5	15	1.5						
	DBrV	0.075								10	.75	10	.75						
	AV	0.050	60	3.0	100	5.0													
	LAV	0.025																	
	VLAV	0.010																	
	RV	0.001																	
	VARNISH RATING																		
CLEAN	0	30	0	0		100				75	0	75	0	100					
ZONAL RATING		13.0		5.0		0				2.25		2.25							
LOCATION FACTOR																			
WEIGHTED RATING																			

\*WEIGHTED TOTAL DEPOSITS

**STANDARD COMPUTATION SHEET FOR PISTON RATING**

TEST PROCEDURE \_\_\_\_\_  
 TEST HOURS 225  
 TEST LABORATORY \_\_\_\_\_  
 LUBRICANT REO-203

RATER ERL DATE 2-26-75  
 LABORATORY TEST NUMBER 3  
 STAND NO. 2 ENGINE NO. 5029083  
 FUEL AL-5473-G

PISTON NO. 4

NO. 1 GROOVE, VOLUME-%	
PISTON WTD* RATING	20.0

DEPOSIT TYPE	DEPOSIT FACTOR	GROOVES								LANDS								UNDER-CROWN	
		NO. 1		NO. 2		NO. 3		NO. 4		NO. 1		NO. 2		NO. 3		NO. 4		AREA-%	DEMERIT
		AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT		
CARBON	HC	1.00	10	10															
	MHC	0.75																	
	MC	0.50																	
	LC	0.25																	
	VLC	0.15																	
	CARBON RATING																		
VARNISH	BV	0.100								20	2.0								
	DBrV	0.075								10	.75								
	AV	0.050	30	1.5	100	5.0				15	.75								
	LAV	0.025																	
	VLAV	0.010																	
	RV	0.001																	
	VARNISH RATING																		
CLEAN	0	60	0	0		100	0												
ZONAL RATING		11.5		5.0				3.5											
LOCATION FACTOR																			
WEIGHTED RATING																			

\*WEIGHTED TOTAL DEPOSITS

### RING STICKING

Engine Model L-141 Serial No. 5029083 Date 2-26-75  
Fuel AL-5473-6 Lubricant REO-203 Observer EL

225 hour - standard eng.

Piston Number

Ring No.	1	2	3	4		
1	F	F	F	F		
2	F	F	F	F		
3	F	F	F	F		
4						

Indicate by letter—Free or Sluggish, or by number and letter—percent Pinched (cold stuck) or percent Hot stuck.

D-59

## RING DEPOSITS

Engine Model L-141 Serial No. 5029083 Date 2-56-75  
 Fuel AL-5473-G Lubricant REO-203 Observer EL

Cylinder Number		1		2		3		4						
		CARB	VARN	CARB	VARN	CARB	VARN	CARB	VARN					
Piston Ring	Top	1	0	0	0	20	0	0	0	10				
		2	0	0	0	0	0	40	0	10				
		3												
		4												
	ID	1	15	85	0	100	0	100	0	100				
		2	0	100	0	100	0	100	0	100				
		3												
		4												
	Bottom	1	0	30	0	40	0	10	0	20				
		2	0	60	0	80	0	90	0	85				
		3												
		4												

Areas previously rated for carbon, rate 0 for varnish

## RING FACE CONDITION

Engine Model L-141 Serial No. 5029083 Date 2-26-75  
 Fuel AL-5473-G Lubricant REO-203 Observer EL

	Cylinder Number					
	1	2	3	4		
First Ring	N	N	N	N		
Second Ring	N	N	N	N		
Third Ring						
Fourth Ring						
Oil Ring Slots-% Open	100	100	100	100		

N - Normal

## PISTON SURFACE DEPOSITS

Engine Model L-141 Serial No. 5029083 Date 2-26-75  
 Fuel AL-5473-G Lubricant REO-230 Observer EL

		Piston Number					
		1	2	3	4		
Top*		100% 1/2AH	100% 1/2AH	100% 1/2AH	100% 1/2 AH		
Combustion Chamber*		20%AH	10AH	10AH	15AH		
Under Head*		0	0	0	0		
Skirts*	Thrust	0	0	0	0		
	Anti-Thrust	0	0	0	0		
Relief Areas*		0	0	0	0		
Lands  demerit	1	25-4 15-5	30-9 10-5	15-9 10-6	20-9 10-7, 15-5		
	2	<del>25-8</del> <del>15-5</del> 10-4	30-9 20-5	15-9 10-6	15-9 10-6, 15-5		
	3	0	0	0	0		
	4						

\*Carbon and Ash: Use Volume Factor  
 Indicate H, M, or S

## PISTON RING GROOVE DEPOSITS

Engine Model L-141 Serial No. 5029083 Date 2-26-75  
 Fuel AL-5473-G Lubricant REO-203 Observer EL

		Cylinder Number											
		1		2		3		4					
		CARB	VARN	CARB	VARN	CARB	VARN	CARB	VARN				
Top of Groove*	1	0	50	0	20	0	10	0	25				
	2	0	0	0	0	0	20	0	15				
	3	0	0	0	0	0	5	0	0				
	4												
Back of Groove†	1	15	85	10	90	10	60	10	30				
	2	0	100	0	100	0	100	0	100				
	3	0	0	0	0	0	0	0	0				
	4												
Bottom of Groove*	1	0	0	0	0	0	10	0	0				
	2	0	0	0	0	0	0	0	0				
	3	0	0	0	0	0	0	0	0				
	4												
Drain Holes—% Blocked													


\*Carbon and Ash: Use Volume Factor  
 Indicate H, M, or S

†Carbon and Ash: Indicate Percent Filled and H, M, or S

## PISTON GROOVE INSIDE DIAMETER—% RING SUPPORTING CARBON

Engine Model L-141 Serial No. 5029083 Date 2-26-75  
 Fuel AL-5473-G Lubricant RO-203 Observer EL

Piston Ring	Quadrant	Piston Number					
		1	2	3	4		
1	1	0	5	0	0		
	2	0	0	0	0		
	3	0	0	5	10		
	4	0	0	5	0		
2	1	0	0	0	0		
	2	0	0	0	0		
	3	0	0	0	0		
	4	0	0	0	0		

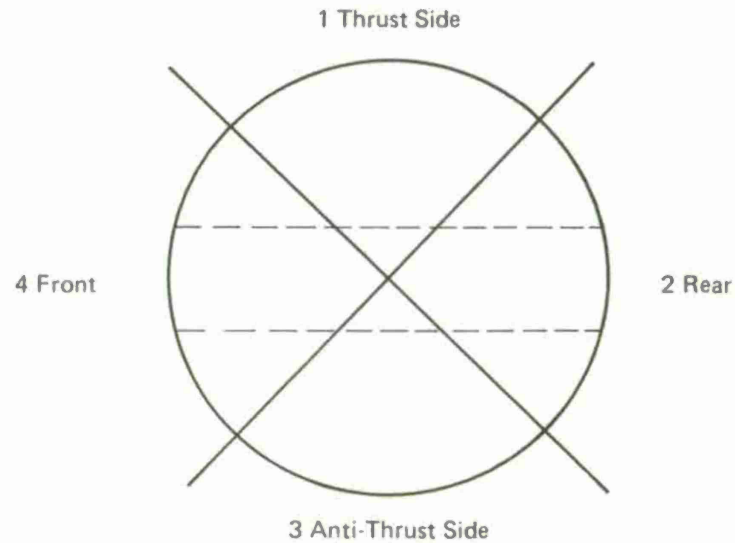


### PISTON SURFACE CONDITION

Engine Model L-141 Serial No. 5029083 Date 2-26-75  
 Fuel AL-5473-G Lubricant REO-203 Observer EL

	Piston Number					
	1	2	3	4		
Top Land	N	N	N	N		
Skirt	N	N	N	N		
Piston Pin	N	N	N	N		

**N-Normal**

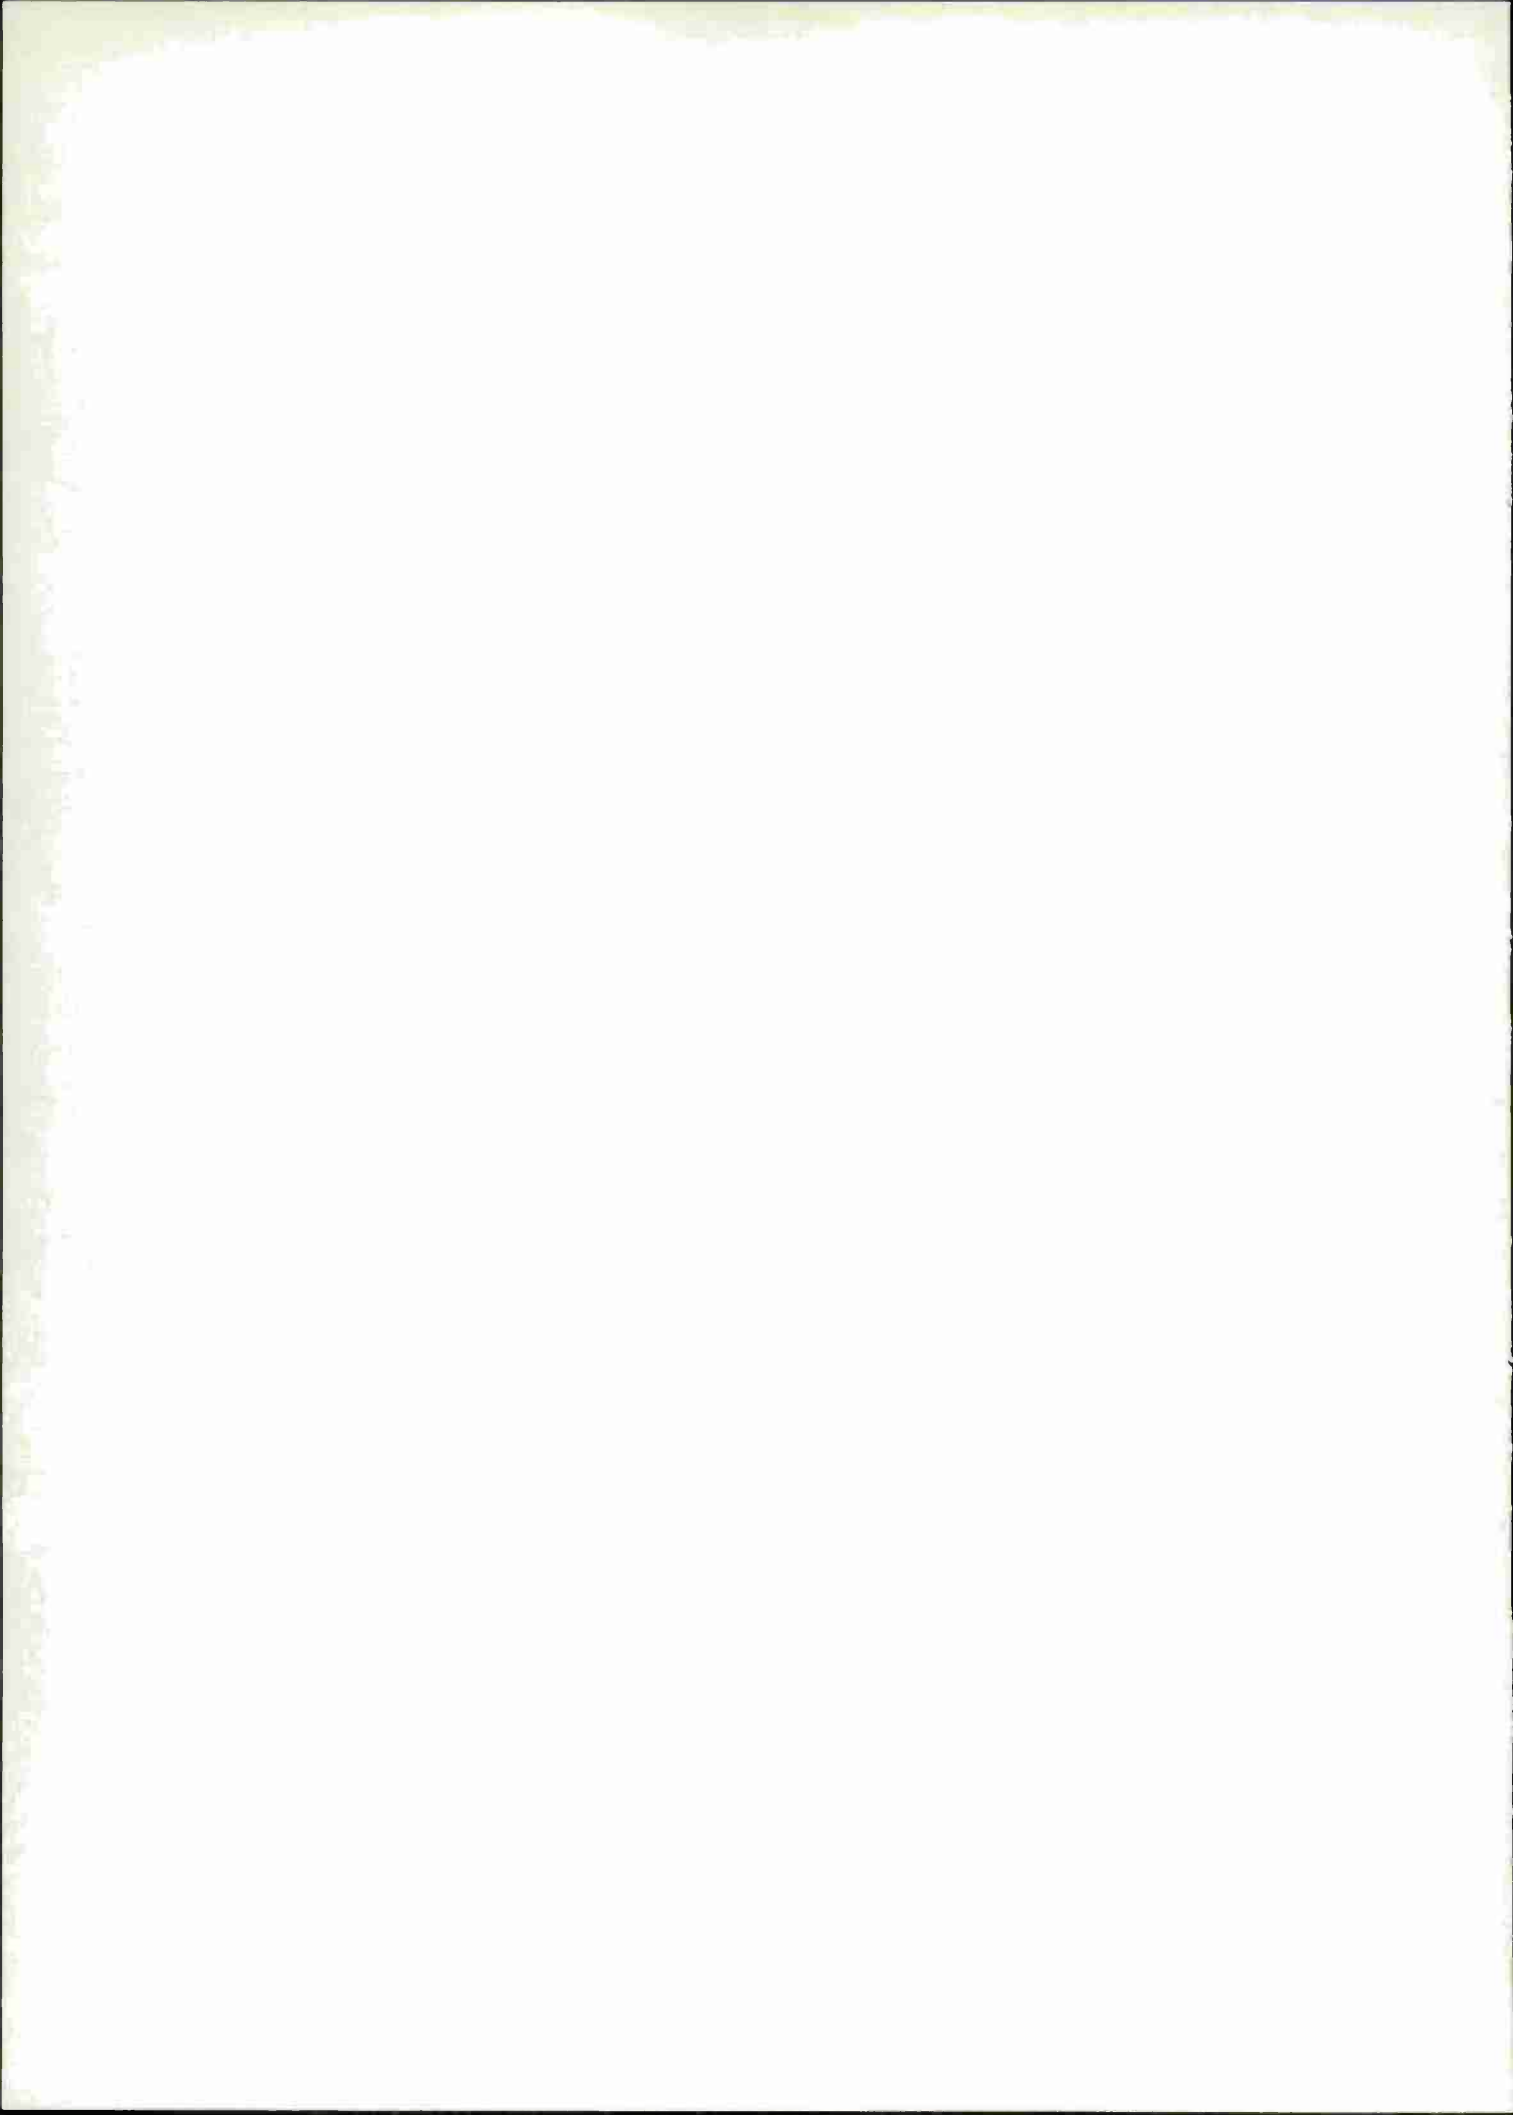

**APPENDIX E**  
**ROAD TEST COURSE**

The first part of the document discusses the importance of maintaining accurate records of all transactions. It emphasizes that every entry, no matter how small, should be recorded to ensure the integrity of the financial data. This includes not only sales and purchases but also expenses and income. The document provides a detailed list of items that should be tracked, such as inventory levels, accounts payable, and accounts receivable. It also outlines the procedures for recording these transactions, including the use of double-entry bookkeeping to ensure that the books balance.

The second part of the document focuses on the analysis of the financial data. It explains how to calculate key financial ratios and metrics, such as the gross profit margin, operating profit margin, and return on equity. These metrics are used to assess the company's financial performance and to identify areas for improvement. The document also discusses the importance of comparing the company's performance to industry benchmarks and to its own historical performance. This comparison helps to identify trends and to make informed decisions about the company's future.

The final part of the document discusses the preparation of financial statements. It explains how to prepare the income statement, balance sheet, and cash flow statement, and how to ensure that these statements are accurate and complete. It also discusses the importance of auditing the financial statements to ensure their reliability. The document concludes by emphasizing the importance of transparency and accountability in financial reporting, and how these principles are essential for the long-term success of the company.

## Appendix E Road Test Course

The road evaluation of the two M-151 vehicles was conducted on and around the grounds of Southwest Research Institute in San Antonio, Texas from 1 April through 27 April 1975. A map of the 45.5-km (28.3-mile) course is given as Figure E-1, and a plot of the minimum and maximum temperatures, the daily rainfall and the actual days of vehicle operation for the test are given in Figure E-2. The test course contained a variety of operating conditions ranging from interstate highway to unimproved dirt road. The highway portion of the route consisted of 8.2 km (5.1 miles) of four-lane highway with a maximum speed limit of 88 km/hr (55 mile/hr). Forty-eight percent of the course, or 21.8 km (13.6 miles) consisted of urban or post-type operation with an average of eight complete stops and two traffic lights per circuit. The speed limits for this phase varied from 32 km/hr (20 mile/hr) to as high as 64 km/hr (40 mile/hr), but the average speed limit was approximately 48 km/hr (30 mile/hr).

The unimproved portion of the course was 15.5 km (9.6 miles) of hardpacked dirt. However, during two periods of heavy rains, this section became impassable and was omitted. These periods are denoted by the dotted portions of the actual operating days section of Figure E-2.

The two vehicles were driven 14 hr/day, five days per week according to the schedule given in Table E-1, and they accumulated mileage at the rate of approximately 640 km (400 miles) per day. The vehicles were inspected and refueled daily, and the vehicles switched the lead each day. Table E-2 is the service schedule for the two vehicles.


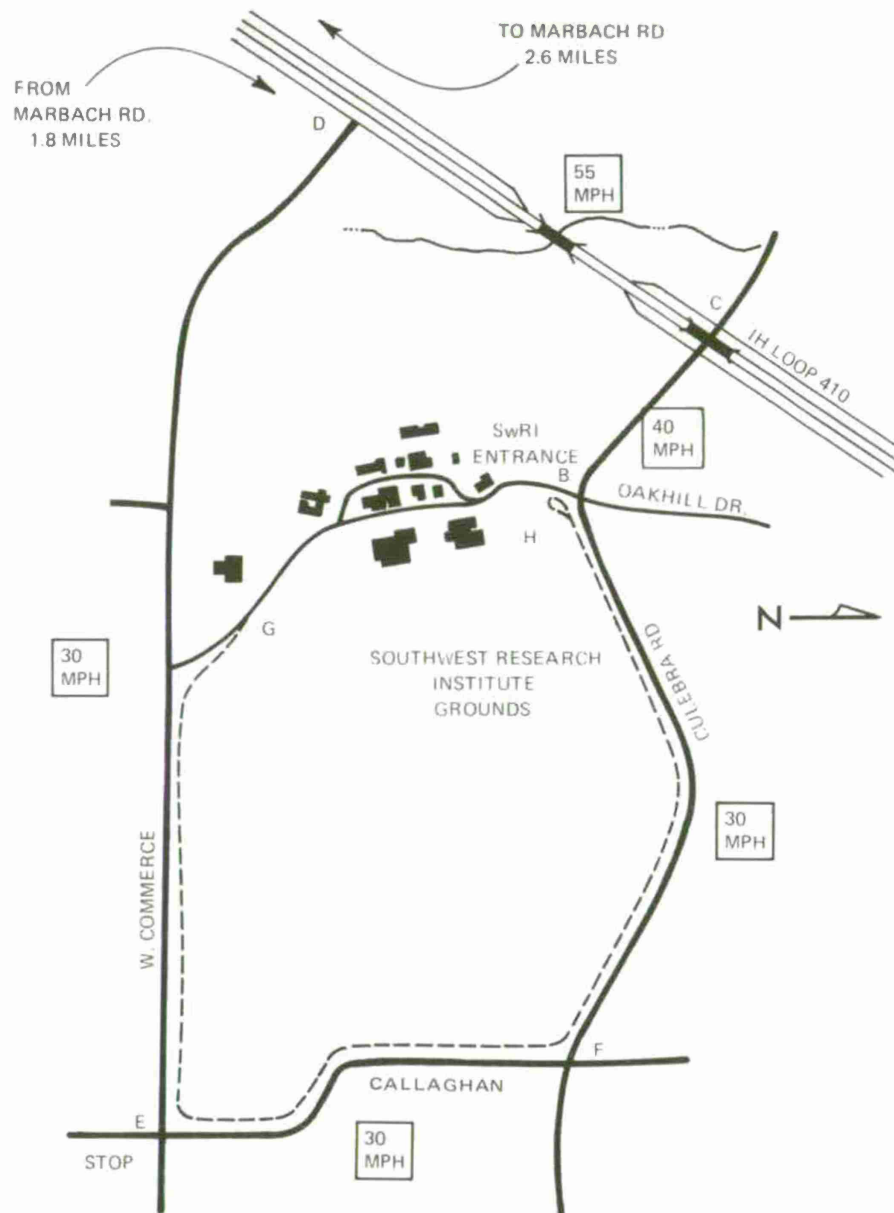


FIGURE E-1. M-151 ROAD TEST COURSE

TABLE E-1. TEST DRIVER INSTRUCTIONS

Step	Present Position	Instruction	Speed Limit, mph
1	A	Drive to main gate (B)	25
2	B	Left on Culebra Rd. to IH-410 (C)	40
3	C	Left onto IH-410 to Marbach Rd. - exit	55
4	-	Left on Marbach Rd., then left to IH-410	
5	-	IH-410 to W. Commerce (D) - exit	55
6	D	Right on W. Commerce to Callaghan Rd. (E)	30
7	E	Left on Callaghan Rd. to Culebra (F)	30
8	F	Left on Culebra to main gate (B)	30
9	B	Left into Institute to dirt road (G)	25
10	G	Follow dirt road to turnaround (H)	20
11	H	Return along dirt road to roadway (G)	20
12	G	Drive to main gate (B)	25
13	B	Right on Culebra to Callaghan Rd. (F)	30
14	F	Right on Callaghan to W. Commerce (E)	30
15	E	Right on W. Commerce to IH-410 (D)	30
16	D	Right on IH-410 to Culebra (C) - exit	55
17	C	Right on Culebra to main gate (B)	40
18	B	Right into Institute to dirt road (G)	25
19	G	Follow dirt road to turnaround (H)	20
20	H	Return along dirt road to roadway (G)	20

This completes one lap; return to Step 1 and repeat.

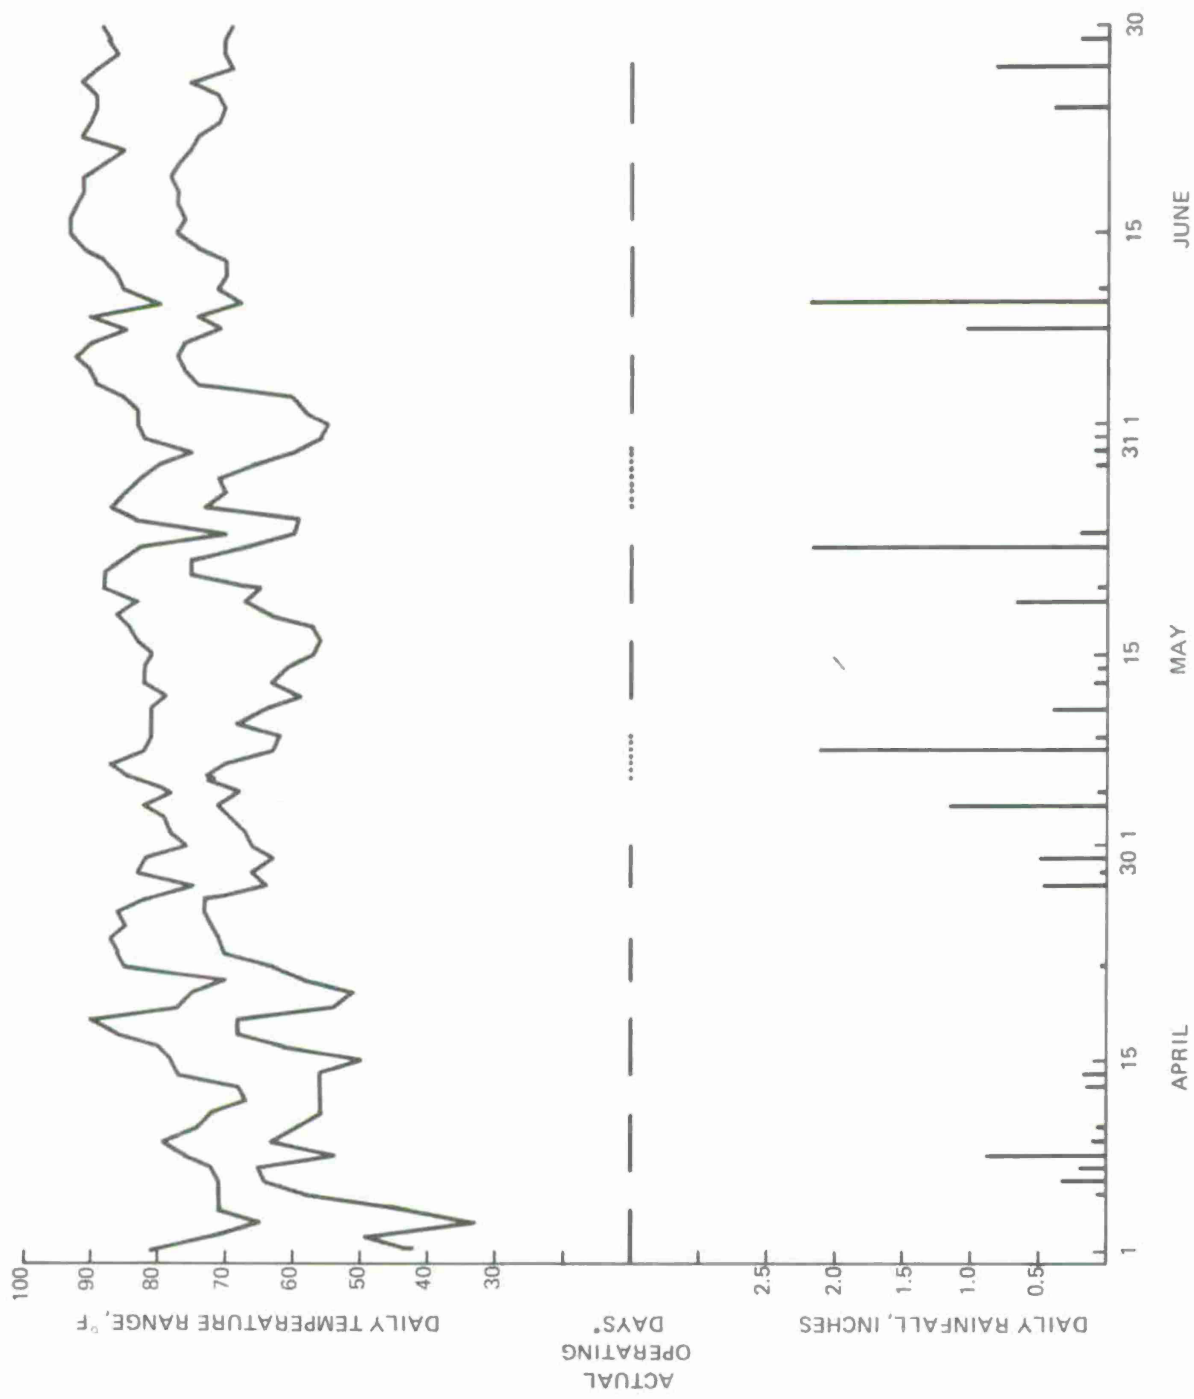

\*DOTTED LINES DENOTE DAYS WHEN DIRT SECTIONS OF COURSE IMPASSABLE DUE TO HEAVY RAINS.

FIGURE E-2. ROAD EVALUATION DATA


TABLE E-2

M-151 Maintenance and Oil Sampling Schedule

<u>Test Distance Kilometers (miles)</u>	<u>Operation</u>
4,800 (3,000)	Take 25ml sample of engine oil
9,650 (6,000)	Take 25ml sample of engine oil
12,800 (8,000)	Tune up engine (clean & set points, plugs), grease, general checkup, etc. Take 25ml sample of transmission and differential lubes Determine road octane requirement
14,500 (9,000)	Take 25ml sample of engine oil
19,300 (12,000)	Take 75ml sample of engine oil
24,100 (15,000)	Take 25ml sample of engine oil
25,700 (16,000)	Tune up engine (replace points, plugs), grease, general checkup, etc. Take 25ml sample of transmission and differential lubes Determine road octane requirement
28,900 (18,000)	Take 25ml sample of engine oil
33,800 (21,000)	Take 75ml sample of engine oil
End of Test	Take 75ml sample of engine, transmission, and differential lubes Tune up engine (replace points, plugs), grease, general checkup, etc. Determine road octane requirement

**APPENDIX F**


**M-151 ROAD TEST RESULTS**

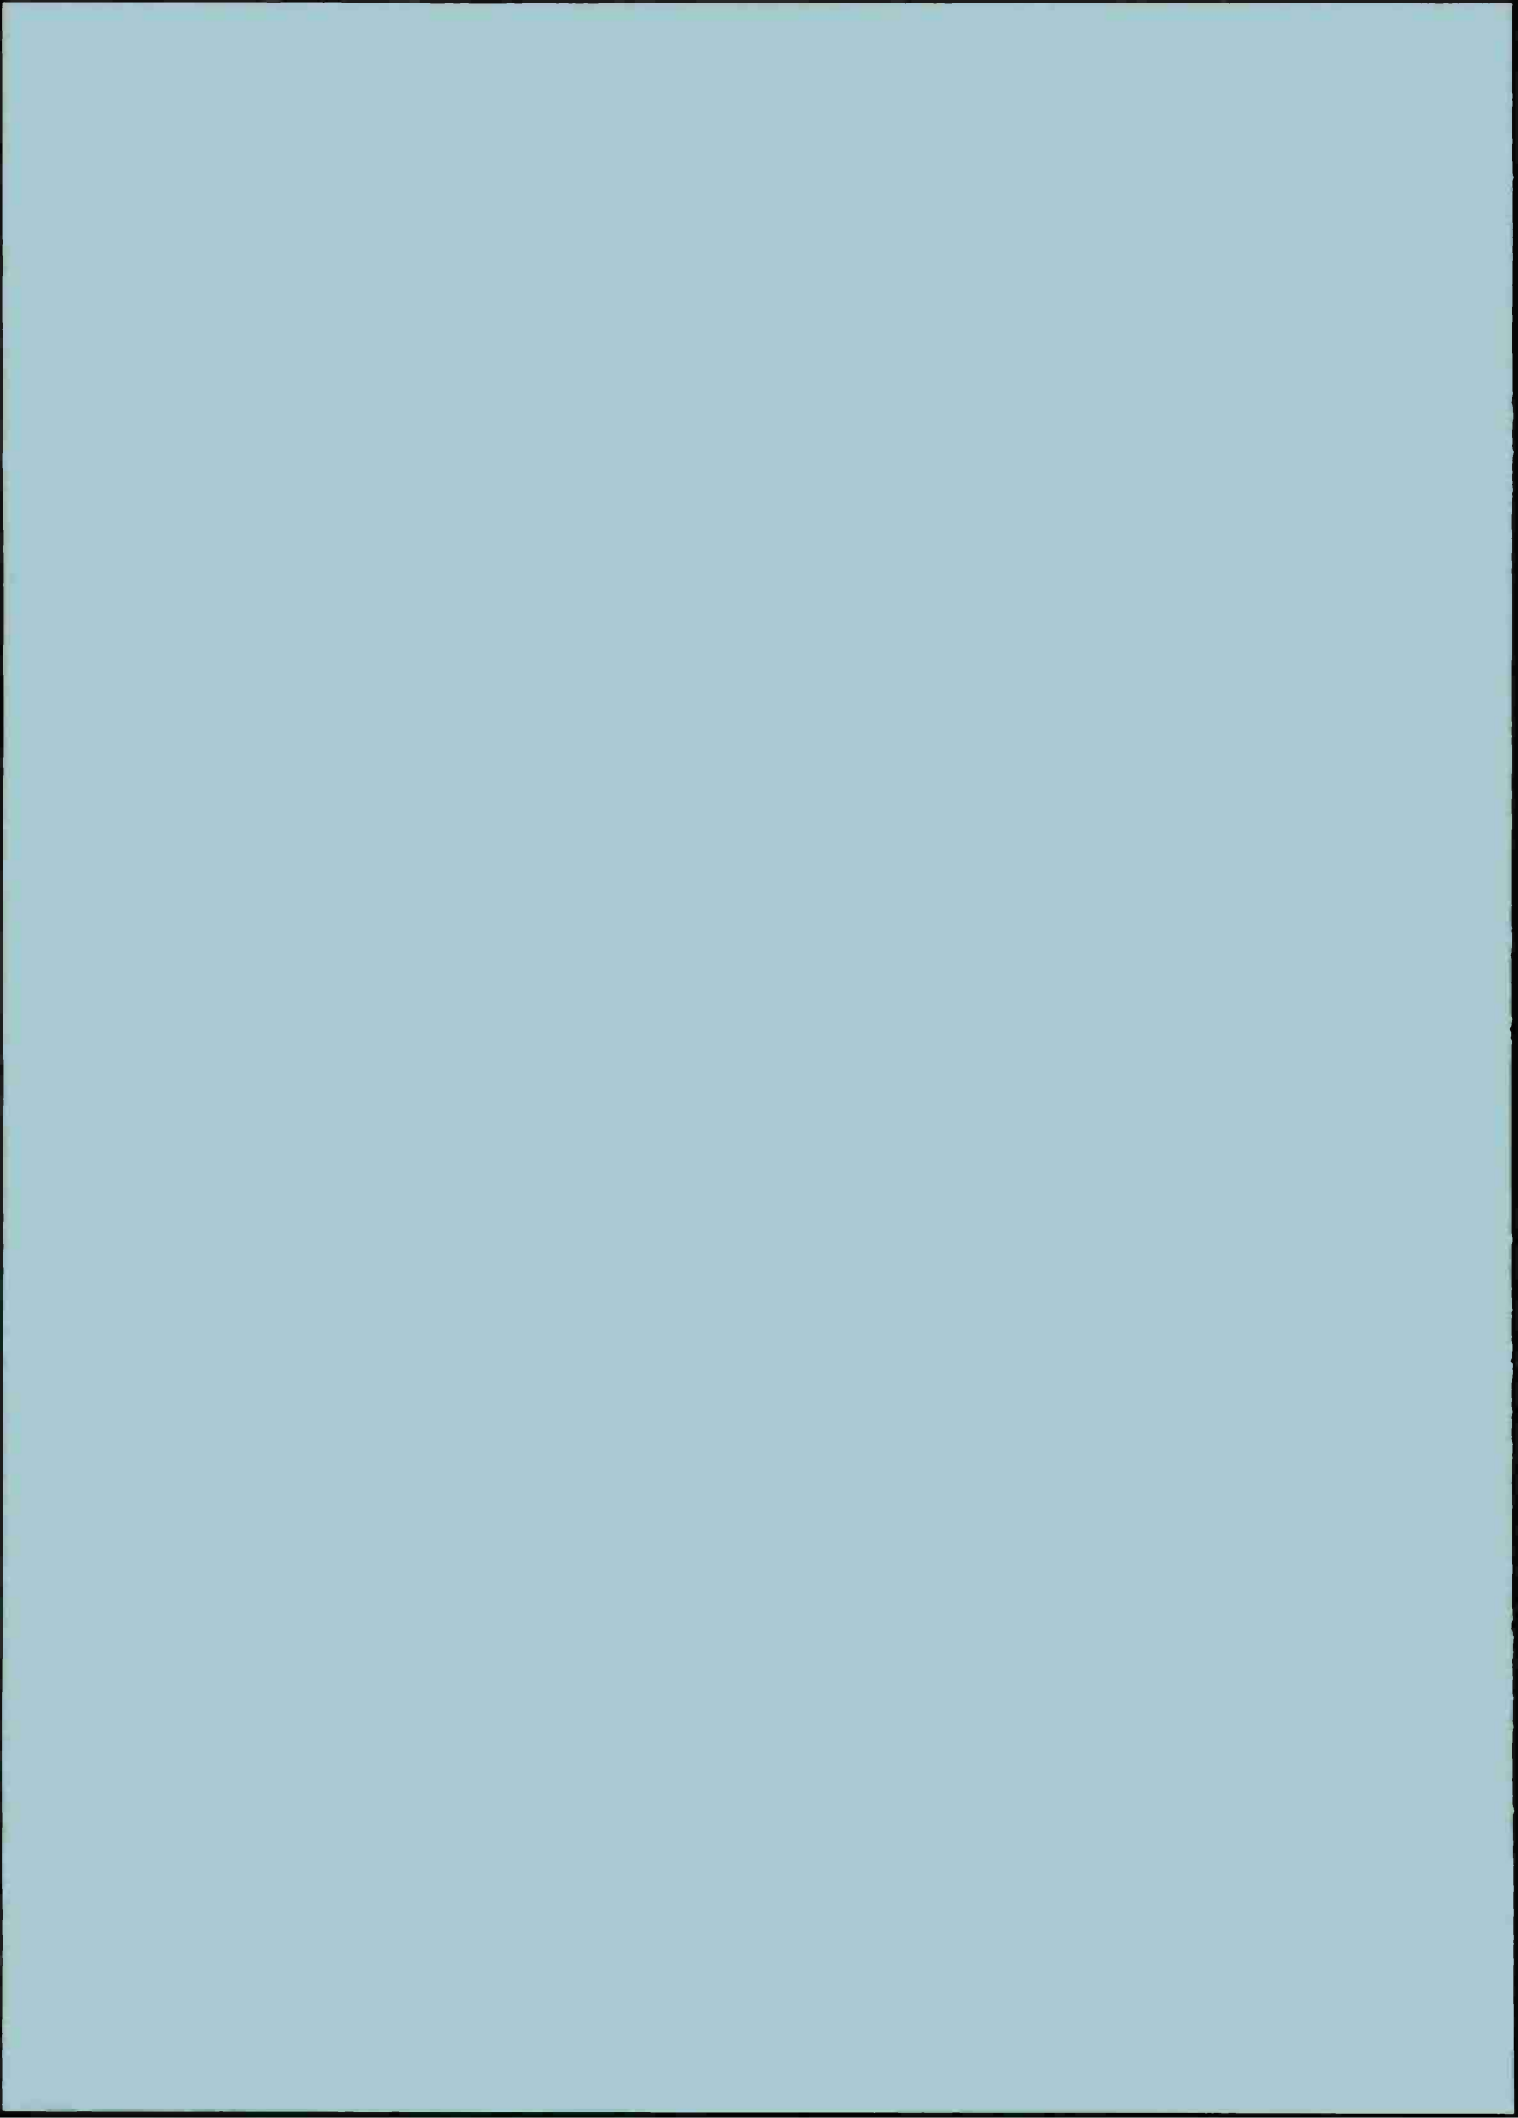

## M-151 ROAD TEST RESULTS

### STANDARD PISTON RINGS

**Fuel:** AL-5894-G Unleaded  
**Lubricant:** REO-203  
**Total**  
**Distance:** 35,661 Kilometers (22,164 miles)  
**Date**  
**Completed:** 27 June 1975

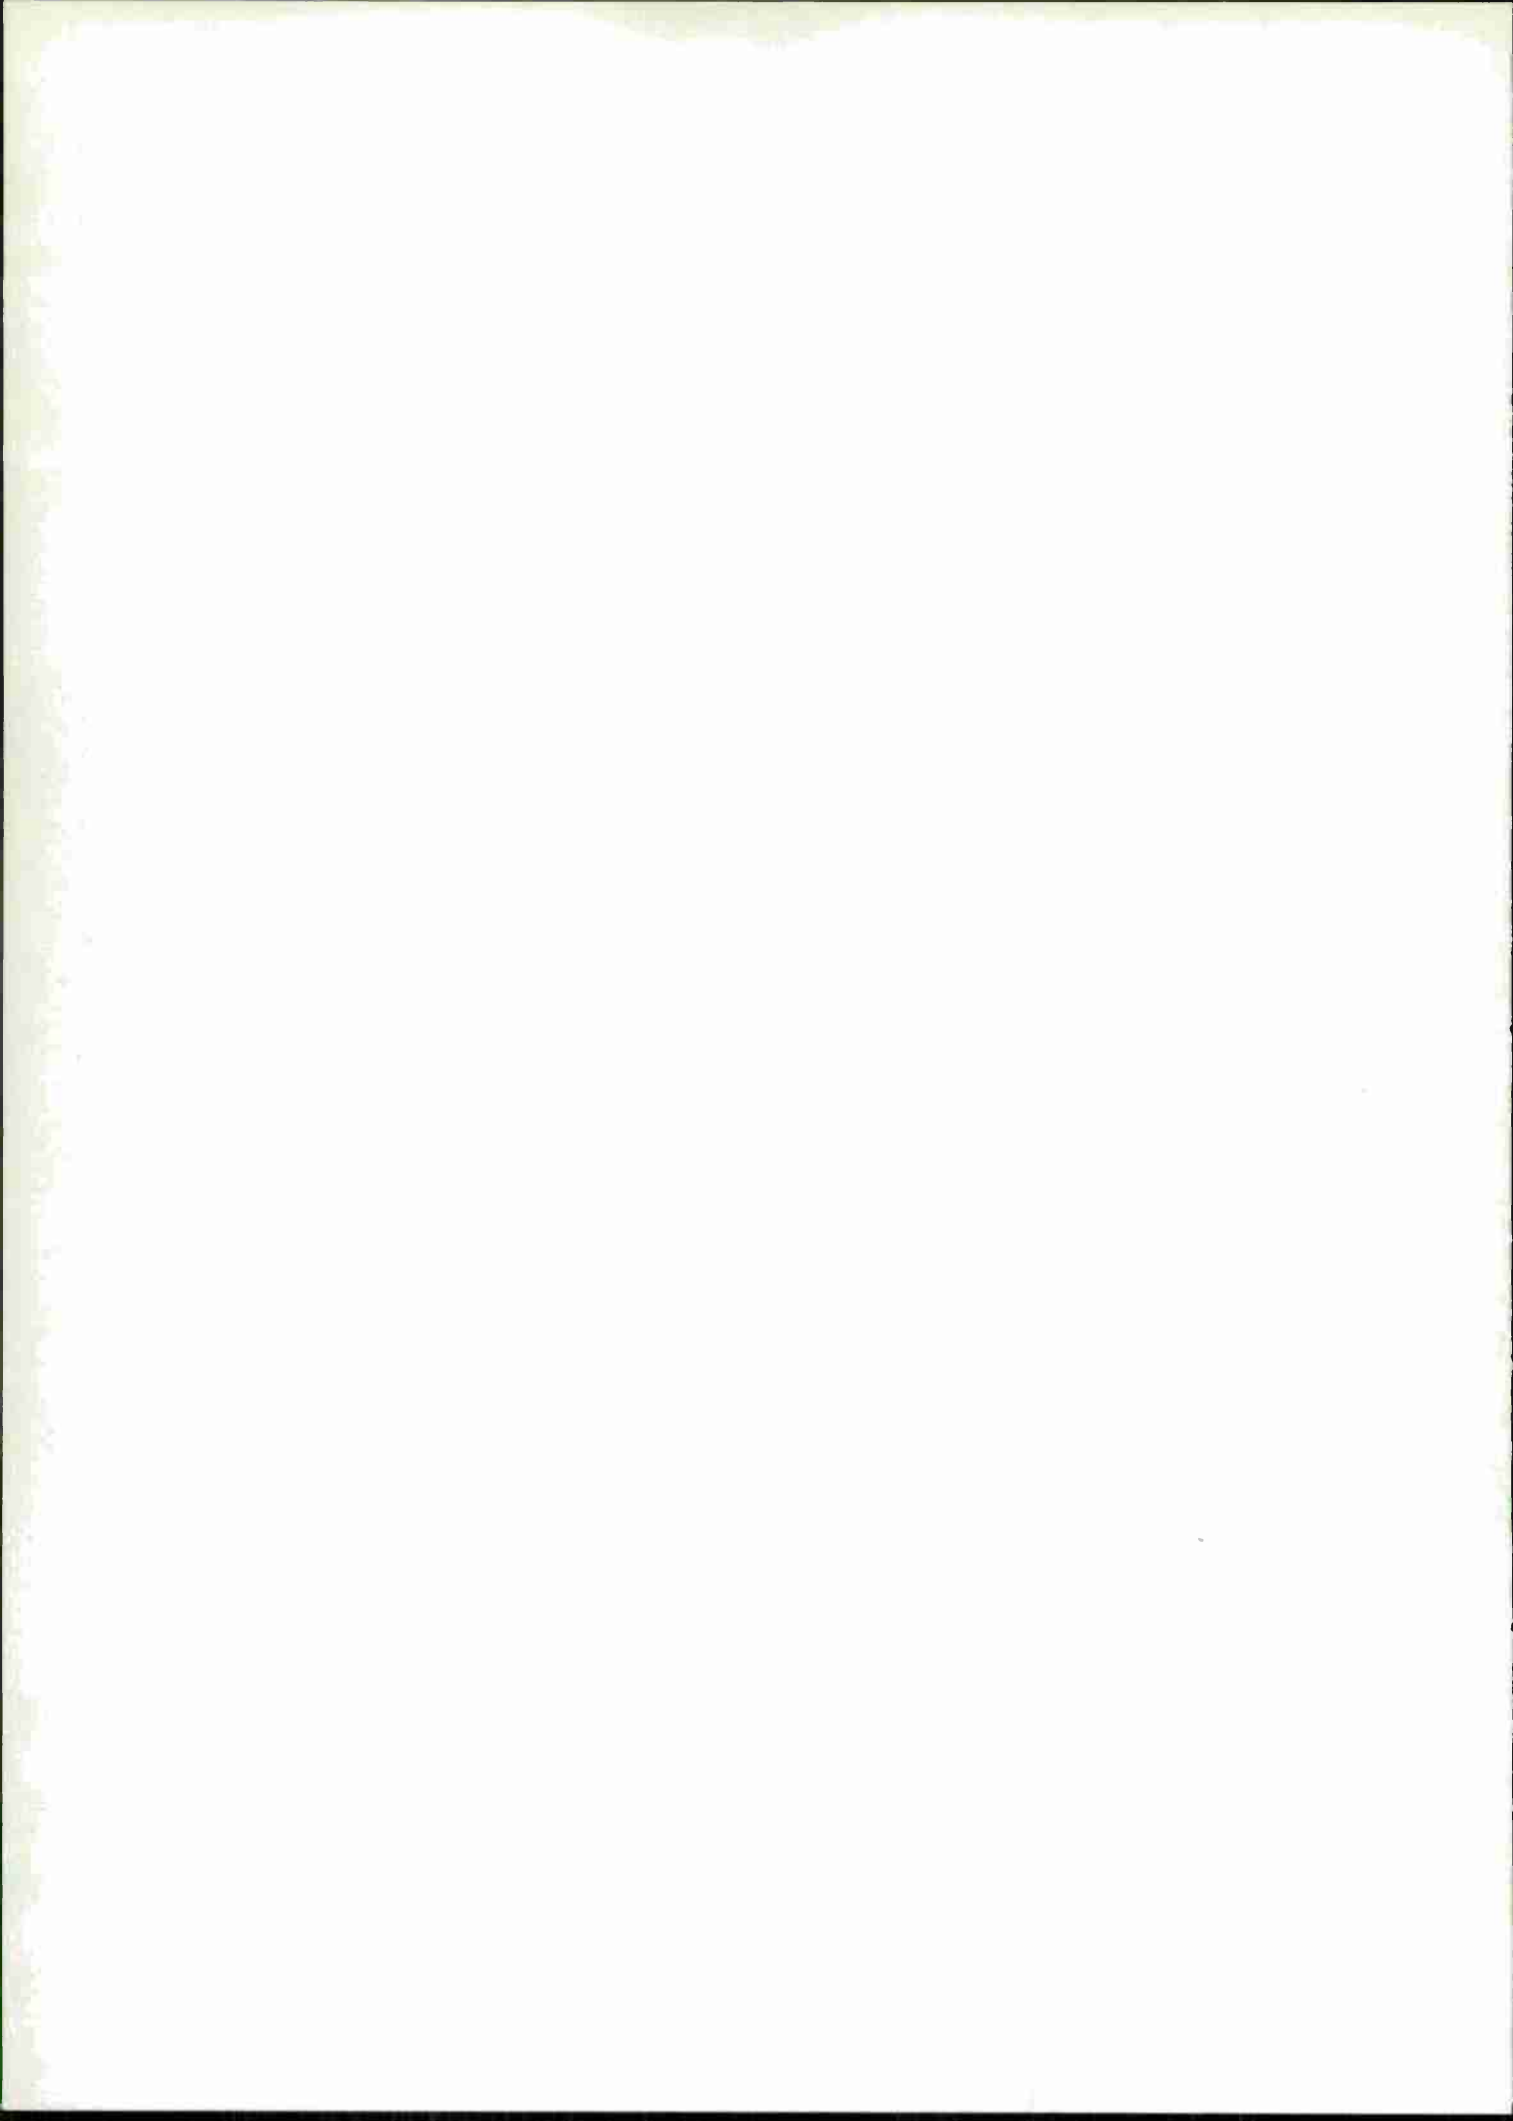

35,560 Kilometer Road Test - M151 Vehicle  
Standard Piston Rings


Used Oil Analysis

Test Distance Kilometers(miles)	Viscosity, cS		TAN	TBN	Metals by AA, ppm			Insolubles	
	38°C(100°F)	99°C(210°F)			Fe	Cu	Pb	Pentane	Benzene
New	121.6	12.61	2.97	5.08	--	--	--	--	--
4,830 (3,000)	115.40	12.29	3.33	4.50	59	23	N.D.		
9,294 (5,776)	121.93	12.77	3.53	4.50	92	21	N.D.		
14,480 (9,000)	140.01	14.01	4.46	3.64	211	49	359		
19,717 (12,254)	153.5	14.93	4.77	3.19	244	61	320	1.59	0.51
23,741 (14,755)	175.03	17.87	4.01	3.41	323	130	448		
29,273 (18,193)	181.35	16.90	6.65	3.70	306	82	454		
34,359 (21,354)	227.28	19.51	7.33	1.84	377	96	488		
35,560 (22,100)	246.80	20.34	7.10	1.83	378	113	506	5.84	1.41

Oil Additions

Test Distance Kilometers (miles)	Oil Addition Kilograms (lbs)	
4,988 (3100.3)	-0.03 (-0.06)	initial oil fill - 8.43 lbs
6,218 (3864.4)	0.78 (1.71)	final oil drain - 6.74 lbs
9,294 (5776.5)	-0.02 (-0.05)	change in filter weight - 0.42 lbs
14,607 (9078.6)	-0.03 (-0.06)	
16,431 (10,212.2)	0.61 (1.35)	
19,717 (12,254.2)	-0.08 (-0.18)	
23,741 (14,755.2)	-0.02 (-0.05)	
23,741 (14,755.2)	0.60 (1.31)	
29,272 (18,192.7)	-0.02 (-0.05)	
29,272 (18,192.7)	0.49 (1.07)	
33,608 (20,887.2)	-0.07 (-0.15)	
Total Additions	2.20 (4.84)	


F-4

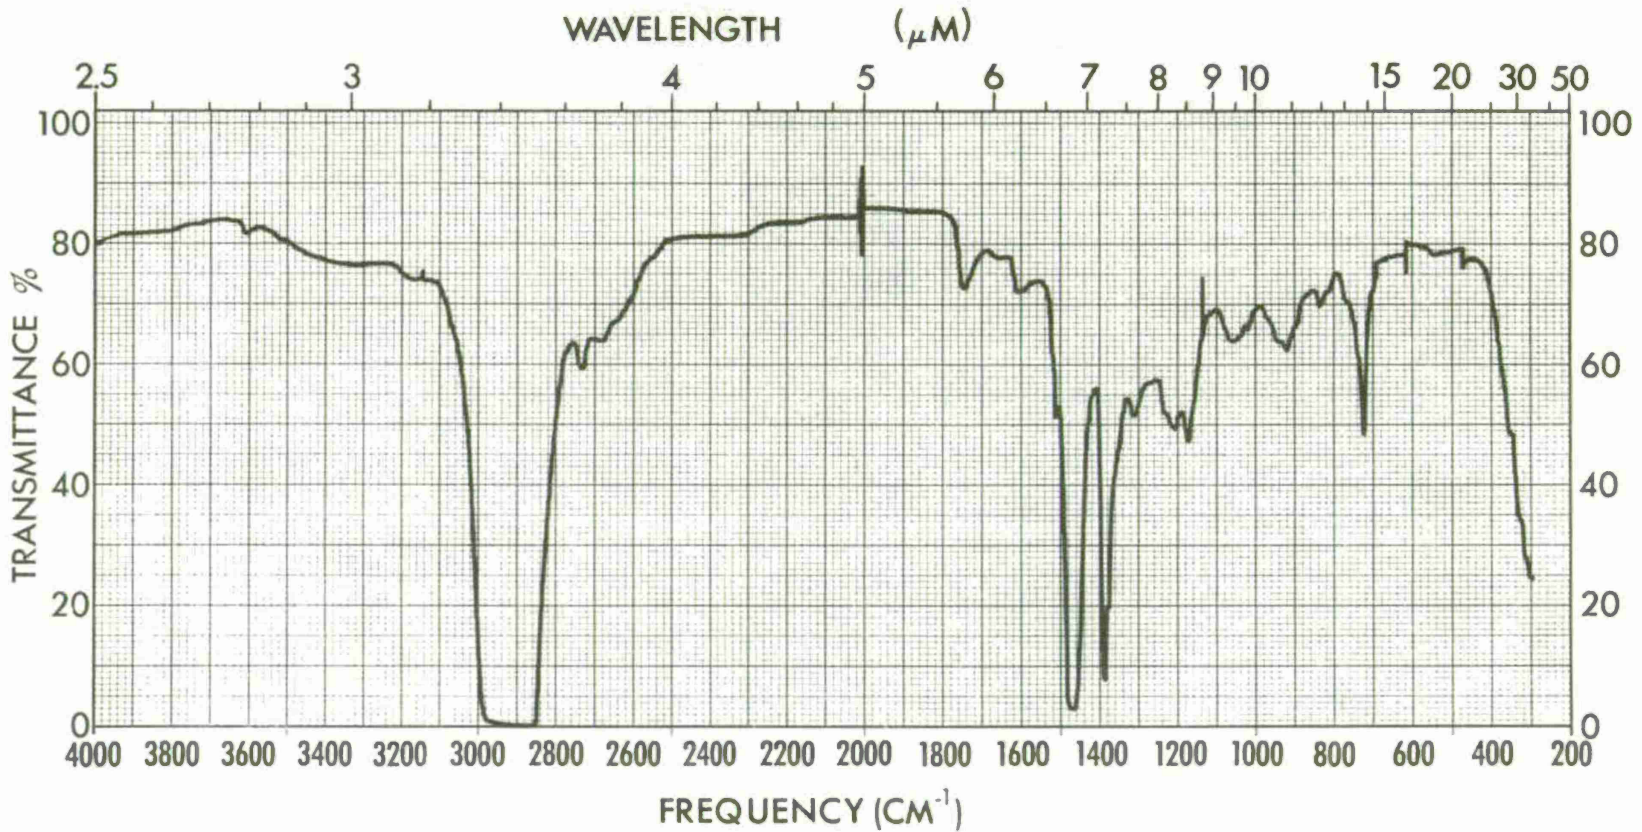

SPECTRUM NO. <u>569</u>	ORIGIN _____	LEGEND _____	REMARKS _____
SAMPLE <u>REO-203</u>	_____	1. _____	
<u>NEW</u>	PURITY _____	2. _____	
_____	PHASE _____	DATE <u>12-16-74</u>	
_____	THICKNESS <u>.05</u>	OPERATOR <u>D.B.</u>	

SPECTRUM NO. \_\_\_\_\_  
SAMPLE


F-5

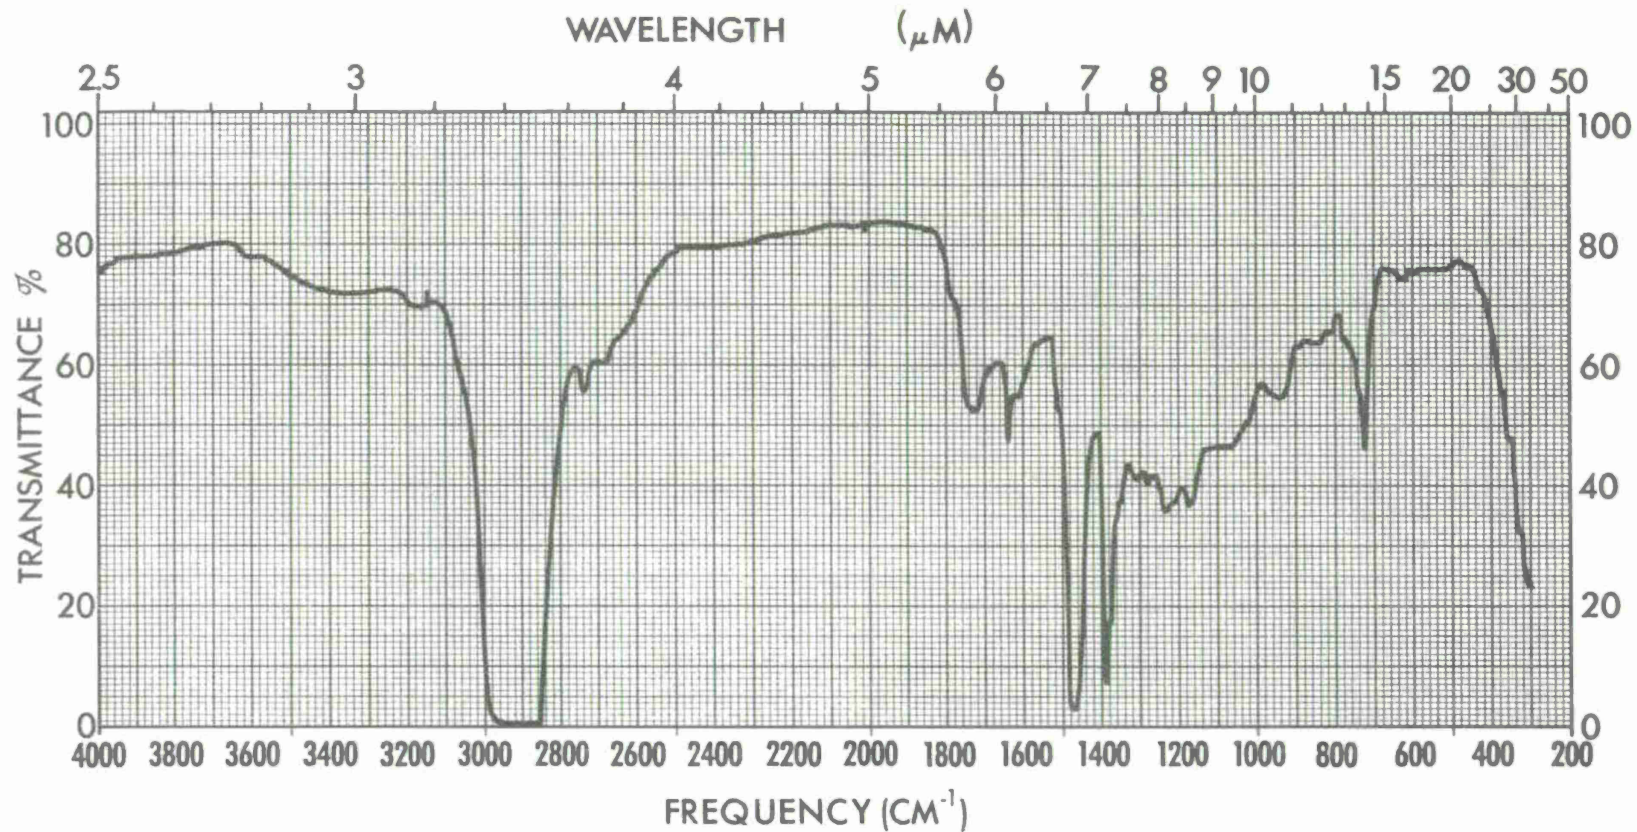

SPECTRUM NO. <u>.661</u>	ORIGIN _____	LEGEND _____	REMARKS _____
SAMPLE <u>Standard Rings</u>		1. _____	
<u>5-21-75</u>	PURITY _____	2. _____	
<u>12,254.2 Miles</u>	PHASE _____	DATE <u>5-30-75</u>	
	THICKNESS <u>.05</u>	OPERATOR <u>D.B.</u>	

SPECTRUM NO. \_\_\_\_\_  
SAMPLE \_\_\_\_\_


F-6

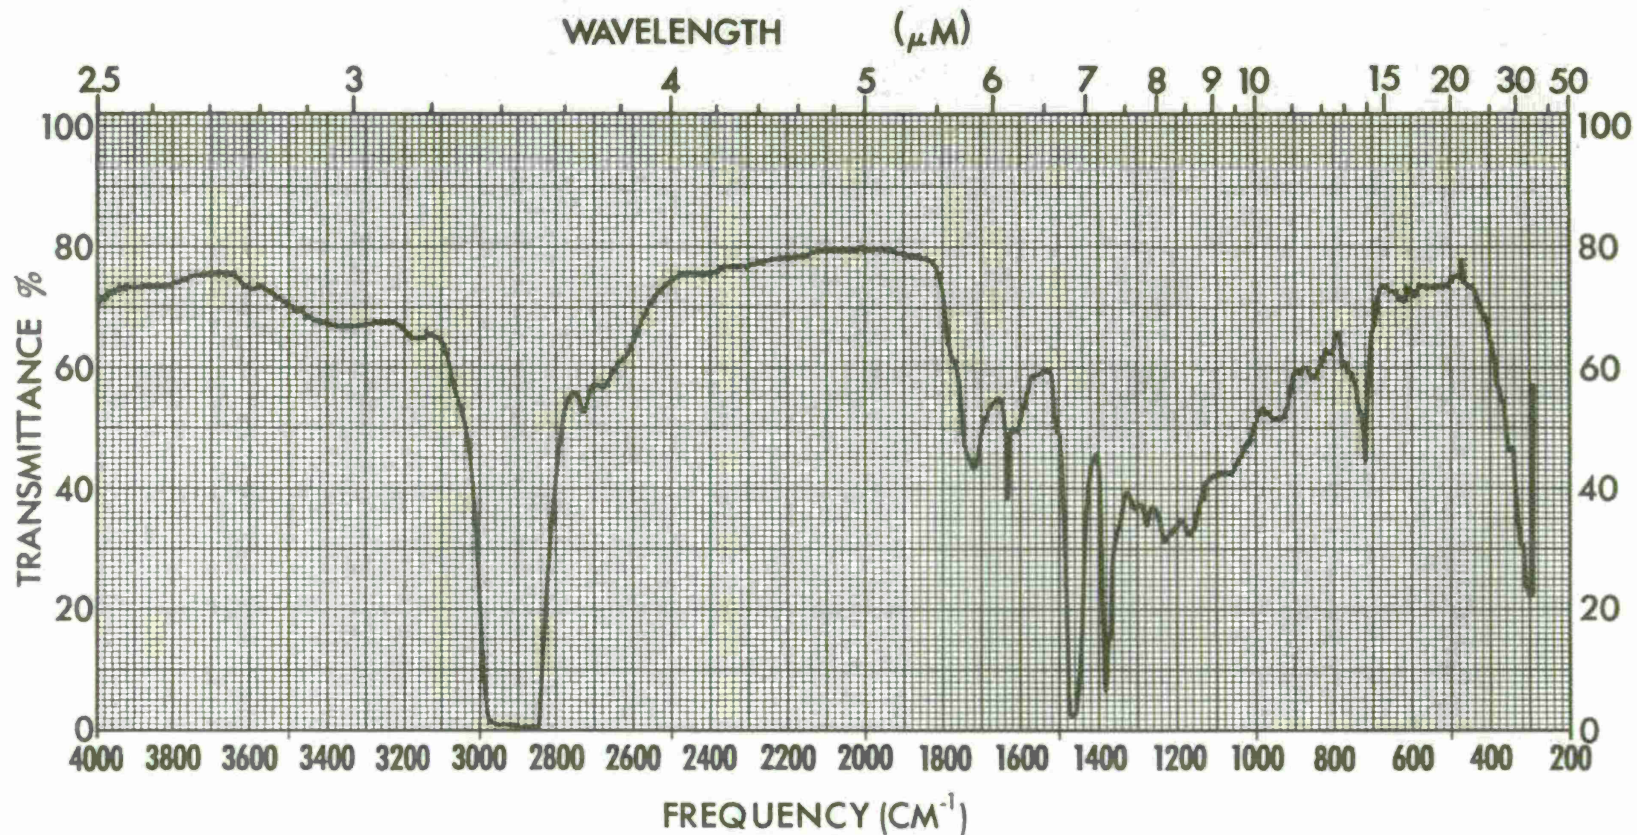

SPECTRUM NO. <u>.665</u>	ORIGIN _____	LEGEND _____	REMARKS _____
SAMPLE <u>Standard Rings</u>		1. _____	
<u>6-4-75</u>	PURITY _____	2. _____	
<u>14,755 miles</u>	PHASE _____	DATE <u>6-6-75</u>	
	THICKNESS <u>.05</u>	OPERATOR <u>D.B.</u>	

SPECTRUM NO. \_\_\_\_\_  
SAMPLE \_\_\_\_\_


F-7

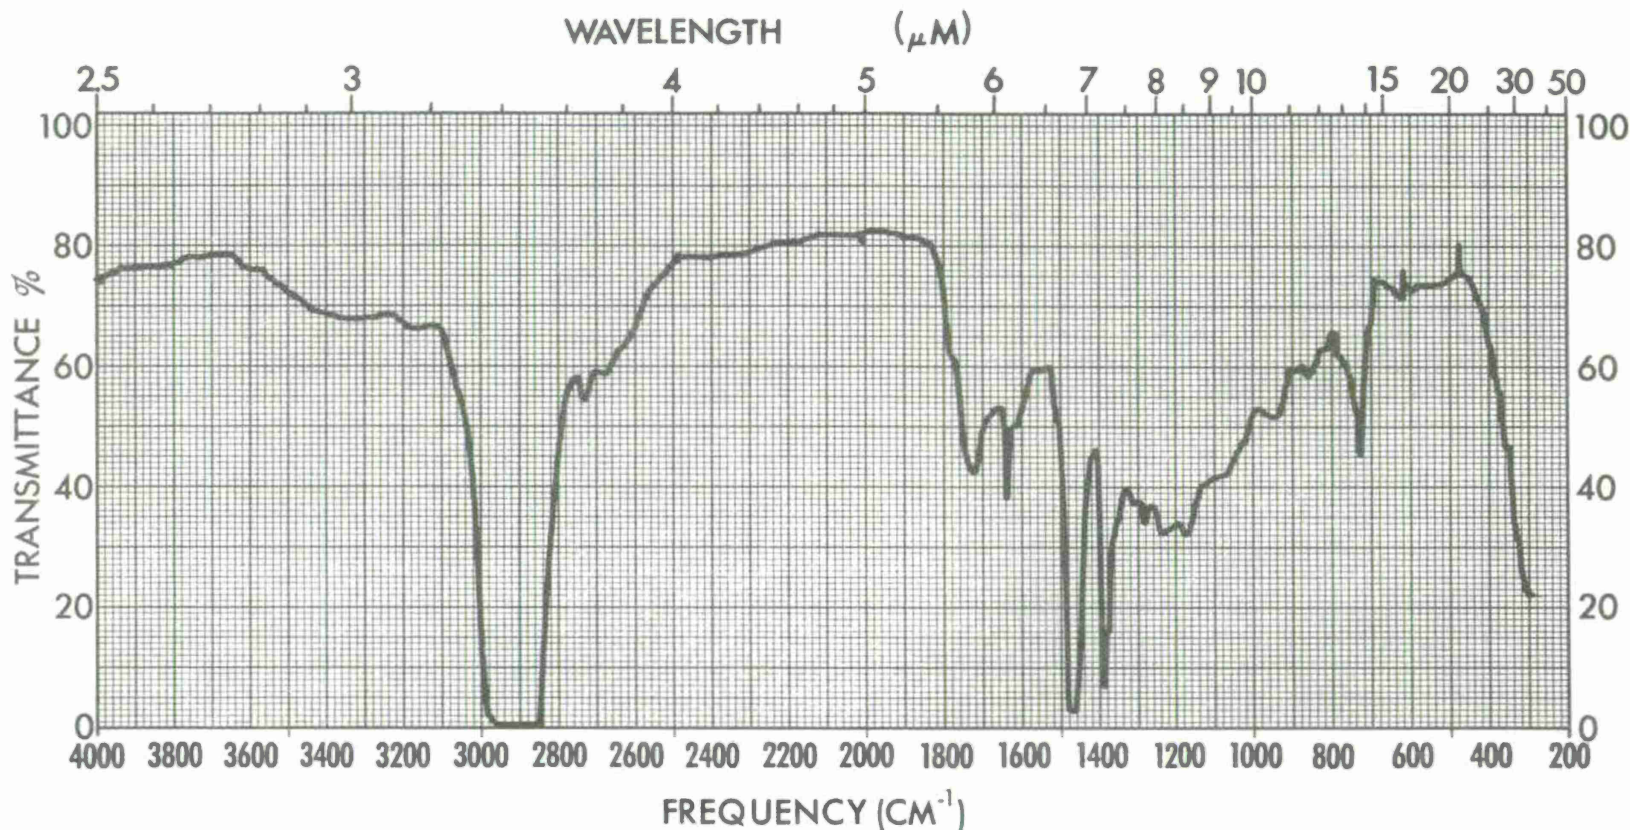

SPECTRUM NO. <u>671</u>	ORIGIN _____	LEGEND _____	REMARKS _____
SAMPLE <u>Standard Rings</u>		1. _____	
<u>18,192.7 Miles</u>	PURITY _____	2. _____	
<u>6-16-75</u>	PHASE _____	DATE <u>6-18-75</u>	
	THICKNESS <u>.05</u>	OPERATOR <u>D.B.</u>	

SPECTRUM NO. \_\_\_\_\_  
SAMPLE \_\_\_\_\_


F-8

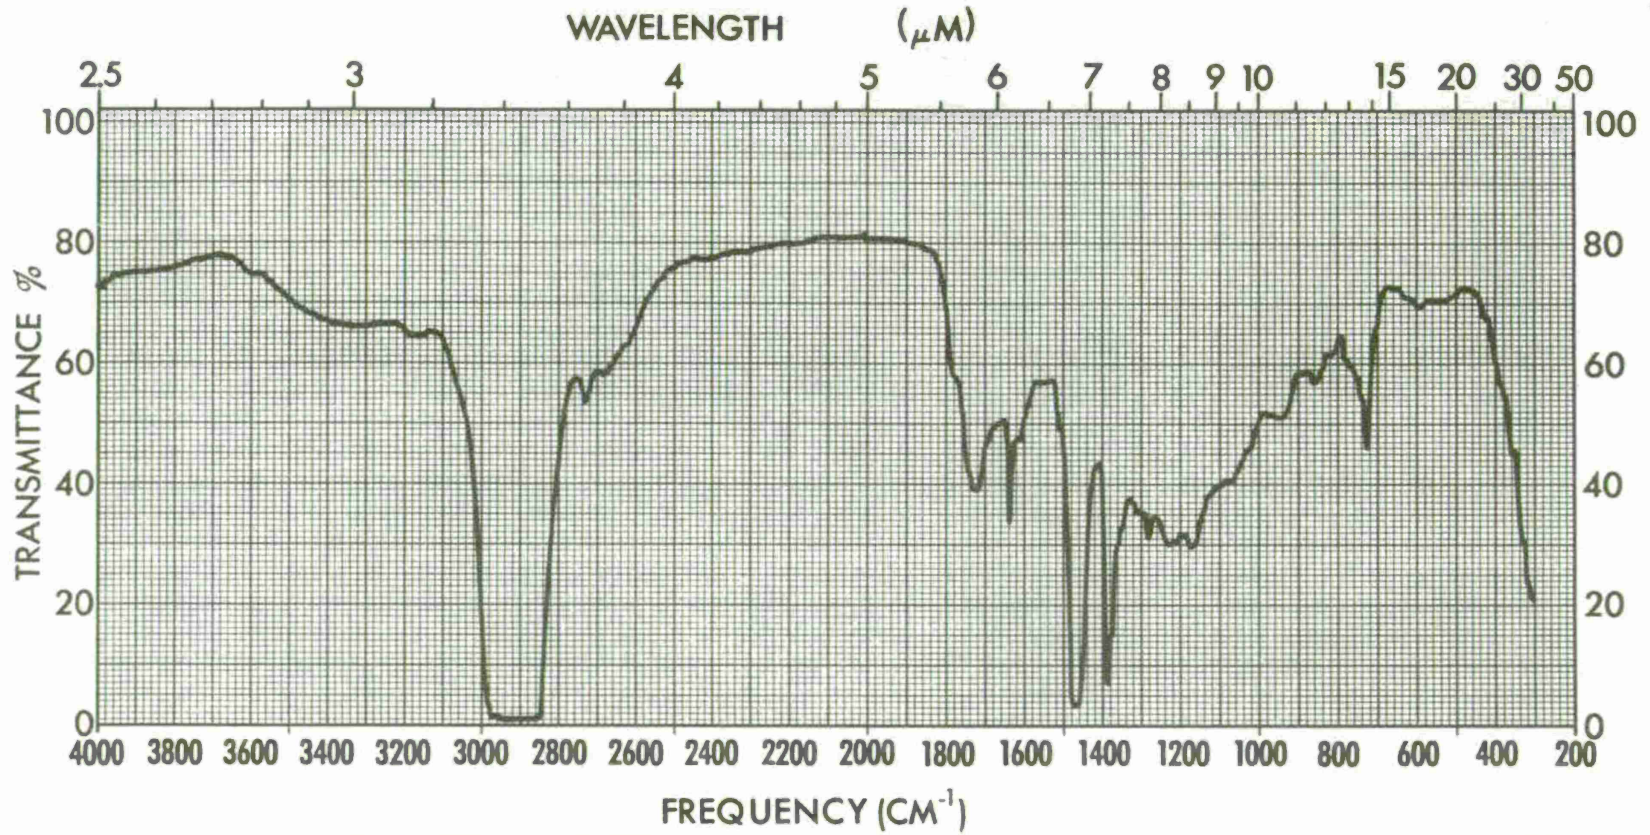

SPECTRUM NO. <u>673</u>	ORIGIN _____	LEGEND _____	REMARKS _____
SAMPLE <u>Standard Rings</u>	_____	1. _____	_____
<u>21,353 Miles</u>	PURITY _____	2. _____	_____
<u>6-26-75</u>	PHASE _____	DATE <u>7-1-75</u>	_____
_____	THICKNESS <u>.05</u>	OPERATOR <u>D.B.</u>	_____

SPECTRUM NO. \_\_\_\_\_  
SAMPLE \_\_\_\_\_

F-9

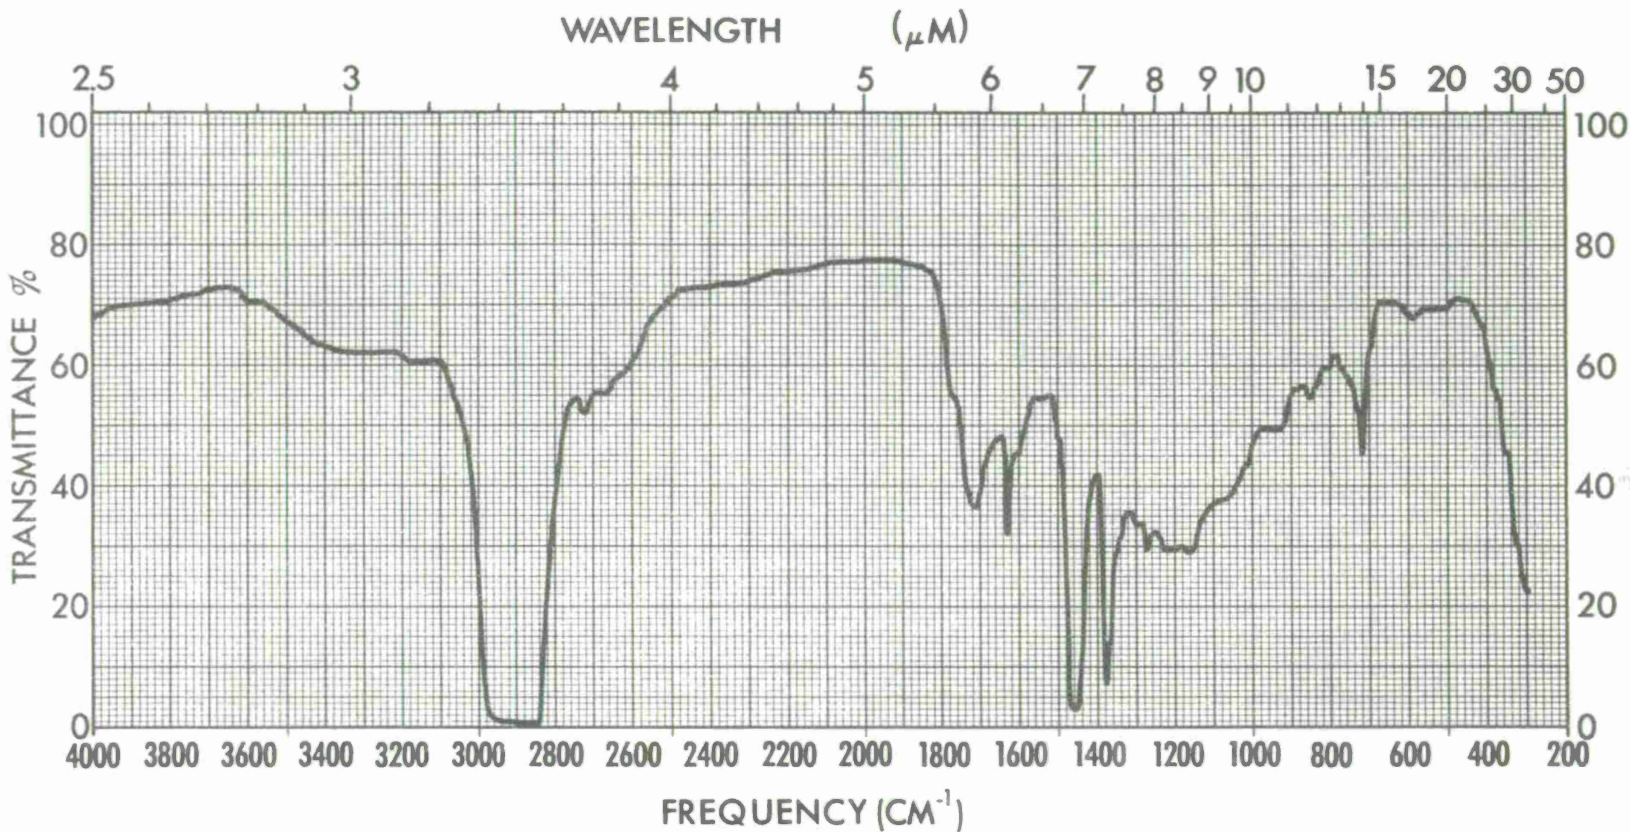

SPECTRUM NO. <u>675</u>	ORIGIN _____	LEGEND _____	REMARKS _____
SAMPLE <u>Standard Rings</u>		1. _____	
<u>Final, 22,100 miles</u>	PURITY _____	2. _____	
	PHASE _____	DATE <u>7-1-75</u>	
	THICKNESS <u>.05</u>	OPERATOR <u>D.B.</u>	

SPECTRUM NO. \_\_\_\_\_  
SAMPLE \_\_\_\_\_

35,560 Kilometer Road Test - M151 Vehicle  
Standard Piston Rings

List of Unscheduled Repairs

<u>Kilometers (miles)</u>	<u>Fault</u>
5,580 (3,470)	dead battery
6,900 (4,290)	front shock absorber
14,310 (8,895)	replacement of carburetor and fuel filter
19,870 (12,350)	replaced rear universal joints
21,015 (13,060)	replaced differential due to excessive backlash and wear
24,250 (15,070)	replaced rear tire

Road Octane Determinations

<u>Kilometers (miles)</u>	<u>Octane No.</u>
0	81
12,870 (8,000)	88
25,740 (16,000)	86
35,560 (22,100)	83

M151 ROAD TEST  
Standard Piston Rings

Piston Ring Gap Measurements

Piston Ring		End Gap, centimeters (inches)			
		Piston No.			
		1	2	3	4
top ring	before	.046(.018)	.041(.016)	.048(.019)	.046(.018)
	after	.069(.027)	.058(.023)	.061(.024)	.058(.023)
	change	.023(.009)	.018(.007)	.013(.005)	.013(.005)
second ring	before	.051(.020)	.048(.019)	.051(.020)	.051(.020)
	after	.071(.028)	.079(.031)	.076(.030)	.074(.029)
	change	.020(.008)	.031(.012)	.025(.010)	.023(.009)

M-151 Road Test  
Standard Piston Rings

Piston and Cylinder Bore Measurements

		Piston No.			
		1	2	3	4
Cylinder Bore, cm (in.)					
<i>1.11 cm from Top</i>					
Transverse	before	9.8483 (3.8773)	9.8453 (3.8761)	9.8466 (3.8766)	9.8455 (3.8762)
	after	9.8483 (3.8773)	9.8471 (3.8768)	9.8478 (3.8771)	9.8461 (3.8764)
	change	0	0.0018 (0.0007)	0.0013 (0.0005)	0.0005 (0.0002)
Longitudinal	before	9.8463 (3.8765)	9.8455 (3.8762)	9.8461 (3.8764)	9.8443 (3.8757)
	after	9.8489 (3.8775)	9.8468 (3.8767)	9.8478 (3.8771)	9.8466 (3.8766)
	change	0.0025 (0.0010)	0.0013 (0.0005)	0.0018 (0.0007)	0.0023 (0.0009)
<i>5.87 cm from Top</i>					
Transverse	before	9.8483 (3.8773)	9.8450 (3.8760)	9.8463 (3.8765)	9.8455 (3.8762)
	after	9.8489 (3.8775)	9.8463 (3.8765)	9.8478 (3.8771)	9.8471 (3.8768)
	change	0.0005 (0.0002)	0.0013 (0.0005)	0.0015 (0.0006)	0.0015 (0.0006)
Longitudinal	before	9.8458 (3.8763)	9.8458 (3.8763)	9.8463 (3.8765)	9.8443 (3.8757)
	after	9.8473 (3.8769)	9.8471 (3.8768)	9.8476 (3.8770)	9.8455 (3.8762)
	change	0.0015 (0.0006)	0.0013 (0.0005)	0.0013 (0.0005)	0.0013 (0.0005)
Piston Diameter (T-AT), cm (in.)					
Bottom of oil ring	before	9.8395 (3.8738)	9.8387 (3.8735)	9.8382 (3.8733)	9.8382 (3.8733)
	after	9.8374 (3.8730)	9.8362 (3.8725)	9.8379 (3.8732)	9.8367 (3.8727)
	change	0.0020 (0.0008)	0.0025 (0.0010)	0.0003 (0.0001)	0.0015 (0.0006)
Skirt	before	9.8415 (3.8746)	9.8412 (3.8745)	9.8410 (3.8744)	9.8412 (3.8745)
	after	9.8354 (3.8722)	9.8377 (3.8731)	9.8377 (3.8724)	9.8354 (3.8722)
	change	0.0061 (0.0024)	0.0036 (0.0014)	0.0051 (0.0020)	0.0058 (0.0023)

**STANDARD COMPUTATION SHEET FOR PISTON RATING**

TEST PROCEDURE Road Test  
 TEST HOURS 22,164 miles  
 TEST LABORATORY \_\_\_\_\_  
 LUBRICANT REO-203

RATER EL DATE \_\_\_\_\_  
 LABORATORY TEST NUMBER \_\_\_\_\_  
 STAND NO. \_\_\_\_\_ ENGINE NO. 5029134  
 FUEL AL-5894-G  
 F rating average - excluding groove #2 - 209.78

PISTON NO. 1

NO. 1 GROOVE, VOLUME-%	
PISTON WTD* RATING	163.1

DEPOSIT TYPE	DEPOSIT FACTOR	GROOVES								LANDS								UNDER-CROWN	
		NO. 1		NO. 2		NO. 3		NO. 4		NO. 1		NO. 2		NO. 3		NO. 4		AREA-%	DEMERIT
		AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT		
CARBON	HC	1.00	50	50						85	85								
	MHC	0.75																	
	MC	0.50																	
	LC	0.25																	
	VLC	0.15																	
	CARBON RATING																		
VARNISH	BV	0.100																	
	DBrV	0.075	50	3.75	50	3.75					50	3.75					90	6.75	
	AV	0.050			50	2.50	50	2.50											
	LAV	0.025					50	1.25			50	1.25	100	2.50					
	VLAV	0.010															10	.10	
	RV	0.001																	
	VARNISH RATING																		
CLEAN	0	0		0		0				15	0								
ZONAL RATING			53.75		6.25		3.75			85.0		5.00		2.5				6.85	
LOCATION FACTOR																			
WEIGHTED RATING																			

\*WEIGHTED TOTAL DEPOSITS 156.85 with groove 2 excluded

**STANDARD COMPUTATION SHEET FOR PISTON RATING**

TEST PROCEDURE Road Test  
 TEST HOURS 22,164 miles  
 TEST LABORATORY \_\_\_\_\_  
 LUBRICANT REO-203

RATER EL DATE \_\_\_\_\_  
 LABORATORY TEST NUMBER \_\_\_\_\_  
 STAND NO. \_\_\_\_\_ ENGINE NO. 5029134  
 FUEL AL-5894-G

PISTON NO. 2

NO. 1 GROOVE, VOLUME-%	
PISTON WTD* RATING	173.4

DEPOSIT TYPE	DEPOSIT FACTOR	GROOVES								LANDS								UNDER-CROWN	
		NO. 1		NO. 2		NO. 3		NO. 4		NO. 1		NO. 2		NO. 3		NO. 4		AREA-%	DEMERIT
		AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT		
CARBON	HC	1.00	50	50						75	75								
	MHC	0.75																	
	MC	0.50																	
	LC	0.25																	
	VLC	0.15																	
	CARBON RATING																		
VARNISH	BV	0.100	50	5.00	25	2.50				10	1.00	85	8.50					90	9.00
	DBrV	0.075			75	5.63	100	7.50		5	.38	15	1.13	100	7.50				
	AV	0.050																	
	LAV	0.025																10	.25
	VLAV	0.010																	
	RV	0.001																	
	VARNISH RATING																		
CLEAN	0								10	0									
ZONAL RATING		55.0		8.13		7.50			76.38		9.63		7.50					9.25	
LOCATION FACTOR																			
WEIGHTED RATING																			

\*WEIGHTED TOTAL DEPOSITS 165.26 excluding groove #2

F-13

**STANDARD COMPUTATION SHEET FOR PISTON RATING**

TEST PROCEDURE Road Test  
 TEST HOURS 22,164 miles  
 TEST LABORATORY \_\_\_\_\_  
 LUBRICANT REO-203

RATER EL DATE \_\_\_\_\_  
 LABORATORY TEST NUMBER \_\_\_\_\_  
 STAND NO. \_\_\_\_\_ ENGINE NO. 5029134  
 FUEL AL-5894-G

PISTON NO. 3

NO. 1 GROOVE, VOLUME-%	
PISTON WTD* RATING	267.5

DEPOSIT TYPE	DEPOSIT FACTOR	GROOVES								LANDS								UNDER-CROWN	
		NO. 1		NO. 2		NO. 3		NO. 4		NO. 1		NO. 2		NO. 3		NO. 4		AREA-%	DEMERIT
		AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT		
CARBON	HC	1.00	100	100						90	90	35	35						
	MHC	0.75																	
	MC	0.50																	
	LC	0.25																	
	VLC	0.15																	
	CARBON RATING																		
VARNISH	BV	0.100			100	10.0						65	6.50	100	10.0			85	8.50
	DBrV	0.075					100	7.50											
	AV	0.050																	
	LAV	0.025																	
	VLAV	0.010																	
	RV	0.001																	
	VARNISH RATING																		
CLEAN	0								10	0							15	0	
ZONAL RATING			100.0		10.0		7.50			90.0		41.50		10.0				8.50	
LOCATION FACTOR																			
WEIGHTED RATING																			

\*WEIGHTED TOTAL DEPOSITS 257.5 excluding groove #2

**STANDARD COMPUTATION SHEET FOR PISTON RATING**

TEST PROCEDURE Road Test  
 TEST HOURS 22,164 miles  
 TEST LABORATORY \_\_\_\_\_  
 LUBRICANT REO-203

RATER EL DATE \_\_\_\_\_  
 LABORATORY TEST NUMBER \_\_\_\_\_  
 STAND NO. \_\_\_\_\_ ENGINE NO. 5029134  
 FUEL AI-5894-G

PISTON NO. 4

NO. 1 GROOVE, VOLUME-%	
PISTON WTD* RATING	267.0

DEPOSIT TYPE	DEPOSIT FACTOR	GROOVES								LANDS								UNDER-CROWN	
		NO. 1		NO. 2		NO. 3		NO. 4		NO. 1		NO. 2		NO. 3		NO. 4		AREA-%	DEMERIT
		AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT
CARBON	HC	1.00	100	100						85	85	50	50						
	MHC	0.75																	
	MC	0.50																	
	LC	0.25																	
	VLC	0.15																	
	CARBON RATING																		
VARNISH	BV	0.100										50	5.00					95	9.50
	DBrV	0.075		100	7.50														
	AV	0.050				100	5.00							100	5.00				
	LAV	0.025																	
	VLAV	0.010																	
	RV	0.001																	
VARNISH RATING																			
CLEAN	0								15	0								5	0
ZONAL RATING		100.0		7.50		5.00			85.0		55.0		5.0						
LOCATION FACTOR																			
WEIGHTED RATING																			

\*WEIGHTED TOTAL DEPOSITS 259.5 excluding groove #2

### RING STICKING

Engine Model L-141 Serial No. 5029134 Date 7-7-75  
Fuel AL-5894-G Lubricant REO-203 Observer EL

Piston Number

Ring No.	1	2	3	4		
1	F	F	F	F		
2	F	F	F	F		
3	F	F	F	F		
4						

Indicate by letter—Free or Sluggish, or by number and letter—percent Pinched  
(cold stuck) or percent Hot stuck

F-16

**RING DEPOSITS**

Engine Model L-141 Serial No. 5029134 Date 7-7-75  
 Fuel AL-5894-G Lubricant REO-203 Observer EPL

Cylinder Number		1		2		3		4						
		CARB	VARN	CARB	VARN	CARB	VARN	CARB	VARN					
Piston Ring	Top	1	0	25	0	10	0	15	0	10				
		2	0	75	0	90	0	15	0	90				
		3												
		4												
	ID	1	0	100	0	100	100	0	30	70				
		2	0	100	0	100	0	100	0	100				
		3												
		4												
	Bottom	1	0	10	0	10	0	20	0	0				
		2	0	20	0	40	0	50	0	50				
		3												
		4												

Areas previously rated for carbon, rate 0 for varnish

F-17

## RING FACE CONDITION

Engine Model L-141 Serial No. 5029134 Date 7-7-75  
 Fuel AL-5894-G Lubricant REO-203 Observer ERL

	Cylinder Number					
	1	2	3	4		
First Ring	N	N	N	N		
Second Ring	N	N	N	N		
Third Ring						
Fourth Ring						
Oil Ring Slots-% Open	100	100	100	100		

N-Normal

Medium Wear

PISTON SURFACE DEPOSITS

Engine Model L-141 Serial No. 5029134 Date 7-7-75  
 Fuel AL-5894-G Lubricant REO-203 Observer ERL

		Piston Number					
		1	2	3	4		
Top*		3.0	2.0	2.0	2.0		
Combustion Chamber*		3.5	3.0	2.5	3.5		
Under Head*		6.5	8.0	8.5	8.5		
Skirts*	Thrust	1.5	1.5	3.5	2.0		
	Anti-Thrust	1.5	1.5	3.0	2.5		
Relief Areas*		1.0	1.5	3.5	2.5		
Lands	1	8.5	8.5	8.0	8.5		
	2	6.5	8.0	8.0	8.8		
	3	5.0	7.0	7.5	6.8		
	4						

\*Carbon and Ash: Use Volume Factor  
 Indicate H, M, or S

F-19

## PISTON RING GROOVE DEPOSITS

Engine Model L-141 Serial No. 5029134 Date 7-7-75  
 Fuel AL-5894-G Lubricant REO-203 Observer ERL

		Cylinder Number											
		1		2		3		4					
		CARB	VARN	CARB	VARN	CARB	VARN	CARB	VARN				
Top of Groove*	1	0	0	0	5	25	5	0	5				
	2	0	15	0	80	0	30	0	50				
	3	0	90	0	90	0	90	0	90				
	4												
Back of Groove†	1	70	30	50	50	100	0	75	25				
	2	0	100	0	100	15	85	0	100				
	3	0	100	0	100	0	100	0	100				
	4												
Bottom of Groove*	1	0	5	0	5	0	5	0	0				
	2	0	5	0	10	0	20	0	10				
	3	0	0	0	10	0	100	0	25				
	4												
Drain Holes—% Blocked													

All Hard Carbon

\*Carbon and Ash: Use Volume Factor  
 Indicate H, M, or S


†Carbon and Ash: Indicate Percent Filled and H, M, or S

### PISTON GROOVE INSIDE DIAMETER—% RING SUPPORTING CARBON

Engine Model L-141 Serial No. 5029134 Date 7-7-75  
 Fuel AL-5894-G Lubricant REO-203 Observer ERL

Piston Ring	Quadrant	Piston Number					
		1	2	3	4		
1	1	5	0	20	15		
	2	5	0	10	5		
	3	0	0	25	0		
	4	5	0	5	0		
2	1	0	0	0	0		
	2	0	0	0	0		
	3	0	0	0	0		
	4	0	0	0	0		

F-21

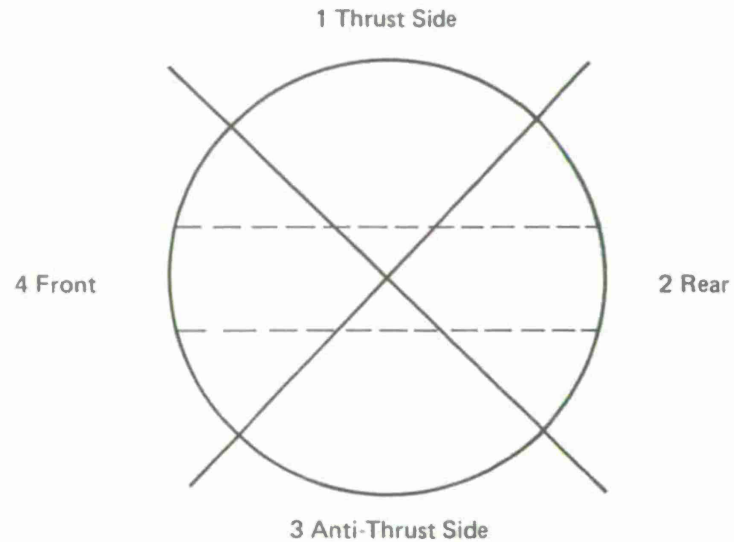

## PISTON SURFACE CONDITION

Engine Model L-141 Serial No. 5029134 Date 7-7-75  
 Fuel AL-5894-G Lubricant REO-203 Observer ERL

	Piston Number					
	1	2	3	4		
Top Land	N	N	N	N		
Skirt	N	N	N	N		
Piston Pin	N	N	N	N		

N-Normal

VALVE DEPOSITS

Engine Model L-141 Serial No. 5029134 Date 7-7-75  
 Fuel AL-5894-G Lubricant REO-203 Observer EPL

		Cylinder Number											
		1		2		3		4					
		CARB	VARN	CARB	VARN	CARB	VARN	CARB	VARN				
Head*	INT	1.0	0	1.0	0	1.0	0	1.0	0				
	EXH	1.0	0	1.0	0	1.0	0	1.0	0				
Face	INT	0	2.0	0	4.0	0	7.5	0	9.0				
	EXH	.5	0	.5	0	.5	0	.5	0				
Tulipt	INT	6.5	0	4.5	0	3.5	0	4.0	0				
	EXH	1.5	0	1.0	0	1.0	0	1.0	0				
Stem	INT	0	0	0	0	0	0	0	0				
	EXH	0	.5	0	.5	0	.5	0	.5				

\*Carbon and Ash: Use Volume Factor Technique

F-23

## VALVE SURFACE CONDITIONS

Engine Model L-141 Serial No. 5029134 Date 7-7-75  
 Fuel AL-5894-G Lubricant REO-203 Observer EL

	Intake						Exhaust					
	1	2	3	4			1	2	3	4		
Freeness in Guide	F	F	F	F			F	F	F	F		
Head	N	N	N	N			N	N	N	N		
Face	N	N	N	N			N	N	N	N		
Seat	N	N	N	N			N	N	N	N		
Stem	N	N	N	N			N	N	N	N		
Tip	N	N	N	N			N	N	N	N		

N-Normal

F-Free

## TAPPETS, CAMS, AND ROCKER ARMS

Engine Model L-141 Serial No. 5029134 Date 7-7-75  
 Fuel AL-5894-G Lubricant REO-203 Observer EL

		Cylinder Number					
			1	2	3	4	
Tappet Deposit	INT	0	0	0	0		
	EXH	0	0	0	0		
Tappet Surface Condition	INJ						
	INT	N	N	N	N		
	EXH	N	N	N	N		
Cam Lobes		N	N	N	N		
Rocker Arms	Tip	INT	N	N	N	N	
		EXH	N	N	N	N	
	Bushing	INT	N	N	N	N	
		EXH	N	N	N	N	
	Shaft	INT	N	N	N	N	
		EXH	N	N	N	N	

N-Normal

## CYLINDERS

Engine Model L-141 Serial No. 5029134 Date 7-7-75  
 Fuel AL-5894-G Lubricant REO-203 Observer EL

		Cylinder Number											
		1		2		3		4					
Deposits		CARB	VARN	CARB	VARN	CARB	VARN	CARB	VARN				
Cylinder Head		3.5	0	3.0	0	2.5	0	2.0	0				
Cylinders	ART	0	5.0	0	6.5	0	7.0	0	6.0				
	RTA	0	1.0	0	1.0	0	1.0	0	2.0				
	BRT	0	.5	0	.5	0	.5	0	.5				
Surface Condition													
Cylinders	RTA	N	N	N	N	N	N	N	N				
	BRTA	N	N	N	N	N	N	N	N				

## SURFACE CONDITION

Engine Model L-141 Serial No. 5029134 Date 7-7-75  
 Fuel AL-5894-G Lubricant REO-203 Observer EL

Bearing No.	1	2	3	4			
Main-Bearing	L	N	M				
	-Journal	N	N	N			
Rod-Bearing	M	M	M	M LS			
	-Journal	N	N	N	N		
Piston Pin	N	N	N	N			
Bushing							

Note surface condition.

All main bearing wear on bottom half.

All cam rod bearing wear on top half.

L-light

M-Medium

L.S.-light scratch

N-Normal

## SLUDGE DEPOSITS

Engine Model L-141 Serial No. 5029134 Date 7-7-75  
 Fuel AL-5894-G Lubricant REO-203 Observer EL

	Rating
Connecting Rods	0
Rocker Arm Covers	.5
Top Deck	.5
Push Rod Covers	.5
Push Rod Chamber	.5
Timing Gear Cover	.5
Oil Pan	.5
Oil Screen	0

Use CRC Volume Factor Technique.




L-141 PISTONS, STANDARD RINGS ANTI-THRUST SIDE

F-29



L-141 PISTONS, STANDARD RINGS THRUST SIDE

F-30

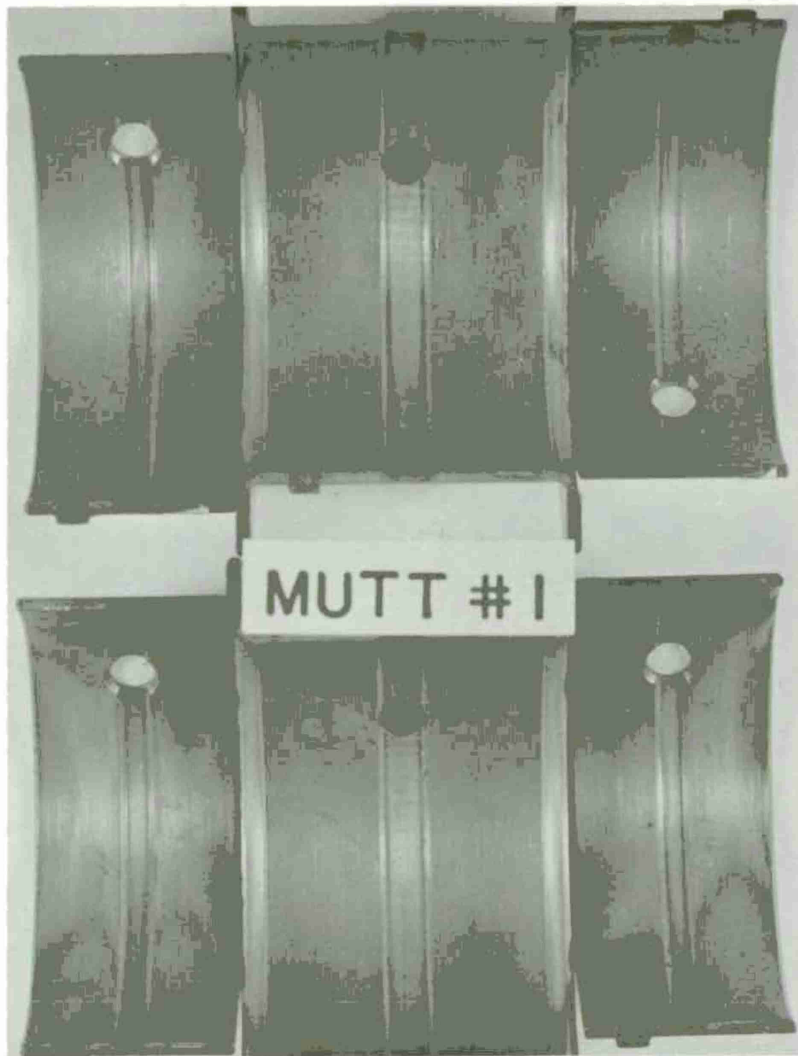

STANDARD RING-EQUIPPED ENGINE  
MAIN BEARINGS



STANDARD RING-EQUIPPED ENGINE  
CONNECTING ROD BEARINGS

## M-151 ROAD TEST RESULTS

### LOW-BLOWBY PISTON RINGS

Fuel: AL-5894-G Unleaded  
Lubricant: REO-203  
Total  
Distance: 35,768 Kilometers (22,230 miles)  
Date  
Completed: 27 June 1975

35,560 Kilometer Road Test - M151 Vehicle  
 Low Blowby Piston Rings


Used Oil Analysis

Test Distance Kilometers(miles)	Viscosity cS		TAN	TBN	Metals by AA, %			Insolubles w/cong.	
	38°C(100°F)	99°C(210°F)			Fe	Cu	Pb	Pentane	Benzene
New	121.6	12.61	2.97	5.08	--	--	--	--	--
(3130)	118.38	12.44	2.87	5.42	120	21	N.D.		
(5816)	123.62	12.89	3.14	4.83	169	24	N.D.		
(9111)	134.05	13.50	3.19	3.75	221	37	322		
(11,959)	146.50	14.33	4.48	3.30	262	44	420	1.03	0.45
(14,994)	148.10	14.64	4.22	4.76	321	105	478		
(18,338)	169.41	15.94	5.00	5.11	312	66	498		
(21,441)	178.61	16.81	4.69	3.19	371	73	513		
(22,100)	187.90	16.59	4.76	4.65	379	76	542	2.75	1.25

Oil Additions

Test Distance Kilometers (miles)	Oil Addition Kilogram (lbs)	
5036 (3129)	-0.02 (-0.05)	initial oil fill - 3.83 Kg (8.43 lbs)
5036 (3129)	0.95 (2.10)	final oil drain - 2.81 Kg (6.19 lbs)
9362 (5817)	-0.02 (-0.05)	change in filter wt. - 0.29 Kg (0.64 lbs)
14663 (9111)	-0.02 (-0.05)	
19029 (11824)	-0.08 (-0.18)	
19029 (11824)	0.41 (0.90)	
24131 (14994)	-0.02 (-0.05)	
29512 (18338)	-0.02 (-0.05)	
29512 (18338)	0.32 (0.71)	
33769 (20983)	-0.07 (-0.15)	
Total Additions	1.42 (3.13)	


F-33

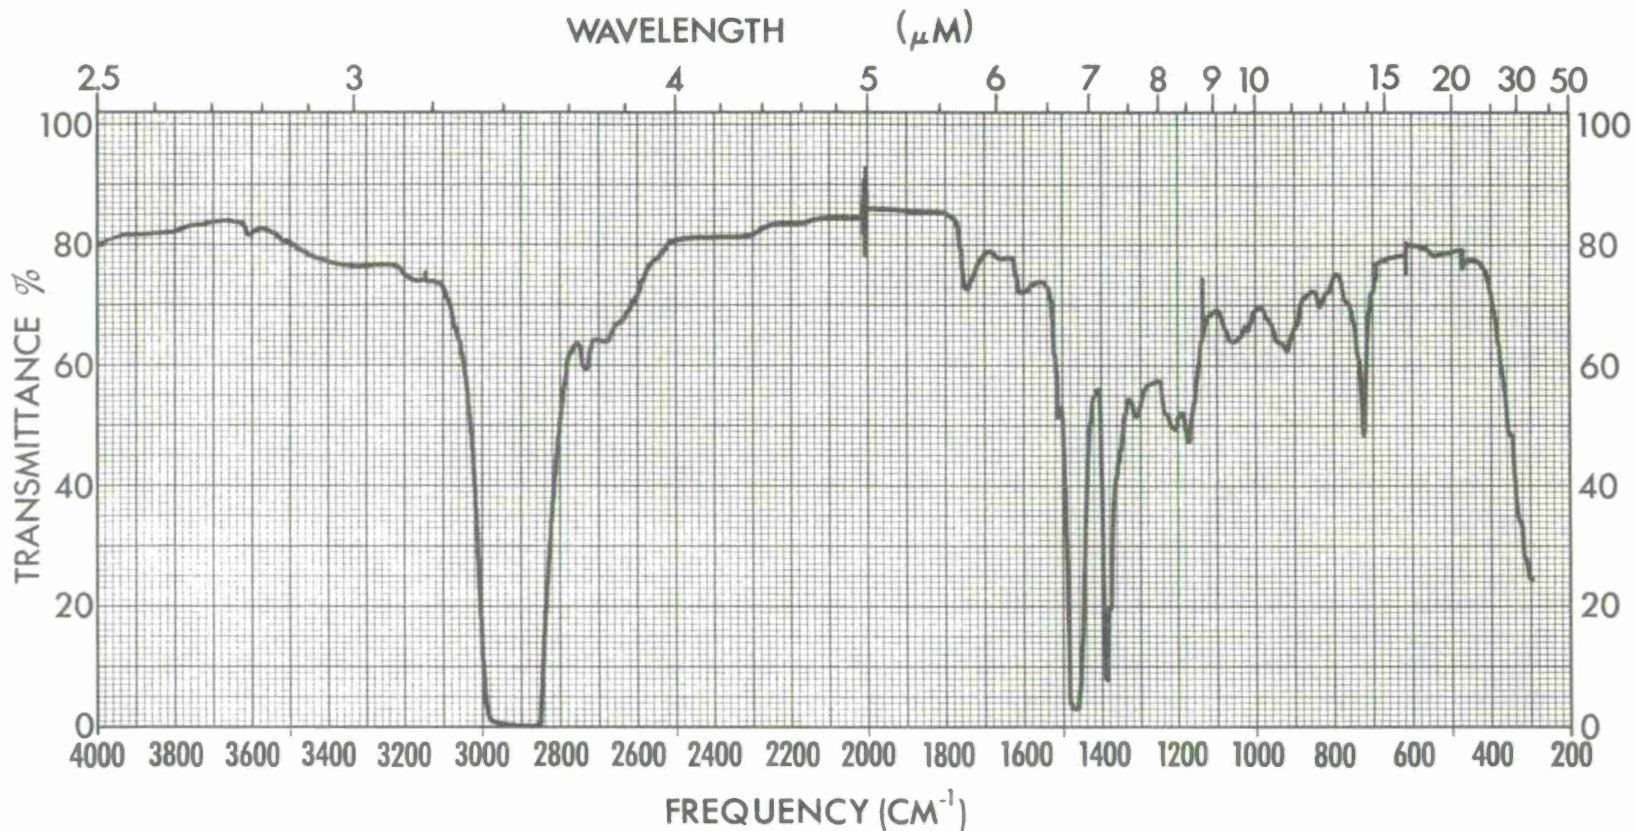

SPECTRUM NO. <u>569</u>	ORIGIN _____	LEGEND _____	REMARKS _____
SAMPLE <u>REO-203</u>		1. _____	
<u>NEW</u>	PURITY _____	2. _____	
	PHASE _____	DATE <u>12-16-74</u>	
	THICKNESS <u>.05</u>	OPERATOR <u>D.B.</u>	

SPECTRUM NO. \_\_\_\_\_  
SAMPLE \_\_\_\_\_


F-34

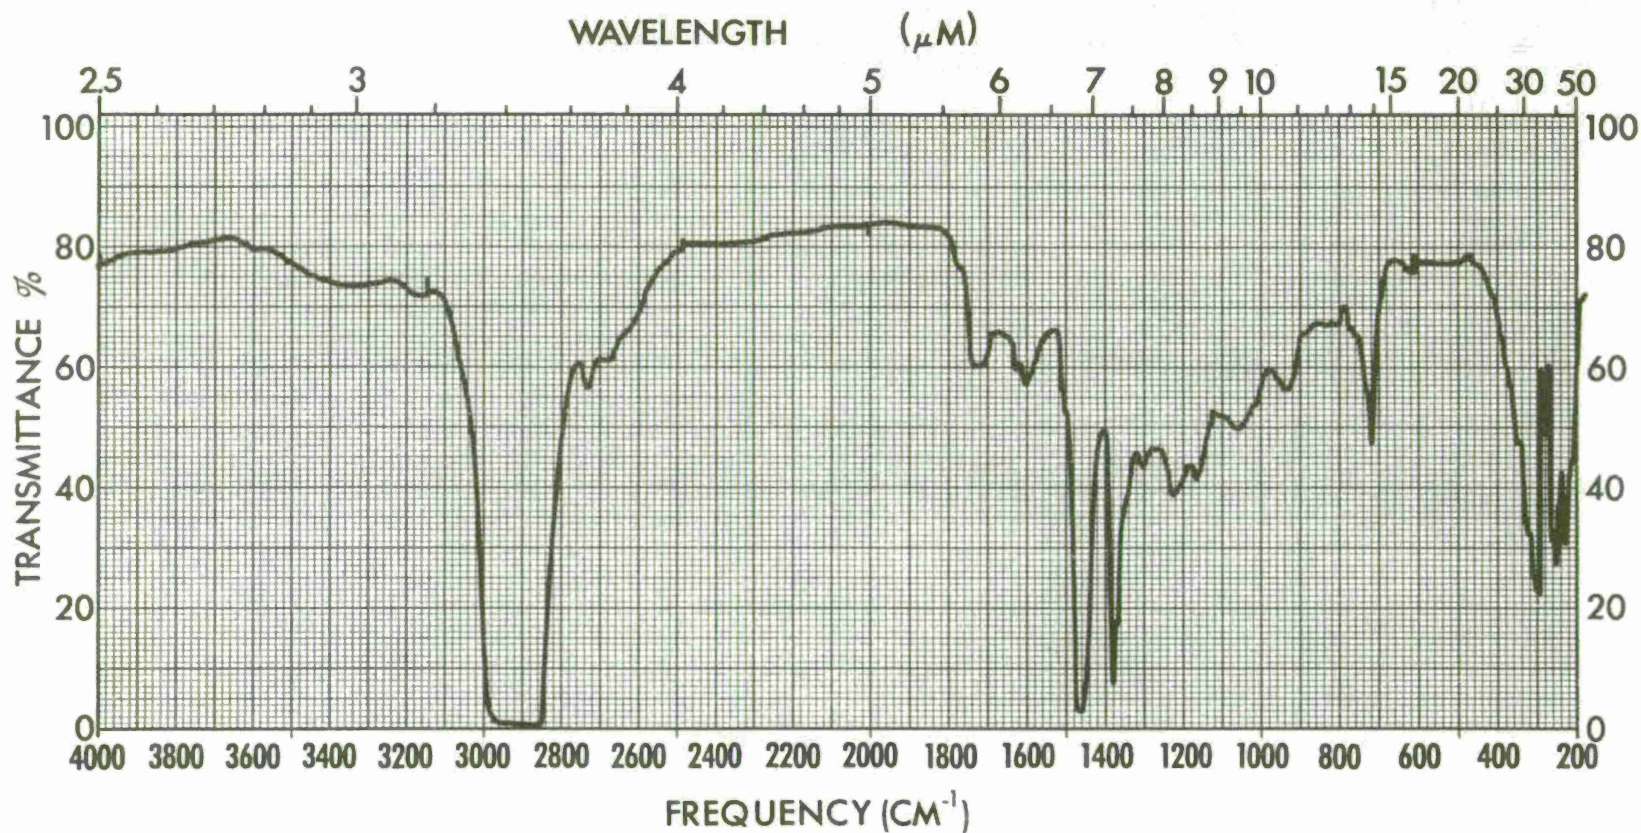

SPECTRUM NO. <u>662</u>	ORIGIN _____	LEGEND _____	REMARKS _____
SAMPLE <u>Low-Blowby Rings</u>		1. _____	
<u>5-21-75</u>	PURITY _____	2. _____	
<u>11,959.4 miles</u>	PHASE _____	DATE <u>5-30-75</u>	
	THICKNESS <u>.05</u>	OPERATOR <u>D.B.</u>	

SPECTRUM NO. \_\_\_\_\_  
SAMPLE \_\_\_\_\_


F-35

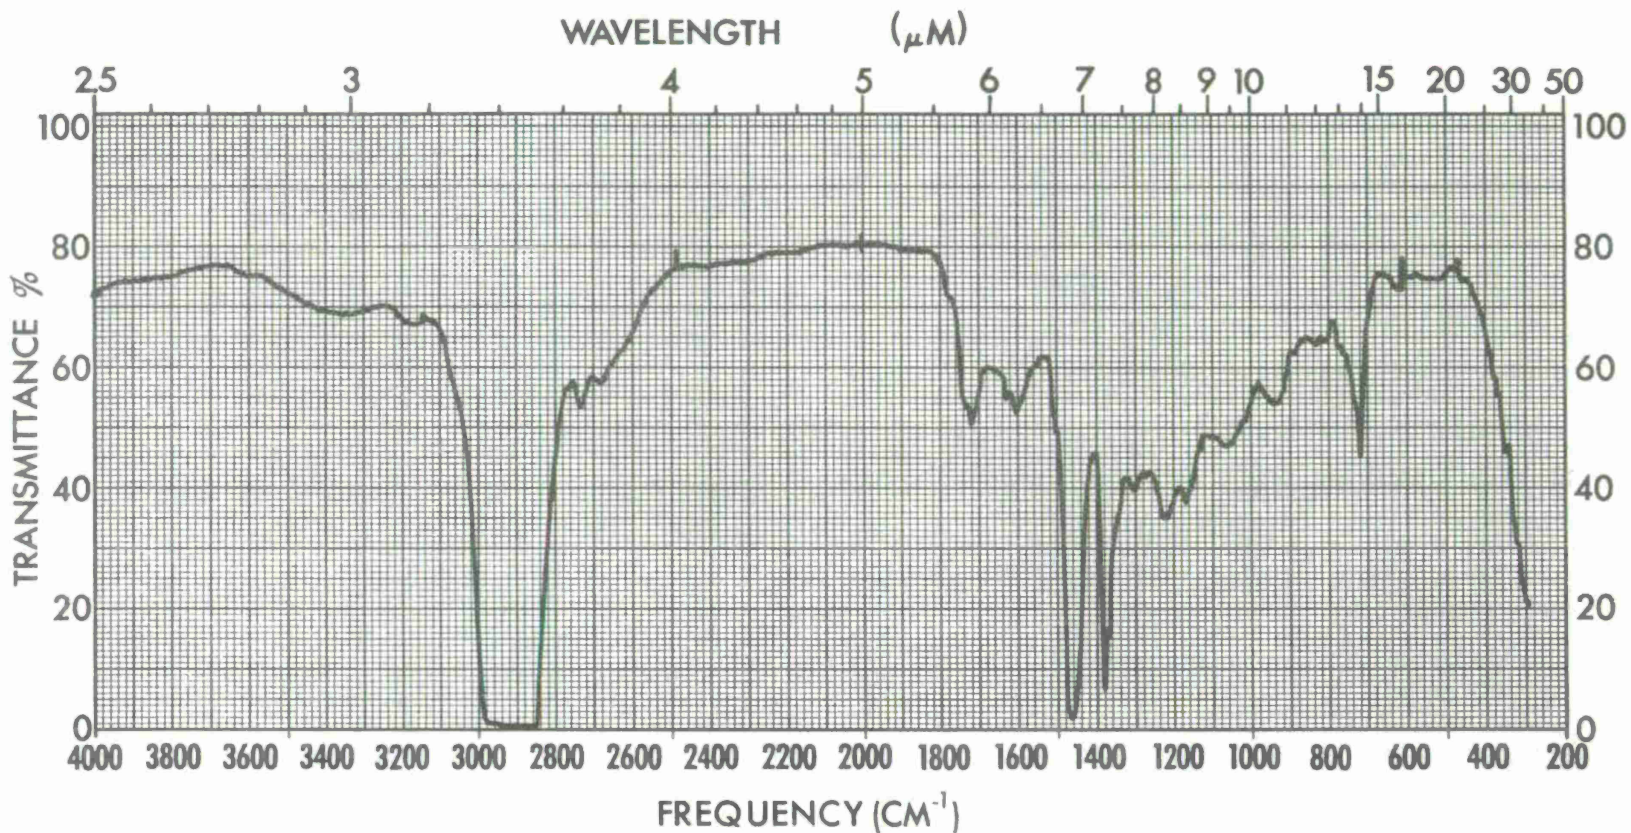

SPECTRUM NO. <u>666</u>	ORIGIN _____	LEGEND _____	REMARKS _____
SAMPLE <u>Low-Blowby Rings</u>	_____	1. _____	_____
<u>6-4-75</u>	PURITY _____	2. _____	_____
<u>14,994 miles</u>	PHASE _____	DATE <u>6-6-75</u>	_____
_____	THICKNESS _____	OPERATOR <u>D.B.</u>	_____

SPECTRUM NO. \_\_\_\_\_  
SAMPLE \_\_\_\_\_


F-36

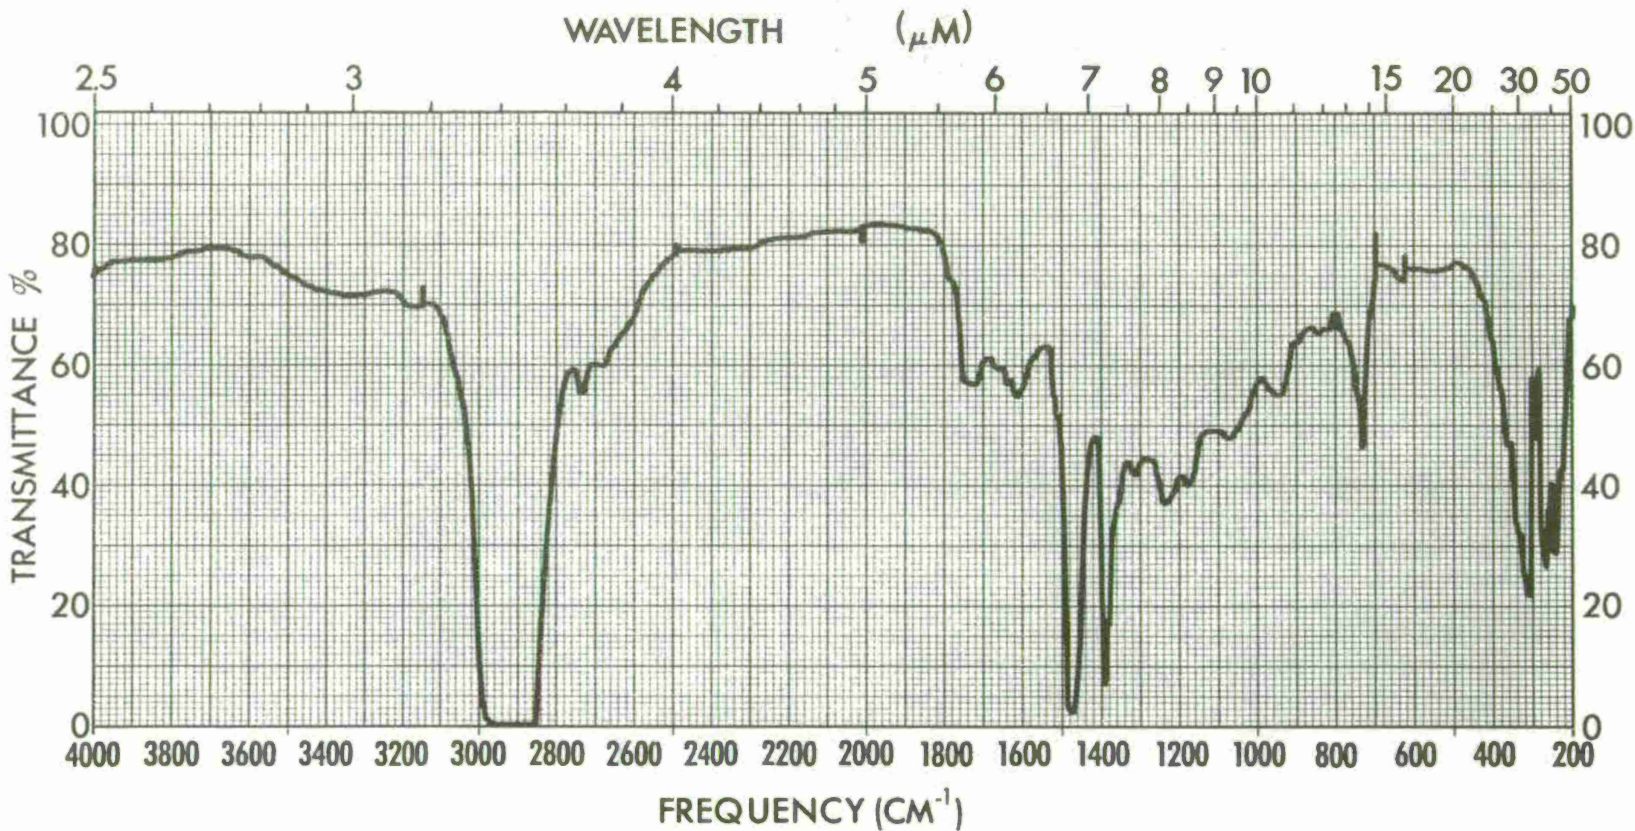

SPECTRUM NO. <u>672</u>	ORIGIN _____	LEGEND _____	REMARKS _____
SAMPLE <u>Low-Blowby Rings</u>		1. _____	
<u>18,338.3 miles</u>	PURITY _____	2. _____	
<u>6-16-75</u>	PHASE _____	DATE <u>6-18-75</u>	
	THICKNESS <u>.05</u>	OPERATOR <u>D.B.</u>	

SPECTRUM NO. \_\_\_\_\_  
SAMPLE


F-37

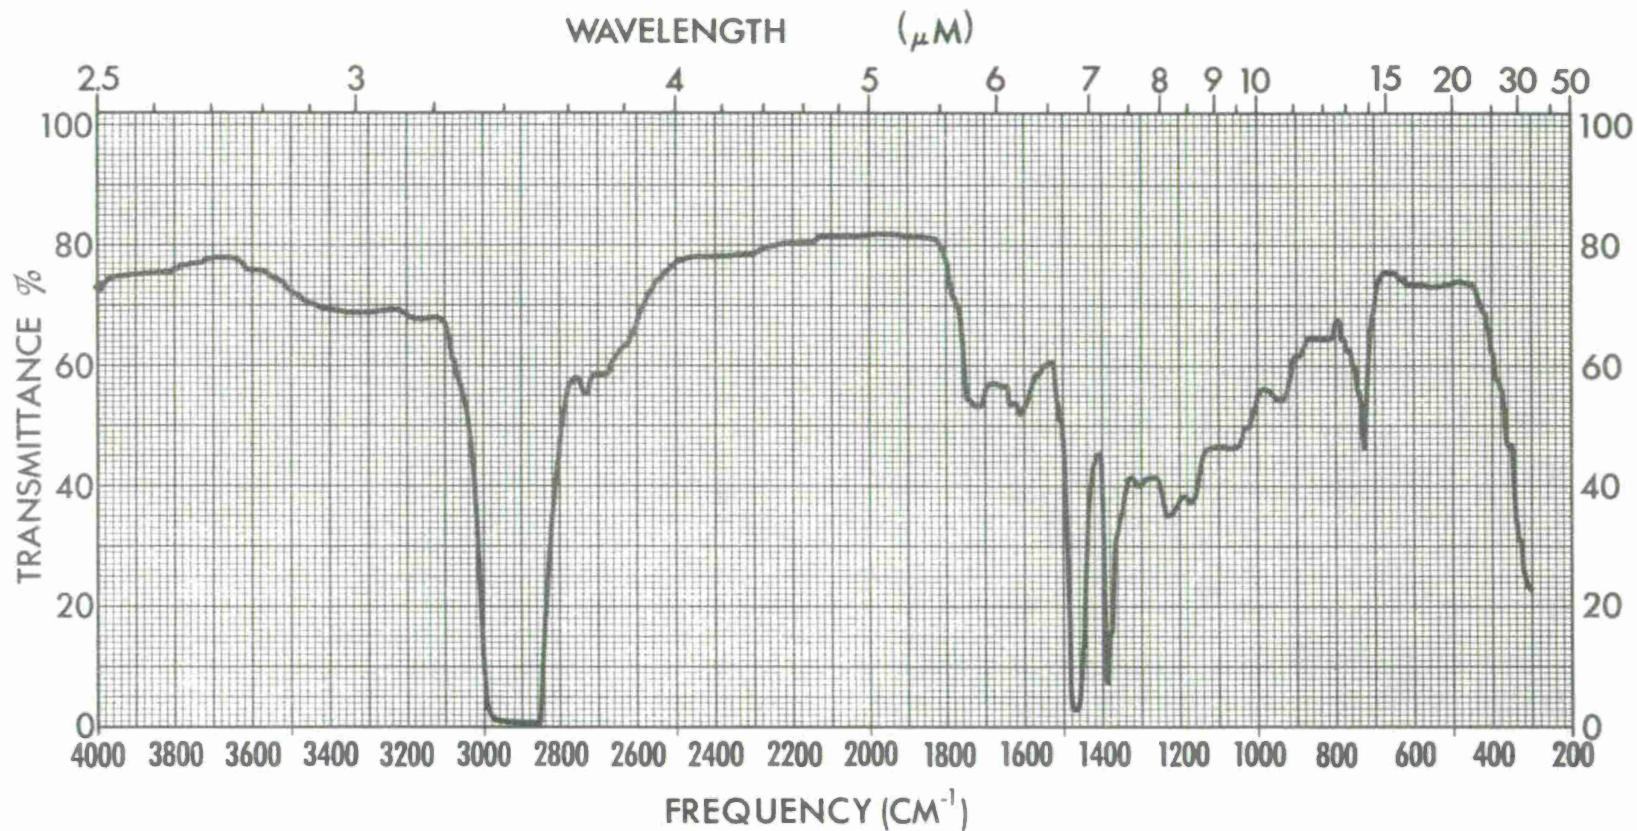

SPECTRUM NO. <u>674</u>	ORIGIN _____	LEGEND _____	REMARKS _____
SAMPLE <u>Low-Blowby Rings</u>	_____	1. _____	_____
<u>21,441 miles</u>	PURITY _____	2. _____	_____
<u>6-26-75</u>	PHASE _____	DATE <u>7-1-75</u>	_____
_____	THICKNESS <u>.05</u>	OPERATOR <u>D.B.</u>	_____

SPECTRUM NO. \_\_\_\_\_  
SAMPLE \_\_\_\_\_

F-38

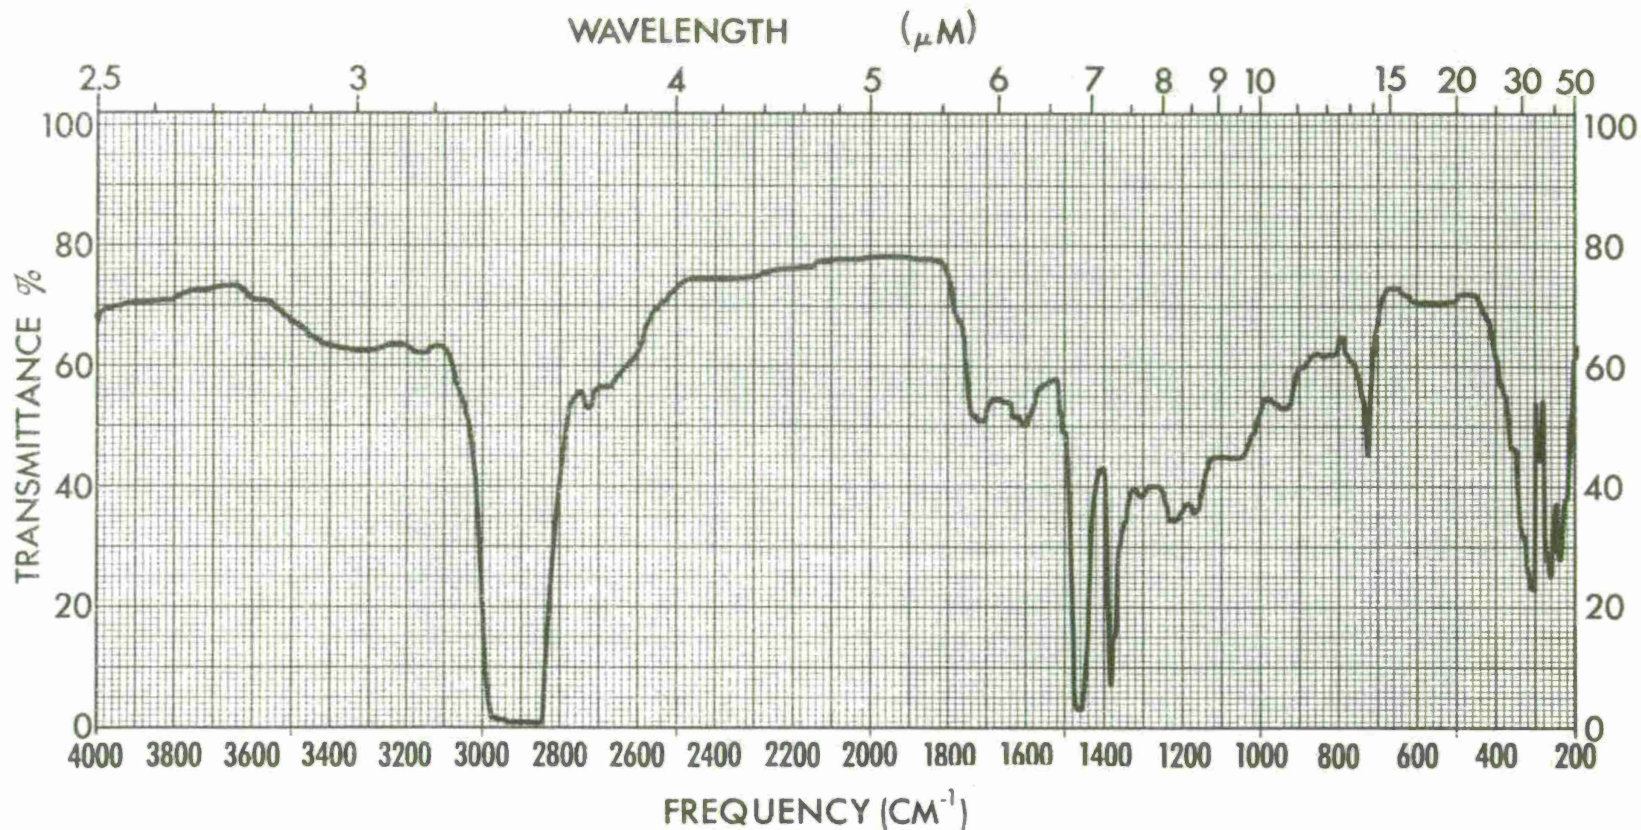

SPECTRUM NO. <u>676</u>	ORIGIN _____	LEGEND _____	REMARKS _____
SAMPLE <u>Low-Blowby Rings</u>		1. _____	
<u>Final, 22,100 miles</u>	PURITY _____	2. _____	
	PHASE _____	DATE <u>7-1-75</u>	
	THICKNESS <u>.05</u>	OPERATOR <u>D.B.</u>	

SPECTRUM NO. \_\_\_\_\_  
SAMPLE \_\_\_\_\_

35,560 Kilometer Road Test - M151 Vehicles  
Low Blowby Piston Rings

List of Unscheduled Repairs

<u>Kilometers (Miles)</u>	<u>Fault</u>
3,070 (1,910)	cracked windshield due to vehicle upset
4,440 (2,760)	rear shock absorbers
14,365 (8,928)	replaced transmission--broken cluster gear
15,100 (9,385)	carburetor replaced
19,455 (12,090)	replaced left rear U-joint
23,460 (14,580)	repaired exhaust pipe clamp
25,070 (15,580)	replaced battery
25,520 (15,860)	replaced tire
26,935 (16,740)	replaced rear U-joints

Road Octane Determinations

<u>Kilometers (Miles)</u>	<u>Octane No.</u>
New	81
12,870 (8000)	87
25,740 (16,000)	87
35,560 (22,100)	83

M151 Road Test  
Low Blowby Piston Rings

Piston Ring End Gap Measurements

Piston Ring		centimeters (inches)			
		Piston No.			
		1	2	3	4
Top Ring	before	.048(.019)	.056(.022)	.051(.020)	.056(.022)
	after	.058(.023)	.071(.028)	.066(.026)	.069(.027)
	change	.010(.004)	.015(.006)	.015(.006)	.013(.005)
Second Ring, Top	before	.033(.013)	.043(.017)	.046(.018)	.041(.016)
	after	.043(.017)	.011(.024)	.061(.024)	.051(.020)
	change	.010(.004)	.018(.007)	.015(.006)	.010(.004)
Second Ring, Bottom	before	.046(.018)	.043(.017)	.041(.016)	.038(.015)
	after	.053(.021)	.056(.022)	.058(.023)	.056(.022)
	change	.008(.003)	.013(.005)	.018(.007)	.018(.007)

M-151 Road Test  
Low Blowby Piston Rings

Piston and Cylinder Bore Measurements

		Piston No.			
		1	2	3	4
		Cylinder Bore, cm (in.)			
<i>1.11 cm from Top</i>					
Transverse	before	9.8478 (3.8771)	9.8471 (3.8768)	9.8471 (3.8768)	9.8463 (3.8765)
	after	9.8491 (3.8776)	9.8489 (3.8775)	9.8489 (3.8775)	9.8476 (3.8770)
	change	0.0013 (0.0005)	0.0018 (0.0007)	0.0018 (0.0007)	0.0013 (0.0005)
Longitudinal	before	9.8461 (3.8764)	9.8473 (3.8769)	9.8471 (3.8768)	9.8450 (3.8760)
	after	9.8489 (3.8775)	9.8486 (3.8774)	9.8491 (3.8776)	9.8466 (3.8766)
	change	0.0028 (0.0011)	0.0013 (0.0005)	0.0020 (0.0008)	0.0015 (0.0006)
<i>5.87 cm from Top</i>					
Transverse	before	9.8471 (3.8768)	9.8455 (3.8762)	9.8458 (3.8763)	9.8453 (3.8761)
	after	9.8483 (3.8773)	9.8476 (3.8770)	9.8478 (3.8771)	9.8471 (3.8768)
	change	0.0013 (0.0005)	0.0020 (0.0008)	0.0020 (0.0008)	0.0018 (0.0007)
Longitudinal	before	9.8455 (3.8762)	9.8466 (3.8766)	9.8466 (3.8766)	9.8440 (3.8756)
	after	9.8463 (3.8765)	9.8471 (3.8768)	9.8471 (3.8768)	9.8448 (3.8759)
	change	0.0008 (0.0003)	0.0005 (0.0002)	0.0005 (0.0002)	0.0008 (0.0003)
<b>Piston Diameter (T-AT) cm (in.)</b>					
Bottom of oil ring	before	9.8405 (3.8742)	9.8384 (3.8734)	9.8410 (3.8744)	9.8405 (3.8742)
	after	9.8379 (3.8732)	9.8364 (3.8726)	9.8367 (3.8727)	9.8369 (3.8728)
	change	0.0025 (0.0010)	0.0020 (0.0008)	0.0043 (0.0017)	0.0036 (0.0014)
Skirt	before	9.8356 (3.8723)	9.8379 (3.8732)	9.8379 (3.8732)	9.8377 (3.8731)
	after	9.8400 (3.8740)	9.8356 (3.8723)	9.8372 (3.8729)	9.8369 (3.8728)
	change	-0.0043 (-0.0017)	0.0023 (0.0009)	0.0008 (0.0003)	0.0008 (0.0003)

**STANDARD COMPUTATION SHEET FOR PISTON RATING**

TEST PROCEDURE Road Test  
 TEST HOURS 22,230 miles  
 TEST LABORATORY \_\_\_\_\_  
 LUBRICANT REO-203

RATER EL DATE 7-9-75  
 LABORATORY TEST NUMBER \_\_\_\_\_  
 STAND NO. \_\_\_\_\_ ENGINE NO. 5029203  
 FUEL AL-5893-G  
 Average rating - groove #2 excluded - 106.9

PISTON NO. 1

NO. 1 GROOVE, VOLUME-%	
PISTON WTD* RATING	103.26

DEPOSIT TYPE	DEPOSIT FACTOR	GROOVES								LANDS								UNDER-CROWN	
		NO. 1		NO. 2		NO. 3		NO. 4		NO. 1		NO. 2		NO. 3		NO. 4		AREA-%	DEMERIT
		AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT
CARBON	HC	1.00								75	75								
	MHC	0.75																	
	MC	0.50																	
	LC	0.25																	
	VLC	0.15																	
	CARBON RATING																		
VARNISH	BV	0.100	80	8.00								10	1.0						
	DBrV	0.075	20	1.50								20	1.50	50	3.75				
	AV	0.050				50	2.50					30	1.50	50	2.50			50	2.50
	LAV	0.025				50	1.25					40	1.00					50	1.25
	VLAV	0.010																	
	RV	0.001								10	.01								
	VARNISH RATING																		
CLEAN	0								15	0									
ZONAL RATING																			
LOCATION FACTOR																			
WEIGHTED RATING			9.5		N.R.		3.75			75.01		5.00		6.25					

\*WEIGHTED TOTAL DEPOSITS

N.R. - not rated

**STANDARD COMPUTATION SHEET FOR PISTON RATING**

TEST PROCEDURE Road Test  
 TEST HOURS 22,230 miles  
 TEST LABORATORY \_\_\_\_\_  
 LUBRICANT REO-203

RATER EL DATE 7-9-75  
 LABORATORY TEST NUMBER \_\_\_\_\_  
 STAND NO. \_\_\_\_\_ ENGINE NO. 5029203  
 FUEL AL-5893-G

PISTON NO. 2

NO. 1 GROOVE, VOLUME-%	
PISTON WTD* RATING	115.75

DEPOSIT TYPE	DEPOSIT FACTOR	GROOVES								LANDS								UNDER-CROWN	
		NO. 1		NO. 2		NO. 3		NO. 4		NO. 1		NO. 2		NO. 3		NO. 4		AREA-%	DEMERIT
		AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT		
CARBON	HC	1.00								75	75.0								
	MHC	0.75																	
	MC	0.50																	
	LC	0.25																	
	VLC	0.15																	
	CARBON RATING																		
VARNISH	BV	0.100	100	10.0								80	8.00						
	DbrV	0.075			100	7.50						20	1.50	100	7.50			50	3.75
	AV	0.050																	2.50
	LAV	0.025																	
	VLAV	0.010																	
	RV	0.001																	
	VARNISH RATING																		
CLEAN	0								25*	0									
	ZONAL RATING																		
	LOCATION FACTOR																		
	WEIGHTED RATING		10.0		N.R.		7.50			75.0		9.50		7.50				6.25	

\*WEIGHTED TOTAL DEPOSITS

\*rubbed clean by contact with cylinder wall.

N.R. - not rated

F-42

STANDARD COMPUTATION SHEET FOR PISTON RATING

TEST PROCEDURE Road Test  
 TEST HOURS 22,230 miles  
 TEST LABORATORY \_\_\_\_\_  
 LUBRICANT REO-203

RATER EL DATE 7-9-75  
 LABORATORY TEST NUMBER \_\_\_\_\_  
 STAND NO. \_\_\_\_\_ ENGINE NO. 5029203  
 FUEL AL-5893-G

PISTON NO. 3

NO. 1 GROOVE, VOLUME-%	
PISTON WTD* RATING	102.38

DEPOSIT TYPE	DEPOSIT FACTOR	GROOVES								LANDS								UNDER-CROWN	
		NO. 1		NO. 2		NO. 3		NO. 4		NO. 1		NO. 2		NO. 3		NO. 4		AREA-%	DEMERIT
		AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT		
CARBON	HC	1.00								60	60.0								
	MHC	0.75																	
	MC	0.50																	
	LC	0.25																	
	VLC	0.15																	
	CARBON RATING																		
VARNISH	BV	0.100	100	10.0								100	10.0						
	DBrV	0.075				100	7.50			5	0.38			100	7.50			80	6.00
	AV	0.050																20	1.00
	LAV	0.025																	
	VLAV	0.010																	
	RV	0.001																	
	VARNISH RATING																		
CLEAN	0									35 <sup>+</sup>	0								
ZONAL RATING																			
LOCATION FACTOR																			
WEIGHTED RATING			10.0		N.R.		7.50			60.38		10.0		7.50				7.0	

\*WEIGHTED TOTAL DEPOSITS

+ rubbed clean by contact with cylinder wall

N.R. - not rated

**STANDARD COMPUTATION SHEET FOR PISTON RATING**

TEST PROCEDURE Road Test  
 TEST HOURS 22.230 miles  
 TEST LABORATORY \_\_\_\_\_  
 LUBRICANT REG-203

RATER EL DATE 7-9-75  
 LABORATORY TEST NUMBER \_\_\_\_\_  
 STAND NO. \_\_\_\_\_ ENGINE NO. 5029203  
 FUEL AL-5893-G

PISTON NO. 4

NO. 1 GROOVE, VOLUME-%	
PISTON WTD* RATING	106.4

DEPOSIT TYPE	DEPOSIT FACTOR	GROOVES								LANDS								UNDER-CROWN	
		NO. 1		NO. 2		NO. 3		NO. 4		NO. 1		NO. 2		NO. 3		NO. 4		AREA-%	DEMERIT
		AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT	AREA-%	DEMERIT
CARBON	HC	1.00								70	70.0								
	MHC	0.75																	
	MC	0.50																	
	LC	0.25																	
	VLC	0.15																	
	CARBON RATING																		
VARNISH	BV	0.100	100	10.0								50	5.00						
	DBrV	0.075								5	.38	50	3.75	70	5.25			80	6.00
	AV	0.050			50	2.50								30	1.50			10	.50
	LAV	0.025			50	1.25												10	.25
	VLAV	0.010																	
	RV	0.001																	
	VARNISH RATING																		
CLEAN	0								20 <sup>+</sup>	0									
ZONAL RATING																			
LOCATION FACTOR																			
WEIGHTED RATING			10.0		N.R.		3.75			70.38		8.75		6.75				6.75	

\*WEIGHTED TOTAL DEPOSITS

+ wiped clean from contact with cylinder wall

N.R. - not rated

### RING STICKING

Engine Model L-141 "low blowby" Serial No. 5029203 Date 7-9-75  
Fuel AL-5893-G Lubricant REO-203 Observer EL

Piston Number

Ring No.	1	2	3	4		
1	F	F	F	F		
2	F	F	F	F		
3	F	F	F	F		
4						

Indicate by letter - Free or Sluggish, or by number and letter - percent Pinched (cold stuck) or percent Hot stuck

F-45

## RING FACE CONDITION

Engine Model L-141 "low blowby" Serial No. 5029203 Date 7-9-75  
 Fuel AL-5893-G Lubricant REO-203 Observer EL

	Cylinder Number					
	1	2	3	4		
First Ring	N	N	N	N		
Second Ring	N	N	N	N		
Third Ring	N	N	N	N		
Fourth Ring						
Oil Ring Slots—% Open	100	100	100	100		

N-Normal

## PISTON SURFACE DEPOSITS

Engine Model L-141 "Low Blowby" Serial No. 5029203 Date 7-9-75  
 Fuel AL-5893-G Lubricant REO-203 Observer EL

		Piston Number					
		1	2	3	4		
Top*		3.0	3.0	3.0	3.0		
Combustion Chamber*		4.0	4.0	4.0	4.0		
Under Head*		3.75	6.35	7.0	6.75		
Skirts*	Thrust	1.0	.75	.5	.5		
	Anti-Thrust	.5	.5	.5	.5		
Relief Areas*		1.0	.75	.5	.5		
Lands	1	7.5	7.5	6.75	7.38		
	2	4.8	9.5	10.0	8.75		
	3	6.25	7.5	7.50	6.75		
	4						

\*Carbon and Ash: Use Volume Factor  
 Indicate H, M, or S

## PISTON RING GROOVE DEPOSITS

Engine Model L-141 "Low Blowby" Serial No. 5029203 Date 7-9-75  
 Fuel AL-5893-G Lubricant REO-203 Observer EL

		Cylinder Number											
		1		2		3		4					
		CARB	VARN	CARB	VARN	CARB	VARN	CARB	VARN				
Top of Groove*	1	0	0	0	0	0	0	0	0				
	2	0	0	0	0	0	0	0	0				
	3	0	90	0	90	0	40	0	90				
	4												
Back of Groove†	1	0	100	0	100	0	100	0	100				
	2	0	100	0	100	0	100	0	100				
	3	0	100	0	100	0	100	0	100				
	4												
Bottom of Groove*	1	0	0	0	0	0	0	0	0				
	2	0	0	0	0	0	0	0	0				
	3	0	10	0	10	0	10	0	10				
	4												
Drain Holes—% Blocked		0	0	0	0	0	0	0	0				

\*Carbon and Ash: Use Volume Factor  
 Indicate H, M, or S


†Carbon and Ash: Indicate Percent Filled and H, M, or S

## PISTON GROOVE INSIDE DIAMETER-% RING SUPPORTING CARBON

Engine Model L-141 "Low Blowby" Serial No. 5029203 Date 7-9-75  
 Fuel AL-5893-G Lubricant REO-203 Observer EL

Piston Ring	Quadrant	Piston Number					
		1	2	3	4		
1	1	0	0	0	0		
	2	0	0	0	0		
	3	0	0	0	0		
	4	0	0	0	0		
2	1	0	0	0	0		
	2	0	0	0	0		
	3	0	0	0	0		
	4	0	0	0	0		

F-49

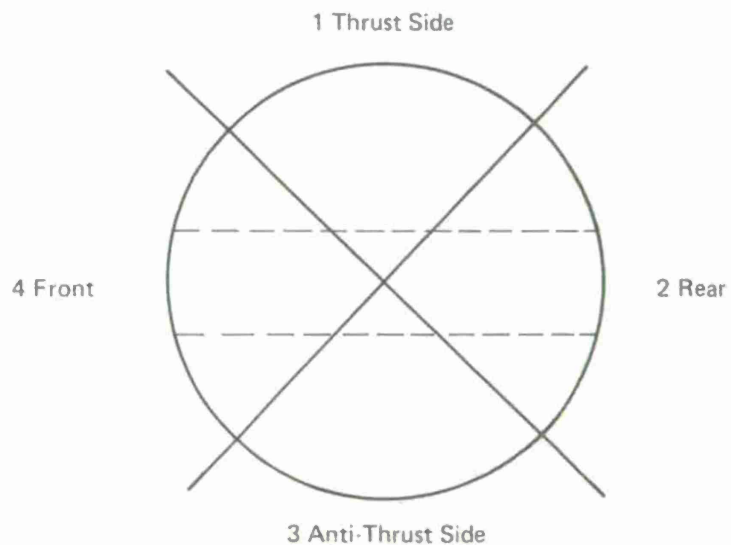

## PISTON SURFACE CONDITION

Engine Model L-141 "Low Blowby" Serial No. 5029203 Date 7-9-75  
 Fuel AL-5893-G Lubricant REO-203 Observer EL

	Piston Number					
	1	2	3	4		
Top Land	X	X	X	X		
Skirt	N	N	N	N		
Piston Pin	N	N	N	N		

X-All top lands wiped clean on anti thrust side.

N-Normal

## VALVE DEPOSITS

Engine Model L-141 "Low Blowby" Serial No. 5029203 Date 7-9-75  
 Fuel AL-5893-G Lubricant REO-203 Observer EL

		Cylinder Number											
		1		2		3		4					
		CARB	VARN	CARB	VARN	CARB	VARN	CARB	VARN				
Head*	INT	1.0	0	1.5	0	1.0	0	1.0	0				
	EXH	1.5	0	1.5	0	1.5	0	1.0	0				
Face	INT	0	5.0	0	6.0	0	5.0	0	5.0				
	EXH	1.0	0	1.0	0	1.0	0	1.0	0				
Tulipt	INT	4.8	0	3.5	0	4.0	0	4.0	0				
	EXH	1.0	0	1.0	0	1.0	0	1.0	0				
Stem	INT	0	0	0	0	0	0	0	0				
	EXH	0	1.5	0	1.0	0	1.0	1.0	0				

\*Carbon and Ash: Use Volume Factor Technique

## VALVE SURFACE CONDITIONS

Engine Model L-141 "Low Blowby" Serial No. 5029203 Date 7-9-75  
 Fuel A1-5893-G Lubricant REO-203 Observer EL

	Intake						Exhaust					
	1	2	3	4			1	2	3	4		
Freeness in Guide	F	F	F	F			F	F	F	F		
Head	N	N	N	N			N	N	N	N		
Face	N	N	N	N			N	N	N	N		
Seat	N	N	N	N			N	N	N	N		
Stem	N	N	N	N			N	N	N	N		
Tip	N	N	N	N			N	N	N	N		

N - normal

F- Free

## TAPPETS, CAMS, AND ROCKER ARMS

Engine Model I-141 "Low Blowby" Serial No. 5029203 Date 7-9-75  
 Fuel AL-5893-G Lubricant REO-203 Observer EL

		Cylinder Number					
			1	2	3	4	
Tappet Deposit	INT	0	0	0	0		
	EXH	0	0	0	0		
Tappet Surface Condition	INJ						
	INT	N	N	N	N		
	EXH	N	N	N	N		
Cam Lobes		N	N	N	N		
Rocker Arms	Tip	INT	N	N	N	N	
		EXH	N	N	N	N	
	Bushing	INT	N	N	N	N	
		EXH	N	N	N	N	
	Shaft	INT	N	N	N	N	
		EXH	N	N	N	N	

N - normal

**CYLINDERS**

Engine Model L-141 "low blowby" Serial No. 5029203 Date 7-9-75  
 Fuel AL-5893-G Lubricant REO-203 Observer EL

		Cylinder Number											
		1		2		3		4					
Deposits Cylinder Head		CARB	VARN	CARB	VARN	CARB	VARN	CARB	VARN				
		4.0	0	4.0	0	4.0	0	4.0	0				
Cylinders	ART	0	5.0	0	5.0	0	4.0	0	4.0				
	RTA	0	0	0	0	0	0	0	0				
	BRT	0	0	0	0	0	0	0	0				
Surface Condition		N	N	N	N	N	N	N	N				
Cylinders	RTA	N	N	N	N	N	N	N	N				
	BRTA	N	N	N	N	N	N	N	N				

Carbon and Ash: Use Volume Factor  
 Indicate H, M, or S

F-54

## SURFACE CONDITION

Engine Model L-141 "Low Blowby" Serial No. 5029203 Date 7-9-75  
 Fuel A1-5893-G Lubricant REO-203 Observer EL

Bearing No.	1	2	3	4			
Main-Bearing	MW	LW	MW				
	N	N	N				
Rod-Bearing	LW	LW	LMW	LMW			
	N	N	N	N			
Piston Pin	N	N	N	N			
Bushing	N	N	N	N			

Note surface condition.

L - light  
 W - wear  
 M - medium  
 N - Normal

All wear on main bearing on bottom except LW top #1.

All wear on con rod bearing on top except #1 has LW on bottom.

## SLUDGE DEPOSITS

Engine Model L-141 "Low Blowby" No. 5029203 Date 7-9-75  
 Fuel AL-5893-G Lubricant REO-203 Observer EL

	Rating
Connecting Rods	.5
Rocker Arm Covers	.5
Top Deck	.5
Push Rod Covers	.5
Push Rod Chamber	.5
Timing Gear Cover	.5
Oil Pan	.5
Oil Screen	0

Use CRC Volume Factor Technique.




L-141 ENGINE, LOW-BLOWBY RINGS ANTI-THRUST SIDE

F-57




L-141 ENGINE, LOW-BLOWBY RINGS THRUST SIDE

F-58

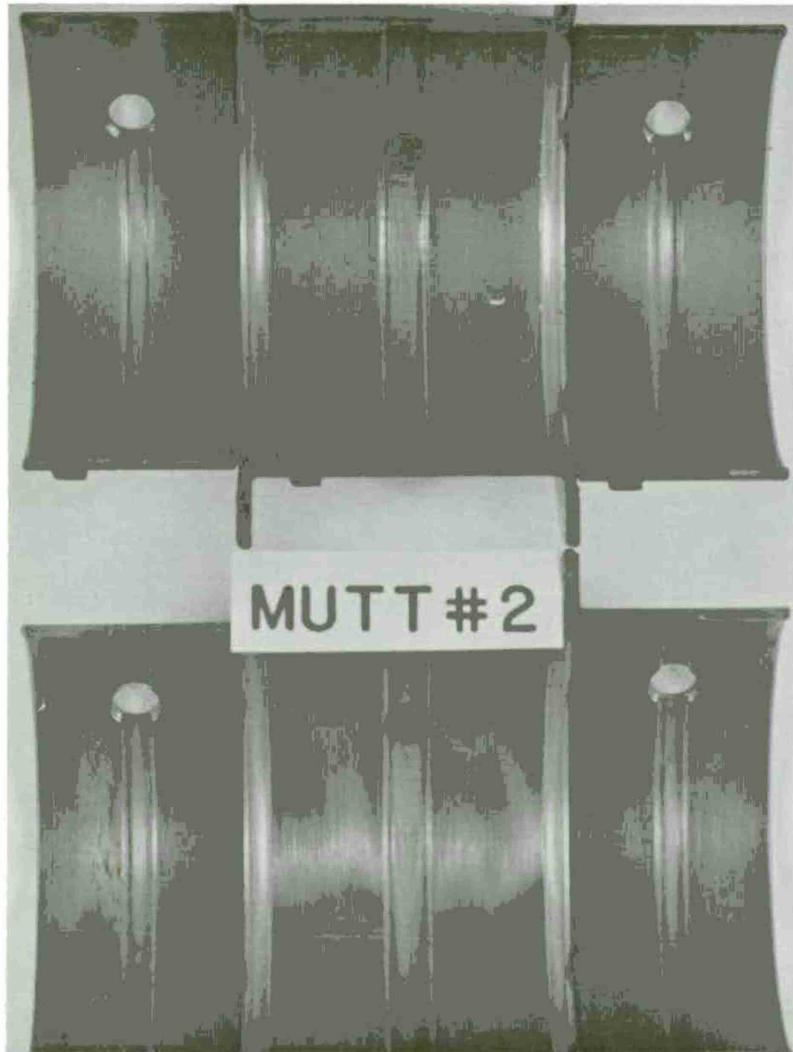

LOW-BLOWBY RING-EQUIPPED ENGINE  
MAIN BEARINGS

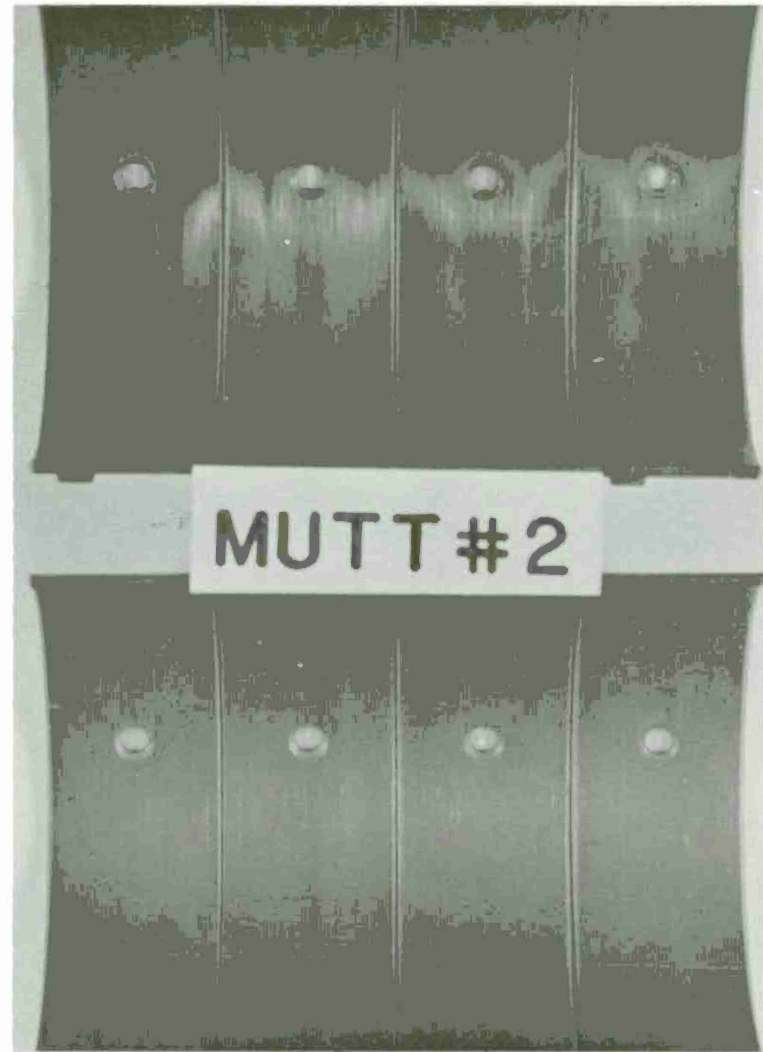

LOW-BLOWBY RING-EQUIPPED ENGINE  
CONNECTING ROD BEARINGS

## DISTRIBUTION LIST

	No. of Copies		No. of Copies
<i>Department of Defense</i>			
Defense Documentation Center Cameron Station Alexandria, Virginia 22314	12	Director of Defense Research & Engineering (OSD) Attn: Dep Dir/Research & Technology Washington, D.C. 20301	1
Defense Fuel Supply Center Attn: DFSC-TC Office of Technical Services Cameron Station Alexandria, Virginia 22314	3	Office of the Assistant Secretary of Defense Attn: Technical Advisory Panel on Fuels & Lubricants Washington, D.C. 20301	1
<i>Department of the Army--Technical Services</i>			
Commander U.S. Army Materiel Development and Readiness Command 5001 Eisenhower Road Attn: DRCRD-TC DRCMA-Y DRCSU-I Alexandria, Virginia 22333	1 1 1	Commander Army Logistics Management Center Ft. Lee, Virginia 23801	1
Commander U.S. Army Armament Command Attn: DRSAR-RE DRSAR-SM DRSAR-PP Rock Island, Illinois 61201	1 1 1	Commander U.S. Army Munitions Command Picatinny Arsenal Attn: SMUPA-D Dover, New Jersey 07801	1
Commander U.S. Army Missile Command Attn: DRSMI-RSM Redstone Arsenal, Alabama 35809	1	Commander Frankford Arsenal Attn: SMUFA-L6000 SMUFA-L1000 Library, C2500 Philadelphia, Pennsylvania 19317	1 1 1
Commander Anniston Army Depot Attn: Chemical Laboratory Anniston, Alabama 36202	1	Commander White Sands Missile Range Attn: STEWS-AD-L (Technical Library) White Sands, New Mexico 88002	1
USAGMPA Petroleum Field Office (East) Attn: STSGP-PE, Bldg 85-3 New Cumberland Army Depot New Cumberland, Pennsylvania 17070	1	Commander U.S. Army Mobility Equipment Research & Development Command Attn: DRXFB-GL Fort Belvoir, Virginia 22060	10
Commander USAGMPA Petroleum Field Office (West) Attn: DRXGP-SW Sharpe Army Depot Lathrop, California 95330	1	Commander Corpus Christi Army Depot Naval Air Station Attn: DRSAC-Q Corpus Christi, Texas 78419	1
Commander U.S. Army Tank-Automotive Command Attn: DRSTA-RKMT DRSTA-RGP DRSTA-RGL DRSTA-RGR DRSTA-MVC Warren, Michigan 48090	1 3 1 3 1		

No. of  
Copies

No. of  
Copies

*Department of the Army—Technical Services (Cont'd)*

Commander U.S. Army Foreign Science & Technology Center Federal Bldg Attn: DRXST-GE Charlottesville, Virginia 22901	1	Commander U.S. Army Chemical Research & Development Laboratories Attn: Directorate of Weapons Systems (SMUCR-WS) Edgewood Arsenal, Aberdeen Proving Ground, Maryland 21010	1
U.S. Army Ordnance Center and School Attn: ATSL-CTD-MS-A Aberdeen Proving Ground, Maryland 21005	1	Commander U.S. Army Arctic Test Activity APO 731 Seattle, Washington 98731	1
Commander U.S. Army Materials & Mechanics Research Center Attn: DRXMR-TMS Watertown, Massachusetts 02172	1	Commander U.S. Army Alaska Support Command Attn: ARCL-Q APO Seattle, Washington 98749	1
Commander U.S. Army Troop Support Command 4300 Goodfellow Blvd Attn: Technical Library ASMSTS-O ASMSTS-RE St. Louis, Missouri 63120	1 1 1	Commander U.S. Army CDC Supply Agency Material Requirements Division Attn: CDCSA-R Fort Lee, Virginia 23801	1
Director Materiel Test Directorate Building 400 Aberdeen Proving Ground, Maryland 21005	1	President U.S. Army Armor & Engineer Board Attn: STEBB-EN Fort Knox, Kentucky 40121	1
Technical Library Aberdeen Proving Ground, Maryland 21005	1	Commander Yuma Proving Ground Attn: STEYP-MTS STEYP-MTM STEYP-MLS Yuma, Arizona 85369	1 1 1 1
Deputy Chief of Staff Research & Development Army Department of the Army Attn: DAMA-CSS Washington, D. C. 20310	1	Corp of Engineers Washington Aqueduct Division 5900 MacArthur Blvd Washington, D. C. 20315	1
Commander U.S. Army Research Office (Durham) Box CM, Duke Station Durham, North Carolina 27706	1	Commander U.S. Army Maintenance Management Center Attn: DRXMD-T Lexington, Kentucky 40507	1

*Department of the Navy*

Commander U.S. Naval Air Systems Command Attn: AIR 53451B AIR 5365 Washington, D. C. 20360	1 1	Commander Naval Ordnance Systems Command Attn: Technical Library (ORD-9132) Washington, D. C. 20360	2
Commander Naval Air Development Center Code MACO Warminster, Pennsylvania 18974	1	Director U.S. Naval Research Laboratory Attn: Code 6200 Code 6180 Washington, D. C. 20390	1 1

	No. of Copies		No. of Copies
<i>Department of the Navy (Cont'd)</i>			
Superintendent U.S. Naval Post Graduate School Attn: Technical Reports Section Monterrey, California 93940	1	Naval Ship Engineering Center Department of the Navy Attn: SEC 6101E Washington, D. C. 20360	1
Commander U.S. Naval Air Station Overhaul & Repair Department North Island San Diego, California 92135	1	Commander Naval Ship Engineering Center Code 6101F, Center Bldg Prince George's Center Hyattsville, Maryland 20782	1
Commander U.S. Naval Civil Engineering Laboratory Port Hueneme, California 93041	1	Commander Naval Ship R&D Center Annapolis Laboratory Code 2831 Attn: Technical Library Annapolis, Maryland 21402	1 1
Commander U.S. Marine Corps Attn: Code AX Code A04H Washington, D. C. 20380	1 1	Commander Naval Facilities Engineering Command Transportation Maintenance Management Branch Attn: Code 10332 Washington, D. C. 20390	1
<i>Department of the Air Force</i>			
Commander Air Force Materials Laboratory (AFSC) Attn: AFML/SFF Wright-Patterson Air Force Base, Ohio 45433	2	Headquarters U.S. Air Force (RDPS) Washington, D. C. 20310	1
Commander Headquarters San Antonio Air Material Area Attn: SAAMA (SAOQ) Kelly Air Force Base, Texas 78241	1	Commander Air Force Air Propulsion Laboratory Attn: AFML/MBT Wright-Patterson Air Force Base, Ohio 45433	1
<i>Other Government Agencies</i>			
Scientific & Technical Information Facility P. O. Box 33 Attn: NASA Representative (SAK/DL) College Park, Maryland 20740	1	Mr. Roy D. Quillian, Jr., Technical Director U.S. Army Fuels & Lubricants Research Laboratory Southwest Research Institute 8500 Culebra Road San Antonio, Texas 78284	3
Federal Aviation Administration 800 Independence Avenue, S. W. Attn: Administrative Standards Division (MS-110) Washington, D. C. 20590	2	Project Coordinator Bartlesville Energy Research Center U.S. Energy Research & Development Administration P. O. Box 1398 Bartlesville, Oklahoma 74003	2
Mr. Wayne A. Cutrell Environmental Protection Agency Durham Contract Operations Mail Stop DCO-6 Research Triangle Park, N. C. 27711	1		