

ADA 027430

HF CHANNEL SIMULATION

FINAL REPORT

PART 2

Contract No. N00014-74-C-0048

Prepared for

NAVAL RESEARCH LABORATORY
Washington, D.C. 20375

Prepared by


CNR, Inc.
20 Wells Avenue
Newton, Massachusetts 02159

Sponsored by

OFFICE OF NAVAL RESEARCH
With Naval Research Laboratory as Scientific Officer

Copy available to DDC does not
permit fully legible reproduction

CNR Report No. 14-2
31 March 1975

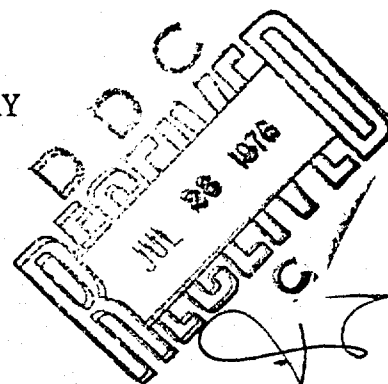

510,877

12

See 1473

HF CHANNEL SIMULATION

FINAL REPORT
PART 2

Contract No. N00014-74-C-0048

Prepared for



NAVAL RESEARCH LABORATORY
Washington, D.C. 20375

Prepared by

CNR, Inc.
20 Wells Avenue
Newton, Massachusetts 02159

Sponsored by

OFFICE OF NAVAL RESEARCH
With Naval Research Laboratory as Scientific Officer

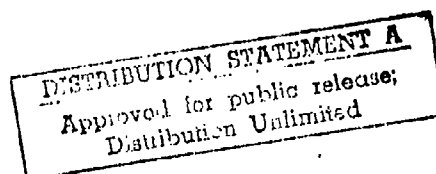

Copy available to DDC does not
permit fully legible reproduction

CNR Report No. 14-2
31 March 1975

ABSTRACT

The process of probing and measuring an HF channel for use in a stored channel simulator will prove useful only when the investigator has some knowledge of the channel conditions. Of particular interest are the channel Doppler characteristics and multipath structure. The operations required to provide a measure of these parameters include: (1) complex channel reconstruction; (2) pre-filtering to improve delay resolution; (3) channel snapshot generation; and (4) Doppler estimation. A set of flexible Fortran programs which meet these specifications are described in detail. Software verification is achieved by means of a program generated single sideband HF test channel. In addition, programming changes to the previously reported channel measurement and reproduction software are documented. These result in significant decreases in computation time.

CONTENTS

<u>Section</u>		<u>Page</u>
1	INTRODUCTION AND REPORT SUMMARY	1-1
2	CHANNEL MEASUREMENT AND CHANNEL PLAYBACK SOFTWARE MODIFICATIONS	2-1
	2.1 Channel Measurement Software	2-1
	2.2 Channel Playback Software	2-4
3	DELAY SPREAD AND DOPPLER WIDTH CHARACTERIZATION OF CHANNEL MEASUREMENT RECORDINGS	3-1
	3.1 System Background	3-1
	3.2 Software	3-4
	3.3 Software Verification (Basic Programs)	3-13
	3.4 Test Examples	3-18
APPENDIX A	PROGRAM LISTINGS	A-1

RTIS	1-1-1
DD	1-1-1
UNANNOUNCED	
JUSTIFICATION	
BY	
DISTRIBUTION/AVAILABILITY CODES	
DATE	AVAIL. 08/12/81
A	

ILLUSTRATIONS

<u>Figure</u>		<u>Page</u>
2.1	Overlay Structure for PLAY11	2-7
3.1	Combined Spectral Shape of NRL Transceiver and Probing Signal	3-2
3.2	Spectral Shape Used to Improve Delay Resolution	3-2
3.3	Software Block Diagram	3-5
3.4	Hilbert Transformer Test	3-7
3.5	Spectral Response of Single Sideband Extractor (Linear Scale)	3-8
3.6	Spectral Response of Single Sideband Extractor (Log Scale)	3-9
3.7	Window Overlap During Doppler Estimation Process	3-12
3.8	Test Channel Generation	3-14
3.9	FFT Magnitude of 14 th Snapshot of RECSCF Output (Two-Path Model with Doppler)	3-22
3.10	FFT Magnitude of 14 th Snapshot of RECSCF Output (Two-Path Model without Doppler)	3-24
3.11	Tap Power Summed Over 1410 Snapshots for First Test Example (RECSCF Output)	3-25
3.12(a)	Doppler Power vs. Delay Power, -17.65 to -0.551 Hz (First Test Example)	3-26
3.12(b)	Doppler Power vs. Delay Power, 0 Hz to 17.095 Hz (First Test Example)	3-27
3.13	Statistical Summary of First Test Example (DDSTAT Output)	3-28
3.14	Marginal Delay Power in dB for First Test Example (Each tap separated by 0.111 sec)	3-31

ILLUSTRATIONS (Continued)

<u>Figure</u>		<u>Page</u>
3.15	Marginal Doppler Power for First Test Example	3-31
3.16	Tap Power Summed Over 2100 Snapshots for Second Test Example (RECSCF Output)	3-34
3.17(a)	Doppler Power vs. Delay Power, -17.65 to -0.551 Hz (Second Test Example)	3-35
3.17(b)	Doppler Power vs. Delay Power, 0 Hz to 17.095 Hz (Second Test Example)	3-36
3.18	Statistical Summary of Second Test Example (DDSTAT Output)	3-37
3.19	Marginal Delay Power (Second Test Example)	3-40
3.20	Marginal Doppler Power (Second Test Example)	3-40

TABLES

<u>Table Number</u>		<u>Page</u>
3-1	Summary of Programs Required for Test Example	3-19
3-2	Two-Path Test Data Summary	3-21
3-3	Three-Path Test Data Summary	3-32

SECTION 1

INTRODUCTION AND REPORT SUMMARY

The results of probing and measuring an HF channel can be employed, ostensibly, to test communications systems over actual channels without resorting to full field experiment. If tests are conducted with the results of many channel soundings, a comprehensive picture of total system performance may evolve. Critical to this evaluation, however, is an awareness of the characteristics of the measured channel. Specifically, channel definition by means of its multipath structure and Doppler width is important.

In Section 3 of this report, we describe a software system capable of reducing the data on a channel probing tape to a meaningful set of parameter values. These include delay power density, Doppler power density, rms multipath spread, rms Doppler spread, and mean Doppler shift. In addition, modifications to the channel measurement and reproduction software (Part 1 of this report), which result in less execution time, are described in Section 2.

Throughout this report, we frequently refer to a set of programs which are printed in Part 1 of this final report, dated 15 May 1974. Each of these programs can be easily distinguished since they appear in Appendix P of that report (Figures P.1 to P.22).

SECTION 2

CHANNEL MEASUREMENT AND CHANNEL PLAYBACK SOFTWARE MODIFICATIONS

In Part 1 of this final report (covering the period 15 October 1973 to 14 April 1974), we discussed in some detail the concept of a stored channel simulator capable of measuring and reproducing a linear time-variant HF channel over a finite bandwidth. To demonstrate the stored channel technique, a set of Fortran programs were written which covered four major simulator topics: 1) probing signal generation; 2) channel measurement; 3) channel playback; and 4) simulator verification by means of a deterministic time-varying test channel.

Although no specific fidelity criteria for channel reproduction was adopted, empirical evidence suggested that the deterioration resulting from all self-noise sources (dc crosstalk, harmonic cross-talk, computational inaccuracies) was more than 70 dB below the desired signal. Unfortunately, the programs took prohibitively long periods of time to process useful quantities of data (30 seconds to 1 minute). In the following sections we will briefly describe the modifications made to the channel measurement and channel playback software to achieve a significant reduction in execution time.

2.1 Channel Measurement Software

The program which performs the channel measurement function is entitled RECD11. It is identical in operation to the program REC2 as described in the first part of this report. However, REC2 requires approximately 40 hours of CPU time to process one minute of data - a real time expansion factor of 2400. In contrast, RECD11 will massage the same quantity of data in 3.5 hours - a real time expansion factor of 210. Although much of this improvement can be attributed to NRL's recently acquired PDP-11/45 floating point processor, a 50% time savings has been achieved through software changes.

A listing of RECD11 appears in Figure A.1. Observe that, at the beginning of execution, the user is asked to input the name of the output data file he wishes to create on magnetic tape. Each record of this file will contain one measured snapshot (of length 255 samples) of the channel impulse response. As an example, suppose the desired name is CHANNL.DAT. The user simply types CHANNL since the program always appends .DAT. The only other additional input required by the program is the number of snapshots to be processed.

Two subroutines are called by RECD11 which were not accessed by REC2. Subroutine STASH (Figure A.2) is called with the following syntax:

```
CALL STASH(IJKM,ICS DR)
```

STASH simply places the value of IJKM in the address specified by the variable ICS DR. In this program, ICS DR = "177570 which corresponds to the address of the display register on the PDP-11/45, and IJKM contains the number of snapshots which have been written on magnetic tape. This gives the user an indication of the amount of data processed without having to resort to the use of a device such as the keyboard (whose device driver alone is 600 words).

Assembly language subroutine LOOP (Figure A.4) only replaces seven lines of code in REC2. However, since much of the program's time is spent executing those lines, their replacement by LOOP decreased execution time by a factor of 2. It achieves its speed by making very efficient use of the floating point processor.

TESTD.DAT is the name of the input data file for RECD11. Each record of the file must contain 510 samples of channel data (510 samples have a time duration equivalent to two times the inverse of the snapshot rate). However, data derived from NRL channel probing experiments is recorded in 1000-word 12-bit packed blocks on magnetic tape by MTIN (Figure A.5). In order to be used, this data must be

reformatted so that it becomes compatible with the requirements of RECD11. FORM1A (Figure A.6) accomplishes this objective. In addition, it positions the data before executing by skipping a user specified number of files and 1000-word records. Subsequently, FORM1A performs the following functions:

- (1) Reads channel data in 1000-word 12-bit packed blocks from magnetic tape using call to the NRL supplied input routine MTIN. The data is left-justified in a 1000-word integer array IAR.
- (2) The data in each word of IAR is shifted right by four bits for normalization. Since the data is recorded in offset binary, "4000 is subtracted from each word.
- (3) IAR is then converted to floating point and appropriately placed in array X (of dimension greater than 1000).
- (4) X is reformatted into 510 word blocks and written on magnetic tape under the file name TESTD.DAT.

FORM1A replaces FORM1 which appeared in Figure P.5 of the first report. As its predecessor, FORM1A used modulus arithmetic and treats the data storage vector X as though it were circular. In this way, no internal data moves need be performed - allowing the programs to execute more quickly than might normally be expected. One additional feature has been included which forces FORM1A to print the magnetic tape status word on device 6 should an error occur during a read.

Function LSH (Figure A.3) is used by FORM1A to perform shifting operations. Its call must have the syntax LSH(IWORD,J), where IWORD is an integer variable to be shifted left by J bits. As an example, for J=-4, the contents of IWORD are shifted right by four bits.

2.2 Channel Playback Software

The task of decreasing execution time for the channel playback software requires a more sophisticated approach than that required for the channel measurement software. The approaches necessarily differ because the sources of wasted time in the two sets of software differ. In the channel measurement case, certain Fortran statements were consuming huge amounts of CPU time; in the channel playback situation, large amounts of time are spent preparing and transferring data from program storage to intermediate data storage on disk files. This was originally necessitated by the insufficient core storage available (20K words) on the NRL PDP-11/45.

The original playback program PLAY2 is listed in Figure P.11 of the first report. It suffers from the extraordinary complexity rendered by the use of five data files. This is abundantly obvious when PLAY2 is compared to a completely equivalent program, PLAY, designed to run on the PDP-10. PLAY is listed in Figure P.22. It seems clear that the only way to effectively speed program execution is to allow most intermediate data to remain in core. To this end, we have adopted an overlay program structure.

In order to eschew any proclivity toward prolixity, we will not discuss the numerous revisions necessary before working software was completed. Merely observe that overlaying by itself is not sufficient. More surreptitious means for saving storage are required.

PLAY2 defines the files to be used by calls to the Fortran subroutine SETFIL. SETFIL is used instead of ASSIGN because random access files are needed. Each call to SETFIL requires about 20 words, while SETFIL itself is approximately 250 words long. Thus, just setting the five files in PLAY2 requires 350 words of PDP-11/45 core. In addition, we determined that only three devices were required in the overlaid program: 1) PLAYD.DAT is the file that contains data

to be played through the channel; 2) RECDT.DAT contains the transform of the recorded channel snapshots; and 3) PROCD.DAT contains the processed data. In addition, the device table on the PDP-11/45 requires 19 words of storage for each logical unit number independent of whether it is used. Since there is nominally provision for eight logical units, we could conceivably remove five logical unit numbers for the overlayed programs and form what we might term a minimum device table.

Taking this discussion to its logical conclusion, we can place the file names directly in the minimum device table and thereby eliminate the need for program SETFIL, five calls to SETFIL, five unnecessary logical unit numbers, and 435 words. A listing for the device table MINDEV, which accomplishes this objective, appears in A.7. It assigns PLAYD.DAT to logical unit number 1 on disk unit 0, and RECDT.DAT to logical unit number 2 on magnetic tape unit 0. The third file, PROCD.DAT, is assigned to logical unit number 3 and device unit number 1 on either disk or magnetic tape. The device chosen depends on the output of a conditional assembly. The user required alteration can be gleaned from the program listings.

Another source of wasted core involves the Fortran I/O package and its interface with the Fortran error handling routines. We decided to put all the device reads and writes in the smallest overlay segment and to eliminate any I/O from the root segment and the remaining overlay segments. Unfortunately, the Fortran error processor requires a good deal of the Fortran I/O package and, of course, it necessarily must appear in the root segment. Program ERRF (Figure A.8) allows us to circumvent this problem by replacing the Fortran entry points ERR, ERRA, ERRB, ERRC, ERRF with a set of entry points in ERRF. In case an error occurs, the program puts a message of the form F030 ABC XYZ on the keyboard. In this case, ABC = error class, XYZ = error number (both in octal). It writes on

the keyboard without requiring a buffer allocation by taking advantage of a resident monitor program. In addition, ERRF has another entry point ERR000 which can be employed for additional error indications. ERFF saves over 1000 words of storage.

Figure 2.1 depicts the overlay structure used by the program. The root segment PLAY11 (Figure A.9) has three branches. Branch B contains subroutine LAGINT in file LAG1. LAGINT appears in Figure P.8 of the first report. Branch C contains subroutines SUB1 (Figure A.10), ZWRITE (Figure A.11), and SUB2 (Figure A.12). Branch D contains subroutine FFTOVR (Figure A.13) which, in turn, calls two overlay segments. Branch E contains subroutine FFT (Figure A.14) and Branch F contains subroutine REALTR (Figure A.15). A Fortran equivalent of assembly language subroutine SUB2 appears in Figure A.16. All of these programs must be linked together with the aid of the overlay description file PLAY11.ODL listed in Figure A.17.

As a result of the programming changes, the channel playback software now requires that the data to be played through the channel be formatted in 255-word records instead of the 765-word records required in the old software. However, this requires only a change in a parameter in program FORM2 (Figure P.12).

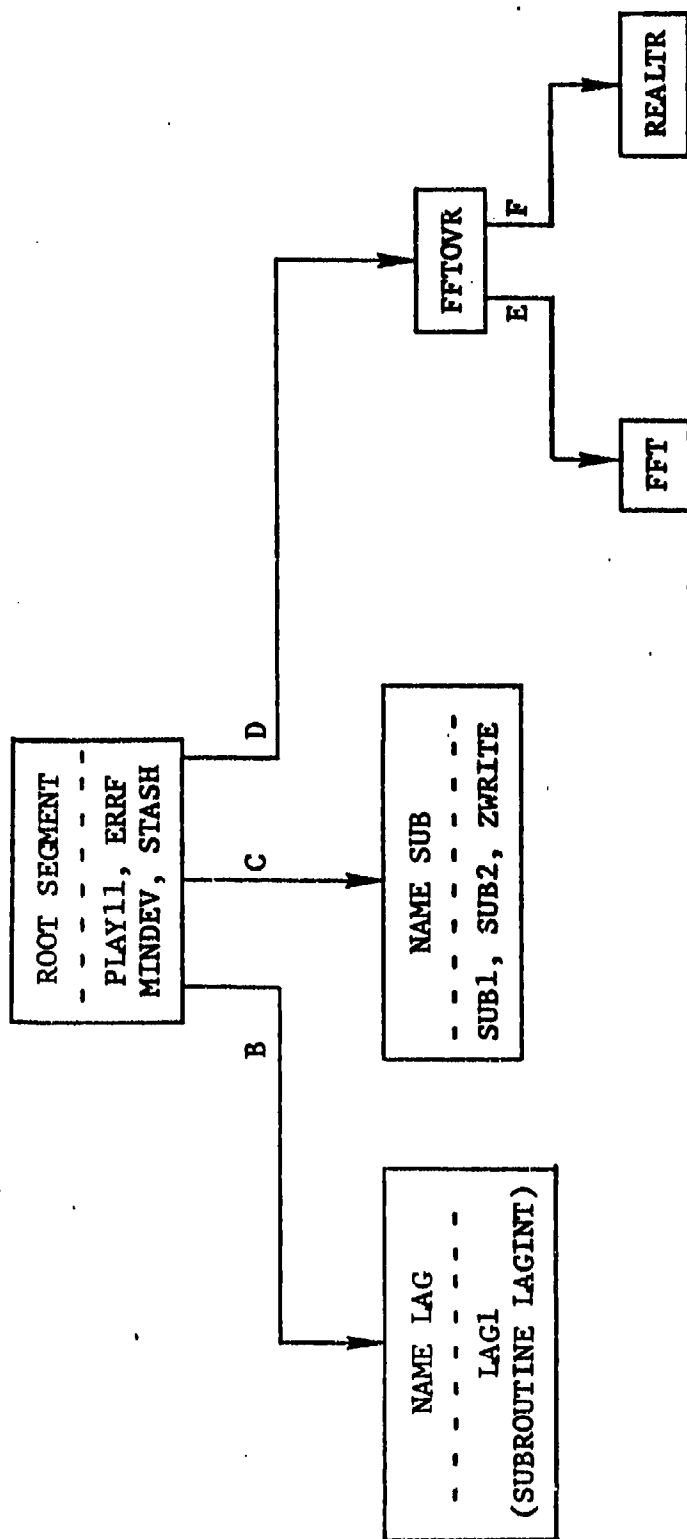


Figure 2.1 Overlay Structure for PLAY11.

SECTION 3

DELAY SPREAD AND DOPPLER WIDTH CHARACTERIZATION OF CHANNEL MEASUREMENT RECORDINGS

During the course of this program, two separate probings of the HF channel have resulted in several magnetic tapes of channel soundings. It is difficult to use these tapes for other experimental work (such as modem development) without some knowledge of the character of the channel they represent. Exclusive of additive noise interference, two commonly used characterization parameters are multipath spread and Doppler width. We shall discuss a set of Fortran programs which are capable of extracting some measure of these parameters from the channel probing tapes.

3.1 System Background

Part 1 of this report contains a discussion of the constraints placed on the channel measurement process by both the details of the NRL single-sideband (SSB) transceiver and the specifics of the probing signal (Sections 2 and 5). However, we can summarize their combined effect on an ideally white probing of the channel by the spectral shape presented in Figure 3.1. Although the long flat regions of the spectrum allow channel characterization over a broad bandwidth, the fast spectral rolloff at the band edges adds several milliseconds of multipath spread to the multipath actually contributed by the channel.

For the purposes of the channel measurement and playback recordings previously described, it is important to maintain a broadband "total" channel characterization in order that the data used during playback be a fair example of the information transmission effects to be encountered. We are interested in categorizing the transmission medium; therefore, we must reduce as much as possible the effects of the transceiver filters and the spectral weighting of

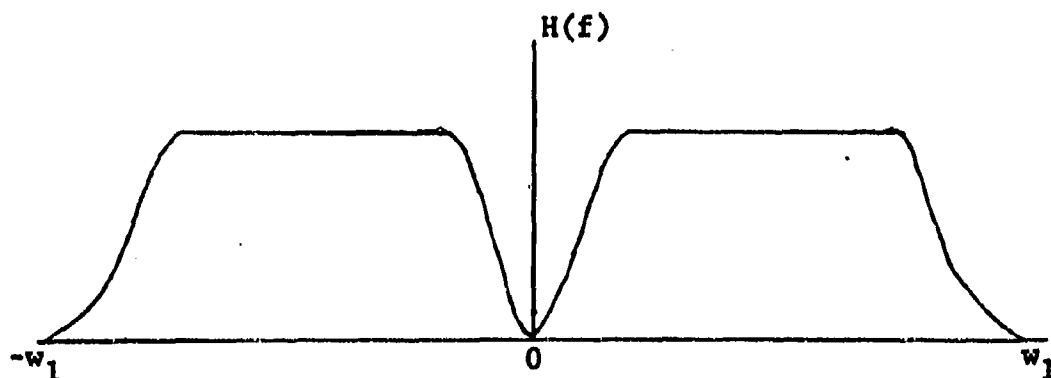


Figure 3.1 Combined Spectral Shape of NRL Transceiver and Probing Signal

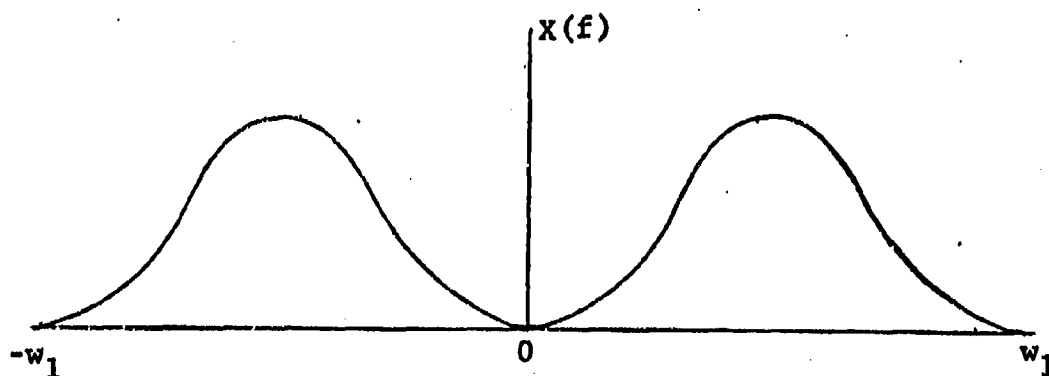


Figure 3.2 Spectral Shape Used to Improve Delay Resolution

the probe signal. One spectral shape which accomplishes this objective and which can be applied to a baseband signal, $z(t)$, appears in Figure 3.2. It is straightforward to show that the impulse response of this filter is

$$x_1(t) = \frac{\sin \pi w_1 t \cos \pi w_1 t}{\pi t (1 - w_1^2 t^2)} \quad (3.1)$$

which, when sampled at a $2w_1$ rate, becomes

$$\frac{x_1\left(\frac{k}{2w_1}\right)}{w_1} = \begin{cases} 1 & ; k = 0 \\ -\frac{1}{2} & ; k = \pm 2 \\ 0 & ; \text{elsewhere} \end{cases} \quad (3.2)$$

The only additional processing required before the channel measurement procedure can begin involves reconstruction of the complex SSB demodulated output, $x(t)$, where

$$z(t) = \text{Re} \left[x(t) e^{J(w_{\text{off}} t + \theta)} \right] \quad (3.3)$$

where θ and w_{off} are, respectively, phase and frequency offsets between the receiver and transmitter filters. Assuming that w_{off} is small compared to any dead zone around dc in Figures 3.1 and 3.2, then we can say that

$$z(t) + j \hat{z}(t) = x(t) e^{J(w_{\text{off}} t + \theta)} \quad (3.4)$$

where $\hat{z}(t)$ is the Hilbert transform of $z(t)$.

Of course, we could have formed the complex signal $z(t) + j \hat{z}(t)$ before weighting by the SSB equivalent of the spectrum in Figure 3.2. However, software considerations were preeminent in the rejection of this procedure.

3.2 Software

A block diagram of the required software is given in Figure 3.3. Observe that we have decreased the order of the interpolator used during channel measurement from a fourth-order Lagrange to a second-order Lagrange. This was necessitated by the interplay between the higher core requirements for complex processing and the finite amount of core available. However, since the requirements for channel characterization are less stringent than those for channel reproduction, the interpolator order reduction is not significant. For example, in Part 1 of this report we noted that 0.1 dB Doppler attenuation occurs at ± 5.65 Hz for a fourth-order interpolator and at ± 2.4 Hz for a second-order interpolator. At 5.65 Hz, a second-order interpolator renders only 0.6-dB attenuation -- an acceptable quantity for channel characterization.

The Hilbert transformer depicted in Figure 3.3 can be implemented in a great many ways. We chose to use a finite impulse response (FIR) linear phase digital filter. Toward this end, we employed a program written by McClellan, Parks, and Rabiner for optimum FIR filters [3.1]. The design was restricted by three criteria: 1) that the frequency response of the filter appear white with respect to the transceiver filter-probing signal spectral combination of Figure 3.1; 2) that passband ripple magnitude be less than 1%; and 3) that the order of the filter (the duration of its impulse response) be odd. (Since for N odd every other sample is zero, the last requirement is important to minimize computation.) A FIR filter of length 43 satisfies these criteria.

The Hilbert transformer is, of course, odd symmetric and unrealizable. As a result of its finite impulse response, the filter can be made realizable by inserting a delay of 21 samples in the untransformed path. This is indicated in Figure 3.3. The odd symmetry is computationally important since it allows the

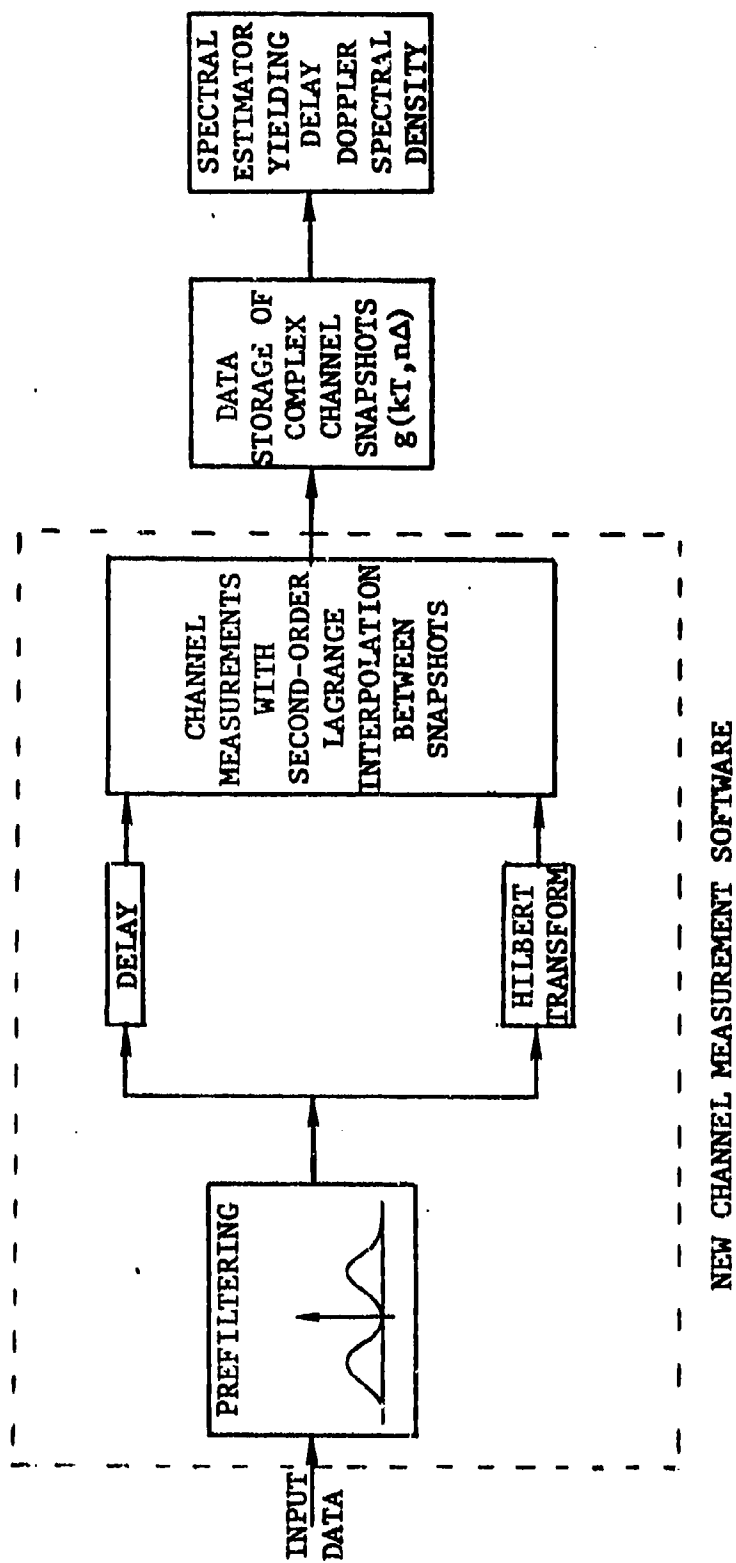


Figure 3.3 Software Block Diagram

programmer to replace two multiplies by a multiply and a subtract. Thus, the 43 sample impulse response requires only 11 multiplications and 11 subtractions.

Figure 3.4 is a block diagram of a technique for measuring the spectral characteristics of a Hilbert transformer. The amplitude response of the filter on linear and log scales appears in Figures 3.5 and 3.6, respectively. Observe the equiripple response of this optimum filter in both the passband and stopband.

We chose to combine (1) prefiltering to improve delay resolution, (2) complex channel reproduction, and (3) the channel measurement procedure into one program named RECSCF (A.18). The word RECSCF is a slightly misnamed acronym for RECord SCattering Function. (A scattering function is not actually calculated - only an estimate of its transform along the Doppler dimension.)

Program RECSCF requires four files: 1) a random access file for temporary data storage STOR1.DAT; 2) a file LAGR.DAT containing second-order Lagrange interpolator coefficients [created by SETLAG (A.19)]; 3) a file TESTD.DAT formatted in records of 510 words containing the data to undergo the channel measurement process; and 4) a magnetic tape output file whose name is inputted by the user. In addition, the user must specify the number of snapshots to be processed by the RECSCF. If the number of snapshots specified is greater than the length of the input data file, the last record read is processed, a normal termination ensues, and the user is informed that an end of file has been encountered. The program performs one subtle maneuver to save execution time by subtracting "200 from the first word of a floating point number instead of dividing by 2.

When the program terminates, a summary of the total power at each tap is written on the line printer. This information is important to the user who must subsequently determine which taps are to be examined for Doppler spread characteristics.

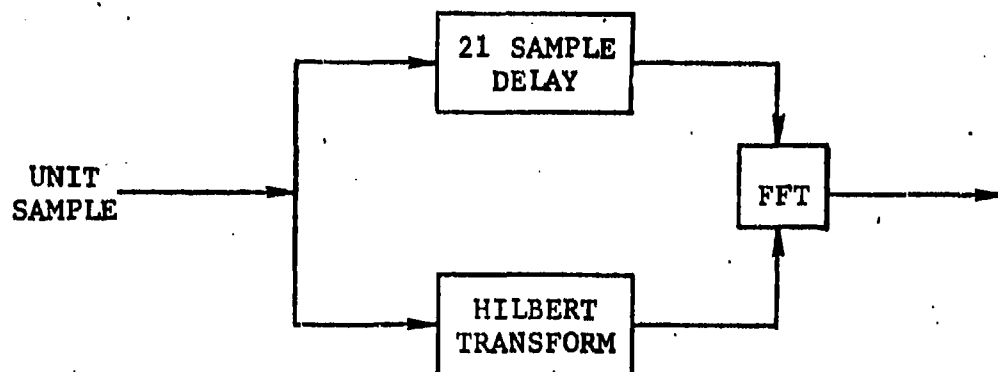


Figure 3.4 Hilbert Transformer Test

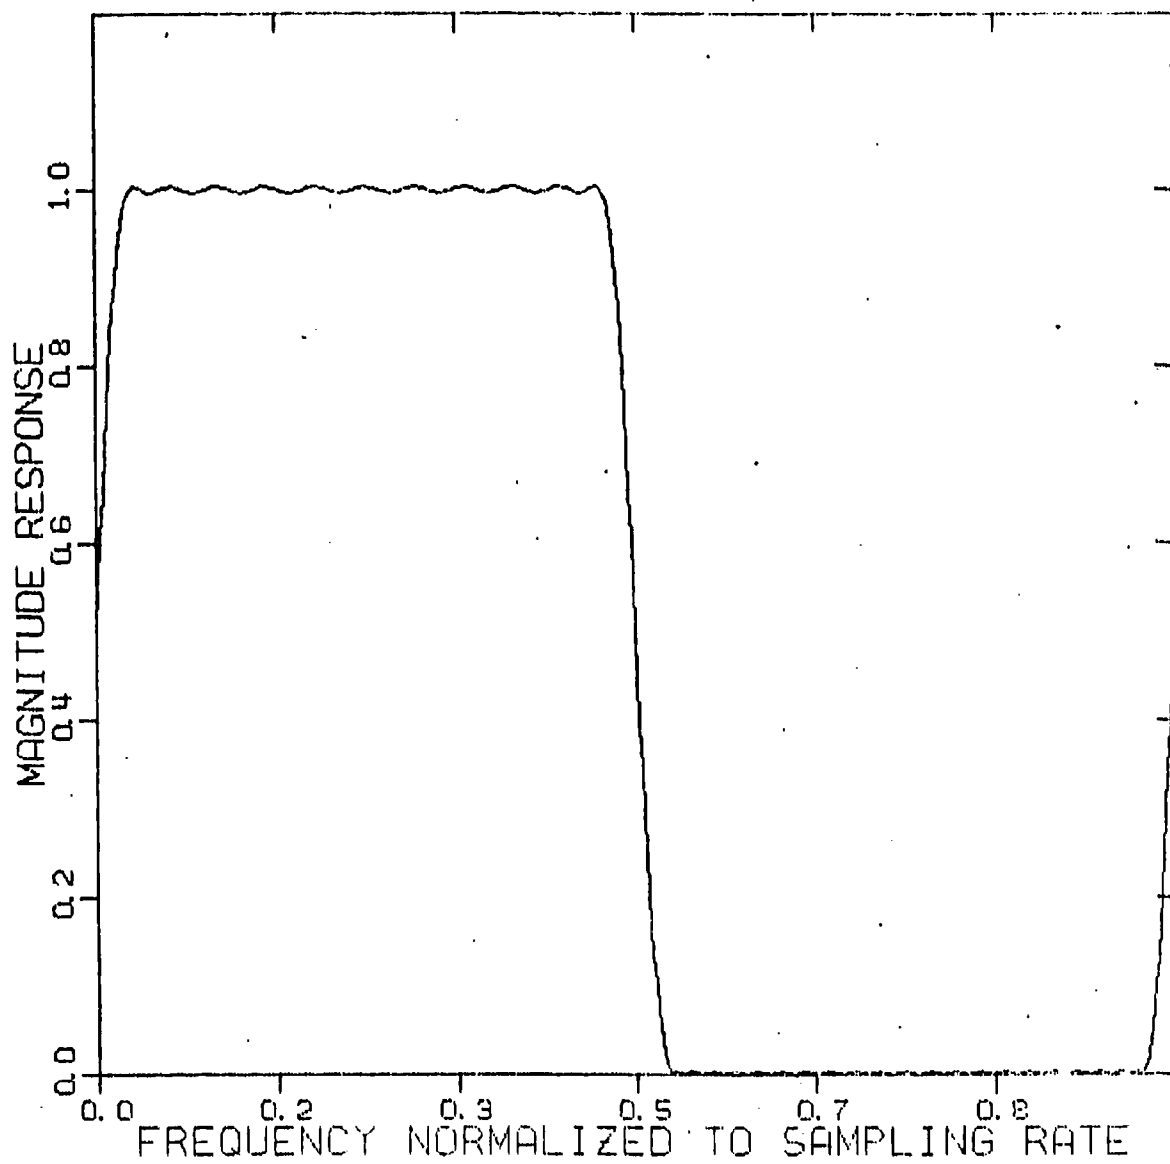


Figure 3.5 Spectral Response of Single Sideband Extractor
(Linear Scale)

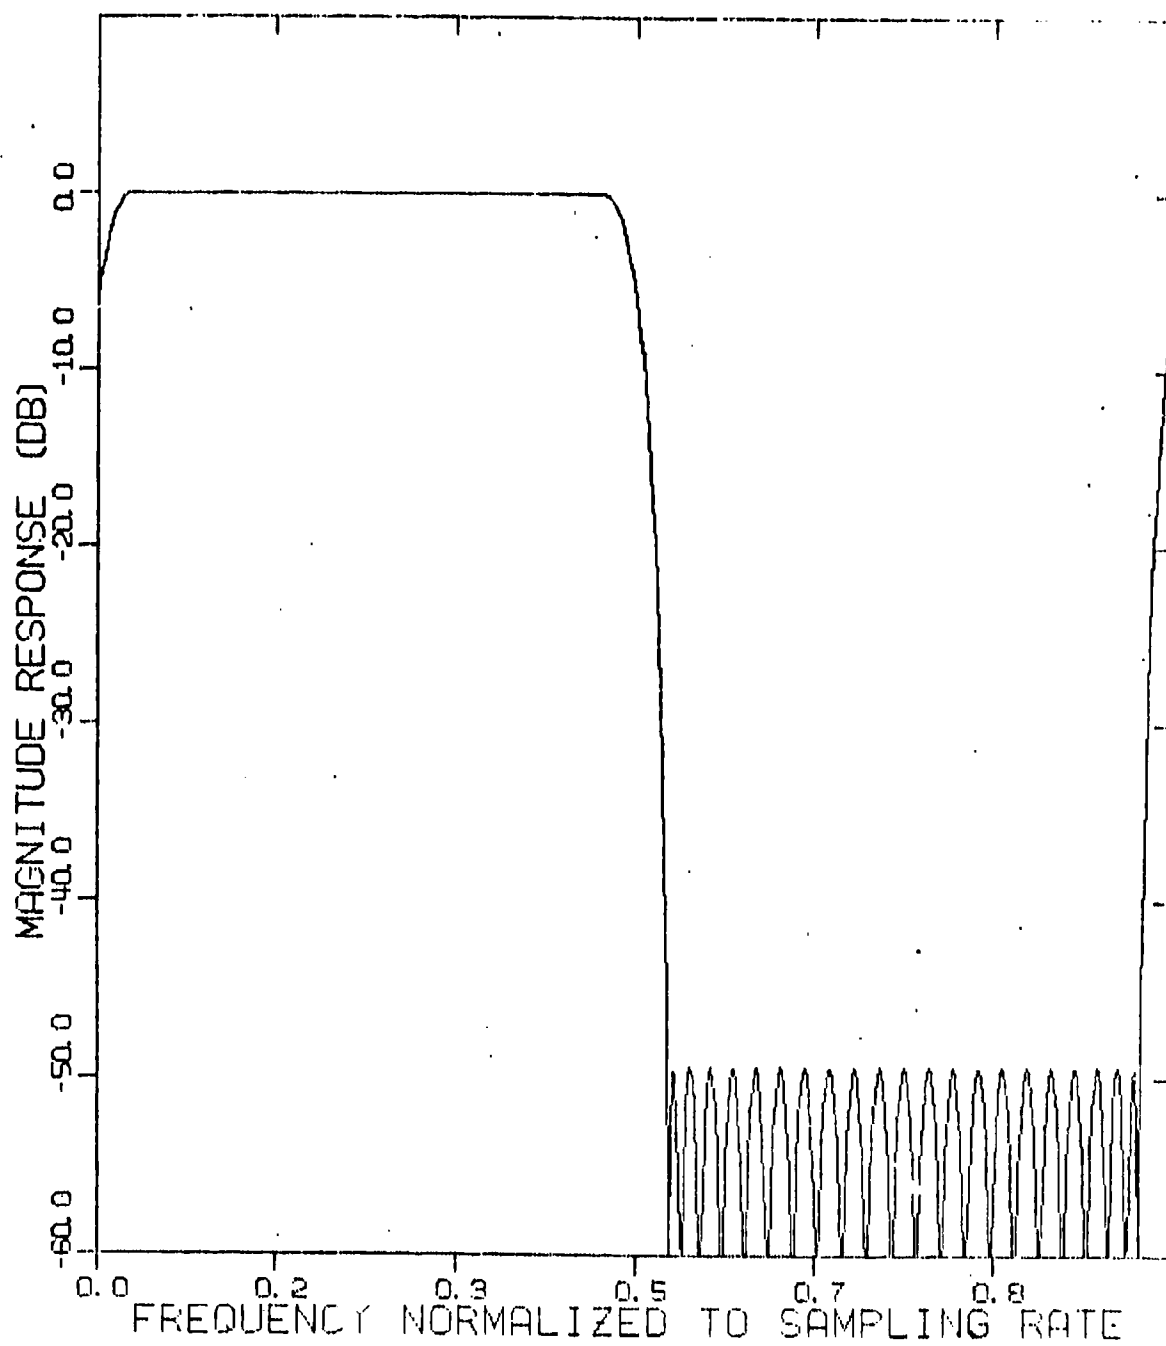


Figure 3.6 Spectral Response of Single Sideband Extractor
(Log Scale)

Define $g(kT, n\Delta)$ to be one complex snapshot of the channel impulse response, where $\frac{1}{T}$ is the snapshot rate, and $\frac{1}{\Delta}$ is the sampling rate ($2w_1$ in Figure 3.2). As discussed in Part 1 of this report, each tap in a tap delay line channel model is separated by Δ seconds. During playback, each tap coefficient is updated every T seconds. As an indication of delay spread, we are interested in the power in each tap averaged over the number of snapshots processed. Normally, only a few taps will contain significant energy. For example, a 1-ms multipath spread at a 9-kHz sampling rate would involve only 9 taps. However, coupled with a bandwidth reduction filter length of five samples (3.2), this yields 13 taps which contain some meaningful information. The starting and end indices of the taps with significant energy can be ascertained from the RECSCF line printer output. It is on this set of taps that we would like to perform spectral estimation in the Doppler dimension.

Techniques for calculating power spectra are straightforward and well cataloged. The one which we selected for this software system falls under the general topic of linearly modified spectral estimates [3.3]. This method is distinguished by the subdivision of data into windowed segments prior to transforming. A succinct description follows of the steps involved in producing that which might be termed in the ideal case "consummate spectra".

- (1) Choose the length of the FFT to be used according to the Doppler resolution required. For example, frequency resolution of an FFT = $\frac{1}{NT}$ Hz, where N is the number of samples in the FFT and T is the distance between time samples of the FFT data base. In this case, $\frac{1}{T}$ (35.294 Hz) corresponds to the inverse of the snapshot rate. For $N = 64$, frequency resolution is approximately 0.551 Hz, which for many applications is adequate. Of course, we could increase the length

of the FFT to attain better resolution if we are willing to increase the variance of the spectral estimate [3.4].

- (2) Choose a time window for weighting the data. There are obviously many from which to choose. In addition, once the weights have been established, all are equally easy to apply. The one we have chosen to use is termed an optimal window by A. Eberhard [3.2]. This window maximizes the ratio of the energy in the mainlobe of the window spectrum to the total energy in the spectrum.
- (3) Apply overlapping windows to the data base, as indicated in Figure 3.7. This method minimizes the loss in potential spectral information that nonequal weighting of the data base renders. Ideally, the sum of the values of all windows in the data base at each element in the data base should be unity [3.5].
- (4) Weight each overlapping segment in the data base with the window coefficients, take a FFT, find the magnitude square, and average over all segments. For the parameter values listed above, there are approximately 45 periodograms averaged for each tap, given one minute of input data.

A program for computing Doppler spectra at each tap position, DDSPEC, is listed in Figure A.20. The user must input the name of the magnetic tape data file which contains the recorded snapshots of the channel impulse response. He must also enter the indices of the left and right tap boundaries surrounding the taps to be processed. For example, if the user wants taps 245-255 and 1-6 processed (17 taps), he merely enters 245,6,. The maximum circular separation of the tap boundaries entered must be less than or equal

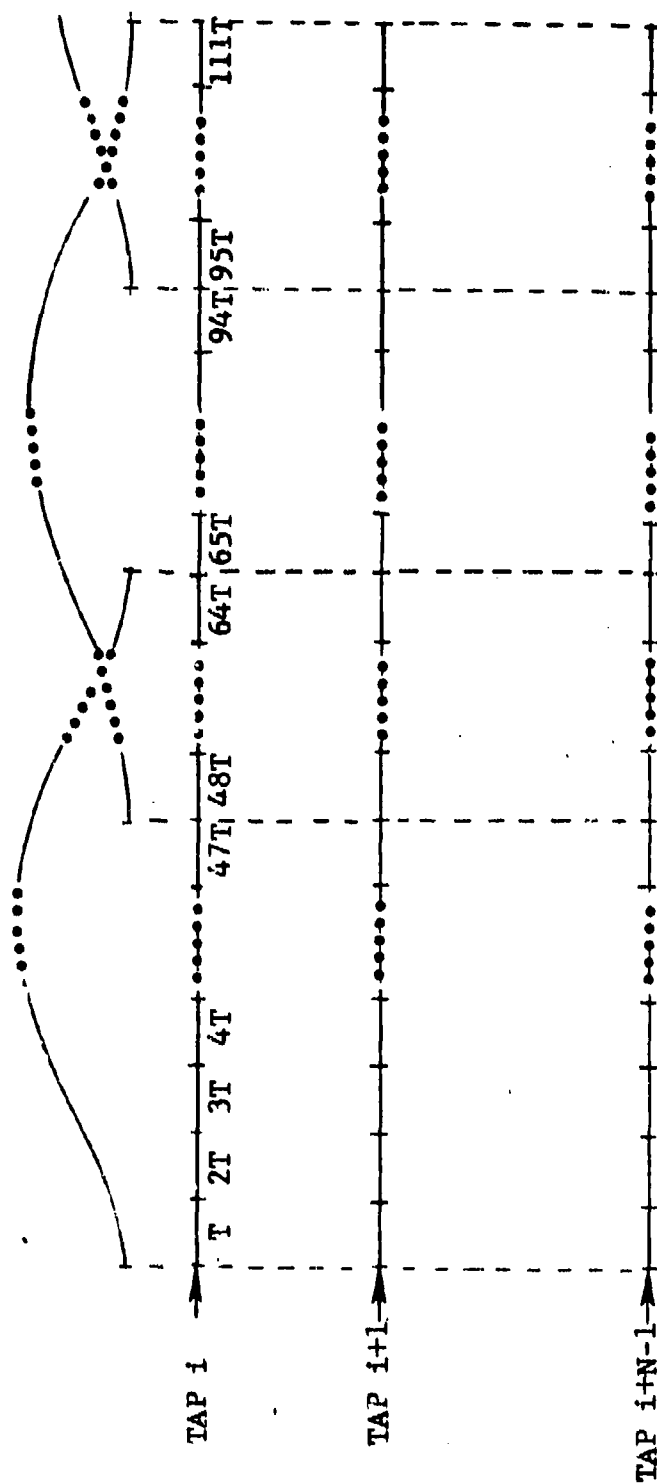


Figure 3.7 Window Overlap During Doppler Estimation Process

to 84. In the example just given, the circular tap separation is 16. The program creates a random access output data file DELDOP.DAT which contains the final spectral estimates at each tap position specified. A summary of this file is written on the line printer just prior to program termination.

Another program, DDREAD (Figure A.21), massages DELDOP.DAT and prints its contents in a format which is conducive to visual extraction of gross physical details of the delay Doppler surface. Up to 14 taps can be presented in this way at any one time. An example of this format will be given in the next section.

For the user who would rather see a statistical summary of the information collected, program DDSTAT (Figure A.22) is available. It reports the following information via the line printer:

- 1) marginal delay power distribution for the taps examined and the time in seconds by which each tap is separated;
- 2) marginal Doppler power distribution over a specified range of frequencies;
- 3) mean delay with respect to the first tap examined;
- 4) rms delay;
- 5) mean Doppler;
- 6) rms Doppler spread;
- 7) the taps at which delay peaks occur and time differences in seconds between peaks;
- and
- quencies in Hz at which Doppler peaks occur;
- 9) Doppler statistics at each tap delay;
- and 10) graphs of marginal delay power and marginal Doppler power.

An example is given in Section 3.4.

3.3 Software Verification (Basic Programs)

For the purposes of software verification, it is necessary to create a complex SSB HF channel with typical multipath and Doppler characteristics. The approach we shall take is summarized in Figure 3.8. This system is designed to emulate probing with a PN sequence — the result of which is a set of frequency samples of the HF channel where the intersample space in Hz is equal to the inverse of the length in seconds on one period of the probing signal. (More details of the probing process are presented in Part 1, Section 5,

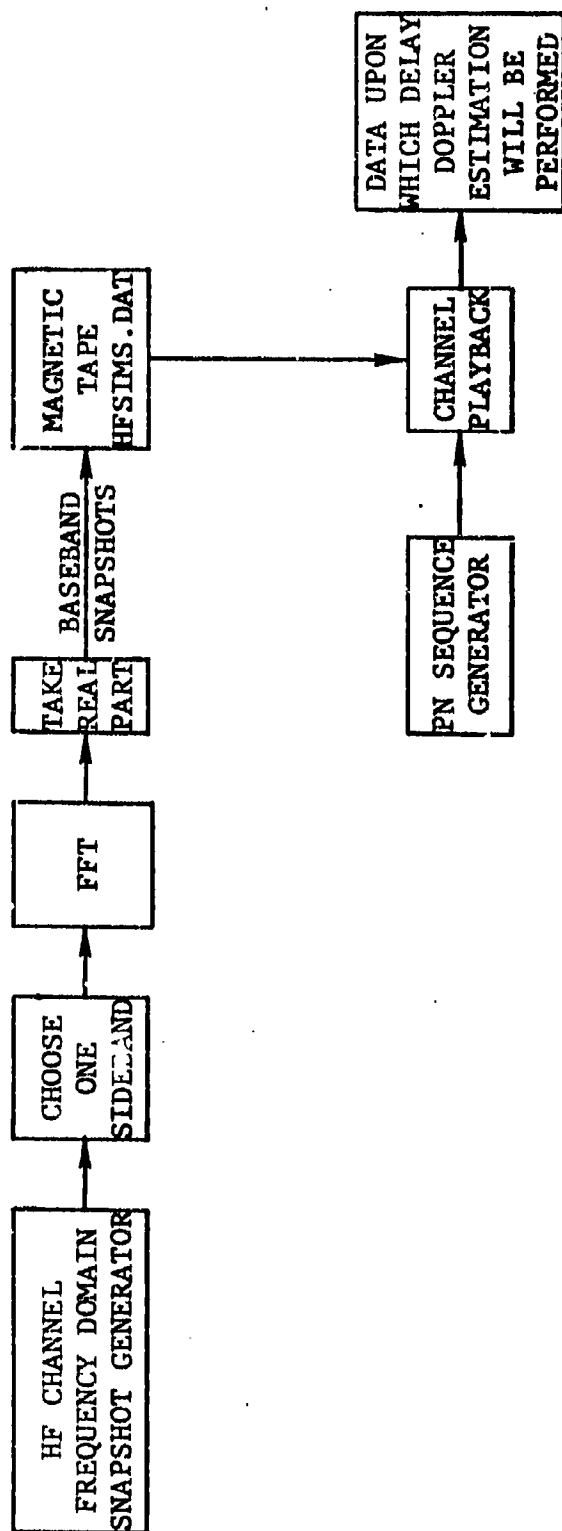


Figure 3.8 Test Channel Generation

of this report.) An equivalent software approach involves weighting the line spectrum of a periodically repeated PN sequence by a simulated complex HF channel.

Ideally, the response of one path of the HF channel to a sinusoidal input of the form

$$x(t) = \sqrt{2P} \sin(\omega t + \theta) \quad (3.5)$$

is

$$y(t) = \sqrt{2P} r \cos(\omega t + \theta + \phi) \quad (3.6)$$

where r is the time-varying Rayleigh-distributed amplitude of the path and ϕ is the phase resulting from Doppler, time delay, etc. In general, a complex noise process should be added to $y(t)$; however, for the purposes of test channel generation, we shall only consider the noiseless case.

Similarly, the received signal over a multipath channel at any tone is

$$y(t) = \sqrt{2P} \sum_{j=1}^N r_j \cos(\omega t + \theta + \phi_j) \quad (3.7)$$

where the r_j are independent Rayleigh-distributed variables and N is the number of paths. For normalization purposes, we will constrain the sum over the power in the j^{th} path (P_j) to be unity:

$$\sum_{j=1}^N P_j = 1 \quad ; \quad E[r_j^2] = P_j \quad (3.8)$$

For an array of M tones

$$y(t) = \sum_{i=1}^M \sum_{j=1}^N \sqrt{2P} r_j \cos(\omega_i t + \theta_i + \phi_{ij}) \quad (3.9)$$

This model assumes that r_j is constant over all frequencies of interest while ϕ_{ij} is frequency-dependent. Both r_j and the Doppler-dependent portion of ϕ_{ij} can be obtained from a set of filtered complex Gaussian variables. In the program to be described, filtering is accomplished with a two-pole filter whose passband shape approximates typical Doppler rolloff characteristics.

A program, HFSIMS, which creates a SSB HF channel by frequency weighting a set of tones according to the desired multipath and Doppler characteristics is listed in A.23. The output magnetic tape data file, HFSIMS.DAT, will contain transforms of the baseband snapshots. Inputs to HFSIMS include: 1) the number of snapshots to be written on magnetic tape; 2) the number of frequency samples in the sideband of interest (by default, the program chooses the upper sideband); 3) the frequency separation between tones; 4) the snapshot rate (because of the details of the probing process, items 3 and 4 must be equal); 5) the number of paths in the channel model (non-impulsive path delay densities are not computationally feasible since any simulation using that model would require huge amounts of CPU time); 6) the Doppler bandwidth of each path (Hz); 7) the power of each path in dB (for normalized results, the total power in the paths should be unity); 8) the Doppler offset of each path (Hz); and 9) the relative delay (seconds) of each path (the first path should have a relative delay of 0).

Armed with synthetic snapshots of an HF channel, we are ready to simulate probing the channel with a periodically repeated PN sequence. This situation is identical to one encountered in Part 1 of this report in which it was necessary to play data through recorded snapshots of the channel. Program PLAY11 (A.9) accomplished this objective. It seems reasonable then to adopt PLAY11 for "playing back" the PN probing signal through the synthetic snapshots.

One simplification is in order. PLAY11 is capable of handling large bandwidth Doppler spreads or large Doppler shifts without imparting significant passband deterioration (Section 2 and 3 of Part 1). This is a result of using a fourth-order Lagrange interpolator for zeroing Doppler images at multiples of the snapshot rate. Since we are only testing the software, it is not necessary for these initial experiments to use relatively large Dopplers. As a result, it will prove computationally expedient to use only a second-order interpolator while limiting maximum Doppler shifts to around 3 Hz. PLYSCF incorporates all these features into one program.

PLYSCF assigns four different data files during the course of its execution. File LAGR.DAT is created by program SETLAG (Figure A.19). File PNSEQT.DAT contains a 768 point real transform of one period of a PN sequence of length 255. Program SETPNS (Figure A.25) creates this file while employing the use of an FFT program specifically modified to perform a 384 point complex transform [FFT 384 (Figure A.26)]. File HFSIMS.DAT contains the transformed channel snapshots generated by HFSIMS. The last file, TESTD.DAT contains the result of playing a PN sequence through the synthetic channel. Should an end of file occur in HFSIMS.DAT, the program will terminate normally after printing the record number being processed when the EOF occurred. PLYSCF, like most of the main programs

previously described, puts a numerical indication of the record being processed on the display register.

An overlay program, PLYOVR (Figure A.27), is functionally equivalent to PLYSCF. It has the capability, however, of being able to incorporate any order interpolator by changing the value of the parameter IQ to reflect the order desired. Some obvious changes must also be made in array dimensioning. The user can also save an additional 400 words by incorporating a variation of the minimum device table program, MINDEV. The overlay segments, SUB1, FFTOVR, and SUB2 are listed in Figures A.28, A.29, and A.30, respectively. PLYOVR.ODL, which contains the necessary overlay descriptor language, appears in Figure A.31.

PLYOVR uses both synchronous and asynchronous manual load operations, as specified by the PDP-11/45 linker manual. (It should be observed that the bit used as a synchronous-asynchronous switch in CALL LOAD is reversed in all the documentation.) Manual load saves both time and memory when compared to the performance of the PDP-11/45 autoloader feature. PLYOVR, using a second-order interpolator, executes quite rapidly. Approximately two seconds of computation per snapshot are required — corresponding to a real-time expansion factor of 70.

3.4 Test Examples

To establish program credibility, we have devised test examples which will exercise many of the software features. A summary of the programs required in the order of their execution appears in Table 3-1. As previously discussed, SETPNS and SETLAG create data files necessary for the synthetic test channel. The program which determines the characteristics of that channel is HFSIMS. Following the stated guidelines, we chose to keep the maximum excursion of significant Doppler energy to 3 Hz. Also, to insure that Doppler estimation would be performed over many Doppler cycles

TABLE 3-1

SUMMARY OF PROGRAMS REQUIRED FOR TEST EXAMPLE

Program	Input Files	Output Files	Comments
SETPNS	--	PNSERT.DAT (Random Access) (DK)	Put transform of 3 repetitions of PN sequence in file PNSEQT.DAT.
SETLAG	--	LAGR.DAT (DK) LAGD.DAT (DK)	Lagrange interpolation coefficients LAGR.DAT → order 2 LAGD.DAT → order 4
HFSIMS	--	HFSIMS.DAT (DK)	Put transform of channel snapshots in HFSIMS.DAT.
PLYSCF	LAGR.DAT (DK) PNSEQT.DAT (Random Access) (DK) HFSIMS.DAT (MT)	TESTD.DAT (DK)	Create test channel (TESTD.DAT) by playing PN sequence through channel snapshots created by HF simulator
RECSCF	LAGR.DAT (DK) TESTD.DAT (DK)	STOR1.DAT (DK) NAME.DAT (MT)	TEST.DAT contains base-band signal. Program prefilters, creates complex channel, correlates, and interpolates with Lagrange interpolator of order 2. Records of NAME.DAT=255.
CHFFT	NAME.DAT (DK)	FFT255.DAT (DK)	Read in record M of NAME.DAT FFT and put in file FFT255.DAT.
PLOTCH	FFT255.DAT (DK)	--	Plots.
DDSPEC	NAME.DAT (MT)	DELDOP.DAT (DK)	Compute delay Doppler spectrum.

even at the lowest Doppler resolution increment (0.551 Hz), we chose to perform the first test over 40 seconds of data. As a first-order estimate, this implies that spectral averaging will include at least 22 independent samples. Therefore, we can expect the standard deviation of any statistical results to be 21.3% of the actual value.

User input to HFSIMS included: 1) CHANNL as the name of the output data file (.DAT assumed); 2) 1410 (40 second) snapshots to be processed; 3) 128 frequency samples in the upper sideband (including one sample at the lower band-upper band transition point); 4) a 35.294-Hz snapshot rate; and 5) a separation between frequency samples of 35.294 Hz. Data specified for a two-path test is presented in Table 3-2.

After executing HFSIMS, FLYSCF, and RECSCF, the reconstructed synthetic channel snapshots are written in file CHANNL.DAT. As an intermediate check on software execution, programs CHFFT (Figure A.32) and PLOTCH (Figure A.33) plot the magnitude in dB of an FFT of any desired record in CHANNL.DAT. NRL's Versatec matrix plotter software is required for PLOTCH. A plot of the 14th such record appears in Figure 3.9. Although the exact features of the two-path model are not easily discerned because they have been all but obliterated by the effects of Doppler, some important observations can be made. On the frequency normalized to sampling rate scale, the upper sideband falls in the region 0.0 to 0.5. Notice the small amount of energy in the lower sideband. Both sidebands were prefiltered in RECSCF with a raised cosine weighting. The nulls of this weighting at normalized frequencies 0. and .5 are obvious. In addition, the raised cosine weighting is apparent in the mainlobe of the upper sideband.

TABLE 3-2
TWO-PATH TEST DATA SUMMARY

Parameter	Path 1	Path 2
Doppler Standard Deviation (Hz)	0.5	1.5
(RMS Doppler Spread)	(1.0)	(3.0)
Doppler Shift (Hz)	1.5	-1.5
Path Delay (sec)	0	0.0005

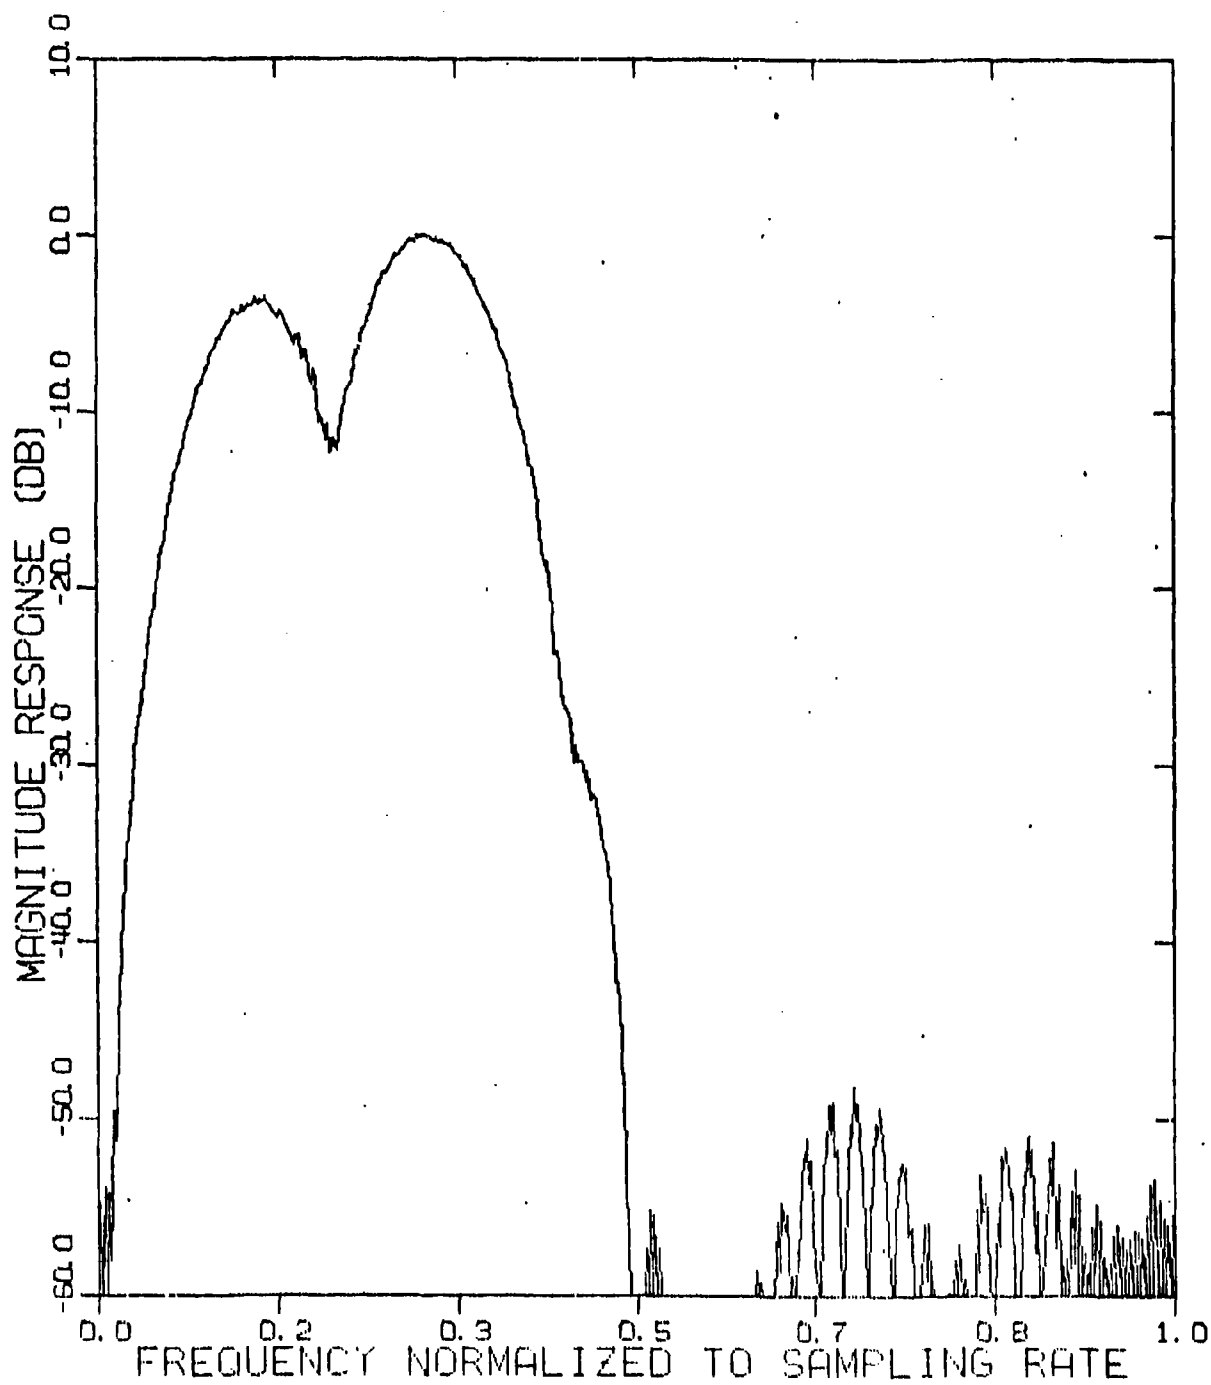


Figure 3.9 FFT Magnitude of 14th Snapshot of RECSCF Output
(Two-Path Model with Doppler)

In order to more graphically illustrate the influence of a two-path model on spectral particulars, we performed a separate test in which neither path was subject to any Doppler effects. The results of plotting the spectrum of the 14th record of CHANNL.DAT appears in Figure 3.10. The characteristics to which we referred in the previous paragraph are vividly portrayed.

DDSPEC completes the basic software processing. In addition to the name of the input data file, it requires the indices of the left and right tap boundaries of the taps to be examined. This can be obtained from RECSCF's printout of power at each tap location summed over all snapshots. The data for this test is reproduced in Figure 3.11. Observe that nearly all delay power falls between taps 20 and 33. After running DDSPEC, DDREAD should be executed (if necessary, several times until all the taps processed are examined). Because of space, its output is given in two parts. Figure 3.12(a) contains Dopplers from -17.647 Hz to -0.551 Hz; Figure 3.12(b) contains Dopplers from 0 Hz to 17.096 Hz. The peaks of the delay Doppler lobes for each path are underlined. Observe that they are separated by 4-1/2 taps (0.0005 second). The user can get a feeling for spread in the Doppler dimension by comparing the ratio of Doppler power densities at two similar points for each path. In this manner, it is easy to see that the second path has a much broader Doppler bandwidth than the first path. However, the peak of the second path is smaller than that of the first because the integrated power density for the two paths was user-specified to be equal.

A statistical summary of the data in Figure 3.12 is given by the output of DDSTAT in Figure 3.13. Observe that the claims for delay peak and Doppler peak locations are proportional to some multiple of an index of delay or Doppler increments. For example,

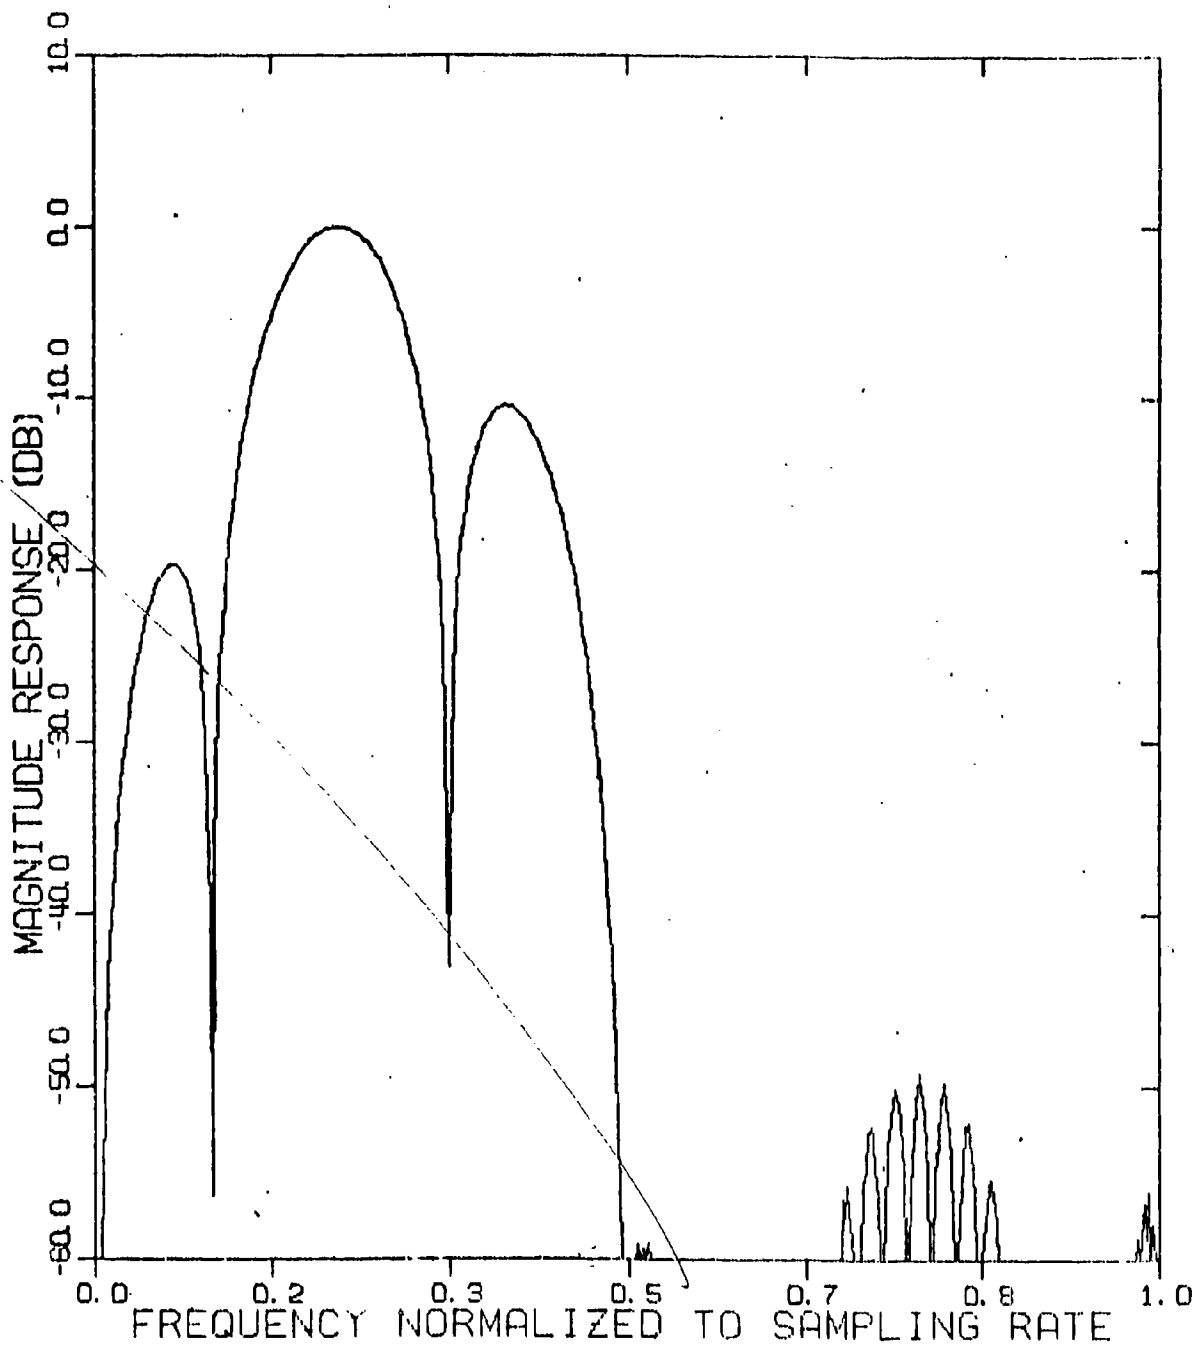


Figure 3.10 FFT Magnitude of 14th Snapshot of RECSCF Output
(Two-Path Model without Doppler)

0.1534E-02	0.1774E-02	0.2179E-02	0.2560E-02	0.3074E-02	0.3024E-02	0.2806E-02	0.2242E-02	0.1637E-02	0.5977E-03
0.3762E-03	0.5659E-03	0.1244E-02	0.1255E-02	0.5549E-02	0.1406E-02	0.1512E-01	0.1676E-02	0.1273E-00	0.3512E-02
0.6011E-01	0.5225E-02	0.1505E-03	0.2088E-03	0.1515E-03	0.6912E-02	0.7836E-02	0.1413E-03	0.1412E-03	0.7203E-02
0.1559E-02	0.5855E-00	0.3921E-01	0.2277E-01	0.9527E-02	0.2927E-02	0.4132E-02	0.3307E-02	0.1405E-02	0.6274E-03
0.7143E-03	0.5094E-03	0.1044E-02	0.1063E-02	0.1175E-02	0.1661E-02	0.2113E-02	0.2359E-02	0.2055E-02	0.2213E-02
0.2215E-02	0.1983E-02	0.9433E-03	0.5417E-03	0.2431E-03	0.6844E-03	0.1943E-02	0.2529E-02	0.1672E-02	0.3415E-03
0.6502E-03	0.5016E-03	0.5360E-03	0.8286E-03	0.6555E-03	0.8822E-03	0.1445E-02	0.1867E-02	0.1294E-02	0.4215E-03
0.2410E-03	0.1715E-03	0.4630E-03	0.3765E-03	0.5289E-03	0.9003E-03	0.6208E-03	0.1542E-03	0.1209E-03	0.2043E-03
0.2515E-03	0.5535E-03	0.5395E-03	0.3268E-03	0.2340E-03	0.5274E-03	0.5483E-03	0.1078E-02	0.1397E-02	0.1174E-02
0.7120E-03	0.4175E-03	0.3378E-03	0.3063E-03	0.5525E-03	0.1073E-02	0.1039E-02	0.7417E-03	0.1189E-02	0.2211E-02
0.2333E-02	0.1391E-02	0.2671E-03	0.1438E-03	0.7674E-03	0.9192E-03	0.4429E-03	0.7566E-04	0.4022E-04	0.8518E-04
0.7794E-04	0.2799E-04	0.1439E-04	0.1215E-03	0.2733E-03	0.3006E-03	0.1681E-03	0.7776E-04	0.2842E-03	0.6379E-03
0.8676E-03	0.6773E-03	0.1351E-03	0.5302E-03	0.1194E-02	0.2073E-02	0.2213E-02	0.1328E-02	0.4430E-03	0.2433E-03
0.5421E-03	0.2361E-03	0.1268E-03	0.3179E-03	0.8391E-03	0.9186E-03	0.3515E-03	0.4066E-03	0.1224E-02	0.1823E-02
0.1815E-02	0.1603E-02	0.1645E-02	0.1834E-02	0.1664E-02	0.1554E-02	0.1862E-02	0.2898E-02	0.3106E-02	0.3201E-02
0.1059E-02	0.3913E-03	0.3201E-03	0.5051E-03	0.6992E-03	0.9834E-03	0.1342E-02	0.1201E-02	0.6783E-03	0.5225E-03
0.1383E-02	0.2568E-02	0.3271E-02	0.2768E-02	0.1533E-02	0.7213E-03	0.5689E-03	0.5310E-03	0.6314E-03	0.1139E-02
0.1618E-02	0.1381E-02	0.5370E-03	0.1543E-04	0.4843E-03	0.1241E-02	0.1065E-02	0.2865E-03	0.2316E-03	0.6549E-03
0.1268E-02	0.1143E-02	0.9404E-03	0.1257E-02	0.1858E-02	0.1741E-02	0.1093E-02	0.8345E-03	0.1159E-02	0.1483E-02
0.1314E-02	0.5043E-03	0.3360E-04	0.6400E-03	0.1427E-02	0.1221E-02	0.4118E-03	0.3370E-03	0.1155E-02	0.1719E-02
0.1595E-02	0.1303E-02	0.9505E-03	0.5024E-03	0.4401E-03	0.4155E-03	0.3693E-03	0.3306E-03	0.5399E-03	0.4304E-03
0.5809E-03	0.6023E-03	0.5342E-03	0.1440E-03	0.2173E-03	0.2548E-03	0.3943E-03	0.7140E-03	0.1115E-02	0.1618E-02
0.1764E-02	0.1363E-02	0.8062E-03	0.3922E-03	0.1932E-03	0.1769E-03	0.2603E-03	0.5196E-03	0.7531E-03	0.7953E-03
0.8402E-03	0.1063E-02	0.1035E-02	0.6566E-03	0.3132E-03	0.5247E-03	0.1103E-02	0.1510E-02	0.1431E-02	0.1215E-02
0.1212E-02	0.1007E-02	0.4539E-02	0.2992E-03	0.7214E-03	0.1325E-02	0.1763E-02	0.1492E-02	0.5956E-03	0.1115E-02
0.1126E-02	0.7829E-03	0.1110E-02	0.1738E-02	0.1720E-02	0.1325E-02	0.1763E-02	0.1492E-02	0.5956E-03	0.1115E-02

Figure 3.11 Tap Power Summed Over 1410 Snapshots for First Test Example
(RECSCF Output)

Best Available Copy

	20	21	22	23	24	25	26	27	28	29	30	31	32	33
-17.6473	65E-03	0.46E-02	0.32E-01	0.11E 00	0.16E 00	0.12E 02	0.54E-01	0.59E-01	0.10E 00	0.10E 00	0.51E-01	0.10E-01	0.30E-03	0.12E-03
0.70E-03	0.42E-02	0.35E-01	0.19E 00	0.14E 00	0.10E 00	0.51E-01	0.74E-01	0.74E-01	0.13E 00	0.13E 00	0.64E-01	0.12E-01	0.31E-03	0.14E-03
0.47E-03	0.42E-02	0.36E-01	0.10E 00	0.15E 00	0.11E 00	0.47E-01	0.51E-01	0.92E-01	0.91E-01	0.91E-01	0.44E-01	0.87E-02	0.27E-03	0.11E-03
0.76E-03	0.43E-02	0.41E-01	0.12E 00	0.16E 00	0.12E 00	0.53E-01	0.70E-01	0.70E-01	0.12E 00	0.12E 00	0.58E-01	0.11E-01	0.28E-03	0.16E-03
0.70E-03	0.42E-02	0.33E-01	0.11E 00	0.15E 00	0.11E 00	0.53E-01	0.87E-01	0.87E-01	0.17E 00	0.17E 00	0.82E-01	0.16E-01	0.38E-03	0.18E-03
0.55E-03	0.39E-02	0.35E-01	0.11E 00	0.15E 00	0.11E 00	0.53E-01	0.90E-01	0.90E-01	0.17E 00	0.17E 00	0.69E-01	0.13E-01	0.32E-03	0.16E-03
0.81E-03	0.44E-02	0.35E-01	0.10E 00	0.14E 00	0.10E 00	0.47E-01	0.90E-01	0.90E-01	0.18E 00	0.18E 00	0.88E-01	0.17E-01	0.40E-03	0.15E-03
0.80E-03	0.43E-02	0.39E-01	0.11E 00	0.15E 00	0.11E 00	0.73E-01	0.11E 00	0.11E 00	0.20E 00	0.20E 00	0.94E-01	0.12E-01	0.39E-03	0.13E-03
0.80E-03	0.49E-02	0.43E-01	0.12E 00	0.17E 00	0.12E 00	0.70E-01	0.14E 00	0.14E 00	0.27E 00	0.27E 00	0.13E 00	0.25E-01	0.61E-03	0.21E-03
0.82E-03	0.45E-02	0.43E-01	0.12E 00	0.17E 00	0.13E 00	0.72E-01	0.14E 00	0.14E 00	0.27E 00	0.27E 00	0.13E 00	0.25E-01	0.62E-03	0.19E-03
0.75E-03	0.43E-02	0.41E-01	0.12E 00	0.17E 00	0.12E 00	0.70E-01	0.17E 00	0.17E 00	0.35E 00	0.35E 00	0.17E 00	0.33E-01	0.82E-03	0.27E-03
0.12E-02	0.56E-02	0.52E-01	0.15E 00	0.20E 00	0.15E 00	0.11E 00	0.27E 00	0.27E 00	0.51E 00	0.50E 00	0.25E 00	0.49E-01	0.12E-02	0.32E-03
0.97E-03	0.53E-02	0.47E-01	0.13E 00	0.18E 00	0.14E 00	0.12E 00	0.23E 00	0.23E 00	0.54E 00	0.53E 00	0.26E 00	0.51E-01	0.13E-02	0.38E-03
0.82E-03	0.50E-02	0.44E-01	0.12E 00	0.17E 00	0.13E 00	0.11E 00	0.22E 00	0.22E 00	0.54E 00	0.54E 00	0.27E 00	0.53E-01	0.13E-02	0.74E-03
0.11E-02	0.62E-02	0.57E-01	0.17E 00	0.23E 00	0.16E 00	0.15E 00	0.54E 00	0.54E 00	0.11E 01	0.11E 01	0.54E 00	0.14E 00	0.39E-02	0.94E-03
0.11E-02	0.68E-02	0.63E-01	0.17E 00	0.24E 00	0.19E 00	0.19E 00	0.73E 00	0.73E 00	0.14E 01	0.14E 01	0.68E 00	0.14E 00	0.39E-02	0.94E-03
0.12E-02	0.76E-02	0.66E-01	0.19E 00	0.28E 00	0.19E 00	0.22E 00	0.87E 00	0.87E 00	0.17E 01	0.17E 01	0.86E 00	0.18E 00	0.52E-02	0.11E-02
0.18E-02	0.71E-02	0.66E-01	0.18E 00	0.25E 00	0.21E 00	0.46E 00	0.17E 01	0.17E 01	0.32E 01	0.32E 01	0.16E 01	0.33E 00	0.10E-01	0.21E-02
0.15E-02	0.97E-02	0.84E-01	0.24E 00	0.34E 00	0.25E 00	0.50E 00	0.20E 01	0.20E 01	0.39E 01	0.39E 01	0.20E 01	0.41E 00	0.13E-01	0.56E-02
0.17E-02	0.92E-02	0.80E-01	0.23E 00	0.33E 00	0.24E 00	0.61E 00	0.26E 01	0.26E 01	0.51E 01	0.51E 01	0.26E 01	0.54E 00	0.17E-01	0.77E-02
0.22E-02	0.11E-01	0.95E-01	0.28E 00	0.38E 00	0.33E 00	0.12E 01	0.48E 01	0.48E 01	0.94E 01	0.93E 01	0.47E 01	0.93E 00	0.33E-01	0.51E-02
0.19E-02	0.14E-01	0.12E 00	0.37E 00	0.54E 00	0.35E 00	0.11E 01	0.50E 01	0.50E 01	0.10E 02	0.10E 02	0.51E 01	0.11E 01	0.37E-01	0.65E-02
0.25E-02	0.17E-01	0.15E 00	0.42E 00	0.59E 00	0.49E 00	0.23E 01	0.92E 01	0.92E 01	0.19E 02	0.19E 02	0.92E 01	0.21E 01	0.72E-01	0.12E-01
0.35E-02	0.21E-01	0.18E 00	0.56E 00	0.82E 00	0.60E 00	0.42E 01	0.20E 02	0.20E 02	0.39E 02	0.39E 02	0.20E 02	0.42E 01	0.15E 00	0.25E-01
0.42E-02	0.23E-01	0.22E 00	0.57E 00	0.80E 00	0.60E 00	0.72E 01	0.31E 02	0.31E 02	0.61E 02	0.60E 02	0.31E 02	0.66E 01	0.24E 00	0.40E-01
0.78E-02	0.23E-01	0.27E 00	0.74E 00	0.11E 01	0.14E 01	0.17E 02	0.76E 02	0.76E 02	0.15E 03	0.15E 03	0.76E 02	0.16E 02	0.60E 00	0.93E-01
0.65E-02	0.55E-01	0.46E 00	0.12E 01	0.18E 01	0.23E 01	0.21E 02	0.22E 02	0.22E 02	0.16E 03	0.16E 03	0.92E 02	0.20E 02	0.73E 00	0.12E 00
0.15E-01	0.73E-01	0.59E 00	0.17E 01	0.25E 01	0.39E 01	0.60E 02	0.23E 03	0.23E 03	0.54E 03	0.54E 03	0.28E 03	0.60E 02	0.22E 01	0.55E 00
0.21E-01	0.12E 00	0.94E 00	0.33E 01	0.44E 01	0.63E 01	0.11E 03	0.52E 03	0.52E 03	0.10E 04	0.10E 04	0.52E 03	0.11E 03	0.42E 01	0.68E 00
0.23E-01	0.14E 00	0.11E 01	0.33E 01	0.53E 01	0.79E 01	0.15E 03	0.62E 03	0.62E 03	0.13E 04	0.13E 04	0.69E 03	0.15E 03	0.56E 01	0.93E 00
0.17E-01	0.36E 00	0.26E 01	0.71E 01	0.32E 01	0.32E 01	0.15E 32	0.15E 03	0.15E 03	0.12E 04	0.12E 04	0.63E 03	0.14E 03	0.51E 01	0.93E 00
-0.551	0.10E-01	0.90E 00	0.75E 01	0.20E 02	0.20E 02	0.26E 02	0.10E 03	0.42E 03	0.81E 03	0.81E 03	0.41E 03	0.90E 02	0.34E 01	0.54E 00

Figure 3.12(a) Doppler Power vs. Delay Power, -17.65 to -0.551 Hz
(First Test Example)

Best Available Copy

0	20	21	22	23	24	25	26	27	27	28	29	30	31	32
0	0.51E-02	0.37E-01	0.11E-02	0.55E-02	0.39E-02	0.77E-02	0.82E-02	0.23E-03	0.43E-03	0.43E-03	0.22E-03	0.48E-02	0.18E-01	0.39E-03
	0.34E-02	0.13E-02	0.14E-03	0.29E-03	0.41E-03	0.12E-03	0.13E-03	0.15E-03	0.28E-03	0.28E-03	0.14E-03	0.31E-02	0.12E-01	0.19E-03
	0.25E-02	0.33E-02	0.61E-03	0.23E-04	0.32E-04	0.23E-04	0.34E-03	0.17E-03	0.13E-03	0.13E-03	0.67E-02	0.15E-02	0.35E-00	0.15E-03
	0.20E-02	0.17E-02	0.13E-04	0.73E-04	0.48E-04	0.15E-04	0.13E-04	0.19E-03	0.72E-02	0.73E-02	0.37E-02	0.37E-01	0.39E-00	0.14E-03
	0.11E-02	0.30E-02	0.23E-03	0.75E-03	0.10E-04	0.75E-04	0.25E-03	0.48E-02	0.40E-02	0.41E-02	0.20E-02	0.44E-01	0.16E-00	0.15E-03
	0.69E-03	0.33E-03	0.11E-02	0.81E-02	0.11E-03	0.91E-02	0.32E-02	0.15E-02	0.20E-02	0.13E-02	0.10E-02	0.22E-01	0.79E-01	0.13E-03
	0.75E-03	0.35E-03	0.61E-01	0.73E-01	0.10E-02	0.71E-01	0.31E-01	0.52E-01	0.10E-02	0.10E-02	0.53E-01	0.11E-01	0.13E-01	0.79E-03
	0.51E-03	0.20E-02	0.65E-01	0.53E-01	0.41E-01	0.23E-01	0.26E-01	0.40E-01	0.75E-01	0.75E-01	0.38E-01	0.82E-00	0.19E-01	0.53E-03
	0.54E-03	0.21E-02	0.13E-00	0.22E-00	0.12E-01	0.13E-01	0.12E-01	0.22E-01	0.45E-01	0.45E-01	0.23E-01	0.49E-00	0.13E-01	0.37E-03
	0.41E-03	0.11E-00	0.13E-01	0.53E-01	0.15E-01	0.15E-01	0.11E-01	0.16E-01	0.32E-01	0.32E-01	0.16E-01	0.35E-00	0.13E-01	0.25E-03
	0.45E-03	0.14E-01	0.53E-00	0.13E-00	0.15E-01	0.15E-01	0.44E-00	0.55E-00	0.18E-01	0.18E-01	0.91E-00	0.19E-00	0.53E-02	0.12E-03
	0.41E-03	0.25E-01	0.63E-00	0.63E-00	0.65E-00	0.43E-00	0.33E-00	0.58E-00	0.11E-01	0.10E-01	0.53E-00	0.11E-00	0.35E-02	0.13E-03
	0.59E-03	0.24E-01	0.31E-00	0.61E-00	0.61E-00	0.47E-00	0.27E-00	0.45E-00	0.83E-00	0.83E-00	0.42E-00	0.88E-01	0.27E-02	0.12E-03
	0.44E-03	0.18E-01	0.15E-00	0.47E-00	0.64E-00	0.43E-00	0.19E-00	0.41E-00	0.82E-00	0.82E-00	0.41E-00	0.85E-01	0.27E-02	0.61E-03
	0.43E-03	0.13E-01	0.11E-00	0.33E-00	0.43E-00	0.30E-00	0.16E-00	0.22E-00	0.41E-00	0.41E-00	0.21E-00	0.43E-01	0.15E-02	0.37E-03
	0.34E-03	0.13E-01	0.13E-00	0.29E-00	0.41E-00	0.30E-00	0.16E-00	0.22E-00	0.41E-00	0.41E-00	0.21E-00	0.43E-01	0.15E-02	0.37E-03
	0.45E-03	0.10E-01	0.33E-01	0.27E-00	0.37E-00	0.27E-00	0.15E-00	0.25E-00	0.47E-00	0.47E-00	0.24E-00	0.49E-01	0.15E-02	0.15E-03
	0.45E-03	0.77E-02	0.57E-01	0.19E-00	0.27E-00	0.19E-00	0.94E-01	0.15E-00	0.32E-00	0.32E-00	0.16E-00	0.33E-01	0.79E-02	0.12E-03
	0.44E-03	0.83E-02	0.74E-01	0.21E-00	0.39E-00	0.22E-00	0.11E-00	0.15E-00	0.26E-00	0.26E-00	0.13E-00	0.28E-01	0.73E-03	0.23E-03
	0.44E-03	0.74E-02	0.63E-01	0.18E-00	0.26E-00	0.18E-00	0.82E-01	0.12E-00	0.23E-00	0.24E-00	0.12E-00	0.24E-01	0.70E-03	0.23E-03
	0.45E-03	0.63E-02	0.59E-01	0.16E-00	0.22E-00	0.16E-00	0.82E-01	0.12E-00	0.23E-00	0.24E-00	0.12E-00	0.24E-01	0.70E-03	0.23E-03
	0.51E-03	0.56E-02	0.51E-01	0.14E-00	0.20E-00	0.15E-00	0.74E-01	0.95E-01	0.17E-00	0.17E-00	0.84E-01	0.17E-01	0.44E-03	0.20E-03
	0.53E-03	0.51E-02	0.53E-01	0.15E-00	0.21E-00	0.15E-00	0.63E-01	0.87E-01	0.17E-00	0.17E-00	0.84E-01	0.17E-01	0.54E-03	0.17E-03
	0.45E-03	0.56E-02	0.56E-01	0.14E-00	0.19E-00	0.14E-00	0.55E-01	0.82E-01	0.15E-00	0.15E-00	0.77E-01	0.15E-01	0.49E-03	0.17E-03
	0.50E-03	0.51E-02	0.53E-01	0.13E-00	0.18E-00	0.13E-00	0.63E-01	0.72E-01	0.13E-00	0.13E-00	0.63E-01	0.13E-01	0.73E-03	0.12E-03
	0.45E-03	0.51E-02	0.51E-01	0.12E-00	0.17E-00	0.12E-00	0.44E-01	0.44E-01	0.90E-01	0.91E-01	0.44E-01	0.89E-02	0.51E-03	0.33E-03
	0.52E-03	0.53E-02	0.53E-01	0.13E-00	0.18E-00	0.13E-00	0.59E-01	0.84E-01	0.15E-00	0.15E-00	0.73E-01	0.15E-01	0.53E-03	0.13E-03
	0.43E-03	0.45E-02	0.45E-01	0.11E-00	0.15E-00	0.11E-00	0.50E-01	0.59E-01	0.18E-01	0.18E-01	0.45E-01	0.93E-02	0.33E-03	0.13E-03
	0.63E-03	0.43E-02	0.53E-01	0.11E-00	0.15E-00	0.11E-00	0.49E-01	0.59E-01	0.18E-01	0.18E-01	0.45E-01	0.93E-02	0.33E-03	0.13E-03
	0.60E-03	0.43E-02	0.53E-01	0.11E-00	0.15E-00	0.11E-00	0.49E-01	0.59E-01	0.18E-01	0.18E-01	0.45E-01	0.93E-02	0.33E-03	0.13E-03
17.096	0.60E-03	0.43E-02	0.53E-01	0.11E-00	0.15E-00	0.11E-00	0.49E-01	0.59E-01	0.18E-01	0.18E-01	0.45E-01	0.93E-02	0.33E-03	0.13E-03

Figure 3.12(b) Doppler Power vs. Delay Power, 0 Hz to 17.095 Hz
(First Test Example)

Best Available Copy

14 TAPS EXAMINED.

MARGINAL DELAY POWER DISTRIBUTION FOR THE 14 TAPS EXAMINED.

EACH TAP IS SEPARATED BY 0.111E-03 SECONDS.

0.1611E 00 0.2858E 03 0.2484E 04 0.7153E 04 0.4541E 01
0.3297E 04 0.7180E 03 0.2683E 02 0.4541E 01

MARGINAL DOPPLER POWER DISTRIBUTION FROM -17.647 HZ TO 17.036 HZ IN STEPS OF 0.551 HZ

0.8123E 00 0.8578E 00 0.7296E 00 0.8773E 00 0.9926E 00 0.9374E 00 0.9371E 00 0.1355E 01 0.1371E 01
0.1530E 01 0.2263E 01 0.2303E 01 0.2257E 01 0.4157E 01 0.5219E 01 0.6359E 01 0.1369E 02 0.1748E 02
0.3143E 02 0.3409E 02 0.8421E 02 0.1283E 03 0.1993E 03 0.4893E 03 0.5925E 03 0.3309E 04 0.4393E 04
0.4041E 04 0.3725E 04 0.1702E 04 0.2127E 04 0.1814E 05 0.1504E 05 0.3235E 04 0.1764E 04 0.6270E 02
0.4642E 02 0.2625E 02 0.1937E 02 0.1501E 02 0.8509E 01 0.9138E 01 0.5464E 01 0.4030E 03 0.1598E 03
0.2551E 01 0.1825E 01 0.1743E 01 0.1508E 01 0.1413E 01 0.1150E 01 0.1164E 01 0.4633E 01 0.3977E 01
0.1024E 01 0.7536E 00 0.7573E 00 0.7963E 00 0.1079E 01 0.9719E 00 0.7735E 00 0.2564E 01 0.7735E 00

DELAY MEAN= 0.763E-03 SECONDS---CORRESPONDING STANDARD DEVIATION= 0.277E-03 SECONDS

3.532 HZ

-----RMS DOPPLER SPREAD=

0.235 HZ

DOPPLER MEAN=

DELAY PEAKS OCCUR AT TAPS:

5 9

WITH CORRESPONDING TIME DIFFERENCES IN SECONDS BETWEEN DELAY PEAKS OF:

0.4444E-03

DOPPLER PEAKS OCCUR AT FREQUENCIES (IN HZ):

-0.1654E 01 0.1654E 01

(DDSTAT Output)

Figure 3.13 Statistical Summary of First Test Example

Best Available Copy

DOPPLER STATISTICS FOR THE 14 TAPS EXAMINED:

	DOPPLER MEAN (HZ)	RMS DOPPLER SPREAD (HZ)	RELATIVE TAP ENERGY (DB)
TAP 1	-2.212	10.500	-47.681
TAP 2	1.479	1.284	-15.410
TAP 3	1.480	1.282	-6.017
TAP 4	1.481	1.280	-1.423
TAP 5	1.481	1.283	0.000
TAP 6	1.459	1.359	-1.397
TAP 7	0.939	2.972	-4.857
TAP 8	-1.141	3.241	-4.355
TAP 9	-1.387	2.931	-1.862
TAP 10	-1.386	2.931	-1.863
TAP 11	-1.385	2.922	-4.787
TAP 12	-1.377	2.908	-11.407
TAP 13	-1.369	2.833	-25.683
TAP 14	-1.233	3.190	-33.397

Figure 3.13 (Continued)

a Doppler peak at -1.654 Hz corresponds to three times the Doppler step size of 0.551 Hz, while the actual Doppler peak is at -1.5 Hz. More accurate peak location by numerical interpolation can be included if the need arises for more than just gross channel parameters.

Of particular interest in Figure 3.13 are the Doppler statistics for the 14 taps examined. According to Table 3-2, the channel path at 0 relative delay should have an rms Doppler spread of 1 Hz, while the path at 0.5 msec relative delay should have an rms Doppler spread of 3.0 Hz. Noting from the printout that delay peaks occur at taps 5 and 9, we can easily verify that the measured rms Doppler spreads for the two-paths are 1.28 Hz and 2.93 Hz, respectively. These numbers seem reasonable in view of the previously discussed 21% standard deviation in measurement.

As a visual aid to the user, DDSTAT plots marginal delay power and marginal Doppler power. These appear in Figures 3.14 and 3.15, respectively. Observe that the 0.5-msec path separation is easily resolved by the programs. The 3-Hz Doppler shift between paths is also easily resolved. In fact, it seems reasonable that, for small Doppler spreads, less than 1-Hz resolution should be possible for Doppler peaks at the same delay.

In an effort to more clearly demonstrate the resolution capabilities of the software processor, we have conducted a second test with each channel path less distinct from the others in delay and Doppler than the channel paths in the first test. A summary of the delay and Doppler characteristics for this three-path test case is presented in Table 3-3. The relative path delays specified are chosen to place peaks in the measured delay power spectrum at integral multiplies of the intertap spacing in seconds. This allows best-case estimation of software delay resolution capabilities. Observe that the intertap spacings correspond to 2 and 3 taps, respectively — in distinction to the first test in which the path delay was equivalent to 4-1/2 taps.

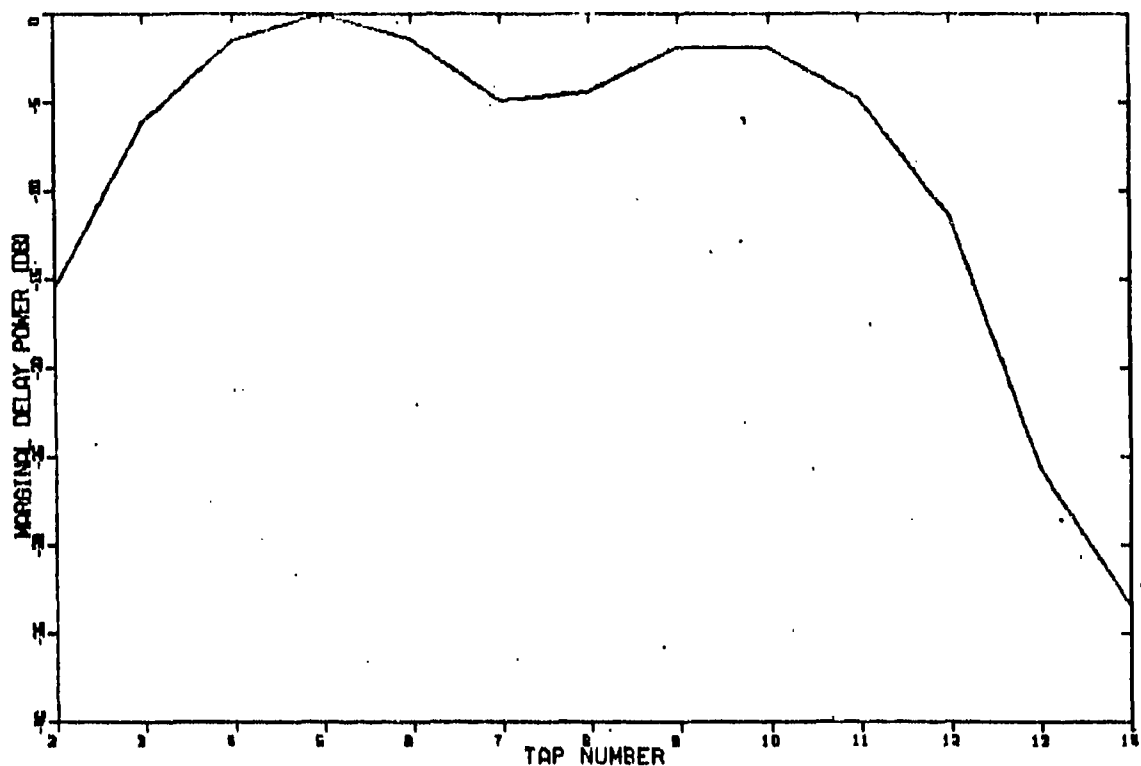


Figure 3.14 Marginal Delay Power in dB for First Test Example
(Each tap separated by 0.111 msec)

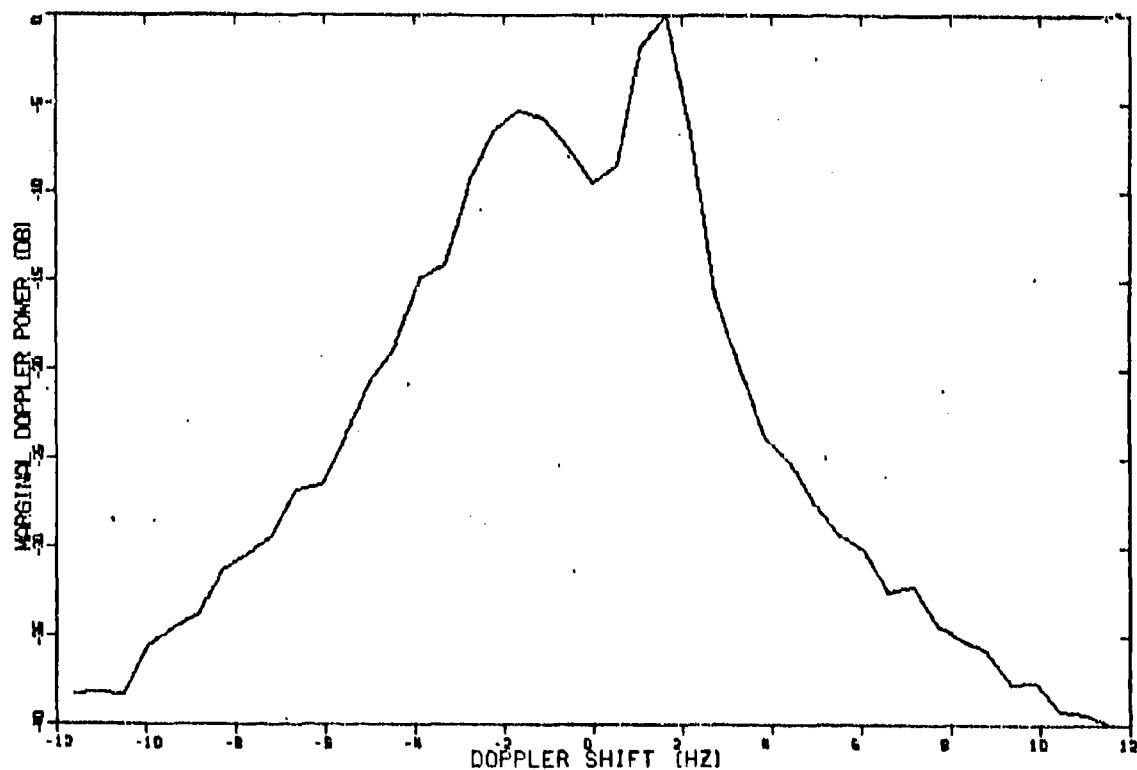


Figure 3.15 Marginal Doppler Power for First Test Example

TABLE 3-3

THREE-PATH TEST DATA SUMMARY

Parameter	Path 1	Path 2	Path 3
Doppler Standard Deviation (Hz) (RMS Doppler Spread)	0.25 (0.5)	0.25 (0.5)	0.25 (0.5)
Power (dB)	-4.771	-4.771	-4.771
Doppler Shift (Hz)	-1.102	-1.653	-2.755
Path Delay (sec)	0	0.000222	0.000555

Doppler shift magnitudes are constrained to be (1) less than 3 Hz in order to minimize deterioration resulting from interpolation filters in RECSCF and PLYSCF, and (2) greater than 1 Hz in order that spectral estimates be averaged over as large a number of independent samples as possible. Since the test has been conducted over 60 seconds of data, even at 0.55 Hz we can expect a standard deviation in measurement of 17%. In addition, the mean of each Doppler lobe is placed at an integer multiple of resolution cell increments (0.551 Hz). The rms Doppler spread of each path is less than one resolution cell.

As noted previously, RECSCF (in addition to its function of measuring the complex channel snapshots) also outputs the average tap power for the entire processing time. This information is reproduced in Figure 3.16. The two measured peaks are underlined. Without resolution limitations, the three-path peaks would have appeared at the 24th, 26th, and 29th tap. It is clear that the peak which occurs at the 25th tap is a result of the first and second paths combining.

The results of running DDSPEC and DDREAD appear in Figures 3.17(a) and 3.17(b). As before, delay Doppler peaks are underlined. It is relatively easy to determine peaks in the two-dimensional delay Doppler surface before marginal distributions are derived. However, the user must resort to first derivative estimation in order to distinguish the first two paths.

The statistical information obtained with the aid of DDSTAT is presented in Figure 3.18. As expected, the program finds only two peaks in delay and Doppler. It should be remembered, however, that the number of peaks in the marginal distributions is not necessarily the same as the number of distinguishable peaks in the delay Doppler surface.

0.1443E-02	0.1679E-02	0.2522E-02	0.2964E-02	0.3252E-02	0.3651E-02	0.3371E-02	0.2327E-02	0.2133E-02	0.1061E-02
0.6164E-03	0.5386E-03	0.1521E-02	0.7001E-03	0.3363E-02	0.1658E-02	0.1508E-01	0.3261E-03	0.1075E-00	0.6519E-02
0.4765E-01	0.4108E-02	0.1253E-03	0.2180E-03	0.2616E-03	0.2372E-03	0.1832E-03	0.1726E-03	0.1324E-03	0.1255E-03
0.4338E-02	0.4904E-01	0.1458E-01	0.9946E-01	0.4535E-02	0.1155E-01	0.1123E-02	0.6527E-02	0.1618E-02	0.1673E-03
0.5447E-03	0.6543E-03	0.6742E-03	0.8428E-03	0.1248E-02	0.2019E-02	0.2218E-02	0.3051E-02	0.3316E-02	0.2537E-02
0.2470E-02	0.2124E-02	0.1060E-02	0.4154E-03	0.3848E-03	0.4706E-03	0.9823E-03	0.1833E-02	0.1662E-02	0.8345E-03
0.5267E-03	0.4564E-03	0.3485E-03	0.4913E-03	0.7391E-03	0.7372E-03	0.8713E-03	0.1310E-02	0.1281E-02	0.6435E-03
0.2071E-03	0.2483E-03	0.5942E-03	0.3643E-03	0.3892E-03	0.6100E-03	0.6251E-03	0.2410E-02	0.6011E-04	0.2074E-03
0.2063E-03	0.2702E-03	0.4664E-03	0.3283E-03	0.1495E-03	0.2440E-03	0.5779E-03	0.6439E-03	0.9574E-03	0.5724E-03
0.6732E-03	0.3415E-03	0.2426E-03	0.2550E-03	0.2558E-03	0.5293E-03	0.8676E-03	0.7910E-03	0.7930E-03	0.1342E-02
0.1761E-02	0.1415E-02	0.5970E-03	0.1086E-03	0.3509E-03	0.6909E-03	0.5217E-03	0.1634E-03	0.2538E-04	0.3924E-04
0.5776E-04	0.5057E-04	0.2797E-04	0.4855E-04	0.1384E-03	0.2131E-03	0.1932E-03	0.1172E-03	0.1474E-03	0.3634E-03
0.5711E-03	0.5327E-03	0.4136E-03	0.4717E-03	0.7805E-03	0.1322E-02	0.1696E-02	0.1345E-02	0.5978E-03	0.2051E-03
0.1889E-05	0.2475E-03	0.2000E-03	0.1124E-03	0.3672E-03	0.7018E-03	0.5085E-03	0.2717E-03	0.6455E-03	0.1231E-02
0.1473E-02	0.1330E-02	0.1213E-02	0.1216E-02	0.1309E-02	0.1209E-02	0.1288E-02	0.1903E-02	0.2355E-02	0.1987E-02
0.1142E-02	0.4558E-03	0.2183E-03	0.3639E-03	0.5699E-03	0.6440E-03	0.7930E-03	0.8955E-03	0.6261E-03	0.3833E-03
0.8713E-03	0.1622E-02	0.2281E-02	0.2296E-02	0.1540E-02	0.7022E-03	0.4215E-03	0.4714E-03	0.5176E-03	0.7034E-03
0.1011E-02	0.1075E-02	0.7149E-03	0.2205E-03	0.1460E-03	0.6274E-03	0.9157E-03	0.5074E-03	0.1427E-03	0.3534E-03
0.7936E-03	0.9423E-03	0.8507E-03	0.9275E-03	0.1200E-02	0.1445E-02	0.1105E-02	0.7814E-03	0.8202E-03	0.2014E-01
0.1015E-02	0.6789E-03	0.2065E-03	0.2498E-03	0.7868E-03	0.1037E-02	0.6432E-03	0.2613E-03	0.5812E-03	0.1171E-02
0.1281E-02	0.1074E-02	0.8461E-03	0.5472E-03	0.3434E-03	0.3146E-03	0.5018E-03	0.2849E-03	0.5995E-03	0.3341E-03
0.3746E-03	0.4674E-03	0.3711E-03	0.1255E-03	0.1011E-03	0.1732E-03	0.2504E-03	0.5174E-03	0.7937E-03	0.1112E-02
0.1565E-02	0.1220E-02	0.8113E-03	0.4171E-03	0.1799E-03	0.1270E-03	0.1713E-03	0.2630E-03	0.5036E-03	0.4893E-03
0.6487E-03	0.6754E-03	0.7735E-03	0.6366E-03	0.5985E-03	0.3624E-03	0.6535E-03	0.1041E-02	0.1235E-02	0.1342E-02
0.8653E-03	0.8261E-03	0.5241E-03	0.2721E-03	0.4803E-03	0.8223E-03	0.1212E-02	0.1377E-02	0.5702E-03	0.6937E-03
0.8997E-03	0.8197E-03	0.5223E-03	0.1031E-02	0.1453E-02					

Figure 3.16 Tap Power Summed Over 2100 Snapshots for Second Test Example (RECSF Output)

20	21	22	23	24	25	26	27	28	29	30	31	32	33
-17.64	0.92E-05	0.22E-02	0.19E-01	0.60E-01	0.11E 00	0.13E 00	0.84E-01	0.82E-01	0.92E-01	0.66E-01	0.23E-01	0.26E-02	0.13E-04
	0.12E-04	0.23E-02	0.20E-01	0.60E-01	0.11E 00	0.13E 00	0.87E-01	0.85E-01	0.97E-01	0.70E-01	0.24E-01	0.27E-02	0.15E-03
	0.95E-05	0.23E-02	0.20E-01	0.62E-01	0.11E 00	0.13E 00	0.88E-01	0.87E-01	0.98E-01	0.71E-01	0.25E-01	0.28E-02	0.13E-03
	0.10E-04	0.24E-02	0.20E-01	0.63E-01	0.11E 00	0.14E 00	0.90E-01	0.89E-01	0.10E 00	0.73E-01	0.26E-01	0.28E-02	0.13E-03
	0.12E-04	0.24E-02	0.21E-01	0.64E-01	0.11E 00	0.14E 00	0.95E-01	0.95E-01	0.11E 00	0.76E-01	0.27E-01	0.31E-02	0.15E-03
	0.13E-04	0.25E-02	0.22E-01	0.67E-01	0.12E 00	0.15E 00	0.10E 00	0.10E 00	0.11E 00	0.81E-01	0.28E-01	0.33E-02	0.17E-03
	0.14E-04	0.26E-02	0.23E-01	0.69E-01	0.12E 00	0.15E 00	0.10E 00	0.10E 00	0.12E 00	0.85E-01	0.30E-01	0.33E-02	0.17E-03
	0.14E-04	0.26E-02	0.24E-01	0.72E-01	0.12E 00	0.15E 00	0.11E 00	0.11E 00	0.13E 00	0.92E-01	0.32E-01	0.35E-02	0.20E-03
	0.17E-04	0.31E-02	0.25E-01	0.77E-01	0.14E 00	0.16E 00	0.12E 00	0.12E 00	0.13E 00	0.96E-01	0.33E-01	0.36E-02	0.17E-03
	0.16E-04	0.32E-02	0.25E-01	0.80E-01	0.14E 00	0.16E 00	0.13E 00	0.13E 00	0.15E 00	0.11E 00	0.37E-01	0.41E-02	0.15E-03
	0.19E-04	0.34E-02	0.25E-01	0.85E-01	0.15E 00	0.18E 00	0.13E 00	0.14E 00	0.16E 00	0.11E 00	0.40E-01	0.44E-02	0.13E-03
	0.21E-04	0.36E-02	0.25E-01	0.90E-01	0.16E 00	0.20E 00	0.14E 00	0.15E 00	0.17E 00	0.12E 00	0.43E-01	0.48E-02	0.13E-03
	0.23E-04	0.38E-02	0.25E-01	0.10E 00	0.18E 00	0.22E 00	0.17E 00	0.17E 00	0.20E 00	0.15E 00	0.51E-01	0.57E-02	0.15E-03
	0.24E-04	0.43E-02	0.25E-01	0.12E 00	0.21E 00	0.26E 00	0.17E 00	0.18E 00	0.21E 00	0.16E 00	0.54E-01	0.61E-02	0.15E-03
	0.24E-04	0.48E-02	0.25E-01	0.13E 00	0.22E 00	0.28E 00	0.21E 00	0.22E 00	0.25E 00	0.18E 00	0.63E-01	0.71E-02	0.15E-03
	0.26E-04	0.47E-02	0.25E-01	0.12E 00	0.23E 00	0.30E 00	0.23E 00	0.24E 00	0.28E 00	0.20E 00	0.69E-01	0.77E-02	0.15E-03
	0.37E-04	0.59E-02	0.25E-01	0.16E 00	0.29E 00	0.37E 00	0.27E 00	0.31E 00	0.37E 00	0.27E 00	0.95E-01	0.11E-01	0.15E-03
	0.36E-04	0.68E-02	0.25E-01	0.18E 00	0.32E 00	0.41E 00	0.33E 00	0.37E 00	0.42E 00	0.30E 00	0.10E 00	0.12E-01	0.15E-03
	0.49E-04	0.75E-02	0.25E-01	0.20E 00	0.37E 00	0.49E 00	0.39E 00	0.43E 00	0.51E 00	0.37E 00	0.13E 00	0.14E-01	0.15E-03
	0.50E-04	0.94E-02	0.25E-01	0.24E 00	0.44E 00	0.57E 00	0.45E 00	0.54E 00	0.64E 00	0.46E 00	0.16E 00	0.18E-01	0.15E-03
	0.37E-04	0.12E-01	0.30E 00	0.54E 00	0.72E 00	0.71E 00	0.65E 00	0.82E 00	0.99E 00	0.71E 00	0.25E 00	0.27E-01	0.15E-03
	0.93E-04	0.15E-01	0.12E 00	0.38E 00	0.67E 00	0.75E 00	0.62E 00	0.86E 00	0.11E 01	0.85E 00	0.30E 00	0.33E-01	0.15E-03
	0.18E-03	0.21E-01	0.17E 00	0.51E 00	0.91E 00	0.14E 01	0.15E 01	0.20E 01	0.23E 01	0.16E 01	0.55E 00	0.62E-01	0.15E-03
	0.30E-03	0.26E-01	0.22E 00	0.68E 00	0.13E 01	0.17E 01	0.17E 01	0.23E 01	0.37E 01	0.28E 01	0.96E 00	0.11E 00	0.15E-03
	0.94E-03	0.32E-01	0.28E 00	0.92E 00	0.19E 01	0.29E 01	0.54E 01	0.11E 02	0.14E 02	0.97E 01	0.33E 01	0.38E 00	0.15E-03
	0.26E-02	0.72E-01	0.59E 00	0.15E 01	0.30E 01	0.57E 01	0.13E 02	0.33E 02	0.45E 02	0.53E 02	0.12E 02	0.43E 01	0.15E-03
	0.44E-01	0.13E 00	0.13E 01	0.35E 01	0.80E 01	0.44E 02	0.26E 03	0.73E 03	0.10E 04	0.73E 03	0.25E 05	0.28E 02	0.15E-03
	0.22E 00	0.35E 00	0.28E 01	0.39E 01	0.28E 02	0.25E 03	0.16E 04	0.44E 04	0.60E 04	0.43E 04	0.15E 04	0.17E 05	0.15E-03
	0.40E-01	0.19E 01	0.12E 02	0.68E 02	0.33E 03	0.83E 03	0.12E 04	0.12E 04	0.12E 04	0.83E 05	0.29E 05	0.33E 02	0.15E-03
	0.21E-02	0.32E 02	0.26E 03	0.11E 04	0.31E 04	0.70E 04	0.47E 04	0.15E 04	0.22E 05	0.53E 05	0.17E 02	0.14E 01	0.15E-03
	0.01E-03	0.16E 02	0.14E 04	0.39E 04	0.57E 04	0.33E 04	0.59E 05	0.20E 05	0.46E 05	0.97E 01	0.43E 01	0.33E 00	0.15E-03
0.551	0.20E-03	0.54E 02	0.30E 05	0.85E 05	0.12E 04	0.91E 03	0.36E 05	0.15E 02	0.53E 01	0.29E 01	0.12E 01	0.11E 00	0.15E-03

Figure 3.17(a) Doppler Power vs. Delay Power, -17.65 to -0.551 Hz
(Second Test Example)

	20	21	22	23	24	25	26	27	28	29	30	31	32	33
0	0.33E-04	0.13E-01	0.16E-02	0.43E-02	0.72E-02	0.62E-02	0.33E-02	0.13E-02	0.47E-01	0.31E-01	0.22E-01	0.60E-00	0.87E-01	0.16E-01
	0.33E-04	0.26E-00	0.24E-01	0.74E-01	0.12E-02	0.11E-02	0.73E-01	0.44E-01	0.25E-01	0.18E-01	0.11E-01	0.39E-00	0.44E-01	0.44E-01
	0.12E-03	0.11E-00	0.41E-01	0.34E-01	0.55E-01	0.56E-01	0.41E-01	0.24E-01	0.15E-01	0.12E-01	0.73E-00	0.27E-00	0.31E-01	0.30E-02
	0.12E-03	0.83E-01	0.71E-00	0.22E-01	0.13E-01	0.13E-01	0.22E-01	0.12E-01	0.73E-00	0.52E-00	0.47E-00	0.20E-00	0.22E-01	0.23E-02
	0.74E-04	0.31E-01	0.27E-00	0.30E-00	0.13E-01	0.13E-01	0.11E-01	0.60E-00	0.60E-00	0.52E-00	0.47E-00	0.15E-00	0.17E-01	0.11E-01
	0.11E-03	0.25E-01	0.22E-00	0.59E-00	0.13E-01	0.13E-01	0.83E-00	0.55E-00	0.51E-00	0.41E-00	0.33E-00	0.10E-00	0.12E-00	0.13E-02
	0.40E-04	0.20E-01	0.13E-00	0.55E-00	0.93E-00	0.11E-01	0.52E-00	0.35E-00	0.30E-00	0.32E-00	0.22E-00	0.75E-01	0.67E-02	0.31E-02
	0.14E-04	0.14E-01	0.12E-00	0.35E-00	0.58E-00	0.13E-01	0.51E-00	0.34E-00	0.30E-00	0.32E-00	0.22E-00	0.63E-01	0.77E-02	0.34E-02
	0.14E-04	0.11E-01	0.25E-01	0.29E-00	0.51E-00	0.16E-00	0.51E-00	0.34E-00	0.27E-00	0.28E-00	0.20E-00	0.60E-01	0.67E-02	0.30E-02
	0.11E-04	0.28E-02	0.65E-01	0.23E-00	0.43E-00	0.47E-00	0.39E-00	0.27E-00	0.23E-00	0.24E-00	0.17E-00	0.60E-01	0.67E-02	0.30E-02
	0.10E-04	0.17E-02	0.57E-01	0.21E-00	0.33E-00	0.43E-00	0.39E-00	0.24E-00	0.19E-00	0.20E-00	0.17E-00	0.52E-01	0.57E-02	0.29E-02
	0.12E-04	0.64E-02	0.55E-01	0.17E-00	0.31E-00	0.37E-00	0.32E-00	0.22E-00	0.15E-00	0.20E-00	0.17E-00	0.52E-01	0.57E-02	0.29E-02
	0.83E-05	0.62E-02	0.53E-01	0.16E-00	0.27E-00	0.30E-00	0.25E-00	0.17E-00	0.14E-00	0.15E-00	0.13E-00	0.33E-01	0.41E-02	0.13E-02
	0.81E-05	0.53E-02	0.47E-01	0.15E-00	0.25E-00	0.29E-00	0.24E-00	0.16E-00	0.14E-00	0.15E-00	0.13E-00	0.33E-01	0.41E-02	0.13E-02
	0.87E-05	0.45E-02	0.39E-01	0.12E-00	0.21E-00	0.25E-00	0.22E-00	0.16E-00	0.14E-00	0.15E-00	0.13E-00	0.33E-01	0.41E-02	0.13E-02
	0.83E-05	0.42E-02	0.36E-01	0.11E-00	0.19E-00	0.23E-00	0.20E-00	0.14E-00	0.12E-00	0.13E-00	0.11E-00	0.32E-01	0.35E-02	0.13E-02
	0.95E-05	0.38E-02	0.33E-01	0.10E-00	0.17E-00	0.20E-00	0.18E-00	0.12E-00	0.10E-00	0.11E-00	0.09E-01	0.31E-01	0.35E-02	0.13E-02
	0.68E-05	0.35E-02	0.31E-01	0.97E-01	0.17E-00	0.20E-00	0.18E-00	0.12E-00	0.10E-00	0.11E-00	0.09E-01	0.31E-01	0.35E-02	0.13E-02
	0.88E-05	0.31E-02	0.26E-01	0.81E-01	0.14E-00	0.17E-00	0.15E-00	0.11E-00	0.10E-00	0.11E-00	0.09E-01	0.31E-01	0.35E-02	0.13E-02
	0.75E-05	0.33E-02	0.29E-01	0.88E-01	0.15E-00	0.17E-00	0.14E-00	0.11E-00	0.10E-00	0.11E-00	0.09E-01	0.31E-01	0.35E-02	0.13E-02
	0.85E-05	0.28E-02	0.24E-01	0.75E-01	0.13E-00	0.16E-00	0.14E-00	0.10E-00	0.94E-01	0.10E-00	0.74E-01	0.23E-01	0.23E-02	0.13E-02
	0.83E-05	0.28E-02	0.24E-01	0.73E-01	0.13E-00	0.15E-00	0.13E-00	0.95E-01	0.87E-01	0.95E-01	0.68E-01	0.24E-01	0.26E-02	0.14E-02
	0.91E-05	0.26E-02	0.23E-01	0.70E-01	0.12E-00	0.15E-00	0.13E-00	0.95E-01	0.83E-01	0.97E-01	0.70E-01	0.24E-01	0.27E-02	0.10E-02
	0.80E-05	0.26E-02	0.22E-01	0.66E-01	0.11E-00	0.13E-00	0.11E-00	0.83E-01	0.81E-01	0.91E-01	0.56E-01	0.23E-01	0.26E-02	0.17E-02
	0.10E-04	0.24E-02	0.21E-01	0.65E-01	0.12E-00	0.14E-00	0.12E-00	0.89E-01	0.82E-01	0.90E-01	0.65E-01	0.23E-01	0.26E-02	0.13E-02
	0.85E-05	0.23E-02	0.20E-01	0.63E-01	0.11E-00	0.13E-00	0.12E-00	0.86E-01	0.81E-01	0.89E-01	0.64E-01	0.23E-01	0.26E-02	0.10E-02
	0.23E-05	0.23E-02	0.20E-01	0.61E-01	0.11E-00	0.13E-00	0.11E-00	0.82E-01	0.79E-01	0.83E-01	0.65E-01	0.23E-01	0.26E-02	0.14E-02
	0.93E-05	0.23E-02	0.19E-01	0.60E-01	0.11E-00	0.13E-00	0.11E-00	0.82E-01	0.79E-01	0.83E-01	0.65E-01	0.23E-01	0.26E-02	0.13E-02
	0.33E-05	0.22E-02	0.19E-01	0.60E-01	0.11E-00	0.13E-00	0.11E-00	0.82E-01	0.79E-01	0.83E-01	0.65E-01	0.23E-01	0.26E-02	0.13E-02
	0.11E-04	0.22E-02	0.19E-01	0.58E-01	0.10E-00	0.13E-00	0.11E-00	0.82E-01	0.79E-01	0.83E-01	0.65E-01	0.23E-01	0.26E-02	0.13E-02
	0.93E-05	0.22E-02	0.19E-01	0.59E-01	0.10E-00	0.13E-00	0.11E-00	0.82E-01	0.79E-01	0.83E-01	0.65E-01	0.23E-01	0.26E-02	0.13E-02
17.096	0.37E-05	0.22E-02	0.19E-01	0.59E-01	0.10E-00	0.13E-00	0.11E-00	0.82E-01	0.79E-01	0.83E-01	0.65E-01	0.23E-01	0.26E-02	0.13E-02

Figure 3.17(b) Doppler Power vs. Delay Power, 0 Hz to 17.095 Hz
(Second Test Example)

MARGINAL DELAY POWER DISTRIBUTION FOR THE 14 TAPS EXAMINED.
EACH TAP IS SEPARATED BY 0.11E-03 SECONDS.

0.3173E 00	0.2279E 03	0.1966E 04	0.6033E 04	0.1046E 05	0.1253E 05	0.1134E 05	0.8744E 04	0.8253E 04	0.2637E 04
0.6012E 04	0.2077E 03	0.2348E 03	0.6924E 00						

MARGINAL DOPPLER POWER DISTRIBUTION FROM -17.647 HZ TO 17.096 HZ IN STEPS OF 0.551 HZ

0.7783E 00	0.7995E 00	0.8167E 00	0.8344E 03	0.8730E 00	0.9150E 00	0.9530E 00	0.9939E 00	0.1079E 01	0.1142E 01
0.1225E 01	0.1302E 01	0.1497E 01	0.1627E 01	0.1884E 01	0.1997E 01	0.2545E 01	0.2908E 01	0.3443E 01	0.4162E 01
0.5037E 01	0.6594E 01	0.1220E 02	0.1761E 02	0.5241E 02	0.1534E 03	0.3089E 04	0.1840E 05	0.7113E 04	0.3325E 05
0.1558E 05	0.3788E 04	0.2557E 03	0.5112E 02	0.2607E 02	0.1558E 02	0.7673E 01	0.8643E 01	0.5453E 01	0.3438E 01
0.3105E 01	0.2310E 01	0.2259E 01	0.2052E 01	0.1678E 01	0.1530E 01	0.1417E 01	0.1297E 01	0.1137E 01	0.1125E 01
0.1015E 01	0.9783E 00	0.9471E 00	0.8812E 00	0.8810E 00	0.7975E 00	0.8196E 00	0.7889E 00	0.7754E 00	0.7723E 00
0.7648E 00	0.7526E 00	0.7695E 00	0.7694E 00						

DELAY MEAN= 0.016E-03 SECONDS---CORRESPONDING STANDARD DEVIATION= 0.258E-03 SECONDS

DOPPLER MEAN= -1.840 HZ-----RMS DOPPLER SPREAD= 1.639 HZ

DELAY PEAKS OCCUR AT TAPS:

5 10

WITH CORRESPONDING TIME DIFFERENCES IN SECONDS BETWEEN DELAY PEAKS OF:

0.444E-03

DOPPLER PEAKS OCCUR AT FREQUENCIES (IN HZ):

-0.2037E 01 -0.1634E 01

Figure 3.18 Statistical Summary of Second Test Example (DDSTAT Output)

DOPPLER STATISTICS FOR THE 14 TAPS EXAMINED:

	DOPPLER MEAN (HZ)	RMS DOPPLER SPREAD (HZ)	RELATIVE TAP ENERGY (DB)
TAP 1	-2.764	1.233	-45.968
TAP 2	-1.099	0.953	-17.405
TAP 3	-1.095	0.948	-3.043
TAP 4	-1.127	0.979	-3.176
TAP 5	-1.231	1.055	-0.738
TAP 6	-1.393	1.033	0.000
TAP 7	-1.531	1.080	-0.437
TAP 8	-1.909	1.331	-1.564
TAP 9	-2.450	1.322	-1.615
TAP 10	-2.713	1.004	-1.617
TAP 11	-2.741	0.947	-3.191
TAP 12	-2.740	0.957	-7.607
TAP 13	-2.743	0.946	-17.274
TAP 14	-1.560	1.197	-42.577

Figure 3.18 (Continued)

The Doppler statistics for the 14 taps examined merit some comment. The measured Doppler shifts at taps 4, 6, and 10 of -1.13 Hz, -1.4 Hz, and -2.71 Hz, respectively, agrees well with the specified values of -1.1 Hz, -1.65 Hz, and -2.76 Hz, especially considering the measurement corruption resulting from path interference. However, the measured Doppler spread at each of these taps is approximately twice the value which had been expected. This is a result of the mainlobe width of the window function used for spectral estimation. This can be reduced by increasing the length of the window (and the associated FFT); however, for a fixed duration data sample, this would reduce the number of periodograms over which averaging is performed and increase the variance of the estimate.

Graphical presentation of marginal delay power and marginal Doppler power appears in Figures 3.19 and 3.20, respectively. Coalescence of the first two paths in both delay and Doppler is obvious. However, the position of the third path, which is separated from the others by a minimum of three taps and 1.1 Hz, is easily extracted. We might estimate the lower resolution of the present software system to be $\frac{1}{3}$ msec in delay and 1 Hz in Doppler.

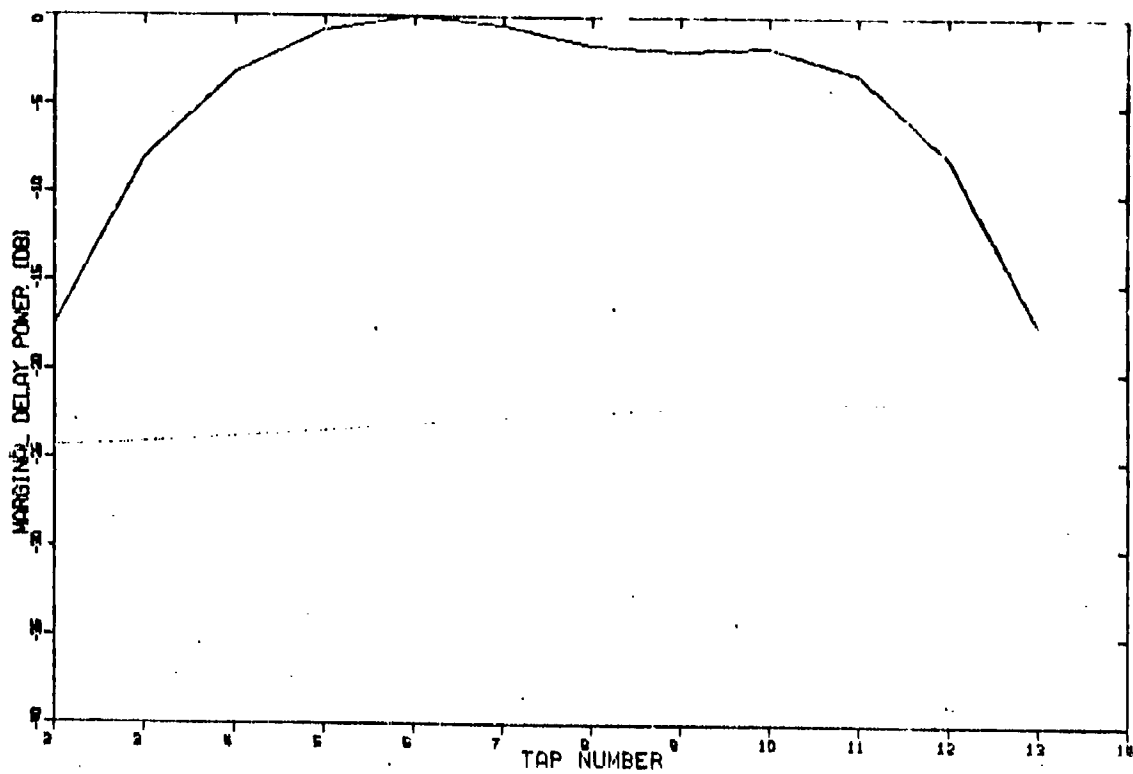


Figure 3.19 Marginal Delay Power (Second Test Example)

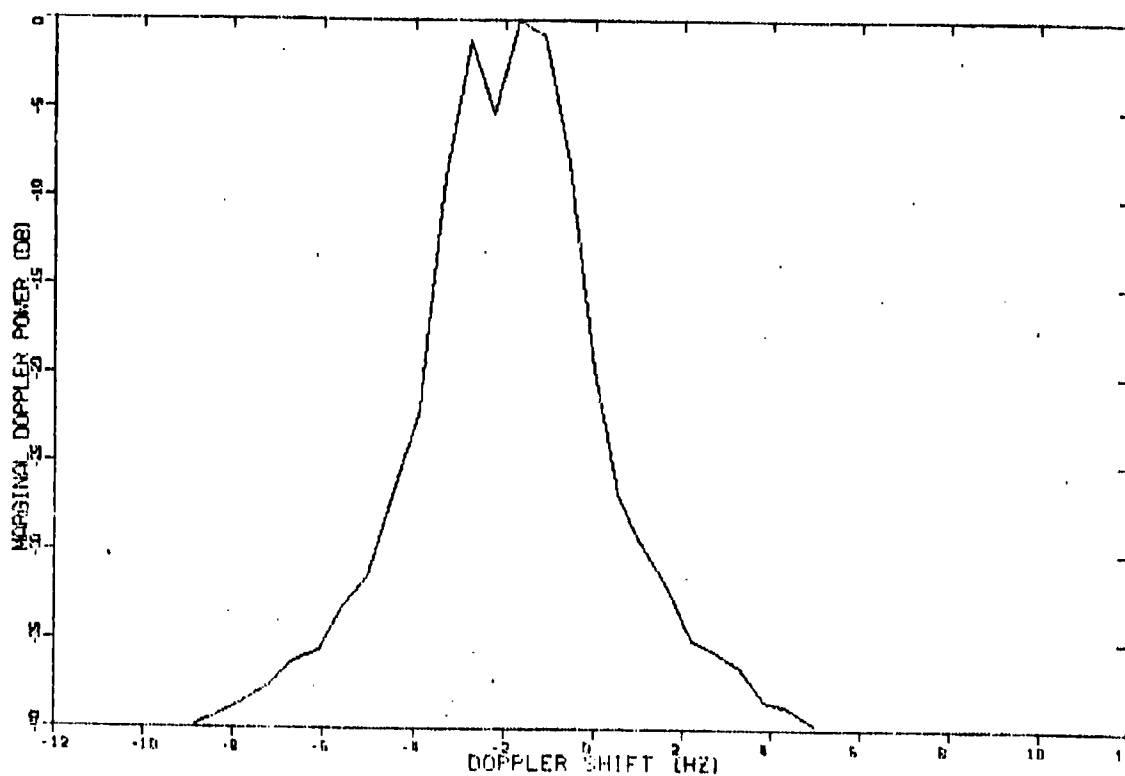


Figure 3.20 Marginal Doppler Power (Second Test Example)

REFERENCES FOR SECTION 3

- [3.1] J. H. McClellan, T. W. Parks, and L. R. Rabiner, "A Computer Program for Designing FIR Linear Phase Digital Filters," IEEE Trans. on Audio and Electroacoustics, Vol. AU-21, No. 6, December 1973, pp. 506 - 526.
- [3.2] A. Eberhard, "An Optimum Discrete Window for the Calculation of Power Spectra," IEEE Trans. on Audio and Electroacoustics, Vol. AU-21, No. 1, February 1973, pp. 37 - 43.
- [3.3] E. A. Sloane, "Comparison of Linearly and Quadratically Modified Spectral Estimates of Gaussian Signals," IEEE Trans. on Audio and Electroacoustics, Vol. AU-17, No. 2, June 1969, pp. 133 - 137.
- [3.4] A. Oppenheim and R. Schaefer, "Notes on Discrete Time Signals and Systems," MIT Electrical Engineering Dept., September 1971.
- [3.5] R. Otnes and L. Enockson, Digital Time Series Analysis, J. Wiley, 1972.

APPENDIX A

PROGRAM LISTINGS

```

DIMENSION X(255),Y(509),Z(1020),H(1021),P(255,4),V(255),W(255,4)
DIMENSION NAME(5)
EQUIVALENCE(H(2),P(1,1))
DATA NAME/3: '...',D',AT'/
DATA X,V,W/1530/0.0/
DATA ITEMP,ISTATE,ITM2/3*1/
DATA IO,IPN,IPN1,IPN2,ITAP/4,255,254,510,'270'/
DATA IPN21,IPN4,ICSDR/511,1020,'177570'/
WRITE(6,100)
READ(6,200) (NAME(I),I=1,3)
WRITE(6,300)
READ(6,400) IFIL
END FILE 6
IFIL=IFIL-1
Y(IPN)=FLOAT(ISTATE)
DO 15 I=2,IPN
ISTATE=IFSR(ISTATE,ITAP)
IF (ISTATE,AND,1) 5,5,10
5 ITEMP=-1
10 Y(IPN+I-1)=FLOAT(ITEMP)
15 ITEMP=1
DO 20 I=1,IPN1
Y(I)=Y(I+IPN)
CALL LAGINT(10,IPN,H)
CALL SETFIL(3,'STOR1.DAT',IERR,'DK',0)
DEFINE FILE 3(16,IPN2,U,ITM2)
CALL SETFIL(1,'TESTD.DAT',IERR,'DK',0)
CALL SETFIL(2,NAME,IERR,'MT',0)
DO 21 I=1,16
21 WRITE(3,1) (W(J,I),J=1,IPN)
DO 23 K=1,2
READ(1) (Z(J),J=1,IPN2)
23 READ(1) (Z(J),J=IPN21,IPN4)
DO 40 IK=1,IFIL,2
IK2=IK-2
DO 35 IL=1,2
IJ=IL+IK2
J=MOD(IJ,4)
IJJ=J*IPN
IJK=J+1
IJK5=J+5
IJM=4*J
DO 25 I=1,IPN
IJJS=IJJ+I
W(1,I)=Z(IJJS)*P(1,1)
W(1,2)=Z(IJJS)*P(1,2)
W(1,3)=Z(IJJS)*P(1,3)
25 W(1,4)=Z(IJJS)*P(1,4)
DO 26 I=1,4
IJ1=IJM+I
26 WRITE(3,IJ1) (W(J,I),J=1,IPN)
IJM=IJ
CALL STASH(IJM,ICSDR)
DO 30 K=1,4

```

Figure A.1 RECD11

```

KK=MOD((IJK5-K),4)+1
KK1=5-K
JJ2=4*(KK-1)+KK1
READ(3,JJ2)(W(JJ1,1),JJ1=1,IPN)
CALL LOOP(IPN,X,Y,U)
30  CONTINUE
    WRITE(2)X
    IF (IJ.LT.3) GO TO 33
    DO 32 I=1,IPN
32  V(I)=X(I)*2+V(I)
33  IF(((IL-1)*IK).GE.IFIL) GO TO 40
    DO 35 I=1,IPN
35  X(I)=0.0
    IP=(MOD(IK,4)-1)*IPN
    READ(1)(Z(J+IP),J=1,IPN2)
40  CONTINUE
    END FILE 2
    END FILE 1
    END FILE 3
    WRITE(5,500)V
100  FORMAT(' ENTER NAME OF OUTPUT DATA FILE'//)
200  FORMAT(3A2)
300  FORMAT(' ENTER AN EVEN NO. OF RECORDS TO BE PROCESSED'//)
400  FORMAT(15)
500  FORMAT(1X,7E10.3)
600  FORMAT(1X,516)
    END

```

Figure A.1 (Continued)

```

;      THIS PROGRAM ALLOWS FORTRAN PROGRAMS TO READ AND WRITE
;      ABSOLUTE LOCATIONS IN MEMORY
;      THUS IT IS DANGEROUS IF IT GETS INTO THE WRONG HANDS
;
;      .TITLE PEEK
;      .GLOBAL PEEK,STASH
;      .MCALL .PARAM
;      .PARAM
PEEK:  MOV Q2(R5),R0
      MOV (R0),R0
      RTS R5
;
;
STASH: MOV Q2(R5),R0
      MOV Q4(R5),R1
      MOV R0,(R1)
      RTS R5
      .END

```

Figure A.2 Function STASH

```

;      .TITLE LSH
;
;      FUNCTION LSH--LOGICAL SHIFT
;      CALL IS:
;              IWORD=LSH(IWORD,ICHT)
;              IWORD: WORD WHOSE BITS ARE TO BE SHIFTED
;              ICHT: SHIFT IWORD BY ICHT BITS--POSITIVE ICHT
;                   INDICATES A LEFT SHIFT
;
;      .GLOBAL LSH
LSH:  TST  (R5)+
      MOV  Q(R5)+,R0      ;GET IWORD
      MOV  Q(R5)+,R1      ;GET ICHT
      BEQ  RTH            ;NO SHIFT IF ICHT=0
      BPL  1$            ;NO PROBLEMS FOR LEFT SHIFT
      DOR  R0
      INC  R1
      LSH  R1,R0          ;SHIFT RIGHT ONCE TO CLEAR MSB
      INC  R1              ;...& COUNT THE SHIFT
1$:   ASH  R1,R0          ;SHIFT
      RTS  R5             ;RETURN
      .END

```

Figure A.3 Function LSH

```

      .TITLE  LOOP
      .GLOBAL LOOP

ACO=%0
I=%0
J=%1
XAD=%2
YAD=%3
WAD=%4
R5=%5
SP=%6
;
IPHM: 0
YADM: 0
WADM: 0
;
LOOP: CMP      (R5), (R5)+      ; INCREMENT R5 POINTER
      MOV      0(R5)+, I        ; LOAD VALUE OF IPH INTO REG I
      MOV      I, J            ; INTO REG J
      MOV      I, IPHM          ; AND INTO MEMORY LOC IPHM
      MOV      (R5)+, YAD        ; LOAD ADDR OF ARRAY X INTO REG YAD
      MOV      (R5)+, YAD        ; LOAD ADDR OF ARRAY Y INTO REG YAD
      SUB      #4, YAD          ; SUBTRACT 4 TO POINT TO PREVIOUS WORD
      MOV      YAD, YADM
      MOV      (R5)+, WAD
      MOV      WAD, WADM
      MOV      R5, -(SP)
L1:   MOV      I, R5
      ASL      R5
      ASL      R5
      ADD      R5, YAD
      LDF      (XAD), ACO
L2:   MOV      (YAD)+, R5
      BHI      SUBTR
      ADDF     (WAD)+, ACO
      BR       .+1
SUBTR: SUBF     (WAD)+, ACO
      TST      (YAD)+
      DEC      J
      BNE      L2
      STF      ACO, (XAD)+
      MOV      IPHM, J
      MOV      WADM, WAD
      MOV      YADM, YAD
      DEC      I
      BNE      L1
      MOV      (SP)+, R5
      RTS      R5
      .END

```

Figure A.4 Subroutine LOOP

```

; -- MTIN.MAC --
; PURPOSE IS TO READ IN FROM MAGTAPE
; CALL BY CALL MTIN(UNIT, IWORDS, IARRAY, ISTAT)
; WHERE UNIT = 0 OR 1, IWORDS IS NUMBER OF WORDS TO
; TRANSFER(1000), IARRAY IS THE ARRAY THE
; INFO IS TO GO INTO, AND ISTAT IS A STATUS
; WORD RETURNED WITH FOLLOWING MEANINGS:
; ISTAT = 0 => O.K.
;      = 1 => EOF FOUND
;      = 2 => UNIT SELECTED IN ERROR
; THE MAG TAPE STATUS WORD (ITS) IS RETURNED
; IF THE ERROR BITS (7-15) OF ITS ARE SET
; ***IWORDS MUST BE AN INTEGER VARIABLE
; AND NOT A CONSTANT AS INFORMATION IS RETURNED
; IN THIS VARIABLE AS TO HOW MANY WORDS ARE
; TRANSFERRED.
      .TITLE MTIN
      .GLOBAL MTIN
      .MCALL .PAPAM
      .PAPAM
      IHS=172520
      ITC=172522
      ITRC=172524
      ITCMA=172526
MTIN:  MOV R0, -(SP)
      MOV R1, -(SP)
      MOV R2, -(SP)
      TST (R5)+
      MOV @R5+, R0      ; R0=UNIT *
      MOV @R5+, R1      ; SET BYTE RECORD COUNT
      MOV (R5)+, R2     ; R2=ADDRESS OF ARRAY
      ASL R1
      NEG R1
      MOV R1, @*ITRC
      BIT *177776, R0    ; TEST UNIT (1 OR 0)
      BEQ CONT
      CLR @-4(R5)        ; NO WORDS TRANSFERRED
      MOV @2, @R5+       ; ERROR, RETURN
      BR OUT
CONT:  MOV R2, @*ITCMA
      SWAB R0            ; SET COMMANDS
      ADD #60003, R0
TT:   MOV *ITC, R1       ; R1 = ADDRESS OF ITC
      TSTB (R1)         ; TEST CU READY
      BPL -2
      MOV R0, (R1)      ; START THE OPERATION
      .PAGE
      MOV *ITS, R0       ; R0=ADDRESS OF ITS
M1:   BIT #3000, (R0)    ; HALT IF EOF
      BEQ M2
      CLR (R1)          ; STOP TAPE
      OR R3
M2:   TSTB (R1)         ; TEST CU READY
      BPL M1

```

Figure A.5 Subroutine MTIN

```

W3:  CLR Q(R5)+          ; STATUS OK. RETURN 0
      BIT #40000.(R0)
      BEQ .+6
      INC Q-2(R5)        ; EOF. RETURN 1 IN ISTAT
      BIT #137600.(R0)   ; TEST FOR ERROR IN MTS
      BEQ RTN
      MOV (R0),Q-2(R5)    ; ERROR. RETURN MTS
RTN:  SUB #40000,R2        ; HOW MANY WORDS TRANSFERRED?
      NEG R2
      ASR R2
      MOV R2,Q-6(R5)
OWT:  MOV (SP)+,R2
      MOV (SP)+,R1
      MOV (SP)+,R0
      RTS R5
      .END

```

Figure A.5 (Continued)

```

      DIMENSION X(2000),Y(510),IAR(1000)
      DATA H,H2,IS,IP,IOFF,1000,2000,0,510,0/
      CALL SETI(H,1,'TESTD.DAT',IERR,'DE'.0)
      WRITE(6,150)
      READ(6,175)LL
      IF(LL.EQ.0)GO TO 80
      DO 75 I=1,LL
      DO 70 J=1,3000
      IWORDS=1000
      CALL MTIH(0,IWORDS,IAR,ISTAT)
70    IF(ISTAT.EQ.1)GO TO 75
75    WRITE(6,175)J
80    WRITE(6,125)
      READ(6,175)LL
      IWORDS=1000
      IF(LL.EQ.0)GO TO 3
      DO 1 I=1,LL
      CALL MTIH(0,IWORDS,IAR,ISTAT)
      IF(ISTAT.EQ.1)GO TO 200
1    IF(IWORDS.NE.1000)GO TO 225
3    DO 2 J=1,2
      J1=(J-1)*H1
      CALL MTIH(0,IWORDS,IAR,ISTAT)
      IF(ISTAT.EQ.1)GO TO 200
      IF(IWORDS.NE.1000)GO TO 225
      DO 2 I=1,H
2    X(I+J1)=FLOAT(LSH(IAR(I),-4))-4000)
      WRITE(6,275)
      READ(6,175)IFIL
      IF(IFIL.GT.1050)IFIL=1030
      DO 40 J=1,IFIL
      IF((H2-IOFF).LT.IP)GO TO 15
      DO 10 I=1,IP
10    Y(I)=X(I+IOFF)
      IOFF=IOFF+IP
      IF((IS.EQ.1).OR.(IOFF.LT.H))GO TO 30
      CALL MTIH(0,IWORDS,IAR,ISTAT)
      IF(ISTAT.EQ.1)GO TO 200
      IF(IWORDS.NE.1000)GO TO 225
      DO 12 I=1,H
12    X(I)=FLOAT(LSH(IAR(I),-4))-4000)
      IS=1
      GO TO 30
15    IJ=H2-IOFF
      DO 30 I=1,IJ
20    Y(I)=X(I+IOFF)
      H3=1
      IF(I1.GT.H)H3=2
      DO 30 IJ1=1,H3
      CALL MTIH(0,IWORDS,IAR,ISTAT)
      IF(ISTAT.EQ.1)GO TO 200
      IF(IWORDS.NE.1000)GO TO 225
      H1=(IJ1-1)*H1
      IF(H3.EQ.1)H1=N

```

Figure A.6 Subroutine FORM1A

```

DO 22 I=1,N
22  X(I+1)=FLOAT(LSH(IAR(I),-4)-*4000)
    IS=0
    IJ1=IJ+1
    DO 25 I=1,IJ1,IP
25  Y(I)=X(I-IJ)
    IOFF=IP-IJ
30  WRITE(10)Y
    WRITE(6,100)J
    IF((IOFF.LT.10).OR.(IS.EQ.1)) GO TO 40
    CALL HTIN(O,IWORDS,IAR,ISTAT)
    IF(ISTAT.EQ.1)GO TO 200
    IF(IWORDS.NE.1000)GO TO 225
    DO 35 I=1,N
35  X(I)=FLOAT(LSH(IAR(I),-4)-*4000)
    IS=1
40  CONTINUE
100  FORMAT(1X10I6)
125  FORMAT(' ENTER NO. OF RECORDS TO BE SKIPPED'//)
150  FORMAT(' ENTER NO. OF FILES TO BE SKIPPED'//)
175  FORMAT(15)
200  END FILE 1
    STOP
225  WRITE(6,200)ISTAT
250  FORMAT(' READ ERROR'// NT STATUS WORD: ',05/)
275  FORMAT(' LINE# NO. OF RECORDS TO BE PROCESSED'//)
    END FILE 1
    END

```

Figure A.6 (Continued)

```

.TITLE $DEVTB
.HLIST TTIL,BEX,TOC

;THIS IS A STRIPPED DEVICE TABLE FOR USE WITH PLAY11 ONLY.
;NRL      =      0      ;IF 'NRL' IS DEFINED USE NRL DEVICES
;NRLMT    =      0      ;IF NRLMT IS DEFINED USE MT AT NRL
;NRLNT    =      0      ;IF NOT DEFINED USE DK1: AT NRL

$DEVTB::WORD 3
        .WORD 0,DEV1,DEV2,DEV3

DEV1:   .WORD 0      ;DDB POINTER
        .RAD50 /DK/   ;UNIT 1 DEVICE
        .BYTE 0      ;HOW CURRENTLY OPEN
        .BYTE 0      ;UNIT 1 DEVICE UNIT NUMBER
        .RAD50 /PLAYD/ ;UNIT 1 FILE NAME
        .RAD50 /DAT/   ;UNIT 1 EXTENSION
        .WORD 233.0.0.0.0.0.0.0.0.0 ;OTHER USEFUL INFORMATION

DEV2:   .WORD 0      ;UNIT 2 DEVICE
        .RAD50 /MT/    ;UNIT 2 DEVICE UNIT NUMBER
        .BYTE 0      ;UNIT 2 FILE NAME
        .BYTE 0      ;UNIT 2 FILE EXTENSION
        .RAD50 /RECDT/
        .RAD50 /DAT/
        .WORD 233.0.0.0.0.0.0.0.0.0

DEV3:   .WORD 0
        .IF NDF NRL
        ; IF 'NRL' IS NOT DEFINED USE THIS FORM
        .RAD50 /DK/
        .BYTE 0
        .BYTE 0      ;UNIT 3 DEVICE UNIT NUMBER
        .IFF
        .IF DF NRLMT
        ; IF 'NRL' AND 'NRLMT' ARE DEFINED USE THIS FORM
        .RAD50 /MT/
        .BYTE 0.1
        .IFF
        ; IF 'NRL' IS DEFINED AND 'NRLMT' IS NOT DEFINED USE THIS FORM
        .RAD50 /MT/
        .BYTE 0.1
        .ENDC
        .ENDC
        .RAD50 /PROCD/ ;UNIT 3 FILE NAME
        .RAD50 /DAT/   ;UNIT 3 EXTENSION
        .WORD 233.0.0.0.0.0.0.0.0.0
        .END

```

Figure A.7 Device Table MINDEV

```

      .TITLE  ERRF..

;MINIMAL ERROR HANDLER FOR FORTRAN OTS V22
; OUTPUT MESSAGE HAS IDENTICAL INTERPERTATION TO FORTRAN OTS GENERATED
; F030 ABCXYZ MESSAGE. ABC=ERROR CLASS. XYZ=ERROR NUMBER

;NOTE THAT EVEN THE MOST TRIVIAL ERROR WILL BE FATAL

ERR000::MOV     Q2(R5),R0
            OR     $ERRA
$ERR::  MOV     2(R5),R0
$ERRA::
$ERRB:: SUBB    R0
            (MOV8  R0,R1
            SUB   R1,R0
            ASL   R0
            ADD   R1,R0
            MOV   R0,-(SP)
            MOV   #1430,-(SP)
            JOT
            ENT   60
$ERRF::
$ERRC::

      .END

```

Figure A.8 Subroutine ERRF

```

COMMON/OVR/YY(1282),Z(1020),W(1282),H(1021),X(1020)
COMMON/DAVAL/I1,ICSDR,IQ,IPN,IPHIQ,IPHIQ1,ISET,SIPND4
DIMENSION P(1020)
EQUIVALENCE(H(2),P(1))
IPHIQ=IQ*IPH
IPHIQ1=IPHIQ+IPH
SIPND4=1.0/4.0*FLOAT(IPN+1)*1280.)
IREC=3
IJKI=-1
CALL LOAD('LAG',1,IER)
C   FILES ARE ASSIGNED WITHIN THE MINIMUM DEVICE TABLE PROGRAM-MINDEV.
C   IF THAT PROGRAM IS REMOVED, THE FOLLOWING THREE CALLS TO SETFIL
C   ARE REQUIRED.
C   CALL SETFIL(1,'PLAYD.DAT',IERR,'DK',0)
C   CALL SETFIL(2,'PECDT.DAT',IERR,'HT',0)
C   CALL SETFIL(3,'PROCD.DAT',IERR,'DK',0)
CALL WAIT
CALL LAGINT(IQ,IPH,H)
CALL LOAD('SUB',0,IER)
6   CALL SUB1(IPEC)
    IF(ISET.NE.0)GO TO 60
    IJKN=IJKI+1
    CALL STASH(IJKN,ICSDR)
    CALL LOAD('FFTOVR',0,IER)
    CALL FFTOVR
    CALL LOAD('SUB',0,IER)
    IF(IJKN.NE.0)GO TO 30
    II=-1
    CALL SUB2(IPN)
    II=3
    IREC=1
    GO TO 6
30  CALL SUB2(0)
    GO TO 6
80  END FILE 3
    END FILE 2
    END FILE 1
    IJHI=IJEHI ISET
    CALL STASH(IJHI,ICSDP)
    END
BLOCK DATA
COMMON/OVR/YY(1282),Z(1020),W(1282),H(1021),X(1020)
COMMON/DAVAL/I1,ICSDR,IQ,IPN,IPHIQ,IPHIQ1,ISET,SIPND4
DATA Y,Z,ICSDR,0.0/
DATA I1,ICSDR,IQ,IPH,ISET,00,"177570.4,255.0"/
END

```

Figure A.9 PLAY11

```

SUBROUTINE SUB1(IREC)
COMMON/OVR/Y(1282),Z(1020),W(1282),H(1021),X(1020)
COMMON/DAVAL/I1,ICSDP,IO,IPN,IPN10,IPN101,ISET,SIPND4
I=0
1  I11=(I+11)*IPN
  READ(1,END=5)(X(J+I11),J=1,IPN)
  I=I+1
  IF(I.LT.IREC)GO TO 1
  IF(IREC.GT.1)GO TO 4
  DO 2 I=1,IPN
    Y(I+IPN10)=X(I+I11)
  DO 3 I=1,7
    Z(I+IPN101)=0.0
  READ(3,END=6)W
4  RETURN
5  ISET="100000
  RETURN
6  ISET="1000000
  RETURN
END

```

Figure A.10 Subroutine SUB1

```

SUBROUTINE ZWRITE(Z,IPN)
PEEL Z(IPN)
WRITE(3)Z
RETURN
END

```

Figure A.11 Subroutine ZWRITE

```

      .TITLE SUB2.
      .HLIST TT11,BEX
      .DSABL GBL
      .GLOBL ZWRITE
AC0      =      #0
AC1      =      #1
;MACRO REPLACEMENT FOR SUBROUTINE SUB2
      .CSECT QVR                      ;FORTRAN COMMON REGION
Y:      .BLKW 1282.*2
Z:      .BLKW 1020.*2
W:      .BLKW 1282.*2
H:      .BLKW 1021.*2
X:      .BLKW 1030.*2
P      =      H+4

      .CSECT DAVAL                    ;ANOTHER COMMON REGION
II:      .BLKW 1
ICSDR:   .BLKW 1
IQ:      .BLKW 1
IPH:     .BLKW 1
IPHI0:   .BLKW 1
IPHI01:  .BLKW 1
ISET:    .BLKW 1
SIPND4:  .BLKW 2

      .CSECT .SUB2.
III:     .WORD 0

SUB2::   MOV     II,R0
        MOV     R5,-(SP)
        SETF
        IHC     R0
        CHP     R0,10
        BNE     1$
        CLR     R0
1$:      MOV     R0,11
        MVL     IPH,R0
        MOV     R1,III
        BGT     34$
        TST     Q2(R5)
        BCC     31$

29$:     MOV     IPH,R0
        ASL     R0
        ASL     R0
        AND     R0,R0
        MOV     R1,R1
        MOV     IPHI0,R2
30$:     MOV     (R1)+(R0)+
        MOV     (R1)+(R0)+
        SQW     P2,30$
        BR      55$

```

Figure A.12 Subroutine SUB2

```

31$:  MOV    *Z,R0
      MOV    IPH,R1
      ASL    R1
      ADD    *Y,R1
      MOV    *P,R2
      MOV    *Y,R3
      MOV    *X,R4
      MOV    IPHIQ,R5
32$:  LDF     (R1)+,AC0
      MULF   (R2)+,AC0
      MOV    (R4)+,(R3)+
      ADDF   (R0),AC0
      MOV    (R4)+,(R3)+
      STF    AC0,(R0)+
      SOB    R5,32$
      BR     30$

34$:  MOV    IPHIQ,R5
      MOV    I11,R0
      SUB    R0,R5
      MOV    R5,-(SP)
      ASL    R0
      ASL    R0
      MOV    R0,R4
      ADD    *Z,R0
      MOV    IPH,R1
      ASL    R1
      ASL    R1
      ADD    *Y,R1
      MOV    *P,R2
      MOV    *Y,R3
      ADD    *X,R4
35$:  LDF     (R1)+,AC0
      MULF   (R2)+,AC0
      MOV    (R4)+,(R3)+
      ADDF   (R0),AC0
      MOV    (R4)+,(R3)+
      STF    AC0,(R0)+
      SOB    R5,35$
      MOV    *Z,R0
      MOV    IPHI01,R1
      MOV    I11,R5
      SUB    R5,R1
      ASL    R1
      ASL    R1
      ADD    *Y,R1
      MOV    (SP)+,R2
      ASL    R2
      ASL    R2
      MOV    R2,R5
      ADD    *D,R2
      ADD    *Y,R3
      MOV    *X,R4

```

Figure A.12 (Continued)

```

37$:  LDF      (R1)+,AC0
      MULF    (R2)+,AC0
      MOV     (R4)+,(R3)+
      ADDF    (R0),AC0
      MOV     (R4)+,(R3)+
      STF     AC0,(R0)+
      SOB     R5,37$

38$:  MOV     111,R0
      ASL     R0
      ASL     R0
      ADD     #2,R0
      MOV     R0,43$
      MOV     R0,-(SP)
      MOV     1PN,R5
      MOV     R5,-(SP)
      LDF     SIPND4,AC1
39$:  LDF      (R0),AC0
      MULF    AC1,AC0
      STF     AC0,(R0)+
      SOB     R5,39$
      JSR     R5,ZWRITE
      BR      44$

43$:  .WORD    0,1PN
44$:  MOV     (SP)+,R4
      MOV     (SP)+,R1
45$:  CLRF    (R1)+
      SOB     R4,45$

55$:  MOV     (SP)+,R5
      RTS     R5

      .END

```

Figure A.12 (Continued)

```

SUBROUTINE FFOVR
COMMON/OVR/Y(1282),Z(1020),W(1282),H(1021),X(1020)
COMMON/DAVAL/II,ICSDR,IQ,IPN,IPNIQ,IPNIQI,ISET,SIPND4
COMPLEX YC(641),WC(641)
EQUIVALENCE(Y(1),YC(1)),(W(1),WC(1))
CALL LOAD('FFT',0,IER)
CALL FFT(YC(1),Y(2),640,640,640,2)
CALL LOAD('REALTR',0,IER)
CALL REALTR(YC(1),Y(2),640,2)
DO 2 I=1,641
2 YC(I)=YC(I)*WC(I)
CALL REALTR(YC(1),Y(2),640,-2)
CALL LOAD('FFT',0,IER)
CALL FFT(YC(1),Y(2),640,640,640,-2)
RETURN
END

```

Figure A.13 Subroutine FFOVR

C-FILE- PDB:VDEET . C310,3101 04-JAN-74

```

SUBROUTINE FFT(A,B,NTOT,N,HSPAN,ISH)
  DIMENSION A(1),B(1)
  DIMENSION NFAC(8),NP(9)
  DIMENSION AT(5),BT(5)
  EQUIVALENCE (1,11)
  INXP=5
  INXP=9
  I=0
  JF=0
  K=1
  N=0
  KT=3
  NFAC(1)=2
  NFAC(2)=2
  NFAC(3)=2
  NFAC(4)=2
  NFAC(5)=5
  NFAC(6)=2
  NFAC(7)=2
  NFAC(8)=2
  INC=ISH
  RAD=3.0*ATAN(1.0)
  S72=RAD/5.0
  C72=COS(S72)
  S72=SIN(S72)
  S120=SQRT(0.75)
  IF (ISH.GE.0) GO TO 10
  S72=-S72
  S120=-S120
  RAD=-RAD
  INC=-INC
10  NT=INC*NTOT
  KS=INC*HSPAN
  KSPAN=KS
  NN=NT-INC
  JC=KS/4
  RADF=RAD*FLOAT(JC)*.5
100  SD=RADF*FLOAT(KSPAN)
  CD=2.0*SIN(SD)*S72
  SD=SIN(SD+SD)
  KK=1
  J=1+1
  IF (NFAC(1).NE.2) GO TO 600
  KSPAN=KSPAN/2
  K1=KSPAN/2
210  K2=K1+KSPAN
  AR=A(1)
  DR=D(1)
  AR(2)=AR(K1)-AR
  BR(2)=BR(K1)-BR
  AR(3)=AR(K1)+AR
  DR(3)=DR(K1)+BR

```

Figure A.14 Subroutine FFT

```

IF (K1.LT.SPAN)
  IF (K1.LE.III) GO TO 210
  KK=KK-III
  IF (K1.LE.JC) GO TO 210
  IF (K1.GT.KSPAN) GO TO 800
220 C1=1.0-CD
  S1=SD
230 K2=KK+KSPAN
  AK=A(K1)-A(K2)
  BK=B(K1)-B(K2)
  A(K1)=A(K1)+A(K2)
  B(K1)=B(K1)+B(K2)
  A(K2)=C1*AK-S1*BK
  B(K2)=S1*AK+C1*BK
  KK=K2+KSPAN
  IF (KK.LT.III) GO TO 230
  K2=KK-III
  C1=-C1
  KK=K1-K2
  IF (KK.GT.K2) GO TO 230
  AK=C1-(CD*(C1+SD*S1)
  S1=(SD*(C1-CD*S1)+S1
  C1=AK
  KK=KK+JC
  IF (KK.LT.K2) GO TO 230
  K1=K1+III+III
  KK=(K1-KSPAN)/2+JC
  IF (KK.LE.JC+JC) GO TO 220
  GO TO 100
510 C2=C72+K2-S72*K2
  S2=2.0*(C72+S72
520 K1=K1+KSPAN
  K2=K1+KSPAN
  K3=K2+KSPAN
  K4=K3+KSPAN
  AKP=A(K1)+A(K4)
  AKM=A(K1)-A(K4)
  BKP=B(K1)+B(K4)
  BKM=B(K1)-B(K4)
  AJP=A(K2)+A(K3)
  AJM=A(K2)-A(K3)
  BJP=B(K2)+B(K3)
  BJM=B(K2)-B(K3)
  AA=A(KK)
  BB=B(KK)
  A(C1)=AA+AKP+AJP
  B(C1)=BB+BKP+BJP
  AE=AE*(C72+AJP*(C2+AA
  BE=BE*(C72+BJP*(C2+BB
  AJ=AJ*(S72+AKM*S2
  BJ=BJ*(S72+BJM*S2
  A(K1)=AE-BJ
  A(K4)=AK+BJ
  B(K1)=BE-AJ

```

Figure A.14 (Continued)

```

B(K1)=BK-AJ
AK=AKP1C2+BJP1C72+AA
BK=BJP1C21+JP1C72+BB
AJ=AKH52-BJH572
BJ=BKH52-BJH572
A(K2)=AK-BJ
A(K3)=AK+BJ
B(K2)=BK+AJ
B(K3)=BK-AJ
KK=K4+KSPAN
IF (G1.LT.HH) GO TO 520
KK=KK-HH
IF (KK.LE.KSPAN) GO TO 520
GO TO 700
600 K=HFAC(I)
KSPAN=KSPAN
KSPAN=KSPAN/K
IF (K.EQ.5) GO TO 510
700 IF (I.EQ.10) GO TO 800
KK=JC+1
710 C2=1.0-CD
S1=SD
720 C1=C2
S2=S1
KK=KK+KSPAN
730 AK=A(KK)
A(KK)=C2*AK-S2*B(KK)
B(KK)=S2*AK+C2*B(KK)
KK=KK+KSPAN
IF (KK.LE.HT) GO TO 730
AK=S1*S2
S2=S1+C2+C1*S2
C2=C1+C2-AK
KK=KK-HT+KSPAN
IF (KK.LE.KSPAN) GO TO 730
C2=C1-(CD+C1+SD*S1)
S1=S1+(SD+C1-CD*S1)
KK=KK-KSPAN+JC
IF (KK.LE.KSPAN) GO TO 720
KK=KK-KSPAN+JC+INC
IF (KK.LE.JC+JC) GO TO 710
GO TO 100
800 HP(I)=KS
IF (KT.EQ.0) GO TO 890
K=KT+KT+1
IF (G1.LT.K) K=K-1
J=1
HP(K+1)=JC
810 HP(J+1)=HP(J)+HFAC(J)
HP(J)=HP(J+1)+HFAC(J)
J=J+1
K=K-1
IF (G1.LT.K) GO TO 810
KS=HP(J+1)

```

Figure A.14 (Continued)

```

      LSPH=HP(2)
      L1=JL+1
      K2=LSPH+1
      J=1
820  AK=A(KK)
      A(K2)=A(K2)
      A(K2)=AK
      BK=B(KK)
      B(K2)=B(K2)
      B(K2)=BK
      KK=KK+INC
      K2=KSPAN+K2
      IF (K2.LT.KS) GO TO 820
830  K2=K2-NP(J)
      J=J+1
      K2=HP(J+1)+K2
      IF (K2.GT.HP(J)) GO TO 830
      J=1
840  IF (KK.LT.K2) GO TO 820
      KK=KK+INC
      K2=KSPAN+K2
      IF (K2.LT.KS) GO TO 840
      IF (KK.LT.KS) GO TO 830
      JC=K3
890  IF (2*KT+1.GE.M) RETURN
      KSPAN=NP(KT+1)
      J=H-KT
      HFAC(J+1)=1
900  HFAC(J)=HFAC(J)*HFAC(J+1)
      J=J-1
      IF (J.LE.KT) GO TO 900
      KT=KT+1
      NH=HFAC(KT)-1
      IF (NH.GT.NAMP) GO TO 998
      JJ=0
      J=0
      GO TO 906
902  JJ=JJ-K2
      K2=KK
      K=K+1
      KK=HFAC(K)
904  JJ=KT*JJ
      IF (JJ.GE.K2) GO TO 902
      HP(J)=JJ
906  K2=HFAC(KT)
      K=KT+1
      KK=HFAC(K)
      J=J+1
      IF (J.LE.NH) GO TO 904
      J=0
      GO TO 914
910  F=KL
      FK=HP(K)
      HP(K)=FK

```

Figure A.14 (Continued)

```

      IF (K1.HE.J) GO TO 910
      K3=K1
914  J=J+1
      KK=HP(J)
      IF (K1.LT.0) GO TO 914
      IF (KK.HE.J) GO TO 910
      NP(J)=J
      IF (J.HE.ND) GO TO 914
      NAME=NAME+INC
      GO TO 950
924  J=J-1
      IF (HP(J).LT.0) GO TO 924
      JJ=JC
926  KSPAN=JJ
      IF (JJ.GT.NAME) KSPAN=NAME
      JJ=JJ-KSPAN
      K=HP(J)
      KK=JCH+1+JJ
      K1=KK+KSPAN
      K2=0
928  K2=K2+1
      AT(K2)=A(K1)
      BT(K2)=B(K1)
      K1=K1-INC
      IF (K1.HE.KK) GO TO 928
932  K1=KK+KSPAN
      K2=K1-JC*(K+HP(K))
      K=-NP(K)
936  A(K1)=A(K2)
      B(K1)=B(K2)
      K1=K1-INC
      K2=K2-INC
      IF (K1.HE.KK) GO TO 936
      KK=K2
      IF (K1.HE.J) GO TO 932
      K1=KK+KSPAN
      K2=0
940  K2=K2+1
      A(K1)=A(K2)
      B(K1)=B(K2)
      K1=K1-INC
      IF (K1.HE.KK) GO TO 940
      IF (JJ.HE.0) GO TO 926
      IF (J.HE.1) GO TO 924
950  J=K3+1
      NT=NT+KSPAN
      II=NT-INC+1
      IF (NT.GE.0) GO TO 924
      RETURN
998  ISN=0
      CALL ERR000(265)
      END

```

Figure A.14 (Continued)

```

SUBROUTINE REALTR(A,B,N,ISN)
  DIMENSION A(1),B(1)
  REAL IM
  INC=IABS(ISN)
  NK=1+INC+2
  NH=NK/2
  SD=2.0*ATAN(1.0)/FLOAT(N)
  CD=2.0*SIN(SD)**2
  SD=SIN(SD+SD)
  SH=0.0
  IF (ISN.LT.0) GO TO 30
  CN=1.0
  A(NK-1)=A(1)
  B(NK-1)=B(1)
10  DO 20 J=1,NH,INC
    K=NK-J
    AA=A(J)+A(K)
    AB=A(J)-A(K)
    BA=B(J)+B(K)
    BB=B(J)-B(K)
    RE=CN*BA+SH*AB
    IM=SH*BA-CN*AB
    B(K)=IM-BB
    B(J)=IM+BB
    A(K)=AA-RE
    A(J)=AA+RE
    AN=CN-(CD+CN+SD*SH)
    SN=(SD*CN-CD*SD)+SH
20  CN=AN
    RETURN
30  CN=-1.0
    SD=-SD
    GO TO 10
  END

```

Figure A.15 Subroutine REALTR

```

SUBROUTINE SUB2(IOFF)
COMMON/OVR/Y(1282),Z(1020),W(1282),H(1021),X(1020)
COMMON/DAVAL/I1,ICSDR,IQ,IPN,IPN10,IPN101,ISIPND4
DIMENSION P(1020)
EQUIVALENCE(H(2),P(1))
I1=MOD((I1+1),IQ)
I11=I1*IPN
IF(I11.GT.0)GO TO 34
IF(IOFF.EQ.0)GO TO 31
DO 30 I=1,IPN10
I12=I+IPN
30 Y(I12)=X(I)
GO TO 55
31 DO 32 I=1,IPN10
Z(I)=Y(I+IPN)*P(I)+Z(I)
32 Y(I)=X(I)
GO TO 38
34 I14=IPN10-I11
DO 35 I=1,I14
I13=I+I11
Z(I13)=Y(I+IPN)*P(I)+Z(I13)
35 Y(I)=X(I13)
I12=IPN101-I11
DO 37 I=1,I11
I13=I+I14
Z(I)=Y(I+I12)*P(I13)+Z(I)
37 Y(I13)=X(I)
38 DO 39 I=1,IPN
I14=I+I11
39 Z(I14)=Z(I14)*SIPND4
WRITE(3)(Z(I+I11),I=1,IPN)
45 DO 50 I=1,IPN
50 Z(I+I11)=0.0
55 RETURN
END

```

Figure A.16 Subroutine SUB2

```

      .NAME LAG
      .NAME SUB
A:    .FCTR PLAY11/CC-ERRF-MINDEV-CNRLIB-FTNLIB
B:    .FCTR LAG-LAG1-FTNLIB
C:    .FCTR SUB-SUB1-SUB2-ZWRITE-FTNLIB
D:    .FCTR FFT-FTNLIB
E:    .FCTR REALTR-FTNLIB
F:    .FCTR FFTOVR-FTNLIB
      .ROOT A-(B,C,(F-(D,E)))
      .END

```

Figure A.17 Overlay Descriptor PLAY11.ODL

```

      DIMENSION X(255),Y(509),Z(1066),H(511),P(255,2),V(255),W(255,2),HT
      &(22),H7(1020),ST(46),NAME(5),FAKE(2048)
C      PROGRAM MUST BE COMPILED WITH THE ON SWITCH.
      EQUIVALENCE(H(2),P(1,1)),(TEMP,IAR)
      DATA NAME/3*' ','D','AT'/
      DATA X,V,W,Z,ITEMP,ISTATE,ITN2/2006*0.0,3*1/
      DATA IPN,IPN1,IPN2,ITAP/255,254,510,*270/
      DATA IPN221,IPN222,IPN4,IPN421,ICSDR,ISTOR/531,532,1020,1041,*1775
      &70,*200/
      DATA IPN247,IPN446/557,1066/
      DATA HT/62420683E-2,0...75582797E-2,0...11975608E-1,0...10007142E
      &-1,0...26170906E-1,0...37311561E-1,0...52987091E-1,0...76534823E-1
      &0...11669172,0...20568788,0...63442332,0./
      ISTAT=0
      WRITE(6,100)
      READ(6,200)(NAME(I),I=1,3)
      WRITE(6,300)
      READ(6,400)IFIL
      END FILE 6
      IFIL=IFIL-1
      Y(IPN)=FLOAT(ISTATE)
      DO 11 I=2,IPN
      ISTATE=IFSR(ISTATE,ITAP)
      IF(ISTATE.AND.1)5.5,10
5      ITEMP=-1
10      Y(IPN+I-1)=FLOAT(ITEMP)
11      ITEMP=1
      DO 12 I=1,IPN1
12      Y(I)=Y(I+IPN)
      CALL SETFIL(1,'LAGR.DAT',IERR,'DK',0)
      READ(1)H
      END FILE 1
      CALL SETFIL(3,'STOR1.DAT',IERR,'DK',0)
      DEFINE FILE 3(8,IPN2,U,ITN2)
      CALL SETFIL(1,'TESTD.DAT',IERR,'DK',0)
      CALL SETFIL(2,NAME,IERR,'MT',0)
      DO 13 I=1,8
13      WRITE(3,ITN2)(W(J,1),J=1,IPN)
      READ(1,END=75)(Z(J),J=22,IPN221)
      DO 50 IK=1,IFIL,2
      IK2=IK-2
      DO 40 IL=1,2
      IL=IL+IK2
      J=MOD(IL,J)
      IJJ=J+IPN+21
      ISEI=-4
      IF(I,NE,0)GO TO 23
C      DIFFERENTIAL FILTERING
      DO 15 I=1,IPN2
      I11=IPN2+I-1
15      Z(I11)=Z(I11-25)
      DO 16 I=1,46
16      Z(I)=ST(I)
      READ(1,END=75)(Z(J0),J0=IPN247,IPN446)

```

Figure A.18 RECSF

```

DO 19 I=47, IPN/46
TEMP=Z(I)+Z(I-1)
IF(IAR.EQ.0)GO TO 19
C SUBTRACTING *200 EFFECTIVELY DIVIDES BY 2.
IAR=IAR-1STOR
19 Z(I-4)=Z(I-2)-TEMP
DO 20 I=1, 16
20 ST(I)=Z(I+IPN/4)
C *CALCULATE HILBERT TRANSFORM
DO 22 I=1, IPN/4
TEMP=0.0
DO 21 KL=1,21,2
21 TEMP=(Z(I+KL-1)-Z(I-KL+43))*HT(KL)+TEMP
22 HZ(I)=TEMP
C *CORRELATE AND INTERPOLATE
23 IJM=MOD(J,2)
IJK3=IJM+3
IJM=LSH(IJM,1)
24 ISET=ISET+4
IF(ISET.EQ.0)GO TO 27
IJJ=IJJ-21
DO 25 I=1, IPN
IJJS=IJJ+1
W(I,1)=HZ(IJJS)*P(I,1)
25 W(I,2)=HZ(IJJS)*P(I,2)
GO TO 29,
DO 27 I=1, IPN
IJJS=IJJ+1
W(I,1)=Z(IJJS)*P(I,1)
28 W(I,2)=Z(IJJS)*P(I,2)
29 DO 30 I=1,2
IJ1=IJM+1+ISET
30 WRITE(3,IJ1)(W(IJ1,1),JJ1=1,IPN)
IJKM=IJ+1
CALL STASH(IJKM,ICSDR)
DO 31 K=1,2
KK=MOD((IJK3-K),2)+1
KK1=3-K
JJ2=2*(KK-1)+KK1+ISET
READ(3,JJ2)(W(IJ1,1),JJ1=1,IPN)
CALL LOOP(IPN,X,Y,W)
34 CONTINUE
WRITE(2)X
IF(IJ.LT.3)GO TO 36
DO 35 I=1, IPN
35 V(I)=X(I)**2+V(I)
DO 37 I=1, IPN
37 X(I)=0.0
IF(ISET.EQ.0)GO TO 24
IF(I-1)TH 1,GE,IFIL)GO TO 50
IF(I-1)TH 1,GE,IFIL)GO TO 50
50 CONTINUE
GO TO 80
75 IP=IP+1

```

Figure A.18 (Continued)

```

80  END FILE 2
    END FILE 1
    END FILE 3
    WRITE(5,500)V
    IF(IPSTAT.EQ.1)WRITE(5,600)
100  FORMAT(' ENTER NAME OF OUTPUT DATA FILE'//)
200  FORMAT(3A2)
300  FORMAT(' ENTER IFIL'//)
400  FORMAT(10I5)
500  FORMAT(1X,10E12.4)
600  FORMAT('END OF FILE'//)
    END

```

Figure A.18 (Continued)

```

DIMENSION H(1021)
CALL LAGINT(2,255,H)
CALL SETFIL(1,'LAGR.DAT',IERR,'DK',0)
WRITE(1)(H(I),I=1,511)
END FILE 1
CALL LAGINT(4,255,H)
CALL SETFIL(1,'LAGD.DAT',IERR,'DK',0)
WRITE(1)H
END FILE 1
END

```

Figure A.19 SETLAG

12

```

      IF (I.L.EQ.1) GO TO 28
      GO TO 22
20    CALL LOTATE(18,64,IS1(1,KL),IF1(1,KL),IERR)
      IF (IERR.EQ.0) GO TO 24
22    DO 23 I=1,IERR,64
      DO 23 IJ=11,12
      QDAT(1,I)=0.0
23    PDAT(1,IJ)=0.0
      GO TO 20
24    DO 25 I=65,81
      DO 25 IJ=11,12
      I3=I-17
      QDAT(1,IJ)=QDAT(I3,IJ)
25    PDAT(1,IJ)=PDAT(I3,IJ)
28    SERR=FLOAT(IERR-1)/64.
      IF (SERR.LT.0.) SERR=1.
      IF (SERR.EQ.0.) GO TO 70
      DO 30 I=11,12
      DO 30 J=1,32
      QDAT(J,I)=QDAT(J,I)*WEIGHT(J)
30    PDAT(J,I)=PDAT(J,I)*WEIGHT(J)
      DO 35 J=33,64
      J1=65-J
      QDAT(J,I)=QDAT(J,I)*WEIGHT(J1)
35    PDAT(J,I)=PDAT(J,I)*WEIGHT(J1)
      CALL FFT(QDAT(1,I),PDAT(1,I),64,64,64,1)
      DO 40 J=1,64
      TEMP1=QDAT(J,I)
      TEMP2=PDAT(J,I)
40    QDAT(J,I)=(TEMP1*TEMP1+TEMP2*TEMP2)*SERR
      IVAR=IVAR+1
      READ(1,IVAR)(X(MP),MP=1,64)
      DO 45 J=1,64
45    X(J)=X(J)+QDAT(J,I)
      IVAR=IVAR-1
50    WRITE(1,IVAR)(X(MP),MP=1,64)
      DO 60 IJ=1,17
      DO 60 I=11,12
      IJ1=IJ+64
      QDAT(IJ,I)=QDAT(IJ1,I)
60    PDAT(IJ,I)=PDAT(IJ1,I)
      IF (IERR.GT.0) GO TO 70
      GO TO 20
70    REWIND 2
      END FILE 2
      IVAR=1
      DO 80 I=1,NFIL
      READ(1,IVAR)(X(MP),MP=1,64)
      WRITE(5,60001)
80    WRITE(5,5000)(X(MP),MP=1,64)
      END FILE 5
      END FILE 1
100   FORMAT(' ENTER NAME OF INPUT DATA FILE')
120   FOPINT(3A2)

```

Figure A.20 (Continued)

```

300  FORMAT(' ENTER INDICIES OF LEFT AND RIGHT TAP BOUNDARIES' /
1' MAXIMUM CIRCULAR SEPARATION OF TAPS=84' /)
400  FORMAT(2I4)
500  FORMAT(10E12.4)
600  FORMAT(' RECORD NUMBER=' I3)
      END

      SUBROUTINE LOTATE(I1,I2,IS1,IF1,IERR)
      COMMON/ DAT/X(255),ODAT(81,17),PDAT(81,17),WEIGHT(32)
      DIMENSION IS1(2),IF1(2),IOFF(2)
      IERR=0
      IOFF(1)=0
      N=2
      IOFF(2)=(IF1(1)-IS1(1))+1
      IF(IS1(2).EQ.0)N=1
      DO 20 I=1,I2
      READ(2,END=5)X
      GO TO 8
5     IERR=1
      GO TO 25
8     DO 10 IJ=1,N
      ISTART=IS1(IJ)
      IFIN=IF1(IJ)
      DO 10 J=ISTART,IFIN
      J1=J-ISTART+1+IOFF(IJ)
10    ODAT(I,J1)=X(J)
C     END OF FILE CANNOT OCCUR HERE IF IT HAS NOT ALREADY HAPPENED.
      READ(2)X
      DO 15 IJ=1,N
      ISTART=IS1(IJ)
      IFIN=IF1(IJ)
      DO 15 J=ISTART,IFIN
      J1=J-ISTART+1+IOFF(IJ)
15    PDAT(I,J1)=-X(J)
20    CONTINUE
25    RETURN
      END

      BLOCK DATA
      COMMON/ DAT/X(255),ODAT(81,17),PDAT(81,17),WEIGHT(32)
      DATA X,ODAT,PDAT,WEIGHT/300940.00,.2543395,.2837055,.3139016,.3448
1242,.37633631,.4084923,.4408209,.4734933,.5062901,.5390797,.571728
29,.6040891,.6360360,.6674292,.6981291,.7290011,.7592119,.7947307,.
38113318,.8365931,.8603978,.8826353,.9032019,.9220010,.9389438,.953
49502,.9669485,.9778773,.9866837,.9933259,.9977716,1.0/
      END

```

Figure A.20 (Continued)

```

DIMENSION SDAT(64,14),NAME(5)
CALL SETFIL(1,'DELDOP.DAT',IERR,'DK',0)
WRITE(6,100)
READ(6,200)NFIL,NREC
DEFINE FILE 1(NFIL,128,U,IVAR)
IVAR=1
NRECL=NFIL-NREC+1
NRECL=MAX0(NRECL,14)
NREC=NREC-1
IF(NREC.EQ.0)GO TO 8
DO 5 I=1,NREC
5 READ(1,IVAR)(SDAT(J,I),J=1,64)
8 DO 10 I=1,NRECL
10 READ(1,IVAR)(SDAT(J,I),J=1,64)
DO 12 I=33,64
12 WRITE(5,300)(SDAT(I,J),J=1,NRECL)
DO 13 I=1,32
13 WRITE(5,300)(SDAT(I,J),J=1,NRECL)
100 FORMAT(' ENTER NO. OF RECORDS IN ''DELDOP.DAT'',/'
1' AND FIRST RECORD TO BE EXAMINED, '/')
200 FORMAT(2I5)
300 FORMAT(14E9.2)
END

```

Figure A.21 DDREAD

```

    DIMENSION X(96), DOPMAR(64), DELMAR(85), DELPK(5), DOPPK(10),
11 DELPK(5), SDOPPK(10), SDELD(5)
    DATA DOPMAR, DELMAR/149+0.0/
    WRITE(6,100)
    READ(0,200)HFIL
    END FILE 8
    END FILE 6
    CALL SETFIL(1,'DELDOP.DAT',IERR,'DK',0)
    DEFINE FILE 1(HFIL,128,U,1VAR)
    1VAR=1
    HZRES=9000./1255.*64.)
    HZOFF1=-32.*HZRES
    HZOFF2=31.*HZRES
    DELRES=1./9000.
    DELTOT=FLOAT(HFIL-1)/9000.
    DO 30 I=1,HFIL
    READ(1,1VAR) (X(J),J=33,96)
    DO 5 J=1,32
5      X(J)=X(J+64)
    DO 10 J=1,64
    SMUL=1.
    IF((J.EQ.1).OR.(J.EQ.64))SMUL=.5
    10  DELMAR(I)=DELMAR(I)+X(J)*SMUL
    SMUL=1.
    IF((I.EQ.0).OR.(I.EQ.HFIL))SMUL=.5
    DO 20 J=1,64
    20  DOPMAR(J)=DOPMAR(J)+X(J)*SMUL
    30  CONTINUE
    END FILE 1
    WRITE(5,300)HFIL,DELRES
    WRITE(5,600) (DELMAR(I),I=1,HFIL)
    WRITE(5,500)
    WRITE(5,400) HZOFF1,HZOFF2,HZRES
    WRITE(5,600)DOPMAR
    WRITE(5,500)
    DO 40 I=1,HFIL
    DELINT=DELINT+DELMAR(I)
    40  DELH=DELH+FLOAT(I)*DELMAR(I)
    DELM=DELM/DELINT
    DELHS=DELM*DELRES
    DO 45 I=1,64
    DOPINT=DOPINT+DOPMAR(I)
    45  DOPH=DOPH+FLOAT(I-33)*DOPMAR(I)
    DOPH=DOPH-DOPINT
    DOPHH=DOPH*HZRES
    DO 50 I=1,HFIL
    IF(DELMH<.1,DELMAR(I))DELMAX=DELMAR(I)
    50  DELVAR=DELVAR+FLOAT(I-DELD)*2*DELMAR(I)
    DELVAR=DELVAR/DELINT
    DO 55 I=1,64
    IF(DOPHH<.1,DOPMAR(I))DOPMAX=DOPMAR(I)
    55  DOPVAR=DOPVAR+FLOAT(I-33)-DOPH)*2*DOPMAR(I)
    DOPVAR=DOPVAR/DOPINT
    DELSDS=SQRT(DELVAR)*DELRES

```

Figure A.22 DDSTAT

```

DOPSDH=SQRT(DOPVAR)*HZRES
WRITE(5,700)DELTD,DELSDS
WRITE(5,500)
WRITE(5,800)DOPMH,DOPSDH
DELPK(1)=DELMAR(1)
DOPK(1)=DOPMAR(1)
J=1
IDEL=0
DO 60 I=2,NFIL
DIFF=DELMAR(I)-DELMAR(I-1)
IF(DIFF.GT.0.) GO TO 58
IF(DIFF.LT.0.) GO TO 58
IF((DELMAR(I-1)/DELMAX).LT.1.E-2)GO TO 58
DELPK(J)=DELMAR(I-1)
IDEL=IDEL+1
IDELK(J)=I-1
J=J+1
58 DIFF0=DIFF
60 CONTINUE
J=1
DIFF0=0.
IDOP=0
IDEL1=IDEL-1
IF(IDEL1.EQ.0)GO TO 66
DO 65 I=1,IDEL1
65 SDELD(I)=FLOAT(IDELPK(I+1)-IDELPK(I))*DELRES
66 DO 70 I=2,64
DIFF=DOPMAR(I)-DOPMAR(I-1)
IF(DIFF.GT.0.) GO TO 68
IF(DIFF.LT.0.) GO TO 68
IF((DOPMAR(I-1)/DOPMAX).LT.1.E-2)GO TO 68
DOPK(J)=DOPMAR(I-1)
IDOP=IDOP+1
SDOPK(J)=FLOAT(I-34)*HZRES
J=J+1
68 DIFF0=DIFF
70 CONTINUE
WRITE(5,500)
WRITE(5,900)
WRITE(5,1000)(IDELPK(I),I=1,IDEL)
IF(IDEL1.EQ.0)GO TO 75
WRITE(5,1200)
75 WRITE(5,600)(SDELD(I),I=1,IDEL1)
WRITE(5,500)
WRITE(5,1100)
WRITE(5,600)(SDOPK(I),I=1,IDOP)
100 FORMAT(' ENTER NO. OF DELAY TAPS PROCESSED')
200 FORMAT(15)
300 FORMAT(' ORIGINAL DELAY POWER DISTRIBUTION FOR THE 13 TAPS FROM
400 1000.0" EACH TAP IS SEPARATED BY 10.3" SECONDS.')
500 FORMAT(' ORIGINAL DOPLER POWER DISTRIBUTION FROM 10.0" Hz TO
600 167.5" Hz IN SLIPS OF 17.3" Hz')
FORMAT(22)
FORMAT(50,10E12,4)

```

Figure A.22 (Continued)

```

700  FORTN(' DELAY MEAN='E10.3' SECONDS---CORRESPONDING STANDARD DEVI
      ITION='E10.3' SECONDS'/)
800  FORTN(' DOPPLER MEAN='F10.3' HZ-----CORRESPONDING STANDARD DEVI
      ITION='F10.3' HZ'/)
900  FORTN(' DELAY PEAKS OCCUR AT TOPS:'/)
1000 FORTN('5X,1016)
1100 FORTN(' DOPPLER PEAKS OCCUR AT FREQUENCIES(IN HZ):'/)
1200 FORTN(' WITH CORRESPONDING TIME DIFFERENCES IN SECONDS BETWEEN DE
      LAY PEAKS OF:'/)
      END

```

Figure A.22 (Continued)

```

DIMENSION Y(2770),VS1(128),VSQ(255),VS2(128),VSP(255),FAKE(2048)
EQUIVALENCE(Y(1),VS1(1)),(VS1(1),VSQ(1)),(VS2(1),VSP(1))
COMMON/TRANSID/I1,I2
I1=16621
I2=-24376
WRITE (6,100)
END FILE 6
READ(8,300)IFIL
END FILE 8
CALL SETFIL(3,'HFSIMS.DAT',IERR,'MT',0)
CALL SCHAN(VS1,VS2)
ICSDR='177570'
IFIL=IFIL+4
DO 50 J=1,IFIL
IJKM=J
CALL STASH(IJKM,ICSDR)
CALL CHAN(VS1,VS2)
VS1(1)=0.
VS2(1)=0.
CALL FFT(VSQ(1),VSP(1),255,255,255,-1)
DO 10 I=1,255
10 VSQ(I)=VSQ(I)/255.
CALL FFT(Y(1),Y(2),384,384,384,2)
CALL REALTR(Y(1),Y(2),384,2)
WRITE(3)Y
DO 20 I=256,770
20 Y(I)=0.0
DO 30 I=129,255
Y(I)=0.0
30 VSP(I)=0.0
50 CONTINUE
END FILE 3
100 FORMAT(' ENTER IFIL'/)
200 FORMAT(1X,10E12,4)
300 FORMAT(15)
END
SUBROUTINE SCHAN(VS1,VS2)
COMMON/TRANSID/I1,I2
DIMENSION Y(2),P(4),B(4),FDP(4),TD(4)
DIMENSION VS1(128),VS2(128)
REAL K0
COMMON/FILT/A1(4),A2(4),A3(4)
COMMON/CHAN/NPATH,NTONE
COMMON/CHAN/CHPH(4),FIXPH(128,4),X0(8),X1(8)
DATA TUMP1/6.2631653/
WRITE(6,109)
READ(8,112)NTONE
WRITE(6,110)
READ(8,103)FSEP
WRITE(6,105)
READ(8,103)RATE
WRITE(6,100)
READ(8,112)NPATH
DO 5 I=1,NPATH

```

Figure A.23 HFSIMS

```

WRITE(6,102)I
READ(8,103)B(1)
WRITE(6,104)I
READ(8,103)P(1)
WRITE(6,107)I
READ(8,105)FDOP(1)
WRITE(6,111)I
READ(8,103)TD(1)
5  CONTINUE
   OFFSET=0.
   TFRAME=1./RATE
   DO 15 I=1,NPATH
     P(1)=10.***((P(1)-3.01)/10.)
     K0=EXP(-6.2931853*B(1)*TFRAME)
     A1(1)=2.*K0
     K0=K0**2
     A2(1)=-K0
     A3(1)=SQRT(P(1)*(1.-K0)**3/(1.+K0))
     RHO=A1(1)/(1.+K0)
     DO 15 J=1,2
       IF(ABS(B(1))-1.0E-6)B.8.9
8     Y(1)=1.
       Y(2)=1.
       GO TO 10
9     CALL GAUSZ(Y)
10    X0(2*I+J-2)=SQRT(P(1))*Y(1)
     X1(2*I+J-2)=SQRT(P(1))*(RHO*Y(1)+SQRT(1.-RHO**2)*Y(2))
15    CONTINUE
     DO 16 J=1,NPATH
       CHPH(J)=TWOPI*FDOP(J)*TFRAME
       A=TWOPI*FDOP(J)*TD(J)
       DO 16 I=1,NTONE
         C=TWOPI*TD(J)*((FLOAT(I)-1.)*FSEP+OFFSET)
         FIMPH(1,J)=AMOD(A+C,TWOPI)
16      CONTINUE
       CALL CHAN(VS1,VS2)
       RETURN
100  FORMAT(' ENTER NUMBER OF PATHS (FOUR OR FEWER)'/)
102  FORMAT(' ENTER RMS BANDWIDTH OF PATH',12,' IN HZ'/)
103  FORMAT(F14.9)
104  FORMAT(' ENTER POWER OF PATH',12,' IN DB'/)
105  FORMAT(' ENTER FRAME RATE IN FRAMES/SEC'/)
107  FORMAT(' ENTER DOPPLER OFFSET OF PATH',12,' IN HZ'/)
108  FORMAT(' RAN TERMINAL COUNT',2(10))
109  FORMAT(' ENTER NUMBER OF ACTIVE TONES'/)
110  FORMAT(' ENTER TONE SEPARATION IN HZ'/)
111  FORMAT(' ENTER DELAY OF PATH',12,' IN SEC'/)
112  FORMAT(15)
     END
     SUBROUTINE CHAN(VS1,VS2)
       DIMENSION VS1(128),VS2(128)
       COMMON THISID,11,12
       DIMENSION T(20),P(4),GAIN(4)
       COMMON CHANID,NPATH,NTONE

```

Figure A.23 (Continued)

```

COMMON/CHAND/CHPH(4),FIXPH(128,4),X0(8),X1(8)
DATA TWOPI/6.2831853/
CALL FILT2(NPATH,X0,X1)
DO 10 J=1,NPATH
K=2*J-1
R(J)=SQRT(X0(K)**2+X0(K+1)**2)
GAMMA(J)=ATAN2(X0(K+1),X0(K))
10 CONTINUE
DO 20 I=1,NTONE
VS1(I)=0.
VS2(I)=0.
DO 15 J=1,NPATH
FIXPH(I,J)=AMOD(FIXPH(I,J)+CHPH(J),TWOPI)
A=FIXPH(I,J)+GAMMA(J)
VS1(I)=R(J)*COS(A)+VS1(I)
VS2(I)=R(J)*SIN(A)+VS2(I)
15 CONTINUE
20 CONTINUE
RETURN
END
SUBROUTINE FILT2(N,X0,X1)
COMMON/RAHSID/I1,I2
COMMON/FILT/R1(4),A2(4),A3(4)
DIMENSION X0(8),X1(8),Y(2)
DO 10 I=1,N
CALL GAUSZ(Y)
DO 10 J=1,2
K=2*I+J-2
Y(J)=A1(I)*X0(K)+A2(I)*X1(K)+A3(I)*Y(J)
X1(K)=X0(K)
X0(K)=Y(J)
10 CONTINUE
RETURN
END
SUBROUTINE GAUSZ(Z)
COMMON/PANSID/I1,I2
DIMENSION Z(2)
X=PRN(I1,I2)
Y=PRN(I1,I2)
X=SQRT(-2.*ALOG(X))
Y=6.2831853*X
Z(1)=X*COS(Y)
Z(2)=X*SIN(Y)
RETURN
END

```

Figure A.23 (Continued)

```

DIMENSION Y(770),Z(765),W(770),H(511),P(510),X(255)
DIMENSION FAVE(2048)
EQUIVALENCE (H(2),P(1))
COMPLEX YC(385),WC(385)
EQUIVALENCE (Y(1),YC(1)),(W(1),WC(1))
DATA Y/770*0.0/,Z/765*0.0/
DATA 10,11,IPN,ICSDR/2,-1.255,"177578/
DATA IPN2,IPN3,IPN4/510,765,1020/
SIPND4=1./(4.0*FLOAT(IPN+1)*768.0)
ISET=0
CALL SETFIL(1,'LAGR.DAT',IERR,'DK',0)
READ(1)H
END FILE 1
WRITE(6,300)
END FILE 6
READ(6,100)IFIL
END FILE 8
CALL SETFIL(1,'PNSEQT.DAT',IERR,'DK',0)
DEFINE FILE 1(1,1540,U,IVAR)
CALL SETFIL(2,'HFSIMS.DAT',IERR,'MT',0)
CALL SETFIL(3,'TESTD.DAT',IERR,'DK',0)
IFIL=IFIL+4
DO 70 IK=1,IFIL,2
DO 70 IXY=1,2
IJKM=IK+IXY-1
CALL STASH(IJKM,ICSDR)
PEAD(1)Y
PEAD(2,END=75)W
DO 30 I=1,385
30 YC(I)=Y(I)*WC(I)
CALL REALTR(Y(1),Y(2),384,-2)
CALL SET(Y(1),Y(2),384,384,384,-2)
I=MOD((I+1),3)
I11=I*IPN
IF (I11.GT,IPN) GO TO 34
DO 32 I=1,IPN2
32 Z(I+I11)=Y(I+IPN)*P(I)+Z(I+I11)
GO TO 38
34 I14=IPN3-I11
DO 35 I=1,I14
35 Z(I+I11)=Y(I+IPN)*P(I)+Z(I+I11)
I12=IPN4-I11
I13=IPN3-I11
I14=I11-IPN
DO 37 I=1,I14
37 Z(I)=Z(I+I12)*P(I+I13)+Z(I)
DO 39 I=1,IPN
39 I14=I+I11
DO 41 I=1,IPN
41 X(I)=Z(I+I11)
GO TO 45

```

Figure A.24 PLYSCF

```

43  WRITE(3)(X(J),J=1,IPN),(Z(I+111),I=1,IPN)
45  DO 50 I=1,IPN
50  Z(I+111)=0.0
70  CONTINUE
    GO TO 80
75  ISET=1
80  END FILE 3
    END FILE 2
    END FILE 1
    IF(ISET.EQ.1)WRITE(5,500)IJKM
100  FORMAT(15)
300  FORMAT(' ENTER IFIL'//)
500  FORMAT(' END OF FILE ON RECORD',15//)
    END

```

Figure A.24 (Continued)

```

1
    DIMENSION Y(770)
    DATA ISTATE, ITAP/1, '270/
    Y(1)=FLOAT(ISTATE)
    DO 15 I=2,255
    ISTATE=IFSR(ISTATE, ITAP)
    IF(ISTATE.AND.1)5,5,10
5    ITEP=-1
10   Y(1)=FLOAT(ITEMP)
15   ITEM=1
    DO 20 I=1,255
    Y(I+255)=Y(I)
20   Y(I+510)=Y(I)
    WRITE(5,500)Y
    CALL FFT(Y,Y(2),384,384,384,2)
    CALL REALTR(Y,Y(2),384,2)
    CALL SETFIL(1, 'PNSQT.DAT', IERR, 'DK', 0)
    DEFINE FILE 1(1,1540,U,IVAR)
    WRITE(1,1)Y
    END FILE 1
    CALL REALTR(Y,Y(2),384,-2)
    CALL FFT(Y,Y(2),384,384,384,-2)
    WRITE(5,500)Y
500  FORMAT(1X,10E12.4)
    END

```

Figure A.25 SETPNS

```

SUBROUTINE FFT(A,B,NTOT,N,NSPAN,ISN)
  DIMENSION A(1),B(1)
  DIMENSION HFAC(5),NP(23)
  DIMENSION AT(5),BT(5)
  EQUIVALENCE (1,11)
  INDF=5
  NXP=23
  I=0
  JF=0
  K=1
  II=5
  KT=1
  HFAC(1)=4
  HFAC(2)=4
  HFAC(3)=3
  HFAC(4)=2
  HFAC(5)=4
  INC=ISN
  RAD=0.0*ATAN(1.0)
  S72=RAD/5.0
  C72=COS(S72)
  S72=SIN(S72)
  S120=SQRT(0.75)
  IF (ISN.GE.0) GO TO 10
  S72=-S72
  S120=-S120
  RAD=-RAD
  INC=-INC
10  NT=INC*NTOT
  KS=INC*NSPAN
  KSPAN=KS
  NN=NT-INC
  JC=KS/II
  RADF=RAD*FLOAT(JC)*.5
100 SD=RADF*FLOAT(KSPAN)
  CD=2.0*SIN(SD)**2
  SD=SIN(SD+SD)
  KV=1
  I=I+1
  IF (HFAC(I).NE.2) GO TO 400
  KSPAN=KSPAN/2
  K1=KSPAN+2
210 K2=K1+KSPAN
  AK=A(K2)
  BK=B(K2)
  ACK2=A(KK)-AK
  BCK2=B(KK)-BK
  ACKK=A(KK)+AK
  BCKK=B(KK)+BK
  KK=K2+KSPAN
  IF (I.LE.III) GO TO 210
  NT=NT-NN
  IF (I.LE.JC) GO TO 210
  IF (I.GT.KSPAN) GO TO 600

```

Figure A.26 Subroutine FFT384

```

220  C1=1.0-CD
      S1=SD
230  I2=I1*KSPAN
      AK=A(KK)-A(K2)
      BK=B(KK)-B(K2)
      A(KK)=A(KK)+A(K2)
      B(KK)=B(KK)+B(K2)
      A(K2)=C1*AK-S1*BK
      B(K2)=S1*AK+C1*BK
      I1=K2+KSPAN
      IF (KK.LT.I1) GO TO 230
      K2=KK-I1
      C1=-C1
      KK=K1-K2
      IF (KK.GT.K2) GO TO 230
      AK=C1-(CD+C1+SD*S1)
      S1=(SD+C1-CD*S1)+S1
      C1=AK
      KK=KK+JC
      IF (KK.LT.K2) GO TO 230
      K1=K1+INC+INC
      KK=(K1-KSPAN)/2+JC
      IF (KK.LE.JC+JC) GO TO 220
      GO TO 100
320  K1=KK+KSPAN
      K2=K1+KSPAN
      AK=A(KK)
      BK=B(KK)
      AJ=A(K1)+A(K2)
      BJ=B(K1)+B(K2)
      A(KK)=AK+AJ
      B(KK)=BK+BJ
      AK=-.5*AJ+AK
      BK=-.5*BJ+BK
      AJ=(A(K1)-A(K2))*S120
      BJ=(B(K1)-B(K2))*S120
      A(K1)=AK-BJ
      B(K1)=BK+AJ
      A(K2)=AK+BJ
      B(K2)=BK-AJ
      I1=K2+KSPAN
      IF (I1.LT.I1) GO TO 320
      KK=KK+NN
      IF (KK.LE.KSPAN) GO TO 320
      GO TO 700
400  IF (IFAC(I).NE.4) GO TO 600
      KSPAN=KSPAN
      KSPAN=KSPAN/4
410  C1=1.0
      S1=0
420  K1=I1+KSPAN
      I2=I1+KSPAN
      K3=I2+KSPAN
      AK=A(K1)+A(K2)

```

Figure A.26 (Continued)

```

      A(1)=A(1)+A(1)
      A(2)=A(1)+A(2)
      A(3)=A(1)+A(3)
      A(1)=A(1)+A(1)
      A(2)=A(1)+A(2)
      B(1)=B(1)+B(2)
      B(2)=B(1)+B(2)
      B(3)=B(1)+B(3)
      B(1)=B(1)+B(3)
      B(2)=B(1)+B(2)
      B(3)=B(1)+B(3)
      IF (ISN.LT.0) GO TO 450
      A(1)=A(1)+B(1)
      A(2)=A(1)+B(2)
      B(1)=B(1)+A(1)
      B(2)=B(1)+A(2)
      IF (S1.EQ.0.0) GO TO 460
430  A(K1)=A(K1)+B(K1)*S1
      B(K1)=A(K1)+B(K1)*C1
      A(K2)=A(JP)+C2-B(JP)*S2
      B(K2)=A(JP)+S2+B(JP)*C2
      A(K3)=A(1)+C3-B(K1)*S3
      B(K3)=A(1)+S3+B(K1)*C3
      KK=K3+KSPAN
      IF (KK.LE.INT) GO TO 420
440  C2=C1-(CD+C1+SD*S1)
      S1=(SD*C1-CD*S1)+S1
      C1=C2
      C2=C1**2-S1**2
      S2=2.0*C1*S1
      C3=C2+C1-S2*K1
      S3=C2+S1+S2*C1
      KK=KK-INT+JC
      IF (KK.LE.KSPAN) GO TO 420
      KK=KK-KSPAN+INC
      IF (KK.LE.JC) GO TO 410
      IF (KSPAN.EQ.JC) GO TO 800
      GO TO 100
450  A(1)=A(1)+B(1)
      A(2)=A(1)+B(2)
      B(1)=B(1)+A(1)
      B(2)=B(1)+A(2)
      IF (S1.NE.0.0) GO TO 430
460  A(K1)=A(K1)
      B(K1)=B(K1)
      A(K2)=A(1)
      B(K2)=B(1)
      A(K3)=A(1)
      B(K3)=B(1)
      KK=K3+KSPAN
      IF (KK.LE.INT) GO TO 420
      GO TO 440
600  I=I+1
      ISPAN=KSPAN

```

Figure A.26 (Continued)

```

      C2=C1*CD
      S1=SD
700  IF (C1.EQ.0) GO TO 800
      IF (C1.EQ.1) GO TO 800
      IF JC+1
710  C2=C1*CD
      S1=SD
720  C1=C2
      S2=S1
      KK=KK+KSPAN
730  AK=A(KK)
      A(CE)=C2*AK-S2*B(KK)
      B(CE)=S2*AK+C2*B(KK)
      KK=KK+KSPAN
      IF (KK.LE.HT) GO TO 730
      AK=S1*S2
      S2=S1*C2+C1*S2
      C2=C1*C2-AK
      KK=KK+HT+KSPAN
      IF (KK.LE.KSPAN) GO TO 730
      C2=C1-(CD*C1+SD*S1)
      S1=S1+(SD*C1-CD*S1)
      KK=KK-KSPAN+JC
      IF (KK.LE.KSPAN) GO TO 720
      KK=KK-KSPAN+JC+INC
      IF (KK.LE.JC+JC) GO TO 710
      GO TO 100
800  NP(1)=KS
      IF (KT.EQ.0) GO TO 890
      K=KT+KT+1
      IF (M.LT.K) K=K-1
      J=1
      NP(K+1)=JC
810  NP(J+1)=NP(J)/NFAC(J)
      NP(K)=NP(K+1)*NFAC(J)
      J=J+1
      K=K-1
      IF (J.LT.K) GO TO 810
      K3=NP(K+1)
      KSPAN=NP(2)
      KK=JC+1
      K2=KSPAN+1
      J=1
820  AK=A(KK)
      A(CE)=A(K2)
      AK2=AK
      BK=B(KK)
      B(CE)=B(K2)
      BK2=BK
      KK=KK+INC
      K2=KSPAN+K2
      IF (K2.LT.KS) GO TO 820
830  L3=L2-NP(J)
      J=J+1
      L2=NP(J)+L2

```

Figure A.26 (Continued)

```

      IF (I2.GT.NP(J)) GO TO 830
      J=J-1
840  IF (I1.LT.I2) GO TO 820
      KK=K+INC
      K2=KSPAN+K2
      IF (K2.LT.KS) GO TO 840
      IF (KK.LT.KS) GO TO 830
      JC=K3
890  IF (2*KT+1.GE.N) RETURN
      KSPAN=NP(KT+1)
      J=K-KT
      NFAC(J+1)=1
900  NFAC(J)=NFAC(J)*NFAC(J+1)
      J=J-1
      IF (J.NE.KT) GO TO 900
      KT=KT+1
      NN=NFAC(KT)-1
      IF (NN.GT.MAXP) GO TO 998
      JJ=0
      J=0
      GO TO 906
902  JJ=JJ-K2
      K2=KK
      K=K+1
      KK=NFAC(K)
      JJ=KK+JJ
      IF (JJ.GE.K2) GO TO 902
      NP(J)=JJ
906  K2=NFAC(KT)
      K=KT+1
      KK=NFAC(K)
      J=J+1
      IF (J.LE.NN) GO TO 904
      J=0
      GO TO 914
910  K=KK
      KK=NP(K)
      NP(K)=-KK
      IF (KK.NE.J) GO TO 910
      K3=KK
914  J=J+1
      KK=NP(J)
      IF (KK.LT.0) GO TO 914
      IF (KK.NE.J) GO TO 910
      NP(J)=-J
      IF (J.NE.NN) GO TO 914
      MAXF=MAXF*INC
      GO TO 950
924  J=J-1
      IF (NP(J).LT.0) GO TO 924
      JJ=JC
926  KSPAN=JJ
      IF (JJ.GT.MAXF) KSPAN=MAXF
      I1=I1-KSPAN

```

Figure A.26 (Continued)

```

      P=HP(K)
      I1=JC(K)+I1+JJ
      K1=K+KSPAN
      K2=0
928  I2=K2+1
      AT(K2)=A(K1)
      BT(K2)=B(K1)
      K1=K1-INC
      IF (K1.NE.KK) GO TO 928
932  P1=K+KSPAN
      K2=K1-JC*(K+HP(K))
      K=-HP(K)
936  A(K1)=A(K2)
      B(K1)=B(K2)
      K1=K1-INC
      K2=K2-INC
      IF (K1.NE.KK) GO TO 936
      KK=K2
      IF (K.NE.J) GO TO 932
      K1=KK+KSPAN
      K2=0
940  K2=K2+1
      A(K1)=AT(K2)
      B(K1)=BT(K2)
      K1=K1-INC
      IF (K1.NE.KK) GO TO 940
      IF (JJ.NE.0) GO TO 926
      IF (J.NE.1) GO TO 924
950  J=K3+1
      NT=NT-KSPNN
      I1=NT-INC+1
      IF (NT.GE.0) GO TO 924
      RETURN
998  ISN=0
      END
      SUBROUTINE REALTR(A,B,N,ISN)
      DIMENSION A(1),B(1)
      REAL IM
      INC=IABS(ISN)
      NH=N*INC+2
      HH=NH/2
      SD=2.0*ATAN(1.0)/FLOAT(HH)
      CD=2.0*SIN(SD)**K2
      SD=SIN(SD+SD)
      SH=0.0
      IF (ISN.LT.0) GO TO 30
      CH=1.0
      A(CH-1)=A(1)
      B(CH-1)=B(1)
10  DO 20 J=1,HH,INC
      K=HH-J
      AA=A(J)+A(K)
      BB=A(J)-A(K)
      CC=B(J)+B(K)

```

Figure A.26 (Continued)

```

BB=B(I)-B(I)
FE=CH*DA+SN*AB
II=SH*BA-CH*AB
B(K)=IM-BB
B(J)=IM-BB
A(K)=AA-PE
A(J)=AA+RE
AA=CH-(CD*CH+SD*SN)
SH=(SD*CH-CD*SN)+SN
20 CH=AA
RETURN
30 CH=-1.0
SD=-SD
GO TO 10
END

```

Figure A.26 (Continued)

```

C      *PLAYS BACK GENERATED SNAPSHOTS OF HF CHANNEL FOR PLYSCF; THIS IS
C      *THE OVERLAY VERSION
COMMON OVR Y(0770),Z(0765),W(0770),H(0511),X(255)
COMMON DATA 11,ICSDR,IO,IPN,IPHI0,IPHI01,IPHI02,ISET,IOP1,IK,IXY
DIMENSION P(0510)
EQUIVALENCE(H(2),P(1))
IPHI0=IO+IPN
IPHI01=IPHI0+IPN
IPHI02=IPHI01+IPN
IOP1=IO+1
SIPND4=1.0/(4.0*FLOAT(IPN+1)*768.)
IFIL=10000
CALL LOAD('LAG',1,IER)
CALL SETFIL (1,'PHSEOT.DAT',IERR,'DK',0)
DEFINE FILE 1(1,1540,U,IVAR)
CALL SETFIL (2,'HFSHIS.DAT',IERR,'MT',0)
CALL SETFIL (3,'TESTD.DAT',IERR,'DK',0)
CALL WAIT
IF(IER.EQ.0)GO TO 20
IJKM='100000'
GO TO 80
20  CALL LAGINT(IO,IPN,H)
    DO 70 IK=1,IFIL,2
    DO 70 IX=1,2
    IJKM=IK+IXY-1
    CALL STASH(IJKM,ICSDR)
    IVAR=1
    CALL LOAD('SUB1',0,IER)
    IF(IER.EQ.0)GO TO 25
    ISET='20000'
    GO TO 30
25  CALL SUB1(IVAR)
    IF(ISET.NE.0)GO TO 80
    CALL LOAD('FFTOVR',0,IER)
    IF(IER.EQ.0)GO TO 30
    ISET='40000'
    GO TO 80
30  CALL FFTOVR
    CALL LOAD('SUB2',0,IER)
    IF(IER.EQ.0)GO TO 35
    ISET='60000'
    GO TO 80
35  CALL SUB2(SIPND4)
70  CONTINUE
80  END FILE 3
    END FILE 2
    END FILE 1
    IJKM=IJKM+ISET
    CALL STASH(IJKM,ICSDR)
    END
BLOCK DATA
COMMON OVR Y(0770),Z(0765),W(0770),H(0511),X(255)
COMMON DATA 11,ICSDR,IO,IPN,IPHI0,IPHI01,IPHI02,ISET,IOP1,IK,IXY
DATA Y,2,1535,0.0/
DATA 11,ICSDR,IO,IPN,ISET,-1,177570,2,255,0/
END

```

Figure A.27 PLYOVR

```

SUBROUTINE SUB1 (IVAR)
COMMON/ OVR/ Y(0770), Z(0765), W(0770), H(0511), X(255)
COMMON/ DATA/ IT, ICSDF, IQ, IPH, IPHI0, IPHI01, IPHI02, ISET, IOP1, IK, IX, Y
COMPLEX YC(305), WC(305)
EQUIVALENCE (YC(1), YC(1)), (WC(1), WC(1))
READ(1, IVAR, END=5) Y
READ(2, END=6) W
DO 2 1=1,305
  YC(1)=YC(1)+WC(1)
RETURN
5  ISET="4000
RETURN
6  ISET="10000
RETURN
END

```

Figure A.28 SUB1 (For PLYOVR)

```

SUBROUTINE FFTOVR
COMMON/ OVR/ Y(0770), Z(0765), W(0770), H(0511), X(255)
CALL REALTR(Y(1), Y(2), 304, -2)
CALL FFT(Y(1), Y(2), 304, 304, 304, -2)
RETURN
END

```

Figure A.29 FFTOVR (For PLYOVR)


```

      DIMENSION X(512),Y(512),NAME(5)
      DATA NAME/3*' ','D','AT'/
      WRITE(6,300)
      READ(6,400) (NAME(I),I=1,3)
      WRITE(6,200)
      READ(8,100) IREC
      END FILE 8
      END FILE 6
      CALL SETFIL(1,NAME,IERR,'MT',0)
      DO 10 I=1,IREC
      READ(1)(X(J),J=1,255)
10    READ(1)(Y(J),J=1,255)
      END FILE 1
      WRITE(5,500) (X(J),J=1,255)
      WRITE(5,500) (Y(J),J=1,255)
      DO 15 I=1,255
15    Y(I)=-Y(I)
      CALL FFT(X,Y,512,512,512,1)
      DO 20 I=1,512
20    X(I)=(X(I)**2+Y(I)**2)**.5
      CALL SETFIL(1,'FFT255.DAT',IERR,'DK',0)
      WRITE(1)X
      END FILE 1
      WRITE(5,500)X
100   FORMAT(15)
200   FORMAT(' ENTER RECORD NO. '/')
300   FORMAT(' ENTER NAME OF INPUT DATA FILE '/')
400   FORMAT(3A2)
500   FORMAT(1X,10E12,4)
      END

```

Figure A.32 CHFFT

```

DIMENSION X(513),Y(513)
DATA XM1N,XMAX,YMIN,YMAX/0.,1.,-60.,10./
DATA XSIZE,YSIZE/6.,7./
CALL SETFIL(1,'FFT255.DAT',IERR,'DK',0)
READ(1)(X(I),I=1,512)
END FILE 1
SMAX=0.
DO 5 I=1,512
X(I)=20.*ALOG10(X(I))
5 IF(X(I).GT.SMAX)SMAX=X(I)
DO 7 I=1,513
Y(I)=FLOAT(I-1)/512.
X(I)=X(I)-SMAX
7 IF(X(I).LT.-60.)X(I)=-60.
X(513)=X(I)
DX=(XMAX-XMIN)/XSIZE
DY=(YMAX-YMIN)/YSIZE
XARG=XMIN/DX
YARG=YMIN/DY
CALL MODE(2,XSIZE,0.,1.5)
CALL MODE(3,YSIZE,0.,1.5)
CALL MODE(8,XMIN,DX,XARG)
CALL MODE(9,YMIN,DY,YARG)
CALL DRAW(Y(1),X(1),513,441)
XSIZE1=XSIZE+.5
YSIZE1=YSIZE+.5
CALL MODE(2,XSIZE1,-.75,1.5)
CALL MODE(3,YSIZE1,-.75,1.5)
CALL MODE(8,XMIN,DX,0.)
CALL MODE(9,YMIN,DY,0.)
CALL MODE(7,XSIZE,YSIZE,9999.)
CALL AXES(37,1,'FREQUENCY NORMALIZED TO SAMPLING RATE',23,1,'MAGNI
TITUDE RESPONSE (DB)')
CALL MODE(8,XMIN,DX,XSIZE)
CALL MODE(9,YMIN,DY,YSIZE)
CALL AXES(0,1,'X',0,1,'Y')
CALL DRAW(0.,0.,1,9900)
CALL VERS(0,0)
END

```

Figure A.33 PLOTCH

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
16 HF CHANNEL SIMULATION.		9 Final Report. (Part 2) 15 Apr 74-28 Feb 75
10 AUTHOR(s) Robert W. /Pinto Phillip A. /Bello		15 No. 14-2 CONTRACT OR GRANT NUMBER(s) N00014-74-C-0048
9. PERFORMING ORGANIZATION NAME AND ADDRESS CNR, Inc. 20 Wells Avenue, Newton, Mass. 02159		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS NRL000173-4-006066
11. CONTROLLING OFFICE NAME AND ADDRESS Office of Naval Research Department of the Navy Arlington, Va. 22217		11. REPORT DATE 31 March 75
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office) Naval Research Laboratory Washington, D.C. 20375		12. NUMBER OF PAGES 109
15. DISTRIBUTION STATEMENT (of this Report) Distribution of this document is unlimited.		13. SECURITY CLASS. (of this report) Unclassified
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report) 14 CNR-14-2		14. DECLASSIFICATION/DOWNGRADING SCHEDULE
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) PN probing; channel measurement; channel playback; time-varying HF channel		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) The process of probing and measuring an HF channel for use in a stored channel simulator will prove useful only when the investigator has some knowledge of the channel conditions. Of particular interest are the channel Doppler characteristics and multipath structure. The operations required to provide a measure of these parameters include: (1) complex channel		

DD FORM 1 JAN 73 1473 EDITION OF 1 NOV 65 IS OBSOLETE

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

407 852

OVER

Unclassified

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

Block #20 Abstract, Continued

reconstruction; (2) prefiltering to improve delay resolution; (3) channel snapshot generation; and (4) Doppler estimation. A set of flexible Fortran programs which meet these specifications are described in detail. Software verification is achieved by means of a program generated single sideband HF test channel. In addition, programming changes to the previously reported channel measurement and reproduction software are documented. These result in significant decreases in computation time.

Unclassified

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)