

AD-A033 131

TEXAS UNIV AT AUSTIN DEFENSE RESEARCH LAB

F/6 12/1

SHANNON'S THEOREM, (U)

MAY 67 G S INNIS

NOBSR-95181

UNCLASSIFIED

DRL-A-284

NL

1 OF 1
AD
A033131



END

DATE
FILMED

2-77

ADA 033131


DEFENSE RESEARCH LABORATORY



THE UNIVERSITY OF TEXAS
AUSTIN, TEXAS 78712

DISTRIBUTION STATEMENT A

Approved for public release;
Distribution Unlimited



1

14 DRL-A-284

6
SHANNON'S THEOREM

by
10 G. S. Innis

11 24 May 1967

12 87p.

Copy No. 1

15
Resulting from Research Done Under
Naval Ship Systems Command Contract NObsr-95181

ADDITIONAL FOR	
NTIS	White Series ☒
W-1	W-1 Series ☐
DISTRIBUTION/AVAILABILITY CODES	
Letter on file	
BY	
DISTRIBUTION/AVAILABILITY CODES	
DRL ATLAS DRL/ST SPECIAL	
A	

DEFENSE RESEARCH LABORATORY
THE UNIVERSITY OF TEXAS AT AUSTIN
AUSTIN, TEXAS 78712

DDC
RECEIVED
NOV 26 1976
A

DISTRIBUTION STATEMENT A
Approved for public release;
Distribution Unlimited

107 500 bps

TABLE OF CONTENTS

	<u>Page</u>
I. INTRODUCTION	1
II. EXPLANATION OF SHANNON'S THEOREM	3
III. EXPLANATION OF PARAMETERS READ IN FROM DATA CARD	5
IV. EXPLANATION OF PARAMETERS CALCULATED IN PROGRAM RANDOM	8
V. LISTING OF PROGRAM RANDOM	12
VI. FILTER WEIGHTS FOR BPF1 (3 kHz-7 kHz)	19
VII. FILTER WEIGHTS FOR BPF2 (4 kHz-6 kHz)	21
VIII. GRAPHS	23
A. Explanation of Graphs	24
B. Effect of Shannon's Theorem Used with Analog Filtered Data, Illustrated by Graphs	26
1. Using Every Third Point (LP = 3)	27
2. Using Every Fifth Point (LP = 5)	35
C. Effect of Shannon's Theorem with Data Filtered By BPF1 (3 kHz-7 kHz), Illustrated by Graphs	43
1. Using Every Third Point (LP = 3)	44
2. Using Every Fifth Point (LP = 5)	52
D. Effect of Shannon's Theorem with Data Filtered By BPF2 (4 kHz-6 kHz), Illustrated by Graphs	60
1. Using Every Third Point (LP = 3)	61
2. Using Every Fifth Point (LP = 5)	69
IX. COMPARISON OF RELATIVE ERRORS INVOLVING COMBINATIONS OF VARIOUS TYPES OF FILTERS, THE NUMBER OF POINTS USED FROM EACH SIDE FOR CALCULATION, AND THE DIFFERENT VALUES OF LP, ILLUSTRATED BY GRAPHS AND TABLES	77
X. CONCLUSION	82
BIBLIOGRAPHY	84

I.
INTRODUCTION

I. INTRODUCTION

This report is concerned with some of the practical aspects of Shannon's Theorem, i.e., that a band-limited time series is completely determined by its value at equally spaced time intervals, Δt , if $1/2\Delta t$ is greater than the bandwidth. Thus,

$$f(t) = \sum_n f(n\Delta t) h(t - n\Delta t),$$

where $1/2\Delta t > \text{bandwidth of } f$.

Δt

Sum over n of ()

In practice, f is only approximately band limited and the series contains only a finite number of terms. In this report, the effects of bandwidth and truncation of the series are studied.

The programming and other assistance of Miss Cheryl A. Burr are hereby gratefully acknowledged.

II.

EXPLANATION OF SHANNON'S THEOREM

II. EXPLANATION OF SHANNON'S THEOREM

Shannon's Theorem states that if $x(t)$ is a time series with center frequency ω_0 and bandwidth B , then

$$x(t) = \sum x(n\tau) h(t - n\tau) ,$$

where

$$h(t) = \cos \frac{\pi t}{2\tau} (2m - 1) \frac{\sin \frac{\pi t}{2\tau}}{\frac{\pi t}{2\tau}} ,$$

with

$$\tau \leq \frac{1}{2B} ,$$

$$\omega_0 = (2m - 1) \frac{B}{2} .$$

The parameters of PROGRAM RANDOM that occur above are as follows:

T = t
N = n
TAU = τ
PI = π
M = m . . .

It is evident from the form of the function f that the heaviest contributors to the sum will be those for which $n\tau$ is near t . This observation is employed in this study in that the series is always evaluated only for those n such that $t - n\tau$ is small. Thus, the values of $f(n\tau)$ used are those with $n\tau$ in an approximately symmetric interval about t .

III.

EXPLANATION OF PARAMETERS READ IN FROM DATA CARD

III. EXPLANATION OF PARAMETERS READ IN FROM DATA CARD

- A. NN - used to indicate which plotting routines are to be used. If $NN = 1$, only the calculated graph will be plotted. If $NN = 0$, both the original graph and the calculated graph will be plotted.
- B. NOY - the "number of Y's", or number of data points used. In PROGRAM RANDOM using Magnetic Tape 138, $NOY = 3000$.
- C. LP - the division factor used to calculate or reconstruct the data curve. When $LP = 3$, every third point of the data is used to reconstruct the curve. When $LP = 5$, every fifth point is used.
- D. ITT - the size of the data block used to reconstruct the data points. $ITT/2$ is the number of points taken on each side of the reconstructed point used for calculation. ITT has been equal to 10, 20, 30, 40, 100, and 200.
- E. LSUM - the number of data points to be reconstructed. LSUM may be any integer less than or equal to NOY. It is usually set at 40.
- F. M - an integer for which the band-limited signal is between $(M - 1) \cdot W$ and $M \cdot W$ Hz. When $LP = 3$, $M = 2$. When $LP = 5$, $M = 3$.
- G. DELTA - the number of seconds between each data point. $DELTA = 0.00005$.
- H. NNA - the first point of the data block to be reconstructed. Here $NNA = 1330$. When the data are unfiltered (analog filtered) the parameter NA is set equal to NNA. When the data are filtered, NA is set equal to $NNA - (FPL - 1)/2$ since the filtered data are moved over to the left by the number of the filter weights divided by 2.

- I. NNZ - the last point of the data block to be reconstructed. $NNZ = 1370$ when $LP = 5$. $NNZ = 1372$ when $LP = 3$ for purposes of division. When the data are unfiltered (analog filtered), the parameter NZ is set equal to NNZ. When the data are filtered, NZ is set equal to $NNZ - (FPL - 1)/2$ since the filtered data are moved over to the left by the number of the filter weights divided by 2.
- J. FPL - the number of filter weights used. In these programs, BPF1 (Band-pass Filter 1, 3 kHz-7 kHz) and BPF2 (Band-pass, Filter 2, 4 kHz-6 kHz) both have 201 filter weights.

IV.

EXPLANATION OF PARAMETERS CALCULATED IN PROGRAM RANDOM

IV. EXPLANATION OF PARAMETERS CALCULATED IN PROGRAM RANDOM

The following parameters are in the order in which they are calculated in PROGRAM RANDOM.

- A. ND - number of data points used from tape.
- B. TAU - self-explanatory; with varying data the parameter TAU equals the division factor (LP) multiplied by DELTA.
- C. NA - (see Chap. III, H.).
- D. NZ - (see Chap. III, I.).
- E. S Array - Y is an integer array and must be converted to real and stored in the array S for use in SUBROUTINE FILTER.
- F. XT Array - for saving storage space.
- G. N - the number of weights put in as data. These must have a mirror image made in order to get the total array of weights.
- H. NP1 - Since there are N weights read in, their subscripts will range from 1 to NP1 (or $N + 1$).
- I. NPMP1 - the total number in the array of weights after having been mirror-imaged.
- J. W Array - the weights.
- K. NOX - the number of points in the array to be used for calculation which equals the total number of points divided by the division factor LP.

- L. Z Array - the array consisting of every third point ($LP = 3$) or every fifth point ($LP = 5$) of the original data. The Z array is used for calculating the complete array.
- M. T - the time (equals $I \cdot \Delta$).
- N. R - parameter that gives the subscript of the element in the Z array making that element equivalent to the corresponding element in the Y array.
- O. LSTART - the subscript of the initial element used in the Z array in scanning ITT number of points for calculating one point. In this scanning the subscripts range from LSTART to LSTOP.
- P. LSTOP - (see O.).
- Q. ZMEAN - the mean that is to be subtracted from every point in the Z array.
- R. TAR - taken directly from the formula (see Chap. II.).
- S. A - taken directly from the formula (see Chap. II.).
- T. B - taken directly from the formula (see Chap. II.).
- U. C - taken directly from the formula (see Chap. II.).
- V. S Array - the newly calculated array.
- W. N1 - the sup error, i.e., the greatest deviation between any two corresponding points in the original array and the calculated array.

- X. RMS - the rms error, i.e., the average deviation over all the points from the original data to the calculated data.
- Y. O Array - the original array to be used for plotting.
- Z. C Array - the calculated array to be used for plotting.
- AA. X Array - the value of the subscripts I, $I = 1$ through ND, to be used for plotting both against the O array and the C array.

V.

LISTING OF PROGRAM RANDOM

3200 FORTRAN (2.1) 27/09/66

```

PROGRAM RANDOM
DIMENSION Y(3000)
COMMON XT(3000),W(200),XX(400)
COMMON
  X(43),S(3000),K(41),O(43),MI(41),MABS(4),Z(1000)
  1),Z7(1000),C(43),IC(43),SUPN(11),PRMSN(11),RMSN(11),TP(28)
INTEGER Y
INTEGER FPL,TP
EQUIVALENCE (Y,XT)
ND=3000
NDX= 0
DO 4 I=1,13
  BUFFER IN (3,1)(Y(1),Y(2))
4 CONTINUE
51 HUFFER IN (3,1)(Y(1),Y(ND))
10 GO TO (10,123,13,13)UNLISIF(3)
13 BACKSPACE 3
NDX= NDX + 1
IF (NDX.EQ. 5)14,5)
14 PRINT 15
15 FORMAT(22H PARITY ERROR ON LUN 3)
60 TO 42
123 READ 3,NN,NOY,LP,ITT,LSUM,M,DELTA,NNA,NNZ,FPL
3 FORMAT (12,2X15,4(3X15), 3XF11.7, 3(X15))
PRINT 3,NN,NOY,LP,ITT,LSUM,M,DELTA,NNA,NNZ,FPL
PRINT 2222,LP,NNA,NNZ
2222 FORMAT (26H RANDOM CURVE USING EVERY ,12,23H POINTS BETWEEN POINTS
  1 ,15,5H AND,15,47H FOR CALCULATION, FILIERED WITH BPFL, 3KC - 7KC)
TAU=LP*DELTA
NA=NNA-(FPL-1)/2
NZ=NNZ-(FPL-1)/2
DO 5555 I=1,ND
5555 S(I)=Y(I)
DO 5556 I=1,ND
5556 XT(I)=S(I)
N=100
NP1=N+1
NPMPI=NP1+N
READ 8888, (W(I),I=1,NP1)
8888 FORMAT (8(F10.5))
CALL FILTER (ND,NP1,MN)
PRINT 59

```

59 FORMAT(15H ORIGINAL Y(I))

DO 6666 I=1,ND

6666 S(I)=XT(I)

DO 6667 I=1,ND

6667 Y(I)=S(I)

DO 57 I=1,ND

IF(I.GE.NA.AND).I.LE.NZ) 61,57

61 PRINT 58,Y(I)

58 FORMAT(3X11)

57 CONTINUE

DO 64 I=NA,NZ

II=I-NA+1

K(II)= Y(I)

64 CONTINUE

NSTART = NOY/2

NOX = NOY/LP

NFF = NSTART + LP*NOX/2

IFF = 2*NSTART - NFF

DO 2 I=1,NOX

JFF = IFF + LP*I

Z(I) = Y(JFF)

2 CONTINUE

DO 150 I = 1,ND

Y(I) = 0

150 CONTINUE

PI = 3.141592654

DO 20 I=NA,NZ

T = I * DELTA

S(I) = 0

R=T/LP

LSTART=R-ITT/2+.001

LSTOP=R+ITT/2+.001

SM=0.0

DO 997 NO=LSTART,LSTOP

997 SM=SM+Z(NO)

ZMEAN=SM/(LSTOP-LSTART+1)

IF (LSTOP.GT.NOX) R5,H4

R5 LSTOP = NOX

R4 DO 19 N=LSTART,LSTOP

ZZ(N)=Z(N)-ZMEAN

TAR = T - (N * TAU)

IF (TAR .EQ. 0)47,48

47 A = 1


```

      H = 1
      GO TO 52
      48 A = (2 * TAU)/(PT * IAR)
      H = SIN((PT * IAR)/(2 * TAU))
      52 C = COS((PT * (I2 * M) - 1) * IAR * (1/(2 * TAU)))
      S(I)=S(I)+Z(N)*A*B*C
      19 CONTINUE
      Y(I) = S(I)
      PRINT 6, I, Y(I)
      6 FORMAT(20X4H X(F10.7,6H) = ,I10)
      20 CONTINUE
      MSUM = 0
      N1 = 0
      DO 62 I=NA,NZ
      II=I-NA+1
      MI(II)=ABS(Y(I) - K(II))
      MSUM = MSUM + (MI(II) ** 2)
      IF (MI(II) .GT. N1) 74,62
      74 N1 = MI(II)
      62 CONTINUE
      PRINT 65, N1
      15 65 FORMAT(/20X.13H SUPNORM = ,I10)
      SUM = MSUM
      RMS = SQRTF (SUM/(NZ-NA+1))
      PRINT 66, RMS
      66 FORMAT(20X.13H RMSNORM = ,F10.4)
      M=LP/2
      MM=M+1
      DO 222 L=1,MM
      SUPN(L)=0
      222 PRMSN(L)=0
      DO 11 I=NA,NZ
      II=I-NA+1
      J=(I+M)/LP
      L=ABS (LP*J-1)+1
      P=ABS (Y(I) - K(II))
      IF (P.GT.SUPN(L)) 110,11
      110 SUPN(L)=P
      11 PRMSN(L)=PRMSN(I) + P**2
      DO 420 L=1,MM
      NP = ((NZ-NA)/LP) * 2
      IF (L.EQ.MM.AND.2 * (L-1).GT.(LP-1).OR.L.F0.1) 589,420
      589 NP=(NZ-NA)/LP

```



```

420 RMSN(L) = SQRTF (PMSN(L)/NP)
DO 669 L=1,MM
  IF 15.12)
669 PRINT 68,L,SUPN(L),L,RMSN(L)
DO 69 I=NA,NZ
  II=I-NA+1
  O(II) = K(II)
  C(II) = Y(I)
  X(II)=I
69 CONTINUE
CALL PLOT(5.0,-12.0,-3)
CALL PLOT(0.0,1.5,-3)
IX = 4H I
IO = 4HO(I)
IF (NN.GT.0) 355,356
356 CONTINUE
X(42) = NA
X(43) = 5.0
O(42)=-240.0
O(43)=60.0
CALL AXIS(0.0, 0.0,10.4,8.0,90.0,0(42),0(43),0.1,1.0,1)
CALL AXIS(0.0,4.0,IX,-4.0,8.0,0.0,X(42),X(43),0.1,1.0,1)
CALL LINE(X,0,41,1,1,4,0.08,1,0.0)
CALL PLOT(12.0,0.0,-3)
355 CONTINUE
X(42) = NA
X(43) = 5.0
C(42)=-240.0
C(43)=60.0
ICT=4HC(I)
CALL AXIS (0.0, 0.0,ICT,4.8,0,90.0,C(42),C(43),0.1,1.0,1)
CALL AXIS(0.0,4.0,IX,-4.0,8.0,0.0,X(42),X(43),0.1,1.0,1)
CALL LINE(X,C,41,1,1,4,0.08,1,0.0)
  CALL LINE (X,C,41,1,-LP,1,0.08,1,0.0)
IC(1)=4HNO.
IC(2)=4HOF P
IC(3)=4HOINT
IC(4)=4HS FR
IC(5)=4HOM F
IC(6)=4HACH
IC(7)=4HSHDE
IC(8)=4H USE

```

```

IC(9)=4MD FO
IC(10)=4HR CA
IC(11)=4HLCIL
IC(12)=4HATIO
IC(13)=4HN -
CALL SYMROL (.5, 0.0,.14,IC(1),0.0,52)
FPN=IIT/2
CALL NUMBER (7.0, 0.0,.14,FPN,0.0,-1)
TP(1)=4HFILT
TP(2)=4HFERD
TP(3)=4HBY
TP(4)=4HBPFI
TP(5)=4H (3K
TP(6)=4HC -
TP(7)=4H7KC)
CALL SYMROL (2.5,-0.5,.14,TP(1),0.0,2A)
NDX=0
36 BUFFER OUT (4,1)(Y(1),Y(ND))
31 GO TO (31,32,34,34)UNITSTF(4)
34 BACKSPACE 4
NDX= NDX + 1
IF (NDX .EQ. 5) 26,36
32 NDX= 0
33 BUFFER OUT (4,1)(Z(1),Z(NDX))
41 GO TO (41,42,44,44)UNITSTF(4)
44 BACKSPACE 4
NDX= NDX + 1
IF (NDX .EQ. 5) 26,33
26 PRINT 27
27 FORMAT(2PH PARITY ERROR ON LUN 4)
42 CONTINUE
END

```

3200 FORTRAN DIAGNOSTIC RESULTS - FOR RANDOM

NO ERRORS

27/09/66

(2.1)

3200 FORTRAN

SUBROUTINE FILTER (N,MX,MN)

COMMON YT(3000),H(200),XX(400)

MN = 2*MX - 1

JAX = 0 \$NOX = MX \$XX(MX) = H(1) \$NOP = 1

MMX=MX+1

DO 1 I=MMX,MN

 NOP = NOP + 1

 XX(I) = -1(NOP)

 NOX = NOX - 1

1 XX(NOX) = H(NOP)

 NCHECK = N - 2*(MX - 1)

 K = MN - 1 \$ KP = 0

6 K = K + 1

 IF(N.GT.K - 1) 4,5

4 JAX = JAX + 1

 NOR = 0 \$ SUM=0

 KP = KP + 1

 DO 3 KX=KP,MO

 NOR = NOR + 1

3 SUM=SUM+YT(KX)*XX(NOR)

 YT(JAX)=SUM

GO TO 6

5 CONTINUE

END

VI.

FILTER WEIGHTS FOR BPF1 (3 kHz-7 kHz)

FILTER WEIGHTS FOR HAND-PASS FILTER 1 (3KC-7KC)

.30001	0	-0.25331	0	.14161	0	-0.02815	0
-0.04540	0	.04053	0	-0.01573	0	-0.00517	0
.00585	0	-0.00313	0	0	0	-0.00209	0
.00393	0	-0.00150	0	-0.00289	0	.00450	0
-0.00221	0	-0.00088	0	.00175	0	-0.00070	0
0	0	-0.00057	0	.00117	0	-0.00048	0
-0.00098	0	.00162	0	-0.00084	0	-0.00035	0
.00072	0	-0.00030	0	0	0	-0.00026	0
.00055	0	-0.00023	0	-0.00049	0	.00083	0
-0.00044	0	-0.00019	0	.00039	0	-0.00017	0
0	0	-0.00015	0	.00032	0	-0.00014	0
-0.00025	0	.00050	0	-0.00027	0	-0.00011	0
.00025	0	-0.00011	0	0	0		

VII.

FILTER WEIGHTS FOR BPF2 (4 kHz-6 kHz)

FILTER WEIGHTS FOR BAND-PASS FILTER 2 (4KC-6KC)

.1494	0	-0.14597	0	.14779	0	-0.09561	0
.04246	0	0	0	-0.02495	0	.03174	0
-0.02504	0	.01216	0	0	0	-0.00719	0
.00859	0	-0.00606	0	.00244	0	0	0
-0.00049	0	-0.00035	0	.00123	0	-0.00117	0
0	0	.00164	0	-0.00280	0	.00282	0
-0.00169	0	0	0	.00144	0	-0.00205	0
.00173	0	-0.00086	0	0	0	.00044	0
-0.00039	0	.00009	0	.00011	0	0	0
-0.00037	0	.00075	0	-0.00086	0	.00057	0
0	0	-0.00059	0	.00091	0	-0.00084	0
.00046	0	0	0	-0.00032	0	.00039	0
-0.00026	0	.00008	0	0	0	0	0

VIII.
GRAPHS

VIII.

A. Explanation of Graphs

VIII. A. EXPLANATION OF GRAPHS

The graphs bound within the text of this report are reproduced data calculated using Shannon's Theorem. In an envelope at the back of the report are three transparencies. The first of these shows the original data, which has been analog band-pass filtered (4-6 kHz) and digitized at 20 kHz. The graphs of Chapter VIII, B. are attempts at reproducing these data. As is easily seen from overlaying the graphs and from the peak and rms errors, these reproductions are not very accurate. The second and third transparencies and the graphs of Chapter VIII, C. and VIII, D. are the results of digitally filtering the data on the first transparency, using band-pass filters BPF1 and BPF2 respectively, and then applying Shannon's Theorem.


Data from outside the displayed interval were used in the calculations when necessary.

VIII.

- B. Effect of Shannon's Theorem Used with
Analog Filtered Data, Illustrated by Graphs

VIII.

B. 1. Using Every Third Point ($LP = 3$)

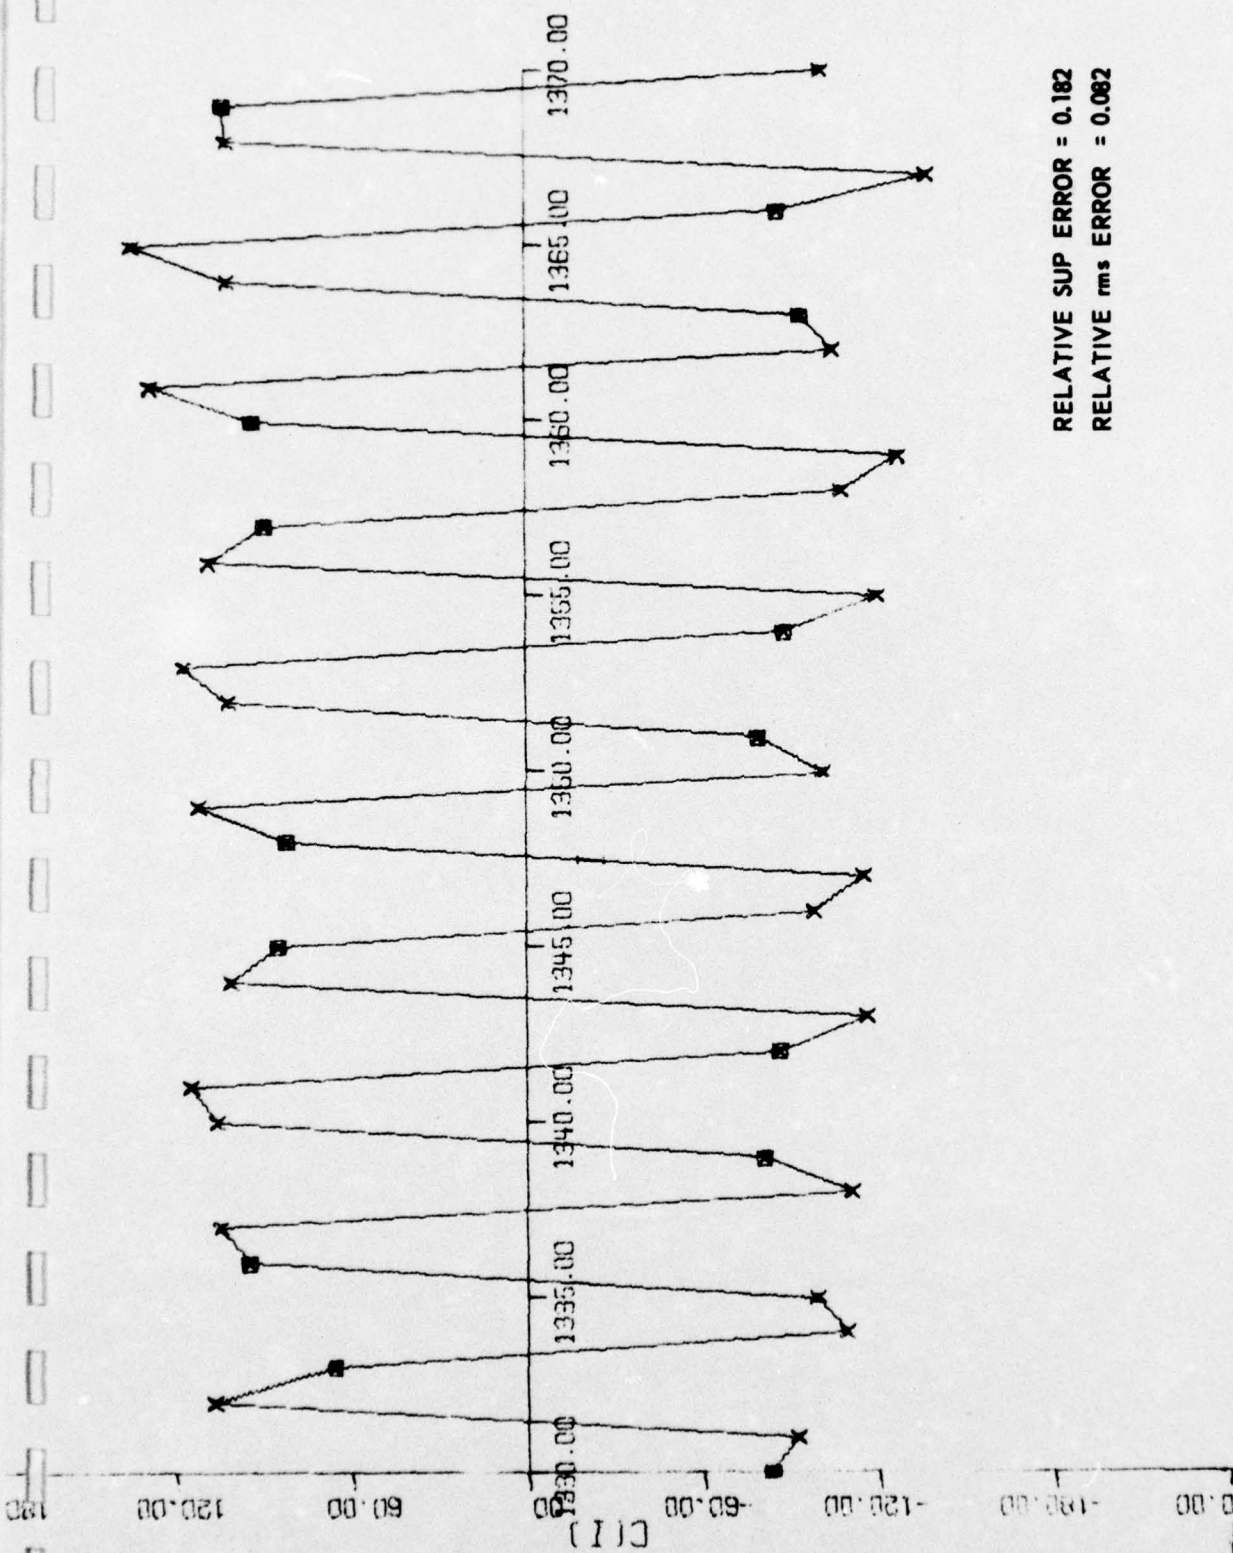


RELATIVE SUP ERROR = 0.182
 RELATIVE rms ERROR = 0.082

REPRODUCED WAVEFORM WITH No. OF POINTS FROM EACH SIDE USED FOR CALCULATION - 3
 ANALOG FILTERED


DRL . UT
 DWG AS-67-644
 GSI . EJW
 4 - 20 - 67

RELATIVE SUP ERROR = 0.165
RELATIVE rms ERROR = 0.078

REPRODUCED WAVEFORM WITH No. OF POINTS FROM EACH SIDE USED FOR CALCULATION - 5
ANALOG FILTERED

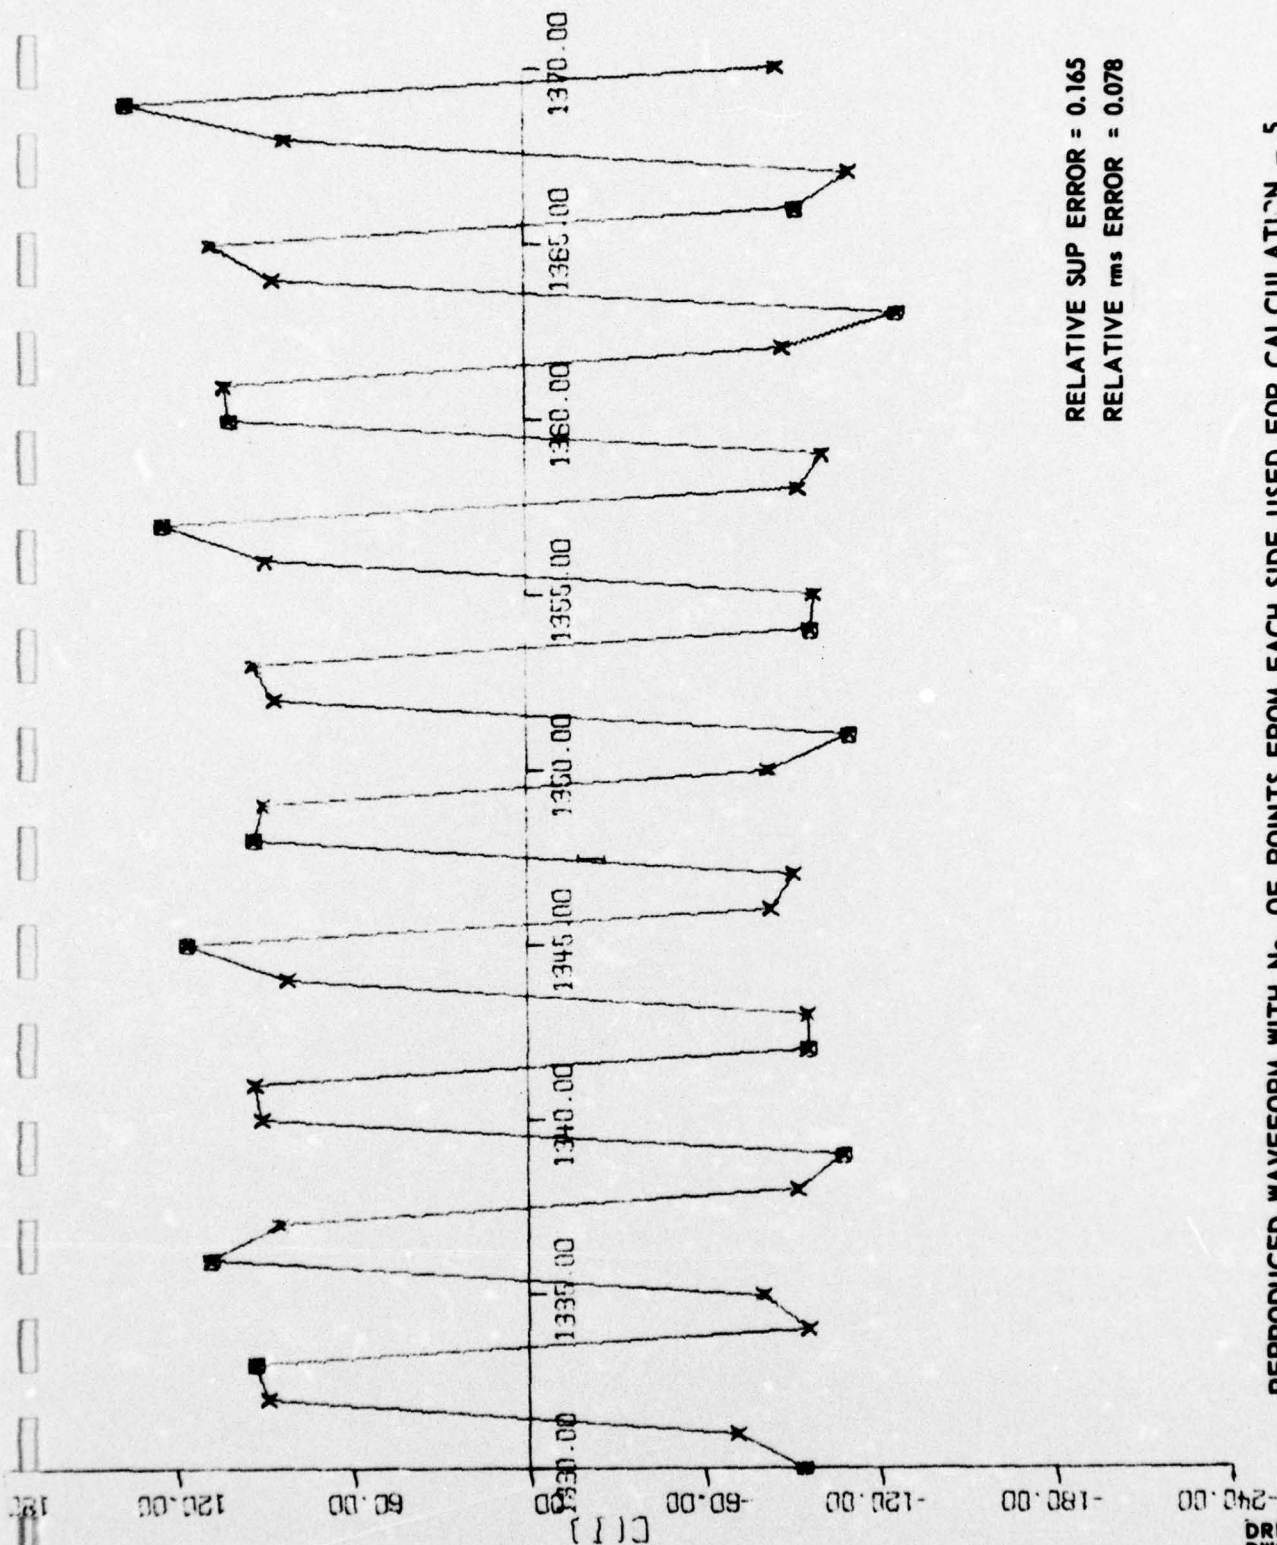


DRL . UT
DWG AS-67-645
GSI . EJW
6 - 20 - 67

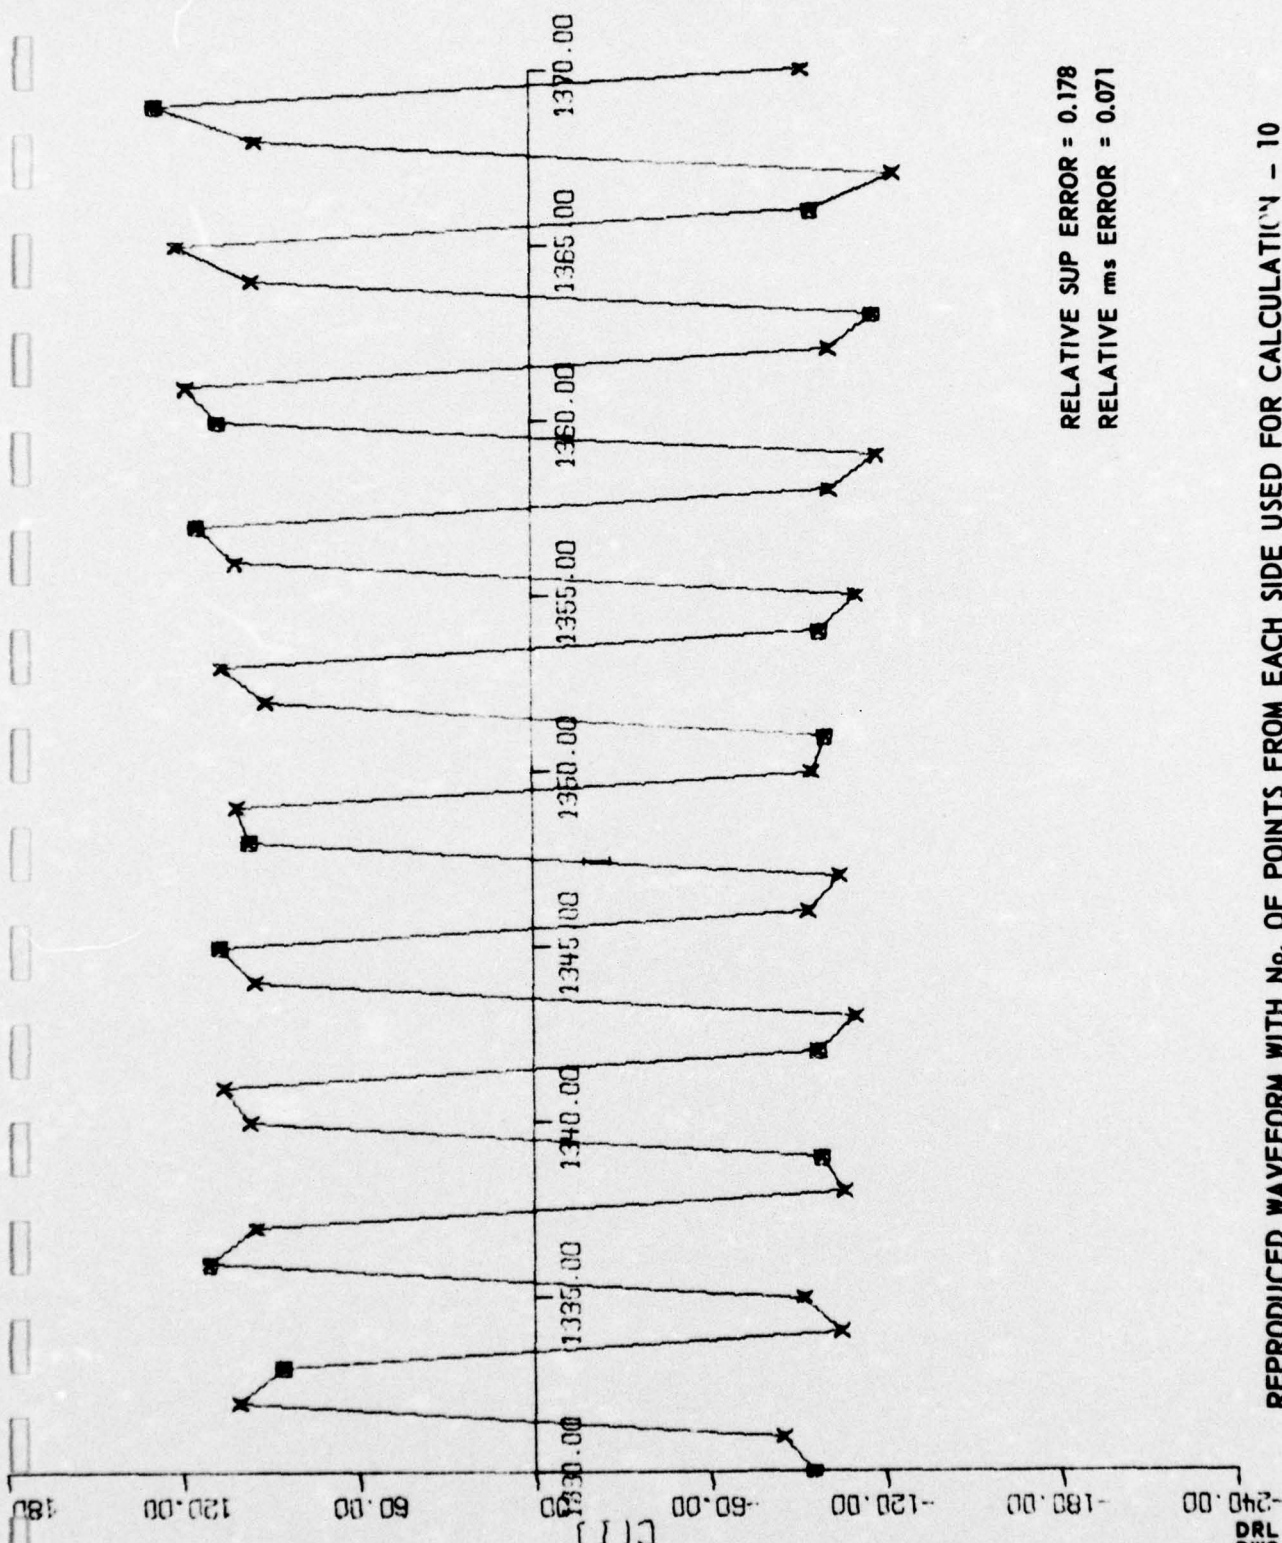

RELATIVE SUP ERROR = 0.178
 RELATIVE rms ERROR = 0.071

REPRODUCED WAVEFORM WITH No. OF POINTS FROM EACH SIDE USED FOR CALCULATION - 10
 ANALOG FILTERED


DRL . . . UT
 DWG AS-67-646
 GSI . . . EJW
 6 - 20 - 67

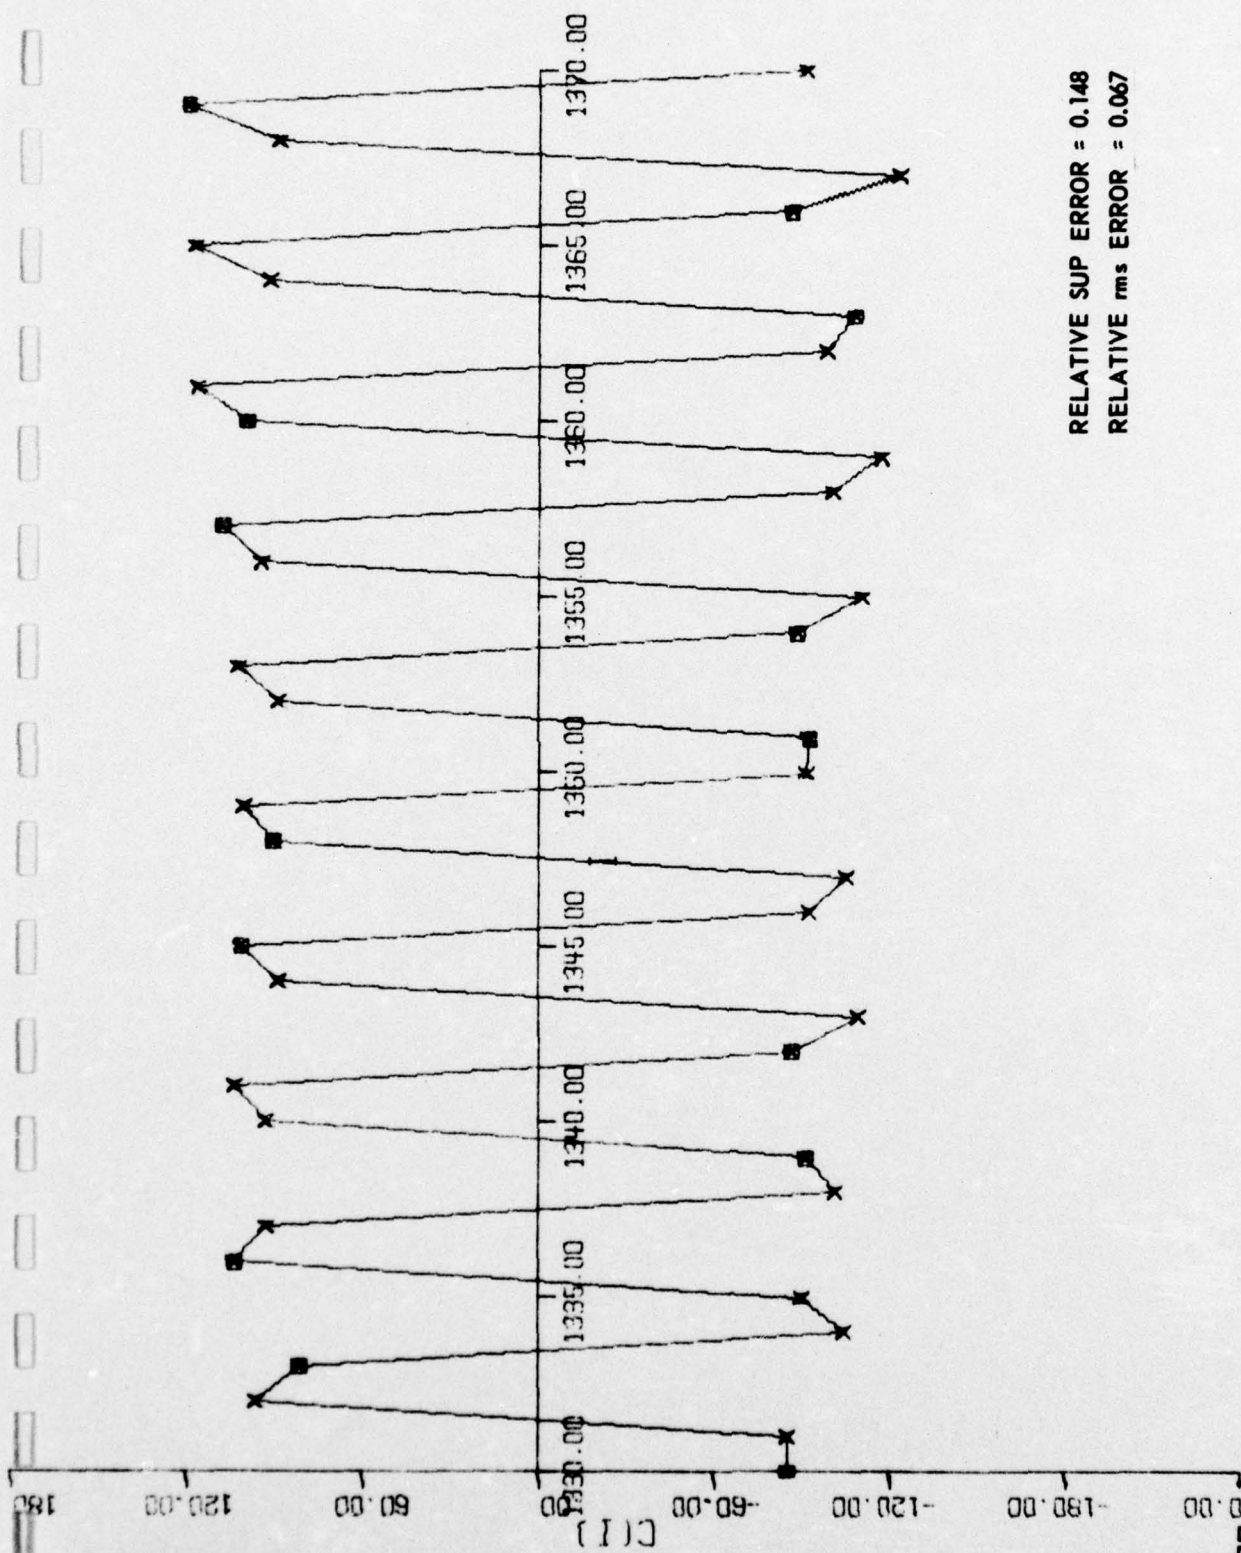

RELATIVE SUP ERROR = 0.148
RELATIVE rms ERROR = 0.067

REPRODUCED WAVEFORM WITH No. OF POINTS FROM EACH SIDE USED FOR CALCULATION - 15
ANALOG FILTERED

DRL - UT
DWG AS-67-647
GSI - EJW
6 - 20 - 67

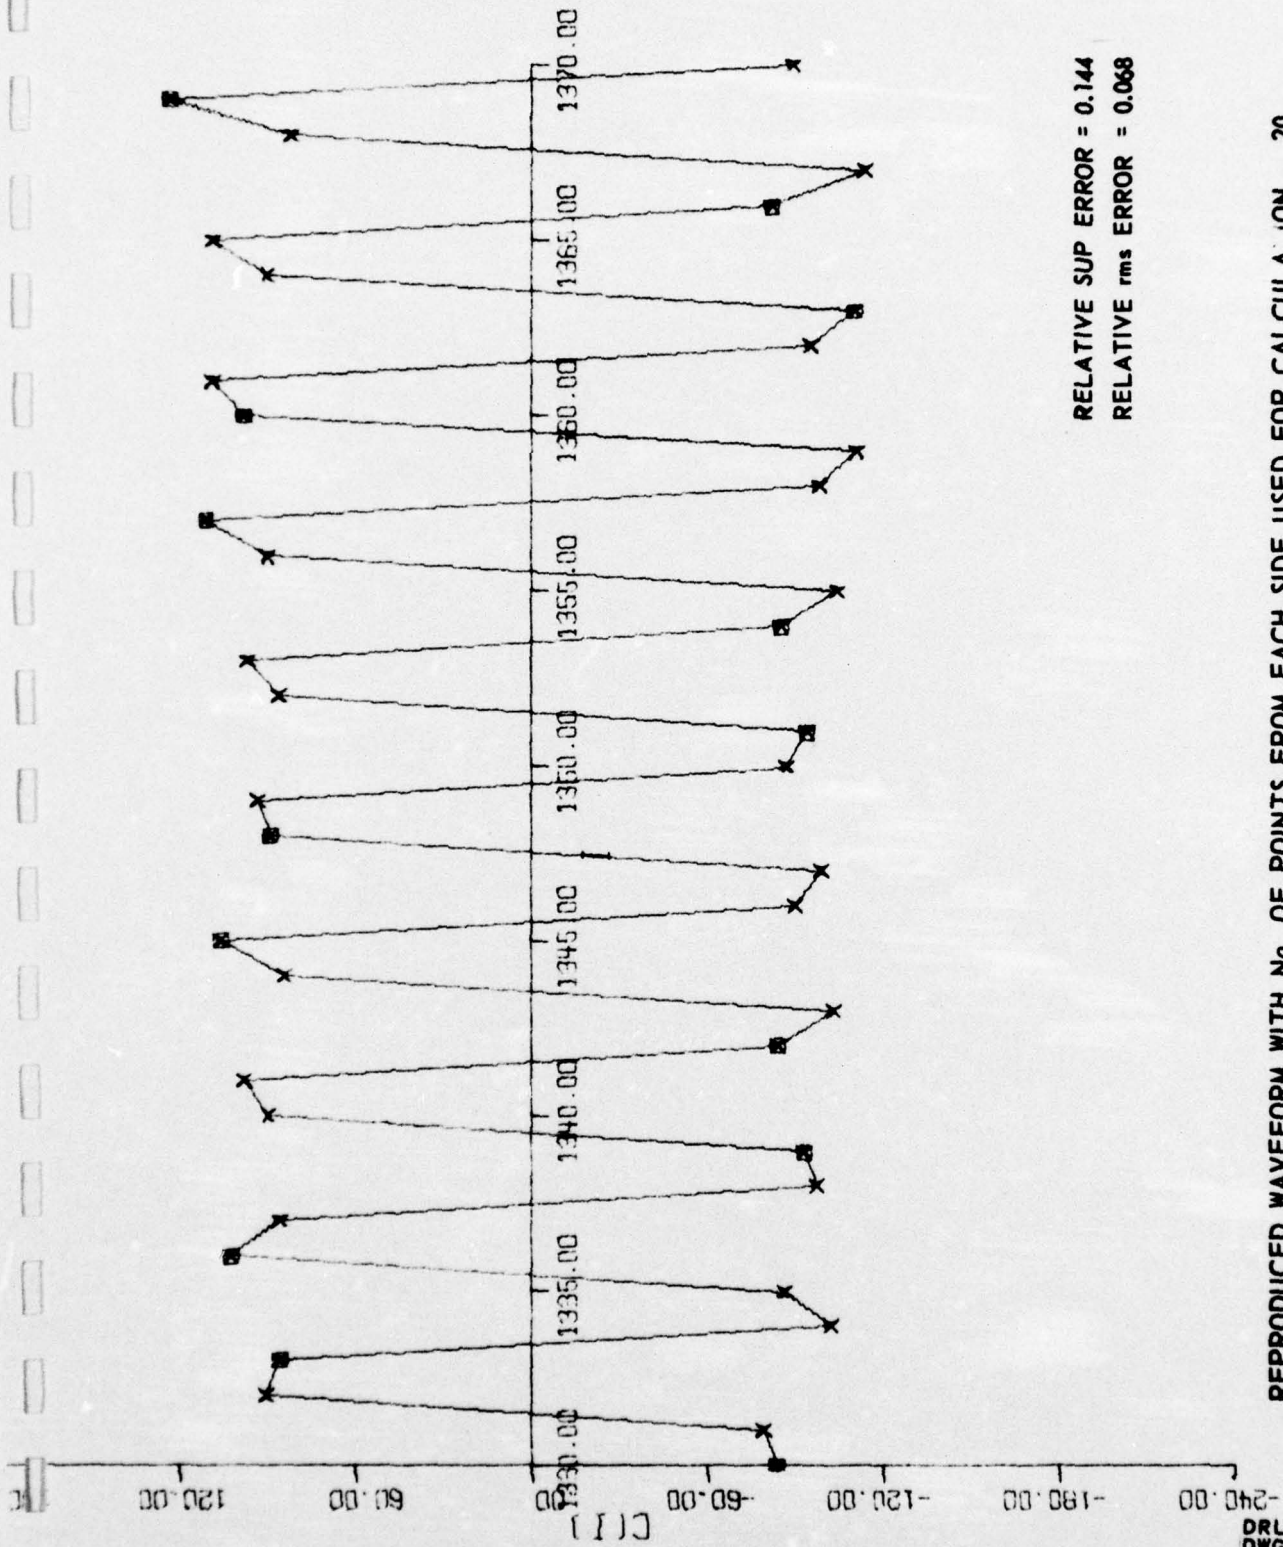


RELATIVE SUP ERROR = 0.144
RELATIVE _{rms} ERROR = 0.068


REPRODUCED WAVEFORM WITH NO. OF POINTS FROM EACH SIDE USED FOR CALCULATION - 20
ANALOG FILTERED

DRL . . . UT
DWG AS-67-648
GSI . . . EJW
6 - 20 - 67

RELATIVE SUP ERROR = 0.182
RELATIVE rms ERROR = 0.077

REPRODUCED WAVEFORM WITH No. OF POINTS FROM EACH SIDE USED FOR CALCULATION - 100
ANALOG FILTERED

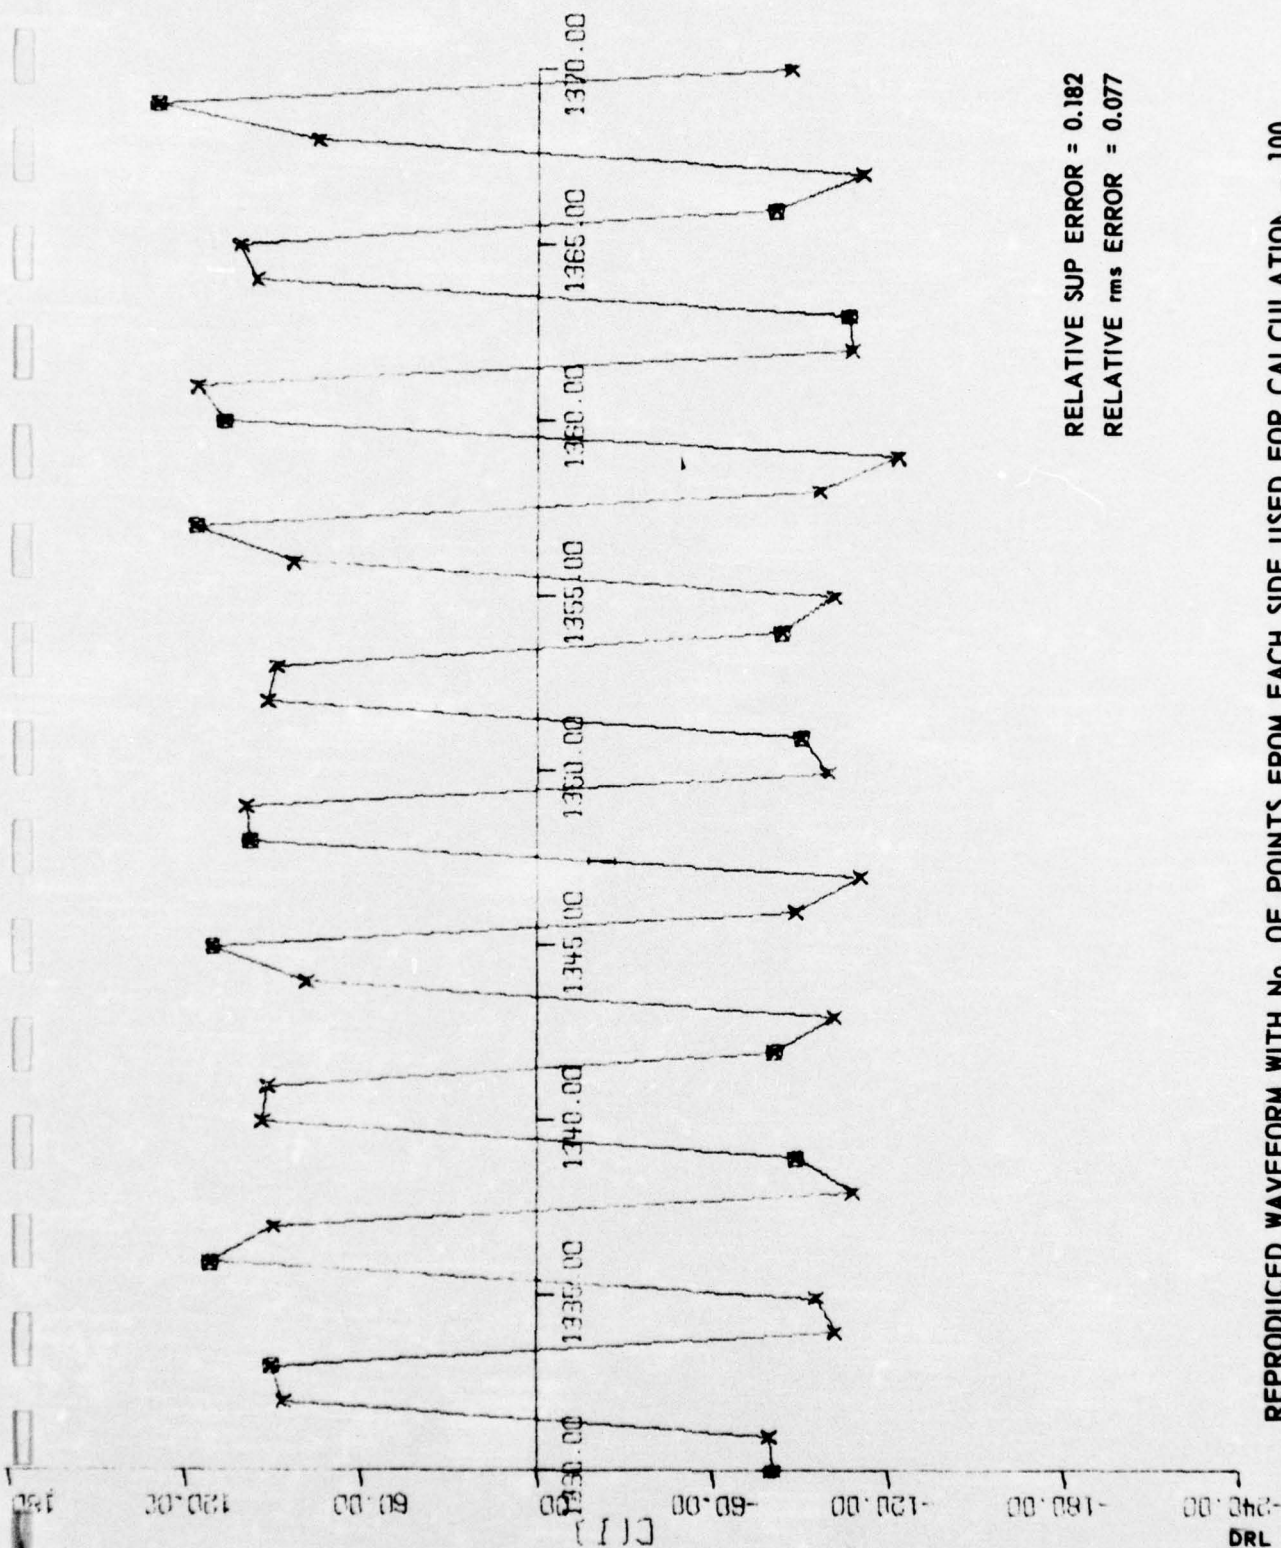


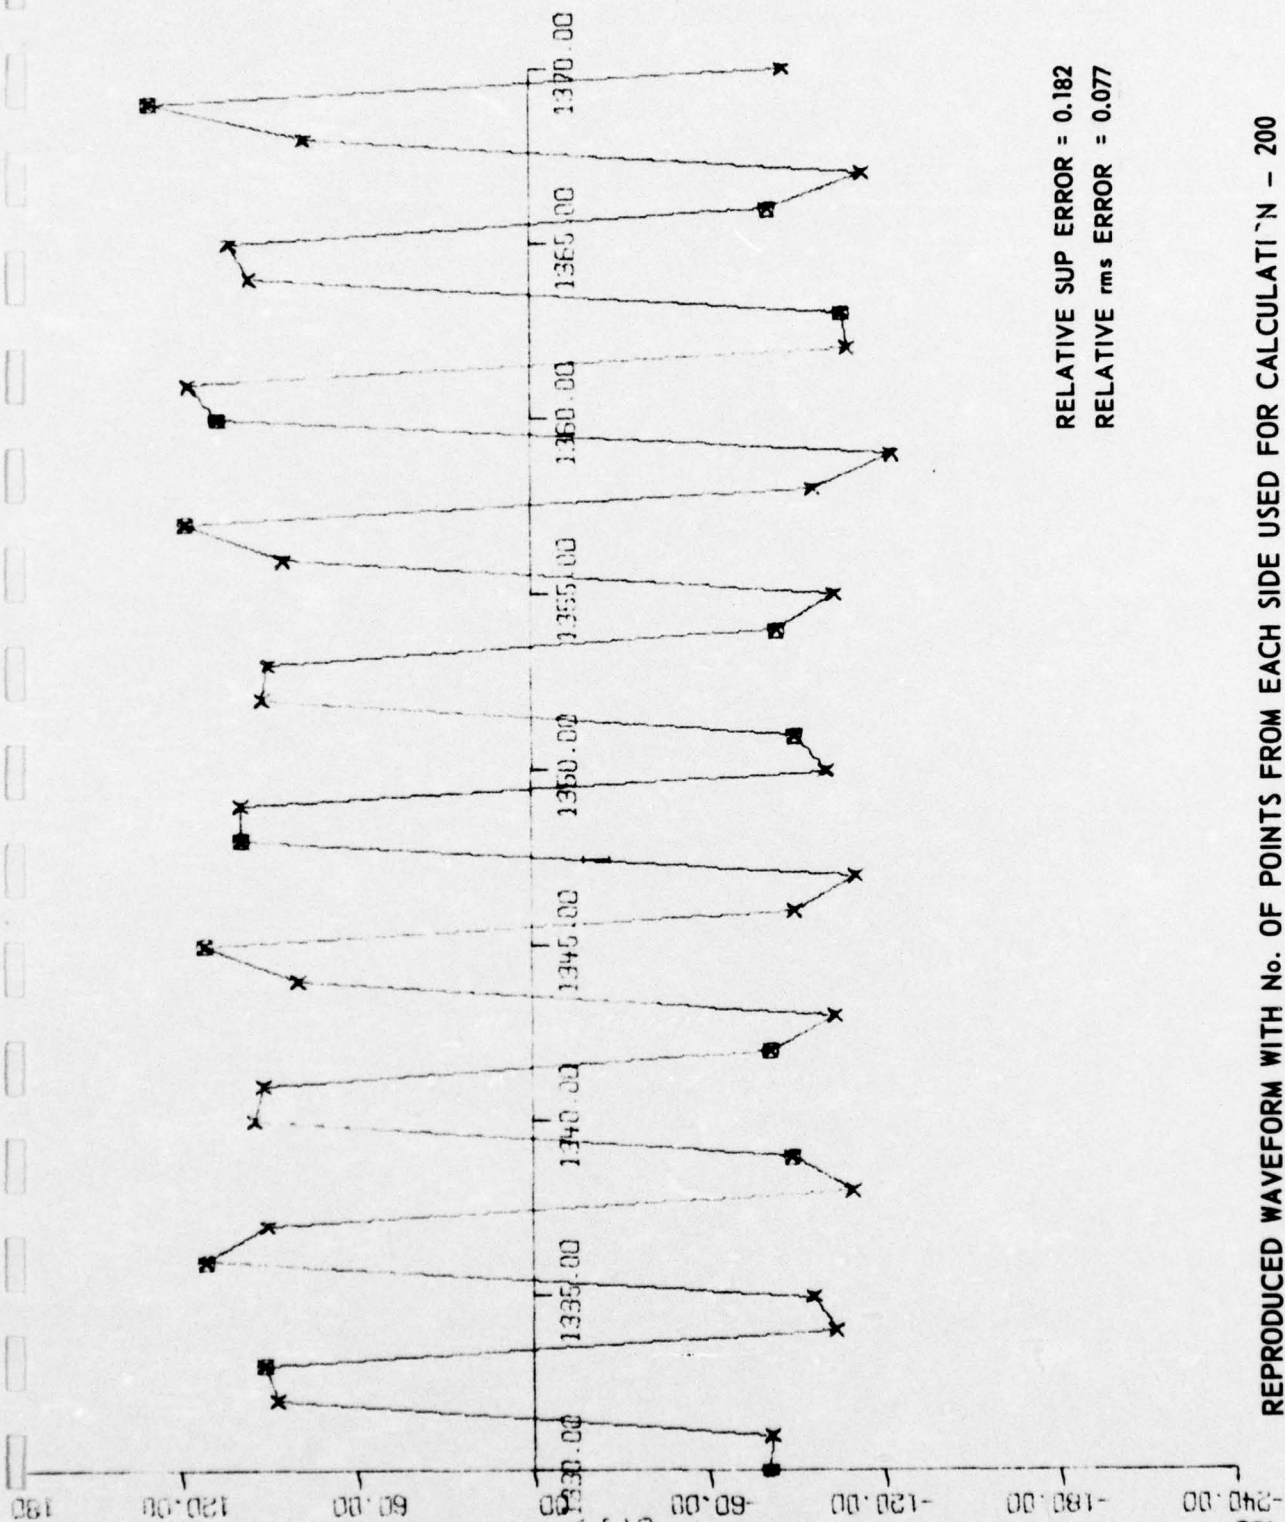



DRL - UT
DWG AS-67-650
GSI - EJW
6 - 20 - 67

VIII.

B. 2. Using Every Fifth Point (LP = 5)

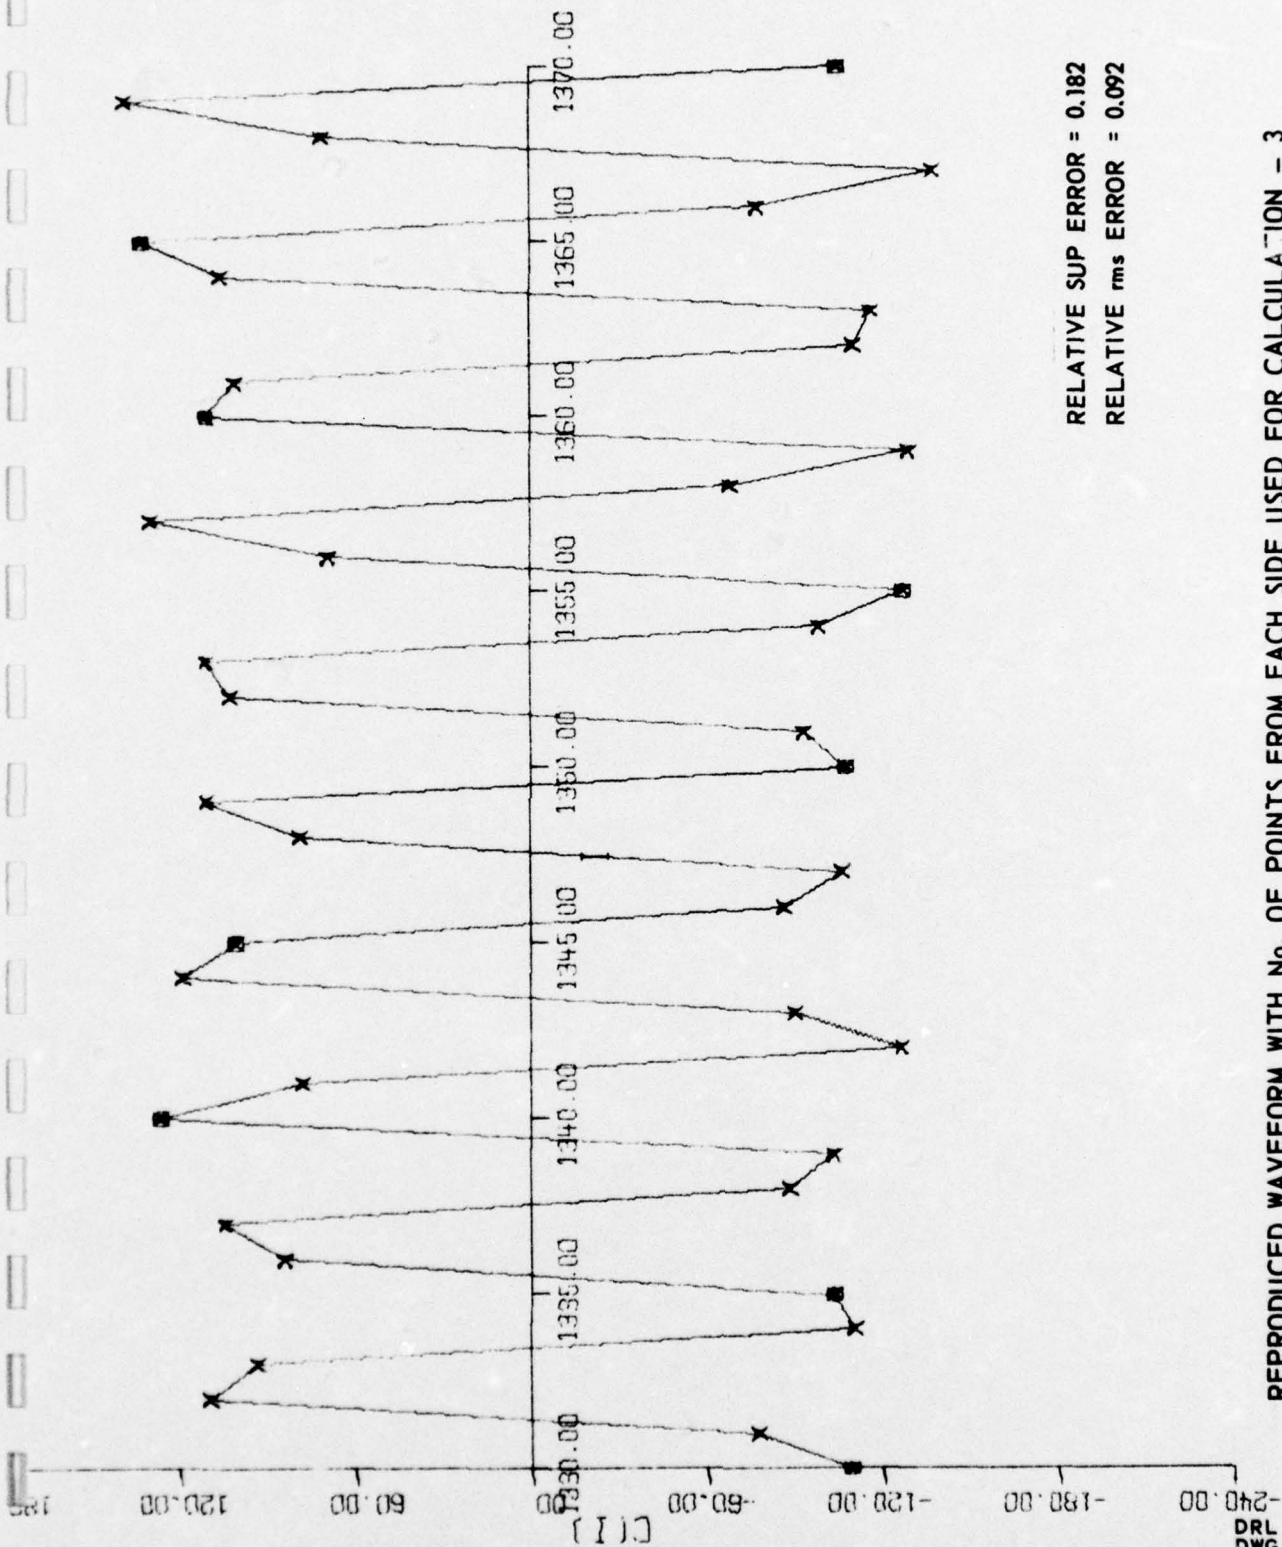

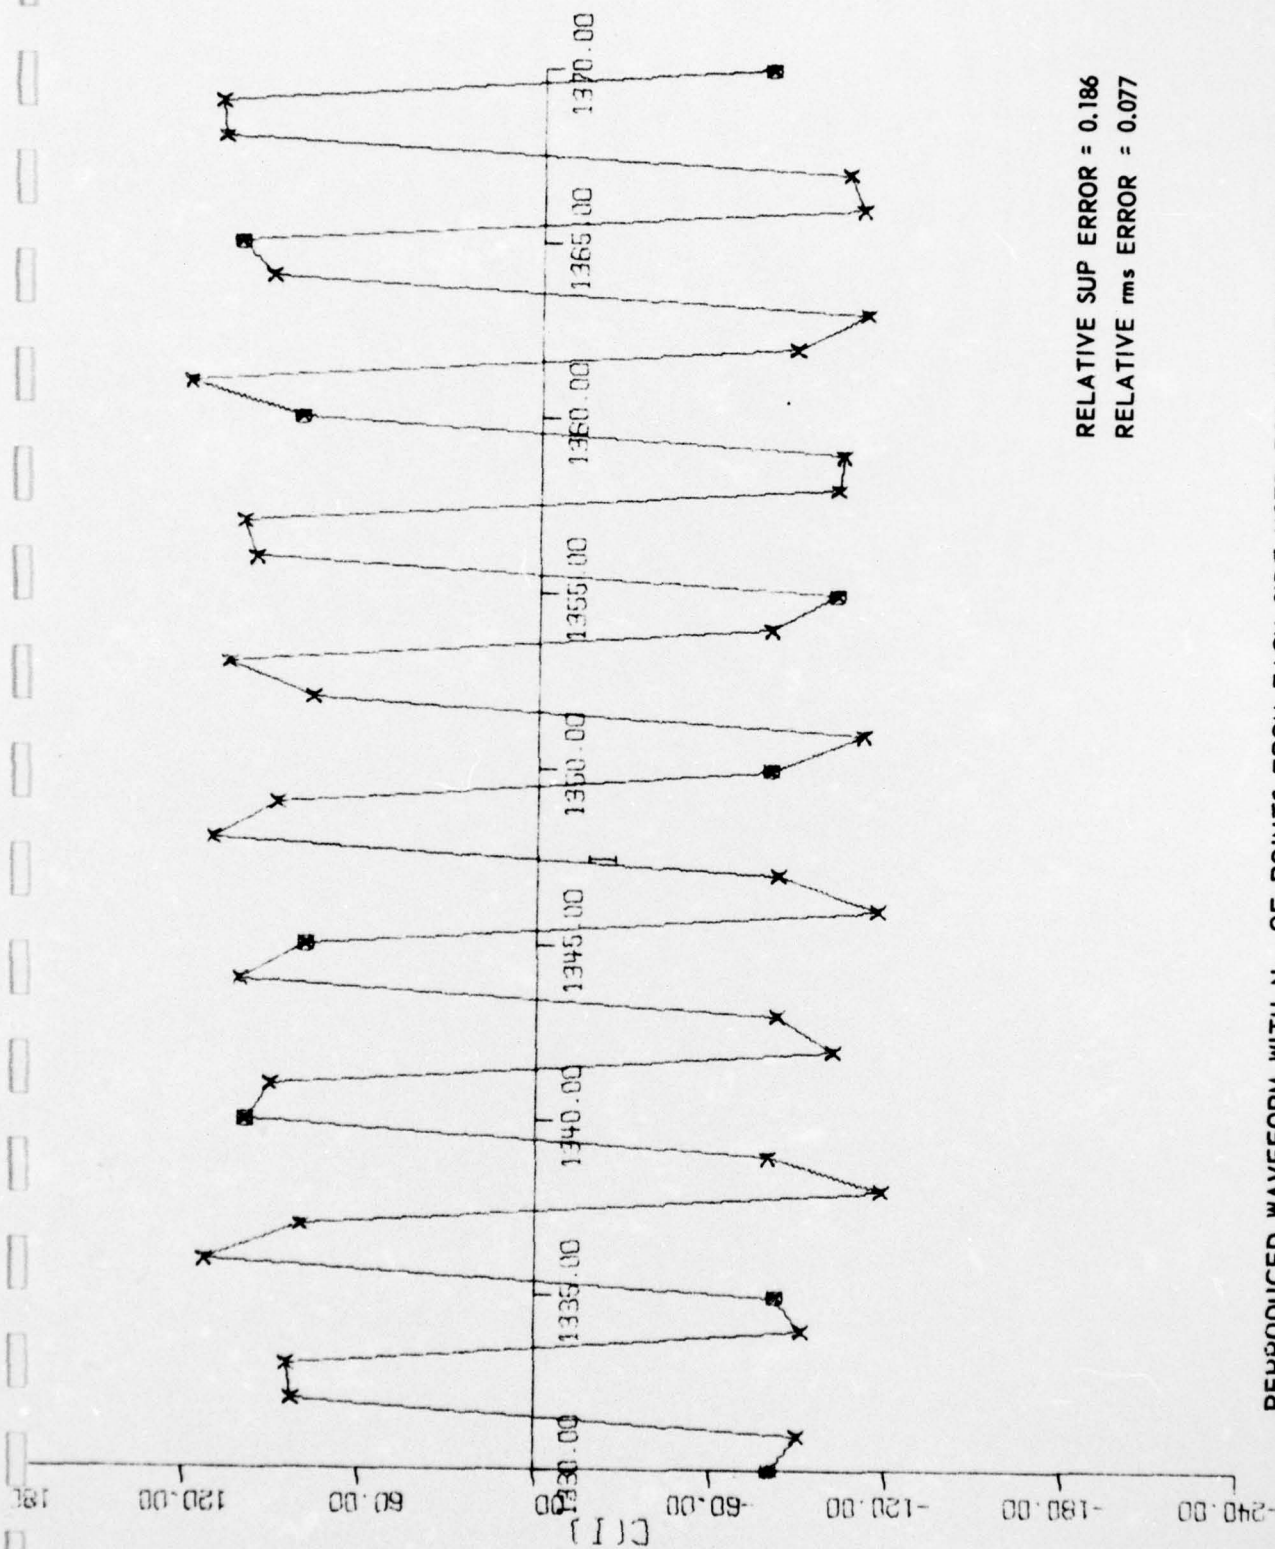


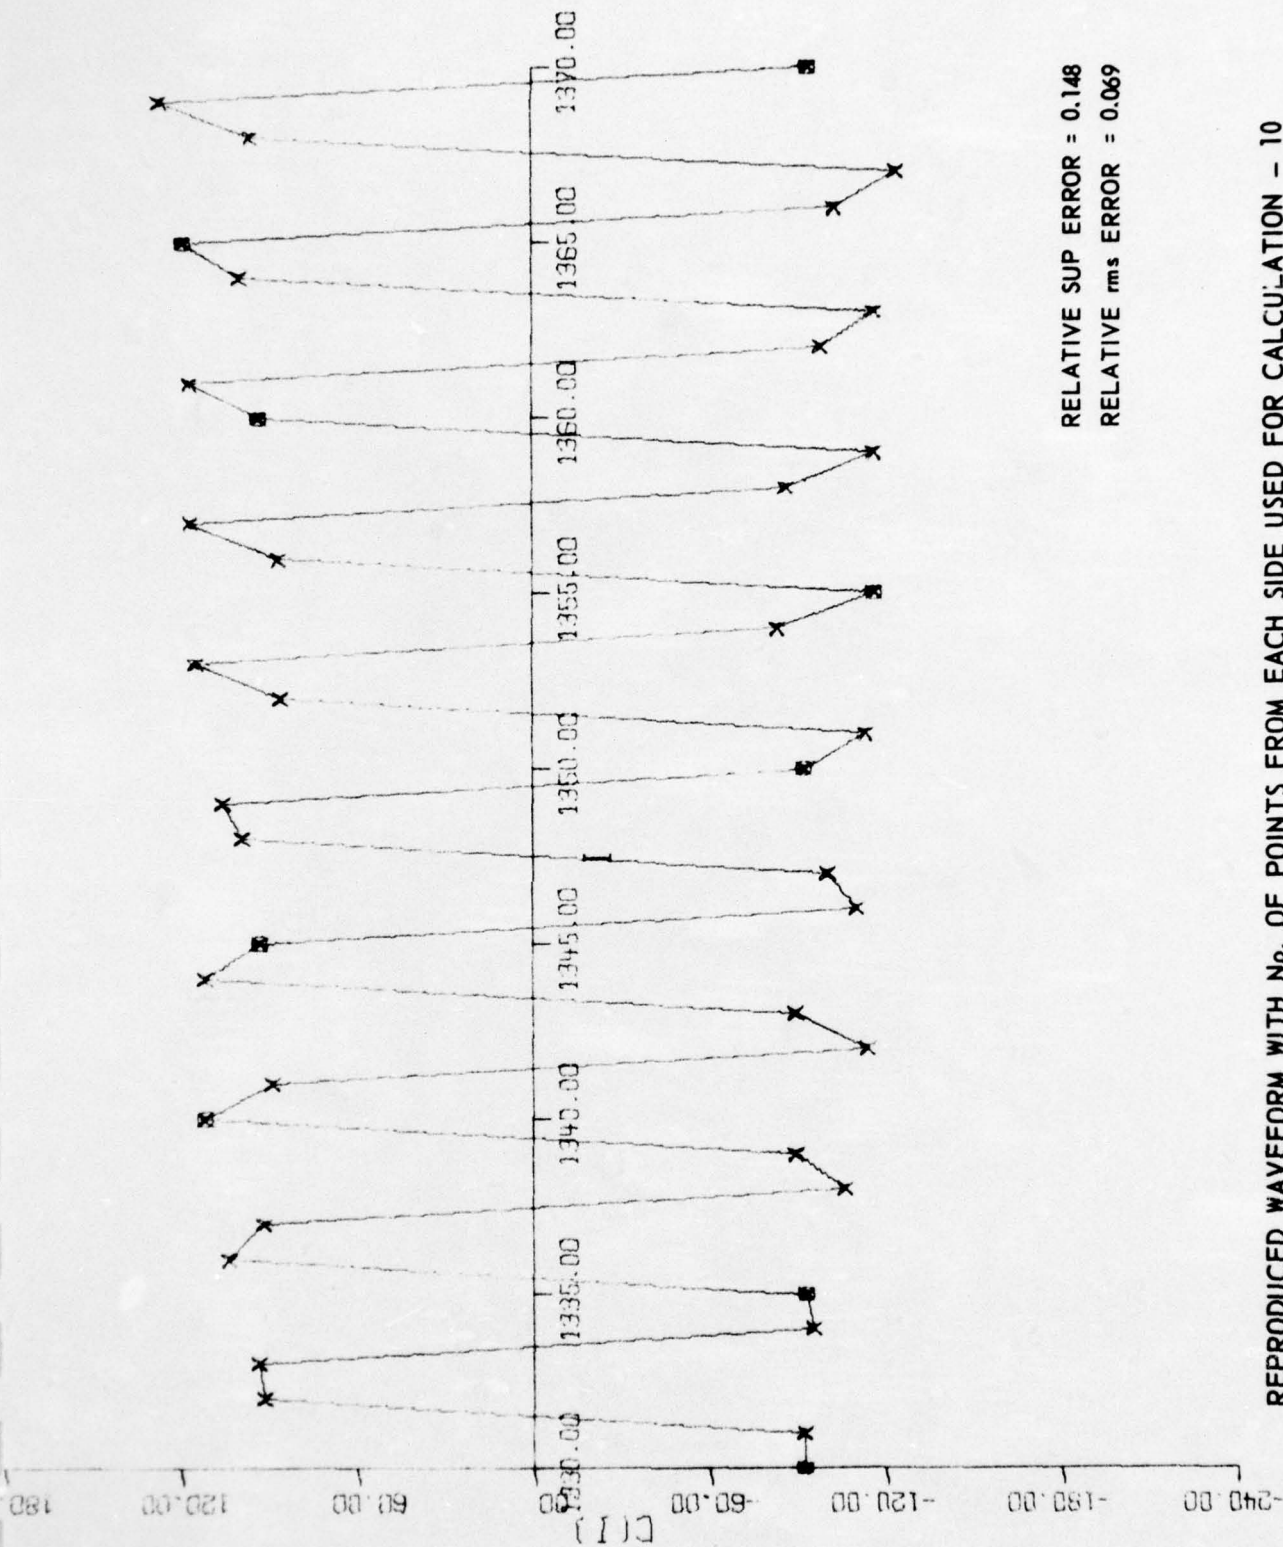

RELATIVE SUP ERROR = 0.148
RELATIVE rms ERROR = 0.069


REPRODUCED WAVEFORM WITH No. OF POINTS FROM EACH SIDE USED FOR CALCULATION - 10
ANALOG FILTERED

DRL - UT
DWG AS-67-653
GSI - EJW
6 - 20 - 67

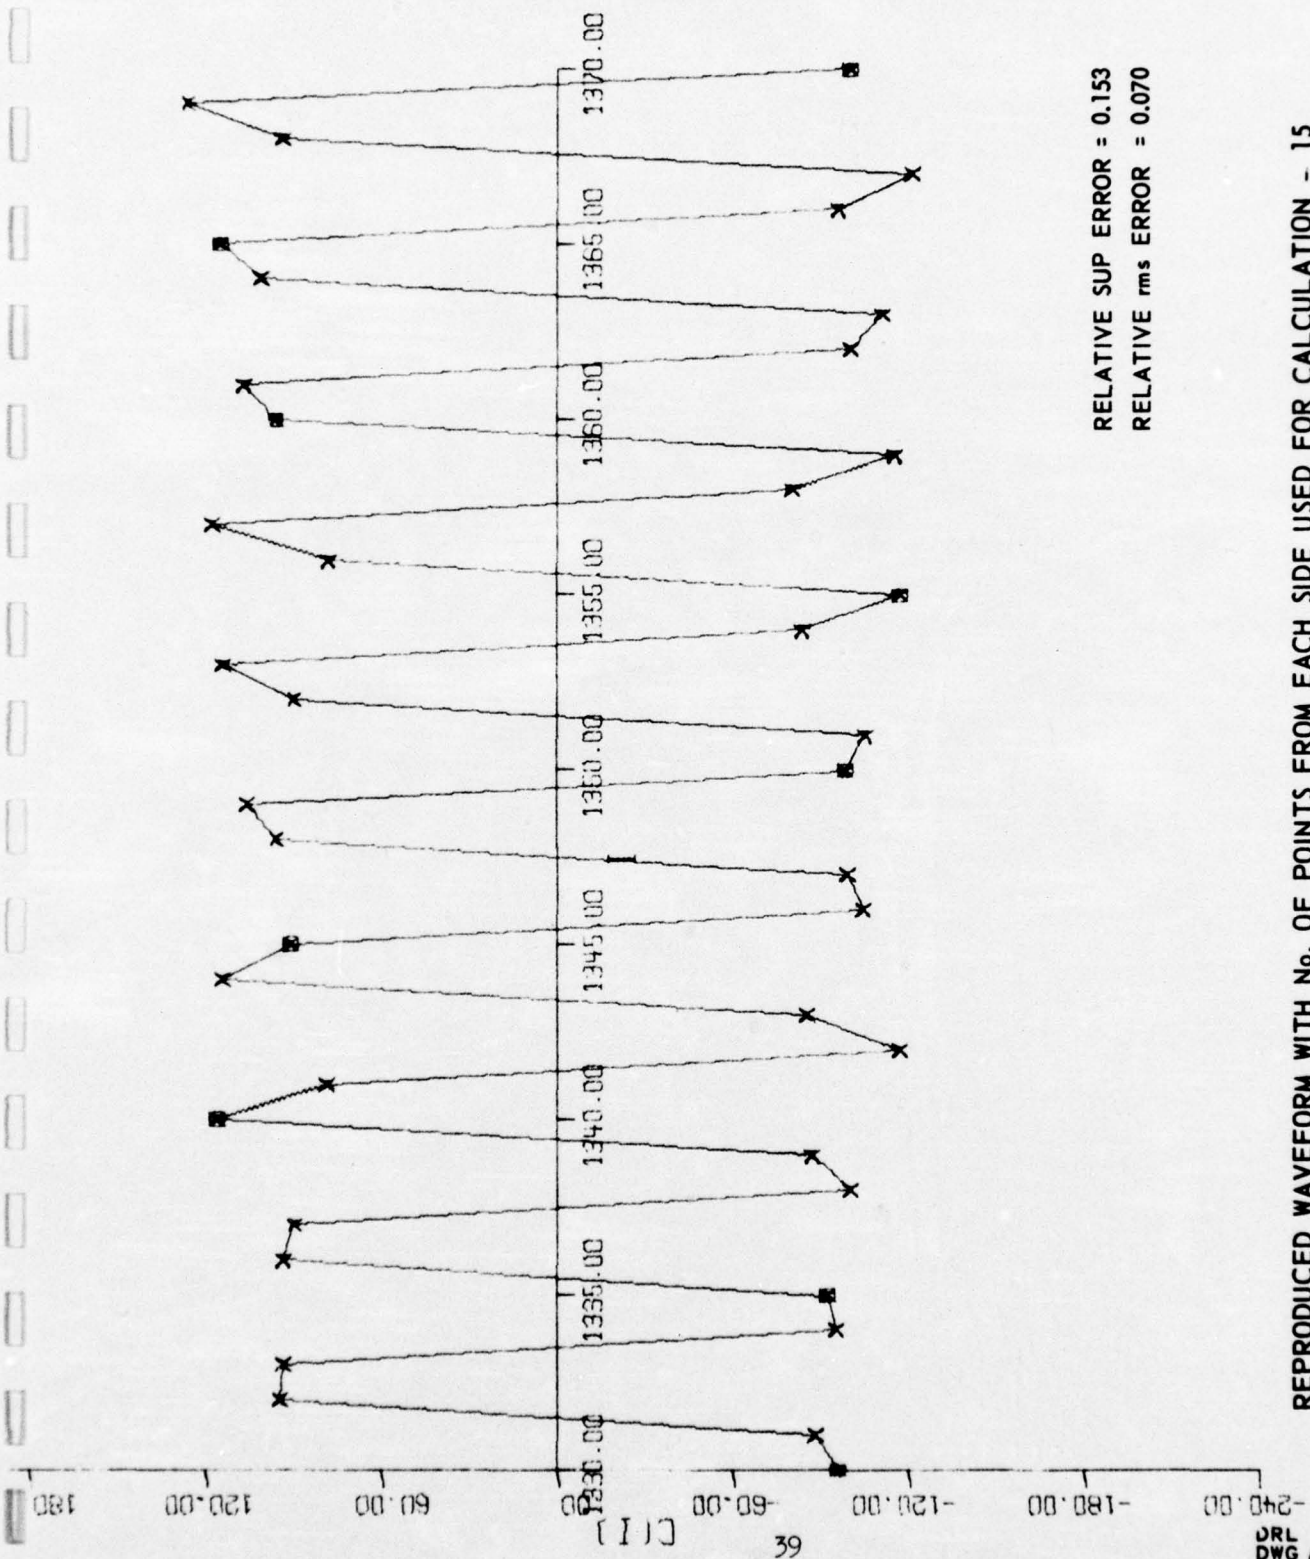

RELATIVE SUP ERROR = 0.153
RELATIVE rms ERROR = 0.070


REPRODUCED WAVEFORM WITH No. OF POINTS FROM EACH SIDE USED FOR CALCULATION - 15
ANALOG FILTERED

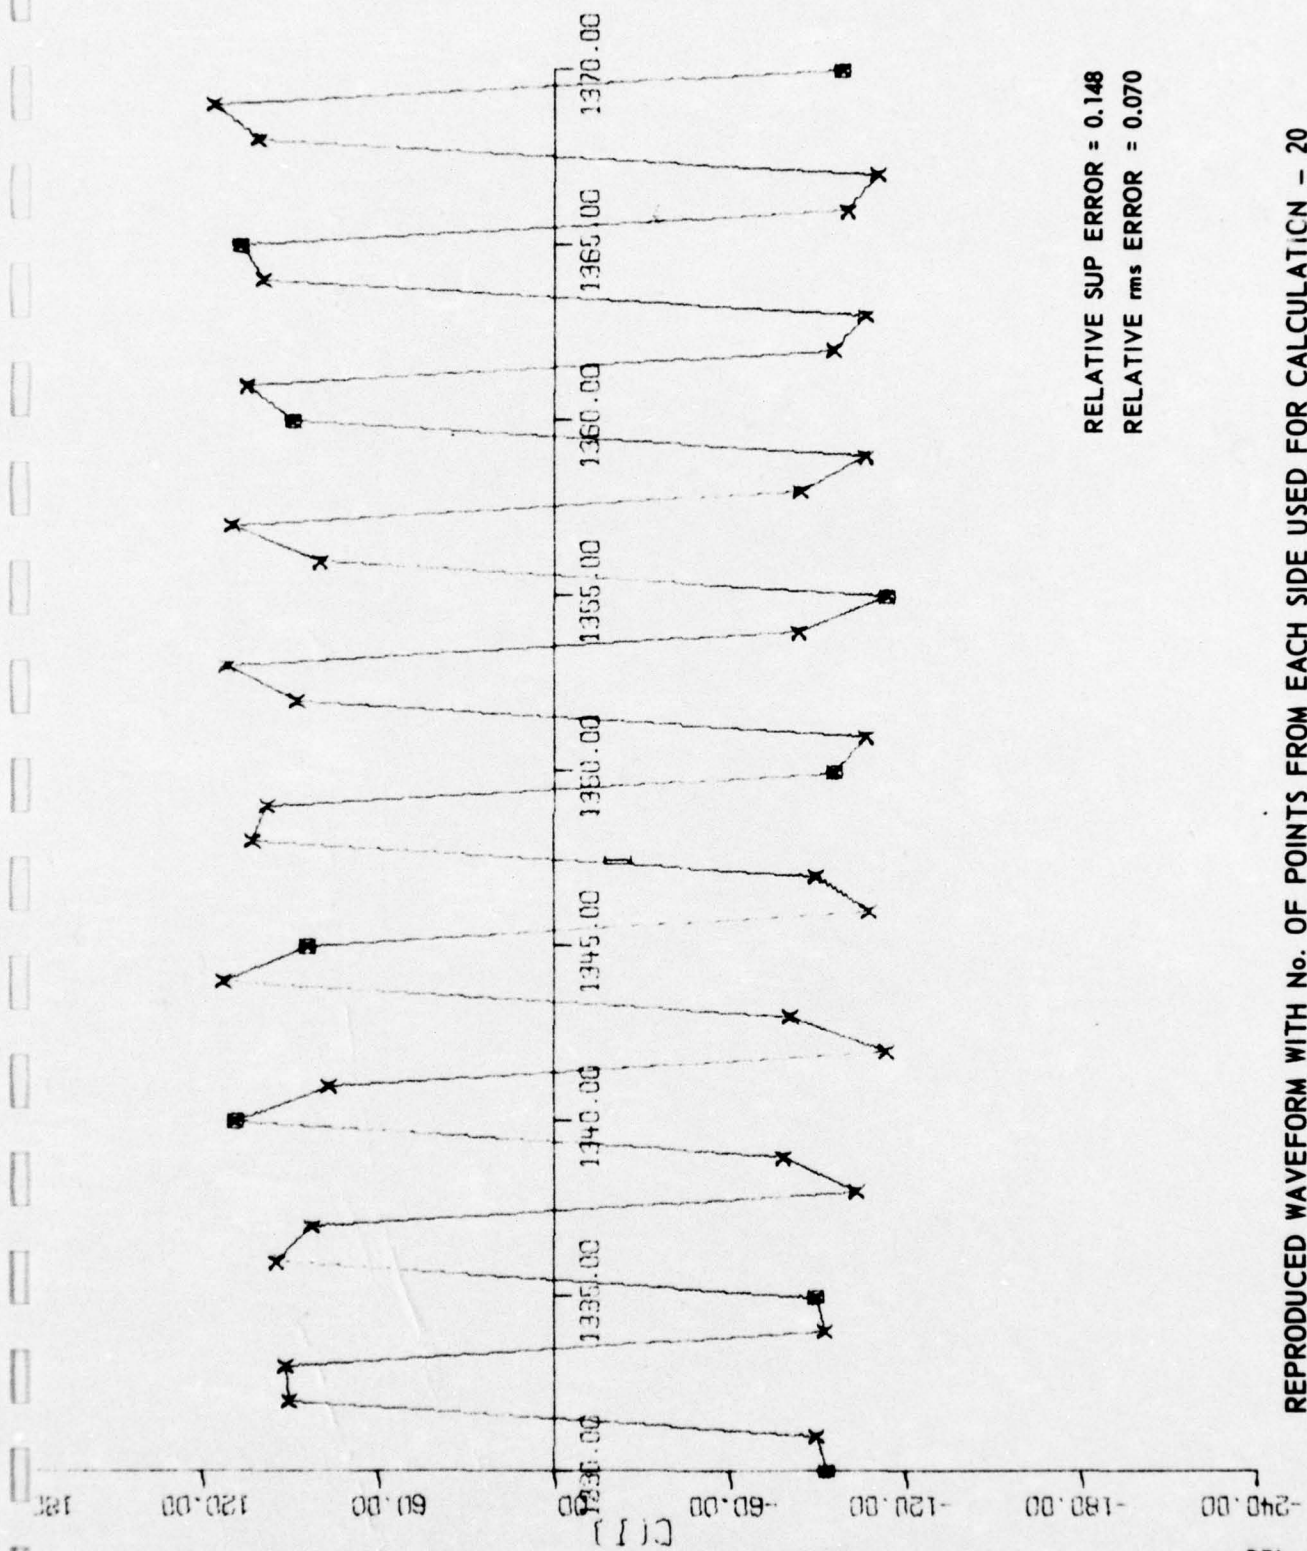

RELATIVE SUP ERROR = 0.148
RELATIVE rms ERROR = 0.070

REPRODUCED WAVEFORM WITH No. OF POINTS FROM EACH SIDE USED FOR CALCULATION - 20
ANALOG FILTERED

DRL - UT
DWG AS-67-655
GSI - EJW
6 - 20 - 67

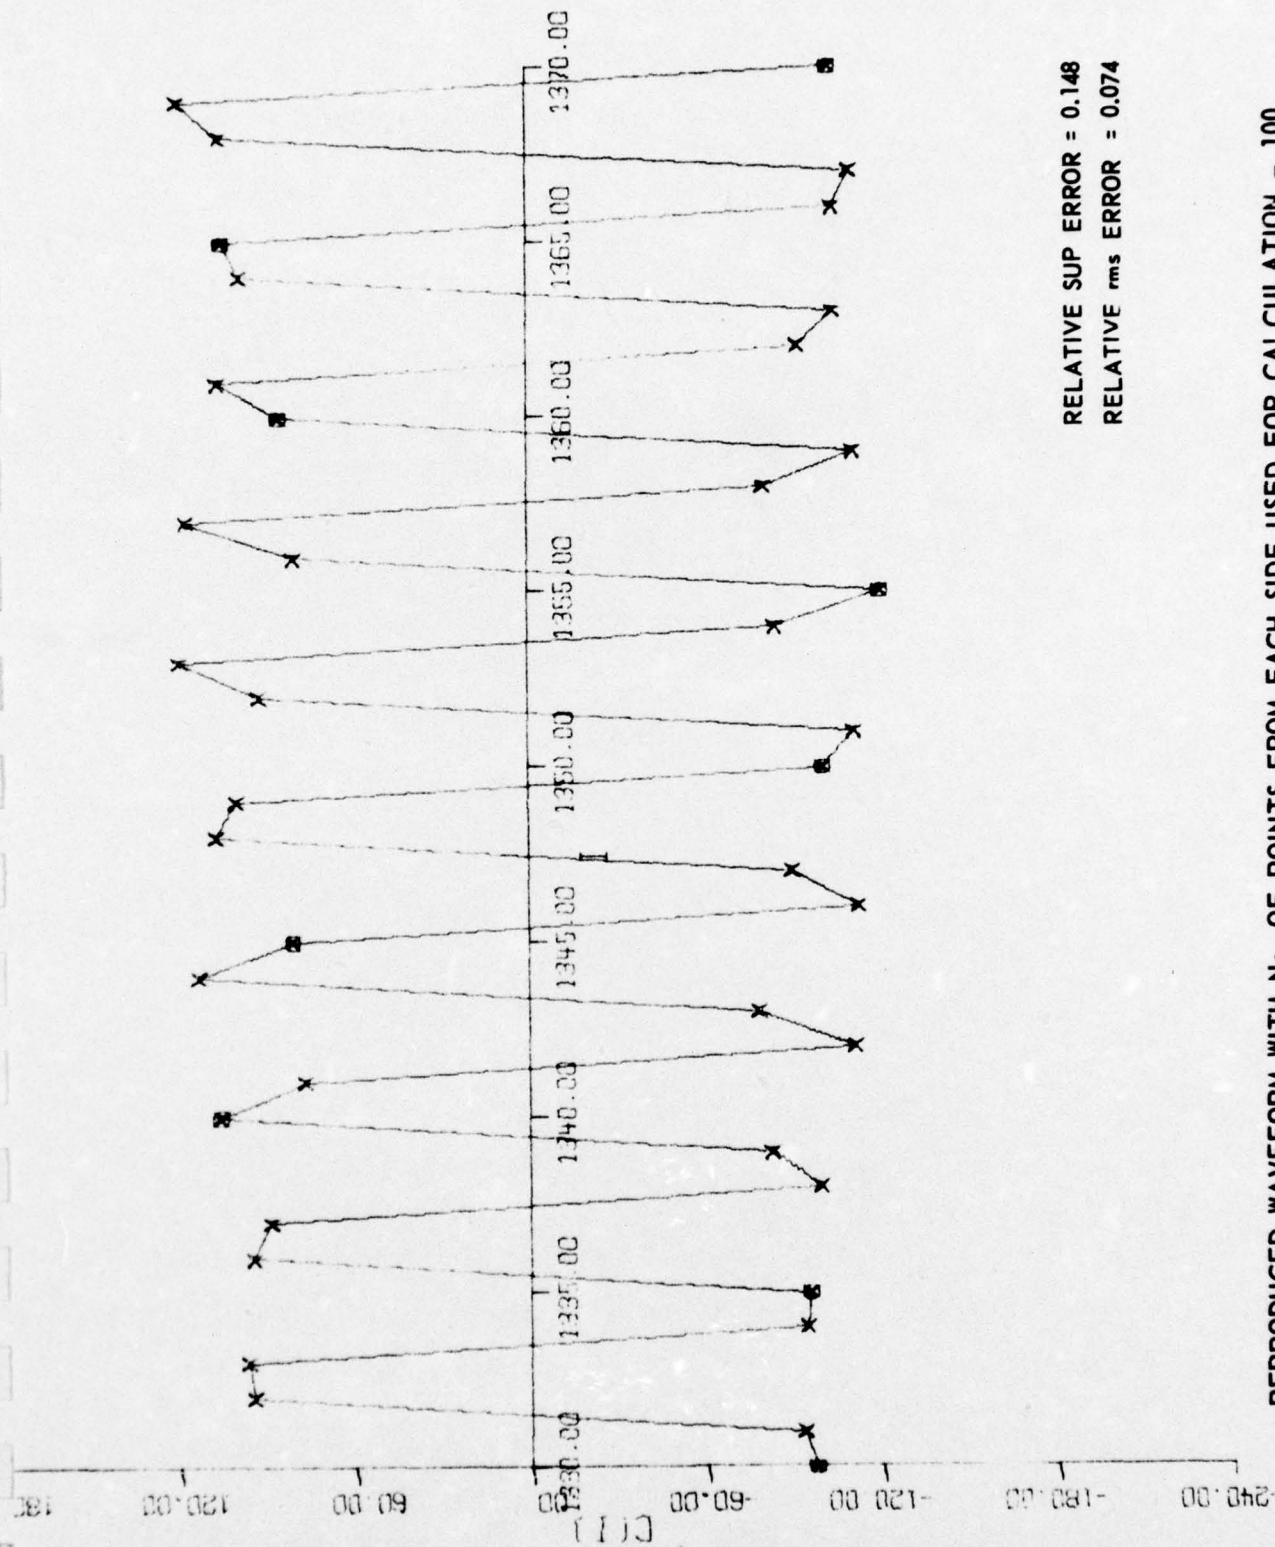


REPRODUCED WAVEFORM WITH No. OF POINTS FROM EACH SIDE USED FOR CALCULATION - 100
ANALOG FILTERED

DRL - UT
DWG AS-67-656
GSI - EJW
6 - 20 - 67

RELATIVE SUP ERROR = 0.140
RELATIVE rms ERROR = 0.073

REPRODUCED WAVEFORM WITH No. OF POINTS FROM EACH SIDE USED FOR CALCULATION - 200
ANALOG FILTERED

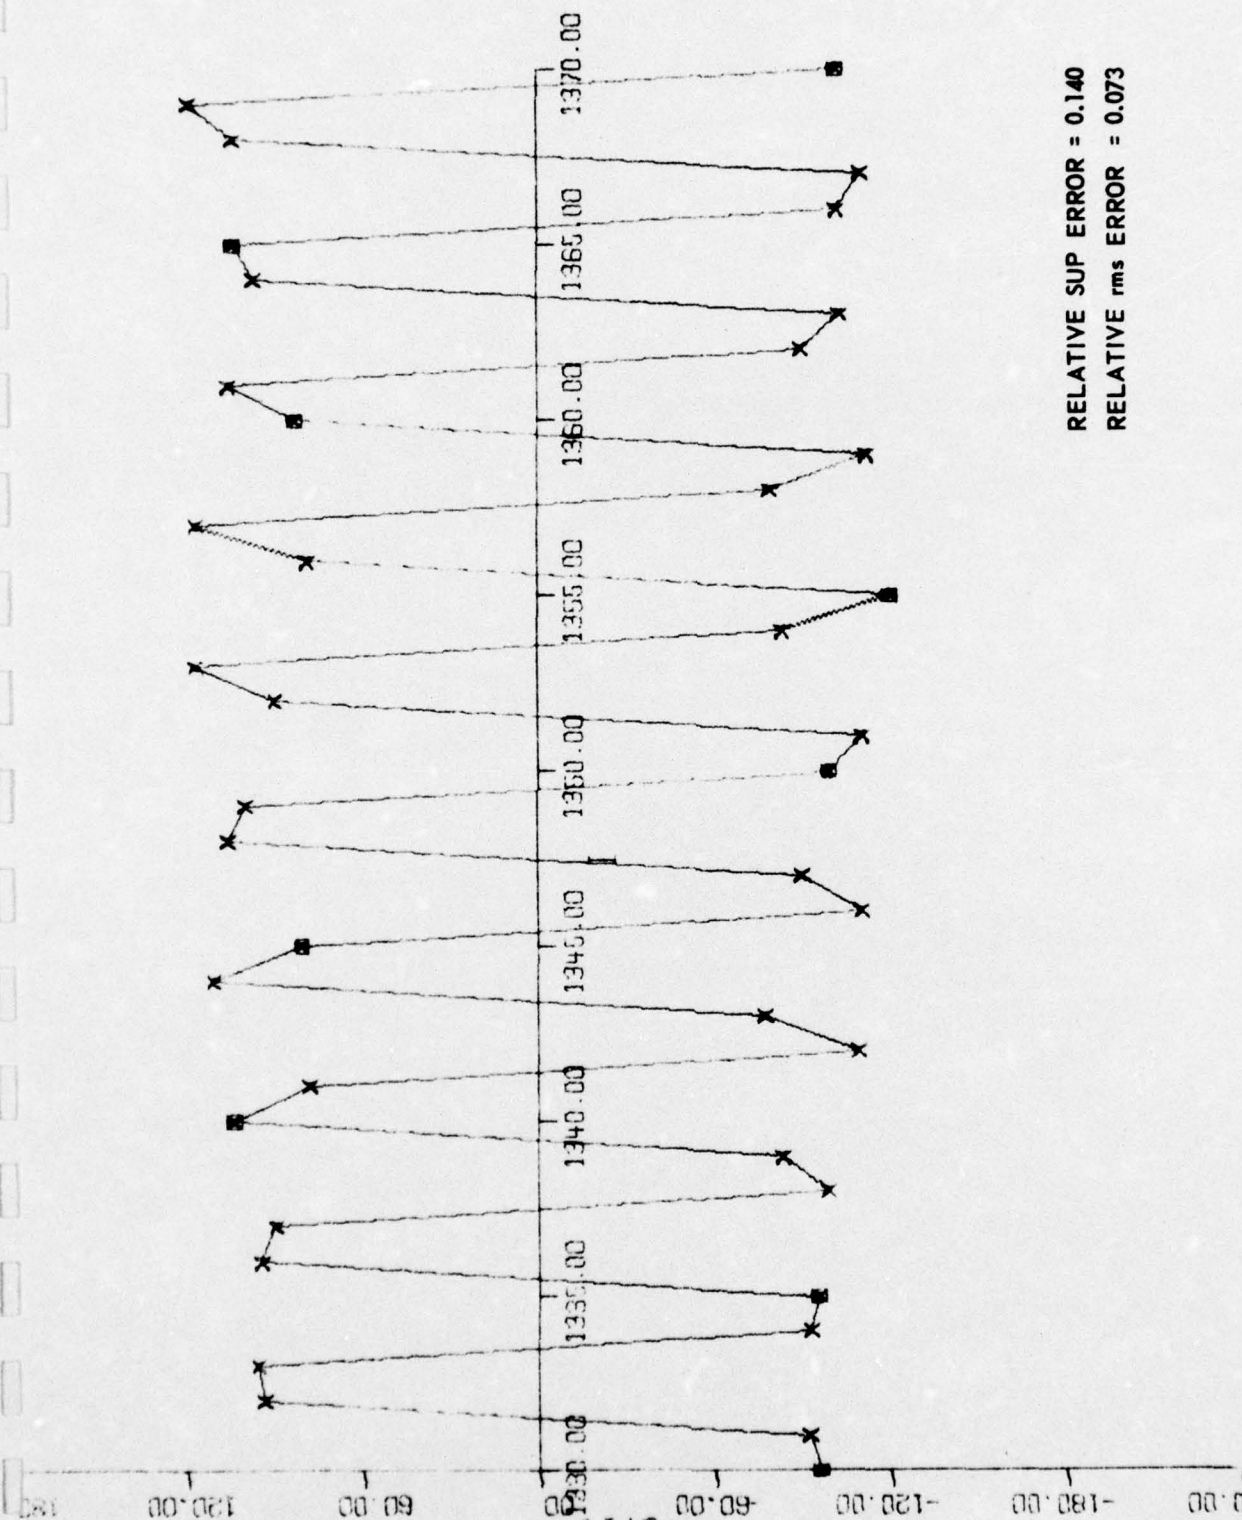


DRL . UT
DWG AS-67-657
GSI . EJW
6 - 20 - 67

VIII.

- C. Effect of Shannon's Theorem with Data Filtered
By BPF1 (3 kHz-7 kHz), Illustrated by Graphs

VIII.


C. 1. Using Every Third Point (LP = 3)

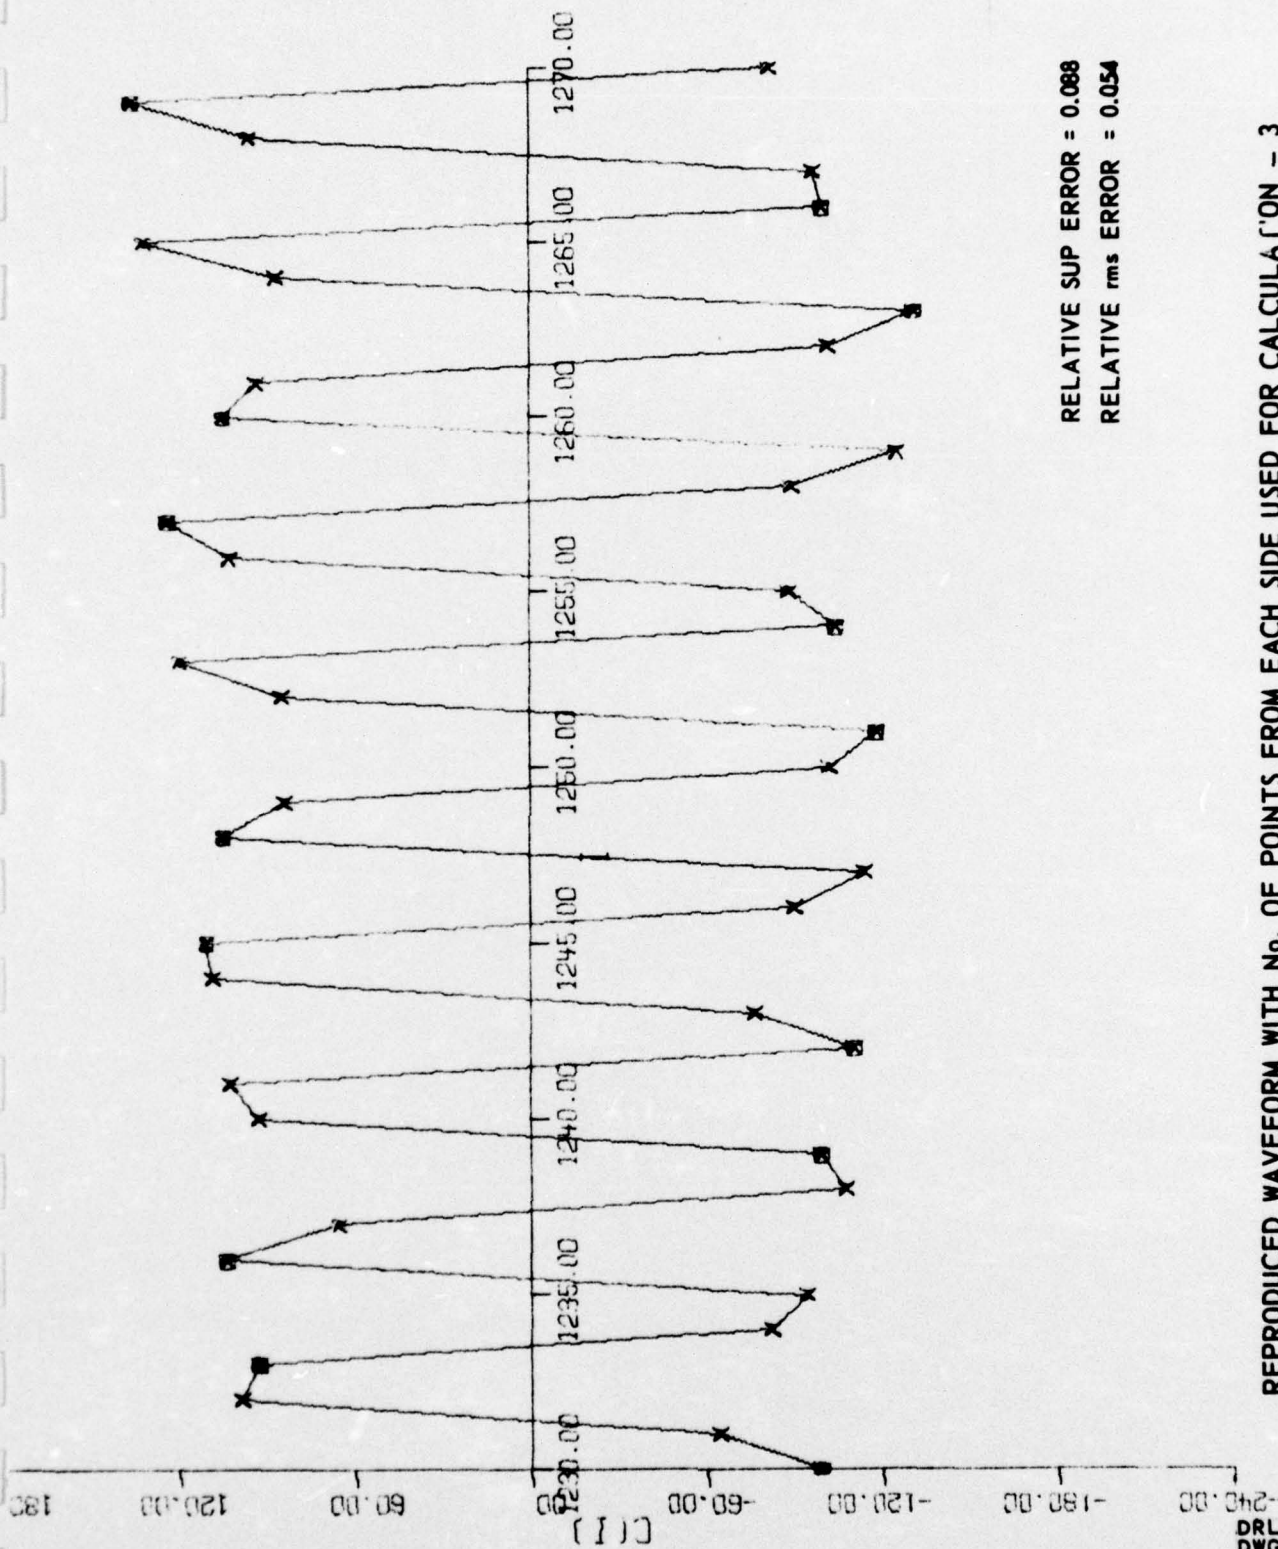

RELATIVE SUP ERROR = 0.088
RELATIVE rms ERROR = 0.054

REPRODUCED WAVEFORM WITH No. OF POINTS FROM EACH SIDE USED FOR CALCULATION - 3
FILTERED BY BPF1 (3 kHz - 7 kHz)


DRL . . . UT
DWG AS-67-658
GSI . . . EJW
6 . 20 . 67

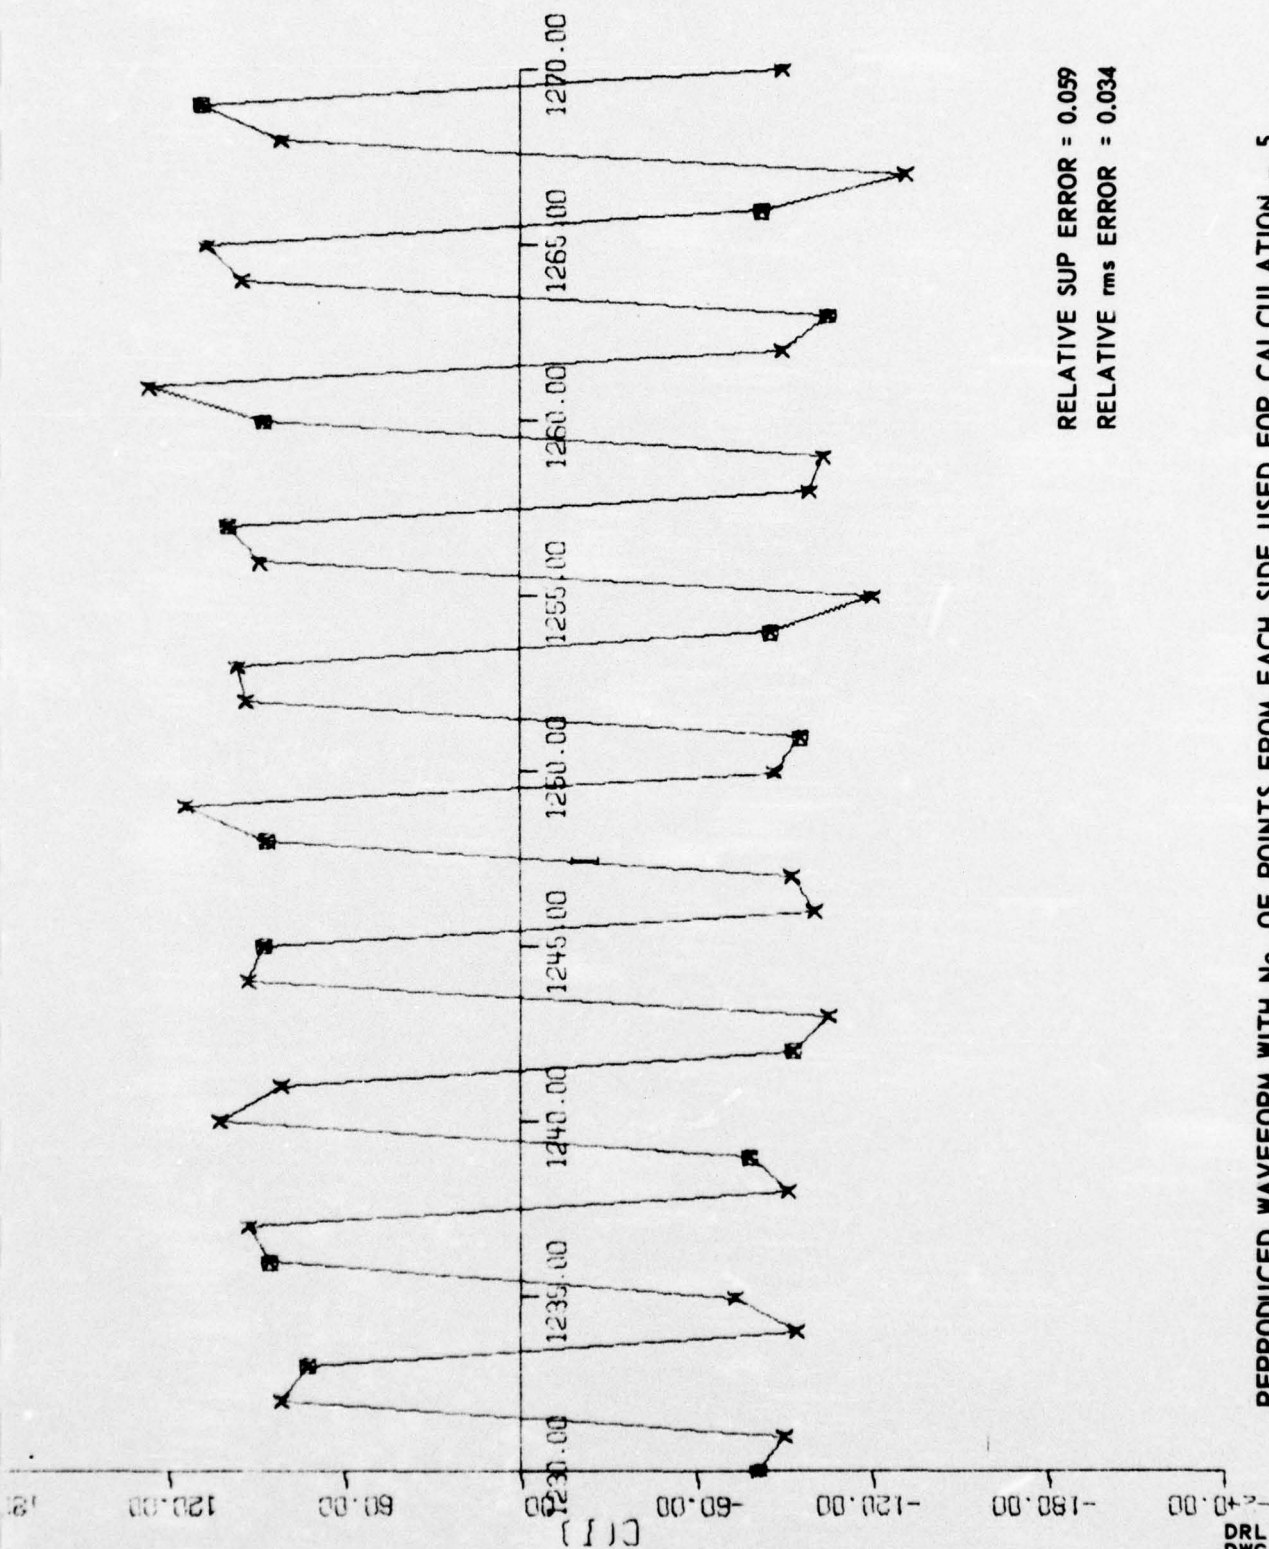

RELATIVE SUP ERROR = 0.059
RELATIVE _{rms} ERROR = 0.034

REPRODUCED WAVEFORM WITH NO. OF POINTS FROM EACH SIDE USED FOR CALCULATION - 5
FILTERED BY BPF1 (3 kHz - 7 kHz)


DRL . UT
DWG AS-67-659
GSI . EJW
6 - 20 - 67

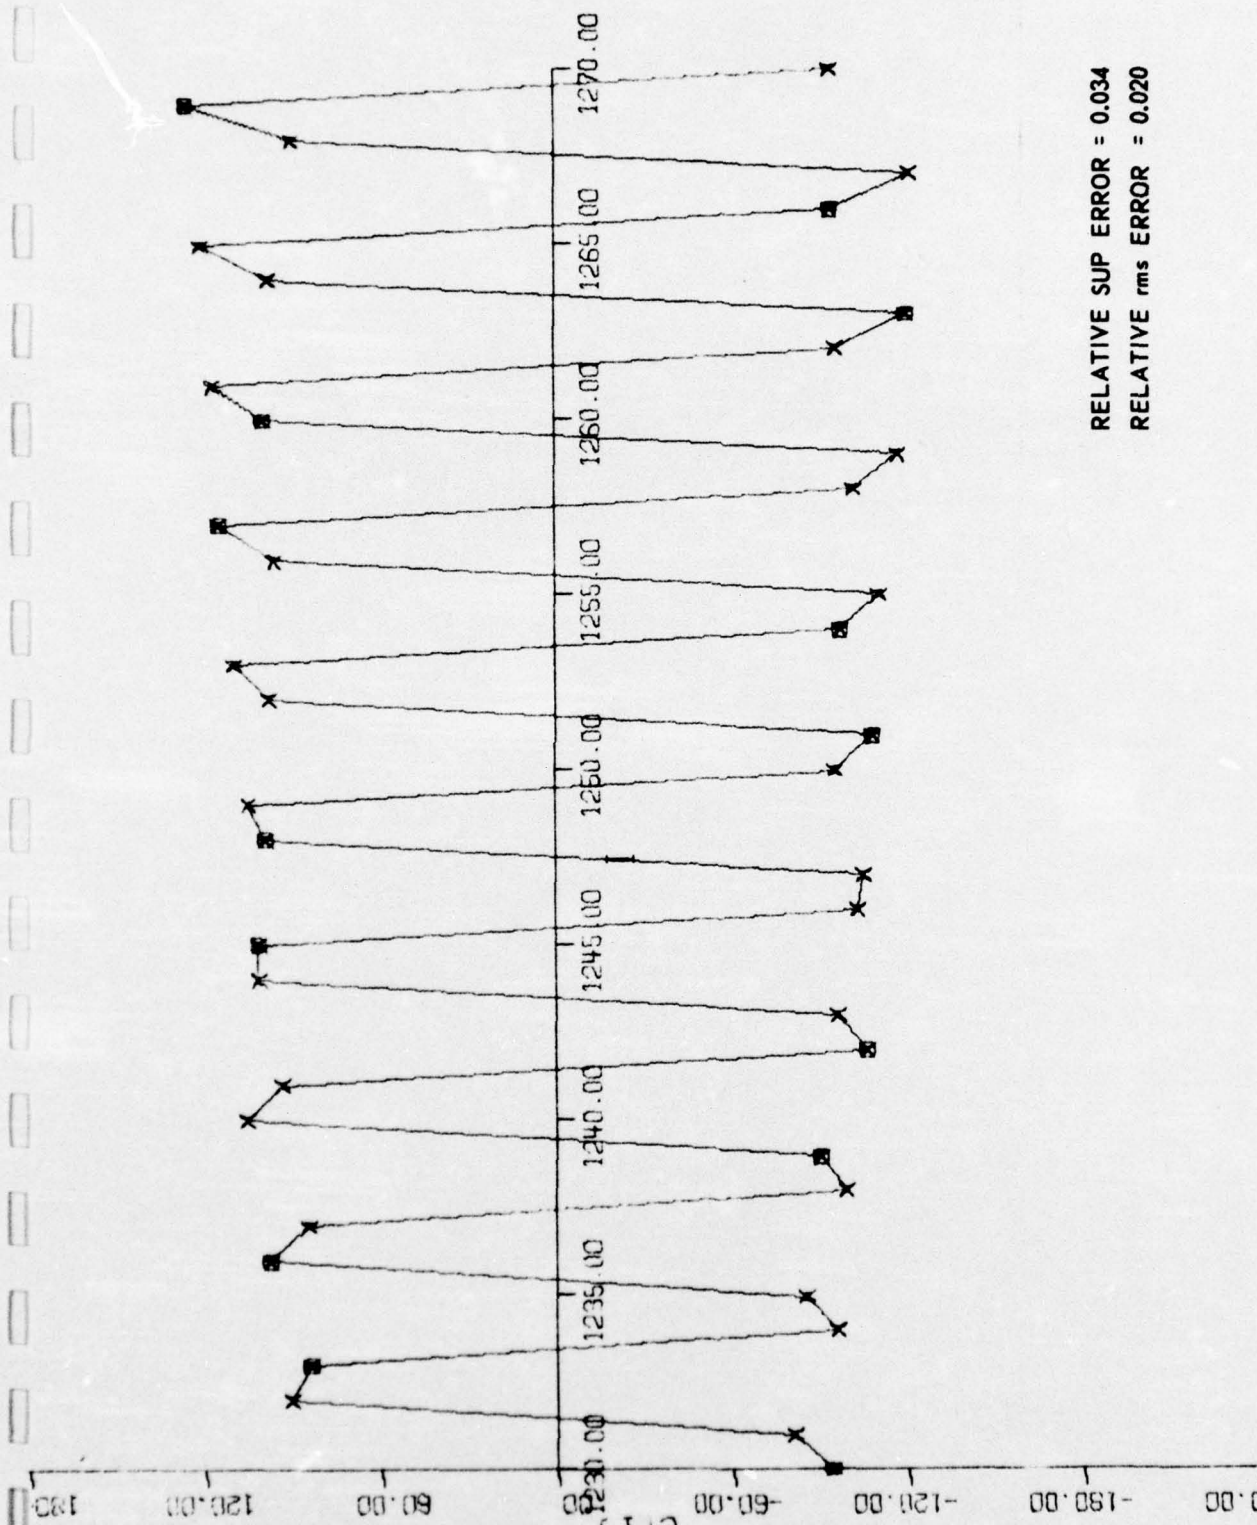

RELATIVE SUP ERROR = 0.034
RELATIVE _{rms} ERROR = 0.020

REPRODUCED WAVEFORM WITH NO. OF POINTS FROM EACH SIDE USED FOR CALCULATION - 10
FILTERED BY BPF1 (3 kHz - 7 kHz)

DRL . . UT
DWG AS-67-660
GSI . . EJW
6 . 20 . 67

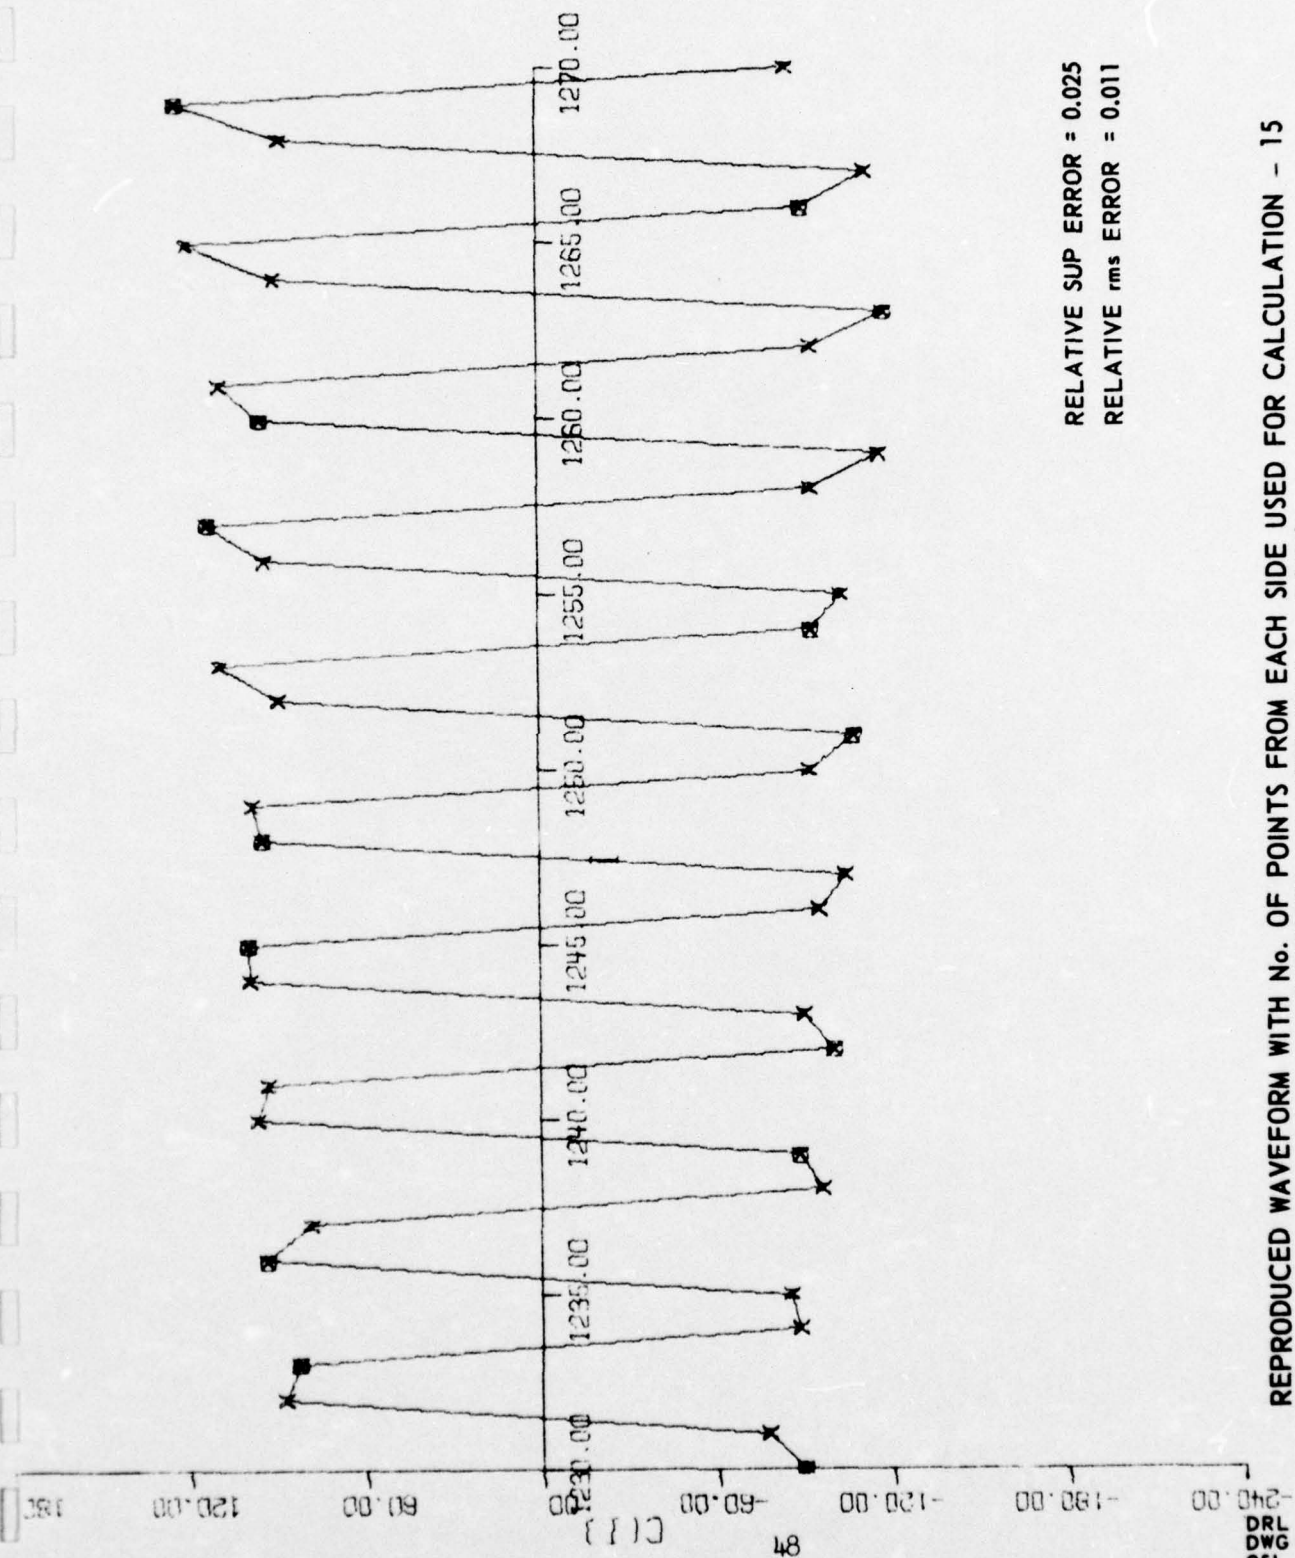


RELATIVE SUP ERROR = 0.025
RELATIVE rms ERROR = 0.011

REPRODUCED WAVEFORM WITH NO. OF POINTS FROM EACH SIDE USED FOR CALCULATION - 15
FILTERED BY BPF1 (3 kHz - 7 kHz)


DRL . UT
DWG AS-67-661
GSI . EJW
6 - 20 - 67

RELATIVE SUP ERROR = 0.021
RELATIVE rms ERROR = 0.013

REPRODUCED WAVEFORM WITH No. OF POINTS FROM EACH SIDE USED FOR CALCULATION -- 20
FILTERED BY BPF1 (3 kHz - 7 kHz)

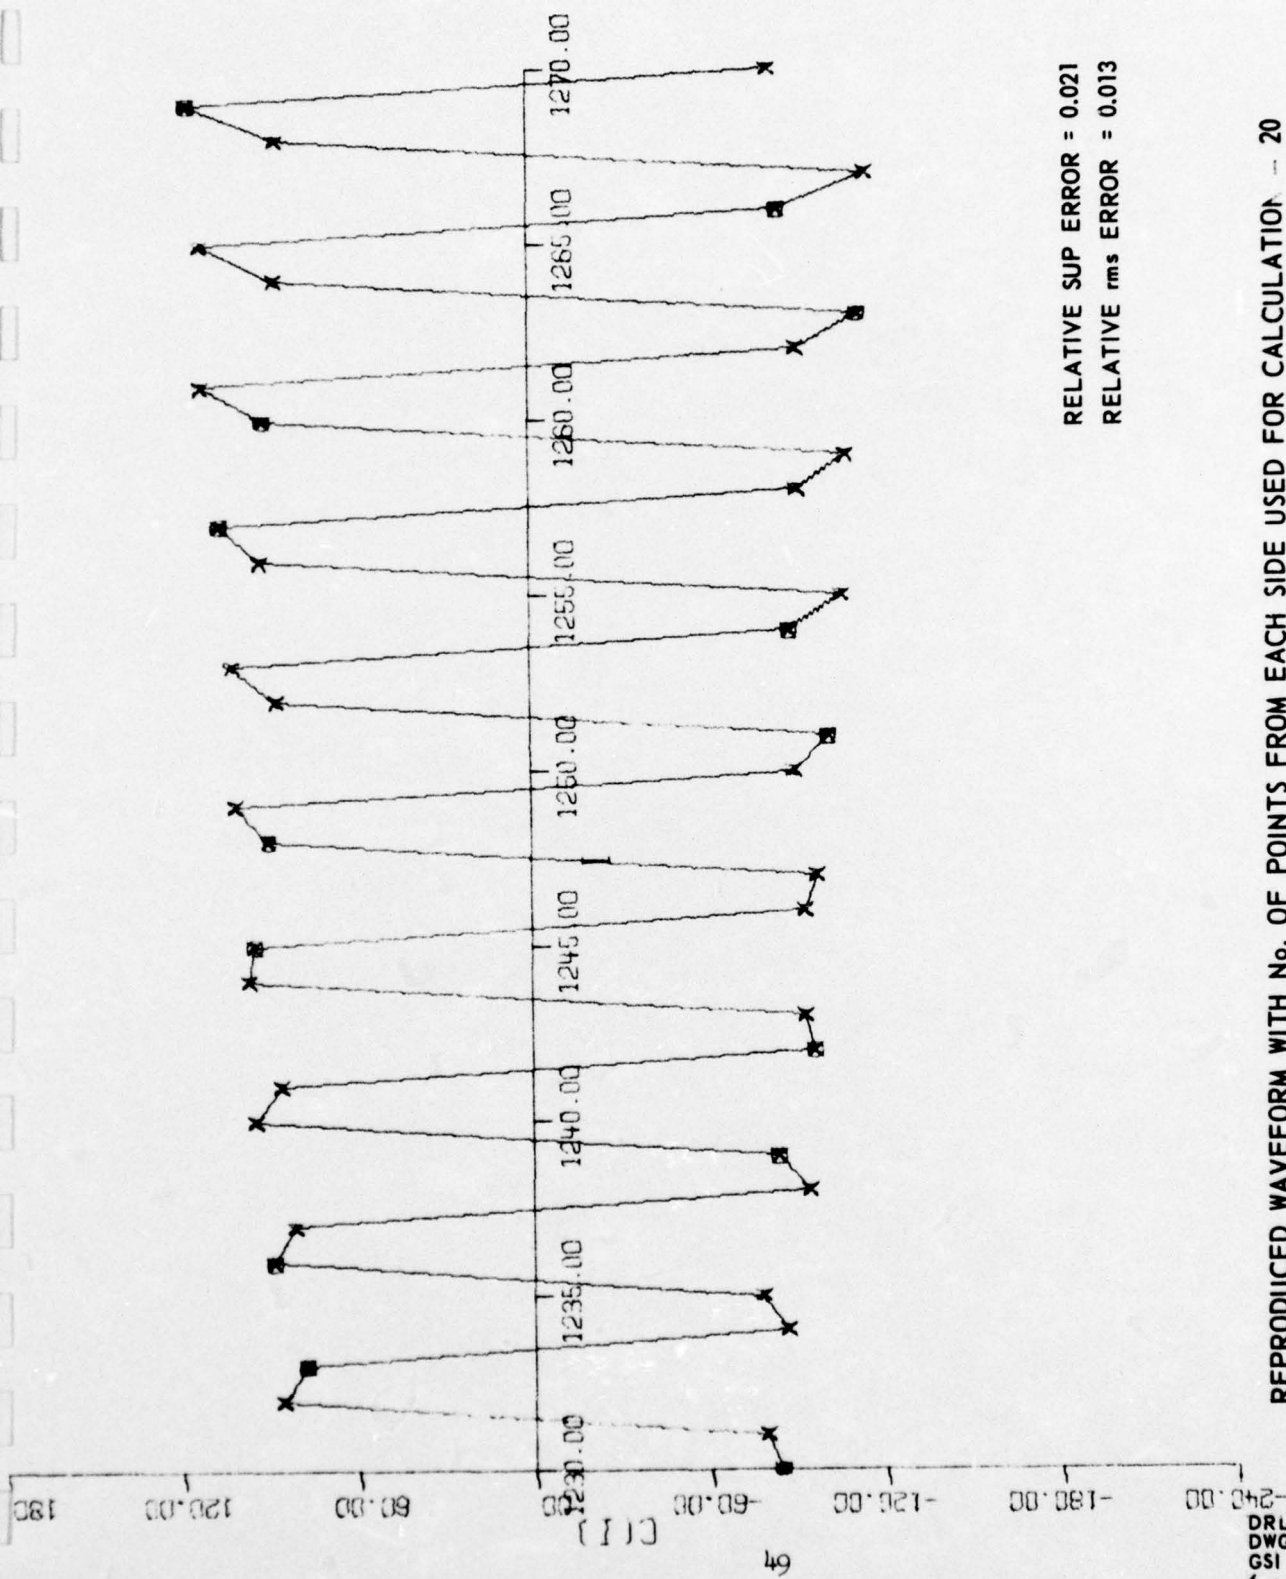


DRL - UT
DWG AS-67-662
GSI - EJW
6 - 20 - 67

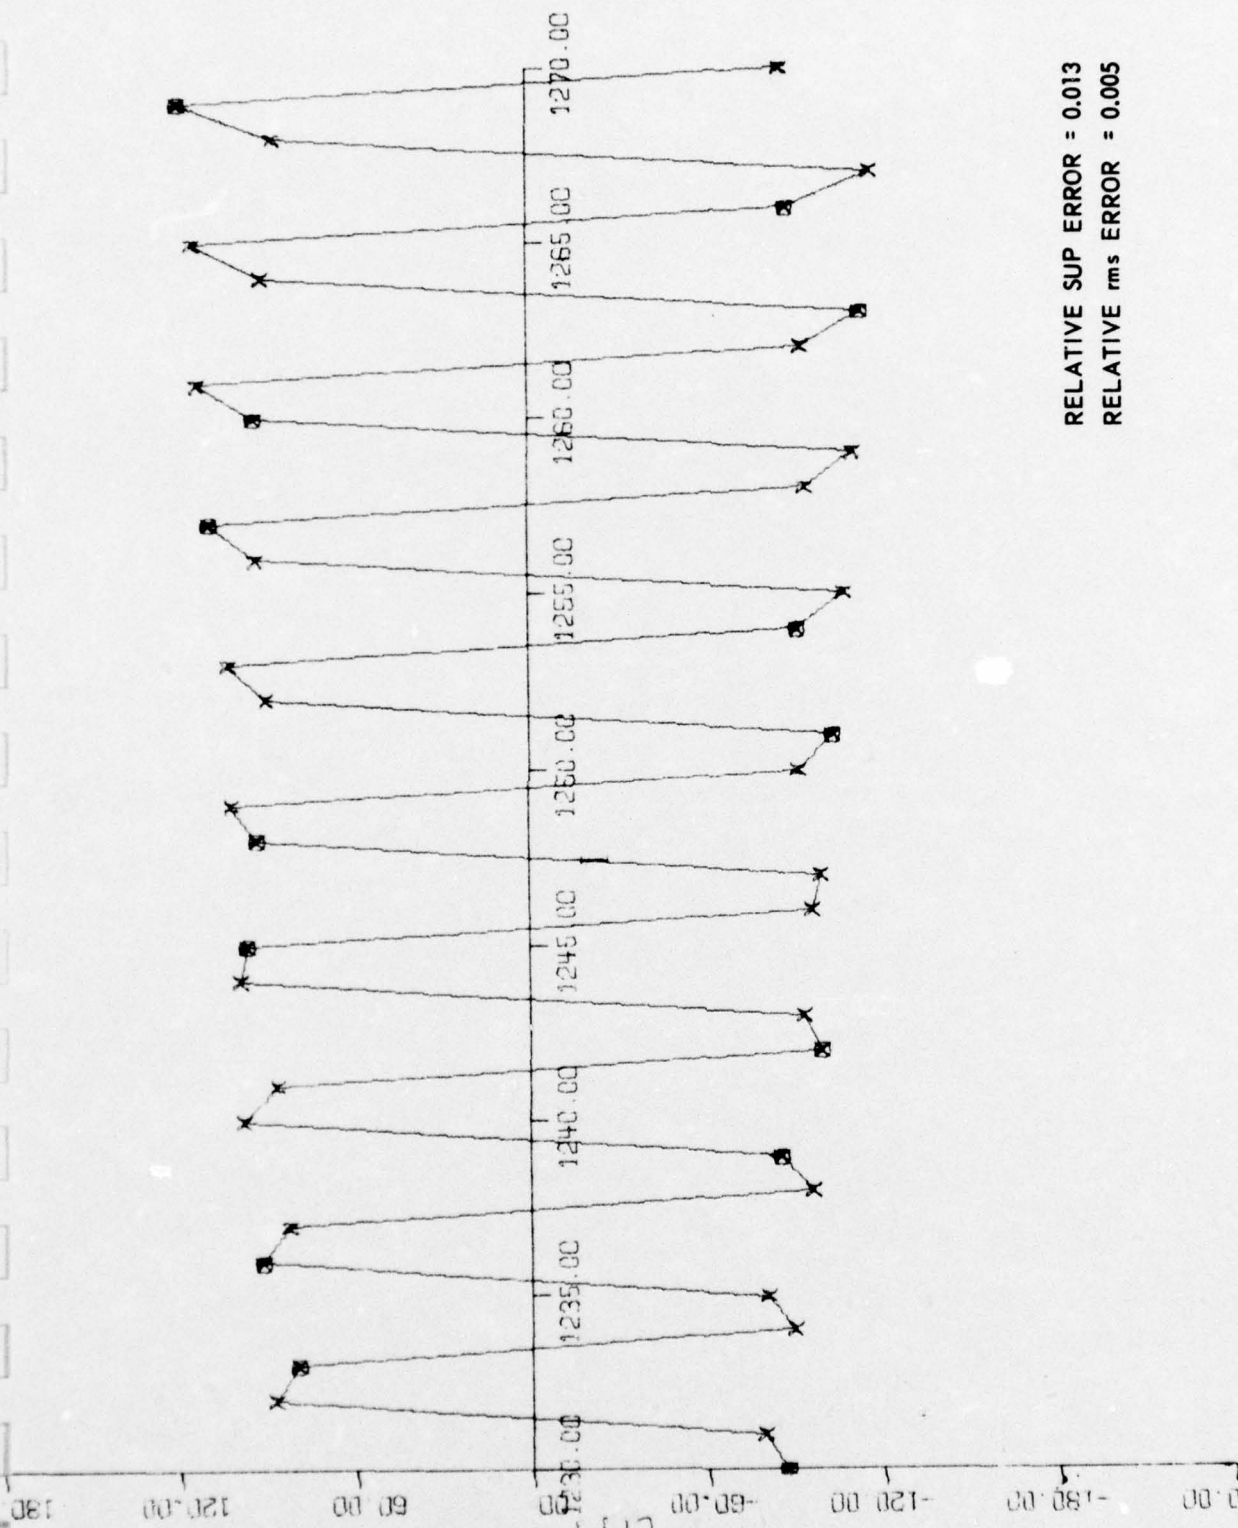

RELATIVE SUP ERROR = 0.013
RELATIVE rms ERROR = 0.005

REPRODUCED WAVEFORM WITH NO. OF POINTS FROM EACH SIDE USED FOR CALCULATION - 100
FILTERED BY BPF1 (3 kHz - 7 kHz)

DRL UT
DWG AS-67-663
GSI EJW
6 - 20 - 67

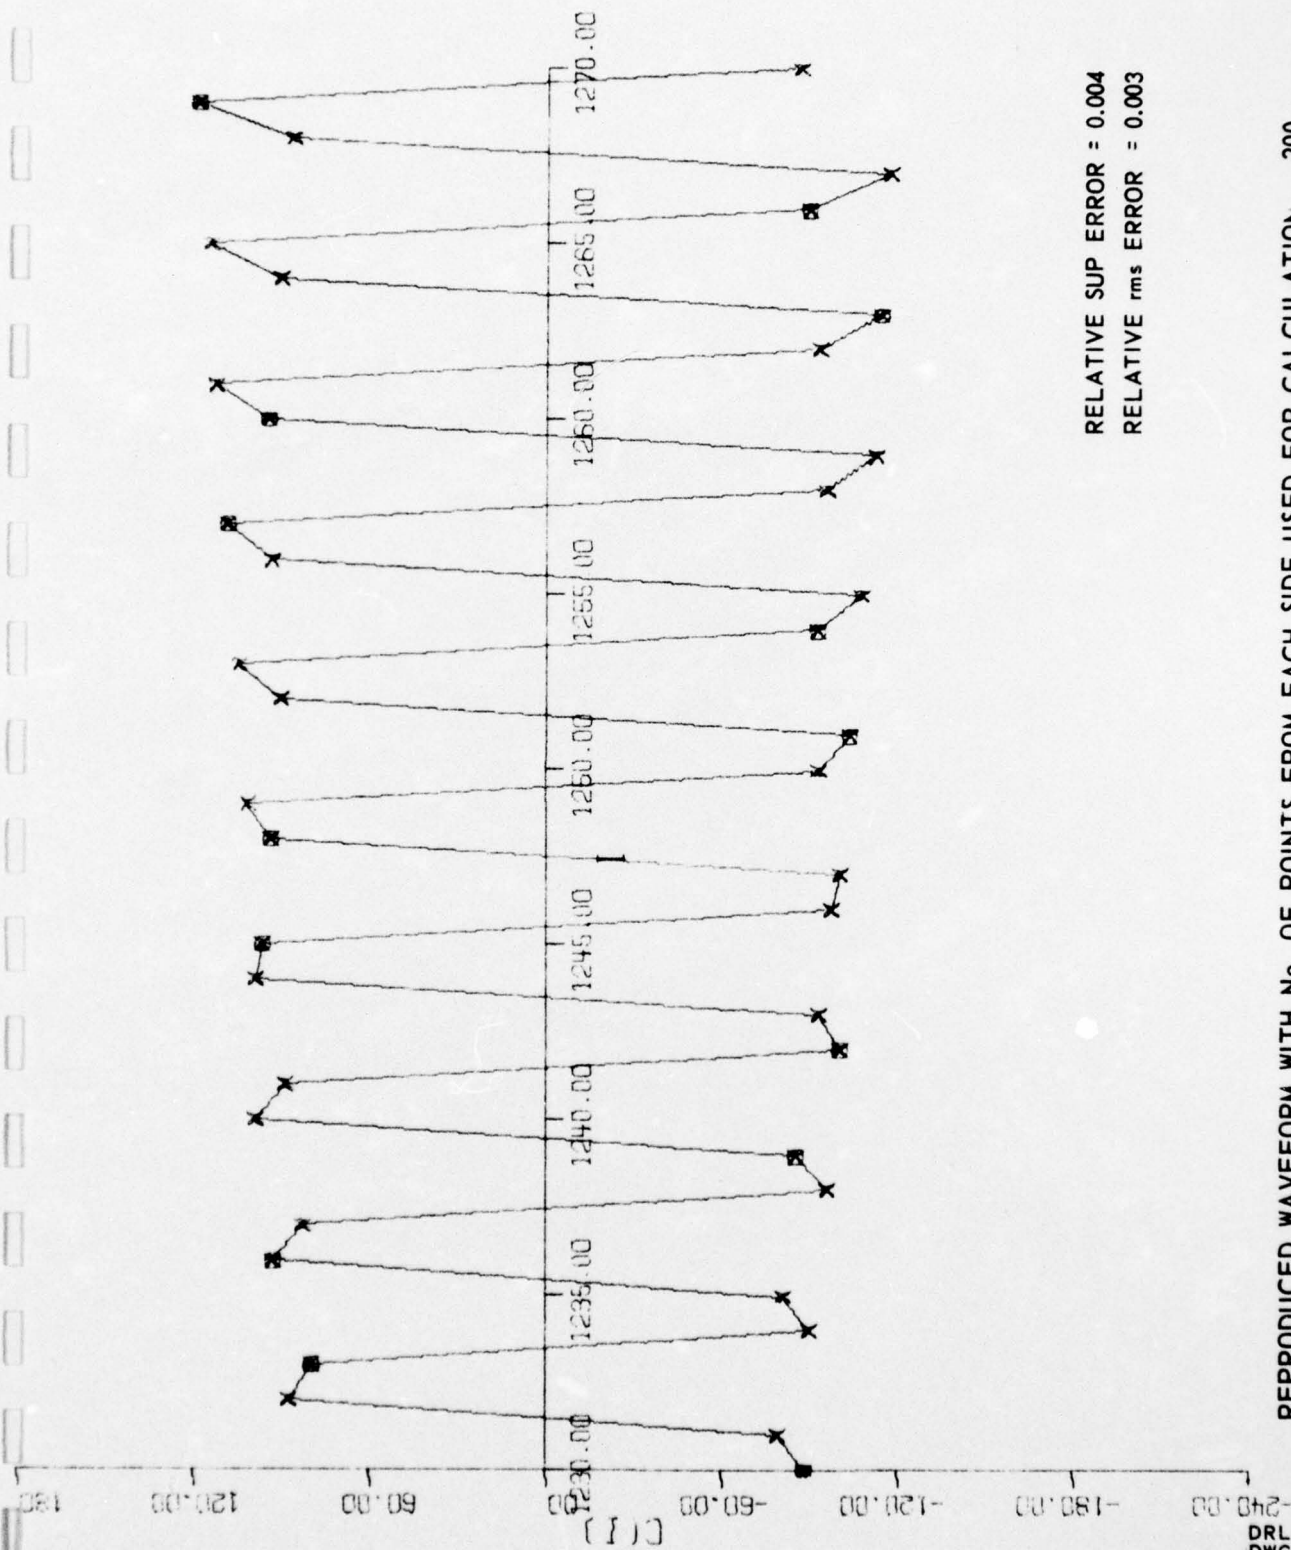


RELATIVE SUP ERROR = 0.004
RELATIVE rms ERROR = 0.003

REPRODUCED WAVEFORM WITH NO. OF POINTS FROM EACH SIDE USED FOR CALCULATION - 200
FILTERED BY BPF1 (3 kHz - 7 kHz)

VIII.


C. 2. Using Every Fifth Point (LP = 5)

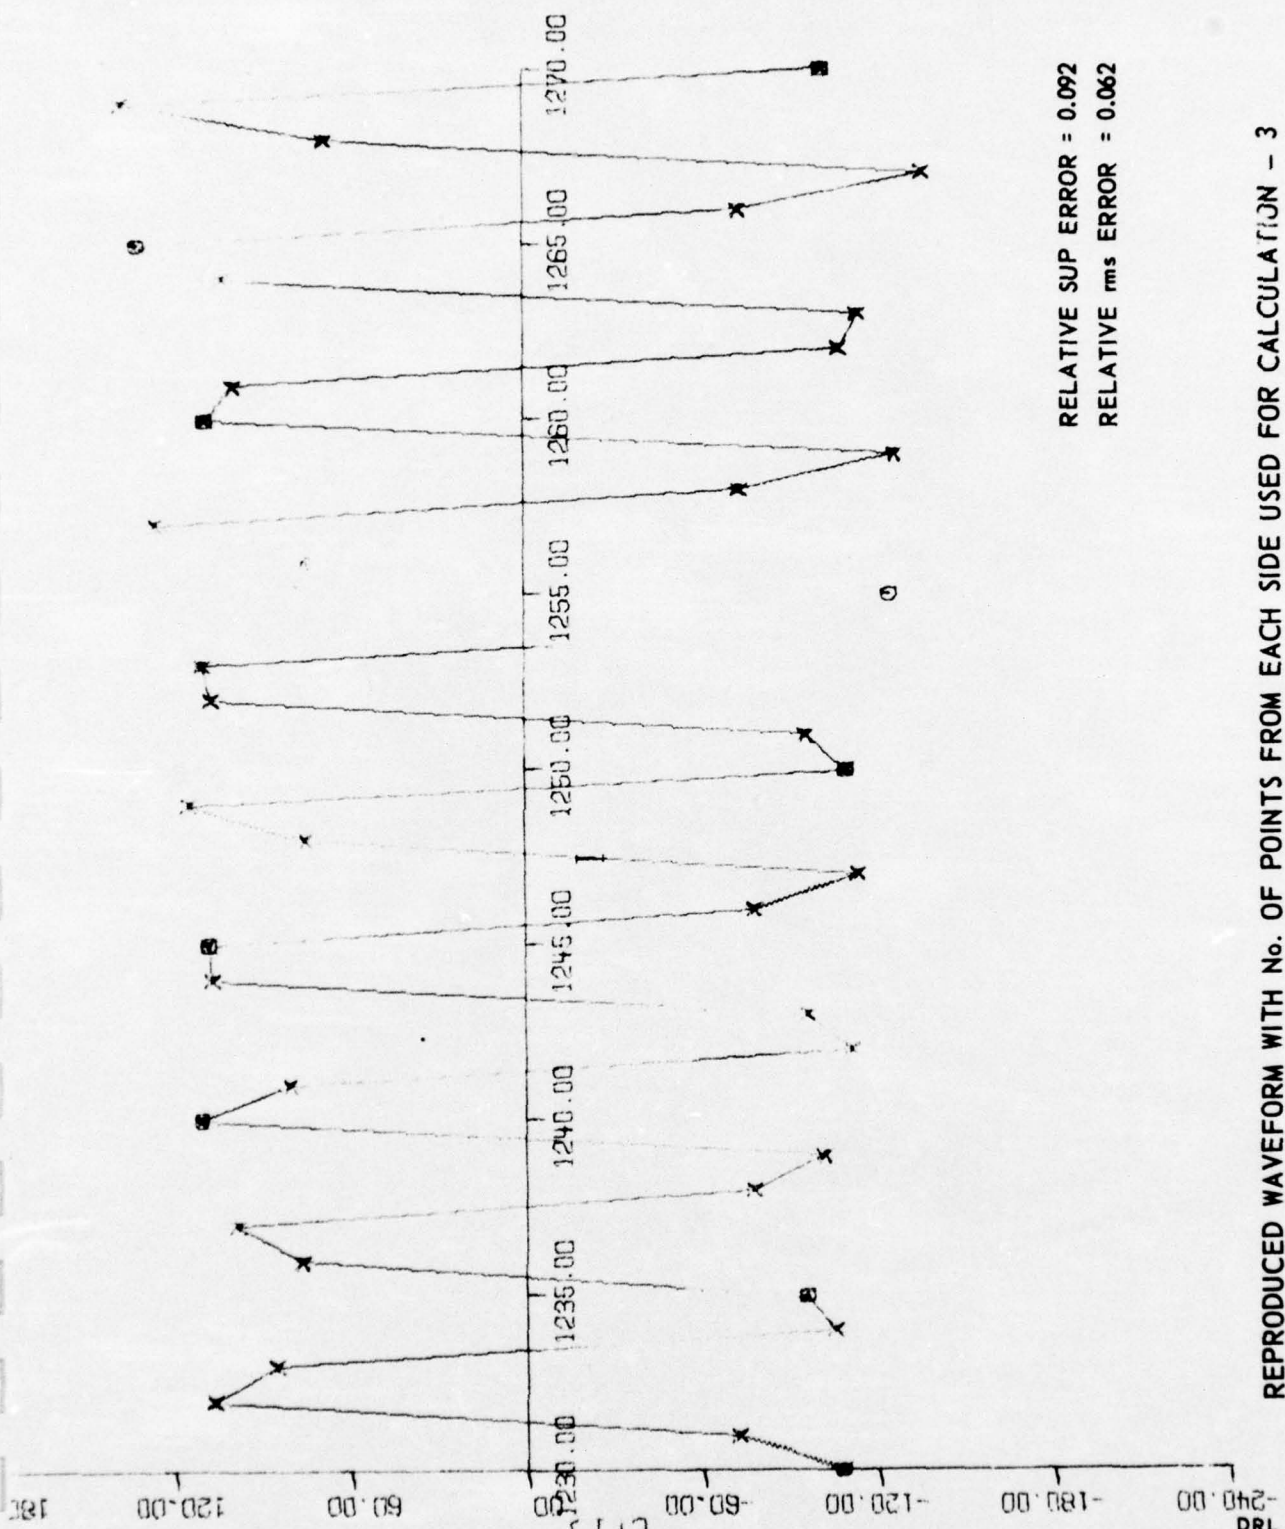

RELATIVE SUP ERROR = 0.092
RELATIVE rms ERROR = 0.062

REPRODUCED WAVEFORM WITH NO. OF POINTS FROM EACH SIDE USED FOR CALCULATION - 3
FILTERED BY BPF1 (3 kHz - 7 kHz)


DRL . . . UT
DWG AS-67-665
GSI . . . EJW
6 - 20 - 67

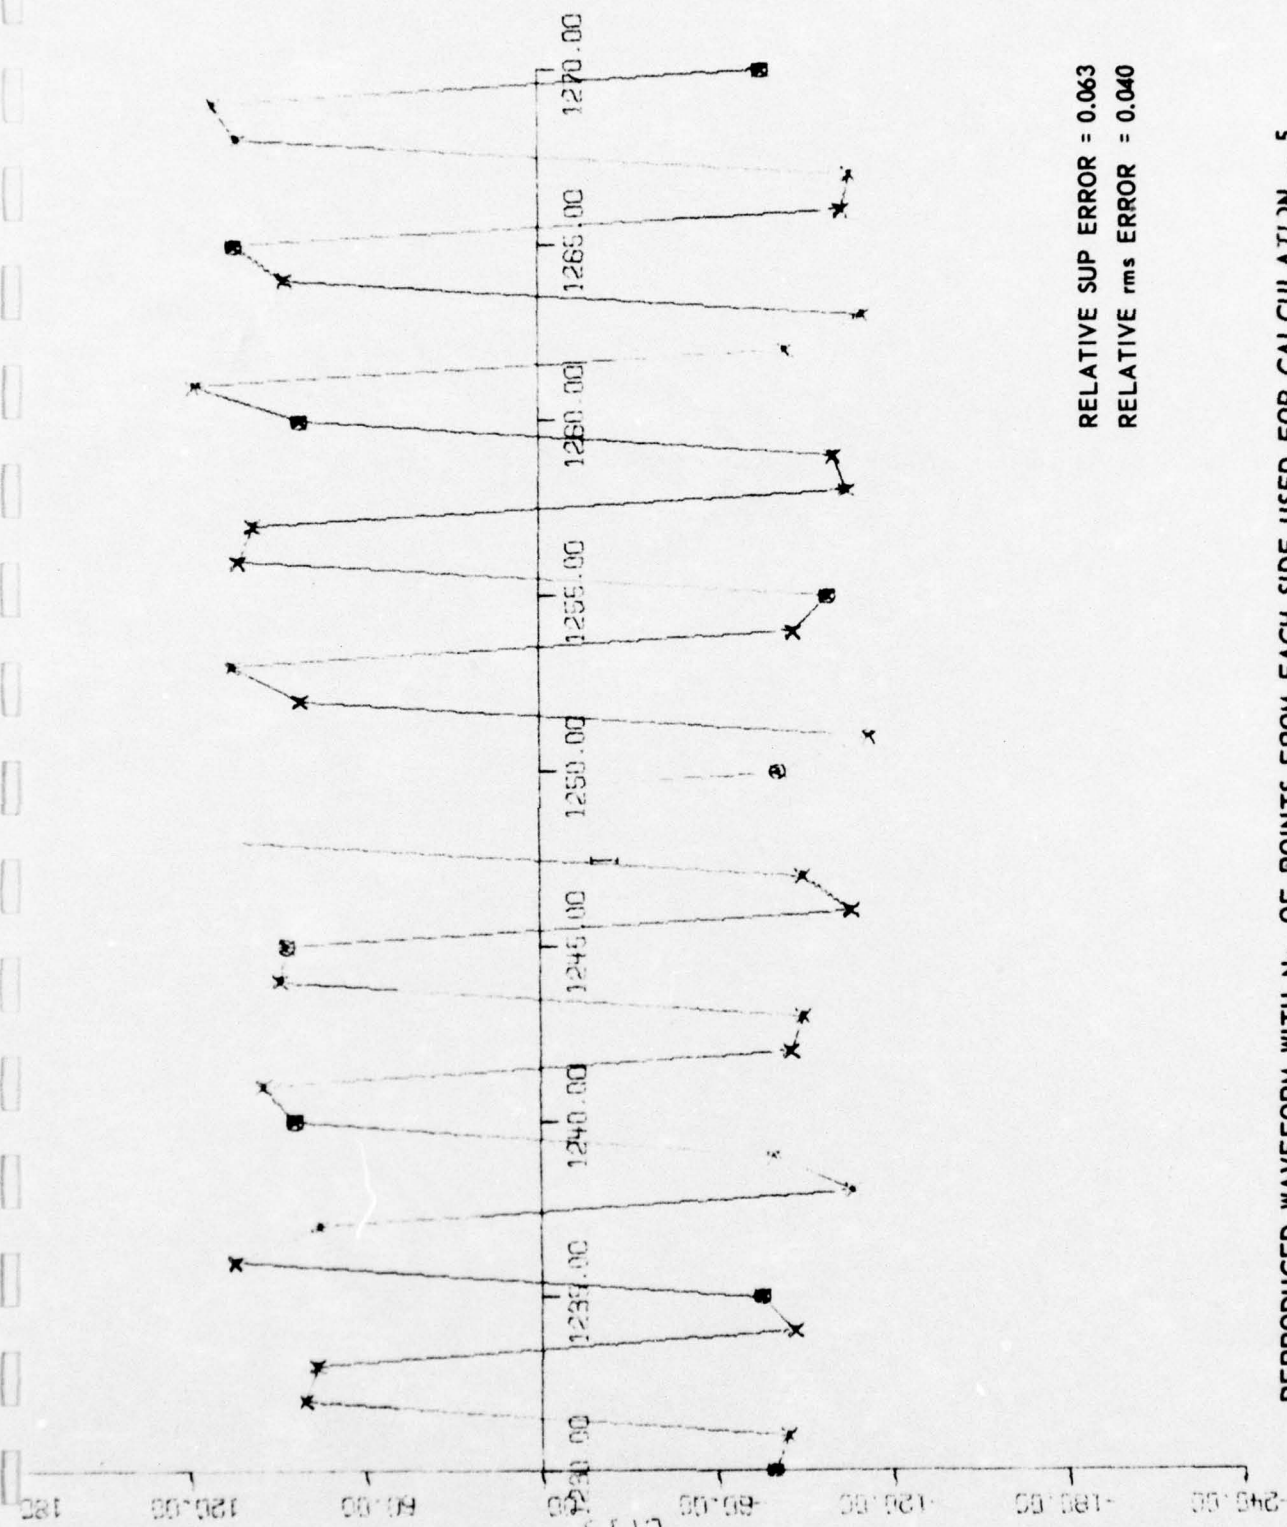

RELATIVE SUP ERROR = 0.063
 RELATIVE rms ERROR = 0.040

REPRODUCED WAVEFORM WITH NO. OF POINTS FROM EACH SIDE USED FOR CALCULATION - 5
 FILTERED BY BPF1 (3 kHz - 7 kHz)


DRL . . . UT
 DWG AS-67-666
 GSI . . . EJW
 6 - 20 - 67

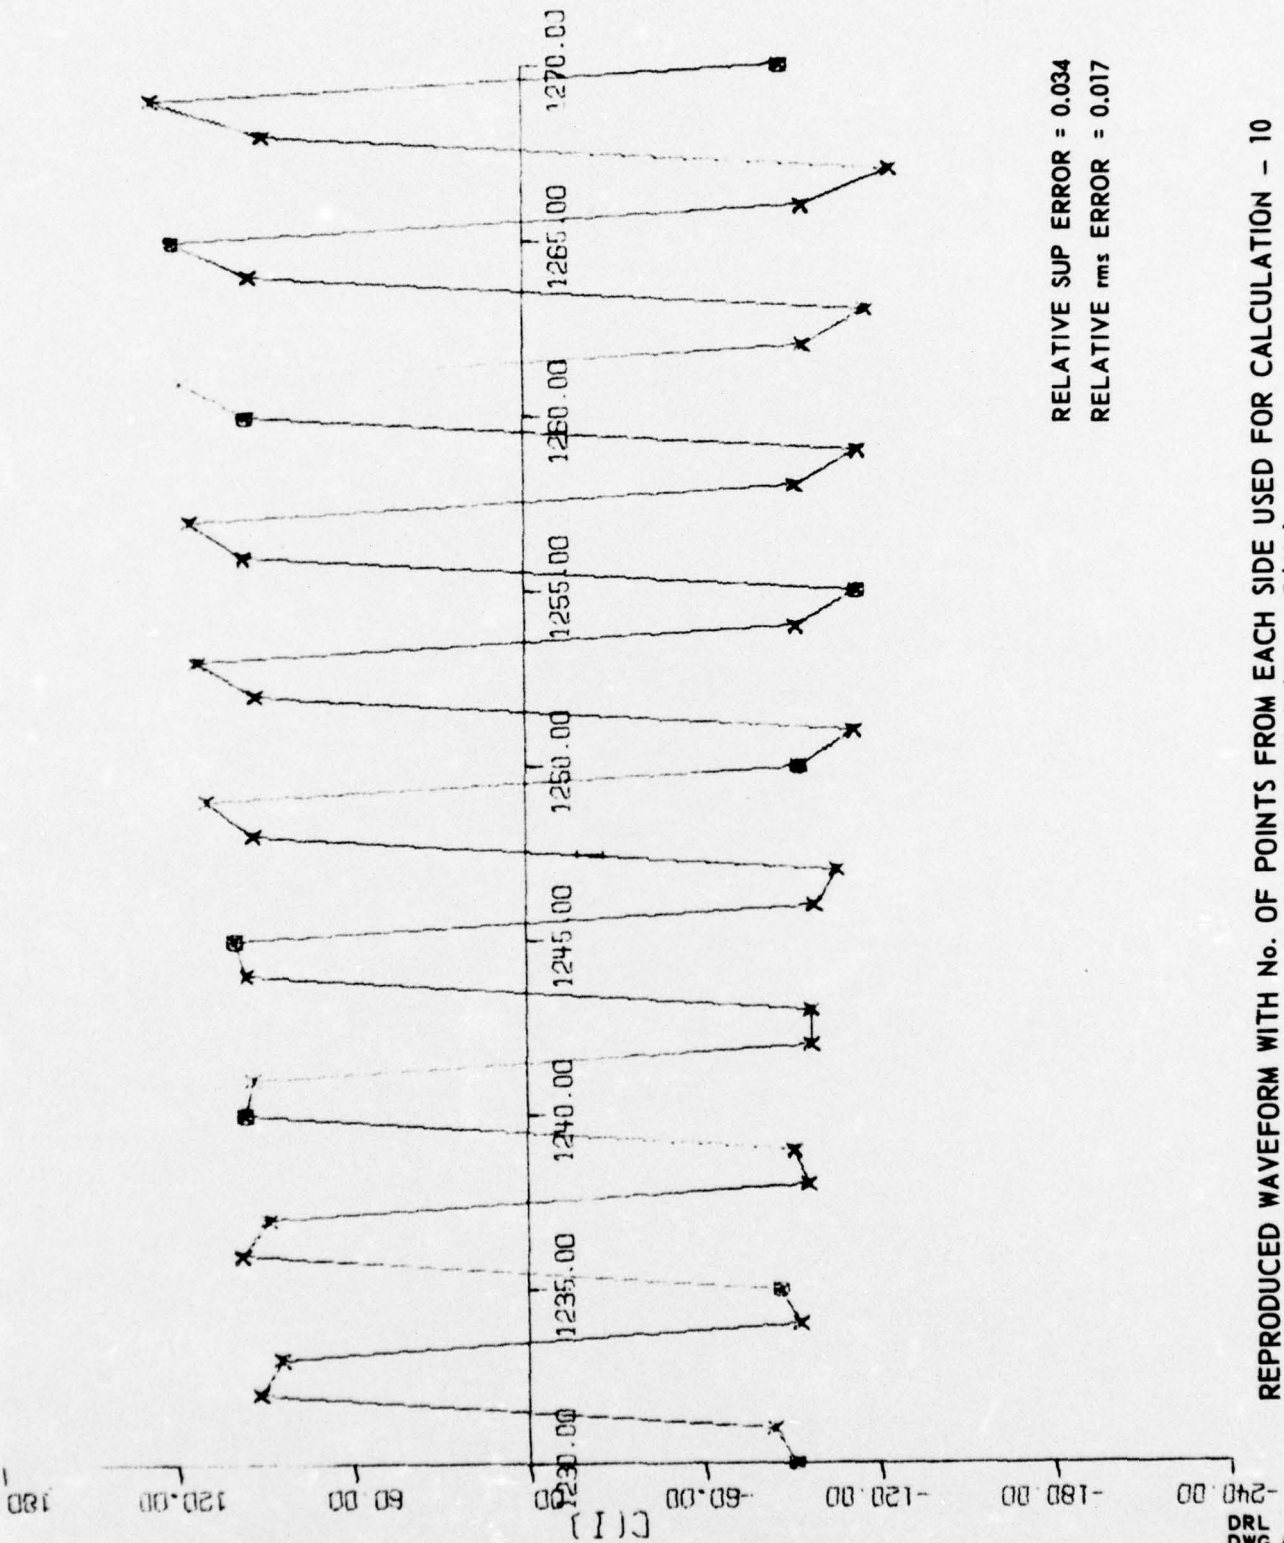

RELATIVE SUP ERROR = 0.034
RELATIVE rms ERROR = 0.017

REPRODUCED WAVEFORM WITH No. OF POINTS FROM EACH SIDE USED FOR CALCULATION - 10
FILTERED BY BPF1 (3 kHz - 7 kHz)


DRL - UT
DWG AS-67-667
GSI - EJW
6 - 20 - 67

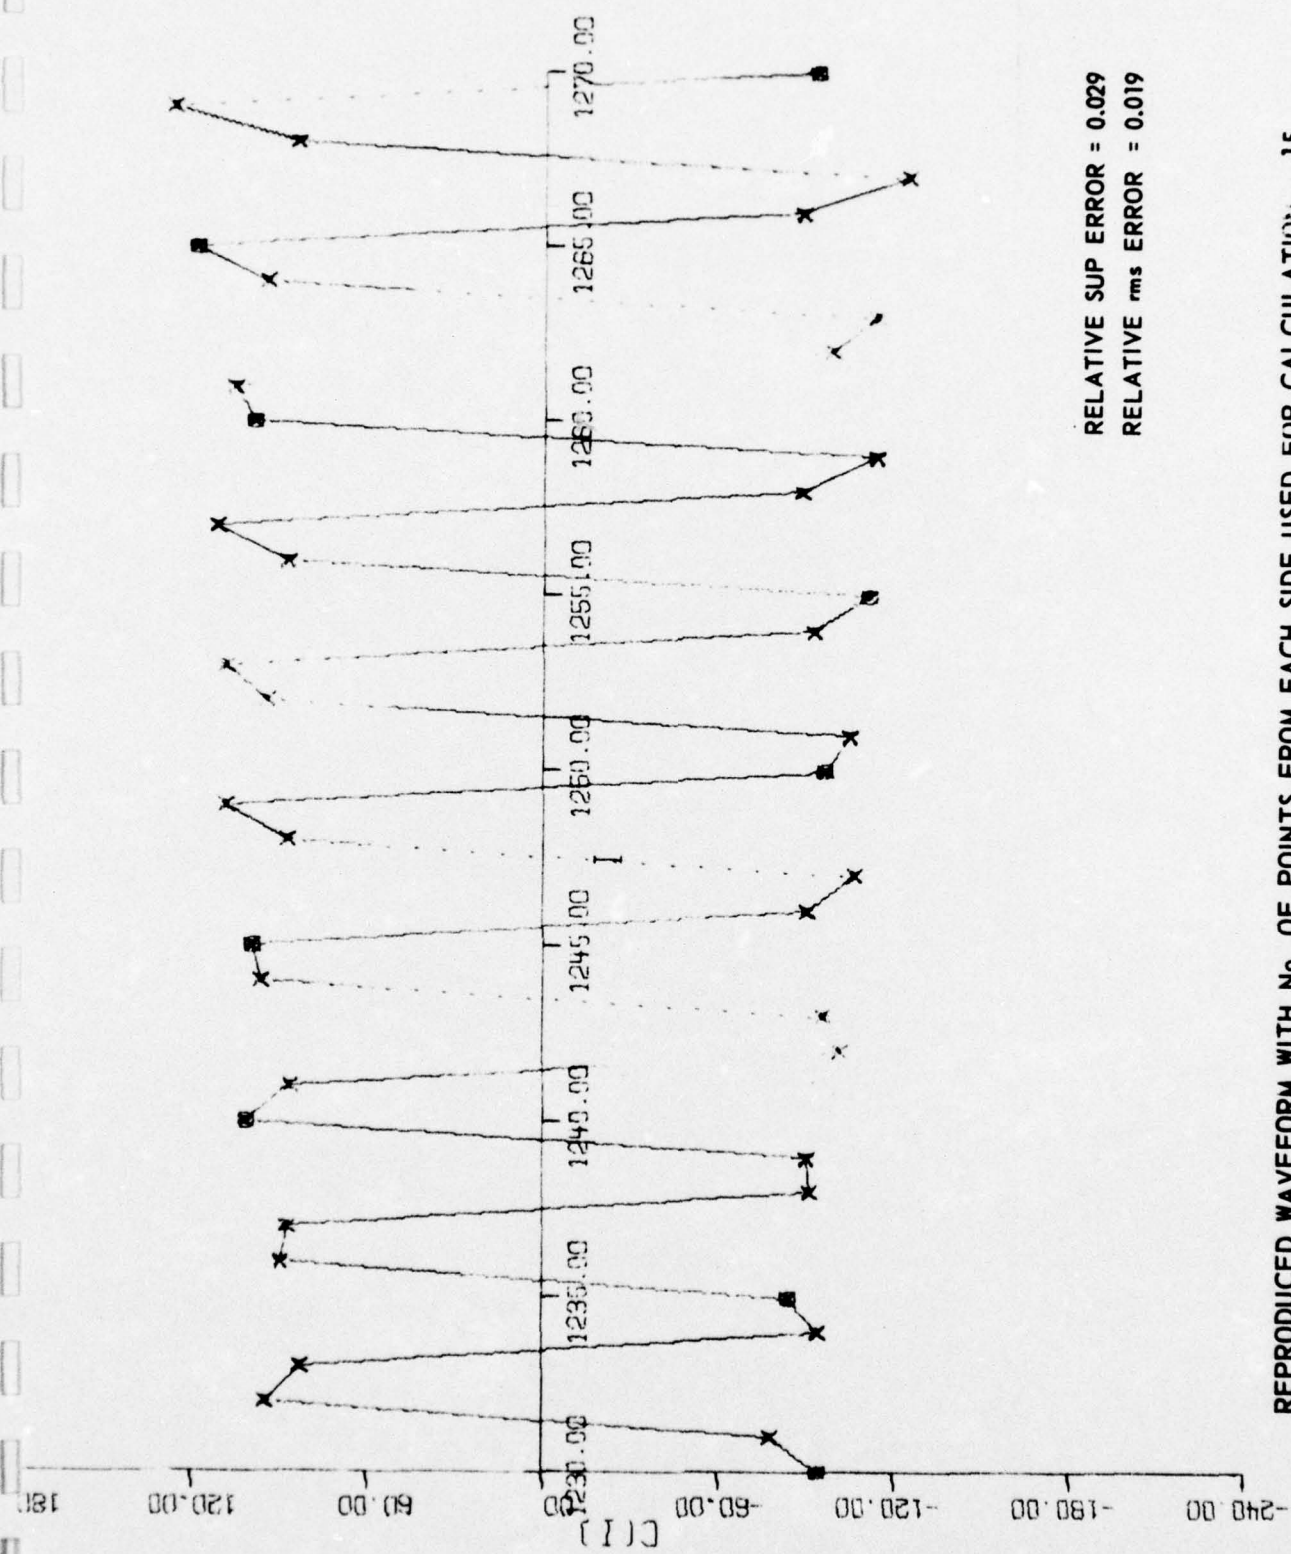

RELATIVE SUP ERROR = 0.029
RELATIVE rms ERROR = 0.019


REPRODUCED WAVEFORM WITH NO. OF POINTS FROM EACH SIDE USED FOR CALCULATION - 15
FILTERED BY BPF1 (3 kHz - 7 kHz)

DRL - UT
DWG AS-67-668
GSI - EJW
6 - 20 - 67

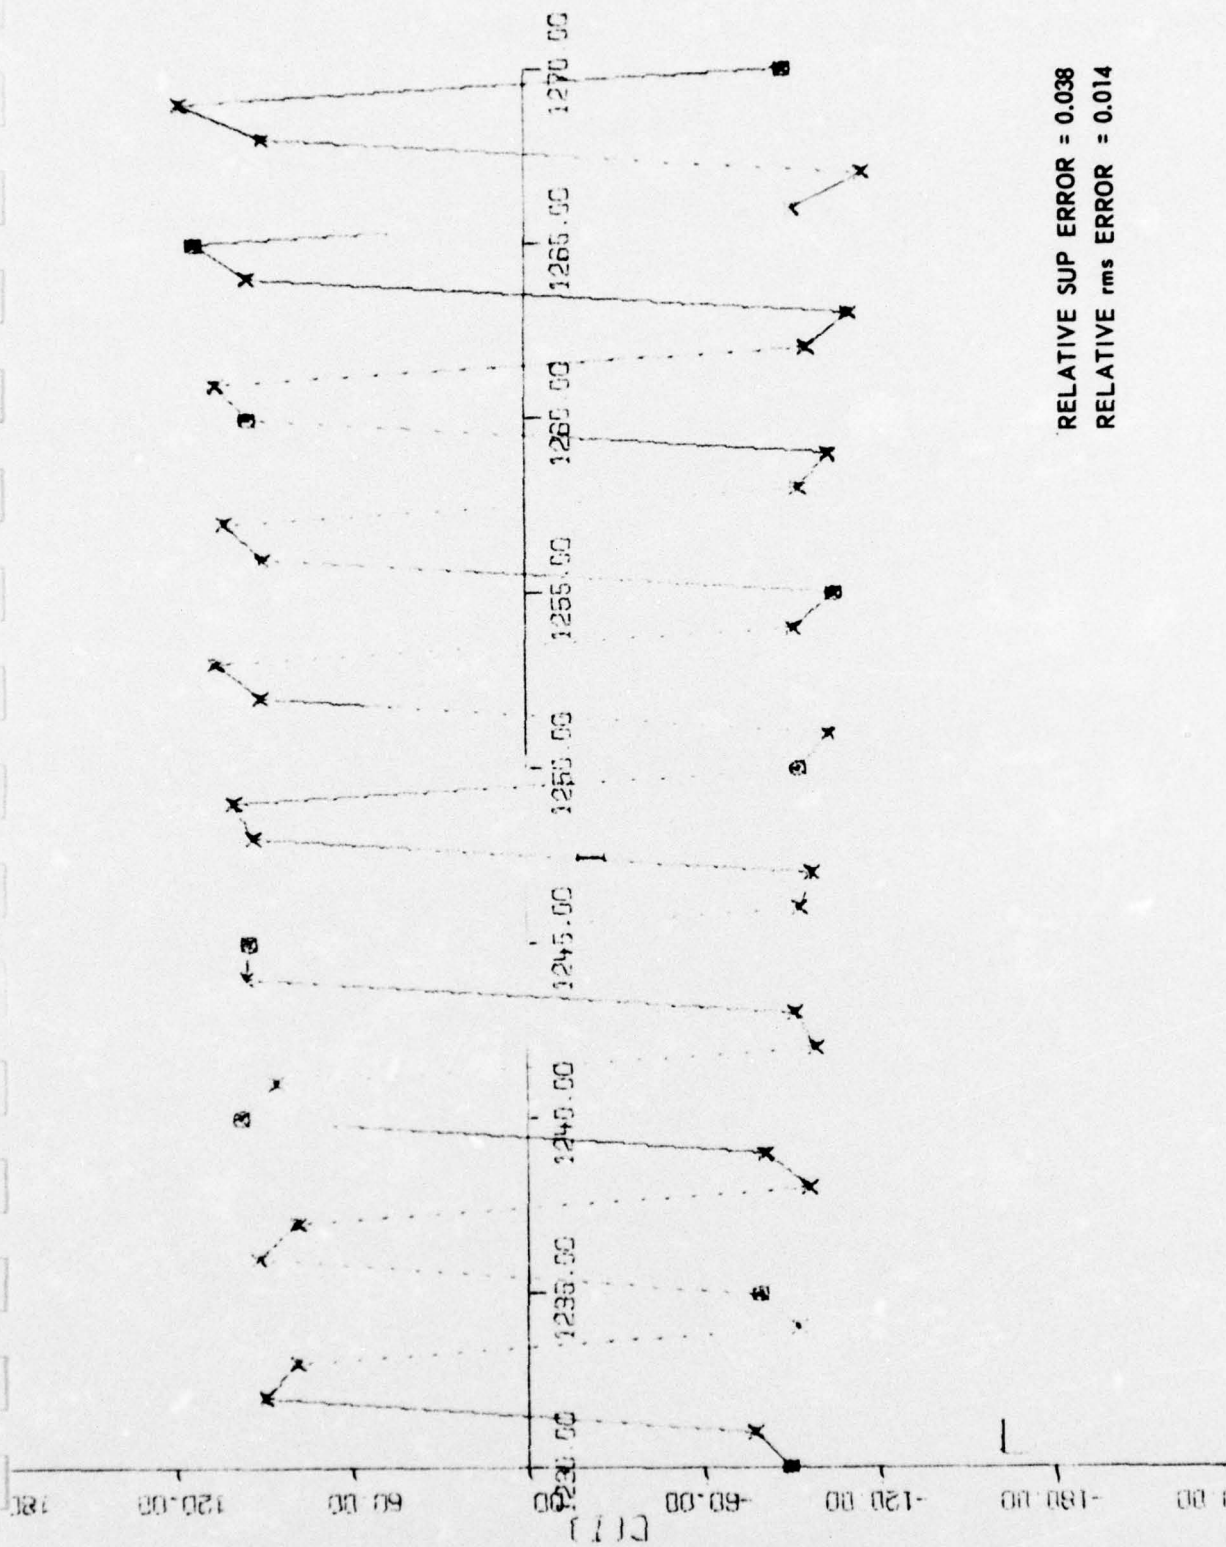


REPRODUCED WAVEFORM WITH No. OF POINTS FROM EACH SIDE USED FOR CALCULATION - 20
FILTERED BY BPF1 (3 kHz - 7 kHz)

DRL . UT
DWG AS-67-669
GSI . EJW
6 - 20 - 67

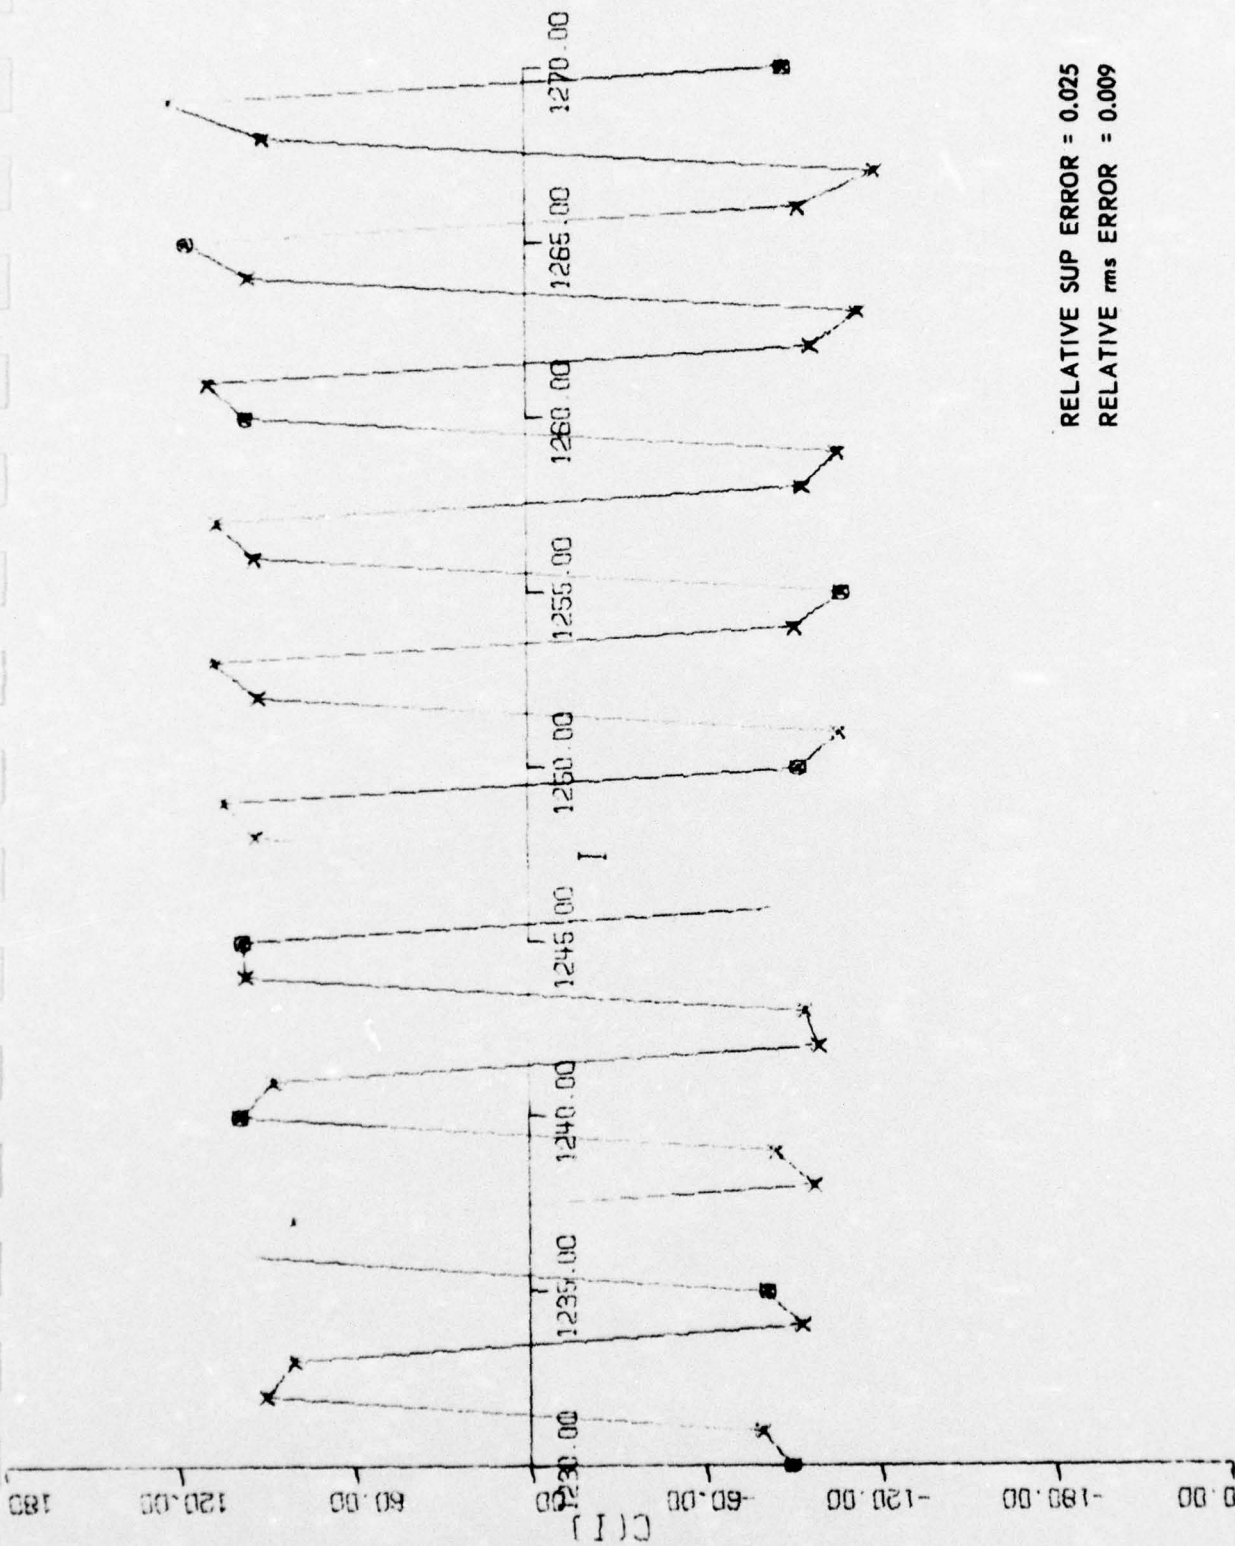

DRL . . . UT
DWG AS-67-670
GSI . . . EJW
6 - 20 - 67

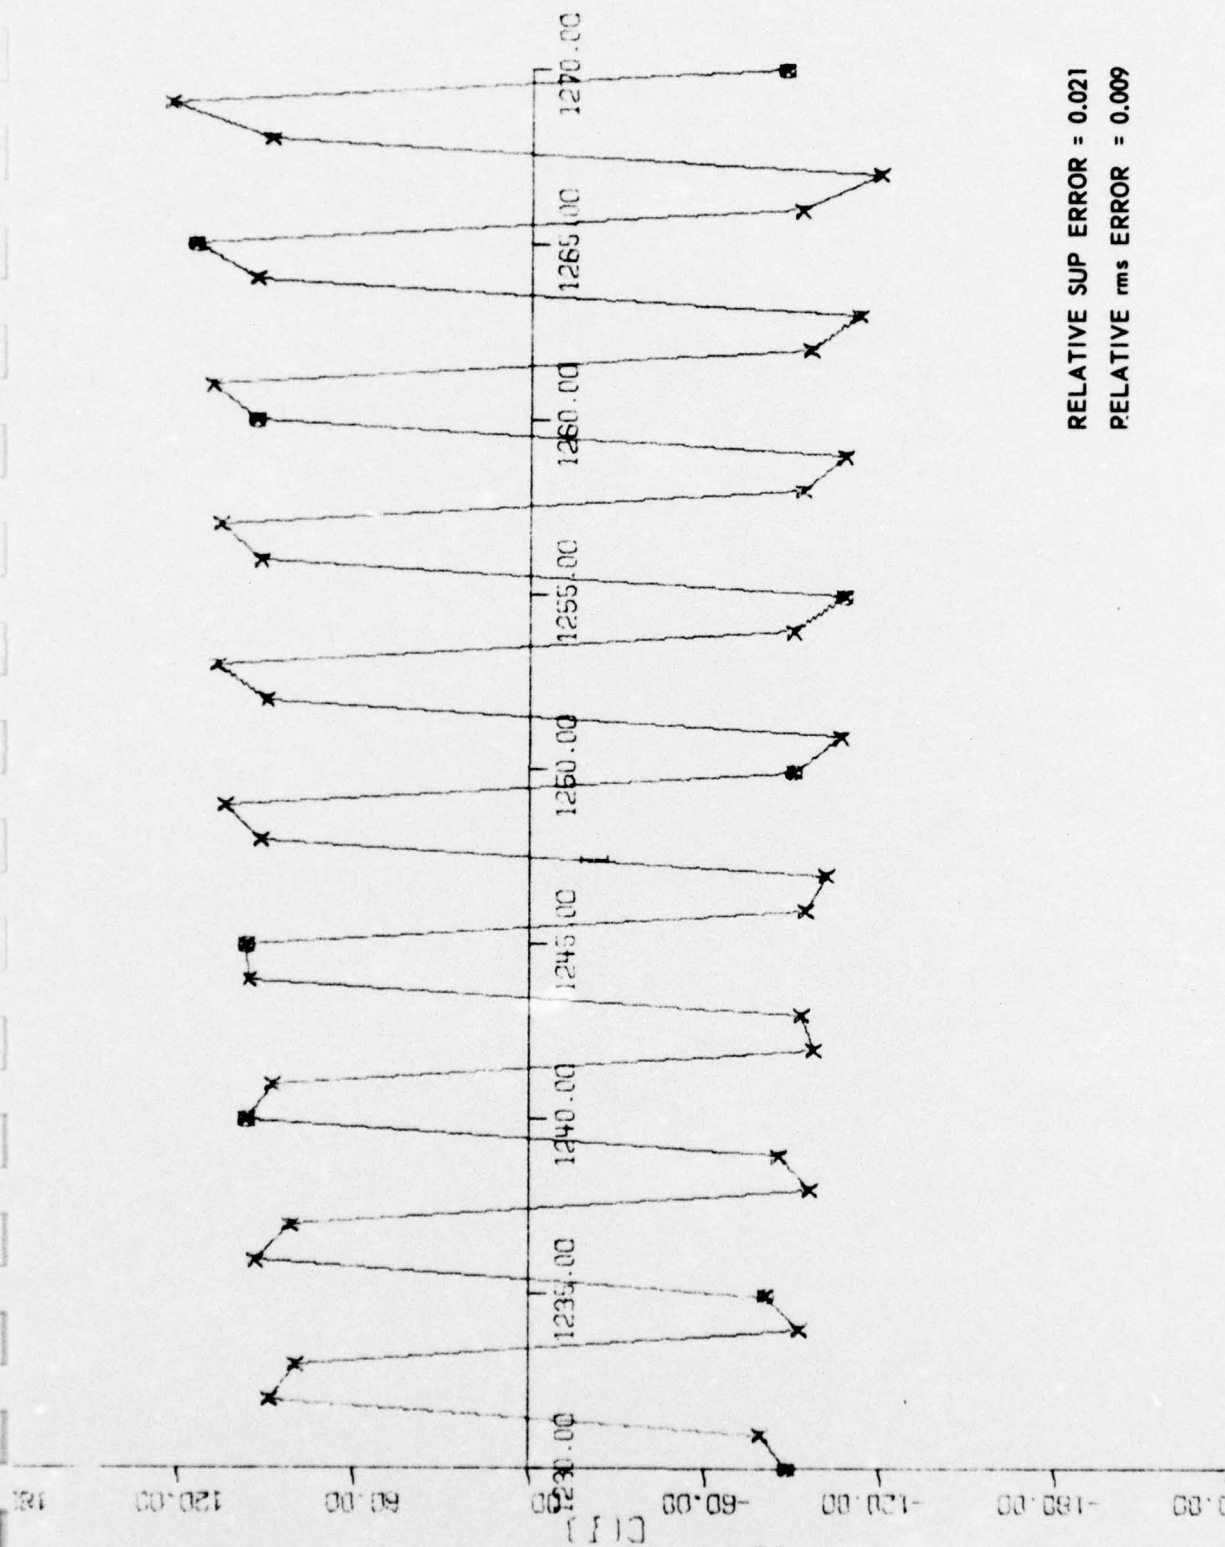

RELATIVE SUP ERROR = 0.021
RELATIVE rms ERROR = 0.009

REPRODUCED WAVEFORM WITH No. OF POINTS FROM EACH SIDE USED FOR CALCULATION -- 200
FILTERED BY BPF1 (3 kHz - 7 kHz)


DRL . UT
DWG AS-67-671
GSI . EJW
A . 20 . 67

VIII.

- D. Effect of Shannon's Theorem with Data Filtered
By BPF2 (4 kHz-6 kHz), Illustrated by Graphs

VIII.

D. 1. Using Every Third Point (LP = 3)

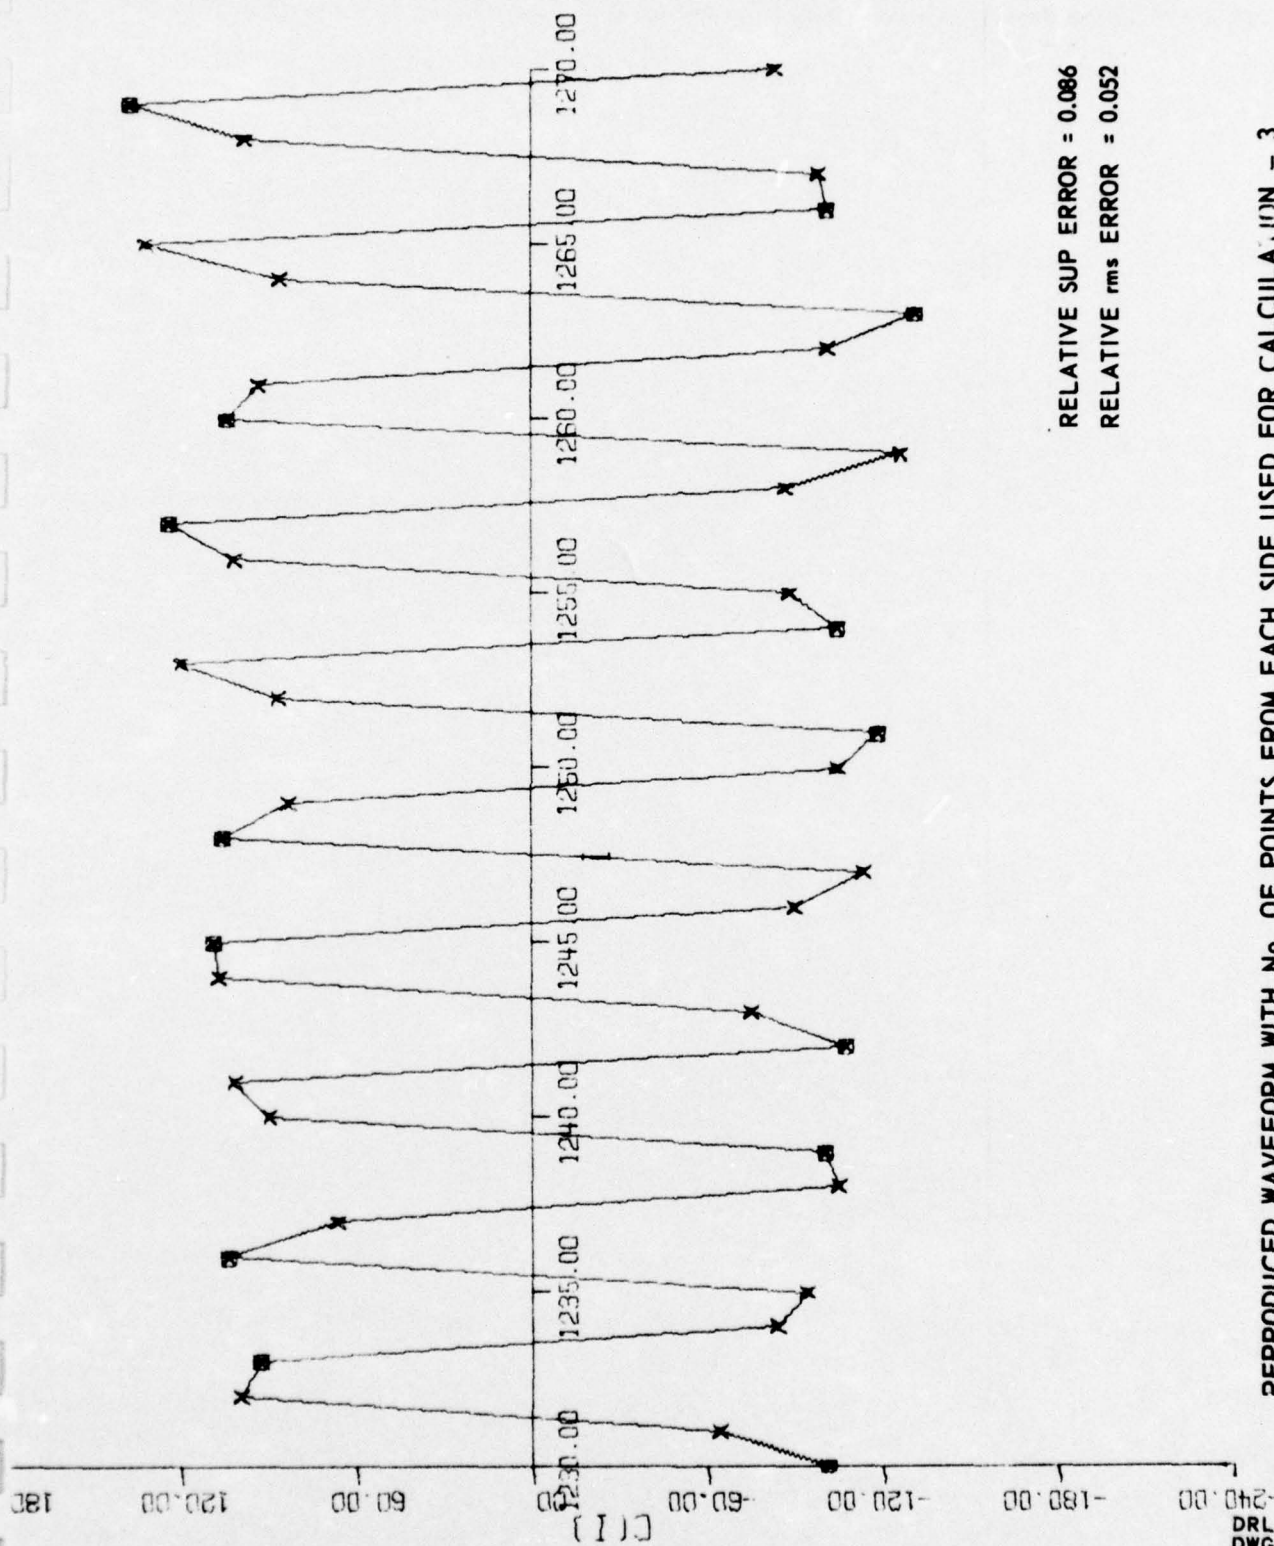


RELATIVE SUP ERROR = 0.086
RELATIVE rms ERROR = 0.052


REPRODUCED WAVEFORM WITH No. OF POINTS FROM EACH SIDE USED FOR CALCULATION - 3
FILTERED BY BPF2 (4 kHz - 6 kHz)

DRL - UT
DWG AS-67-672
GSI - EJW
6 - 20 - 67

RELATIVE SUP ERROR = 0.053
 RELATIVE rms ERROR = 0.033

REPRODUCED WAVEFORM WITH NO. OF POINTS FROM EACH SIDE USED FOR CALCULATION - 5
 FILTERED BY BPF2 (4 kHz - 6 kHz)

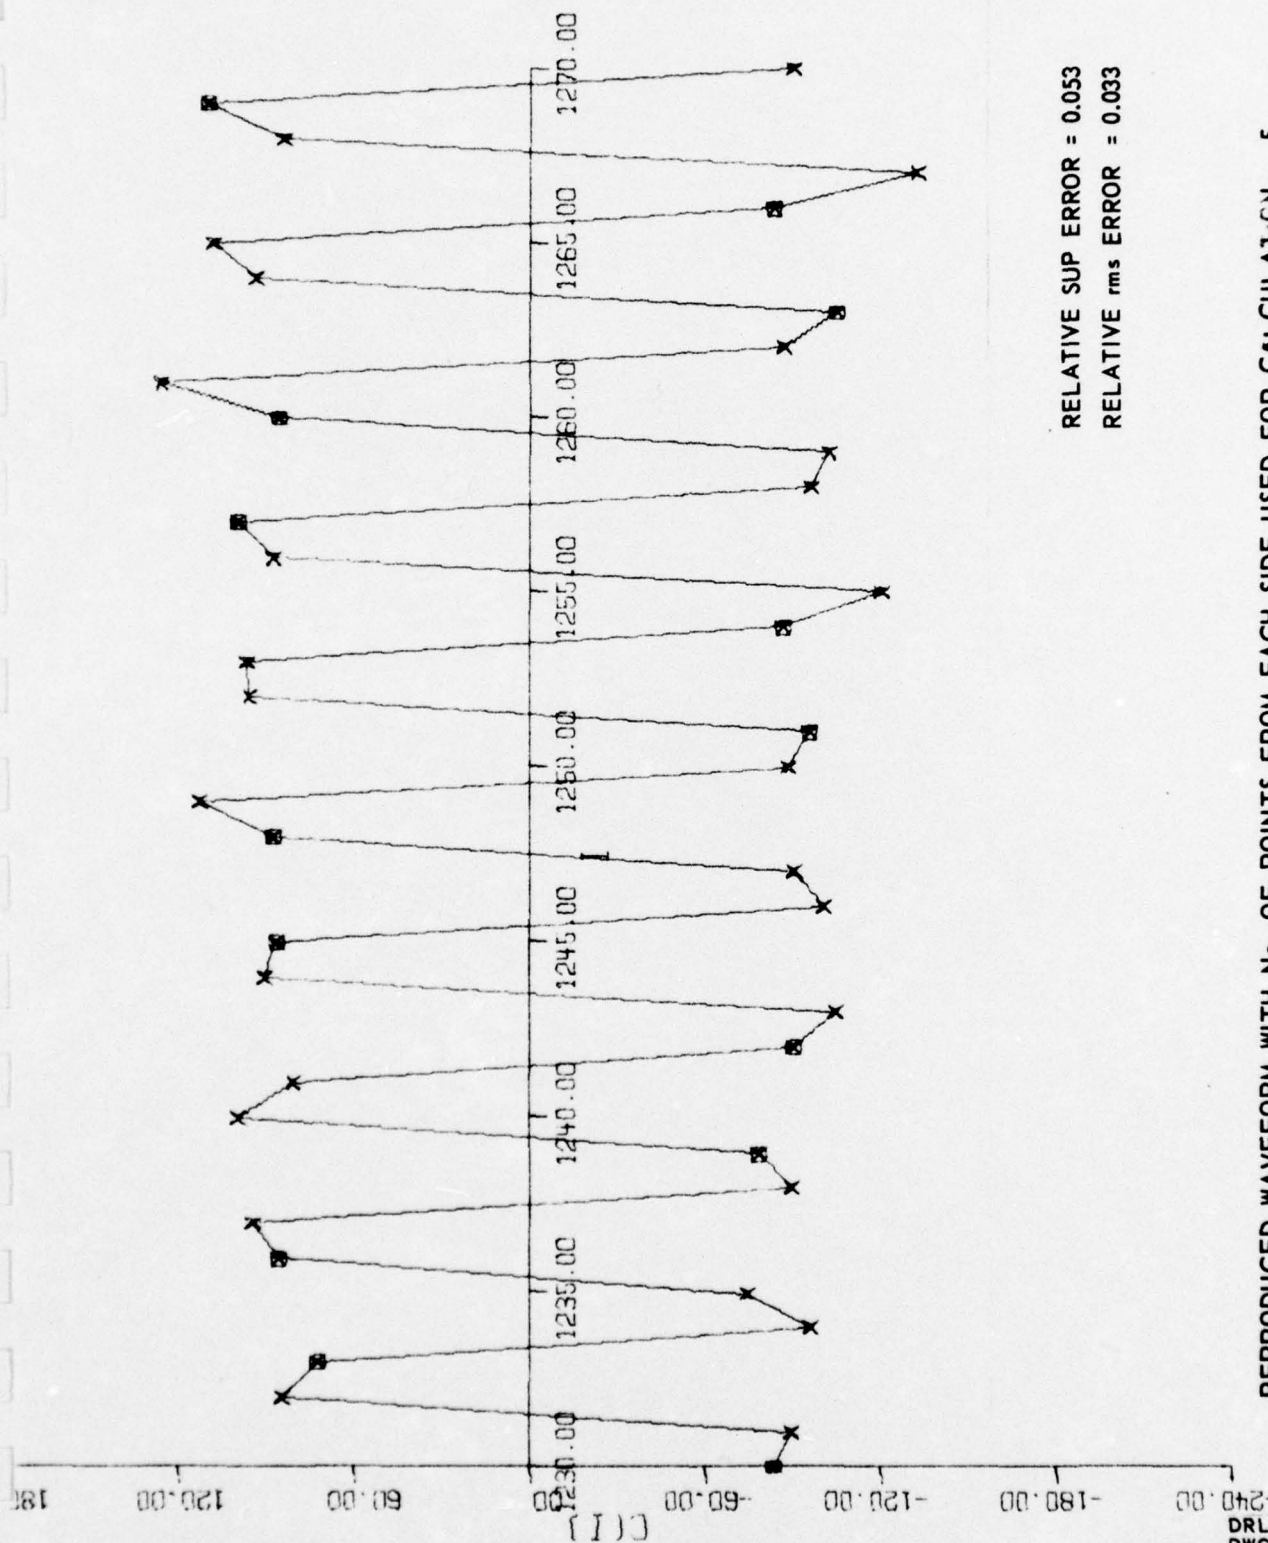


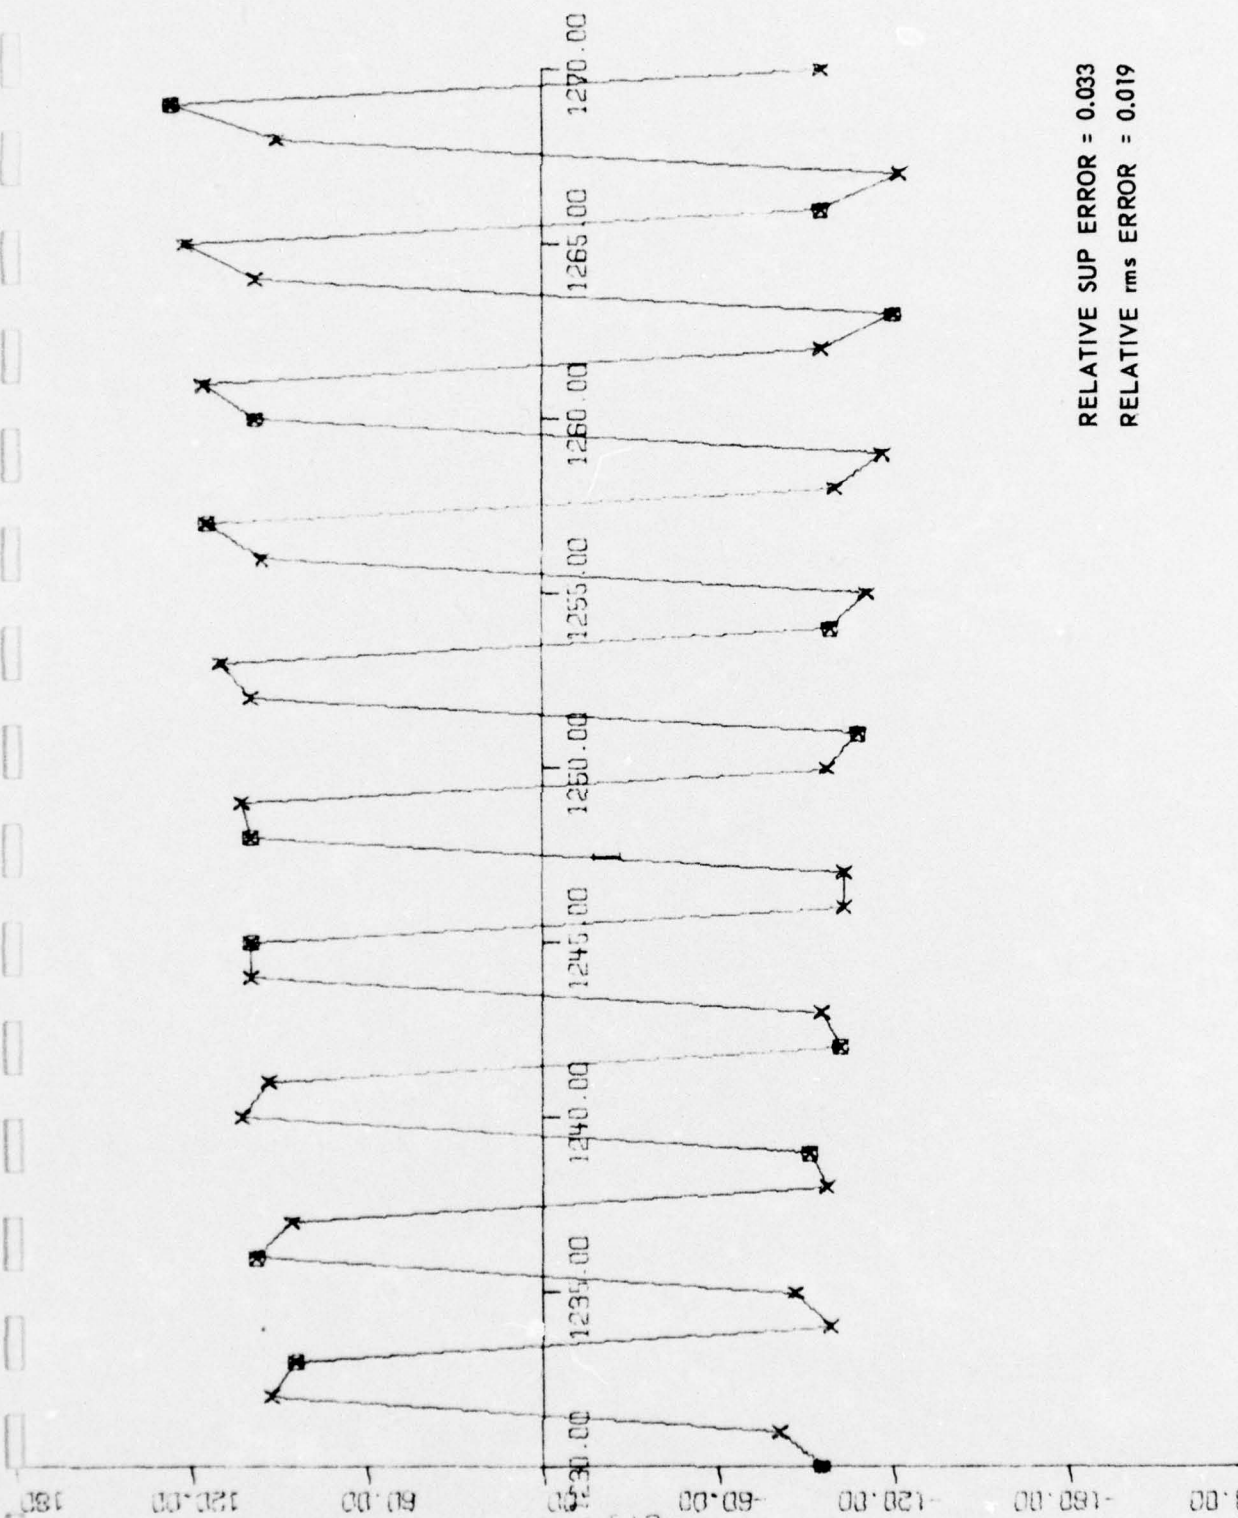

RELATIVE SUP ERROR = 0.033
RELATIVE rms ERROR = 0.019

REPRODUCED WAVEFORM WITH NO. OF POINTS FROM EACH SIDE USED FOR CALCULATION ~ 10
FILTERED BY BPF2 (4 kHz - 6 kHz)


DRL - UT
DWG AS-67-674
GSI - EJW
6 - 20 - 67

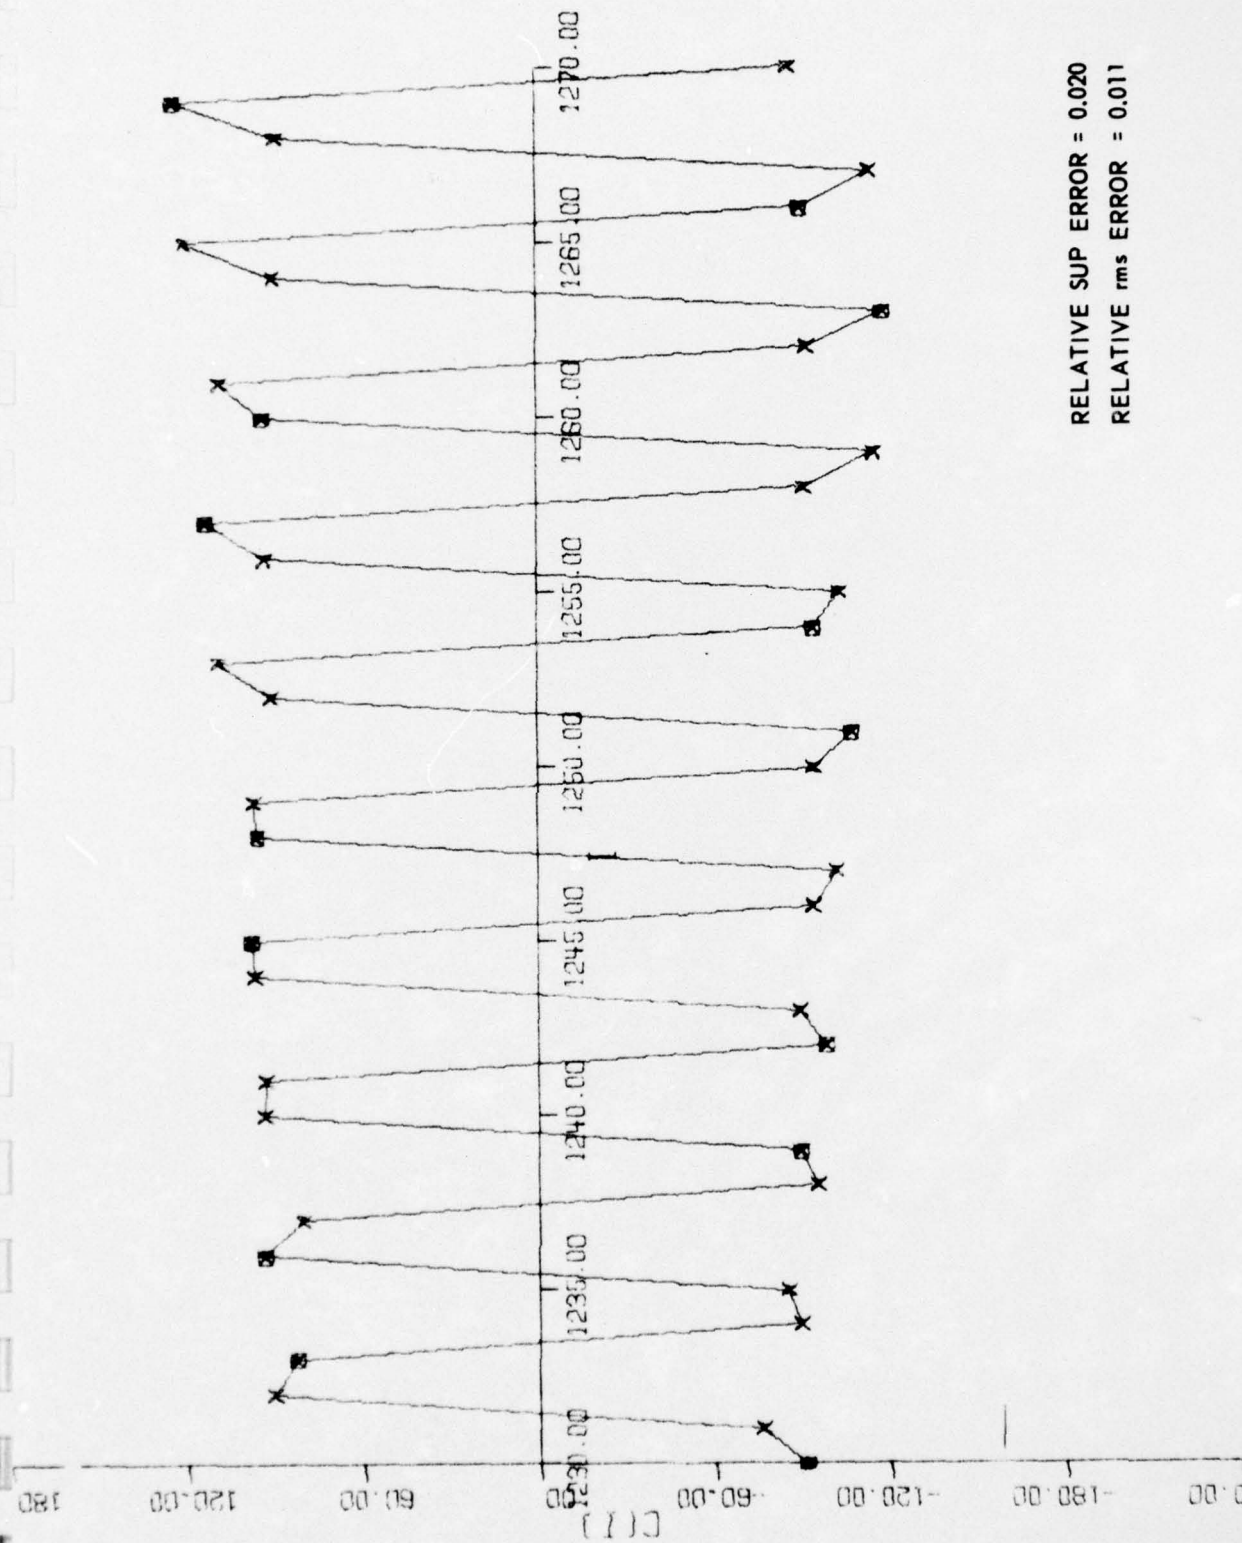

RELATIVE SUP ERROR = 0.020
RELATIVE rms ERROR = 0.011


REPRODUCED WAVEFORM WITH NO. OF POINTS FROM EACH SIDE USED FOR CALCULATION - 15
FILTERED BY BPF2 (4 kHz - 6 kHz)

DRL - UT
DWG AS-67-675
GSI - EJW
6 - 20 - 67

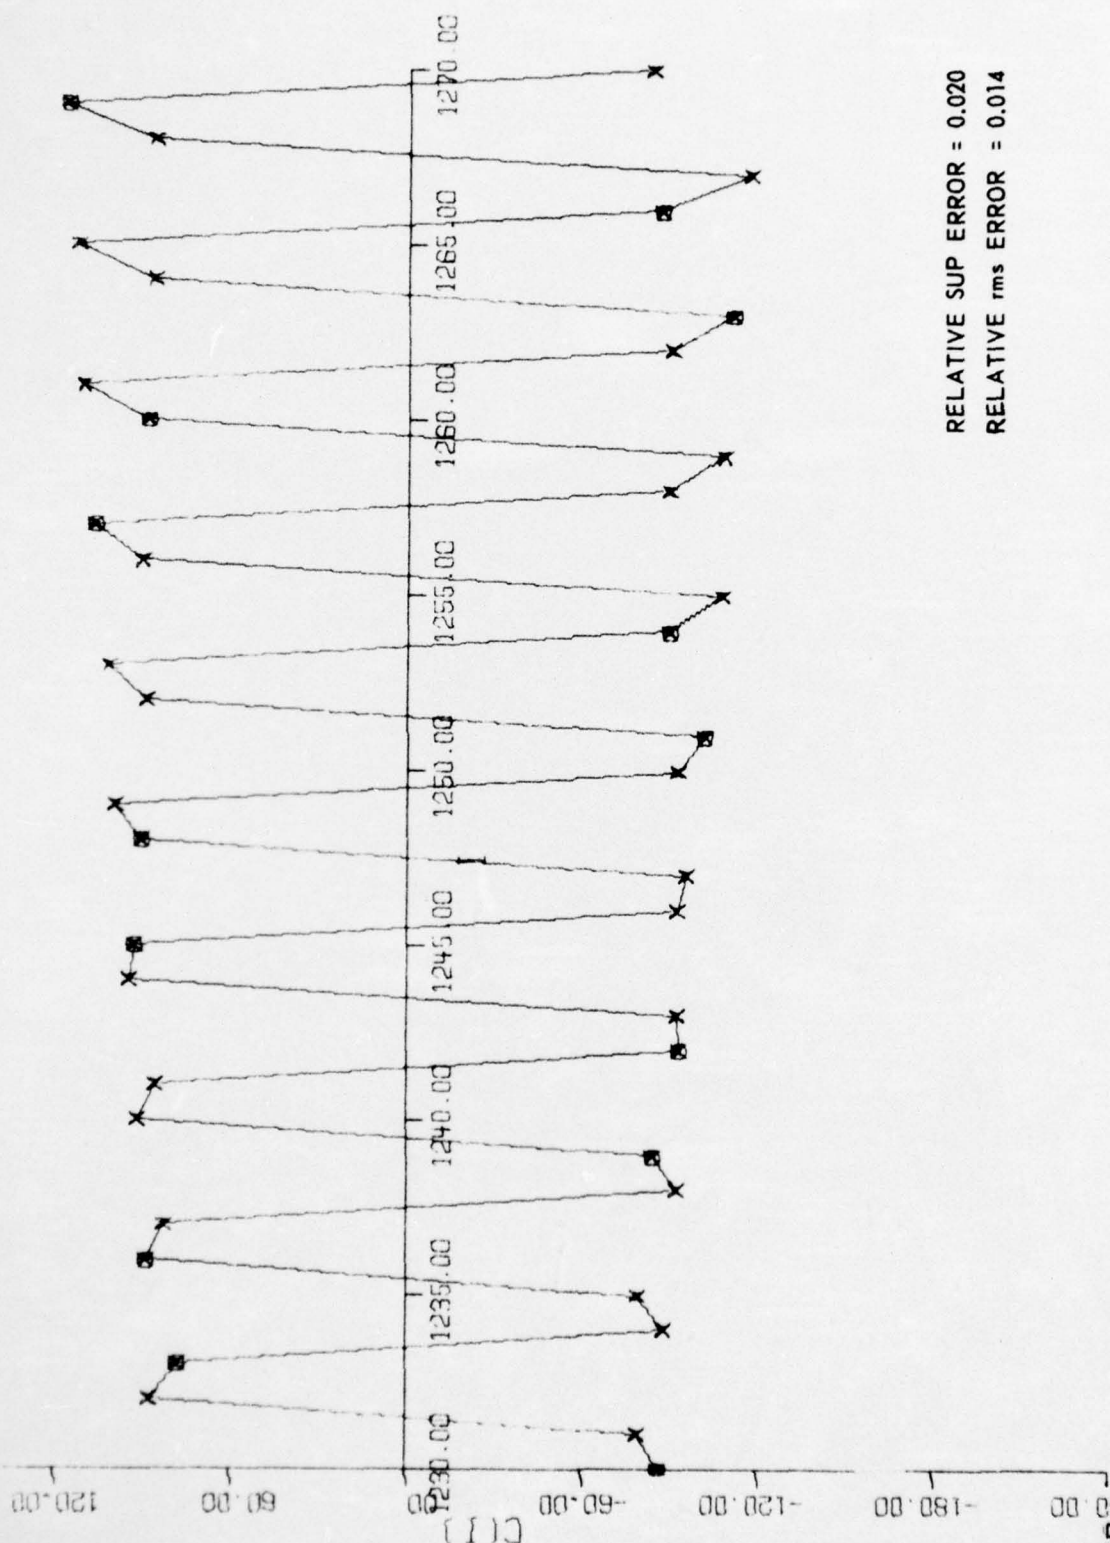


RELATIVE SUP ERROR = 0.020
RELATIVE rms ERROR = 0.014

REPRODUCED WAVEFORM WITH No. OF POINTS FROM EACH SIDE USED FOR CALCULATION - 20
FILTERED BY BPF2 (4 kHz - 6 kHz)

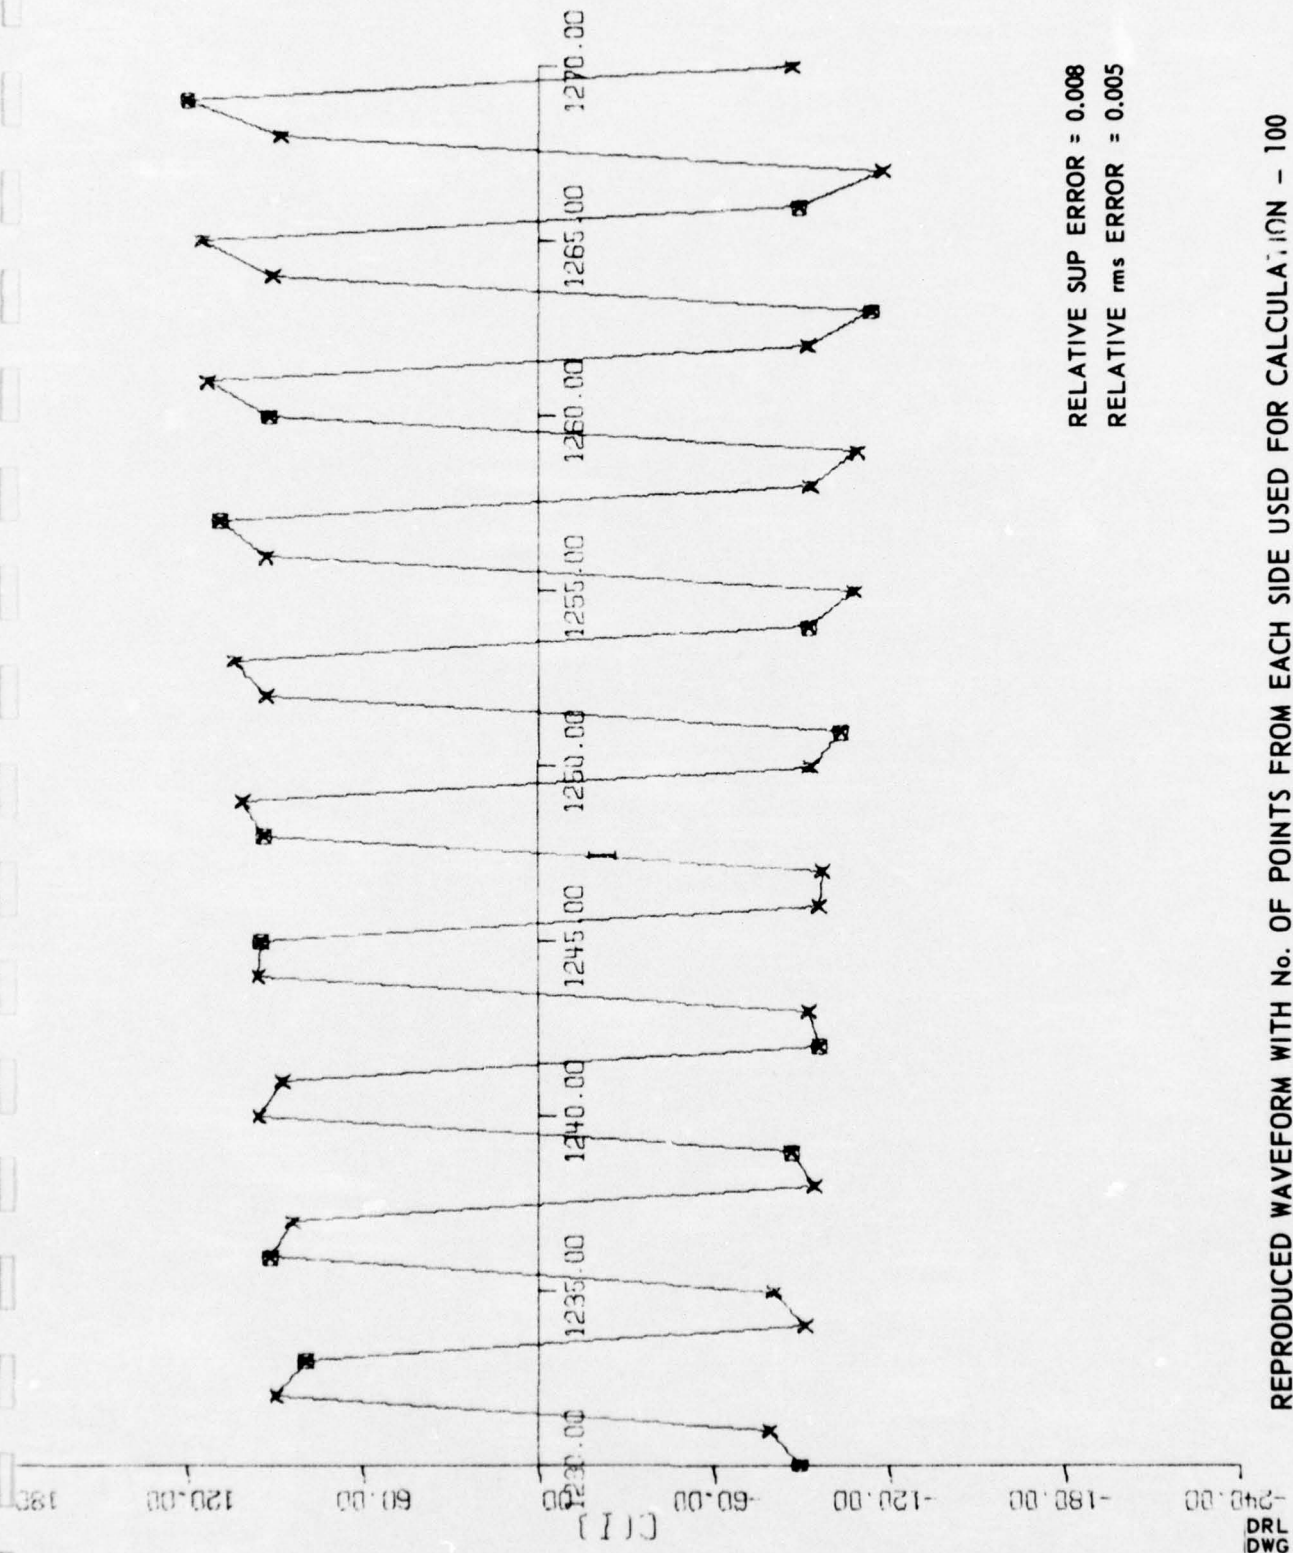

RELATIVE SUP ERROR = 0.008
 RELATIVE rms ERROR = 0.005

REPRODUCED WAVEFORM WITH No. OF POINTS FROM EACH SIDE USED FOR CALCULATION - 100
 FILTERED BY BPF2 (4 kHz - 6 kHz)

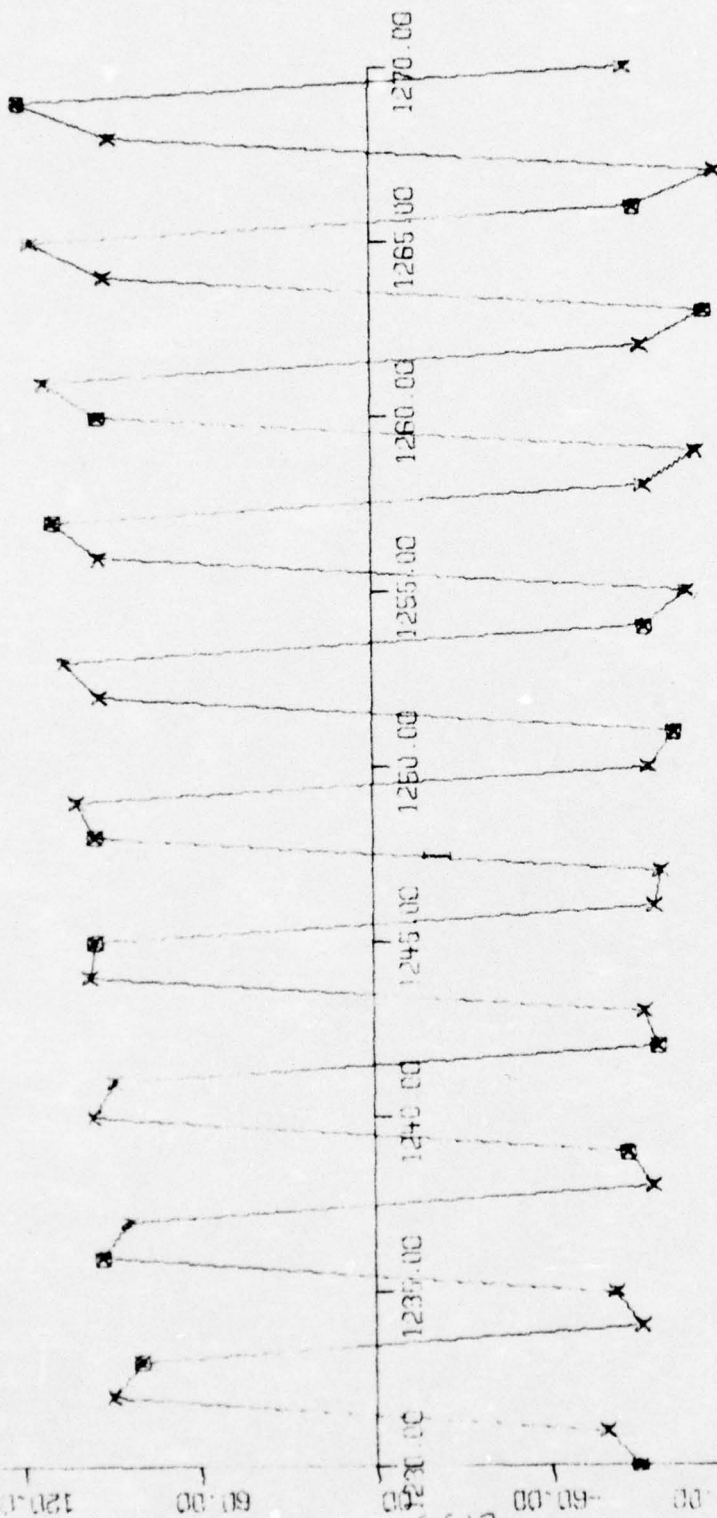


RELATIVE SUP ERROR = 0.004
RELATIVE rms ERROR = 0.003

REPRODUCED WAVEFORM WITH NO. OF POINTS FROM EACH SIDE USED FOR CALCULATION - 200
FILTERED BY BPF2 (4 kHz - 6 kHz)

DRL - UT
DWG AS-67-678
GSI - EJW
6 - 20 - 67


VIII.

D. 2. Using Every Fifth Point (LP = 5)

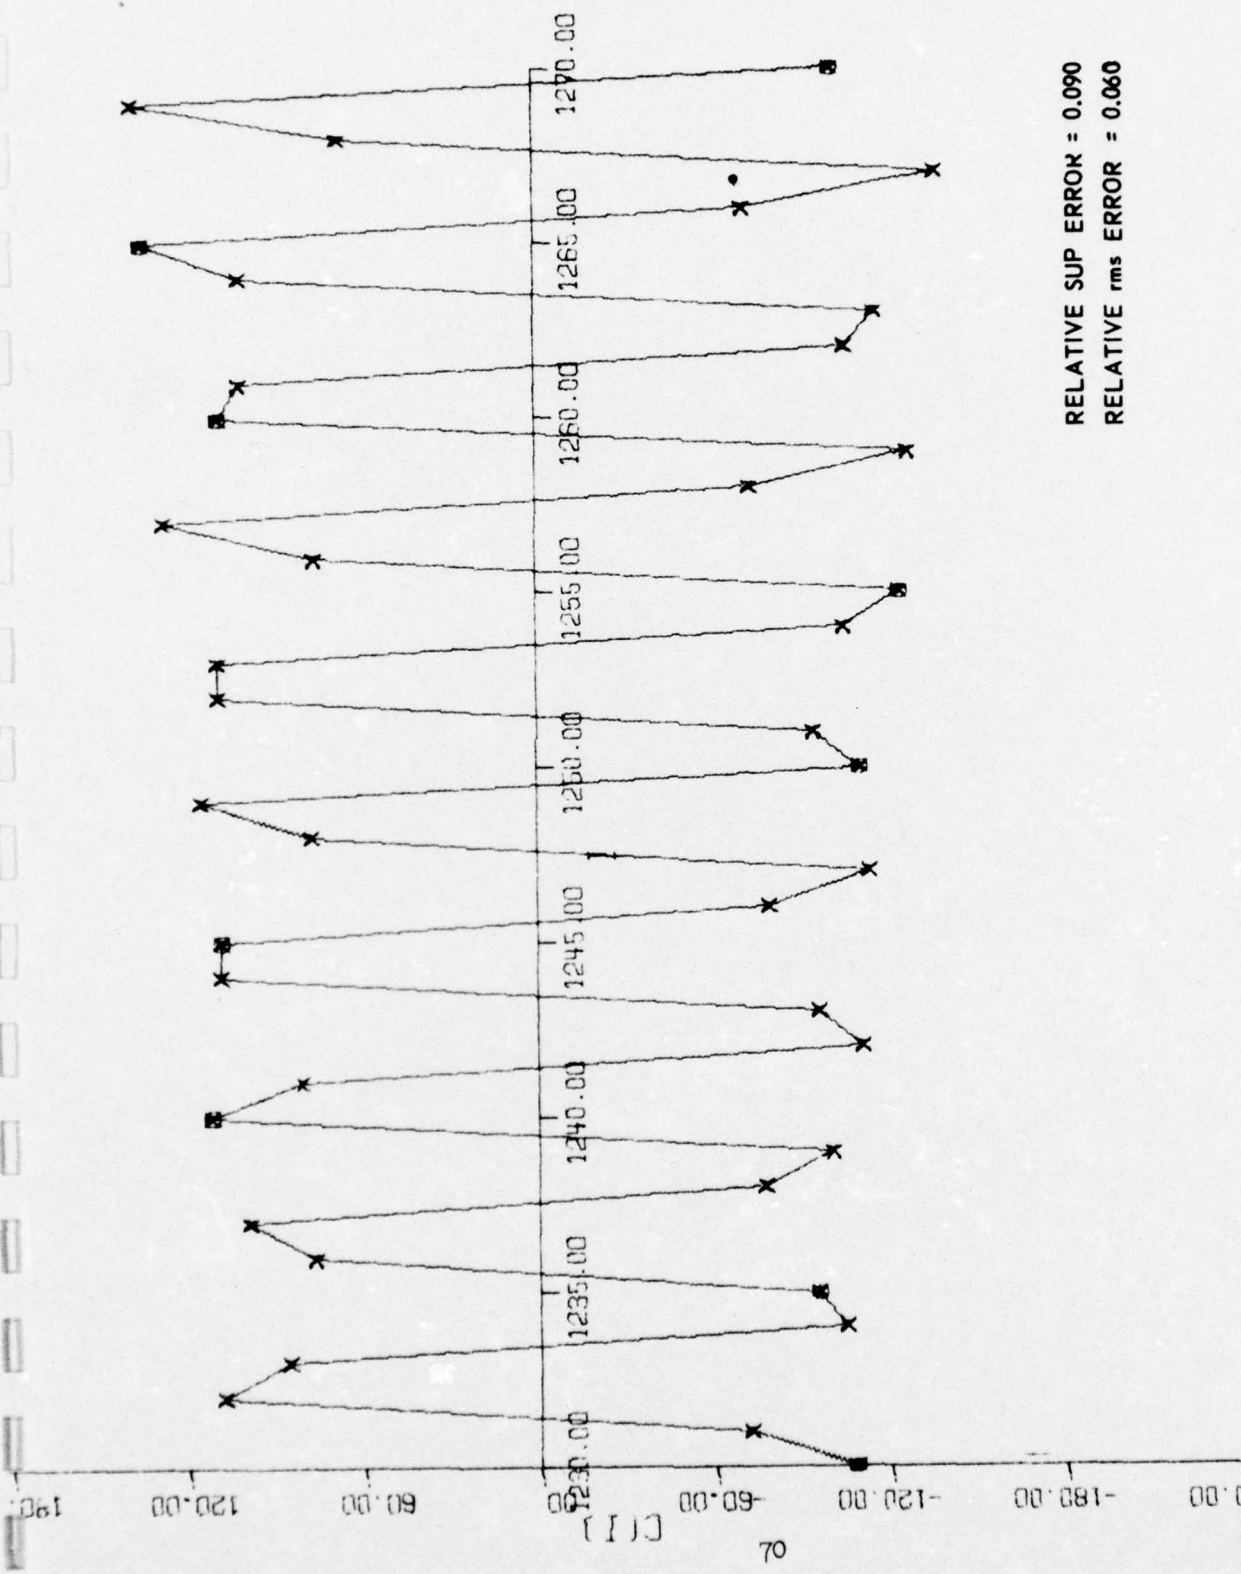

RELATIVE SUP ERROR = 0.090
RELATIVE rms ERROR = 0.060


REPRODUCED WAVEFORM WITH NO. OF POINTS FROM EACH SIDE USED FOR CALCULATION - 3
FILTERED BY BPF2 (4 kHz - 6 kHz)

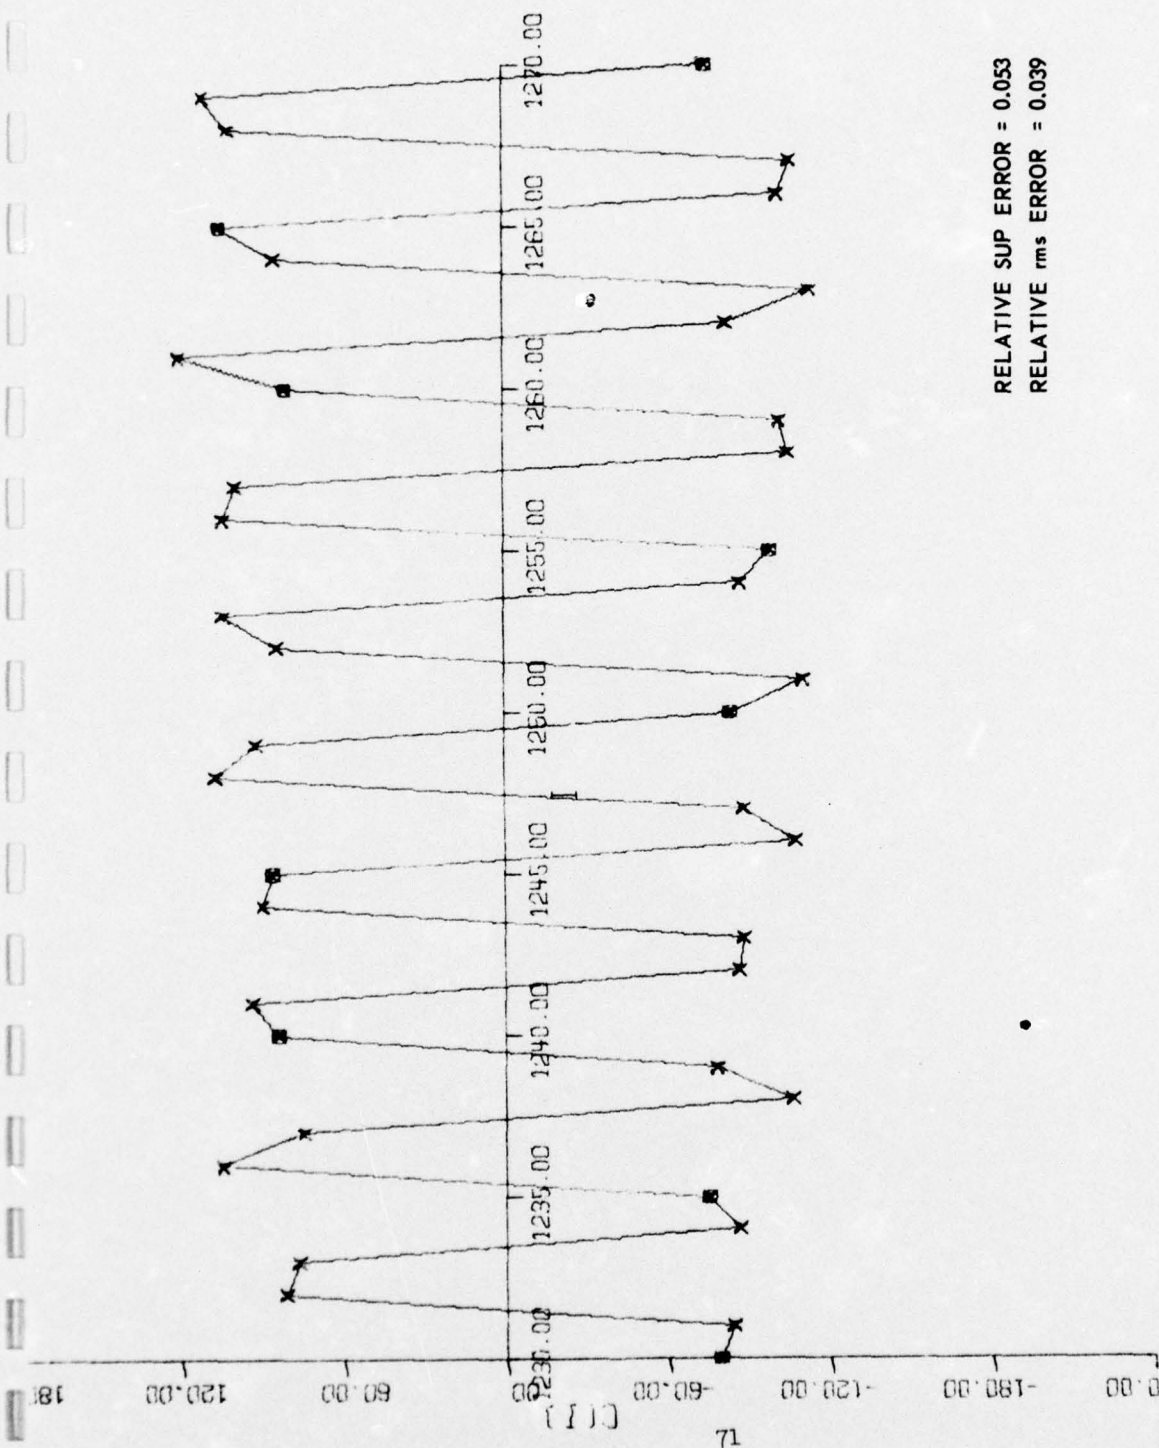

RELATIVE SUP ERROR = 0.053
 RELATIVE rms ERROR = 0.039

REPRODUCED WAVEFORM WITH NO. OF POINTS FROM EACH SIDE USED FOR CALCULATION - 5
 FILTERED BY BPF2 (4 kHz - 6 kHz)


DRL - UT
 DWG AS-67-680
 GSI - EJW
 4 - 20 - 67

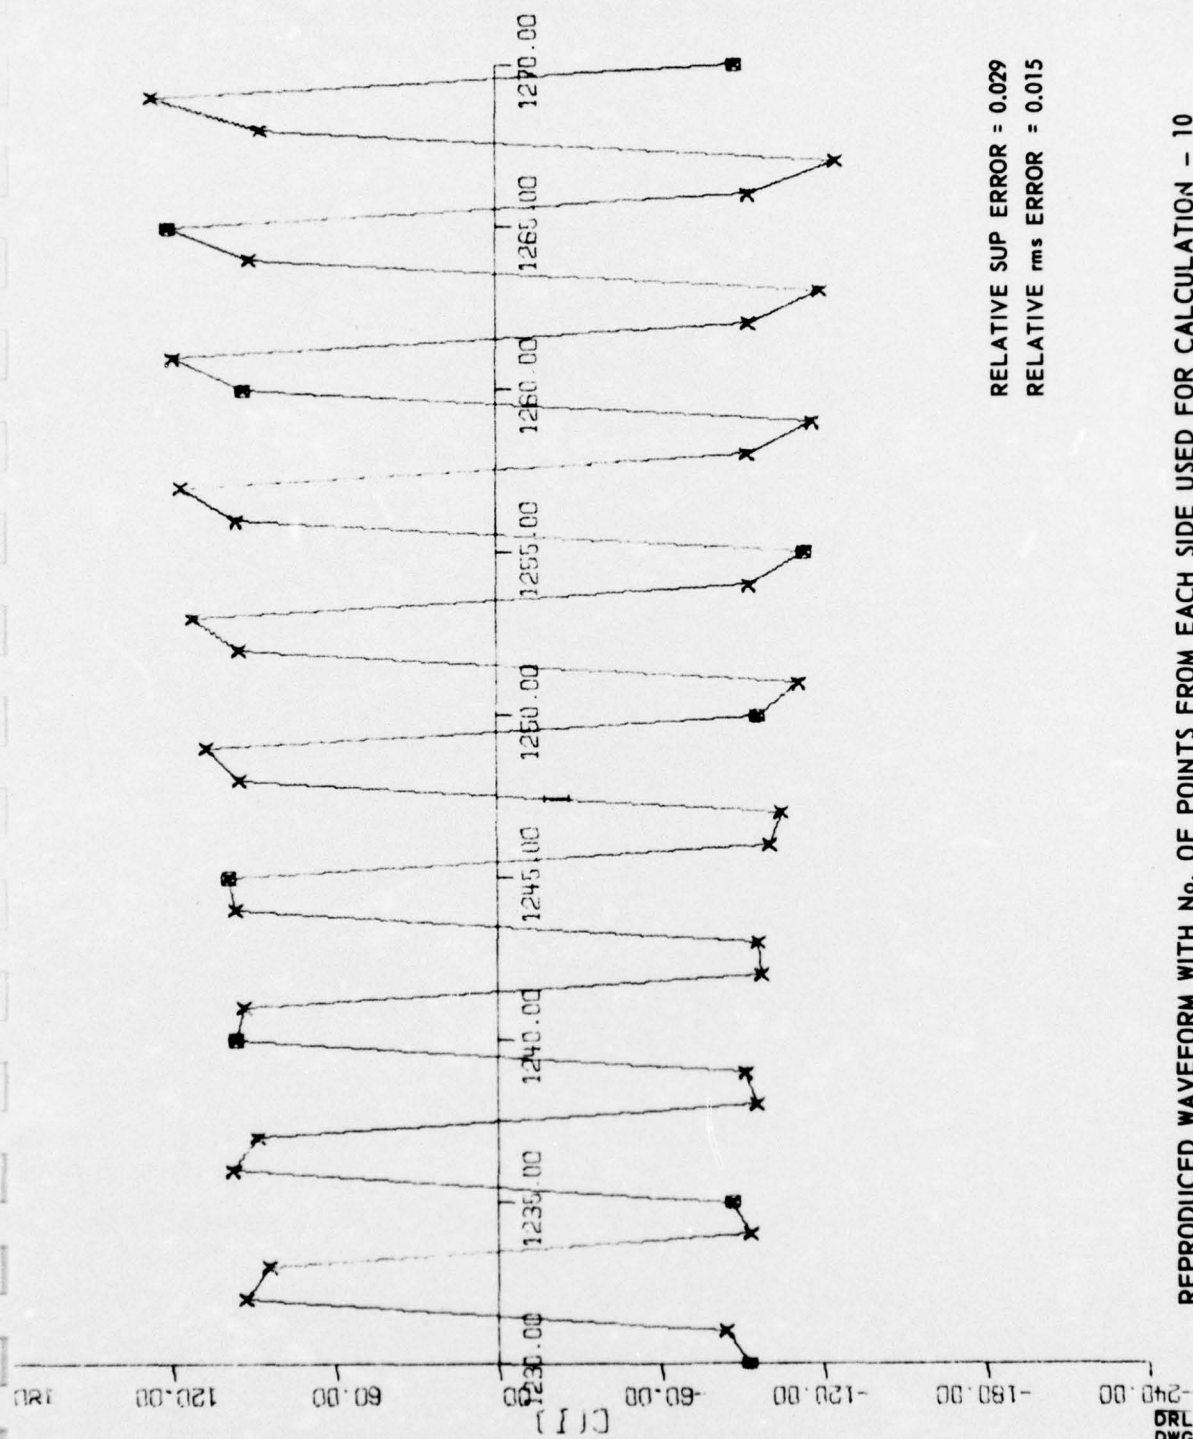

RELATIVE SUP ERROR = 0.029
RELATIVE rms ERROR = 0.015

REPRODUCED WAVEFORM WITH No. OF POINTS FROM EACH SIDE USED FOR CALCULATION - 10
FILTERED BY BPF2 (4 kHz - 6 kHz)


DRL - UT
DWG AS-67-681
SSI - EJW
6 - 20 - 67

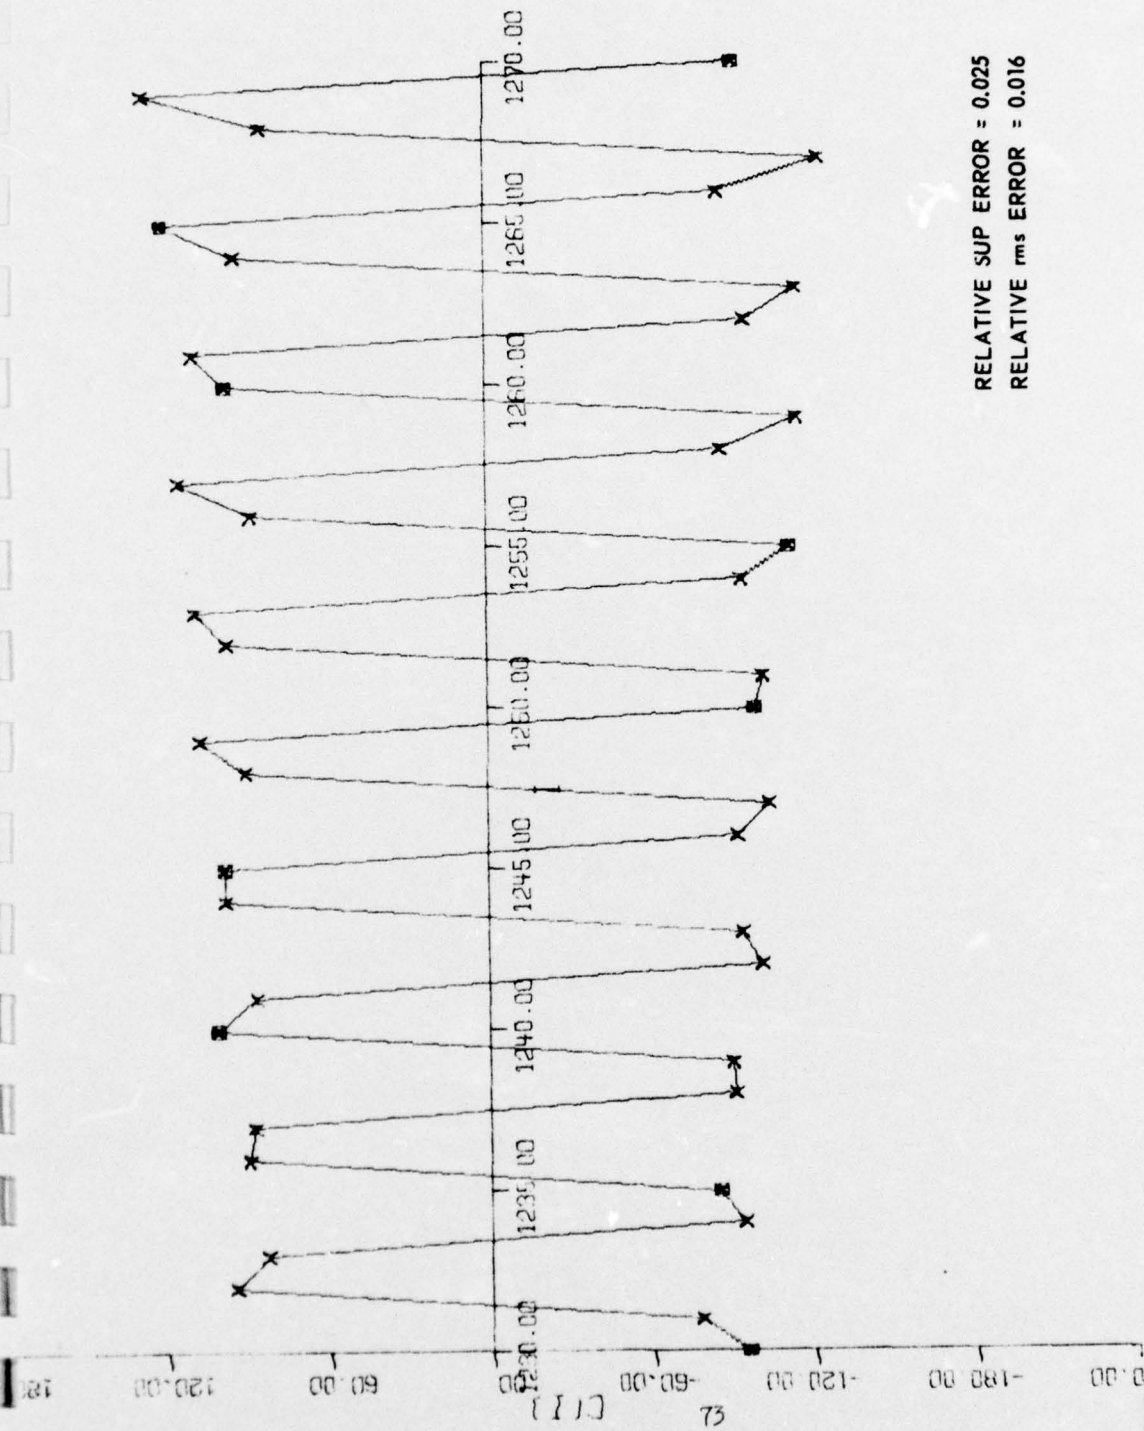

RELATIVE SUP ERROR = 0.025
RELATIVE rms ERROR = 0.016

REPRODUCED WAVEFORM WITH No. OF POINTS FROM EACH SIDE USED FOR CALCULATION - 15
FILTERED BY BPF2 (4 kHz - 6 kHz)


DRL . . UT
DWG AS-67-682
GSI . . EJW
6 - 20 - 67

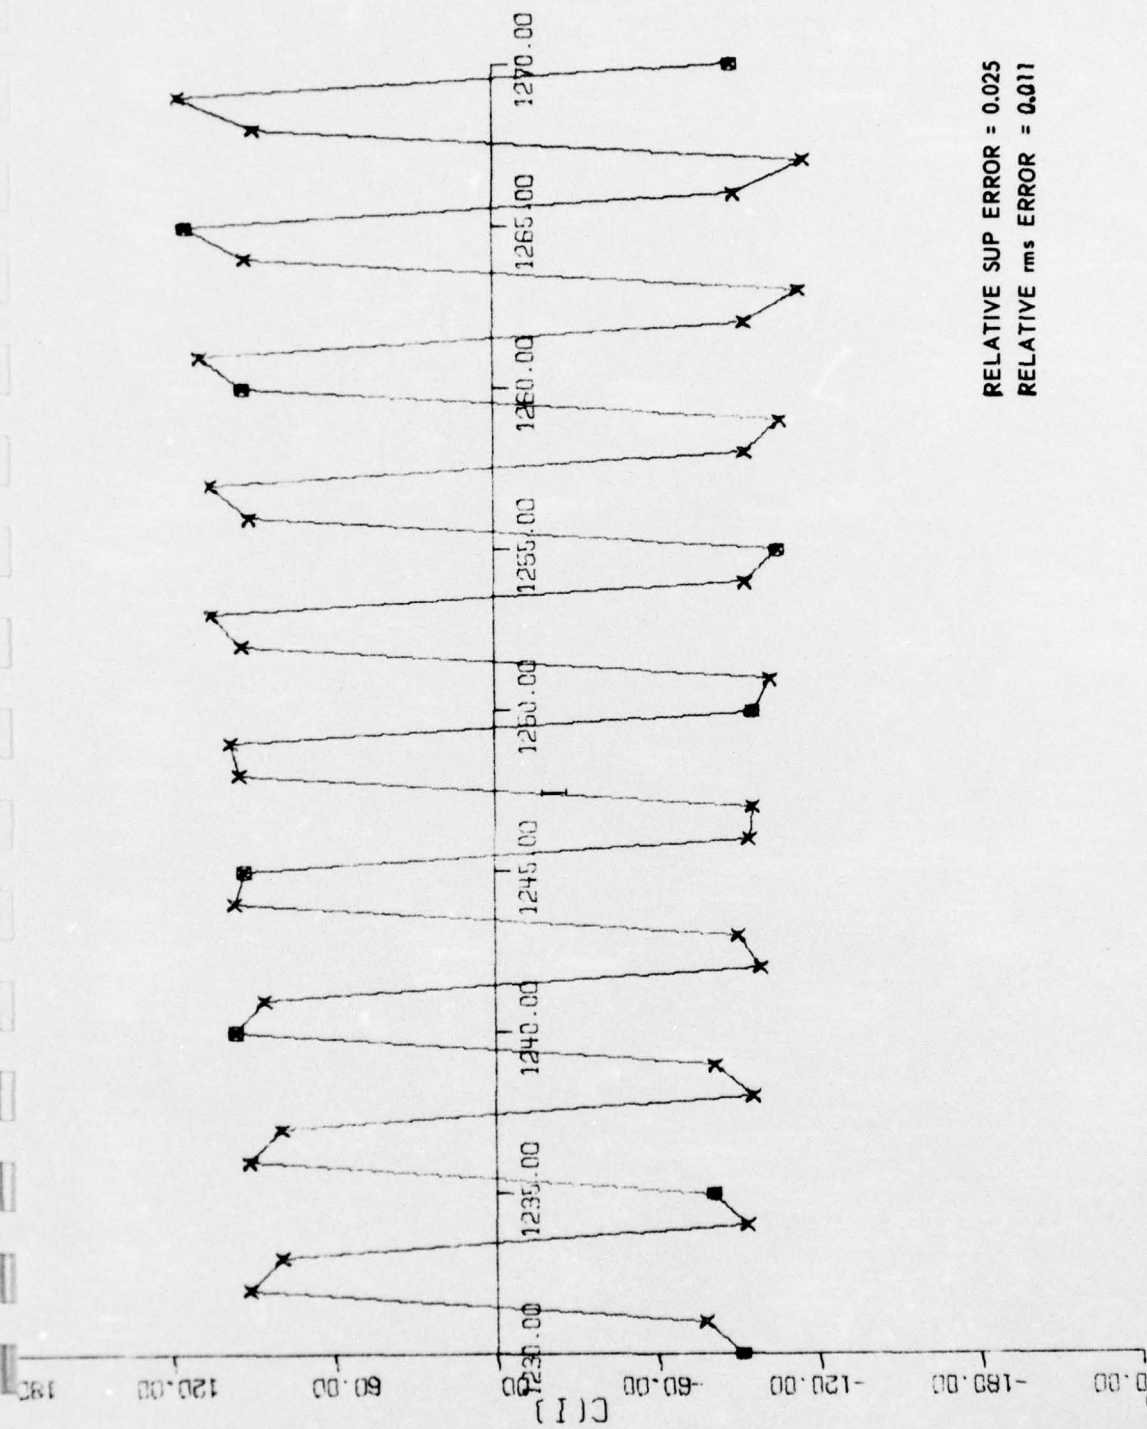

RELATIVE SUP ERROR = 0.025
RELATIVE rms ERROR = 0.011

REPRODUCED WAVEFORM WITH NO. OF POINTS FROM EACH SIDE USED FOR CALCULATION - 20
FILTERED BY BPF2 (4 kHz - 6 kHz)


DRL . . . UT
DWG AS-67-683
GSI . . . EJW
5 - 20 - 67

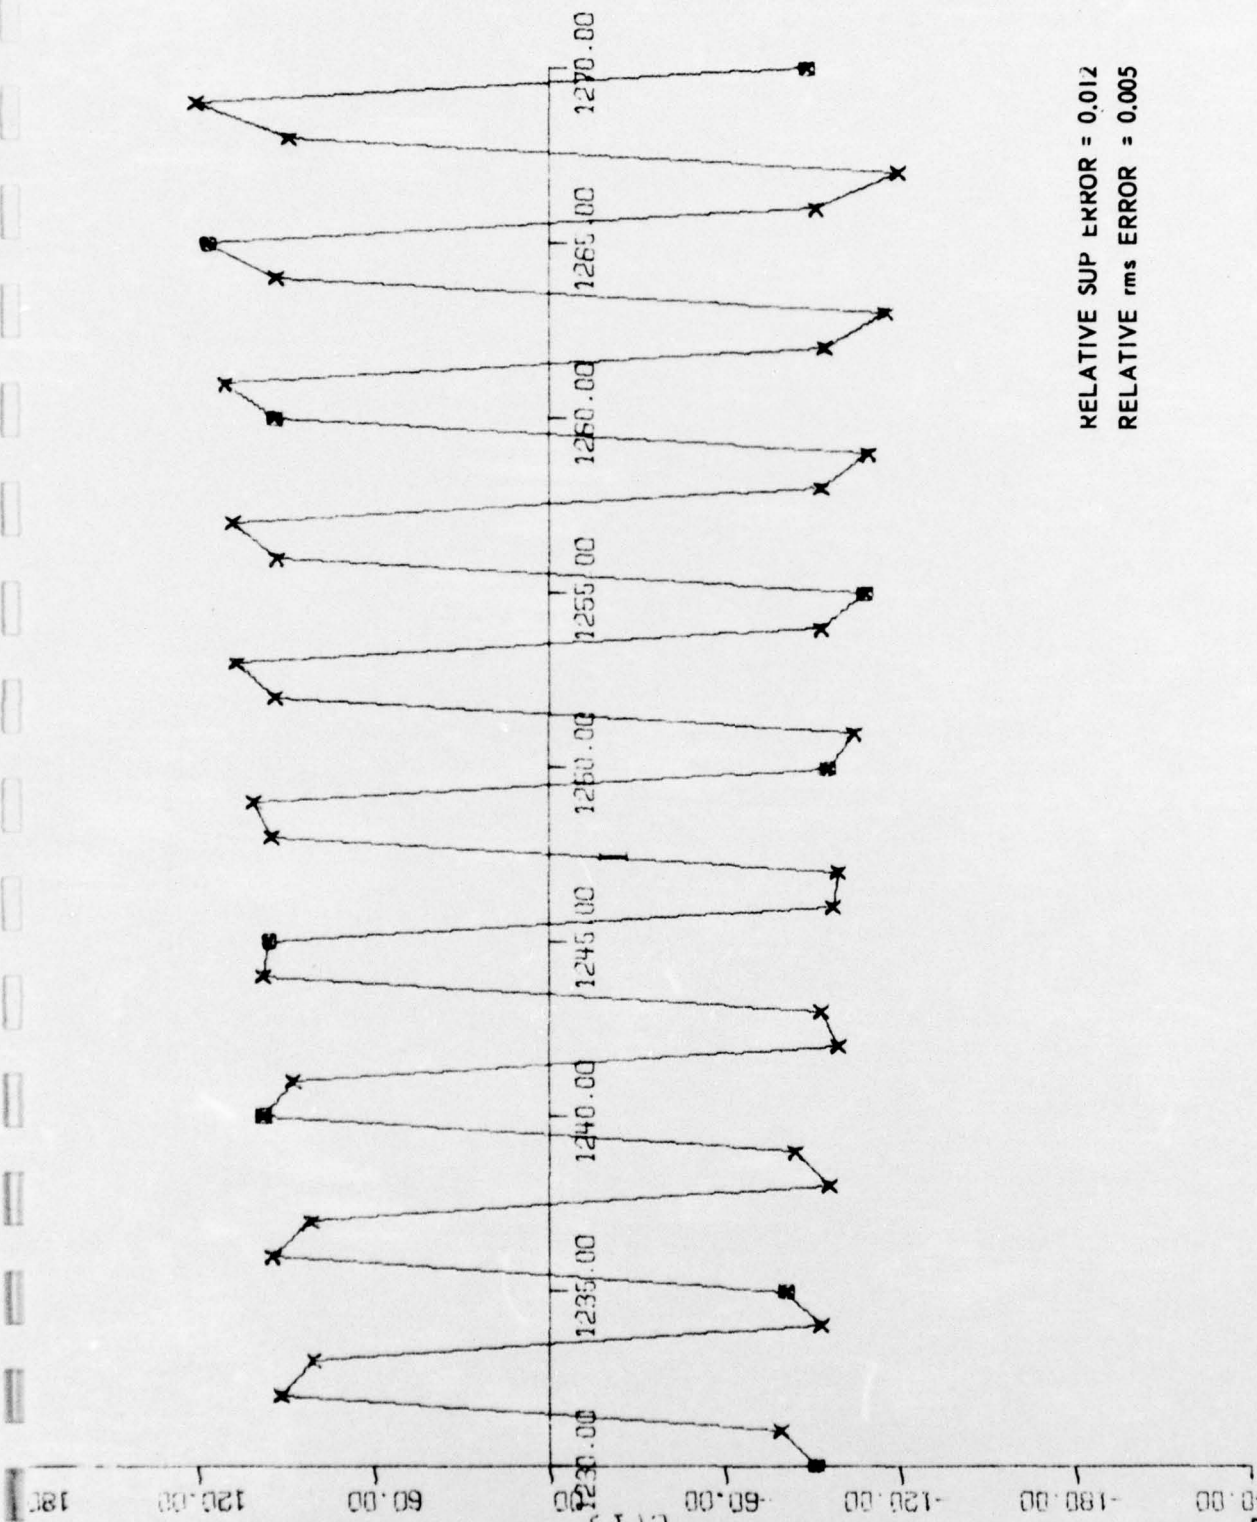

RELATIVE SUP ERROR = 0.012
RELATIVE rms ERROR = 0.005

REPRODUCED WAVEFORM WITH NO. OF POINTS FROM EACH SIDE USED FOR CALCULATION - 103
FILTERED BY BPF2 (4 kHz - 6 kHz)

DRL - UT
DWG AS-67-684
GSI - EJW
6 - 20 - 67

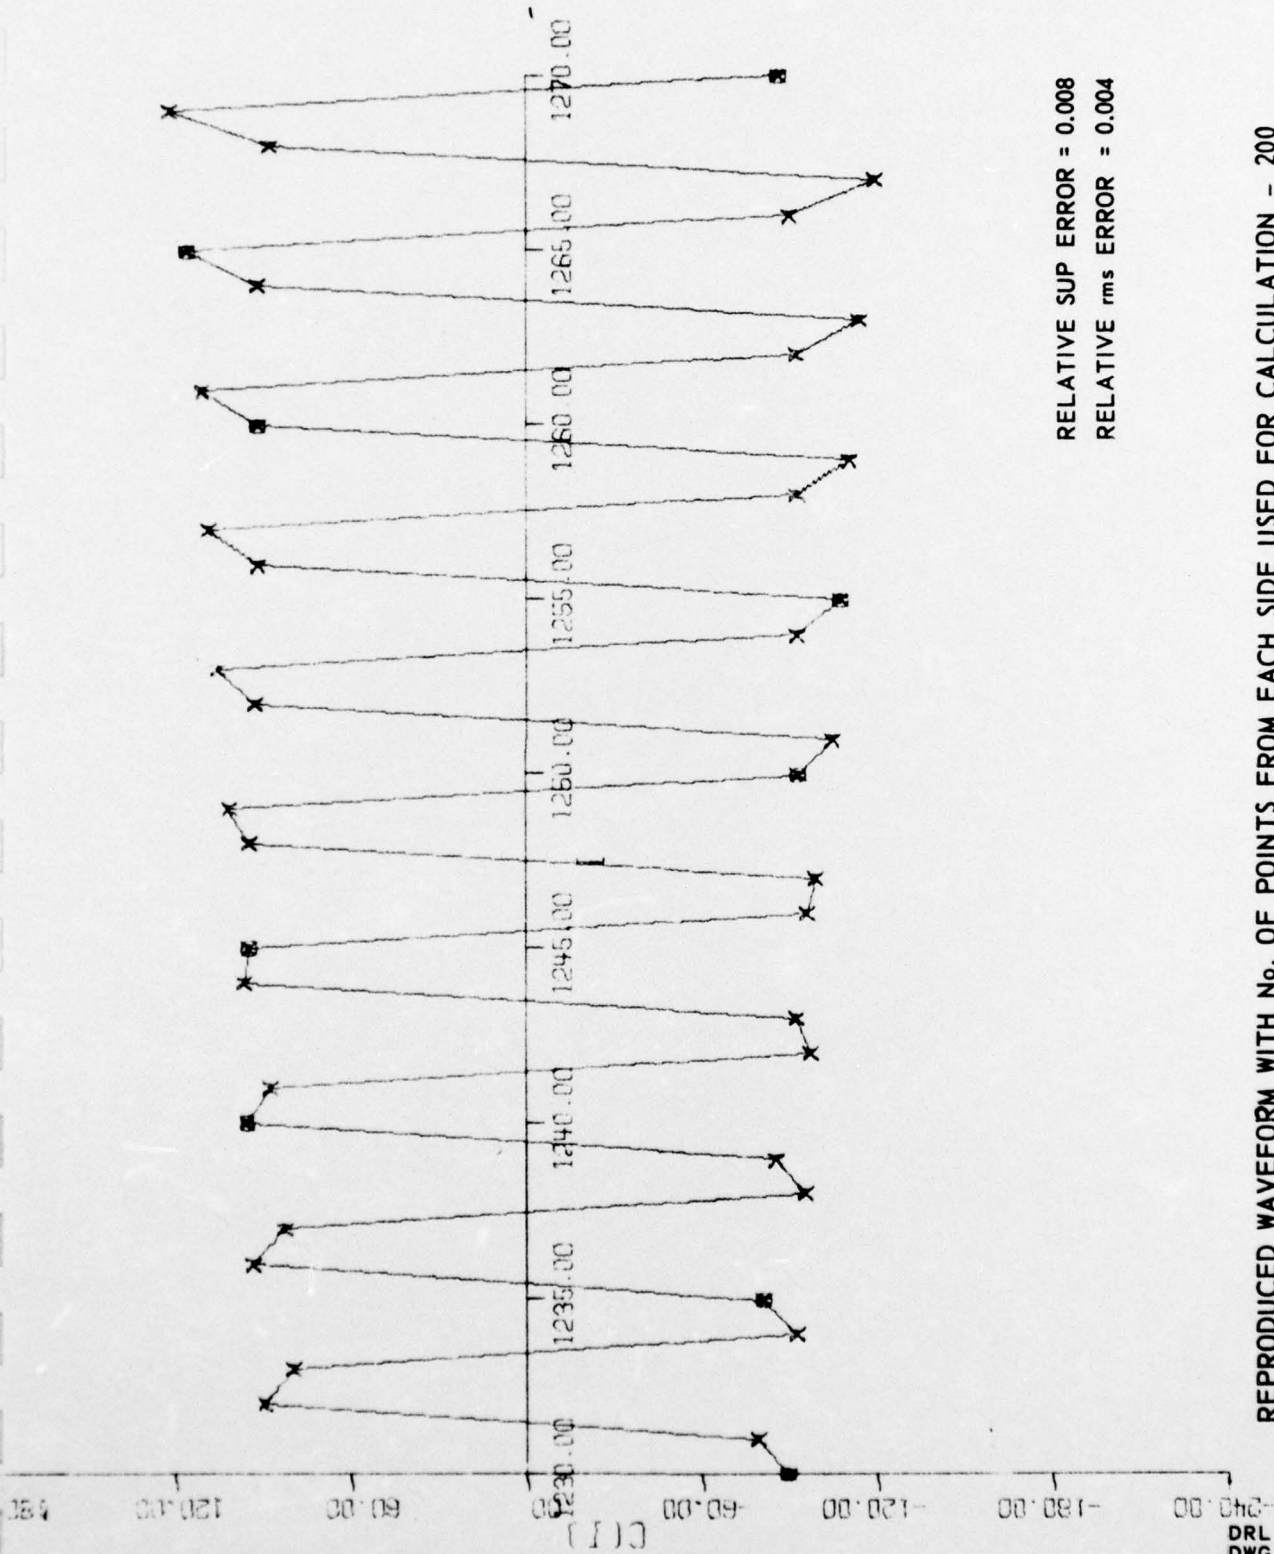


RELATIVE SUP ERROR = 0.008
RELATIVE _{rms} ERROR = 0.004

REPRODUCED WAVEFORM WITH No. OF POINTS FROM EACH SIDE USED FOR CALCULATION - 200
FILTERED BY BPF2 (4 kHz - 6 kHz)


DRL . . UT
DWG AS-67-685
GSI . . EJW
6 . 20 . 67

IX.

COMPARISON OF RELATIVE ERRORS INVOLVING COMBINATIONS
OF VARIOUS TYPES OF FILTERS, THE NUMBER OF POINTS
USED FROM EACH SIDE FOR CALCULATION, AND THE DIFFERENT
VALUES OF LP, ILLUSTRATED BY GRAPHS AND TABLES

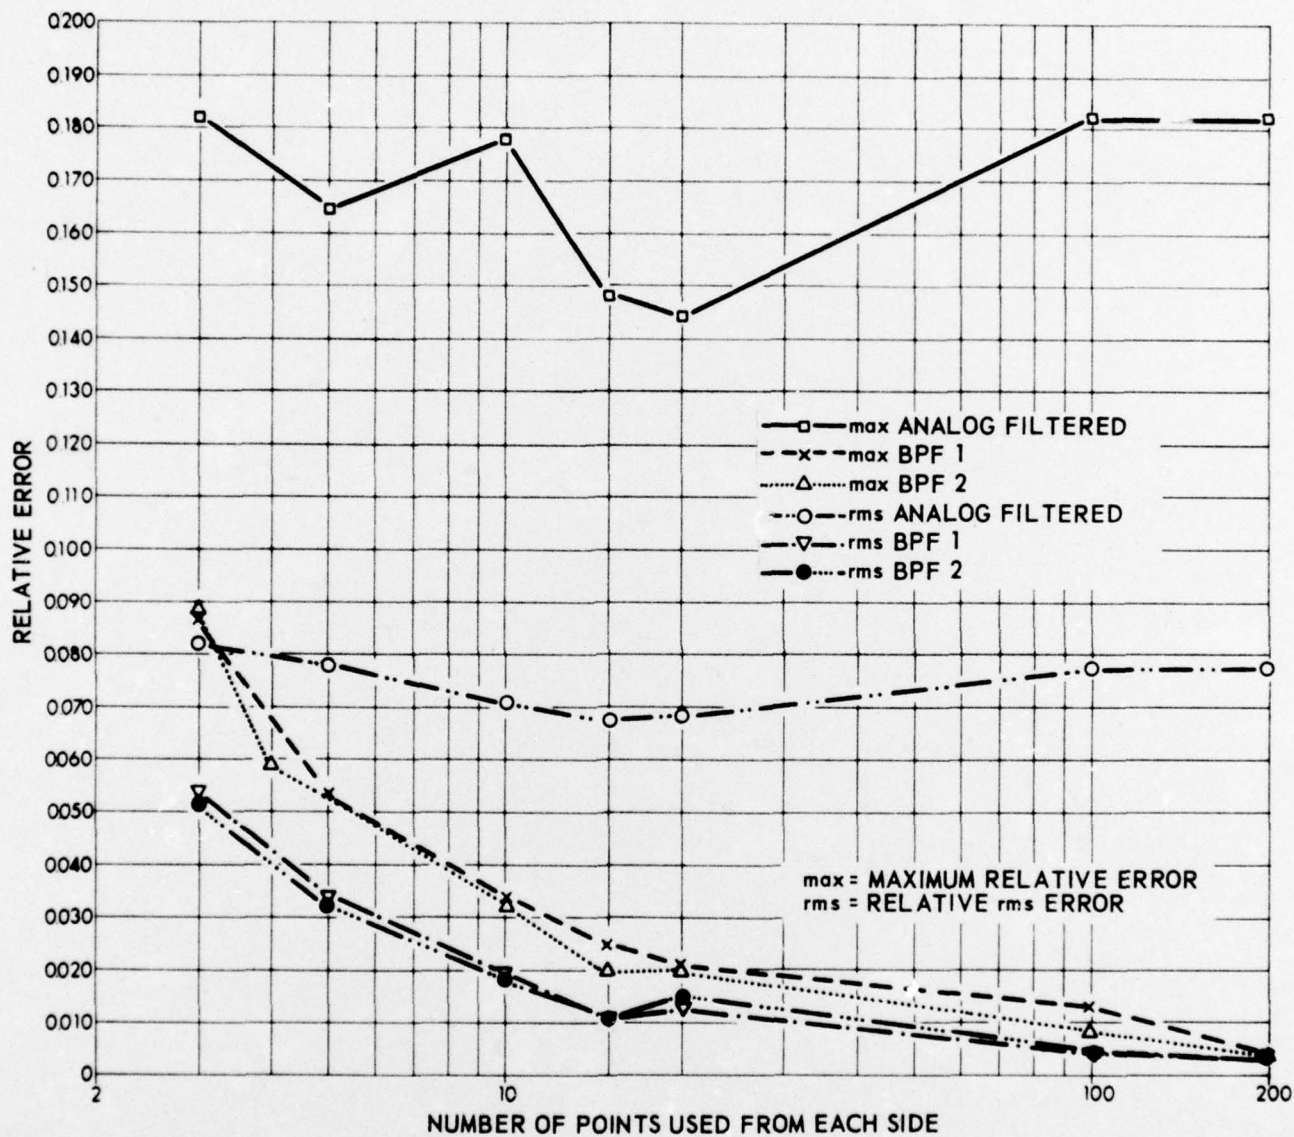

RELATIVE ERROR WHEN LP EQUALS 3

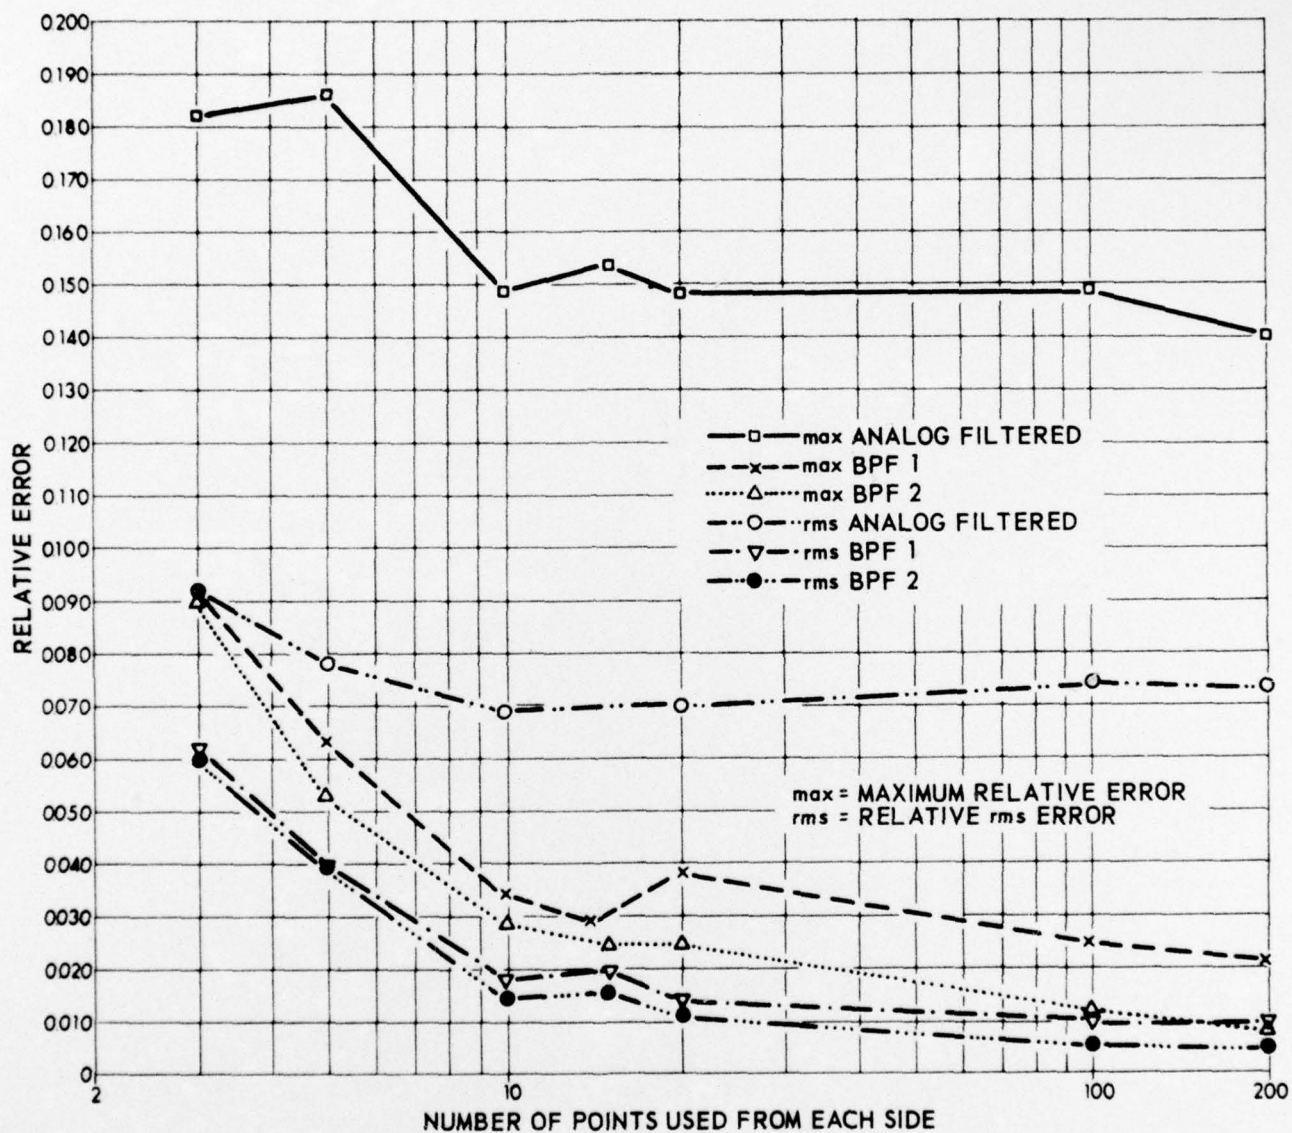

RELATIVE ERROR WHEN LP EQUALS 5

TABLE I

RELATIVE ERRORS

when LP = 3

NO. OF PTS. FROM EACH SIDE USED	FILTER	ANALOG FILTERED	BPF1 (3 kHz-7 kHz)	BPF2 (4 kHz-6 kHz)
3		max = 0.182 rms = 0.082	max = 0.088 rms = 0.054	max = 0.086 rms = 0.052
5		max = 0.165 rms = 0.078	max = 0.059 rms = 0.034	max = 0.053 rms = 0.033
10		max = 0.178 rms = 0.071	max = 0.034 rms = 0.020	max = 0.033 rms = 0.019
15		max = 0.148 rms = 0.067	max = 0.025 rms = 0.011	max = 0.020 rms = 0.011
20		max = 0.144 rms = 0.068	max = 0.021 rms = 0.013	max = 0.020 rms = 0.014
100		max = 0.182 rms = 0.077	max = 0.013 rms = 0.005	max = 0.008 rms = 0.005
200		max = 0.182 rms = 0.077	max = 0.004 rms = 0.003	max = 0.004 rms = 0.003

max is the maximum relative error.

rms is the relative rms error.

TABLE II

RELATIVE ERRORS

when LP = 5

NO. OF PTS. FROM EACH SIDE USED	FILTER	ANALOG FILTERED	BPF1 (3 kHz-7 kHz)	BPF2 (4 kHz-6 kHz)
3		max = 0.182 rms = 0.092	max = 0.092 rms = 0.062	max = 0.090 rms = 0.060
5		max = 0.186 rms = 0.077	max = 0.063 rms = 0.040	max = 0.053 rms = 0.039
10		max = 0.148 rms = 0.069	max = 0.034 rms = 0.017	max = 0.029 rms = 0.015
15		max = 0.153 rms = 0.070	max = 0.029 rms = 0.019	max = 0.025 rms = 0.016
20		max = 0.148 rms = 0.070	max = 0.038 rms = 0.014	max = 0.025 rms = 0.011
100		max = 0.148 rms = 0.074	max = 0.025 rms = 0.009	max = 0.012 rms = 0.005
200		max = 0.140 rms = 0.073	max = 0.021 rms = 0.009	max = 0.008 rms = 0.004

max is the maximum relative error.

rms is the relative rms error.

X.

CONCLUSION

X. CONCLUSION

The results of this study are relatively consistent with the anticipated results. If the data are assumed to be in the 4-6 kHz band, $LP = 5$, the results are not as accurate as if the data are assumed to be in the 3.3-6.7 kHz band, $LP = 3$. Accordingly, as more data points are used to compute the value of the time series at a given point, the error tends to decrease.

The analog filtered data appear to have contained a dc bias and possibly some other noise outside the desired frequency band. This could have occurred after filtering, before digitization, or during digitization. The improvement produced by digitally filtering the data is marked, and to some extent, expected because of the low error level in digital operations. The close correspondence of the results using BPF1 and BPF2 indicates that most of the noise which entered the digitized data was outside the 3-7 kHz band.

In summation, there is a notable correlation between the original and the calculated data when only a few data points are used in the calculation of the time series. Moreover, there is a remarkable accuracy in locating the zeroes of the functions when straight line approximations for both the raw data and the reproduced function are used.

BIBLIOGRAPHY

Harman, Willis W., Principles of the Statistical Theory of Communication.

McGraw-Hill, 1963.

Shannon, C. E., "Communication in the Presence of Noise," Proc. IRE, 37,


10-21 (1949).

24 May 1967

DISTRIBUTION LIST FOR DRL-A-284
SHANNON'S THEOREM
BY G. S. INNIS UNDER CONTRACT NObsr-95181


Copy No.

1 - 4	Commander, Naval Ship Systems Command (Ships 16220, Department of the Navy Washington, D. C. 20360 Attn: Mr. C. D. Smith
5	Commanding Officer U. S. Navy Mine Defense Laboratory Panama City, Florida 32402 Attn: Mr. Carl M. Bennett
6	Commanding Officer U. S. Naval Oceanographic Office Suitland, Maryland 20390 Attn: Mr. R. C. Guthrie (Code 7240) Oceanographic Analysis Division Marine Sciences Department
7	Commanding Officer U. S. Navy Electronics Laboratory San Diego, California 92152 Attn: Code 3180
8	Office of Naval Research Resident Representative The University of Texas at Austin 2507 Main Building Austin, Texas 78712
9	Acoustics Division, DRL/UT
10	Signal Physics Branch, DRL/UT
11	C. A. Burr, DRL/UT
12	G. E. Ellis, DRL/UT
13	G. S. Innis, DRL/UT
14	S. P. Pitt, DRL/UT
15	Library, DRL/UT

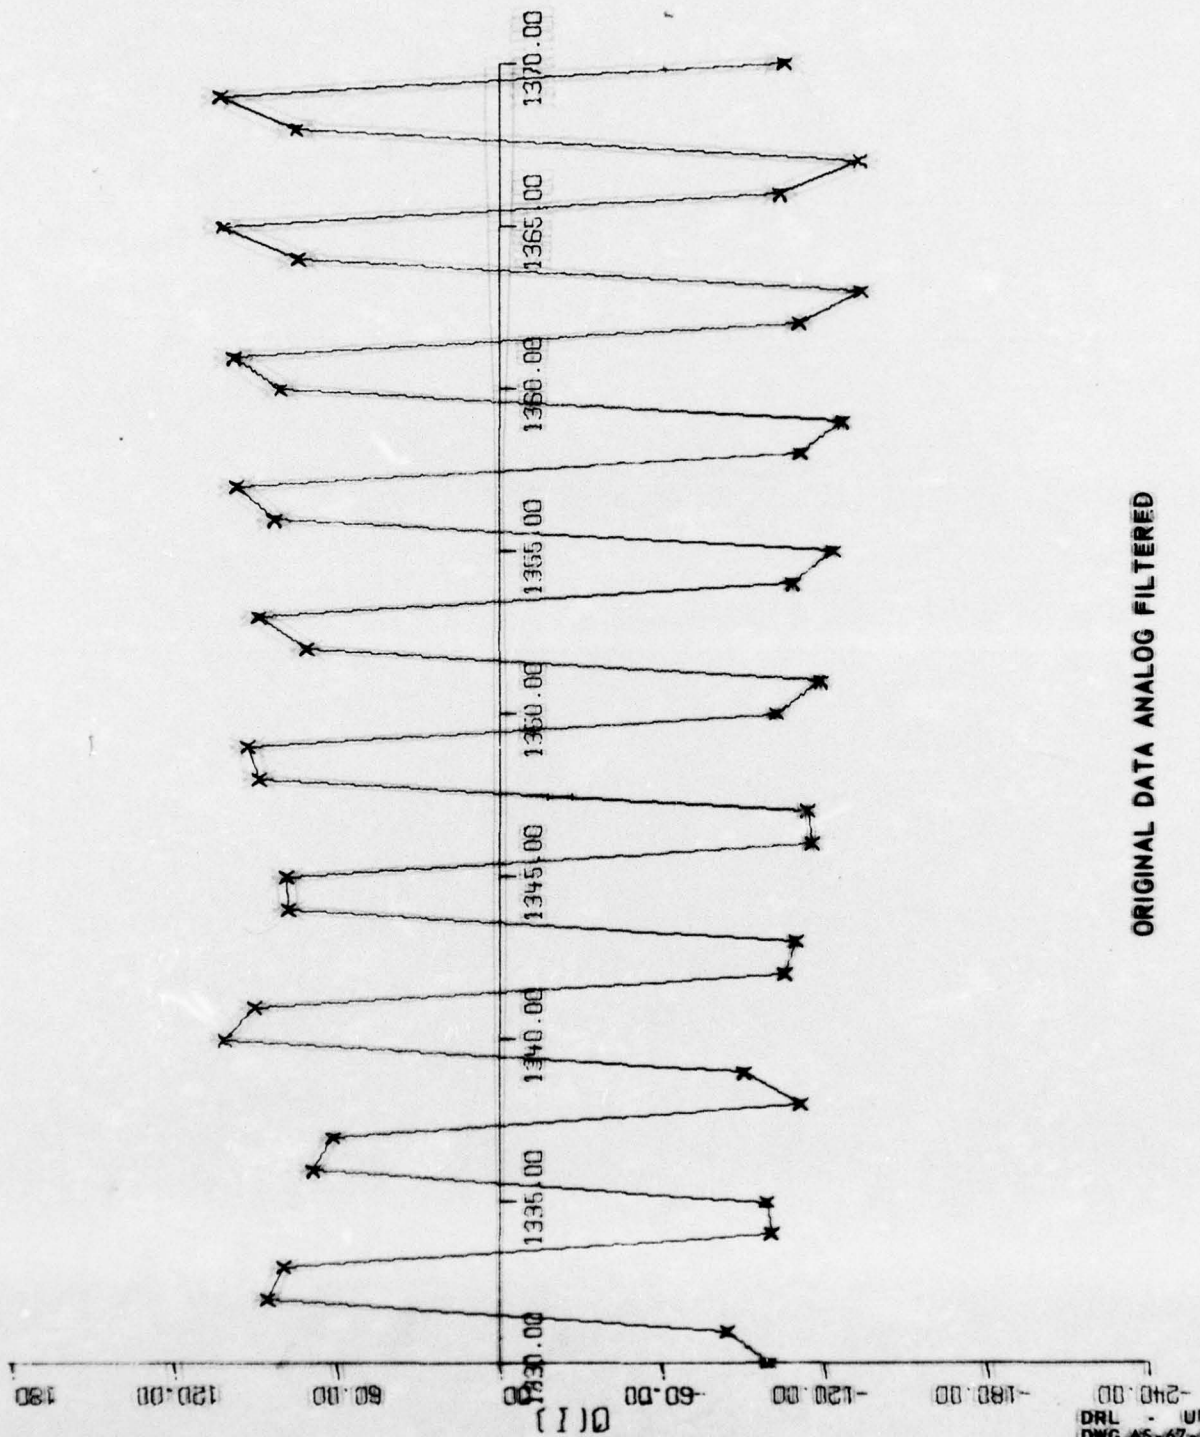


ORIGINAL DATA ANALOG FILTERED

DRL - UT
DWG AS-67-688
GSI - EJW
6 - 20 - 67

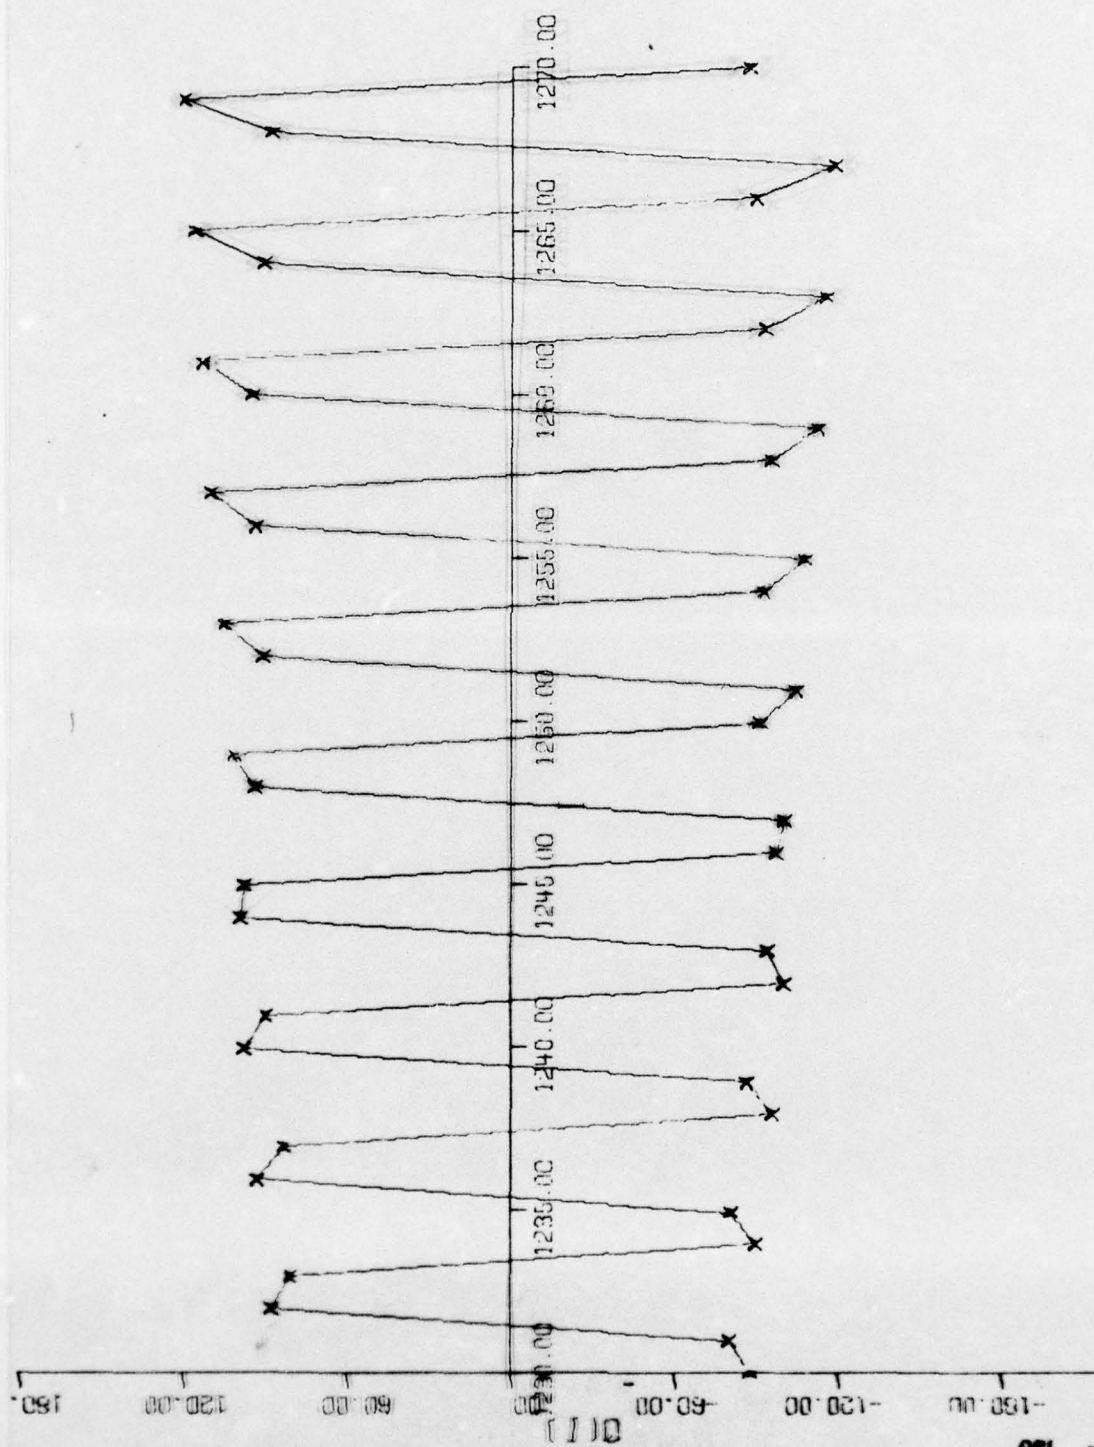

ORIGINAL DATA FILTERED BY BPF1 (3 kHz - 7 kHz)

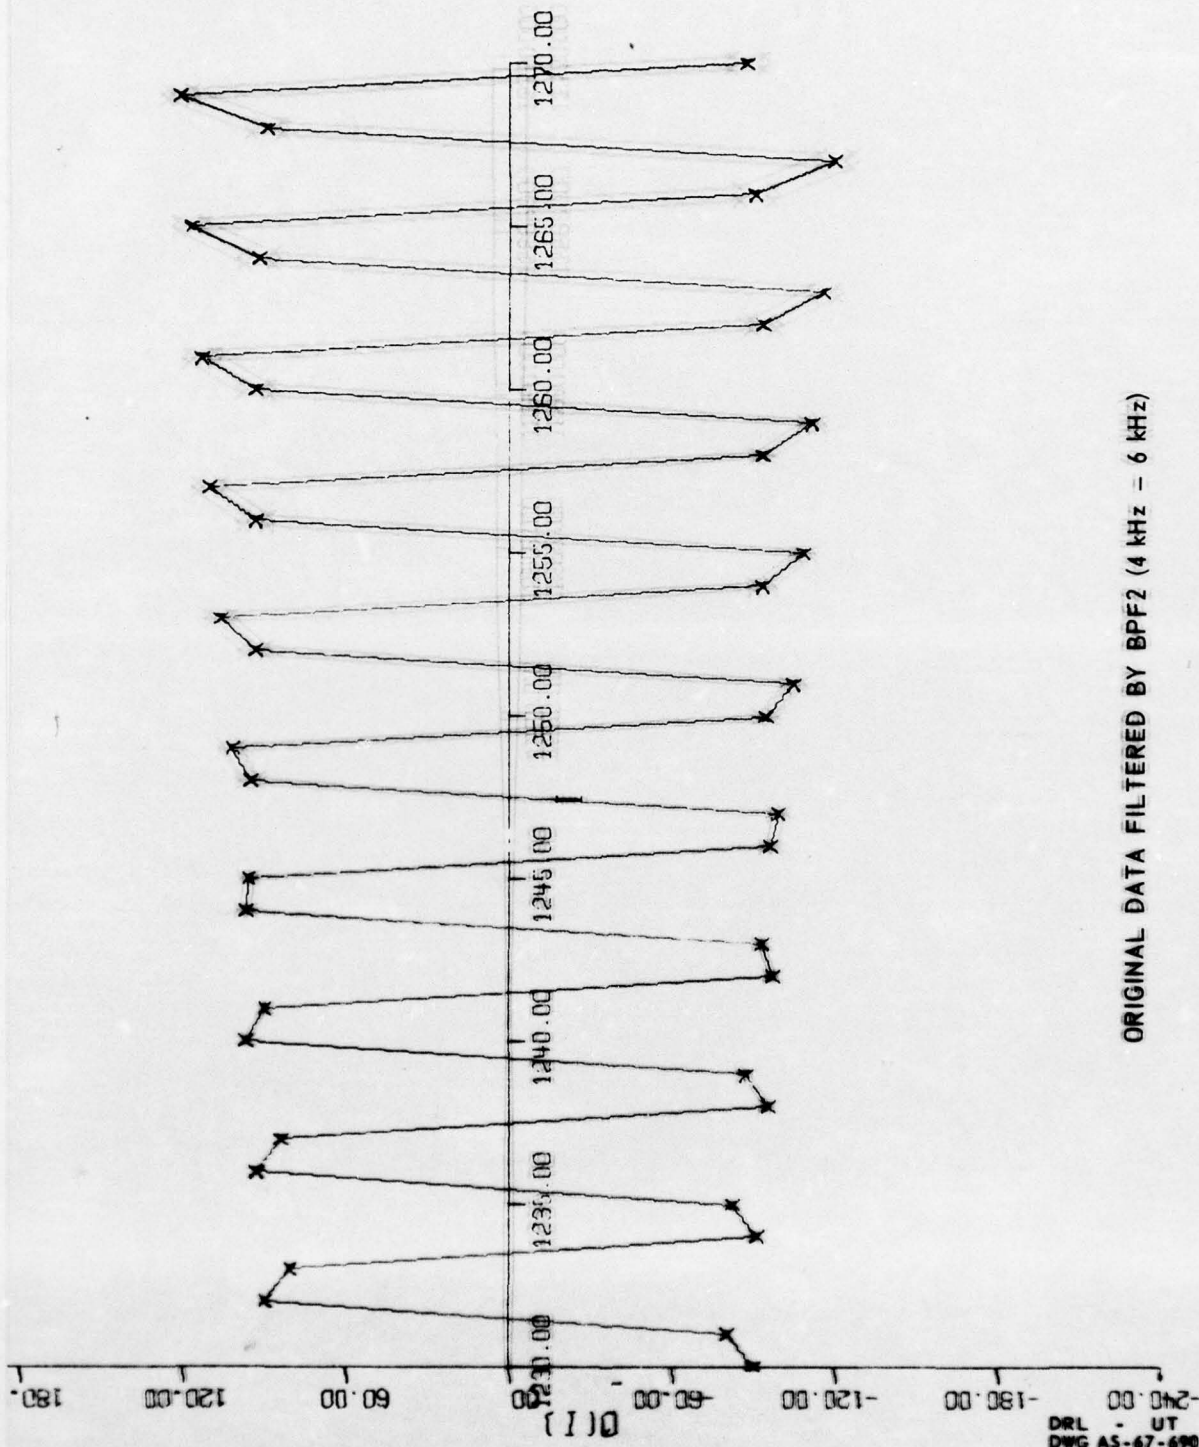

ORIGINAL DATA FILTERED BY BPF2 (4 kHz - 6 kHz)

DRL - UT
 DWG AS-67-690
 GSI - EJW
 6 - 20 - 67