

ADA033659

92 (13)



SUDDEN DECELERATION OF A FREE JET AT THE
ENTRANCE OF A CHANNEL

by

Roger W. Gallington

Approved for Public Release: Distribution Unlimited
AVIATION AND SURFACE EFFECTS DEPARTMENT

Report ASED 350

January 1976

DAVID
W.
TAYLOR
NAVAL
SHIP
RESEARCH
AND
DEVELOPMENT
CENTER

BETHESDA
MARYLAND
20084

DDO
RECEIVED
DEC 27 1976
A

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER Report ASED 350	2. GOVT ACCESSION NO. (14) DTNSRDC ASED-350	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) <u>(6)</u> SUDDEN DECELERATION OF A FREE JET AT THE ENTRANCE OF A CHANNEL.		5. TYPE OF REPORT & PERIOD COVERED <u>1</u> Interim Report
7. AUTHOR(s) <u>10</u> Roger W. Gallington		6. PERFORMING ORG. REPORT NUMBER
9. PERFORMING ORGANIZATION NAME AND ADDRESS David W. Taylor Naval Ship R&D Center Bethesda, Maryland 20084		8. CONTRACT OR GRANT NUMBER(s) <u>16</u> SSH15
11. CONTROLLING OFFICE NAME AND ADDRESS Commander Naval Air Development Center Warminster, Pennsylvania 18974		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS <u>17</u> Program Element 63534N Task Area SSH15002 Work Unit I612-008
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		12. REPORT DATE <u>11</u> January 1976
		13. NUMBER OF PAGES 14 <u>(12) 16 pgs</u>
		15. SECURITY CLASS. (of this report) Unclassified
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release: distribution unlimited		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Ground Effect Powered Lift Ram Wing		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) A family of two-dimensional potential flows is derived which may describe the interaction of a propulsion jet with the leading edge of a thin wing-in-ground effect at zero angle of attack with a deflected trailing edge flap. Assuming that such flows occur at the leading edge, the static performances of this arrangement—called the Power Augmented Ram Wing—are derived as functions of geometry. A minimum power point (continued on reverse side)		

387 695
6pg

DD FORM 1473

EDITION OF 1 NOV 65 IS OBSOLETE
S/N 0102-014-6601

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

is found for given required thrust and lift. At this minimum power point, the wing can be held about one-tenth of its chord above the surface while providing a lift force of about six times the installed thrust and recovering about four-fifths of the installed thrust.

ACQUISITION NO.	DATE ACQUIRED	<input checked="" type="checkbox"/>
DTIC	DATE DECLASSIFIED	<input type="checkbox"/>
SPC	DATE DECLASSIFIED	<input type="checkbox"/>
IDENTIFICATION		
BY		
DISTRIBUTION/AVAILABILITY CODES		
01	AVAIL. TO THE PUBLIC	SPECIAL
A		

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

TABLE OF CONTENTS

	Page
ABSTRACT	1
ADMINISTRATIVE INFORMATION	1
INTRODUCTION	1
THE CONJUGATE HODOGRAPH	2
THE TRANSFORMATION	4
EXAMPLE RESULTS	5
APPLICATION TO THE POWER AUGMENTED RAM WING	8

LIST OF FIGURES

Figure 1 - Physical Plane (z)	1
Figure 2 - The Conjugate Hodograph (w)	3
Figure 3 - Filled Duct, $\beta = 180^\circ$, $r = 0.5$	6
Figure 4 - Overfilled Duct, $\beta = 90^\circ$, $r = 0.5$	7
Figure 5 - Power Augmented Ram Wing	8
Figure 6 - Power Augmented Ram Wing Performance Parameters	10

NOTATION

C_p	Pressure coefficient
C_T	T_{net}/T_j
F	Complex potential
f	Strength of sink representing flow down channel
h	Height of wing bottom surface above water
P_c	Static pressure under wing (gage)
q_j	Dynamic pressure of propulsion jet
r	Velocity of flow in channel divided by jet velocity
T_j	Thrust of propulsion jet
T_{net}	Net thrust on vehicle
t_1	Propulsion jet thickness
t_2	Thickness of jet leaving under trailing edge of flaps
u	Hodograph plane real component
v	Hodograph plane imaginary component
w	Complex velocity = $u + iv$
x	Real coordinate in physical plane
y	Imaginary coordinate in physical plane
z	Complex coordinate in physical plane = $x + iy$
β	Angle between spillage jet velocity and incoming jet velocity

ABSTRACT

A family of two-dimensional potential flows is derived which may describe the interaction of a propulsion jet with the leading edge of a thin wing-in-ground effect at zero angle of attack with a deflected trailing edge flap. Assuming that such flows occur at the leading edge, the static performances of this arrangement—called the Power Augmented Ram Wing—are derived as functions of geometry. A minimum power point is found for given required thrust and lift. At this minimum power point, the wing can be held about one-tenth of its chord above the surface while providing a lift force of about six times the installed thrust and recovering about four-fifths of the installed thrust.

ADMINISTRATIVE INFORMATION

This investigation was authorized and funded by the Naval Air Development Center under Project SSH15, Program Element 63534N, and Work Unit 1-1612-008.

INTRODUCTION

The potential flow problem is described in Figure 1. The jet, entering from the left, interacts with the channel entrance with part of the flow leaving in the channel at reduced velocity and part spilling around the lip and leaving at some angle β . The flow is symmetrical


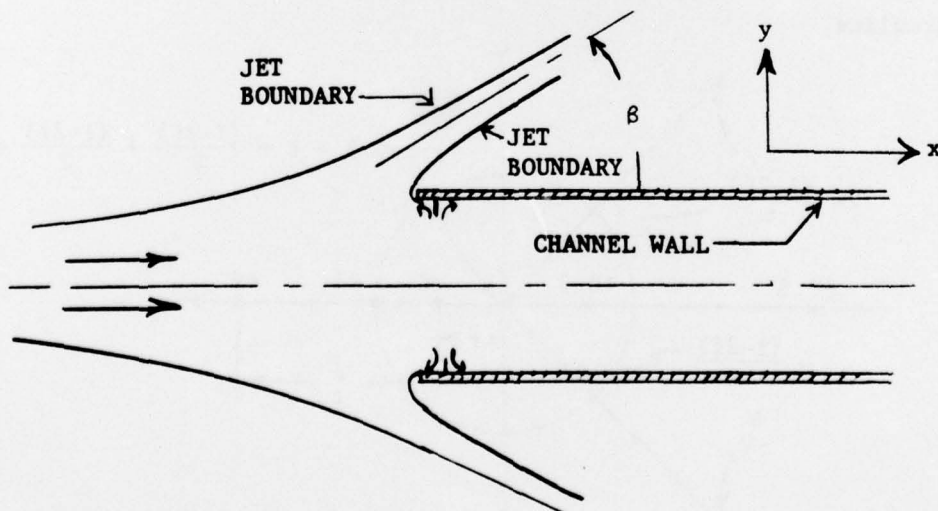


Figure 1 - Physical Plane (z)


about a horizontal line and so it is appropriate to consider only one half. It is thought the horizontal center line could represent the water surface and the duct wall could represent the leading edge of the wing in application to the Power Augmented Ram Wing.

THE CONJUGATE HODOGRAPH

To construct the conjugate hodograph flow, one can start with a source of unit strength at $w = +1$ and a sink of unit strength at $w = -1$. The flow is known to have a unit circle streamline which will have to be preserved to develop the free jet boundaries.

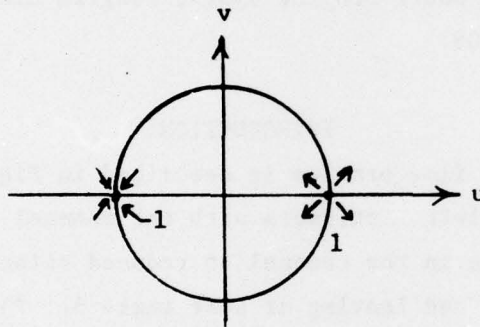

Add the following source sink systems which preserve the circular streamline.

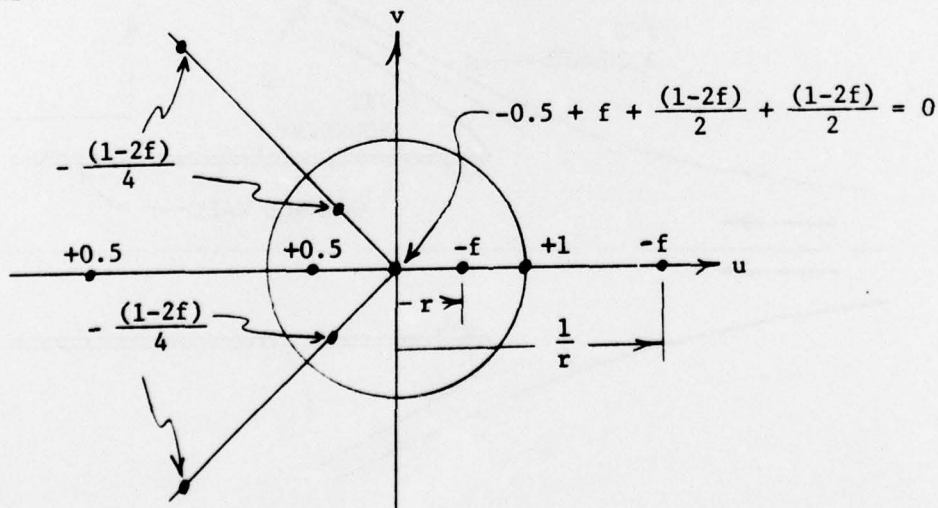

All source sink pairs, except those along the real axis, are allowed to close on the unit circle yielding the conjugate hodograph of interest.

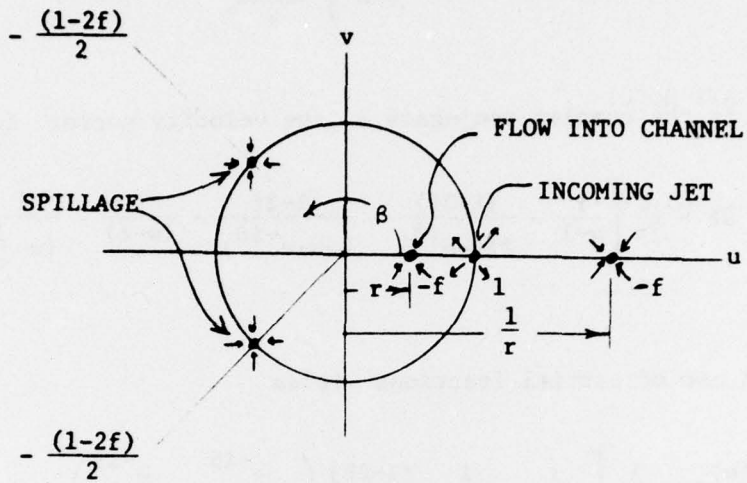


Figure 2 - The Conjugate Hodograph (w)

The complex potential in the w -plane can be easily written

$$F(w) = \frac{1}{2\pi} \left[\ln(w-1) - \frac{(1-2f)}{2} \ln(w-e^{i\beta}) - \frac{(1-2f)}{2} \ln(w-e^{-i\beta}) - f \ln(w-r) - f \ln\left(w - \frac{1}{r}\right) \right] \quad (1)$$

THE TRANSFORMATION

To derive the transformation to the physical plane, the relation

$$z = \int \frac{dF(w)}{w},$$

where w is the complex conjugate of the velocity vector, is used.

$$dF = \frac{1}{2\pi} \left[\frac{1}{w-1} - \frac{(1-2f)}{2(w-e^{i\beta})} - \frac{1-2f}{2(w-e^{-i\beta})} - \frac{f}{(w-r)} - \frac{f}{(w-\frac{1}{r})} \right] dw$$

Repeated use of partial fractions yields

$$\begin{aligned} \frac{dF(w)}{w} = \frac{1}{2\pi} & \left[\frac{1}{(w-1)} - \frac{1}{w} - \frac{(1-2f)}{2} \left(\frac{e^{-i\beta}}{(w-e^{i\beta})} - \frac{e^{-i\beta}}{w} \right) \right. \\ & - \frac{1-2f}{2} \left(\frac{e^{i\beta}}{(w-e^{-i\beta})} - \frac{e^{i\beta}}{w} \right) - f \left(\frac{1}{(w-r)} - \frac{1}{w} \right) \\ & \left. - f \left(\frac{r}{(w-\frac{1}{r})} - \frac{r}{w} \right) \right] dw. \end{aligned}$$

The $1/w$ terms are now grouped.

$$\begin{aligned} \frac{dF(w)}{w} = \frac{1}{2\pi} & \left[\frac{1}{(w-1)} - \frac{(1-2f)e^{-i\beta}}{2(w-e^{i\beta})} - \frac{(1-2f)e^{i\beta}}{2(w-e^{-i\beta})} - \frac{f}{r} \frac{1}{(w-r)} - \frac{fr}{(w-\frac{1}{r})} \right. \\ & \left. + \frac{1}{w} \left(-1 + \frac{(1+2f)e^{-i\beta}}{2} + \frac{(1-2f)e^{i\beta}}{2} + \frac{f}{r} + fr \right) \right] dw \end{aligned}$$

The transformation cannot have a singularity at the origin of the hodograph as this point must correspond to a stagnation point. Therefore, the coefficient of $1/w$ yields a relation between f and r .

$$\frac{f}{r} + fr + \frac{(1-2f)(e^{-i\beta} + e^{i\beta})}{2} - 1 = 0$$

$$f = \frac{r(1 - \cos \beta)}{(r^2 - 2r \cos \beta + 1)} \quad (2)$$

Equation (2) could also have been derived directly from the requirement that the velocity induced at the origin by the source sink distribution in the hodograph plane must be zero. Now the indicated integration is performed, resulting in the required transformation.

$$z = \frac{1}{2\pi} \left[\ln(w-1) - \frac{(1-2f)e^{-i\beta}}{2} \ln(w-e^{i\beta}) - \frac{(1-2f)e^{i\beta}}{2} \ln(w-e^{-i\beta}) - \frac{f}{r} \ln(w-r) - fr \ln(w-\frac{1}{r}) \right] \quad (3)$$

EXAMPLE RESULTS

Two specific cases are presented: one corresponding to the "filled duct" and the other to the "overfilled duct." The principal results from these two examples are given in Figures 3 and 4, respectively. The "filled duct" case, Figure 3, emerges from the solution when $\beta = \pi$. In the "filled duct" case, the duct leading edge goes to $-\infty$ to the left, indicating that this particular solution could occur at any point between parallel walls. This raises some concern that in the Power Augmented Ram Wing the pressure jump need not occur as desired near the leading edge.

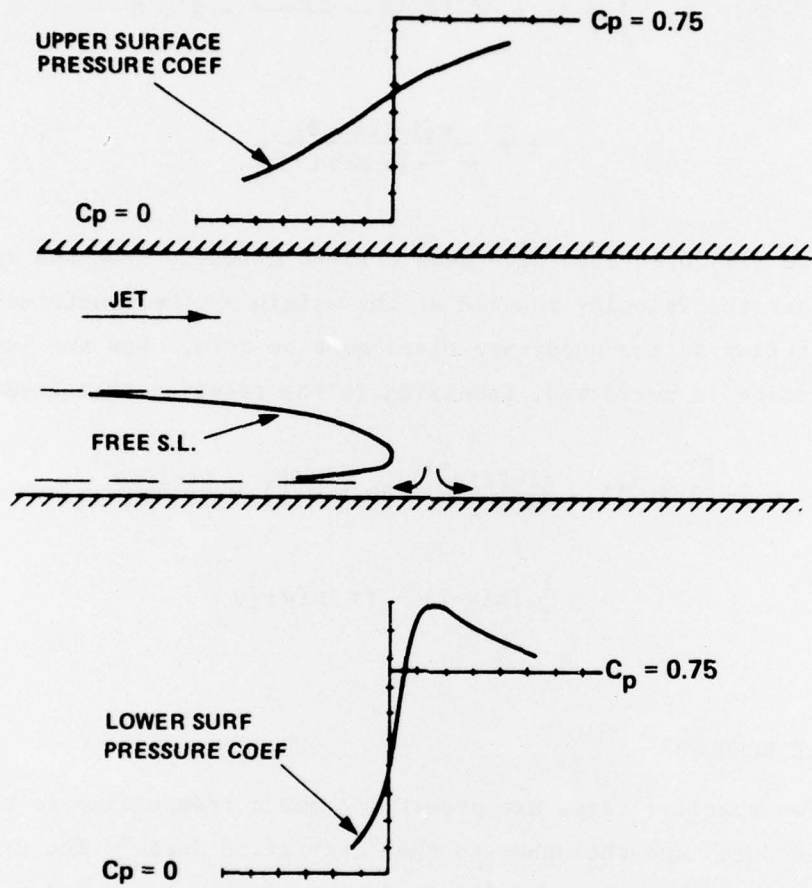


Figure 3 - Filled Duct, $\beta = 180^\circ$, $r = 0.5$

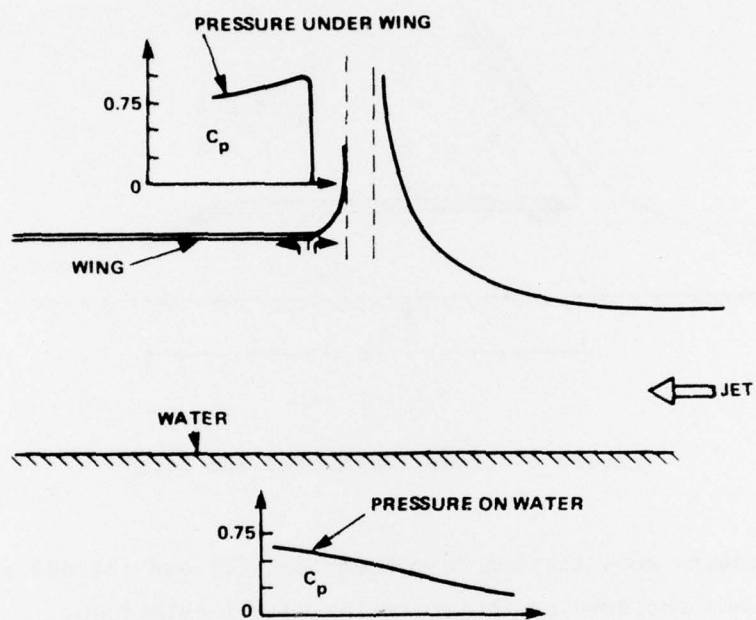


Figure 4 - Overfilled Duct, $\beta = 90^\circ$, $r = 0.5$

APPLICATION TO THE POWER AUGMENTED RAM WING

Using the potential flow solution developed above, one can develop certain useful relations applicable to the Power Augmented Ram Wing. Figure 5 defines certain geometric parameters.

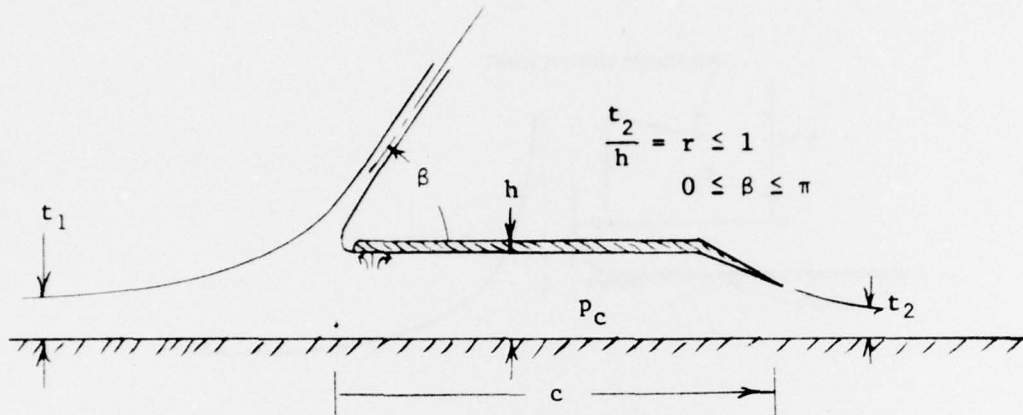


Figure 5 - Power Augmented Ram Wing

By systematic substitution into Equations (2) and (3) and assuming $h \ll c$, one can develop the following useful relations.

$$\frac{t_2}{t_1} = 2f = \frac{2\left(\frac{t_2}{h}\right)(1 - \cos \beta)}{1 - 2\left(\frac{t_2}{h}\right)\cos \beta + \left(\frac{t_2}{h}\right)^2} \quad (4)$$

$$\frac{h}{t_1} = \frac{t_2/t_1}{t_2/h} \quad (5)$$

$$C_p = 1 - \left(\frac{t_2}{h}\right)^2 \quad (\text{pressure coefficient}) \quad (6)$$

$$C_T = (1 - \cos \beta) \frac{t_2}{t_1} + \cos \beta \quad (\text{thrust coefficient}) \quad (7)$$

One can suppose that a specific pressure under the wing and a specific thrust are required and that it is desirable to minimize the power in the incoming jet.

$$T_{\text{net}} = T_j C_T$$

$$p_c = C_p q_j$$

$$\text{Power} \propto T_j \sqrt{q_j} = \frac{\sqrt{p_c} T_{\text{net}}}{C_T \sqrt{C_p}} \quad (8)$$

Therefore, it is desirable to maximize $C_T \sqrt{C_p}$.

Figure 6 was generated using Equations (4), (5), (6), (7), and (8). The interesting conclusion from Figure 6 is that the most useful solutions occur for rather high thrust coefficients. The overfilled duct out-performs the filled duct with respect to $C_T \sqrt{C_p}$. However, this performance is achieved at a reduced value of h/t compared to the filled duct case.

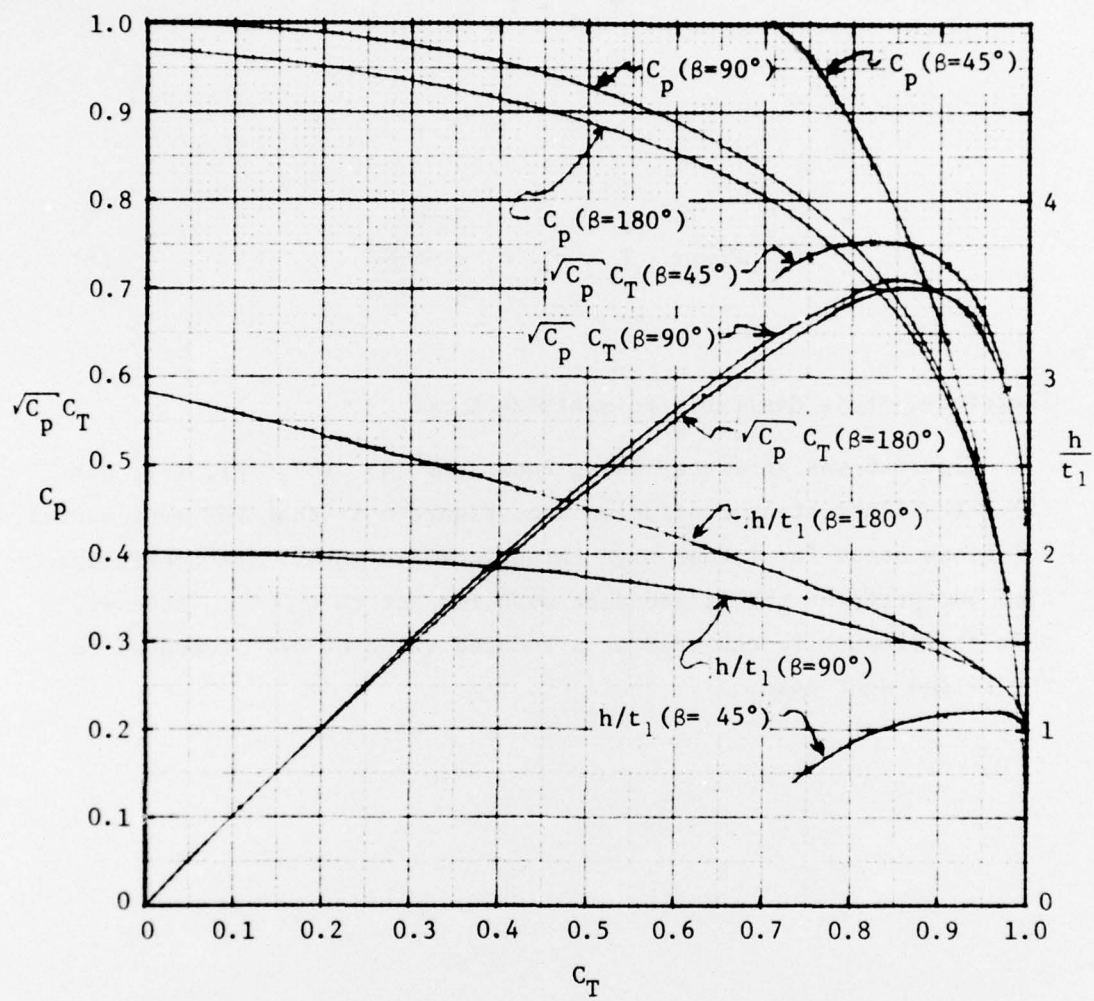


Figure 6 - Power Augmented Ram Wing Performance Parameters

DTNSRDC ISSUES THREE TYPES OF REPORTS

(1) DTNSRDC REPORTS, A FORMAL SERIES PUBLISHING INFORMATION OF PERMANENT TECHNICAL VALUE, DESIGNATED BY A SERIAL REPORT NUMBER.

(2) DEPARTMENTAL REPORTS, A SEMIFORMAL SERIES, RECORDING INFORMATION OF A PRELIMINARY OR TEMPORARY NATURE, OR OF LIMITED INTEREST OR SIGNIFICANCE, CARRYING A DEPARTMENTAL ALPHANUMERIC IDENTIFICATION.

(3) TECHNICAL MEMORANDA, AN INFORMAL SERIES, USUALLY INTERNAL WORKING PAPERS OR DIRECT REPORTS TO SPONSORS, NUMBERED AS TM SERIES REPORTS; NOT FOR GENERAL DISTRIBUTION.