

U.S. DEPARTMENT OF COMMERCE
National Technical Information Service

AD-A034 667

UH-1H DOWNWASH VELOCITY MEASUREMENTS

ARMY ENGINEER WATERWAYS EXPERIMENT STATION
VICKSBURG, MISSISSIPPI

AUGUST 1972

Unclassified

Security Classification

DOCUMENT CONTROL DATA - R & D

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

1. ORIGINATING ACTIVITY (Corporate author) U. S. Army Engineer Waterways Experiment Station Vicksburg, Mississippi		2a. REPORT SECURITY CLASSIFICATION Unclassified			
		2b. GROUP			
3. REPORT TITLE UH-1H DOWNWASH VELOCITY MEASUREMENTS					
4. DESCRIPTIVE NOTES (Type of report and inclusive dates) Final report					
5. AUTHOR(S) (Last name, middle initial, first name) Grady W. Leese					
6. REPORT DATE August 1972		7a. TOTAL NO. OF PAGES 16	7b. NO. OF REFS 0		
8a. CONTRACT OR GRANT NO.		8b. ORIGINATOR'S REPORT NUMBER(S) Miscellaneous Paper S-72-31 ✓			
A. PROJECT NO.					
C.		9a. OTHER REPORT NUMBER(S) (Any other numbers that may be assigned this report)			
D.					
10. DISTRIBUTION STATEMENT Approved for public release; distribution unlimited.					
11. SUPPLEMENTARY NOTES		12. SPONSORING MILITARY ACTIVITY U. S. Army Mobility Equipment Research and Development Center Fort Belvoir, Virginia			
13. ABSTRACT Field measurements were made to determine the velocity of the horizontal and vertical downwash flow beneath the rotor of a UH-1H helicopter. Maximum downwash velocities measured during 7-sec periods were as follows:					
Direction of Flow	Distance from Center of Rotor Rotation, ft	Aircraft Position Hover Height ft	Heading* deg		
			Maximum Downwash Velocity mph		
Horizontal	41	10	360	59	Remarks
Vertical	29	30	270	30	-- 6' above ground
*Referenced to instrument line: 360-deg heading, aircraft facing line. 270-deg heading, aircraft rotated 90 deg left.					

DD FORM 1473 REPLACES DD FORM 1473, 1 JAN 60, WHICH IS OBSOLETE FOR ARMY USE.

Unclassified

Security Classification

Unclassified
Security Classification

14. KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
Helicopter downwash Velocity measurement						

Unclassified
Security Classification

741
W 34m
No. 5-72-31
Cop. 2




MISCELLANEOUS PAPER S-72-31

UH-1H DOWNWASH VELOCITY MEASUREMENTS

by

G. W. Leese

US-CE-C
Property of
The United States Government

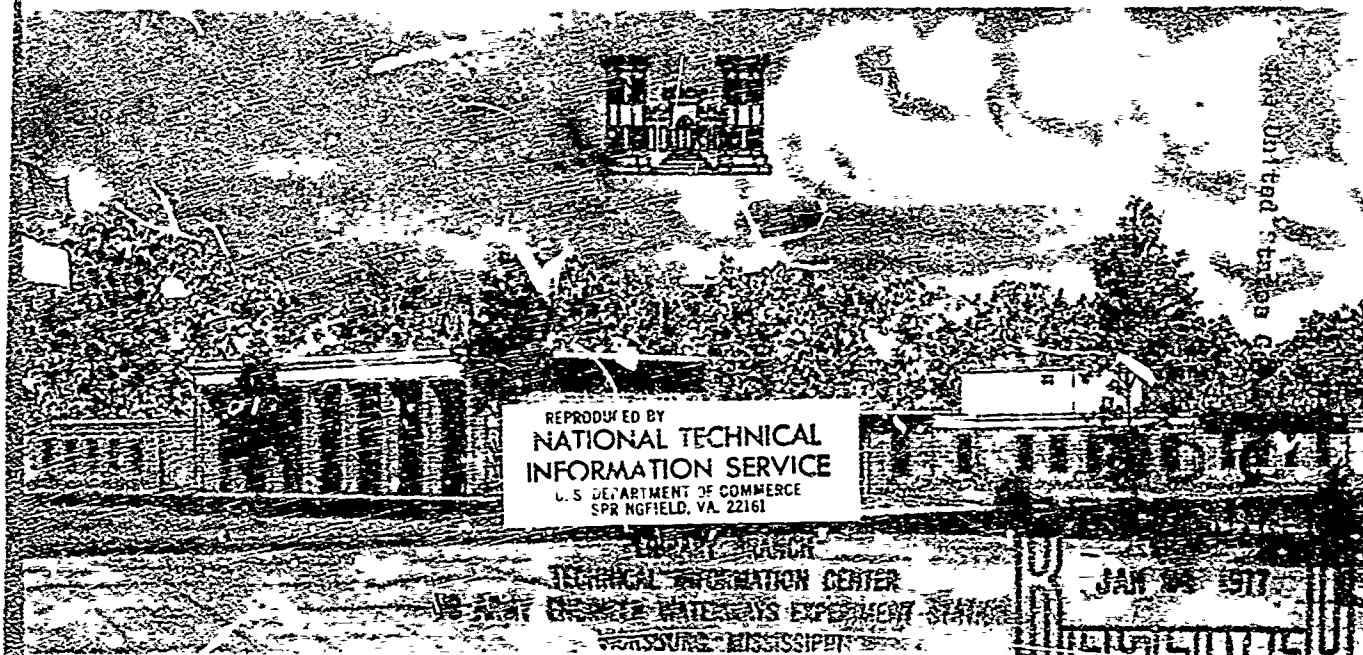

August 1972

Sponsored by U. S. Army Mobility Equipment Research and Development Center
Fort Belvoir, Virginia

Contracted by U. S. Army Engineer Waterways Experiment Station
Soils and Pavements Laboratory
Vicksburg, Mississippi

APPROVED FOR PUBLIC RELEASE; DISTRIBUTION UNLIMITED

Destroy this report when no longer needed. Do not return
it to the originator.

The findings in this report are not to be construed as an official
Department of the Army position unless so designated
by other authorized documents.

Tr

Cap. 1

FOREWORD

Authorization for this investigation was contained in a letter dated 20 April 1972 from the U. S. Army Mobility Equipment Research and Development Center (MERDC), Ft. Belvoir, Va., subject: Intra Army Order for Reimbursable Services No. A2297.

The data reported herein were obtained during 1972 by personnel of the U. S. Army Engineer Waterways Experiment Station (WES), Soils and Pavements Laboratory under the general supervision of Messrs. J. P. Sale, R. G. Ahlvin, and W. L. McInnis, and under the direct supervision of Mr. G. W. Leese. Mr. W. J. McNamara (MERDC) prepared the plan of test and made necessary arrangements with the U. S. Army Aeromedical Laboratory, Ft. Rucker, Ala., for use of the aircraft and airfield. COL W. P. Shane, assisted by CPT G. R. McCahan, Jr., Ft. Rucker, not only made arrangements for aircraft, personnel, and equipment for this study at the airfield at Apalachicola, Fla., but assisted WES personnel in performing the tests.

COL Ernest D. Peixotto, CE, was Director during the study and preparation of this report. Mr. F. R. Brown was Technical Director.

CONTENTS

	<u>Page</u>
FOREWORD	iii
CONVERSION FACTORS, BRITISH TO METRIC UNITS OF MEASUREMENT	vii
SUMMARY	ix
INTRODUCTION	1
AIRCRAFT	1
INSTRUMENTATION	1
TEST PROCEDURES AND RESULTS	2
Tables 1-4	
Photos 1 and 2	
Plate 1	

CONVERSION FACTORS, BRITISH TO METRIC UNITS OF MEASUREMENT

British units of measurement used in this report can be converted to metric units as follows:

<u>Multiply</u>	<u>By</u>	<u>To Obtain</u>
inches	2.54	centimeters
feet	0.3048	meters
pounds	0.45359237	kilograms
miles per hour	1.609344	kilometers per hour

SUMMARY

Field measurements were made to determine the velocity of the horizontal and vertical downwash flow beneath the rotor of a UH-1H helicopter. Maximum downwash velocities measured during 7-sec periods were as follows:

Direction of Flow	Distance from Center of Rotor Rotation, ft	<u>Aircraft Position</u>		Maximum Downwash Velocity mph	Remarks
		Hover Height ft	Heading* deg		
Horizontal	41	10	360	59	--
Vertical	29	30	270	30	6' above ground

*Referenced to instrument line:

360-deg heading, aircraft facing line

270-deg heading, aircraft rotated 90 deg left

7<

UH-1H DOWNWASH VELOCITY MEASUREMENTS

Introduction

1. The purpose of this investigation was to obtain field measurements of the horizontal and vertical downwash flow beneath the rotor of the UH-1H helicopter. These measurements were obtained by placing velocity transducers in a test area at the airfield at Apalachicola, Fla., and recording data as aircraft hovered in various positions in relation to the instruments.

Aircraft

2. The aircraft utilized in this study was the standard version of the UH-1H helicopter, which is a turbine-driven, single-rotor aircraft with a rotor diameter of 48 ft* and a gross weight of 8540 lb as tested. The distance between the aircraft skids and rotor actuator plane is 13 ft. The aircraft was equipped with a radio altimeter, which was used during these tests to maintain heights above the ground plane.

Instrumentation

3. Instrumentation consisted of velocity transducers of the voltage generation type using a 4-in.-diam propeller to sense the downwash velocity. The instruments were placed on the concrete apron of the airfield as shown in plate 1. There were six stands, each of which held six transducers. The stands were constructed so as to measure downwash velocities at heights of 2, 4, and 6 ft above the ground surface and were spaced 4 ft apart on the apron. The stands were mounted 12 deg off perpendicular in direction to the UH-1H helicopter rotation to prevent any interference among the vertical velocity transducers on the stands. Also, there were velocity transducers on the ground surface to measure ground surface; these transducers were spaced 4 ft apart, as shown in plate 1. The velocity transducers were calibrated in the WES wind tunnel just prior to and after the

* A table for converting British units of measurement to metric units is presented on page vii.

tests to ensure accurate calibrations. The outputs of the velocity transducers were recorded using an oscillograph. Photograph 1 shows a general view of the test area looking in the direction of ground-wash flow, while photograph 2 shows a close-up of the stands and the arrangement of the velocity transducers.

Test Procedures and Results

4. Tests were conducted to determine the velocity of the horizontal and vertical downwash from the helicopter rotor of a UH-1H helicopter hovering at skid heights of 10, 30, and 70 ft above the ground surface. The aircraft was positioned by personnel on the ground instructing the pilot as to necessary movements.

5. Vertical and horizontal downwash velocity measurements were made at 2, 4, and 6 ft above the ground surface at distances of 9, 13, 17, 21, 25, and 29 ft from the center of rotor rotation on the helicopter and at headings of 270, 300, 330, 360 deg. (Aircraft heading referenced to instrument line: 360-deg heading would be when the aircraft was facing the line of instruments; 330 deg when rotated 30 deg to left, etc.) Horizontal ground-wash measurements were made at the ground surface beneath each stand and also at distances of 0, 33, 37, 41, 45, 49, 53, 57, 61, 65, and 73 ft from the same center of rotor rotation. Simultaneous recordings were made of the output from all transducers. Data recordings were made only after the pilot indicated that the helicopter was stabilized, thus having the minimum of control input to the aircraft.

6. Simultaneous readings of downwash velocity with the aircraft hovering with rotor center of rotation over pickup 54 are shown in tables 1 and 2. Tables 3 and 4 give the maximum velocities attained during each test condition over a period of seven seconds. Maximum horizontal downwash velocity recorded during this time period was 59 mph at a distance of 41 ft from center of rotor rotation when the aircraft was at 10-ft hover height and 360-deg heading. Maximum vertical downwash velocity during this period was 30 mph at a vertical height of 6 ft above the ground surface and 29 ft from the center of rotor rotation when the aircraft was

at 30-ft hover height and 270-deg heading. Comparisons of tables 1 and 2 and 3 and 4 indicate that most of the flow was in the horizontal plane. To verify this, personnel walked beneath the hovering aircraft and could feel very little downward flow; they noted that the instrument propellers measuring vertical flow were rotating very slowly or not at all.

10<

Table 1

UH-1H DOWNWASH VELOCITY STUDY
SIMULTANEOUS HORIZONTAL VELOCITIES

Velocity Pickup No.	Skid Height Above Surface	10 ft				30 ft				70 ft			
		Aircraft Heading*				Aircraft Heading*				Aircraft Heading*			
		Test No.	Velocity	Pickup	Height Above Surface	Test No.	Velocity	Pickup	Height Above Surface	Test No.	Velocity	Pickup	Height Above Surface
1	4 in.	360°	1	2	3	360°	5	0	7	360°	9	10	11
2	4 in.	360°	31	30	22	360°	41	32	40	360°	24	25	28
3	4 in.	360°	39	35	26	360°	40	41	45	360°	25	29	48
4	4 in.	360°	41	31	35	360°	42	42	45	360°	26	30	49
5	4 in.	360°	46	32	40	360°	43	43	45	360°	27	31	51
6	4 in.	360°	45	37	39	360°	44	44	45	360°	28	32	53
7	4 in.	360°	46	41	37	360°	45	45	45	360°	29	33	54
8	4 in.	360°	48	47	39	360°	46	46	45	360°	30	34	55
9	4 in.	360°	44	49	38	360°	47	47	45	360°	31	35	56
10	4 in.	360°	36	51	37	360°	48	48	45	360°	32	36	57
11	4 in.	360°	30	45	42	360°	49	49	45	360°	33	37	58
12	4 in.	360°	34	50	43	360°	50	50	45	360°	34	38	59
14	4 ft	360°	42	29	44	360°	51	51	45	360°	35	39	60
16	4 ft	360°	29	22	44	360°	52	52	45	360°	36	40	61
18	4 ft	360°	12	37	43	360°	53	53	45	360°	37	41	62
19	4 ft	360°	31	40	39	360°	54	54	45	360°	38	42	63
20	4 ft	360°	39	21	19	360°	55	55	45	360°	39	43	64
22	4 ft	360°	39	22	41	360°	56	56	45	360°	40	44	65
24	4 ft	360°	7	27	45	360°	57	57	45	360°	41	45	66
26	4 ft	360°	26	26	20	360°	58	58	45	360°	42	46	67
28	4 ft	360°	5	11	15	360°	59	59	45	360°	43	47	68
30	4 ft	360°	5	11	15	360°	60	60	45	360°	44	48	69
32	4 ft	360°	5	11	15	360°	61	61	45	360°	45	49	70
34	4 ft	360°	5	11	15	360°	62	62	45	360°	46	50	71
36	4 ft	360°	5	11	15	360°	63	63	45	360°	47	51	72

* See plate 1

sheet 1 of 2

Table 1 (concluded)

Skid Height		10 ft				30 ft				70 ft			
Above Surface		360°				360°				360°			
Aircraft Heading*		330°				330°				330°			
Test No.		2				6				10			
Velocity Pickup		270°				270°				270°			
No.		3				7				11			
Velocity Pickup		270°				270°				270°			
No.		4				8				12			
Velocity Pickup		270°				270°				270°			
No.		4				8				12			
Velocity Pickup		270°				270°				270°			
No.		4				8				12			
Velocity Pickup		270°				270°				270°			
No.		4				8				12			
Velocity Pickup		270°				270°				270°			
No.		4				8				12			
Velocity Pickup		270°				270°				270°			
No.		4				8				12			
Velocity Pickup		270°				270°				270°			
No.		4				8				12			
Velocity Pickup		270°				270°				270°			
No.		4				8				12			
Velocity Pickup		270°				270°				270°			
No.		4				8				12			
Velocity Pickup		270°				270°				270°			
No.		4				8				12			
Velocity Pickup		270°				270°				270°			
No.		4				8				12			
Velocity Pickup		270°				270°				270°			
No.		4				8				12			
Velocity Pickup		270°				270°				270°			
No.		4				8				12			
Velocity Pickup		270°				270°				270°			
No.		4				8				12			
Velocity Pickup		270°				270°				270°			
No.		4				8				12			
Velocity Pickup		270°				270°				270°			
No.		4				8				12			
Velocity Pickup		270°				270°				270°			
No.		4				8				12			
Velocity Pickup		270°				270°				270°			
No.		4				8				12			
Velocity Pickup		270°				270°				270°			
No.		4				8				12			
Velocity Pickup		270°				270°				270°			
No.		4				8				12			
Velocity Pickup		270°				270°				270°			
No.		4				8				12			
Velocity Pickup		270°				270°				270°			
No.		4				8				12			
Velocity Pickup		270°				270°				270°			
No.		4				8				12			
Velocity Pickup		270°				270°				270°			
No.		4				8				12			
Velocity Pickup		270°				270°				270°			
No.		4				8				12			
Velocity Pickup		270°				270°				270°			
No.		4				8				12			
Velocity Pickup		270°				270°				270°			
No.		4				8				12			
Velocity Pickup		270°				270°				270°			
No.		4				8				12			
Velocity Pickup		270°				270°				270°			
No.		4				8				12			
Velocity Pickup		270°				270°				270°			
No.		4				8				12			
Velocity Pickup		270°				270°				270°			
No.		4				8				12			
Velocity Pickup		270°				270°				270°			
No.		4				8				12			
Velocity Pickup		270°				270°				270°			
No.		4				8				12			
Velocity Pickup		270°				270°				270°			
No.		4				8				12			
Velocity Pickup		270°				270°				270°			
No.		4				8				12			
Velocity Pickup		270°				270°				270°			
No.		4				8				12			
Velocity Pickup		270°				270°				270°			
No.		4				8				12			
Velocity Pickup		270°				270°				270°			
No.		4				8				12			
Velocity Pickup		270°				270°				270°			
No.		4				8				12			
Velocity Pickup		270°				270°				270°			
No.		4				8				12			
Velocity Pickup		270°				270°				270°			
No.		4				8				12			
Velocity Pickup		270°				270°				270°			
No.		4				8				12			
Velocity Pickup		270°				270°				270°			
No.		4				8				12			
Velocity Pickup		270°				270°				270°			
No.		4				8				12			
Velocity Pickup		270°				270°				270°			
No.		4				8				12			
Velocity Pickup		270°				270°				270°			
No.		4				8				12			
Velocity Pickup		270°				270°				270°			
No.		4				8				12			
Velocity Pickup		270°				270°				270°			
No.		4				8				12			
Velocity Pickup		270°				270°				270°			
No.		4				8				12			
Velocity Pickup		270°				270°				270°			
No.		4				8				12			
Velocity Pickup		270°				270°				270°			
No.		4				8				12			
Velocity Pickup		270°				270°				270°			
No.		4				8				12			
Velocity Pickup		270°				270°				270°			
No.		4											

Table 2
UH-1H DOWNWASH VELOCITY STUDY
SIMULTANEOUS VERTICAL VELOCITIES

Velocity Pickup No.	Skid Height		10 ft		30 ft		70 ft	
	Above Surface		360°		360°		360°	
	Aircraft Heading*	Test No.	360°	300°	360°	330°	360°	330°
13	2 ft	1	1	2	5	6	9	10
15	4 ft		-	-	8	9	-	-
17	6 ft		-	-	14	20	-	-
21	2 ft		-	14	-	-	-	-
23	4 ft		-	-	1	-	-	-
25	6 ft		-	-	-	-	-	-
27	2 ft	5	-	-	2	-	-	-
29	4 ft	8	-	-	-	-	-	-
31	6 ft	9	-	-	6	-	-	-
35	2 ft	14	-	-	-	3	-	-
37	4 ft		8	-	-	20	3	-
39	6 ft		-	-	-	-	-	-
41	2 ft		-	-	-	-	-	-
43	4 ft		-	-	-	-	-	-
45	6 ft	5	5	-	-	9	-	-
49	2 ft	12	-	-	-	-	-	-
51	4 ft		-	-	-	-	-	-
53	6 ft		-	-	-	-	-	-

Velocity, mph

* See plate 1

Table 3
UH-1H DOWNWASH VELOCITY STUDY
MAXIMUM HORIZONTAL VELOCITIES

Skid Height		10 ft			30 ft			70 ft		
Above Surface		360°	330°	300°	360°	330°	300°	360°	330°	300°
Aircraft Heading*		1	2	3	5	6	7	9	10	11
Velocity Pickup No.	Velocity Pickup Height Above Surface	39	47	36	45	48	40	41	38	6
1	4 in.	39	37	36	45	48	40	41	38	6
2	4 in.	43	47	41	52	55	48	47	3	3
3	4 in.	-	-	-	-	-	-	-	-	-
4	4 in.	49	47	43	45	54	53	46	12	10
5	4 in.	54	44	43	52	59	59	38	21	17
6	4 in.	47	47	43	51	55	48	37	22	8
7	4 in.	51	50	47	53	53	52	34	15	-
8	4 in.	52	54	48	52	54	54	19	2	-
9	4 in.	59	56	45	51	46	51	20	5	5
10	4 in.	53	53	48	44	41	46	21	3	3
11	4 in.	51	51	40	31	31	38	25	-	-
12	4 in.	43	46	47	10	11	28	28	-	-
14	2 ft	50	50	54	13	18	30	30	-	-
16	4 ft	51	47	45	30	30	35	7	9	9
18	6 ft	43	40	25	30	25	27	8	11	11
19	4 in.	34	37	48	9	24	19	38	-	-
20	2 ft	-	-	-	-	-	-	-	-	-
22	4 ft	43	43	36	14	20	22	-	8	8
24	6 ft	37	36	22	15	21	21	6	6	6
26	4 in.	27	25	40	6	14	9	16	-	-
28	2 ft	21	27	47	4	4	5	26	-	-
30	4 ft	-	-	-	-	-	-	-	-	-
32	6 ft	23	35	23	-	16	11	10	-	-
33	4 in.	5	6	1	5	15	9	4	4	-
34	2 ft	8	6	50	5	-	6	15	-	4

* See plate 1

sheet 1 of 2

Table 3 (cont'd)

Skid Height Above Surface		10 ft			30 ft			70 ft		
Aircraft Heading*		360°			360°			360°		
Test No.		1	2	3	5	6	7	9	10	11
Velocity Pickup		360°	330°	300°	360°	330°	300°	360°	330°	300°
Height Above Surface		270°	270°	270°	270°	270°	270°	270°	270°	270°
No.		4	4	4	4	4	4	4	4	4
Velocity, mph										
36	4 ft	9	15	43	3	3	7	-	3	3
38	6 ft	17	18	24	-	14	23	-	-	-
40	4 in.	-	9	41	-	16	11	-	-	-
42	2 ft	-	3	37	-	-	-	9	-	-
44	4 ft	-	5	44	-	-	-	4	-	-
46	6 ft	3	10	37	-	-	5	-	-	-
47	4 in.	-	-	31	9	23	12	-	5	6
48	2 ft	-	5	46	8	15	5	-	-	-
50	4 ft	-	-	42	-	-	-	-	-	-
52	6 ft	-	-	37	-	-	-	-	-	-
54	4 in.	-	13	20	-	16	11	-	-	-

Table 4

UH-1H DOWNWASH VELOCITY STUDY
MAXIMUM VERTICAL VELOCITIES

Velocity Pickup No.	Skid Height		10 ft		30 ft		70 ft		
	Above Surface		360°		360°		360°		
Aircraft Heading*		Test No.		300°		300°		300°	
Velocity Pickup		Height Above		270°		270°		270°	
Surface		No.		4		7		11	
				5		6		9	
				12		13		18	
				13		14		18	
				25		27		30	
				7		7		9	
				11		13		16	
				9		8		23	
				10		10		5	
				19		13		8	
				10		3		7	
				18		27		27	
				6		6		4	
				5		5		16	
				8		8		3	
				9		9		7	

* See plate 1



Photo 1. General view of UH-1H downwash measurements test area



Photo 2. Instrumentation for above-ground measurements

