

AD-A035 687

CONSTRUCTION ENGINEERING RESEARCH LAB (ARMY) CHAMPAI--ETC F/G 13/13  
DESIGN CRITERIA FOR THEATER OF OPERATIONS GLUED-LAMINATED TIMBE--ETC(U)  
JAN 77 L I KNAB, R C MOODY, W W SANDERS

UNCLASSIFIED


CERL-TR-M-198-VOL-1

NL

| OF |  
AD  
A035687  
EVS



END  
DATE  
FILMED  
3-77

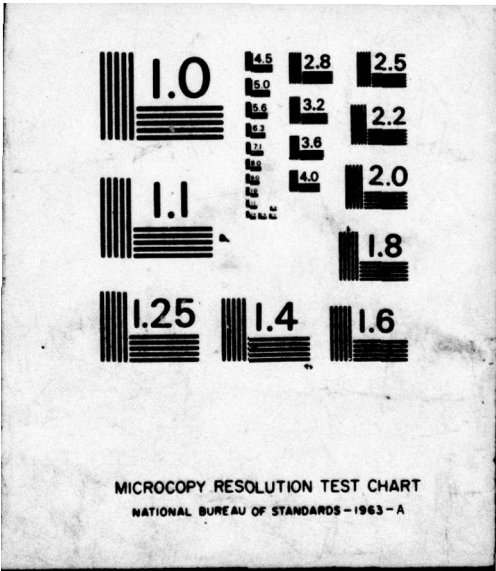

MICROCOPY RESOLUTION TEST CHART  
NATIONAL BUREAU OF STANDARDS - 1963 - A

construction  
engineering  
research  
laboratory


*J* *(12)*

TECHNICAL REPORT M-198  
January 1977

AFCSS Design Parameters for T/O Material Applications

ADA 035687

DESIGN CRITERIA FOR THEATER OF OPERATIONS  
GLUED-LAMINATED TIMBER HIGHWAY BRIDGES  
VOLUME I

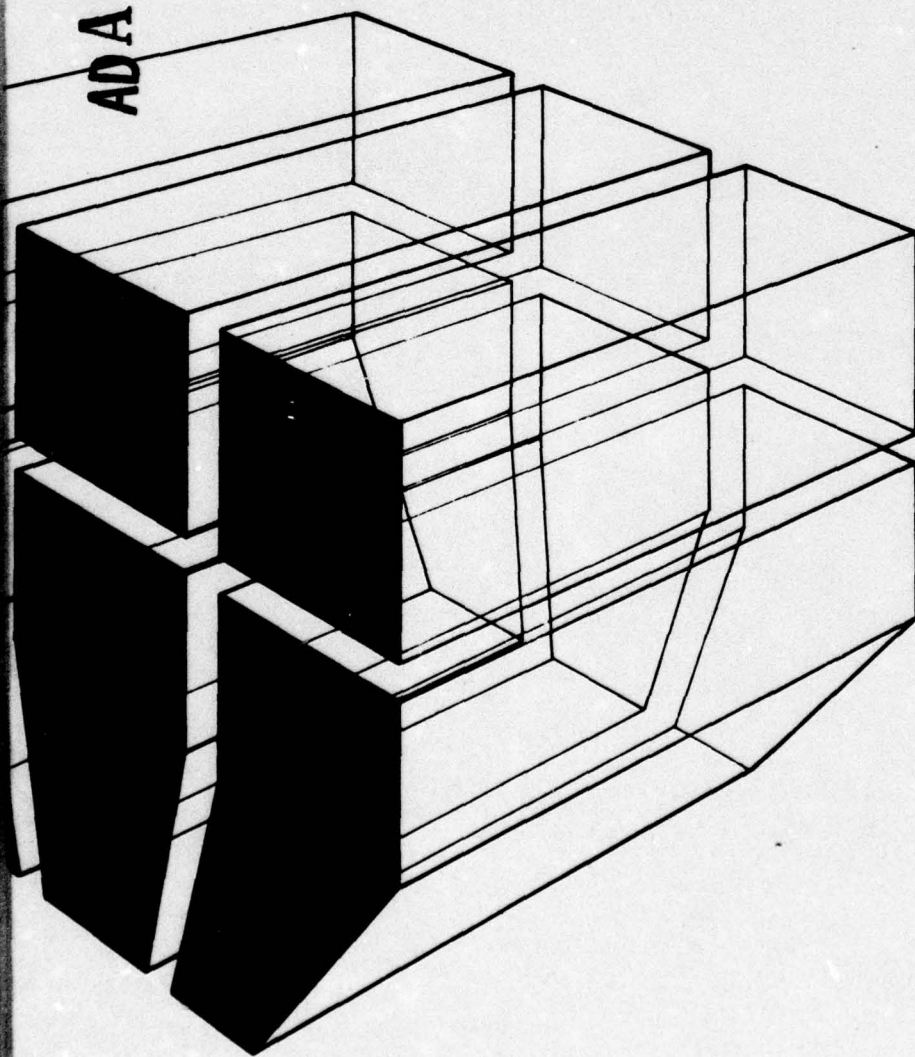

by  
L. I. Knab  
R. C. Moody  
W. W. Sanders, Jr.  
H. A. Elleby

D D C  
RECEIVED  
FEB 16 1977  
A C



The contents of this report are not to be used for advertising, publication, or promotional purposes. Citation of trade names does not constitute an official indorsement or approval of the use of such commercial products. The findings of this report are not to be construed as an official Department of the Army position, unless so designated by other authorized documents.

**DESTROY THIS REPORT WHEN IT IS NO LONGER NEEDED  
DO NOT RETURN IT TO THE ORIGINATOR**

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER <b>14</b> CERL-TR-M-198- <u>Vol-1</u>	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) <b>6</b> DESIGN CRITERIA FOR THEATER OF OPERATIONS GLUED-LAMINATED TIMBER HIGHWAY BRIDGES. VOLUME I.		5. TYPE OF REPORT & PERIOD COVERED <b>9</b> FINAL <u>rept.</u>
7. AUTHOR(s) <b>10</b> L. I. Knab, H. A. Elleby R. C. Moody, W. W. Sanders, Jr.		6. PERFORMING ORG. REPORT NUMBER
9. PERFORMING ORGANIZATION NAME AND ADDRESS CONSTRUCTION ENGINEERING RESEARCH LABORATORY P.O. Box 4005 Champaign, IL 61820		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS <b>16</b> 4A763734DT34-04-002
11. CONTROLLING OFFICE NAME AND ADDRESS	12. REPORT DATE <b>11</b> January 1977	13. NUMBER OF PAGES 19 <b>12</b> 20 p.
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)	15. SECURITY CLASS. (of this Report) Unclassified 15a. DECLASSIFICATION/DOWNGRADING SCHEDULE	
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES Copies are obtainable from National Technical Information Service Springfield, VA 22151		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) design criteria glued-laminated timber highway bridges material specifications		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) This report presents structural design criteria recommendations for theater of operations (T/O) temporary glued-laminated timber highway bridges. The report consists of two volumes: Volume I provides the design criteria, procedures, and material specifications, and Volume II contains the development of and justification for the criteria in Volume I.		

**RECEIVED**  
**FEB 16 1977**  
**REGISTERED**

405 279

Block 20 continued.

→ State-of-the-art methodologies were used to develop the criteria, which are based on modifications to existing military and permanent criteria. Use of the criteria by engineers in bridge design offices should result in T/O bridges that have adequate safety and perform satisfactorily.

→ Material weight of glued-laminated timber stringers in T/O bridges designed using the recommended criteria, typically will be about 15 percent less than when designed using permanent bridge criteria.

2

UNCLASSIFIED

## FOREWORD


This study was conducted for the Directorate of Facilities Engineering, Office of the Chief of Engineers (OCE) under Project 4A763734DT34, "Development of Engineer Support to the Field Army"; Task 04, "Base Development"; Work Unit 002, "AFCS Design Parameters for T/O Material Applications."

Mr. R. H. Barnard was the OCE Technical Monitor.

The research was conducted by the Construction Materials Branch (MSC) of the Materials and Science Division (MS), U.S. Army Construction Engineering Research Laboratory (CERL). Dr. L. I. Knab was Principal Investigator for the project. Mr. P. A. Howdysell is Chief of MSC and Dr. G. R. Williamson is Chief of MS.

Contractors contributing to the study were R. C. Moody of the U.S. Department of Agriculture Forest Service, Forest Products Laboratory, Madison, WI and W. W. Sanders, Jr. and H. A. Elleby of the Iowa State University Department of Civil Engineering, Ames, IA.

COL J. E. Hays is Commander and Director of CERL and Dr. L. R. Shaffer is Technical Director.

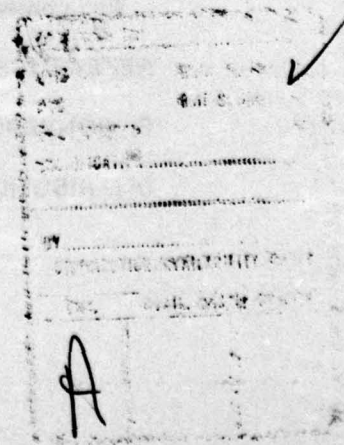

## CONTENTS

	Page
DD FORM 1473.....	1
FOREWORD .....	3
LIST OF TABLES .....	5
<b>1 INTRODUCTION.....</b>	<b>7</b>
Background	
Objective	
Approach	
<b>2 SUMMARY OF DESIGN CRITERIA DEVELOPMENT .....</b>	<b>7</b>
<b>3 RECOMMENDED DESIGN CRITERIA FOR AFCS BRIDGES .....</b>	<b>8</b>
Scope	
Safety, Savings, and Cost Effectiveness	
Implementation	
Fabrication, Assembly, Erection, and Handling	
Serviceability	
Preservative Treatments	
Loads, Moments, and Forces	
Flexural Members and Flexural Splices—Designing for Bending or Lateral Buckling in Stringers	
Shear in Stringers, Bearing Forces at Stringer Ends, and Forces in Stringer End Connection Fastenings	
Columns, Compression and Tension Members, and Their Associated Fastenings and Connections	
Impact	
Allowable Stresses—Members	
Criteria for Fastenings and Joints, and Other Criteria Not Covered Herein	
Criteria for Bridges Having Unusually High Consequences of Failure	
Modulus of Elasticity	
<b>4 DESIGN EXAMPLE .....</b>	<b>12</b>
Design of Glued-Laminated Timber Stringer Bridge	
<b>5 CONCLUSIONS AND RECOMMENDATIONS .....</b>	<b>18</b>
Conclusions	
Recommendations	
<b>REFERENCES .....</b>	<b>19</b>
<b>SI CONVERSION FACTORS.....</b>	<b>19</b>
<b>DISTRIBUTION</b>	

## TABLES

Number		Page
1	Recommended Equations and Current TM 5-312 Equations for Determining the Effective Number of Stringers	10
2	Values of Reduction Factor $c^*$ Used in Recommended Formulas (Table 1) for Determining the Effective Number of Stringers	10
3	Value of Effective Live Load Shear Force per Stringer, $v'_{LL}$	11
4	Recommended Modification Factor M	12

# RECOMMENDED DESIGN CRITERIA FOR GLUED-LAMINATED TIMBER HIGHWAY BRIDGES IN THEATERS OF OPERATION

## 1 INTRODUCTION

### Background

Engineer troop units in the theater of operations (T/O) are assigned diverse construction missions which often have critical completion date requirements. Many of these missions involve erection or assembly of standard prefabricated components such as those available for buildings and tactical bridges, while others require construction using conventional materials and components.

The Army Facilities Components System (AFCS) contains standard designs for many structures that T/O troop units may be required to construct. The AFCS publication TM 5-302,<sup>1</sup> and its related logistical references TM 5-301<sup>2</sup> and TM 5-303,<sup>3</sup> contain many standard structural designs using both standard and prefabricated components, along with bills of materials and construction practice guidance. These manuals greatly reduce the planning and design effort required to complete a construction assignment.

However, design criteria for military bridges using glued-laminated timber are currently unavailable. Since the design life of T/O structures is typically from 2 to 5 years, use of civilian structural design codes, which are generally based on a 50- to 75-year design life and relatively high levels of reliability, can result in unnecessarily conservative and uneconomical designs for the limited performance needs of T/O structures.

### Objective

The objective of this study is to develop design criteria recommendations for glued-laminated timber members in T/O highway bridges subjected to dead plus static live loads. The types of glued-laminated timber to be considered are those specified by American Institute of Timber Construction (AITC)

<sup>1</sup>Army Facilities Components System (AFCS)—Design, TM 5-302 (Department of the Army, 1973).

<sup>2</sup>Army Facilities Components System (AFCS)—Planning, TM 5-301 (Department of the Army, 1973).

<sup>3</sup>Army Facilities Components System (AFCS) Logistic Data and Bills of Materials, TM 5-303 (Department of the Army, 1973).

Specification 117-74<sup>4</sup> and Product Standard (PS) 56-73,<sup>5</sup> which cover glued-laminated timber fabricated from Douglas fir, Western larch, Southern pine, and California redwood.

### Approach

Appropriate reliability models were developed to analyze and evaluate the safety levels and consistency of existing permanent structural design criteria for glued-laminated timber bridge members. The models were then used to develop recommended T/O bridge design criteria for glued-laminated timber members for the dead plus live static load case.

Chapter 2 summarizes the development of the design criteria (the development and justifications for the criteria are detailed in Appendices A through E of Volume II). Chapter 3 presents the recommended design criteria, and Chapter 4 provides a design example. Chapter 5 presents the conclusions and recommendations.

## 2 SUMMARY OF DESIGN CRITERIA DEVELOPMENT

This report presents a rational basis for developing consistent design criteria for short-life structures. "Consistent" means that the probability or chance of reaching a limit state (limit state probability) of a structural member is compatible with the other limit state probabilities of that member or other members.

Member-resistance and structural loading data were combined to determine existing and recommended limit state probabilities and their corresponding safety index values. First order reliability theory and best estimates of central tendency (average values) coupled with measures of dispersion (coefficients of variation) of the resistance and load were used to compute the safety index values. These safety index values were computed for permanent and temporary structural elements and used as guides in determining recommended allowable stresses for the static failure mode. Recommended criteria for temporary bridges were determined to

<sup>4</sup>Standard Specifications for Structural Glued Laminated Timber of Douglas Fir, Western Larch, Southern Pine, and California Redwood, AITC 117-74 (American Institute of Timber Construction [AITC], 1974).

<sup>5</sup>Voluntary Product Standard PS 56-73 for Structural Glued Laminated Timber (AITC, 1973).



yield safety index values which will provide adequate safety relative to the safety levels and performance of permanent bridges, while reflecting the bridges' temporary nature.

It was assumed in the criteria development that adequate fabrication, assembly, and erection procedures are used. Special provisions and criteria are recommended when lower quality fabrication, assembly, and erection practices are likely to occur.

Stringer weight savings of about 15 percent result from using the recommended T/O bridge design criteria rather than using the permanent bridge allowable stresses with the design procedures in Chapter 3.

### **3 RECOMMENDED DESIGN CRITERIA FOR AFCS BRIDGES**

#### **Scope**

The following criteria are recommended for use in designing temporary T/O bridges using glued-laminated timber. Temporary bridges have design lives of 2 to 5 years (bridges whose failure would have unusually severe consequences are not considered temporary, even though their design lives may be 2 to 5 years). The maximum deviation from these criteria shall not exceed 2 percent (on the unconservative side) of the indicated design requirements.

The following criteria are based on AITC 117-74, PS 56-73, and the 1973 *National Design Specification (NDS) for Stress Grade Lumber and Its Fastenings*,<sup>6</sup> except as modified herein. The criteria apply to highway bridges only; they do not apply to railroad bridges.

#### **Safety, Savings, and Cost Effectiveness**

In the past, increased allowable stresses for static loading have been permitted for temporary steel stringer bridges.<sup>7</sup> The safety levels corresponding to the allowable stresses and/or design procedures for temporary glued-laminated stringer bridges were evaluated and used to determine acceptable design criteria and procedures which reflect the temporary

nature of T/O bridges. The safety levels corresponding to the recommended criteria for T/O bridges loaded with their normal or maximum loads are comparable to or exceed those corresponding to permanent civilian bridges loaded with their maximum loads. However, the safety levels corresponding to the recommended criteria for T/O bridges loaded with their normal or maximum loads are below those corresponding to permanent bridges loaded with their normal loads. In summary, the recommended criteria should result in acceptably safe temporary bridges compared with current permanent civilian bridges loaded with their maximum loads.

This discussion of safety is based on the assumption of adequate fabrication, assembly, and erection practices; the safety of a bridge can be reduced significantly by low quality fabrication, assembly, and erection practices (see the **Fabrication, Assembly, Erection, and Handling** section of this chapter).

Material weight of glued-laminated timber stringers in T/O bridges designed using the recommended criteria will typically be about 15 percent less than when designed using permanent bridge allowable stresses with the procedures recommended in this chapter.

Use of the recommended criteria rather than the permanent criteria to prevent static failure will be cost effective if the material, transportation, labor, and storage cost savings exceed the cost of implementing the criteria (see the **Implementation** section of this chapter).

Use of the recommended criteria appears reasonable, provided that the temporary steel and timber bridges used in the past have been acceptably safe and have performed satisfactorily. The decision to use the recommended criteria is to be made by the AFCS Office at the Office of the Chief of Engineers (DAEN-FEE-A).

#### **Implementation**

The recommended criteria are based on modifications to existing (AITC 117-74 and 1973 NDS) allowable stresses for permanent structures. The recommended criteria require use of the military design loads and procedures (as opposed to allowable stresses) given in TM 5-312 and modified herein. Hence, the recommended criteria are intended for use by bridge design offices, and not by combat engineers in the field. The criteria "package" required

<sup>6</sup>*National Design Specification for Stress Grade Lumber and Its Fastenings* (National Forest Products Association, 1973).

<sup>7</sup>*Military Fixed Bridges*, TM 5-312 (Department of the Army, December 1968), with changes 1 and 2.

by a bridge design office would consist of these criteria (Chapter 3), which in turn require the use of modified TM 5-312 design loads and procedures and the modified AITC 117-74 and 1973 NDS allowable stresses.

### **Fabrication, Assembly, Erection, and Handling**

The recommended criteria are based on the assumption that fabrication, assembly, and erection quality and tolerances are comparable to those used in U.S. permanent construction. The recommended allowable stresses shall be reduced accordingly for low quality fabrication, assembly, or erection. Fabrication, assembly, and erection shall be in accordance with AITC 117-74 and the AITC *Timber Construction Manual*.<sup>8</sup> Necessary precautions, including provision of adequate support and bracing to protect against buckling and other erection problems, shall be taken during erection.

Handling precautions shall be taken, especially for laminations which will be subjected to tension\* during service. Notching the bottom of stringer ends (e.g., to lower the elevation of the roadway) shall not be permitted.

### **Serviceability**

Because the criteria recommendations are based on limit state strength only, serviceability requirements, including deflection, are *not* covered by the criteria; they shall be imposed as judged necessary.

### **Preservative Treatments**

In warm, moist areas, preservative treatment may be necessary to insure a 5-year life for members in ground contact, e.g., abutments, pilings, etc. If preservative treatment is not feasible, consideration should be given to specifying all heartwood decay-resistant species.\*\*

### **Loads, Moments, and Forces†**

The recommended criteria apply to the dead plus live load case (vehicle plus payload weight). Other

<sup>8</sup>*Timber Construction Manual*, 2nd ed. (AITC, 1974).

\*Typically, the bottom laminations in stringers.

\*\*For more information see "Decay Resistance," *Wood Handbook: Wood as an Engineering Material*, Forest Service Agricultural Handbook No. 72 (Department of Agriculture, Forest Products Laboratory, 1974).

†In certain cases, unrealistically low loads, moments, and forces can result if the current procedures in TM 5-312 are used.

loads, including wind, water, ice, and earthquake, are not covered.

The procedures given in TM 5-312 for determining the design loads and the moments and forces used in the design of bridge members and fastenings shall be used, except as modified herein.

The two load cases used in the design process—the *normal* vehicle crossing load case and the *caution* crossing load case—are described in Table 4-3 of TM 5-312. Normal crossings are convoy(s) consisting of vehicles not exceeding the posted bridge class. A caution crossing consists of a single line of vehicles crossing a one- or two-lane bridge on the bridge centerline. Each vehicle is spaced at 150 ft\* or more and shall not be more than 1.25 times the normal posted bridge class. Additional details are given in Section IV, Chapter 4, of TM 5-312 and Paragraph 2-54 of FM 5-36.<sup>9</sup>

The current procedure in TM 5-312 proportions all members, fastenings, and connections on the basis of the normal class loading. The following recommended procedure, however, requires that they be proportioned on the basis of either the normal or caution load cases, as specified.

### **Flexural Members and Flexural Splices—Designing for Bending or Lateral Buckling in Stringers**

The live load moments corresponding to normal class crossings found in Appendix D of TM 5-312 shall be used to proportion the flexural members or flexural splices for bending and lateral buckling.

The current procedure for stringer design given in Paragraph 6-5 of TM 5-312 shall be used, except that the recommended formulas in Table 1 shall be used to determine the effective number of stringers.

### **Shear in Stringers, Bearing Forces at Stringer Ends, and Forces in Stringer End Connection Fastenings**

The live load shear force in stringers, bearing forces at ends of stringers, and forces in stringer end connection fastenings shall be determined by using the larger force resulting from the normal or caution

<sup>9</sup>SI conversion factors for all units of measurement used in this report are given at the end of the report.

<sup>9</sup>*Route Reconnaissance and Classification*, FM 5-36 (Department of the Army, May 1965).

Table 1

Recommended Equations and Current TM 5-312 Equations for Determining the Effective Number of Stringers

Current TM 5-312 Equations		Recommended Equations
Single lane: $N_1 = \frac{S}{S_s} + 1$	(Eq 6-7a)	Single lane: $N_1 = c \left[ \frac{S}{S_s} + 1 \right]$
Two lanes: $N_2 = \frac{3}{8} N_s$ or $N_2 = N_1$	(Eq 6-7b)	Two lanes: $N_2 = c \left[ \frac{3}{8} N_s \right]$ or $N_2 = N_1$
whichever is smaller		whichever is smaller

where  $N_1$  = effective number of stringers for single-lane bridges  
 $S_s$  = center-to-center stringer spacing in feet  
 $N_s$  = number of stringers  
 $N_2$  = effective number of stringers for two-lane bridges  
 $c$  = reduction factor given in Table 2

Table 2

Values of Reduction Factor  $c^*$  Used in Recommended Formulas (Table 1) for Determining the Effective Number of Stringers

Bridge Deck Type	Ratio of Bridge Floor Width (out-to-out) to Bridge Span Length (W/L)	
	W/L < 1.0	W/L > 1.0
Glued-laminated timber or concrete	1.0	0.75
Nailed-laminated timber, plank, or multiple-layered	0.90	0.70

\*The factor  $c$  accounts for the reduction in lateral load distribution when using nailed-laminated timber, plank, or multiple-layered decks and/or bridges which are very wide compared to their span length.

crossing load cases. The shear for single-lane bridges is based on the caution load case; for two-lane bridges it is based on either the normal load case or, if larger, the caution load case. The following procedure (revised Paragraph 6-6, TM 5-312) shall be used to determine the shear force in stringers, the bearing forces at stringer ends, and the forces in stringer end connection fastenings.

6-6.\* Shear Check (Shear Design)

c. Glued-Laminated Timber Stringer Bridges

Compared to steel stringers, glued-laminated timber stringers are relatively lower in horizontal shear strength. Thus, shear can be critical in glued-laminated timber stringers, and the horizontal shear stress often controls the allowable design load, particularly for short spans.

\*Paragraph 6-6b shall be retitled *Solid-Sawn Timber Stringer Bridges*.

(1) *Dead Load Shear.* The dead load shear per stringer is determined as for a steel stringer bridge using

$$v_{DL} = \frac{V_{DL}}{N_s} \quad \text{(Equation 6-12)}$$

(2) *Live Load Shear.*

(a) *Effective shear per stringer,  $v'_{LL}$ , for glued-laminated timber stringers.* The effective live load shear per stringer,  $v'_{LL}$ , must account for the shear per stringer due to loads near the support as well as loads out on the span. It can be assumed that the wheel or track loads which are at or near a support will go directly into the stringer (with the deck assumed to act as a series of simple beams) and the loads which are out on the span will be distributed laterally in a manner similar to moment. The effective live load shear per stringer  $v'_{LL}$  in kips shall be determined from Table 3.

(b) *Design live load shear per stringer,  $v_{LL}$ , for glued-laminated timber stringers.* Tests with timber beams indicate that the shear failure will occur when a concentrated load is at some constant distance from the support, rather than when the load is just off the support, the location that produces maximum shear. This is caused by the concentrated load tending to compress the fibers, thus increasing the horizontal shear strength. When the load is moved off the support a distance of about the depth of the stringer, the optimum condition for shear failure exists. Thus, the value of the effective live load shear per stringer,  $v'_{LL}$ , should be reduced accordingly. The design live load shear per stringer,  $v_{LL}$ , in kips, is:

**Table 3**  
**Value of Effective Live Load Shear Force per Stringer,  $v'_{LL}$**

	$v'_{LL}$ for Single Lane,* kips	$v'_{LL}$ for Double Lane,** kips
Wheeled vehicle	$1.25\left(0.5 + \frac{S_s}{32}\right)V_A + \left(\frac{V_{LLW} - V_A}{N_1}\right)$	$\left(\frac{S_s - 2}{S_s}\right)V_A + \left(\frac{V_{LLW} - V_A}{N_2}\right)$
Tracked vehicle	$1.25\left(\frac{V_{LLT}}{2}\right)$	$\left(\frac{S_s - 2}{S_s}\right)V_{LLT}$

where:  $V_{LLW}$  = wheeled vehicle shear in kips as given in Appendices D-4 and D-7<sup>†</sup> of TM 5-312

$V_{LLT}$  = tracked vehicle shear in kips as given in Appendices D-5 and D-7<sup>†</sup> of TM 5-312

$V_A$  = the heaviest axle load in kips as given in column 3<sup>†</sup> of Appendix D-1 of TM 5-312

$S_s$  = stringer spacing in ft

$N_1$  = effective number of stringers for single lane given in Table 1

$N_2$  = effective number of stringers for double lane given in Table 1.

\*The coefficient of 1.25 is used to adjust shear from normal crossing case to caution crossing case.

\*\*For the double-lane case,  $v'_{LL}$  shall be computed for both single and double lanes and the larger value of  $v'_{LL}$  shall be used.

<sup>†</sup>Entries in Appendix D-7 and column 3 of Appendix D-1 are given in tons and must be converted to kips.

$$v_{LL} = \left(\frac{L-d}{L}\right)v'_{LL}, \text{ but not less than } 0.75 v'_{LL}$$

(Revised Equation 6-17)

where  $v_{LL}$  = design live load shear per stringer in kips

$L$  = bridge span in ft

$d$  = depth of stringer in ft

$v'_{LL}$  = effective live load shear per stringer from Table 3.

(3) **Total Shear Per Stringer.** The total design shear,  $v$ , for a glued-laminated timber stringer is:

$$v = v_{DL} + v_{LL}$$

where  $v$  = total design shear per stringer in kips

$v_{DL}$  = dead load shear per stringer in kips

$v_{LL}$  = design live load shear per stringer in kips.

The rest of the shear design procedure shall be the same as that given in subparagraphs (4) and (5) of Paragraph 6-6b, *Timber Stringer Bridges* of TM 5-312.

**Columns, Compression and Tension Members, and Their Associated Fastenings and Connections**

The forces in compression or tension members and their associated fastenings and connections shall be the larger of the forces produced by the normal or caution crossing load cases.

**Impact**

The procedure to account for impact (no increase) given in TM 5-312 shall be followed.

**Allowable Stresses—Members**

The allowable stress for members in temporary T/O bridges shall be found from

$$f = MF \quad [\text{Eq 1}]$$

where  $f$  = allowable stress for members in temporary bridges

$M$  = modification factor found in Table 4

$F$  = AITC 117-74 allowable stresses for members for the dead plus live load case for 10 years of continuous or cumulative

**Table 4**  
**Recommended Modification Factor M**

<b>Resistance*</b>	<b>Value of M</b>
Bending	1.35
Shear	1.15
Compression parallel to grain**	1.15
Compression perpendicular to grain	1.15
Column buckling	1.00
Tension parallel to grain	0.80

\*Appropriate member moments and forces shall be determined as specified in the **Loads, Moments, and Forces** section.

\*\*Applies to fully braced columns only, i.e., when buckling cannot occur.

loading; F shall include all NDS modifications of stresses (except load duration) including moisture content, size effect (for bending), lateral stability (for bending), buckling (compression members), and bearing.

Depending on the application, bridge stringers treated with an oil-base preservative and having a waterproof deck may be designed with dry-use stresses for bending and shear. However, wet-use stresses shall always be used for compression perpendicular to grain.

**Criteria for Fastenings and Joints, and Other Criteria Not Covered Herein**

Criteria for fastenings and joints, and other criteria not covered herein, shall be as specified by NDS for permanent bridges; a load duration of 10 years of continuous or cumulative loading shall be used.

**Criteria for Bridges Having Unusually High Consequences of Failure**

For bridges whose failure would have unusually severe consequences, the AITC 117-74 allowable stresses for 10 years of continuous or cumulative

loading (i.e., for permanent bridges) shall be used for members, except that 70 percent of the AITC 117-74 allowable stress for tension\* shall be used. Criteria for fastenings and joints and all other criteria (except allowable stresses for members) shall be as specified by NDS for permanent bridges; a load duration of 10 years of continuous or cumulative loading shall be used. Recommendations given in the **Loads, Moments, and Forces** section of this chapter shall be used.\*\*

**Modulus of Elasticity†**

Modulus of elasticity values for deflection checks and column design shall be taken from AITC 117-74.

**4 DESIGN EXAMPLE**

The following example of the design of glued-laminated stringers for an AFCS bridge is based on the criteria given in Chapter 3. Additional references<sup>10</sup> commonly used in glued-laminated timber design for permanent structures are suggested.

**Design of Glued-Laminated Timber Stringer Bridge**

Design class 50, two-lane bridge, glued-laminated stringers, nailed-laminated timber deck, single 60-ft span, stringer timber: Southern pine 24 F-3 combination, dry condition of use.

\*Refers to axial tension parallel to grain and not to tension due to bending.

\*\*In certain cases, unrealistically low loads, moments, and forces can result if the current procedures in TM 5-312 are used.

†This section applies to temporary bridges and bridges having unusually high consequences of failure.

<sup>10</sup>*Glulam Bridge Systems Plans* (AITC, 1974); *Timber Construction Manual*, 2nd ed. (AITC, 1974); *National Design Specification for Stress Grade Lumber and Its Fastenings* (National Forest Products Association, 1973); and *Standard Specifications for Highway Bridges* (American Association of State Highway and Transportation Officials, 1973).

**Procedure**

**Remarks (References refer to TM 5-312 unless otherwise noted)**

**1. Design Loads (60-ft span)**

**a. Dead Load**

$$W'_{DL} = X + L(Y + ZC)$$

Equation 6-1

$$W'_{DL} = 500 + 60 [7 + 0.4(50)]$$

Table 6-1

$$W'_{DL} = 2120 \text{ lb/ft} = 2.12 \text{ kips/ft}$$

$$M_{DL} = \frac{W'_{DL} L^2}{8} = \frac{(2.12)(60)^2}{8}$$

Equation 6-2

$$= 954 \text{ kip-ft}$$

$$V_{DL} = \frac{W'_{DL} L}{2} = \frac{2.12(60)}{2}$$

Equation 6-3

$$= 63.6 \text{ kips}$$

**b. Live Load**

$$M_{LLW} = 1235 \text{ kip-ft}$$

Appendix D-6

$$M_{LLT} = 1338 \text{ kip-ft} \leftarrow \text{Controls}$$

Appendix D-6

$$V_{LLW} = 89.5 \text{ kips}$$

Appendix D-7

$$V_{LLT} = 89.2 \text{ kips}$$

Appendix D-7

**2. Stringer Selection**

**a. Effective Stringers**

For a class 50 two-lane bridge, the minimum width is 24 ft 0 in. Maximum stringer spacing is 6 ft 0 in.

Table 6-2

The minimum number of stringers ( $N_s$ ) is

$$N_s = \frac{W_R}{S_s} + 1 = \frac{24.0}{6.0} + 1 = 5$$

Equation 6-5a

The effective number of stringers for a two-lane bridge ( $N_2$ ) is

$$N_2 = c \left[ \frac{3}{8} N_s \right] \text{ or } N_2 = N_1$$

whichever is smaller

$$N_1 = c \left[ \frac{S}{S_s} + 1 \right]$$

$$c = 0.90$$

$$N_1 = 0.90 \left[ \frac{5}{6.0} + 1 \right] = 1.65$$

$$N_2 = 0.90 \left[ \frac{3}{8} (5) \right] = 1.69 \text{ or}$$

$$N_2 = N_1 = 1.65$$

Use smaller of  $N_1$  or  $N_2$

$$\text{Therefore: } N_2 = 1.65$$

b. *Design Moment, m*

$$m = m_{DL} + m_{LL}$$

$$m = \frac{M_{DL}}{N_s} + \frac{M_{LL}}{N_2}$$

$$m = \frac{954}{5} + \frac{1338}{1.65}$$

$$= 190.8 + 810.9$$

$$m = 1001.7 \text{ kip-ft}$$

c. *Required Section Modulus*

$$S_r = \frac{m(12)}{f_b}$$

*Allowable bending stress,  $f_b$*

$$f_b = MF_b$$

Table 1 in Chapter 3 of this report.

Table 1 in Chapter 3 of this report.

Table 2 in Chapter 3 of this report. The reduction factor  $c$  corresponds to  $W/L < 1.0$  and a nailed-laminated timber deck.

Equation 6-9a

Equation 6-10

Equation 1 in Chapter 3 of this report where  $M$  = modification factor in Table 4 and  $F_b$  = allowable AITC 117-74 bending stress (assuming adequate lateral support).

$$M = 1.35$$

$$F_b = C_F(2400)$$

$$C_F = (12/d)^{1/9}$$

d = depth of member, in.

To obtain an estimate of  $F_b$  and  $f_b$  assume

$$C_F = 0.85$$

$$\text{Then } f_b = (1.35)(0.85)(2400)$$

$$= 2754 \text{ psi} = 2.75 \text{ ksi}$$

The required section modulus based on  $f_b = 2.75$  ksi is

$$S_r = \frac{m(12)}{f_b} = \frac{(1001.7)(12)}{2.75}$$

$$= 4371 \text{ in.}^3$$

Trial Section:

b(width) = 10.75 in. (actual dimension)

d(depth) = 49.5 in. (actual dimension)

$$C_F = (12/49.5)^{1/9} = 0.85$$

Therefore  $f_b = 2.75$  ksi is correct  
and  $S_r = 4371 \text{ in.}^3$

$$S = \frac{bd^2}{6} = \frac{(10.75)(49.5)^2}{6}$$

$$= 4390 \text{ in.}^3$$

$$S > S_r$$

Therefore, trial section is adequate for bending, assuming adequate lateral support

### 3. Shear Check

#### a. Dead Load Shear

$$v_{LL} = \frac{V_{DL}}{N_s} = \frac{63.6 \text{ kips}}{5}$$

$$= 12.7 \text{ kips}$$

$F_b$  for Southern pine, 24F-3 combination, dry is:  
 $F_b = C_F(2400)$

$C_F$  = size effect factor given in Section 903-F NDS.

Equation 6-10

Also see table in AITC 117-74 titled "Structural Glued-Laminated Timber Section Properties"

Equation 6-12

b. *Live Load Shear*

$$v_{LL} = \left(\frac{L-d}{L}\right)v'_{LL}, \text{ but not less than } 0.75 v'_{LL}$$

Equation 6-17 of TM 5-312 as revised in Chapter 3 of this report.

$v'_{LL}$ , *Wheeled Vehicle, Single Lane:*

$$v'_{LL} = 1.25 \left[ \left(0.5 + \frac{S_s}{32}\right) V_A + \left(\frac{V_{LLW} - V_A}{N_1}\right) \right]$$

Table 3, Chapter 3 of this report.

$$S_s = 6.0 \text{ ft}$$

$$V_A = 40 \text{ kips}$$

Appendix D-1, Column 3

$$V_{LLW} = 89.5 \text{ kips}$$

$$N_1 = 1.65$$

$$v'_{LL} = 1.25 \left[ \left(0.5 + \frac{6.0}{32}\right) 40 + \left(\frac{89.5 - 40}{1.65}\right) \right]$$

$$= 71.9 \text{ kips}$$

$v'_{LL}$ , *Wheeled Vehicle, Double Lane:*

$$v'_{LL} = \left(\frac{S_s - 2}{S_s}\right) V_A + \left(\frac{V_{LLW} - V_A}{N_2}\right)$$

Table 3, Chapter 3 of this report.

$$N_2 = 1.65$$

$$v'_{LL} = \left(\frac{6 - 2}{6}\right) 40 + \left(\frac{89.5 - 40}{1.65}\right)$$

$$= 56.7 \text{ kips}$$

$v'_{LL}$ , *Tracked Vehicle, Single Lane:*

$$v'_{LL} = 1.25 \left(\frac{V_{LLT}}{2}\right)$$

Table 3, Chapter 3 of this report.

$$V_{LLT} = 89.2 \text{ kips}$$

$$v'_{LL} = 1.25 \left(\frac{89.2}{2}\right) = 55.8 \text{ kips}$$

$v'_{LL}$ , *Tracked Vehicle, Double Lane:*

$$v'_{LL} = \left(\frac{S_s - 2}{S_s}\right) V_{LLT}$$

Table 3, Chapter 3 of this report.

$$S_s = 6.0 \text{ ft}$$

$$v'_{LL} = \left(\frac{6-2}{6}\right)89.2 = 59.5 \text{ kips}$$

Use largest  $v'_{LL}$  for single and double lanes and wheeled and tracked vehicles;

Therefore  $v'_{LL} = 71.9$  kips

The live load shear then becomes:

$$v_{LL} = \left(\frac{60 - (49.5/12)}{60}\right)71.9$$

but not less than  $0.75(71.9)$

$$v_{LL} = 0.93(71.9) = 67.0 \text{ kips}$$

and  $67.0 \text{ kips} > 0.75(71.9) \text{ kips}$

Therefore,  $v_{LL} = 67.0$  kips

c. *Total Design Shear*

$$v = v_{DL} + v_{LL} = 12.7 + 67.0 = 79.7 \text{ kips}$$

d. *Effective Shear Area*

$$A_{v_r} = \frac{v}{f_v}$$

$$f_v = MF_v$$

$$M = 1.15$$

For Southern pine, combination 24F-3

$$F_v = 200 \text{ psi}$$

$$f_v = 1.15(200) = 230 \text{ psi}$$

$$= 0.230 \text{ ksi}$$

$$A_{v_r} = \frac{79.7}{0.230} = 346 \text{ sq in.}$$

$$A_v \text{ of } b = 10.75 \text{ in.},$$

$$d = 49.5 \text{ in. section:}$$

$$A_v = \frac{2}{3} bd$$

Table 3, Chapter 3 of this report.

Equation 6-17 of TM 5-312 as revised in Chapter 3 of this report.

Chapter 3 of this report.

Equation 6-19

Equation 1, Chapter 3 of this report.

Table 4, Chapter 3 of this report.

Allowable AITC 117-74 shear stress,  $F_v = 200$  psi

Equation 6-20

$$A_v = \frac{2}{3} (10.75)(49.5) = 354.75 \text{ sq in.}$$

$A_v > A_{v_T}$  Shear O.K.

4. The deck must be designed and the actual dead load versus the assumed dead load checked; appropriate changes in section modulus and shear area, if necessary, must then be made. The deflection and lateral bracing must be checked, the fastenings and joints must be designed, and the bearing must be checked.

## 5 CONCLUSIONS AND RECOMMENDATIONS

### Conclusions

1. Design criteria, procedures, and material specifications developed using state-of-the-art methodologies should result in adequate safety and performance for T/O glued-laminated timber stringer highway bridges. (Volume II presents the development and justification of the criteria.)
2. Bridge stringer material weight savings of about 15 percent result when using the recommended T/O bridge design criteria rather than using permanent bridge allowable stresses with the design procedures recommended in Chapter 3.

3. The criteria, design procedures, and material specifications are given in Chapter 3 for AFCS bridges. In Chapter 3, modified design loads and procedures given in TM 5-312 and modified AITC 117-74 allowable stresses are recommended. The recommendations in Chapter 3 for AFCS bridges are intended to be used by engineers in bridge design offices, and not by combat engineers in the field.

### Recommendations

1. The design criteria, procedures, and material specifications given in Chapter 3 should be considered for use in the design of AFCS T/O bridges.
2. Consideration should be given to the development of procedures, criteria, and material specifications for the design of glued-laminated timber decks for T/O glued-laminated timber stringer bridges.

## REFERENCES

- Army Facilities Components System (AFCS)—Design*, TM 5-302 (Department of the Army, 1973).
- Army Facilities Components System (AFCS) Logistic Data and Bills of Materials*, TM 5-303 (Department of the Army, 1973).
- Army Facilities Components System (AFCS)—Planning*, TM 5-301 (Department of the Army, 1973).
- "Decay Resistance," *Wood Handbook: Wood as an Engineering Material*, Forest Service Agricultural Handbook No. 72 (Department of Agriculture, Forest Products Laboratory, 1974).
- Glulam Bridge Systems Plans* (American Institute of Timber Construction [AITC], 1974).
- Military Fixed Bridges*, TM 5-312 (Department of the Army, December 1968), with changes 1 and 2.
- National Design Specification for Stress Grade Lumber and Its Fastenings* (National Forest Products Association, 1973).
- Route Reconnaissance and Classification*, FM 5-36 (Department of the Army, May 1965).
- Standard Specifications for Highway Bridges* (American Association of State Highway and Transportation Officials, 1973).
- Standard Specifications for Structural Glued Laminated Timber of Douglas Fir, Western Larch, Southern Pine, and California Redwood*, AITC 117-74 (AITC, 1974).
- Timber Construction Manual*, 2nd ed. (AITC, 1974).
- Voluntary Product Standard PS 56-73 for Structural Glued Laminated Timber* (AITC, 1973).

## SI CONVERSION FACTORS

$$1 \text{ ft} = 0.3048 \text{ m}$$

$$1 \text{ ft-lb} = 1.3558 \text{ Nm}$$

$$1 \text{ in.} = 2.54 \text{ cm}$$

$$1 \text{ kip} = 4.448 \text{ kN}$$

$$1 \text{ kip-ft} = 1.3558 \text{ kNm}$$

$$1 \text{ ksi} = 0.69 \text{ kN/cm}^2$$

$$1 \text{ sq in.} = 6.4516 \text{ cm}^2$$

$$(^{\circ}\text{F} - 32) 5/9 = ^{\circ}\text{C}$$

## CERL DISTRIBUTION

Picatinny Arsenal  
ATTN: SMAUPA-VP3

US Army, Europe  
ATTN: AEAEN

Director of Facilities Engineering  
APO New York, NY 09827  
APO Seattle, WA 98749

DARCOM STIT-EUR  
APO New York 09710

USA Liaison Detachment  
ATTN: Library  
New York, NY 10007

US Military Academy  
ATTN: Dept of Mechanics  
ATTN: Library

Chief of Engineers  
ATTN: DAEN-ASI-L (2)  
ATTN: DAEN-FEE-A  
ATTN: DAEN-FEB  
ATTN: DAEN-FESA  
ATTN: DAEN-FEZ-A  
ATTN: DAEN-MCZ-S (2)  
ATTN: DAEN-RDL  
ATTN: DAEN-ZCP  
ATTN: DAEN-PMS (12)  
for forwarding to  
National Defense Headquarters  
Director General of Construction  
Ottawa, Ontario K1A0K2  
Canada

Canadian Forces Liaison Officer (4)  
U.S. Army Mobility Equipment  
Research and Development Command  
Ft Belvoir, VA 22060

Div of Bldg Research  
National Research Council  
Montreal Road  
Ottawa, Ontario, K1A0R6

Airports and Const. Services Dir.  
Technical Information Reference  
Centre  
KAOL, Transport Canada Building  
Place de Ville, Ottawa, Ontario  
Canada, K1A 0N8

British Liaison Officer (5)  
U.S. Army Mobility Equipment  
Research and Development Center  
Ft Belvoir, VA 22060

Ft Belvoir, VA 22060  
ATTN: ATSE-TD-TL (2)  
ATTN: Learning Resources Center  
ATTN: Kingman Bldg, Library

US Army Foreign Science &  
Tech Center  
ATTN: Charlottesville, VA 22901  
ATTN: Far East Office

Ft Monroe, VA 23651  
ATTN: ATEN  
ATTN: ATEN-FE-BG (2)

Ft McPherson, GA 30330  
ATTN: AFEN-FEB

Ft Lee, VA 23801  
ATTN: DRXMC-D (2)

USA-CRREL

USA-MES  
ATTN: Concrete Lab  
ATTN: Soils & Pavements Lab  
ATTN: Library

6th US Army  
ATTN: AFKC-LG-E

I Corps (ROK/US) Group  
ATTN: EACI-EN  
APO San Francisco 96358

US Army Engineer District  
New York  
ATTN: Chief, Design Br  
Buffalo  
ATTN: Library  
Saudi Arabia  
ATTN: Library

US Army Engineer District  
Pittsburgh

ATTN: Library  
ATTN: ORPCD  
ATTN: Chief, Engr Div

Philadelphia  
ATTN: Library  
ATTN: Chief, NAPEN-D

Baltimore  
ATTN: Library  
ATTN: Chief, Engr Div

Norfolk  
ATTN: Library  
ATTN: NAON-D

Huntington  
ATTN: Library  
ATTN: Chief, Engr Div

Wilmington  
ATTN: Chief, SAMCO-C  
Charleston  
ATTN: Chief, Engr Div

Savannah  
ATTN: Library  
ATTN: Chief, SASAS-L

Jacksonville  
ATTN: Library  
ATTN: Const. Div

Mobile  
ATTN: Library  
ATTN: Chief, SAMEH-D  
ATTN: Chief, SAMEH-F

Nashville  
ATTN: Chief, ORNED-F

Memphis  
ATTN: Chief, Const. Div  
ATTN: Chief, LMED-D

Vicksburg  
ATTN: Chief, Engr Div  
Louisville  
ATTN: Chief, Engr Div

Detroit  
ATTN: Library  
ATTN: Chief, NCEED-T

St. Paul  
ATTN: Chief, ED-D  
ATTN: Chief, ED-F

Chicago  
ATTN: Chief, NCCCO-C  
ATTN: Chief, NCCED-F

Rock Island  
ATTN: Library  
ATTN: Chief, Engr Div  
ATTN: Chief, NCREDF

St. Louis  
ATTN: Library  
ATTN: Chief, ED-D

Kansas City  
ATTN: Library (2)  
ATTN: Chief, Engr Div

Omaha  
ATTN: Chief, Engr Div  
New Orleans  
ATTN: Library (2)

Little Rock  
ATTN: Chief, Engr Div

Fort Worth  
ATTN: Library  
ATTN: SMFED-D  
ATTN: SMFED-F

Galveston  
ATTN: Chief, SMGAS-L  
ATTN: Chief, SMGCO-C  
ATTN: Chief, SMGED-DC

Albuquerque  
ATTN: Library  
ATTN: Chief, Engr Div

Los Angeles  
ATTN: Library  
ATTN: Chief, SPLED-F

San Francisco  
ATTN: Chief, Engr Div  
Sacramento  
ATTN: Chief, SPKED-D

Far East  
ATTN: Chief, Engr Div  
Japan  
ATTN: Library

Portland  
ATTN: Library  
ATTN: Chief, DB-6  
ATTN: Chief, FM-1  
ATTN: Chief, FM-2

Seattle  
ATTN: Chief, NPSCO  
ATTN: Chief, NPSEN-FH  
ATTN: Chief, EN-DB-ST

US Army Engineer District  
Walla Walla

ATTN: Library  
ATTN: Chief, Engr Div

Alaska  
ATTN: Library  
ATTN: NPADE-R

US Army Engineer Division  
Europe  
ATTN: Technical Library

New England  
ATTN: Library  
ATTN: Laboratory  
ATTN: Chief, NLEICU

North Atlantic  
ATTN: Library  
ATTN: Chief, NADEN

South Atlantic  
ATTN: Library  
ATTN: Laboratory  
ATTN: Chief, SADEN-TC

Huntsville  
ATTN: Library (2)  
ATTN: Chief, HNEDE-CS  
ATTN: Chief, HNEDE-SR

Lower Mississippi  
ATTN: Library  
ATTN: Chief, LMVED-G

Ohio River  
ATTN: Laboratory  
ATTN: Chief, Engr Div  
ATTN: Library

North Central  
ATTN: Library  
Missouri River  
ATTN: Library (2)

ATTN: Chief, MRDED-G  
ATTN: Laboratory  
Southwestern  
ATTN: Library

ATTN: Laboratory  
ATTN: Chief, SWDED-TG  
South Pacific  
ATTN: Laboratory

Pacific Ocean  
ATTN: Chief, Engr Div  
ATTN: FMBS Branch  
ATTN: Chief, PODED-D

North Pacific  
ATTN: Laboratory  
ATTN: Chief, Engr Div

Facilities Engineer  
FORSCOM

Ft Devens, MA 01433  
Ft McPherson, GA 30330  
Ft Sam Houston, TX 78234  
Ft Carson, CO 80913  
Ft Campbell, KY 42223  
Ft Hood, TX 76544  
Ft Lewis, WA 98433

TRADOC  
Ft Dix, NJ 08640  
Ft Monroe, VA 23651  
Ft Lee, VA 23801  
Ft Gordon, GA 30905  
Ft McClellan, AL 36201  
Ft Knox, KY 40121  
Ft Benjamin Harrison, IN 46216  
Ft Leonard Wood, MO 65473  
Ft Sill, OK 73503  
Ft Bliss, TX 79916

HQ, 24th Inf, Ft Stewart, GA 31313  
HQ, 1st Inf, Ft Riley, KS 66442  
HQ, 5th Inf, Ft Polk, LA 71459  
HQ, 7th Inf, Ft Ord, CA 93941  
West Point, NY 10996  
ATTN: MAEN-E  
Ft Benning, GA 31905  
ATTN: ATZB-FE-EP  
ATTN: ATZB-FE-BG  
CAC&FL  
ATTN: DFAE (3)  
Ft Leavenworth, KS 66027  
AMC  
Dugway, UT 84022  
USACC  
Ft Huachuca, AZ 85613

AF/PREEU  
Bolling AFB, DC 20332

AF Civil Engr Center/KRL  
Tyndall AFB, FL 32401

Little Rock AFB  
ATTN: 314/DEEE/Mr. Gillham

MSC

Naval Facilities Engr Command  
ATTN: Code 04  
Alexandria, VA 22332

Port Hueneme, CA 93043  
ATTN: Library (Code LOBA)  
ATTN: Morrell Library

Defense Documentation Center (12)

Washington, DC  
ATTN: Bldg Research Advisory Board  
ATTN: Library of Congress (2)  
ATTN: Federal Aviation Administration  
ATTN: Dept of Transportation Library  
ATTN: Transportation Research Board

Engineering Societies Library  
New York, NY 10017

USAES  
Dept of Military Eng  
Fixed Bridge Section  
ATTN: CPT Phillips  
Ft Belvoir, VA 22060

NAVFAC  
HQ Engineering and Design  
Structural Branch  
Alexandria, VA 22332

Dept of Civil Engineering  
ATTN: C. A. Cornell  
Massachusetts Institute of  
Technology  
Cambridge, MA 02319

Henry M. Reitz  
Consulting Engineers  
111 South Maramac  
St Louis, MO 63105

Gregory Griffith  
815 Graham St  
Lynchburg, VA 24504

Case Institute of Technology  
School of Engineering  
Dept of Solid Mechanics and  
Structural and Mechanical Design  
ATTN: Fred Moses  
Cleveland, OH 44106

American Institute of Timber  
Construction  
ATTN: T. Brassell  
Englewood, CO 80110

Washington University  
Civil Engineering Department  
ATTN: T. V. Galambos  
St Louis, MO 63130

AD-A035 687

CONSTRUCTION ENGINEERING RESEARCH LAB (ARMY) CHAMPAI--ETC F/G 13/13  
DESIGN CRITERIA FOR THEATER OF OPERATIONS GLUED-LAMINATED TIMBE--ETC(U)  
JAN 77 L I KNAB, R C MOODY, W W SANDERS

UNCLASSIFIED


CERL-TR-M-198-VOL-1

NL

| OF |  
AD  
A035687



END  
DATE  
FILMED  
3-77

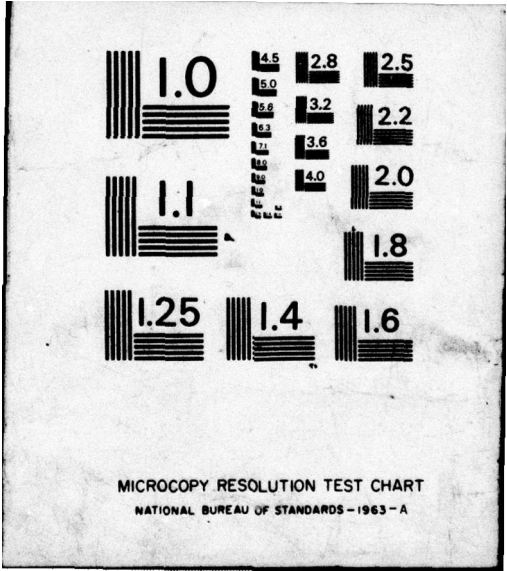

MICROCOPY RESOLUTION TEST CHART  
NATIONAL BUREAU OF STANDARDS - 1963 - A


construction  
engineering  
research  
laboratory

✓ 12


TECHNICAL REPORT M-198  
January 1977  
AFCS Design Parameters for T/O Material Applications

ADA 035687

DESIGN CRITERIA FOR THEATER OF OPERATIONS  
GLUED-LAMINATED TIMBER HIGHWAY BRIDGES  
VOLUME I

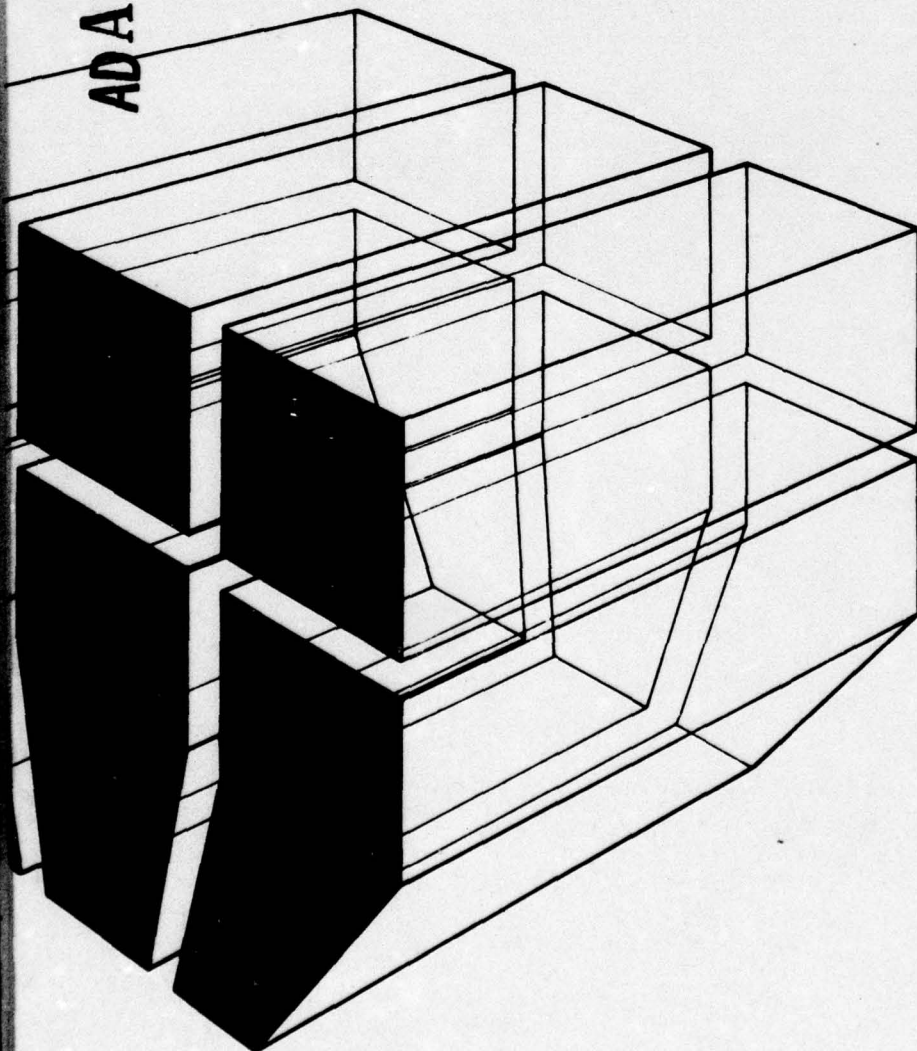


by  
L. I. Knab  
R. C. Moody  
W. W. Sanders, Jr.  
H. A. Elleby

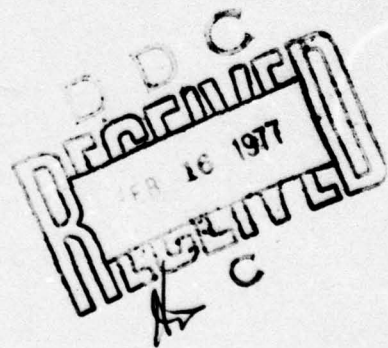

**The contents of this report are not to be used for advertising, publication, or promotional purposes. Citation of trade names does not constitute an official indorsement or approval of the use of such commercial products. The findings of this report are not to be construed as an official Department of the Army position, unless so designated by other authorized documents.**

***DESTROY THIS REPORT WHEN IT IS NO LONGER NEEDED  
DO NOT RETURN IT TO THE ORIGINATOR***

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER <b>14</b> CERL-TR-M-198-Vol-1	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) DESIGN CRITERIA FOR THEATER OF OPERATIONS GLUED-LAMINATED TIMBER HIGHWAY BRIDGES. VOLUME I.	5. TYPE OF REPORT & PERIOD COVERED <b>9</b> FINAL Rept.	
7. AUTHOR(s) <b>10</b> L. I. Knab, H. A. Elleby R. C. Moody W. W. Sanders, Jr.	6. CONTRACT OR GRANT NUMBER(s)	
9. PERFORMING ORGANIZATION NAME AND ADDRESS CONSTRUCTION ENGINEERING RESEARCH LABORATORY P.O. Box 4005 Champaign, IL 61820	10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS <b>16</b> 4A763734DT34-04-002	
11. CONTROLLING OFFICE NAME AND ADDRESS	12. REPORT DATE <b>11</b> January 1977	
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)	13. NUMBER OF PAGES 19 <b>12</b> 20 pgs	
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.	15. SECURITY CLASS. (of this report) Unclassified	
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)	15a. DECLASSIFICATION/DOWNGRADING SCHEDULE	
18. SUPPLEMENTARY NOTES Copies are obtainable from National Technical Information Service Springfield, VA 22151		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) design criteria glued-laminated timber highway bridges material specifications		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) This report presents structural design criteria recommendations for theater of operations (T/O) temporary glued-laminated timber highway bridges. The report consists of two volumes: Volume I provides the design criteria, procedures, and material specifications, and Volume II contains the development of and justification for the criteria in Volume I.		

405 279

Block 20 continued.

→ State-of-the-art methodologies were used to develop the criteria, which are based on modifications to existing military and permanent criteria. Use of the criteria by engineers in bridge design offices should result in T/O bridges that have adequate safety and perform satisfactorily.

→ Material weight of glued-laminated timber stringers in T/O bridges designed using the recommended criteria, typically will be about 15 percent less than when designed using permanent bridge criteria.



2

UNCLASSIFIED

## FOREWORD


This study was conducted for the Directorate of Facilities Engineering, Office of the Chief of Engineers (OCE) under Project 4A763734DT34, "Development of Engineer Support to the Field Army"; Task 04, "Base Development"; Work Unit 002, "AFCS Design Parameters for T/O Material Applications."

Mr. R. H. Barnard was the OCE Technical Monitor.

The research was conducted by the Construction Materials Branch (MSC) of the Materials and Science Division (MS), U.S. Army Construction Engineering Research Laboratory (CERL). Dr. L. I. Knab was Principal Investigator for the project. Mr. P. A. Howdysshell is Chief of MSC and Dr. G. R. Williamson is Chief of MS.

Contractors contributing to the study were R. C. Moody of the U.S. Department of Agriculture Forest Service, Forest Products Laboratory, Madison, WI and W. W. Sanders, Jr. and H. A. Elleby of the Iowa State University Department of Civil Engineering, Ames, IA.

COL J. E. Hays is Commander and Director of CERL and Dr. L. R. Shaffer is Technical Director.

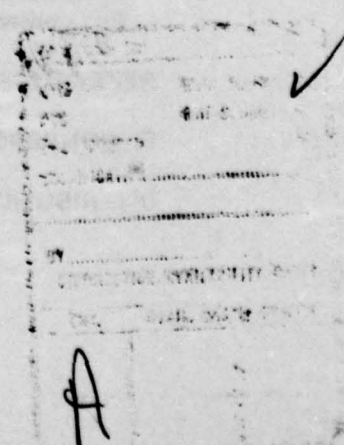

## CONTENTS

	<b>Page</b>
<b>DD FORM 1473.....</b>	<b>1</b>
<b>FOREWORD .....</b>	<b>3</b>
<b>LIST OF TABLES .....</b>	<b>5</b>
<b>1 INTRODUCTION.....</b>	<b>7</b>
<b>Background</b>	
<b>Objective</b>	
<b>Approach</b>	
<b>2 SUMMARY OF DESIGN CRITERIA DEVELOPMENT .....</b>	<b>7</b>
<b>3 RECOMMENDED DESIGN CRITERIA FOR AFCS BRIDGES .....</b>	<b>8</b>
<b>Scope</b>	
<b>Safety, Savings, and Cost Effectiveness</b>	
<b>Implementation</b>	
<b>Fabrication, Assembly, Erection, and Handling</b>	
<b>Serviceability</b>	
<b>Preservative Treatments</b>	
<b>Loads, Moments, and Forces</b>	
<b>Flexural Members and Flexural Splices—Designing</b>	
<b>for Bending or Lateral Buckling in Stringers</b>	
<b>Shear in Stringers, Bearing Forces at Stringer Ends,</b>	
<b>and Forces in Stringer End Connection Fastenings</b>	
<b>Columns, Compression and Tension Members, and Their</b>	
<b>Associated Fastenings and Connections</b>	
<b>Impact</b>	
<b>Allowable Stresses—Members</b>	
<b>Criteria for Fastenings and Joints, and Other Criteria Not</b>	
<b>Covered Herein</b>	
<b>Criteria for Bridges Having Unusually High Consequences</b>	
<b>of Failure</b>	
<b>Modulus of Elasticity</b>	
<b>4 DESIGN EXAMPLE .....</b>	<b>12</b>
<b>Design of Glued-Laminated Timber Stringer Bridge</b>	
<b>5 CONCLUSIONS AND RECOMMENDATIONS .....</b>	<b>18</b>
<b>Conclusions</b>	
<b>Recommendations</b>	
<b>REFERENCES .....</b>	<b>19</b>
<b>SI CONVERSION FACTORS .....</b>	<b>19</b>
<b>DISTRIBUTION</b>	

## TABLES

Number	Page
1 Recommended Equations and Current TM 5-312 Equations for Determining the Effective Number of Stringers	10
2 Values of Reduction Factor $c^*$ Used in Recommended Formulas (Table 1) for Determining the Effective Number of Stringers	10
3 Value of Effective Live Load Shear Force per Stringer, $v'_{LL}$	11
4 Recommended Modification Factor M	12

# RECOMMENDED DESIGN CRITERIA FOR GLUED-LAMINATED TIMBER HIGHWAY BRIDGES IN THEATERS OF OPERATION

## 1 INTRODUCTION

### Background

Engineer troop units in the theater of operations (T/O) are assigned diverse construction missions which often have critical completion date requirements. Many of these missions involve erection or assembly of standard prefabricated components such as those available for buildings and tactical bridges, while others require construction using conventional materials and components.

The Army Facilities Components System (AFCS) contains standard designs for many structures that T/O troop units may be required to construct. The AFCS publication TM 5-302,<sup>1</sup> and its related logistical references TM 5-301<sup>2</sup> and TM 5-303,<sup>3</sup> contain many standard structural designs using both standard and prefabricated components, along with bills of materials and construction practice guidance. These manuals greatly reduce the planning and design effort required to complete a construction assignment.

However, design criteria for military bridges using glued-laminated timber are currently unavailable. Since the design life of T/O structures is typically from 2 to 5 years, use of civilian structural design codes, which are generally based on a 50- to 75-year design life and relatively high levels of reliability, can result in unnecessarily conservative and uneconomical designs for the limited performance needs of T/O structures.

### Objective

The objective of this study is to develop design criteria recommendations for glued-laminated timber members in T/O highway bridges subjected to dead plus static live loads. The types of glued-laminated timber to be considered are those specified by American Institute of Timber Construction (AITC)

<sup>1</sup>Army Facilities Components System (AFCS)—Design, TM 5-302 (Department of the Army, 1973).

<sup>2</sup>Army Facilities Components System (AFCS)—Planning, TM 5-301 (Department of the Army, 1973).

<sup>3</sup>Army Facilities Components System (AFCS) Logistic Data and Bills of Materials, TM 5-303 (Department of the Army, 1973).

Specification 117-74<sup>4</sup> and Product Standard (PS) 56-73,<sup>5</sup> which cover glued-laminated timber fabricated from Douglas fir, Western larch, Southern pine, and California redwood.

### Approach

Appropriate reliability models were developed to analyze and evaluate the safety levels and consistency of existing permanent structural design criteria for glued-laminated timber bridge members. The models were then used to develop recommended T/O bridge design criteria for glued-laminated timber members for the dead plus live static load case.

Chapter 2 summarizes the development of the design criteria (the development and justifications for the criteria are detailed in Appendices A through E of Volume II). Chapter 3 presents the recommended design criteria, and Chapter 4 provides a design example. Chapter 5 presents the conclusions and recommendations.

## 2 SUMMARY OF DESIGN CRITERIA DEVELOPMENT

This report presents a rational basis for developing consistent design criteria for short-life structures. "Consistent" means that the probability or chance of reaching a limit state (limit state probability) of a structural member is compatible with the other limit state probabilities of that member or other members.

Member-resistance and structural loading data were combined to determine existing and recommended limit state probabilities and their corresponding safety index values. First order reliability theory and best estimates of central tendency (average values) coupled with measures of dispersion (coefficients of variation) of the resistance and load were used to compute the safety index values. These safety index values were computed for permanent and temporary structural elements and used as guides in determining recommended allowable stresses for the static failure mode. Recommended criteria for temporary bridges were determined to

<sup>4</sup>Standard Specifications for Structural Glued Laminated Timber of Douglas Fir, Western Larch, Southern Pine, and California Redwood, AITC 117-74 (American Institute of Timber Construction [AITC], 1974).

<sup>5</sup>Voluntary Product Standard PS 56-73 for Structural Glued Laminated Timber (AITC, 1973).

PROCEEDING FROM THE AMERICAN INSTITUTE OF TIMBER CONSTRUCTION

yield safety index values which will provide adequate safety relative to the safety levels and performance of permanent bridges, while reflecting the bridges' temporary nature.

It was assumed in the criteria development that adequate fabrication, assembly, and erection procedures are used. Special provisions and criteria are recommended when lower quality fabrication, assembly, and erection practices are likely to occur.

Stringer weight savings of about 15 percent result from using the recommended T/O bridge design criteria rather than using the permanent bridge allowable stresses with the design procedures in Chapter 3.

### **3 RECOMMENDED DESIGN CRITERIA FOR AFCS BRIDGES**

#### **Scope**

The following criteria are recommended for use in designing temporary T/O bridges using glued-laminated timber. Temporary bridges have design lives of 2 to 5 years (bridges whose failure would have unusually severe consequences are not considered temporary, even though their design lives may be 2 to 5 years). The maximum deviation from these criteria shall not exceed 2 percent (on the unconservative side) of the indicated design requirements.

The following criteria are based on AITC 117-74, PS 56-73, and the 1973 *National Design Specification (NDS) for Stress Grade Lumber and Its Fastenings*,<sup>6</sup> except as modified herein. The criteria apply to highway bridges only; they do not apply to railroad bridges.

#### **Safety, Savings, and Cost Effectiveness**

In the past, increased allowable stresses for static loading have been permitted for temporary steel stringer bridges.<sup>7</sup> The safety levels corresponding to the allowable stresses and/or design procedures for temporary glued-laminated stringer bridges were evaluated and used to determine acceptable design criteria and procedures which reflect the temporary

nature of T/O bridges. The safety levels corresponding to the recommended criteria for T/O bridges loaded with their normal or maximum loads are comparable to or exceed those corresponding to permanent civilian bridges loaded with their maximum loads. However, the safety levels corresponding to the recommended criteria for T/O bridges loaded with their normal or maximum loads are below those corresponding to permanent bridges loaded with their normal loads. In summary, the recommended criteria should result in acceptably safe temporary bridges compared with current permanent civilian bridges loaded with their maximum loads.

This discussion of safety is based on the assumption of adequate fabrication, assembly, and erection practices; the safety of a bridge can be reduced significantly by low quality fabrication, assembly, and erection practices (see the **Fabrication, Assembly, Erection, and Handling** section of this chapter).

Material weight of glued-laminated timber stringers in T/O bridges designed using the recommended criteria will typically be about 15 percent less than when designed using permanent bridge allowable stresses with the procedures recommended in this chapter.

Use of the recommended criteria rather than the permanent criteria to prevent static failure will be cost effective if the material, transportation, labor, and storage cost savings exceed the cost of implementing the criteria (see the **Implementation** section of this chapter).

Use of the recommended criteria appears reasonable, provided that the temporary steel and timber bridges used in the past have been acceptably safe and have performed satisfactorily. The decision to use the recommended criteria is to be made by the AFCS Office at the Office of the Chief of Engineers (DAEN-FEE-A).

#### **Implementation**

The recommended criteria are based on modifications to existing (AITC 117-74 and 1973 NDS) allowable stresses for permanent structures. The recommended criteria require use of the military design loads and procedures (as opposed to allowable stresses) given in TM 5-312 and modified herein. Hence, the recommended criteria are intended for use by bridge design offices, and not by combat engineers in the field. The criteria "package" required

<sup>6</sup>*National Design Specification for Stress Grade Lumber and Its Fastenings* (National Forest Products Association, 1973).

<sup>7</sup>*Military Fixed Bridges*, TM 5-312 (Department of the Army, December 1968), with changes 1 and 2.

by a bridge design office would consist of these criteria (Chapter 3), which in turn require the use of modified TM 5-312 design loads and procedures and the modified AITC 117-74 and 1973 NDS allowable stresses.

### **Fabrication, Assembly, Erection, and Handling**

The recommended criteria are based on the assumption that fabrication, assembly, and erection quality and tolerances are comparable to those used in U.S. permanent construction. The recommended allowable stresses shall be reduced accordingly for low quality fabrication, assembly, or erection. Fabrication, assembly, and erection shall be in accordance with AITC 117-74 and the AITC *Timber Construction Manual*.<sup>8</sup> Necessary precautions, including provision of adequate support and bracing to protect against buckling and other erection problems, shall be taken during erection.

Handling precautions shall be taken, especially for laminations which will be subjected to tension\* during service. Notching the bottom of stringer ends (e.g., to lower the elevation of the roadway) shall not be permitted.

### **Serviceability**

Because the criteria recommendations are based on limit state strength only, serviceability requirements, including deflection, are *not* covered by the criteria; they shall be imposed as judged necessary.

### **Preservative Treatments**

In warm, moist areas, preservative treatment may be necessary to insure a 5-year life for members in ground contact, e.g., abutments, pilings, etc. If preservative treatment is not feasible, consideration should be given to specifying all heartwood decay-resistant species.\*\*

### **Loads, Moments, and Forces†**

The recommended criteria apply to the dead plus live load case (vehicle plus payload weight). Other

<sup>8</sup>*Timber Construction Manual*, 2nd ed. (AITC, 1974).

\*Typically, the bottom laminations in stringers.

\*\*For more information see "Decay Resistance," *Wood Handbook: Wood as an Engineering Material*, Forest Service Agricultural Handbook No. 72 (Department of Agriculture, Forest Products Laboratory, 1974).

†In certain cases, unrealistically low loads, moments, and forces can result if the current procedures in TM 5-312 are used.

loads, including wind, water, ice, and earthquake, are not covered.

The procedures given in TM 5-312 for determining the design loads and the moments and forces used in the design of bridge members and fastenings shall be used, except as modified herein.

The two load cases used in the design process—the *normal* vehicle crossing load case and the *caution* crossing load case—are described in Table 4-3 of TM 5-312. Normal crossings are convoy(s) consisting of vehicles not exceeding the posted bridge class. A caution crossing consists of a single line of vehicles crossing a one- or two-lane bridge on the bridge centerline. Each vehicle is spaced at 150 ft\* or more and shall not be more than 1.25 times the normal posted bridge class. Additional details are given in Section IV, Chapter 4, of TM 5-312 and Paragraph 2-54 of FM 5-36.<sup>9</sup>

The current procedure in TM 5-312 proportions all members, fastenings, and connections on the basis of the normal class loading. The following recommended procedure, however, requires that they be proportioned on the basis of either the normal or caution load cases, as specified.

### ***Flexural Members and Flexural Splices—Designing for Bending or Lateral Buckling in Stringers***

The live load moments corresponding to normal class crossings found in Appendix D of TM 5-312 shall be used to proportion the flexural members or flexural splices for bending and lateral buckling.

The current procedure for stringer design given in Paragraph 6-5 of TM 5-312 shall be used, except that the recommended formulas in Table 1 shall be used to determine the effective number of stringers.

### ***Shear in Stringers, Bearing Forces at Stringer Ends, and Forces in Stringer End Connection Fastenings***

The live load shear force in stringers, bearing forces at ends of stringers, and forces in stringer end connection fastenings shall be determined by using the larger force resulting from the normal or caution

\*SI conversion factors for all units of measurement used in this report are given at the end of the report.

<sup>9</sup>*Route Reconnaissance and Classification*, FM 5-36 (Department of the Army, May 1965).

**Table 1**  
**Recommended Equations and Current TM 5-312 Equations for Determining the Effective Number of Stringers**

Current TM 5-312 Equations		Recommended Equations
Single lane: $N_1 = \frac{S}{S_s} + 1$	(Eq 6-7a)	Single lane: $N_1 = c[\frac{S}{S_s} + 1]$
Two lanes: $N_2 = \frac{3}{8} N_s$ or $N_2 = N_1$	(Eq 6-7b)	Two lanes: $N_2 = c[\frac{3}{8} N_s]$ or $N_2 = N_1$
whichever is smaller		whichever is smaller

where  $N_1$  = effective number of stringers for single-lane bridges  
 $S_s$  = center-to-center stringer spacing in feet  
 $N_s$  = number of stringers  
 $N_2$  = effective number of stringers for two-lane bridges  
 $c$  = reduction factor given in Table 2

**Table 2**  
**Values of Reduction Factor  $c^*$  Used in Recommended Formulas (Table 1) for Determining the Effective Number of Stringers**

Bridge Deck Type	Ratio of Bridge Floor Width (out-to-out) to Bridge Span Length (W/L)	
	W/L < 1.0	W/L > 1.0
Glued-laminated timber or concrete	1.0	0.75
Nailed-laminated timber, plank, or multiple-layered	0.90	0.70

\*The factor  $c$  accounts for the reduction in lateral load distribution when using nailed-laminated timber, plank, or multiple-layered decks and/or bridges which are very wide compared to their span length.

crossing load cases. The shear for single-lane bridges is based on the caution load case; for two-lane bridges it is based on either the normal load case or, if larger, the caution load case. The following procedure (revised Paragraph 6-6, TM 5-312) shall be used to determine the shear force in stringers, the bearing forces at stringer ends, and the forces in stringer end connection fastenings.

**6-6.\* Shear Check (Shear Design)**

*c. Glued-Laminated Timber Stringer Bridges*

Compared to steel stringers, glued-laminated timber stringers are relatively lower in horizontal shear strength. Thus, shear can be critical in glued-laminated timber stringers, and the horizontal shear stress often controls the allowable design load, particularly for short spans.

\*Paragraph 6-6b shall be retitled *Solid-Sawn Timber Stringer Bridges*.

(1) *Dead Load Shear*. The dead load shear per stringer is determined as for a steel stringer bridge using

$$v_{DL} = \frac{V_{DL}}{N_s} \quad \text{(Equation 6-12)}$$

(2) *Live Load Shear*.

(a) *Effective shear per stringer,  $v'_{LL}$ , for glued-laminated timber stringers*. The effective live load shear per stringer,  $v'_{LL}$ , must account for the shear per stringer due to loads near the support as well as loads out on the span. It can be assumed that the wheel or track loads which are at or near a support will go directly into the stringer (with the deck assumed to act as a series of simple beams) and the loads which are out on the span will be distributed laterally in a manner similar to moment. The effective live load shear per stringer  $v'_{LL}$  in kips shall be determined from Table 3.

(b) *Design live load shear per stringer,  $v_{LL}$ , for glued-laminated timber stringers*. Tests with timber beams indicate that the shear failure will occur when a concentrated load is at some constant distance from the support, rather than when the load is just off the support, the location that produces maximum shear. This is caused by the concentrated load tending to compress the fibers, thus increasing the horizontal shear strength. When the load is moved off the support a distance of about the depth of the stringer, the optimum condition for shear failure exists. Thus, the value of the effective live load shear per stringer,  $v'_{LL}$ , should be reduced accordingly. The design live load shear per stringer,  $v_{LL}$ , in kips, is:

**Table 3**  
**Value of Effective Live Load Shear Force per Stringer,  $v'_{LL}$**

	$v'_{LL}$ for Single Lane,* kips	$v'_{LL}$ for Double Lane,** kips
Wheeled vehicle	$1.25\left(0.5 + \frac{S_s}{32}\right)V_A + \left(\frac{V_{LLW} - V_A}{N_1}\right)$	$\left(\frac{S_s - 2}{S_s}\right)V_A + \left(\frac{V_{LLW} - V_A}{N_2}\right)$
Tracked vehicle	$1.25\left(\frac{V_{LLT}}{2}\right)$	$\left(\frac{S_s - 2}{S_s}\right)V_{LLT}$

where:  $V_{LLW}$  = wheeled vehicle shear in kips as given in Appendices D-4 and D-7<sup>†</sup> of TM 5-312

$V_{LLT}$  = tracked vehicle shear in kips as given in Appendices D-5 and D-7<sup>†</sup> of TM 5-312

$V_A$  = the heaviest axle load in kips as given in column 3<sup>†</sup> of Appendix D-1 of TM 5-312

$S_s$  = stringer spacing in ft

$N_1$  = effective number of stringers for single lane given in Table 1

$N_2$  = effective number of stringers for double lane given in Table 1.

\*The coefficient of 1.25 is used to adjust shear from normal crossing case to caution crossing case.

\*\*For the double-lane case,  $v'_{LL}$  shall be computed for both single and double lanes and the larger value of  $v'_{LL}$  shall be used.

<sup>†</sup>Entries in Appendix D-7 and column 3 of Appendix D-1 are given in tons and must be converted to kips.

$$v_{LL} = \left(\frac{L-d}{L}\right)v'_{LL}, \text{ but not less than } 0.75 v'_{LL}$$

(Revised Equation 6-17)

where  $v_{LL}$  = design live load shear per stringer in kips

$L$  = bridge span in ft

$d$  = depth of stringer in ft

$v'_{LL}$  = effective live load shear per stringer from Table 3.

(3) **Total Shear Per Stringer.** The total design shear,  $v$ , for a glued-laminated timber stringer is:

$$v = v_{DL} + v_{LL}$$

where  $v$  = total design shear per stringer in kips

$v_{DL}$  = dead load shear per stringer in kips

$v_{LL}$  = design live load shear per stringer in kips.

The rest of the shear design procedure shall be the same as that given in subparagraphs (4) and (5) of Paragraph 6-6b, *Timber Stringer Bridges* of TM 5-312.

#### *Columns, Compression and Tension Members, and Their Associated Fastenings and Connections*

The forces in compression or tension members and their associated fastenings and connections shall be the larger of the forces produced by the normal or caution crossing load cases.

#### *Impact*

The procedure to account for impact (no increase) given in TM 5-312 shall be followed.

#### **Allowable Stresses—Members**

The allowable stress for members in temporary T/O bridges shall be found from

$$f = MF \quad [\text{Eq 1}]$$

where  $f$  = allowable stress for members in temporary bridges

$M$  = modification factor found in Table 4

$F$  = AITC 117-74 allowable stresses for members for the dead plus live load case for 10 years of continuous or cumulative

**Table 4**  
**Recommended Modification Factor M**

<b>Resistance*</b>	<b>Value of M</b>
Bending	1.35
Shear	1.15
Compression parallel to grain**	1.15
Compression perpendicular to grain	1.15
Column buckling	1.00
Tension parallel to grain	0.80

\*Appropriate member moments and forces shall be determined as specified in the **Loads, Moments, and Forces** section.

\*\*Applies to fully braced columns only, i.e., when buckling cannot occur.

loading; F shall include all NDS modifications of stresses (except load duration) including moisture content, size effect (for bending), lateral stability (for bending), buckling (compression members), and bearing.

Depending on the application, bridge stringers treated with an oil-base preservative and having a waterproof deck may be designed with dry-use stresses for bending and shear. However, wet-use stresses shall always be used for compression perpendicular to grain.

#### **Criteria for Fastenings and Joints, and Other Criteria Not Covered Herein**

Criteria for fastenings and joints, and other criteria not covered herein, shall be as specified by NDS for permanent bridges; a load duration of 10 years of continuous or cumulative loading shall be used.

#### **Criteria for Bridges Having Unusually High Consequences of Failure**

For bridges whose failure would have unusually severe consequences, the AITC 117-74 allowable stresses for 10 years of continuous or cumulative

loading (i.e., for permanent bridges) shall be used for members, except that 70 percent of the AITC 117-74 allowable stress for tension\* shall be used. Criteria for fastenings and joints and all other criteria (except allowable stresses for members) shall be as specified by NDS for permanent bridges; a load duration of 10 years of continuous or cumulative loading shall be used. Recommendations given in the **Loads, Moments, and Forces** section of this chapter shall be used.\*\*

#### **Modulus of Elasticity†**

Modulus of elasticity values for deflection checks and column design shall be taken from AITC 117-74.

## **4 DESIGN EXAMPLE**

The following example of the design of glued-laminated stringers for an AFCS bridge is based on the criteria given in Chapter 3. Additional references<sup>10</sup> commonly used in glued-laminated timber design for permanent structures are suggested.

#### **Design of Glued-Laminated Timber Stringer Bridge**

Design class 50, two-lane bridge, glued-laminated stringers, nailed-laminated timber deck, single 60-ft span, stringer timber: Southern pine 24 F-3 combination, dry condition of use.

\*Refers to axial tension parallel to grain and not to tension due to bending.

\*\*In certain cases, unrealistically low loads, moments, and forces can result if the current procedures in TM 5-312 are used.

†This section applies to temporary bridges and bridges having unusually high consequences of failure.

<sup>10</sup>*Glulam Bridge Systems Plans* (AITC, 1974); *Timber Construction Manual*, 2nd ed. (AITC, 1974); *National Design Specification for Stress Grade Lumber and Its Fastenings* (National Forest Products Association, 1973); and *Standard Specifications for Highway Bridges* (American Association of State Highway and Transportation Officials, 1973).

**Procedure**

**Remarks (References refer to TM 5-312 unless otherwise noted)**

**1. Design Loads (60-ft span)**

**a. Dead Load**

$$W'_{DL} = X + L(Y + ZC)$$

Equation 6-1

$$W'_{DL} = 500 + 60 [7 + 0.4(50)]$$

Table 6-1

$$W'_{DL} = 2120 \text{ lb/ft} = 2.12 \text{ kips/ft}$$

$$M_{DL} = \frac{W'_{DL}L^2}{8} = \frac{(2.12)(60)^2}{8}$$

Equation 6-2

$$= 954 \text{ kip-ft}$$

$$V_{DL} = \frac{W'_{DL}L}{2} = \frac{2.12(60)}{2}$$

Equation 6-3

$$= 63.6 \text{ kips}$$

**b. Live Load**

$$M_{LLW} = 1235 \text{ kip-ft}$$

Appendix D-6

$$M_{LLT} = 1338 \text{ kip-ft} \leftarrow \text{Controls}$$

Appendix D-6

$$V_{LLW} = 89.5 \text{ kips}$$

Appendix D-7

$$V_{LLT} = 89.2 \text{ kips}$$

Appendix D-7

**2. Stringer Selection**

**a. Effective Stringers**

For a class 50 two-lane bridge, the minimum width is 24 ft 0 in. Maximum stringer spacing is 6 ft 0 in.

Table 6-2

The minimum number of stringers ( $N_s$ ) is

$$N_s = \frac{W_R}{S_s} + 1 = \frac{24.0}{6.0} + 1 = 5$$

Equation 6-5a

The effective number of stringers for a two-lane bridge ( $N_2$ ) is

$$N_2 = c \left[ \frac{3}{8} N_s \right] \text{ or } N_2 = N_1$$

whichever is smaller

$$N_1 = c \left[ \frac{S}{S_s} + 1 \right]$$

$$c = 0.90$$

$$N_1 = 0.90 \left[ \frac{5}{6.0} + 1 \right] = 1.65$$

$$N_2 = 0.90 \left[ \frac{3}{8} (5) \right] = 1.69 \text{ or}$$

$$N_2 = N_1 = 1.65$$

Use smaller of  $N_1$  or  $N_2$

$$\text{Therefore: } N_2 = 1.65$$

b. *Design Moment, m*

$$m = m_{DL} + m_{LL}$$

$$m = \frac{M_{DL}}{N_s} + \frac{M_{LL}}{N_2}$$

$$m = \frac{954}{5} + \frac{1338}{1.65}$$

$$= 190.8 + 810.9$$

$$m = 1001.7 \text{ kip-ft}$$

c. *Required Section Modulus*

$$S_r = \frac{m(12)}{f_b}$$

*Allowable bending stress,  $f_b$*

$$f_b = MF_b$$

Table 1 in Chapter 3 of this report.

Table 1 in Chapter 3 of this report.

Table 2 in Chapter 3 of this report. The reduction factor  $c$  corresponds to  $W/L < 1.0$  and a nailed-laminated timber deck.

Equation 6-9a

Equation 6-10

Equation 1 in Chapter 3 of this report where  $M$  = modification factor in Table 4 and  $F_b$  = allowable AITC 117-74 bending stress (assuming adequate lateral support).

$$M = 1.35$$

$$F_b = C_F(2400)$$

$F_b$  for Southern pine, 24F-3 combination, dry is:  
 $F_b = C_F(2400)$

$$C_F = (12/d)^{1/9}$$

$C_F$  = size effect factor given in Section 903-F NDS.

$d$  = depth of member, in.

To obtain an estimate of  $F_b$  and  $f_b$  assume

$$C_F = 0.85$$

$$\text{Then } f_b = (1.35)(0.85)(2400)$$

$$= 2754 \text{ psi} = 2.75 \text{ ksi}$$

The required section modulus based on  $f_b = 2.75$  ksi is

$$S_r = \frac{m(12)}{f_b} = \frac{(1001.7)(12)}{2.75}$$

Equation 6-10

$$= 4371 \text{ in.}^3$$

Trial Section:

$b$ (width) = 10.75 in. (actual dimension)

$d$ (depth) = 49.5 in. (actual dimension)

Also see table in AITC 117-74 titled "Structural Glued-Laminated Timber Section Properties"

$$C_F = (12/49.5)^{1/9} = 0.85$$

Therefore  $f_b = 2.75$  ksi is correct  
and  $S_r = 4371 \text{ in.}^3$

$$S = \frac{bd^2}{6} = \frac{(10.75)(49.5)^2}{6}$$

$$= 4390 \text{ in.}^3$$

$$S > S_r$$

Therefore, trial section is adequate for bending, assuming adequate lateral support

### 3. Shear Check

#### a. Dead Load Shear

$$v_{LL} = \frac{V_{DL}}{N_s} = \frac{63.6 \text{ kips}}{5}$$

Equation 6-12

$$= 12.7 \text{ kips}$$

b. *Live Load Shear*

$$v_{LL} = \left(\frac{L-d}{L}\right)v'_{LL}, \text{ but not less than } 0.75 v'_{LL}$$

Equation 6-17 of TM 5-312 as revised in Chapter 3 of this report.

$v'_{LL}$ , *Wheeled Vehicle, Single Lane:*

$$v'_{LL} = 1.25 \left[ \left(0.5 + \frac{S_s}{32}\right) V_A + \left(\frac{V_{LLW} - V_A}{N_1}\right) \right]$$

Table 3, Chapter 3 of this report.

$$S_s = 6.0 \text{ ft}$$

$$V_A = 40 \text{ kips}$$

Appendix D-1, Column 3

$$V_{LLW} = 89.5 \text{ kips}$$

$$N_1 = 1.65$$

$$\begin{aligned} v'_{LL} &= 1.25 \left[ \left(0.5 + \frac{6.0}{32}\right) 40 + \left(\frac{89.5 - 40}{1.65}\right) \right] \\ &= 71.9 \text{ kips} \end{aligned}$$

$v'_{LL}$ , *Wheeled Vehicle, Double Lane:*

$$v'_{LL} = \left(\frac{S_s - 2}{S_s}\right) V_A + \left(\frac{V_{LLW} - V_A}{N_2}\right)$$

Table 3, Chapter 3 of this report.

$$N_2 = 1.65$$

$$\begin{aligned} v'_{LL} &= \left(\frac{6 - 2}{6}\right) 40 + \left(\frac{89.5 - 40}{1.65}\right) \\ &= 56.7 \text{ kips} \end{aligned}$$

$v'_{LL}$ , *Tracked Vehicle, Single Lane:*

$$v'_{LL} = 1.25 \left(\frac{V_{LLT}}{2}\right)$$

Table 3, Chapter 3 of this report.

$$V_{LLT} = 89.2 \text{ kips}$$

$$v'_{LL} = 1.25 \left(\frac{89.2}{2}\right) = 55.8 \text{ kips}$$

$v'_{LL}$ , *Tracked Vehicle, Double Lane:*

$$v'_{LL} = \left(\frac{S_s - 2}{S_s}\right) V_{LLT}$$

Table 3, Chapter 3 of this report.

$$S_s = 6.0 \text{ ft}$$

$$v'_{LL} = \left(\frac{6-2}{6}\right)89.2 = 59.5 \text{ kips}$$

Use largest  $v'_{LL}$  for single and double lanes and wheeled and tracked vehicles;

Therefore  $v'_{LL} = 71.9$  kips

The live load shear then becomes:

$$v_{LL} = \left(\frac{60 - (49.5/12)}{60}\right)71.9$$

but not less than  $0.75(71.9)$

$$v_{LL} = 0.93(71.9) = 67.0 \text{ kips}$$

and  $67.0 \text{ kips} > 0.75(71.9) \text{ kips}$

Therefore,  $v_{LL} = 67.0$  kips

c. *Total Design Shear*

$$\begin{aligned} v &= v_{DL} + v_{LL} = 12.7 + 67.0 \\ &= 79.7 \text{ kips} \end{aligned}$$

d. *Effective Shear Area*

$$A_{v_r} = \frac{v}{f_v}$$

$$f_v = MF_v$$

$$M = 1.15$$

For Southern pine, combination 24F-3

$$F_v = 200 \text{ psi}$$

$$f_v = 1.15(200) = 230 \text{ psi}$$

$$= 0.230 \text{ ksi}$$

$$A_{v_r} = \frac{79.7}{0.230} = 346 \text{ sq in.}$$

$$A_v \text{ of } b = 10.75 \text{ in.},$$

$$d = 49.5 \text{ in. section:}$$

$$A_v = \frac{2}{3} bd$$

Table 3, Chapter 3 of this report.

Equation 6-17 of TM 5-312 as revised in Chapter 3 of this report.

Chapter 3 of this report.

Equation 6-19

Equation 1, Chapter 3 of this report.

Table 4, Chapter 3 of this report.

Allowable AITC 117-74 shear stress,  $F_v = 200$  psi

Equation 6-20

$$A_v = \frac{2}{3} (10.75)(49.5) = 354.75 \text{ sq in.}$$

$A_v > A_{v_r}$  Shear O.K.

4. The deck must be designed and the actual dead load versus the assumed dead load checked; appropriate changes in section modulus and shear area, if necessary, must then be made. The deflection and lateral bracing must be checked, the fastenings and joints must be designed, and the bearing must be checked.

## 5 CONCLUSIONS AND RECOMMENDATIONS

### Conclusions

1. Design criteria, procedures, and material specifications developed using state-of-the-art methodologies should result in adequate safety and performance for T/O glued-laminated timber stringer highway bridges. (Volume II presents the development and justification of the criteria.)

2. Bridge stringer material weight savings of about 15 percent result when using the recommended T/O bridge design criteria rather than using permanent bridge allowable stresses with the design procedures recommended in Chapter 3.

3. The criteria, design procedures, and material specifications are given in Chapter 3 for AFCS bridges. In Chapter 3, modified design loads and procedures given in TM 5-312 and modified AITC 117-74 allowable stresses are recommended. The recommendations in Chapter 3 for AFCS bridges are intended to be used by engineers in bridge design offices, and not by combat engineers in the field.

### Recommendations

1. The design criteria, procedures, and material specifications given in Chapter 3 should be considered for use in the design of AFCS T/O bridges.

2. Consideration should be given to the development of procedures, criteria, and material specifications for the design of glued-laminated timber decks for T/O glued-laminated timber stringer bridges.

## REFERENCES

- Army Facilities Components System (AFCS)—Design*, TM 5-302 (Department of the Army, 1973).
- Army Facilities Components System (AFCS) Logistic Data and Bills of Materials*, TM 5-303 (Department of the Army, 1973).
- Army Facilities Components System (AFCS)—Planning*, TM 5-301 (Department of the Army, 1973).
- "Decay Resistance," *Wood Handbook: Wood as an Engineering Material*, Forest Service Agricultural Handbook No. 72 (Department of Agriculture, Forest Products Laboratory, 1974).
- Glulam Bridge Systems Plans* (American Institute of Timber Construction [AITC], 1974).
- Military Fixed Bridges*, TM 5-312 (Department of the Army, December 1968), with changes 1 and 2.
- National Design Specification for Stress Grade Lumber and Its Fastenings* (National Forest Products Association, 1973).
- Route Reconnaissance and Classification*, FM 5-36 (Department of the Army, May 1965).
- Standard Specifications for Highway Bridges* (American Association of State Highway and Transportation Officials, 1973).
- Standard Specifications for Structural Glued Laminated Timber of Douglas Fir, Western Larch, Southern Pine, and California Redwood*, AITC 117-74 (AITC, 1974).
- Timber Construction Manual*, 2nd ed. (AITC, 1974).
- Voluntary Product Standard PS 56-73 for Structural Glued Laminated Timber* (AITC, 1973).

## SI CONVERSION FACTORS

1 ft = 0.3048 m

1 ft-lb = 1.3558 Nm

1 in. = 2.54 cm

1 kip = 4.448 kN

1 kip-ft = 1.3558 kNm

1 ksi = 0.69 kN/cm<sup>2</sup>

1 sq in. = 6.4516 cm<sup>2</sup>

(°F - 32) 5/9 = °C

MSC

## CERL DISTRIBUTION

Picatinny Arsenal  
ATTN: SMUPA-VP3

US Army, Europe  
ATTN: AEAEN

Director of Facilities Engineering  
APO New York, NY 09827  
APO Seattle, WA 98749

DARCOM STIT-EUR  
APO New York 09710

USA Liaison Detachment  
ATTN: Library  
New York, NY 10007

US Military Academy  
ATTN: Dept of Mechanics  
ATTN: Library

Chief of Engineers  
ATTN: DAEN-ASI-L (2)  
ATTN: DAEN-FEE-A  
ATTN: DAEN-FEB  
ATTN: DAEN-FESA  
ATTN: DAEN-FEZ-A  
ATTN: DAEN-MCZ-S (2)  
ATTN: DAEN-RDL  
ATTN: DAEN-ZCP  
ATTN: DAEN-PMS (12)  
for forwarding to  
National Defense Headquarters  
Director General of Construction  
Ottawa, Ontario K1A0K2  
Canada

Canadian Forces Liaison Officer (4)  
U.S. Army Mobility Equipment  
Research and Development Command  
Ft Belvoir, VA 22060

Div of Bldg Research  
National Research Council  
Montreal Road  
Ottawa, Ontario, K1A0R6

Airports and Const. Services Dir.  
Technical Information Reference  
Centre  
KAOL, Transport Canada Building  
Place de Ville, Ottawa, Ontario  
Canada, K1A 0N8

British Liaison Officer (5)  
U.S. Army Mobility Equipment  
Research and Development Center  
Ft Belvoir, VA 22060

Ft Belvoir, VA 22060  
ATTN: ATSE-TD-TL (2)  
ATTN: Learning Resources Center  
ATTN: Kingman Bldg, Library

US Army Foreign Science &  
Tech Center  
ATTN: Charlottesville, VA 22901  
ATTN: Far East Office

Ft Monroe, VA 23651  
ATTN: ATEN  
ATTN: ATEN-FE-BG (2)

Ft McPherson, GA 30330  
ATTN: AFEN-FEB

Ft Lee, VA 23801  
ATTN: DRXMC-D (2)

USA-CRRLE

USA-MES  
ATTN: Concrete Lab  
ATTN: Soils & Pavements Lab  
ATTN: Library

6th US Army  
ATTN: AFKC-LG-E

I Corps (ROK/US) Group  
ATTN: EACI-EN  
APO San Francisco 96358

US Army Engineer District  
New York  
ATTN: Chief, Design Br  
Buffalo  
ATTN: Library  
Saudi Arabia  
ATTN: Library

US Army Engineer District  
Pittsburgh

ATTN: Library  
ATTN: ORPCD  
ATTN: Chief, Engr Div

Philadelphia  
ATTN: Library  
ATTN: Chief, NAPEN-D

Baltimore  
ATTN: Library  
ATTN: Chief, Engr Div

Norfolk  
ATTN: Library  
ATTN: NAOH-D

Huntington  
ATTN: Library  
ATTN: Chief, Engr Div

Wilmington  
ATTN: Chief, SAMCO-C  
Charleston  
ATTN: Chief, Engr Div

Savannah  
ATTN: Library  
ATTN: Chief, SASAS-L

Jacksonville  
ATTN: Library  
ATTN: Const. Div

Mobile  
ATTN: Library  
ATTN: Chief, SAMEN-D  
ATTN: Chief, SAMEN-F

Nashville  
ATTN: Chief, ORNED-F  
Memphis  
ATTN: Chief, Const. Div  
ATTN: Chief, LMED-D

Vicksburg  
ATTN: Chief, Engr Div  
Louisville  
ATTN: Chief, Engr Div

Detroit  
ATTN: Library  
ATTN: Chief, NCEED-T

St. Paul  
ATTN: Chief, ED-D  
ATTN: Chief, ED-F

Chicago  
ATTN: Chief, NCCCO-C  
ATTN: Chief, NCCED-F

Rock Island  
ATTN: Library  
ATTN: Chief, Engr Div  
ATTN: Chief, NCRD-F

St. Louis  
ATTN: Library  
ATTN: Chief, ED-D

Kansas City  
ATTN: Library (2)  
ATTN: Chief, Engr Div

Omaha  
ATTN: Chief, Engr Div  
New Orleans  
ATTN: Library (2)

Little Rock  
ATTN: Chief, Engr Div  
Fort Worth  
ATTN: Library

ATTN: SMFED-D  
ATTN: SMFED-F  
Galveston  
ATTN: Chief, SMGAS-L

ATTN: Chief, SMGCO-C  
ATTN: Chief, SMGED-DC  
Albuquerque  
ATTN: Library

ATTN: Chief, Engr Div  
Los Angeles  
ATTN: Library

ATTN: Chief, SPLED-F  
San Francisco  
ATTN: Chief, Engr Div

Sacramento  
ATTN: Chief, SPKED-D  
ATTN: Chief, SPKCO-C

Far East  
ATTN: Chief, Engr Div  
Japan  
ATTN: Library

Portland  
ATTN: Library  
ATTN: Chief, DB-6

ATTN: Chief, FM-1  
ATTN: Chief, FM-2  
Seattle  
ATTN: Chief, NPSCO

ATTN: Chief, NPSEN-FM  
ATTN: Chief, EN-DB-ST

US Army Engineer District  
Walla Walla

ATTN: Library  
ATTN: Chief, Engr Div

Alaska  
ATTN: Library

ATTN: NPADE-R

US Army Engineer Division  
Europe

ATTN: Technical Library

New England  
ATTN: Library

ATTN: Laboratory  
ATTN: Chief, NLDCD

North Atlantic  
ATTN: Library

ATTN: Chief, NADEN

South Atlantic  
ATTN: Library

ATTN: Laboratory  
ATTN: Chief, SADEN-TC

Huntsville  
ATTN: Library (2)

ATTN: Chief, HNEDE-CS

ATTN: Chief, HNEDE-SR

Lower Mississippi  
ATTN: Library

ATTN: Chief, LMVED-G

Ohio River  
ATTN: Laboratory

ATTN: Chief, Engr Div

ATTN: Library

North Central  
ATTN: Library

Missouri River  
ATTN: Library (2)

ATTN: Chief, MRDED-G

ATTN: Laboratory

Southwestern  
ATTN: Library

ATTN: Laboratory  
ATTN: Chief, SWDED-TG

South Pacific  
ATTN: Laboratory

Pacific Ocean  
ATTN: Chief, Engr Div

ATTN: FM&S Branch  
ATTN: Chief, PODED-D

North Pacific  
ATTN: Laboratory

ATTN: Chief, Engr Div

Facilities Engineer

FORSKOM

Ft Devens, MA 01433

Ft McPherson, GA 30330

Ft Sam Houston, TX 78234

Ft Carson, CO 80913

Ft Campbell, KY 42223

Ft Hood, TX 76544

Ft Lewis, WA 98433

TRADOC

Ft Dix, NJ 08640

Ft Monroe, VA 23651

Ft Lee, VA 23801

Ft Gordon, GA 30905

Ft McClellan, AL 36201

Ft Knox, KY 40121

Ft Benjamin Harrison, IN 46216

Ft Leonard Wood, MO 65473

Ft Sill, OK 73503

Ft Bliss, TX 79916

HQ, 24th Inf, Ft Stewart, GA 31313

HQ, 1st Inf, Ft Riley, KS 66442

HQ, 5th Inf, Ft Polk, LA 71459

HQ, 7th Inf, Ft Ord, CA 93941

West Point, NY 10996

ATTN: MAEN-E

Ft Benning, GA 31905

ATTN: ATZB-FE-EP

ATTN: ATZB-FE-BG

CAC&FL

ATTN: DFAE (3)

Ft Leavenworth, KS 66027

AMC

Dugway, UT 84022

USACC

Ft Huachuca, AZ 85613

AF/PREEU

Boiling AFB, DC 20332

AF Civil Engr Center/XRL

Tyndall AFB, FL 32401

Little Rock AFB

ATTN: 314/DEE/Mr. Gillingham

MSC

Naval Facilities Engr Command  
ATTN: Code 04  
Alexandria, VA 22332

Port Hueneme, CA 93043  
ATTN: Library (Code LOBA)  
ATTN: Morrell Library

Defense Documentation Center (12)

Washington, DC  
ATTN: Bldg Research Advisory Board  
ATTN: Library of Congress (2)  
ATTN: Federal Aviation Administration  
ATTN: Dept of Transportation Library  
ATTN: Transportation Research Board

Engineering Societies Library  
New York, NY 10017

USAES  
Dept of Military Eng  
Fixed Bridge Section  
ATTN: CPT Phillips  
Ft Belvoir, VA 22060

NAVFAC  
HQ Engineering and Design  
Structural Branch  
Alexandria, VA 22332

Dept of Civil Engineering  
ATTN: C. A. Cornell  
Massachusetts Institute of  
Technology  
Cambridge, MA 02319

Henry M. Reitz  
Consulting Engineers  
111 South Hiramac  
St Louis, MO 63105

Gregory Griffith  
815 Graham St  
Lynchburg, VA 24504

Case Institute of Technology  
School of Engineering  
Dept of Solid Mechanics and  
Structural and Mechanical Design  
ATTN: Fred Moses  
Cleveland, OH 44106

American Institute of Timber  
Construction  
ATTN: T. Brassell  
Englewood, CO 80110

Washington University  
Civil Engineering Department  
ATTN: T. V. Galambos  
St Louis, MO 63130