

AD-A038 595

BALLISTIC RESEARCH LABS ABERDEEN PROVING GROUND MD
AN INTRINSIC DESCRIPTION OF UNSTEADY SHOCK WAVES, (U)
MAR 77 T W WRIGHT

F/G 20/4

UNCLASSIFIED

BRL-1971

NL


1 of 1
ADA038595



END

DATE
FILMED

5 - 77

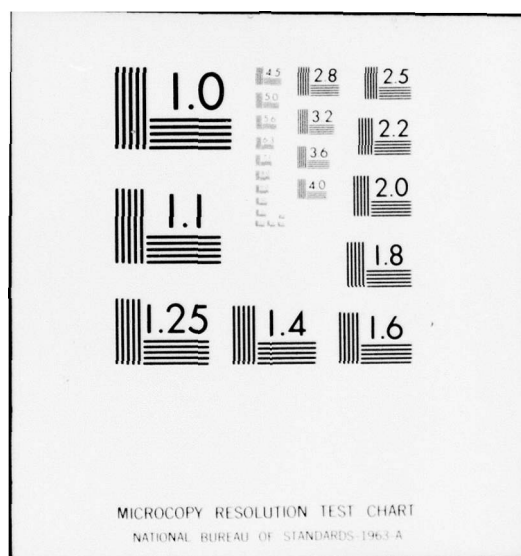

BRL R 1971

BRL

12
B.S.

AD

AD A 038595

REPORT NO. 1971

AN INTRINSIC DESCRIPTION OF
UNSTEADY SHOCK WAVES

Thomas W. Wright

March 1977

Approved for public release; distribution unlimited.

DDC
RECEIVED
APR 26 1977
A

AD No. _____
DDC FILE COPY

USA ARMAMENT RESEARCH AND DEVELOPMENT COMMAND
USA BALLISTIC RESEARCH LABORATORY
ABERDEEN PROVING GROUND, MARYLAND

Destroy this report when it is no longer needed.
Do not return it to the originator.

Secondary distribution of this report by originating
or sponsoring activity is prohibited.

Additional copies of this report may be obtained
from the National Technical Information Service,
U.S. Department of Commerce, Springfield, Virginia
22151.

The findings in this report are not to be construed as
an official Department of the Army position, unless
so designated by other authorized documents.

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS HOW TO COMPLETE THIS FORM
1. REPORT NUMBER BRL Report No. 1971	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) An Intrinsic Description of Unsteady Shock Waves		5. TYPE OF REPORT & PERIOD COVERED
7. AUTHOR(s) Thomas W. Wright		6. PERFORMING ORG. REPORT NUMBER
9. PERFORMING ORGANIZATION NAME AND ADDRESS US Army Ballistic Research Laboratory Aberdeen Proving Ground, MD 21005		8. CONTRACT OR GRANT NUMBER(s)
11. CONTROLLING OFFICE NAME AND ADDRESS US Army Materiel Development & Readiness Command 5001 Eisenhower Avenue Alexandria, VA 22333		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		12. REPORT DATE 11 MARCH 1977
		13. NUMBER OF PAGES 42 12354
		15. SECURITY CLASS. (of this report) Unclassified
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES This report was prepared while the author was the recipient of a Secretary of the Army's Research and Study Fellowship at Cambridge University, Cambridge, England, during the academic year 1974-75.		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Shock waves, fluid dynamics, growth equation		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) In this paper the intent is to obtain, insofar as possible, an intrinsic description of shock propagation, that is to say, a description such that the motion and the evolution of the amplitude of the shock are determined by quantities known on the shock itself. Such a description would parallel the results of geometrical acoustics, but with significant differences. To begin with, a shock wave does not generally lie on a characteristic surface of the governing equations, and so it is not possible to define a ray as a trajectory derived from		

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

the characteristic equation. Neither is it possible to find first the motion and then the amplitude of the shock since the two are strongly coupled. Finally, since acoustic disturbances may overtake and modify the shock, a completely intrinsic description seems to be impossible. Nevertheless, it turns out that a convenient choice of ray arises in a natural way from the analysis, and that an equation for the variation of amplitude along a ray can be derived. Furthermore, the coupling to the flow behind the shock occurs only through a single scalar term, even for the fully three-dimensional case, and the amplitude equation may be cast into a form such that the coupling is relatively weak.

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

TABLE OF CONTENTS

	<u>Page</u>
TABLE OF CONTENTS	3
LIST OF ILLUSTRATIONS	5
I. INTRODUCTION.	7
II. KINEMATICS.	9
III. DYNAMICS.	11
IV. TRANSPORT EQUATIONS	13
REFERENCES.	32
APPENDIX.	33
LIST OF SYMBOLS	35
DISTRIBUTION LIST	37

FORWARDED BY	
DTIC	White Section ☒
DDI	Diff Section ☐
UNANNOUNCED	☐
JUSTIFICATION	
BY	
DISTRIBUTION/AVAILABILITY CODES	
Dist.	AVAIL. AND OF SPECIAL
A	

LIST OF ILLUSTRATIONS

Fig. No.

- 1 Square of reciprocal Mach number and shock amplitude vs. μ^2 for $\gamma = 1.4$.
- 2 Wave factor λ vs. μ^2 for $\gamma = 1.4$. Curves corresponding to the three coupling functions are shown.
- 3 Asymptotic values of λ (for $m = \infty$) vs. γ for the range $1 \leq \gamma < \infty$. Curves corresponding to the three coupling functions are shown.
- 4 Coupling functions vs. μ^2 for $\gamma = 1.4$. Refer to the main text for full explanation.

I. INTRODUCTION

It is often useful to describe weak sound waves by the theory of geometrical acoustics. By this means, surfaces of constant phase in an oscillatory disturbance may be traced forward in time, and amplitudes of the disturbance, associated with those surfaces, may be calculated. The heart of the method lies in the construction of a system of rays along which points of an initial surface are mapped parametrically by later times onto the successive members of a family of surfaces. Once the rays have been constructed, amplitudes are found from a transport equation, which is an ordinary differential equation that determines the variation along a ray. The method as described above provides an asymptotic solution in linear acoustics for high frequencies. By various modifications and extensions the basic ideas may be applied to pulses, progressing waves, and wave front expansions. All of this has been conveniently summarized by Friedlander¹, who also gives several detailed examples. In nonlinear acoustics acceleration waves or weaker discontinuities may also be treated geometrically², but here the results are exact. In every case mentioned, the ray equations and the transport equations are only weakly coupled in that amplitude transport depends on the rays, but the rays are independent of amplitude.

In this paper the intent is to obtain, insofar as possible, an intrinsic description of shock propagation, that is to say, a description such that the motion and the evolution of the amplitude of the shock are determined by quantities known on the shock itself. Such a description would parallel the results of geometrical acoustics, but with significant differences. To begin with, a shock wave does not generally lie on a characteristic surface of the governing equations, and so it is not possible to define a ray as a trajectory derived from the characteristic equation. Neither is it possible to find first the motion and then the amplitude of the shock since the two are strongly coupled. Finally, since acoustic disturbances may overtake and modify the shock, a completely intrinsic description seems to be impossible. Nevertheless, it turns out that a convenient choice of ray arises in a natural way from the analysis, and that an equation for the variation of amplitude along a ray can be derived. Furthermore, the coupling to the flow behind the shock occurs only through a single scalar term, even for the fully three-dimensional case, and the amplitude equation may be cast into a form such that the coupling is relatively weak.

In a previous paper³ a growth equation for the shock amplitude in an inviscid simple elastic fluid was derived. In that paper only mechanical

¹F. G. Friedlander, *Sound Pulses*, Cambridge University Press, Cambridge, 1958.

²E. Varley and E. Cumberbatch, *J. Inst. Maths. Applics.* 1, (1965) 101.

³P. J. Chen and T. W. Wright, *Meccanica* (to appear).

effects were considered since pressure was assumed to be a function of specific volume alone. In addition, the fluid ahead of the shock was assumed to be uniform and at rest. Finally, the analysis was based on a fixed reference configuration, which is somewhat unnatural for problems in fluids, although the results are perfectly correct. This paper is an outgrowth of reference (3) and contains the results of reference (3) as a special case with some minor differences of notation, but there are significant differences in approach. The fluid is still assumed to be inviscid, but now the pressure is taken to depend on specific entropy as well as specific volume although heat conduction is ignored. Thus, the only dissipation effect originates in the shock wave itself. The fluid ahead of the shock may be in an arbitrary state with arbitrary smooth motion. Finally, the analysis here does not rely on a fixed reference configuration, but rather makes use only of the present spatial configuration at the shock.

In the next two sections the necessary preliminaries are given. In Section II, appropriate kinematics to describe the motion of a shock wave and the evolution of shock amplitude are outlined. The approach taken is that of the theory of singular surfaces⁴, but the idea of the displacement derivative is not used. Rather, variations are sought along a convenient ray direction, chosen so as to simplify the results. In Section III the constitutive relation, the equations of motion, and the jump conditions are reviewed.

In Section IV the main results are given. With the derivatives of amplitude and entropy eliminated in favor of the derivative of shock speed, three forms of the transport equation for the variation of shock speed along a ray are found. Each of these forms exhibits a different coupling term with the flow behind the shock. In each case the exact value of the coupling term depends on the past history of the shock trajectory. Thus the equations are really functional-differential equations in disguise, but the explicit nature of the functionals is not given. If it is then assumed that the values of one coupling term are known exactly, then it is found that the transport equation and a kinematical relation between shock speed and shock normal form a hyperbolic system of equations. This implies that disturbances to the shock surface will propagate laterally within the shock surface itself. Finally, these results are compared with Whitham's theory of shock dynamics, which was derived for polytropic gases by approximate means^{5,6,7,8}. One form of the equations given here, considered as a

⁴C. A. Truesdell and R. A. Toupin, "The Classical Field Theories," *Flügge's Handbuch der Physik*, III/1, Springer, Berlin-Göttingen-Heidelberg, 1960.

⁵G. B. Whitham, *J. Fluid Mech.* 2, (1957), 145.

⁶G. B. Whitham, *J. Fluid Mech.* 5, (1959), 369.

⁷G. B. Whitham, *J. Fluid Mech.* 31, (1968), 449.

⁸G. B. Whitham, "Linear and Nonlinear Waves," John Wiley and Sons (Wiley-Interscience), New York - London - Sydney - Toronto, 1974.

hyperbolic system and specialized to polytropic gases, gives the same speed of propagation within the surface as Whitham's theory for all Mach numbers.

II. KINEMATICS

A shock wave may be described as a propagating singular surface across which the pressure, density, entropy, and particle velocity are all discontinuous. There are several convenient mathematical representations of the surface. For example,

$$\begin{aligned}\Sigma(\underline{x}, t) &= 0 \\ t - \tau(\underline{x}) &= 0 \\ \underline{x} &= \hat{\underline{x}}(u^1, u^2, t)\end{aligned}\tag{2.1}$$

In these equations $\underline{x}$ is the ordinary Euclidean position vector in a fixed Cartesian coordinate system, t is time and u^1, u^2 are Gaussian surface coordinates. The normal in the direction of propagation, $\underline{n}$, and the normal velocity, v , may be computed from any of the three representations. The first two give

$$\Sigma_{,\underline{x}} : \Sigma_{,t} = \tau_{,\underline{x}} : -1 = \underline{n} : -v\tag{2.2}$$

where the comma denotes partial differentiation. With the surface coordinates orientated correctly for sign, the third representation gives

$$\begin{aligned}\underline{n} &= \hat{\underline{x}}_{,1} \times \hat{\underline{x}}_{,2} / |\hat{\underline{x}}_{,1} \times \hat{\underline{x}}_{,2}| \\ v &= \hat{\underline{x}}_{,t} \cdot \underline{n}\end{aligned}\tag{2.3}$$

Equation (2.3)₂ may be derived by inserting (2.1)₃ into (2.1)₂, differentiating with respect to t holding u^1, u^2 fixed, and applying (2.2).

The function $\hat{\underline{x}}$ may be regarded as a coordinate transformation from u^1, u^2, t to x^1, x^2, x^3 . Its partial derivatives have special significance. Basis vectors on the surface are given by

$$\underline{A}_\Gamma = \hat{\underline{x}}_{,\Gamma} \quad ; \quad \Gamma = 1, 2\tag{2.4}$$

Greek capital letters will always be used for components of surface vectors and tensors, and therefore will always have the range 1, 2 unless it is stated otherwise. The derivative with respect to time will be called the propagation vector.

$$\underline{b} = \hat{\underline{x}}_{,t}\tag{2.5}$$

Clearly, $\underline{b}$ need not be normal to $\underline{A}_1$ and $\underline{A}_2$ since infinitely many representations of the form (2.1) could be made. In fact, one of the principal tasks of this paper is to choose $\underline{b}$ in a convenient and simplifying manner.

The surface metric tensor and reciprocal basis follow in the usual way from (2.4)

$$\begin{aligned} A_{\Gamma\Delta} &= \underline{A}_\Gamma \cdot \underline{A}_\Delta \\ A &= \det(A_{\Gamma\Delta}) \\ A^{\Gamma\Delta} &= (A_{\Gamma\Delta})^{-1} \\ \underline{A}^\Gamma &= A^{\Gamma\Delta} \underline{A}_\Delta \end{aligned} \quad (2.6)$$

The coordinate transformation will be invertible if its Jacobian determinant, J , does not vanish.

$$\begin{aligned} J &= (\underline{A}_1 \times \underline{A}_2) \cdot \underline{b} = \left\{ \det A_{\Gamma\Delta} \right\}^{\frac{1}{2}} \underline{n} \cdot \underline{b} \\ &= A^{\frac{1}{2}} v \neq 0 \end{aligned} \quad (2.7)$$

It is now easily checked that the inverse of the Jacobian matrix is the following

$$\begin{aligned} \frac{\partial u^\Gamma}{\partial x} &= \left(1 - \frac{1}{v} \underline{n} \cdot \underline{b} \right) \underline{A}^\Gamma \\ \frac{\partial u^3}{\partial x} &= \frac{\underline{n}}{v} \end{aligned} \quad (2.8)$$

In (2.8)₂ the substitution $u^3 = t$ has been made to indicate that time is to be paired with the surface variables u^1, u^2 and not with the spatial variables x^1, x^2, x^3 . For clarity this practice will be followed in the sequel, and the symbol t will only stand for time in conjunction with x^1, x^2, x^3 .

If a function is defined only on the shock surface, it is most naturally regarded as a function of u^1, u^2, u^3 . Yet with the aid of (2.8) it still makes sense to compute the spatial gradient of such a function.

Thus, if the amplitude of the shock wave is $a = a(u^1, u^2, u^3)$, its gradient is given by

$$\frac{\partial a}{\partial x} = a|_\Gamma \left(1 - \frac{1}{v} \underline{n} \cdot \underline{b} \right) \underline{A}^\Gamma + a_{,3} \frac{\underline{n}}{v} \quad (2.9)$$

and the directional derivative along b is given by

$$b \cdot \frac{\partial a}{\partial x} = a_{,3} \quad (2.10)$$

The notation $a|_{\Gamma}$ indicates covariant surface differentiation. Other functions, such as the pressure, are defined for all x, t , but the limiting values on the shock surface are of particular interest. For such a function, $f(x, t)$, let f^+ and f^- indicate the limits taken from the region ahead of or behind the shock respectively. Thus, we have

$$f^{\pm} = \lim_{\epsilon \rightarrow 0} f(x, t(x) \pm \epsilon) \quad (2.11)$$

The difference or jump between the two sides is indicated as follows.

$$[f] = f^- - f^+ \quad (2.12)$$

In taking the gradient of such a function; one must be clear as to the order of the differentiation and the limit on the surface. From (2.11) and (2.2), it follows that

$$\begin{aligned} (f)^{\pm}_{,i} &= (f_i)^{\pm} + \frac{n_i}{v} (f, t)^{\pm} \\ [f]_{,i} &= [f, i] + \frac{n_i}{v} [f, t] \end{aligned} \quad (2.13)$$

Formulas (2.9) and (2.10) apply to the functions f^+ and f^- as well.

III. DYNAMICS

In this section one version of the standard equations of inviscid fluid mechanics is reviewed. Let e , the specific internal energy of the fluid, be regarded as a function of specific volume, v , and specific entropy, η . We have

$$e = e(v, \eta) \quad (3.1)$$

In terms of this thermodynamic potential the pressure, p , and temperature, θ , are given as follows.

$$\begin{aligned} p &= -e_v \\ \theta &= e_{\eta} \end{aligned} \quad (3.2)$$

The subscripts denote partial differentiation.

In regions adjacent to a shock wave, the conservation laws for mass, linear momentum, and energy may be expressed by partial differential equations,

$$\begin{aligned}
\dot{u} &= u_{i,i} \\
-p_{,i} &= \rho f_i + \rho \dot{u}_i \\
\dot{\eta} &= 0
\end{aligned} \tag{3.3}$$

The third equation is a reduced form for the conservation of energy in the absence of heat conduction and supply and makes unnecessary a separate inequality for entropy. The particle velocity is u , the density is ρ , and the body force is f . Latin indices are associated with Cartesian vectors and tensors. The dot denotes the material time derivative, e.g.

$$\dot{u} = u_{,t} + u_{,i} u_i.$$

Across a shock wave, the conservation laws must be expressed by jump conditions. It is useful first to define U^+ , the normal shock speed relative to the fluid on either side of the shock.

$$U^+ = v - u_i^+ n_i \tag{3.4}$$

The conservation laws for mass, linear momentum, energy in a reduced form and entropy may now be stated as follows.

$$\begin{aligned}
[\rho U] &= 0 \\
[p] n_i &= \rho^+ U^+ [u_i] \\
\rho^+ U^+ [e] &= \frac{1}{2} (p^+ + p^-) [u_i] n_i \\
[\eta] &\geq 0
\end{aligned} \tag{3.5}$$

It is assumed that p_u is always negative, but p_{uu} need not be positive for the development of the theory. It is assumed that all shock waves to be examined not only obey equations (3.5), but are stable as well. The questions of necessary or sufficient conditions for stability will not be considered.

In a shock wave $U^+ \neq 0$. Thus equation (3.5) shows that the jump in particle velocity must be normal to the wave, and therefore, it may be expressed as follows.

$$\begin{aligned}
[u_i] &= a U^+ n_i \\
\text{or } u_i^- &= u_i^+ + a U^+ n_i
\end{aligned} \tag{3.6}$$

U^+ has been introduced as a convenient normalizing factor, and a is called the amplitude of the wave. It now follows directly from (3.4), (3.5)₁, and (3.6) that

$$\begin{aligned}
u^- &= u^+ (1-a) \\
U^- &= U^+ (1-a)
\end{aligned} \tag{3.7}$$

and from (3.5)₂ and (3.6) that

$$\rho^+ (U^+)^2 = \frac{[p]}{a} \quad (3.8)$$

From (3.7)₁ it is clear that the amplitude, a , is a measure of the compression (or dilation) produced by the shock.

The entropy behind the shock can be written in terms of b , defined as follows

$$\eta^- = \eta^+ (1+b) \quad (3.9)$$

Of course it is required that $b \geq 0$. Since e and p were originally taken to be functions of v and η , it is clear that immediately behind the shock they may now be regarded as function of a and b with U^+ and η^+ as (known) parametric functions. Equation (3.8) is one relation among the variables (a, b, U^+) and (3.5)₂ with (3.6) provides another.

$$\rho^+ [e] = \frac{1}{2}(p^+ + p^-)a \quad (3.10)$$

In some cases it may be convenient to use (3.8) and (3.10) so as to eliminate two of the variables (a, b, U^+) in terms of the third. For example,

$$da = \frac{a}{e_\eta^-} \frac{\left\{ ap_\eta^- - 2 \rho^+ e_\eta^- \right\}}{\left\{ v^+ p_u^- + \rho^+ (U^+)^2 \right\}} U^+ dU^+ \quad (3.11)$$

$$db = \frac{a^2 U^+}{\eta^+ e_\eta^-} dU^+$$

The solution to these differential equations will depend parametrically on U^+, η^+ , and leads to the well known results that for small amplitudes $b = 0(a^3)$.

IV. TRANSPORT EQUATIONS

If equations (3.8) and (3.10) could be supplemented by a third independent relation among the three variables a, b, U^+ with time as a parameter, then the evolution of these quantities during shock propagation could be completely determined, at least in principle. If such a relation is available, it must exhibit dynamical coupling with the flow behind the shock since none exists in either (3.8) or (3.10), and yet such coupling must be present.

A shock wave connects two adjacent regions of smooth flow where equations (3.3) hold. An attempt to obtain the desired third relation can be made by manipulating the jump in (3.3)₂

$$\begin{aligned}
& -p_v^- (v_{,i})^- - p_\eta^- (\eta_{,i})^- + p_v^+ (v_{,i})^+ + p_\eta^+ (\eta_{,i})^+ \\
& + (\rho^- - \rho^+) f_i = \rho^- \dot{u}_i^- - \rho^+ \dot{u}_i^+
\end{aligned} \tag{4.1}$$

The procedure now followed is to express as many quantities in (4.1) in terms of a , b , U^+ and v^+ , η^+ , u_i^+ as possible. The terms p_v^- , p_η^- and p_v^+ , p_η^+ already have the required dependence through (3.7)₁ and (3.9). The process of converting $(v_{,i})^-$ and $(\eta_{,i})^-$ into the required form is lengthy but straightforward, and requires little more than repeated application of (2.13), (3.3)₁, and (3.3)₃ to (3.7) and (3.9). Begin with (2.13) applied to specific volume.

$$(v_{,i})^\pm = (v^\pm)_{,i} - \frac{n_i}{v} (v_{,t})^\pm \tag{4.2}$$

Either the top sign or the bottom sign is to be chosen consistently. From the definition of material derivative we also have

$$(v_{,t})^\pm = (\dot{v})^\pm - (v_{,i})^\pm u_i^\pm \tag{4.3}$$

Equations (4.2) and (4.3) combine to give

$$\left\{ \delta_{ij} - \frac{1}{v} n_i u_j^\pm \right\} (v_{,j})^\pm = (v^\pm)_{,i} - \frac{n_i}{v} (\dot{v})^\pm \tag{4.4}$$

The matrix on the left hand side is easily inverted.

$$(v_{,k})^\pm = \left\{ \delta_{ki} + \frac{1}{U^\pm} n_k u_i^\pm \right\} \left\{ (v^\pm)_{,i} - \frac{n_i}{v} (\dot{v})^\pm \right\} \tag{4.5}$$

For the minus signs in (4.5) and with the use of (3.3)₁, (3.6)₂, (3.7)₁, and (3.7)₂ this becomes

$$\begin{aligned}
(v_{,k})^- = & \left\{ \delta_{ki} + \frac{n_k}{U^+ (1-a)} (u_i^+ + a U^+ n_i) \right\} \\
& \left\{ (v^+)_{,i} (1-a) - v^+ a_{,i} - \frac{n_i}{v} v^+ (1-a) (u_{j,j})^- \right\}
\end{aligned} \tag{4.6}$$

The last term in (4.6) may be expanded with the aid of (2.13)₁ and (3.6)₂ to give (4.7)

$$(u_{j,j})^- = (u_j^+ + a U^+ n_j)_{,j} - \frac{n_j}{v} (u_{j,t})^- , \tag{4.7}$$

and the last term in (4.7) may be expanded to give (4.8).

$$\begin{aligned}
(u_{j,t})^- - \frac{U^+ (1-a)}{v} &= (\dot{u}_j)^- - (u_1^+ + a U^+ n_1) \cdot \\
&\cdot \left\{ (u_j^+)_{,1} + (a U^+ n_j)_{,1} \right\}
\end{aligned} \tag{4.8}$$

To arrive at (4.8), the definition of material time derivative as well as (2.13)₁, (3.4), and (3.6)₂ have been used. Inspection of (4.6) - (4.8) shows that spatial derivatives must be taken on two types of quantities: those defined only on the surface, and those defined in the region ahead of the shock but restricted to the shock as in (2.11). Accordingly, the derivatives must be interpreted by (2.9) or (2.13).

The term $(v^+),_i$ may be found from (4.4) with (3.3)₁ substituted.

$$(v^+),_i = (\delta_{ij} - \frac{n_i u_j}{v}) (v_{,j})^+ + \frac{n_i}{v} v^+ (u_{j,j})^+ \quad (4.9)$$

Similarly, for $(u_i^+),_i$ we have

$$(u_i^+),_j = \left\{ \delta_{jk} - \frac{n_j u_k}{v} \right\} (u_{i,k})^+ + \frac{n_j}{v} \dot{u}_i^+ \quad (4.10)$$

Finally, with (4.7) - (4.10) equation (4.6) reduces to the following

$$\begin{aligned} (v_{,i})^- &= \left\{ (1-a)\delta_{ij} + a n_i n_j \right\} (v_{,j})^+ + \frac{v^+ n_i n_j}{(U^+)^2 (1-a)} [\dot{u}_j] \\ &\quad - v^+ \left\{ \delta_{ij} + \frac{1+a}{1-a} n_i n_j + 2 \frac{n_i u_j}{U^+ (1-a)} \right\} a_{,j} \\ &\quad - \frac{a v^+ n_i}{U^+} \left\{ \frac{U^+ n_k + u_k^+}{U^+ (1-a)} \right\} (U^+),_k - n_i v^+ a n_{j,j} \\ &\quad - \frac{v^+ a}{U^+ (1-a)} n_i n_j n_k (u_{j,k})^+ \end{aligned} \quad (4.11)$$

The term $-n_{j,j}$ in (4.11) is equal to B_Γ^Γ , which is twice the mean surface curvature. That this is true may be seen from (2.9) applied to $\underline{n}$ and the formulas $\underline{n}_\Gamma \cdot \underline{A}^\Gamma = -B_\Gamma^\Gamma$ and $\underline{n} \cdot \underline{n}_\Gamma = \underline{n} \cdot \underline{n}_3 = 0$. The fact that $\dot{\underline{n}} = 0$ simplifies the reduction of $(\eta_{,i})^-$, but the process is exactly the same. The result is

$$\begin{aligned} (\eta_{,i})^- &= (1+b) \left\{ \delta_{ij} + \frac{a}{1-a} n_i n_j \right\} (\eta_{,j})^+ \\ &\quad + \eta^+ \left\{ \delta_{ij} + \frac{a}{1-a} n_i n_j + \frac{n_i u_j}{U^+ (1-a)} \right\} b_{,j} \end{aligned} \quad (4.12)$$

The body force and acceleration terms may be rewritten as

$$\begin{aligned} [\rho \dot{u}_i] - [\rho] f_i &= \frac{\rho^+}{1-a} [\dot{u}_i] + \frac{a\rho^+}{1-a} (\dot{u}_i^+ - f_i) \\ &= \frac{\rho^+}{1-a} [\dot{u}_i] - \frac{a}{1-a} \left\{ p_v^+ (v_{,i})^+ + p_n^+ (\eta_{,i})^+ \right\} \end{aligned} \quad (4.13)$$

Equations (4.11) - (4.13) should be inserted in (4.1) to complete the desired reduction.

Rather than writing out the whole equation, it is more convenient to examine the normal and surface components separately. But even before doing that, note that a certain combination of derivatives of the amplitude arises when taking the normal component of (4.11). That is

$$(U^+ n_i + u_i^+) a_{,i}$$

The same combination occurs for U^+ and b . No choice has yet been made for the propagation vector in (2.5), so we now set

$$b = \hat{x}_{,t} = U^+ n + u^+ = U^- n + u^- \quad (4.14)$$

where the last equality follows from (3.6)₂ and (3.7)₂. From (3.4) it is clear that this choice satisfies (2.3)₂. In effect, this one feature of the surface parametrization (2.1)₃ has been chosen strictly for convenience.

Any other choice that satisfies (2.3)₂ could also be made to serve. Equation (4.14) defines a family of rays along which the surface may be thought to propagate. Now with the aid of (2.10) and (4.14), the normal component of (4.1) may be set down. The plus sign is always understood to apply to all terms unless the minus sign is explicitly indicated. This convention will be adopted in the sequel.

$$\begin{aligned} & 2up_v^- a_{,3} - np_n^- b_{,3} + \frac{aup_v^-}{U} U_{,3} \\ &= -a(1-a)up_v^- un_{i,i} + \left(\frac{up_v^-}{U} + \frac{U}{v} \right) n_i [\dot{u}_i] \\ &+ U \left\{ p_v^- (1-a) - p_v \right\} (v_{,n}) + U \left\{ p_n^- (1+b) - p_n \right\} (n_{,n}) \\ &- aup_v^- (n_j u_{j,n}) \end{aligned} \quad (4.15)$$

The subscript n denotes the normal derivative, e.g., $(v_{,n}) = n_i (v_{,i})$.

Two other equations for the 3-derivatives of a , b , U may be found by differentiating (3.8) and (3.10) and applying the following two simple identities.

$$\begin{aligned} (v)_{,3} &= U(v_{,n}) + v(u_{j,j}) \\ (n)_{,3} &= U(n_{,n}) \end{aligned} \quad (4.16)$$

The first of these is derived from (2.10), (4.14) and (4.9), and the second is derived similarly. The two new equations may now be written down.

$$\begin{aligned}
& -(\nu p_u^- + \rho U^2) a_{,3} + \eta p_\eta^- b_{,3} - 2a\rho U U_{,3} \\
& = - \left\{ (1-a)p_u^- - p_u + a(\rho U)^2 \right\} \left\{ U_{u,n} + \nu u_{j,j} \right\} \\
& \quad - \left\{ (1+b)p_\eta^- - p_\eta \right\} U_{\eta,n} \\
& - \frac{a}{2} \left\{ \nu p_u^- + \rho U^2 \right\} a_{,3} + \left\{ \frac{1}{2} a \eta p_\eta^- - \rho \eta e_\eta^- \right\} b_{,3} \quad (4.17) \\
& = - \left\{ \frac{a}{2} \left[p_u + p_u^- (1-a) \right] + a(1-\frac{a}{2}) (\rho U)^2 \right\} \left\{ U_{u,n} + \nu u_{j,j} \right\} \\
& \quad - \left\{ \frac{a}{2} \left[p_\eta + p_\eta^- (1+b) \right] + \rho \left[e_\eta - e_\eta^- (1+b) \right] \right\} U_{\eta,n}
\end{aligned}$$

Rather than solving directly for $a_{,3}$, $b_{,3}$ and $U_{,3}$ from (4.15) and (4.17), it is convenient to regard a and b as functions of U , as in (3.11). Then (4.17) may be solved for $a_{,3}$ and $b_{,3}$ in terms of $U_{,3}$.

$$\begin{aligned}
a_{,3} &= \frac{a\mu^2}{1-\mu^2} \left\{ 2 - \frac{ap_\eta^-}{\rho e_\eta^-} \right\} U^{-1} U_{,3} \\
&+ \frac{p_\eta^-}{e_\eta^- p_u^- (1-\mu^2)} \left(\frac{a}{2} I_1 - I_2 \right) - \frac{\rho}{p_u^- (1-\mu^2)} I_1 \quad (4.18)
\end{aligned}$$

$$b_{,3} = \frac{a^2 U}{\eta e_\eta^-} U_{,3} + \frac{\nu}{\eta e_\eta^-} \left\{ \frac{a}{2} I_1 - I_2 \right\}$$

In (4.18), I_1 and I_2 are the right hand sides of (4.17)₁ and (4.17)₂ respectively. Since I_1 and I_2 vanish for homogeneous conditions ahead of the shock, they will be called the inhomogeneous terms. In addition, μ , the Mach number behind the shock, has been introduced. We have

$$\begin{aligned}
\mu^2 &= \left(\frac{U^-}{c^-} \right)^2 = - \frac{(\rho U)^2}{p_u^-} \\
\text{and} \quad m^2 &= \left(\frac{U^+}{c^+} \right)^2 = - \frac{(\rho U)^2}{p_u^+} \quad (4.19)
\end{aligned}$$

for the Mach number ahead of the shock. Here c^+ and c^- are the acoustic speeds relative to the flow ahead of and behind the shock, respectively.

We have $(\rho^\pm c^\pm)^2 = -p_u^\pm$.

With the aid of (4.18), (4.15) becomes

$$\left\{ \frac{1+3\mu^2}{\mu^2(1-\mu^2)} a - \frac{1+\mu^2}{1-\mu^2} \frac{p_\eta^-}{\rho e_\eta^-} a^2 \right\} U_{,3} \\ = -a(1-a) \frac{U^2}{\mu} n_{i,i} + \frac{1-\mu^2}{\mu^2} \eta \cdot [\dot{\mathbf{u}}] + I \quad (4.20)$$

I is the net inhomogeneous term from (4.15) and (4.18) and is given in full in the Appendix. Equation (4.20) together with (4.14), repeated here,

$$\hat{\mathbf{x}}_{,3} = U \eta + \mathbf{u} \quad (4.14)$$

describe the instantaneous motion of the surface. At a given instant of time, if the location of the surface is known, then the normal η and mean curvature B_Γ^Γ are known. Furthermore, if the distribution of U over the surface is known, then the distributions of a and b are known. Finally, since v , η , and $\mathbf{u}$ are known ahead of the shock, the only remaining term in (4.14) and (4.20) that is not known is the single scalar quantity $\eta \cdot [\dot{\mathbf{u}}]$. This final quantity provides the only coupling of the shock with the flow behind the shock in spite of the fully three-dimensional nature of that flow.

Equation (4.20) shows that, aside from inhomogeneities, it is the competition between the mean curvature and the coupling to the rearward flow that determines whether U is increasing or decreasing with time, and hence, through (4.18) whether the amplitude is increasing or decreasing.

In a similar way, with (4.11) - (4.13) inserted in (4.1), equations connecting the transverse derivatives of a , b , and U may be found by resolving (4.1) along the base vectors in the shock surface.

$$v_{p_v^-} a|_\Gamma - \eta p_\eta^- b|_\Gamma = \frac{\rho}{1-a} A_\Gamma \cdot [\dot{\mathbf{u}}] \\ + \left\{ (1-a) p_v^- - \frac{1}{1-a} p_v \right\} (v|_\Gamma) \\ + \left\{ (1+b) p_\eta^- - \frac{1}{1-a} p_\eta \right\} (\eta|_\Gamma) \quad (4.21)$$

With a and b determined over the whole surface from the solution of (4.14) and (4.20), this equation determines the transverse components of acceleration behind the shock. It may be thought of as a compatibility condition for it indicates that acceleration may not be arbitrarily prescribed behind a shock wave.

Other Forms of the Transport Equation

Although (4.20) is exact as it stands, it may be cast into other forms by choosing other terms to provide coupling with the rearward flow. A discussion of the growth and decay of plane shocks in an elastic solid⁹ used the strain gradient as the coupling parameter; and a similar discussion concerning curved shocks in an elastic fluid (see reference 3) used the totally normal component of the second gradient of deformation, i.e., the term $c_n = n_i N_\alpha N_\beta (x_{i,\alpha\beta})^-$ where the deformation is given as a function of material coordinates and time, $x^i = x^i(X^\alpha, t)$, and the spatial and material normals are $\underline{n}$ and $\underline{N}$ respectively. In the present context, the quantity most closely related to these two is the normal density gradient behind the shock or alternatively the normal derivative of specific volume behind the shock. The following derivation uses only kinematic identities and jump conditions to show the relationship between the normal component of acceleration and the normal derivative of specific volume behind the shock.

Begin with the following identity, which uses (3.6)₂ and (4.14).

$$\begin{aligned} n_j (U^- n_k + u_k^-) (u_j^-)_{,k} \\ = n_j (U^+ n_k + u_k^+) (u_j^+ + a U^+ n_j)_{,k} \end{aligned} \quad (4.22)$$

With the aid of (2.13)₁ and (2.10), the terms of (4.22) may be expanded and regrouped.

$$\begin{aligned} n_i [\dot{u}_i] + n_j n_k U^- [u_{j,k}] \\ = a U^+ n_j n_k (u_{j,k})^+ + (a U^+)_{,3} \end{aligned} \quad (4.23)$$

Next, note that

$$n_i n_j (u_{i,j})^- = (u_{i,i})^- - (\delta_{ij} - n_i n_j) (u_{i,j})^- \quad (4.24)$$

The last term in (4.24) involves only surface derivatives. Since the transverse component of velocity is continuous across a shock, we have

$$[A_i^\Gamma u_i]_{,\Gamma} = 0 = A_i^\Gamma_{,\Gamma} [u_i] + A_i^\Gamma A_{j\Gamma} [u_{i,j}]$$

which may be rewritten as

$$-a U^+ n_{i,i} + (\delta_{ij} - n_i n_j) [u_{i,j}] = 0 \quad (4.25)$$

From conservation of mass (3.3)₁ and a rearrangement of terms we have

$$(u_{i,i})^- = \rho^- (\dot{v})^- = \rho^- \left\{ (v)_{,3}^- - U^- n_i (v_{,i})^- \right\}$$

⁹P. J. Chen and M. E. Gurtin, *Int. J. Solids Struct.* 7, (1971), 5.

which may be rewritten as

$$(u_{i,i})^- = \frac{-a,3}{1-a} + (u_{i,i})^+ - (\rho U)^+ [v,n] \quad (4.26)$$

where (3.3)₁, (3.7)₁ and (4.16)₁ have been used. Equations (4.23) - (4.26) may be combined to give

$$\begin{aligned} n_j [\dot{u}_j] &= (1-a)\rho U^2 [v,n] + 2 U a,3 \\ &+ a U,3 + a(1-a) U^2 n_{i,i} \\ &+ a n_j n_k U u_{j,k} \end{aligned} \quad (4.27)$$

where all terms on the right hand side carry the plus sign. With the substitution of (4.27) and use of (4.18)₁, equation (4.20) becomes

$$\begin{aligned} &\left\{ \frac{1+3\mu^2}{1-\mu^2} a + \frac{1-3\mu^2}{1-\mu^2} \frac{p_n^-}{\rho e_n^-} a^2 \right\} U,3 \\ &= -a(1-a)u^2 n_{i,i} + \frac{1-\mu^2}{\mu^2} (1-a)\rho U^2 [v,n] + I \end{aligned} \quad (4.28)$$

where I stands for all left over inhomogeneous terms and is given in full in the Appendix.

Another possible coupling term, suggested by Whitham's papers on shock dynamics (see References 5, 6, and 7), is the combination $(p_{,t'} + \rho c n_i u_{i,t'})^-$. The derivative with respect to t' signifies the time variation as seen by an observer who is instantaneously at rest with respect to the flow ahead of the shock. That is to say, $\frac{\partial}{\partial t'} = \frac{\partial}{\partial t} + u_i^+ \frac{\partial}{\partial x_i}$. The following identities will prove useful.

$$\begin{aligned} (f_{,t'})^- &= (\dot{f})^- - [u_i] (f_{,i})^- \\ (f^-)_{,3} &= (U^+ n_i + u_i^+) (f^-)_{,i} \\ &= (f_{,t'})^- + U^+ n_i (f_{,i})^- \end{aligned} \quad (4.29)$$

It is possible to work out a relationship between $n_i (\dot{u}_i)^-$ and $(p_{,t'} + \rho c n_i u_{i,t'})^-$ for substitution in (4.20), but it is simpler to proceed directly as follows. With the aid of (4.29)₁ we have

$$\begin{aligned} (p_{,t'} + \rho c n_i u_{i,t'})^- &= p_u^- (v u_{i,i})^- - [u_i] (p_{,i})^- \\ &+ (\rho c)^- n_i \left(-\frac{1}{\rho} p_{,i} + f_i \right)^- - (\rho c)^- n_i [u_j] (u_{i,j})^- \end{aligned} \quad (4.30)$$

where (3.3) has been used to eliminate $\dot{p}$ and $\dot{u}_1$. The acoustic speed behind the shock is given by $(\rho^- c^-)^2 = -p_u^-$ so that rearrangement of terms in (4.30) gives

$$\begin{aligned} (p_{,t} + \rho c n_i u_{i,t})^- &= -(c^- n_i + [u_i]) (p_{,i})^- + (\rho c)^- n_i f_i \\ &- (\rho c)^- n_i (c^- n_j + [u_j]) (u_{i,j})^- \\ &- (\rho c^2)^- (\delta_{ij} - n_i n_j) (u_{i,j})^- \end{aligned} \quad (4.31)$$

Since $[u] = aU^+ n$, the first and third terms involve only normal derivatives, which may be reexpressed by (4.29)₂, and the last term may be rewritten with (4.25). With rearrangement of terms and use of (3.7), equation (4.31) becomes

$$\begin{aligned} \frac{U^- - c^-}{U^+} (p_{,t} + \rho c n_i u_{i,t})^- &= - \frac{c^- + aU^+}{U^+} \{ (p^-)_{,3} + (\rho c)^- n_i (u_i^-)_{,3} \} \\ &+ (\rho c)^- n_i f_i - (\rho c^2)^- \{ (\delta_{ij} - n_i n_j) (u_{i,j})^+ + aU^+ n_{i,i} \} \end{aligned} \quad (4.32)$$

When this equation is multiplied through by $(1-a)U^+/c^-$, and $(\bar{p})_{,3}$ and $(u_i^-)_{,3}$ are expanded with the use of (3.6)₂, (3.7)₁, and (3.9), we have

$$\begin{aligned} [1-a(1-\mu)] \left\{ (-\rho p_u^- + \frac{\rho U^2}{\mu}) a_{,3} + \eta p_\eta^- b_{,3} + \frac{a\rho U}{\mu} U_{,3} \right\} \\ = -a(1-a) \frac{\rho U^3}{\mu} n_{i,i} + (1-a)(1-\mu) (p_{,t} + \rho c n_i u_{i,t})^- \\ - [1-a(1-\mu)] \left\{ (1-a)p_u^- v_{,3} + (1+b)p_\eta^- n_{,3} + \frac{\rho U}{\mu} n_i (u_i^-)_{,3} \right\} \\ + \rho U n_i f_i - \frac{(1-a)U^2}{\mu} (\delta_{ij} - n_i n_j) u_{i,j} \end{aligned} \quad (4.33)$$

When combined with (4.18), equation (4.33) may be reduced to

$$\begin{aligned} [1-a(1-\mu)] \left\{ \frac{1+\mu}{1-\mu} \frac{a}{\mu} - \frac{\mu}{1-\mu} \frac{p_\eta^-}{\rho e_\eta^-} a^2 \right\} U_{,3} \\ = -a(1-a) \frac{U^2}{\mu} n_{i,i} + \frac{(1-a)(1-\mu)}{\rho U} (p_{,t} + \rho c n_i u_{i,t})^- + I \end{aligned} \quad (4.34)$$

where, as before, I stands for the inhomogeneous terms and is given in full in the Appendix.

Equations (4.20), (4.28), and (4.34) all have the form

$$A U_{,3} + B U^2 A_i^\Gamma n_{i,\Gamma} = C + I \quad (4.35)$$

where A and B are nondimensional coefficients, C is a term that couples the shock to the rearward flow, and I represents the remaining inhomogeneous terms. The terms A , B , C , and I have different forms in each version of (4.35), of course. In every case A , B , and I are known functions of U , n , x , and t . The coupling term C may be further decomposed into a product of which the first term is also a known function, but the second term contains derivatives of flow quantities p^- , v^- , or u^- . These derivatives are not known in terms of quantities intrinsic to the shock wave, but, rather, depend on the history of the flow. In particular, they depend on initial and boundary data where the shock wave itself is one boundary, although there may be others. Thus, (4.20), (4.28) or (4.34) should more properly be regarded as functional-differential equations rather than differential equations.

Nevertheless, let us assume for the moment that one of the coupling terms is known exactly. Then (4.35) and the equation

$$n_{i,3} + A_i^\Gamma U_{,\Gamma} = -n_j (u_{j,\Gamma})^\Gamma A_i^\Gamma \quad (4.36)$$

form a hyperbolic system in the unknowns U , n . Equation (4.36) is a purely kinematic relation. It has been obtained by noting that since $n \cdot A_\Gamma = 0$, we have $n_{,3} \cdot A_\Gamma = -n \cdot A_{\Gamma,3}$. But $A_{\Gamma,3} = \hat{x}_{,\Gamma 3} = \hat{x}_{,3\Gamma} = b_{,\Gamma}$ and $n \cdot n_{,3} = 0$, so (4.36) follows immediately with the use of (4.14).

The function $\phi(u^1, u^2, u^3) = 0$ for the characteristic surfaces of (4.35) and (4.36) must satisfy the equation

$$(\phi_{,3})^2 \left\{ A(\phi_{,3})^2 - B A^{\Gamma\Delta} \phi_{,\Gamma} \phi_{,\Delta} \right\} = 0 \quad (4.37)$$

where $A^{\Gamma\Delta}$ represents the contravariant components of the metric tensor for the shock surface. The case $\phi_{,3} = 0$ is spurious, for it corresponds to the requirement that surface derivatives of U and n are continuous on the shock surface. Hence, the remaining term in brackets in (4.37) must vanish, which corresponds to wave propagation within the shock surface itself. That is to say, disturbances to the shock surface will spread as a wave within the surface itself. Equation (4.37) indicates that the speed of propagation is independent of direction. If s is the speed and l is any unit vector that is tangent to the shock surface, we have

$$\phi_{,3} : -A_i^\Gamma \phi_{,\Gamma} = s : l_i \quad (4.38)$$

$$s = \sqrt{\frac{B}{A}} U$$

Strictly speaking, equations (4.35) and (4.36) should be supplemented by other equations since the functions $\hat{x}(u^1, u^2, u^3)$ and $A_\Gamma(u^1, u^2, u^3)$ are not known before hand, yet they are present in the coefficients and the right hand sides of (4.35) and (4.36). Appropriate supplementary equations are $\hat{x}_{,3} = b$ and $A_{\Gamma,3} = b_{,\Gamma}$. Now the list of unknown functions to be determined is U , η , $\hat{x}$, and A_Γ . If C is again regarded as known, the full set of equations is hyperbolic as before, and the only nonvacuous characteristic condition is still that the bracketed terms in (4.37) must vanish. Of course, it should be shown that a solution to the full set of equations is self-consistent since U , η and A_Γ must all be derivable from $\hat{x}$, but that proof will not be attempted here.

For arbitrary levels of shock amplitude the speeds calculated from (4.20), (4.28), or (4.34) will not be the same since the functions A and B are not the same in the three cases. However, for weak shocks the three calculated speeds are nearly the same and all vanish for infinitesimal shock amplitudes. Since $\mu \rightarrow 1$ and $a \rightarrow 0$ for weak shocks, the speed tends to

$$s = \sqrt{\frac{1-\mu}{2}} U \quad (4.39)$$

Entropy changes may be ignored for weak shocks so (4.39), expressed as a function of amplitude becomes

$$s = \frac{1}{2} \left\{ \frac{v^+ p_{vv}^+}{-2p_u^+} \right\}^{\frac{1}{2}} c^+ a^{\frac{1}{2}} \quad (4.40)$$

If $p_{uu}^+ < 0$, then $a < 0$ and (4.40) must be modified accordingly.

For shocks of stronger amplitude it is not easy in general to compare the wave speeds s for the three cases since the internal energy function and its derivatives have not been specified. The polytropic gas is an important special case for which an explicit comparison is easily made, however. The specific internal energy in this case is given as follows,

$$e = e_0 \left\{ \frac{v_0}{v} \right\}^{\gamma-1} \exp \left\{ \frac{\eta - \eta_0}{c_v} \right\} \quad (4.41)$$

where e_0 , v_0 , and η_0 are reference quantities, c_v is the specific heat at constant volume, and γ is the ratio of specific heats (c_p , the specific heat at constant pressure, divided by c_v). Formulas for pressure, temperature, or other derivatives of e are easily found.

$$p = -e_v = \frac{\gamma-1}{v} e$$

$$\theta = e_\eta = \frac{1}{c_v} e$$

$$p_{\eta} = \frac{\gamma-1}{\nu} \theta = \frac{p}{c_{\nu}} \quad (4.42)$$

$$p_{\nu} = - \frac{\gamma}{\nu} p = - (\rho c)^2$$

By manipulating the jump conditions (3.8) and (3.10) in conjunction with (3.7)₁ and (4.42)₄, one may easily find formulas for p^- and a in terms of the Mach number m .

$$a = \frac{2}{\gamma+1} \left[1 - \frac{1}{m^2} \right] \quad (4.43)$$

$$p^- = p^+ \left[\frac{2\gamma m^2}{\gamma+1} - \frac{\gamma-1}{\gamma+1} \right]$$

Similarly the Mach number behind the shock and the ratio $p_{\eta}^-/\rho e_{\eta}^-$ are easily calculated.

$$\mu^2 = \frac{(\gamma-1)m^2 + 2}{2\gamma m^2 - (\gamma-1)} \quad (4.44)$$

$$\frac{p_{\eta}^-}{\rho e_{\eta}^-} = \frac{\gamma-1}{1-a} = \frac{(\gamma-1)(\gamma+1)m^2}{(\gamma-1)m^2 + 2}$$

The relations among m , μ , and a are shown in Figure 1 for $\gamma = 1.4$. With these formulas the speed of disturbances on the shock surface always has the form

$$\left(\frac{s}{c^+} \right)^2 = \frac{m^2 - 1}{\lambda(m)} \quad (4.45)$$

where the wave factor $\lambda(m)$ in the three different cases is given by

$$(4.20): \quad \lambda_1(m) = 2 \frac{\gamma-1}{\gamma+1} \mu^2 + 3 - \frac{\gamma-3}{\gamma+1} \frac{1}{\mu^2}$$

$$(4.28): \quad \lambda_2(m) = \frac{1}{\mu^2} \left\{ 1 + 3\mu^2 + 2(1-3\mu^2) \frac{\gamma-1}{\gamma+1} \frac{1-\mu^2}{\mu^2} \right\} \quad (4.46)$$

$$(4.34); \quad \lambda_3(m) = \frac{(1+\mu)^2}{\mu^2} \left[1 - 2 \frac{\gamma-1}{\gamma+1} (1-\mu) \right] \left[1 - \frac{2(1-\mu^2)(1-\mu)}{2+\mu^2(\gamma-1)} \right]$$

These functions are plotted in Figure 2 for $\gamma = 1.4$. Although $\lambda(1) = 4$ in each case, the functions diverge from each other for other values of m , particularly for large m , and the detailed shapes of the functions are rather sensitive to γ . As m tends to infinity, the three functions take on limiting values

$$(4.20): \quad \lambda_1(\infty) = \frac{2\gamma^3 + 3\gamma^2 - 1}{\gamma(\gamma+1)(\gamma-1)}$$

$$(4.28): \quad \lambda_2(\infty) = 3 \frac{\gamma+1}{\gamma-1} \quad (4.47)$$

$$(4.34): \quad \lambda_3(\infty) = 1 + \frac{2}{\gamma} + \sqrt{\frac{2\gamma}{\gamma-1}}$$

Clearly, the three limiting values depend strongly on γ . This is shown graphically in Figure 3. Certainly, the behavior of s in the general case in (4.38) must also depend strongly on the details of the energy function $e(u, \eta)$.

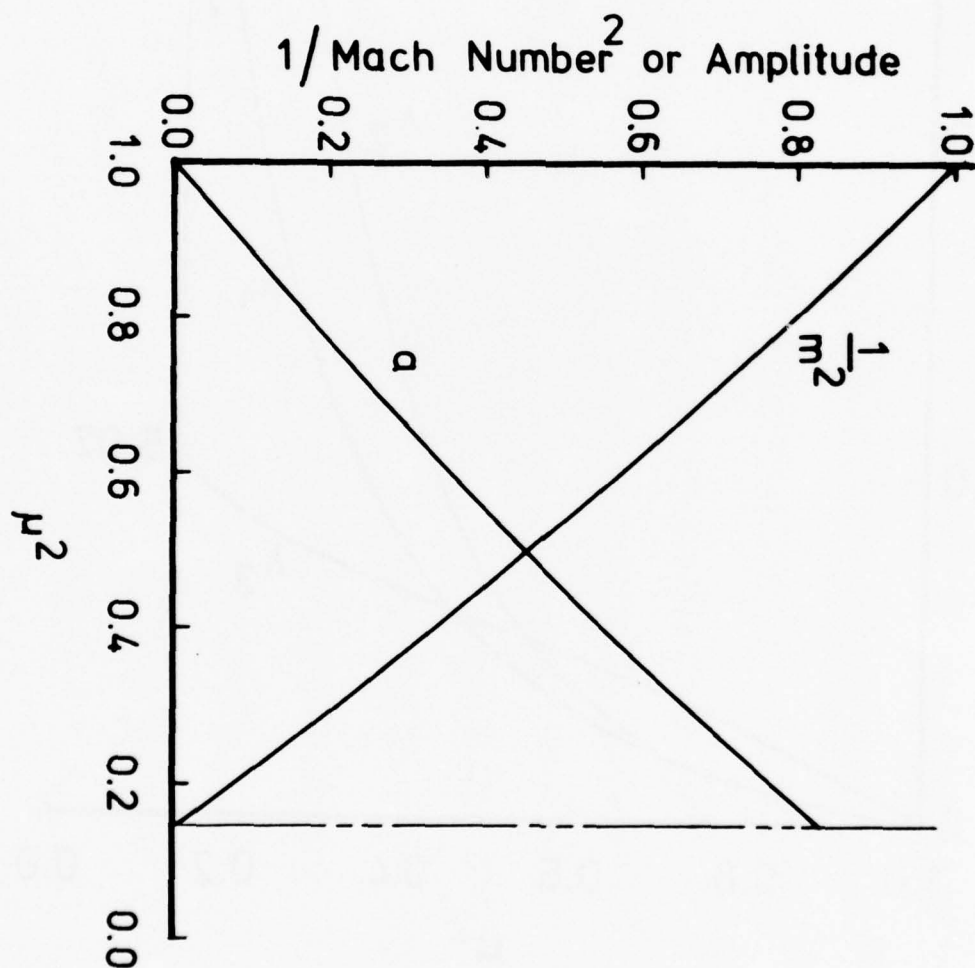


Figure 1: Square of reciprocal Mach number and shock amplitude vs. μ^2 for $\gamma = 1.4$.

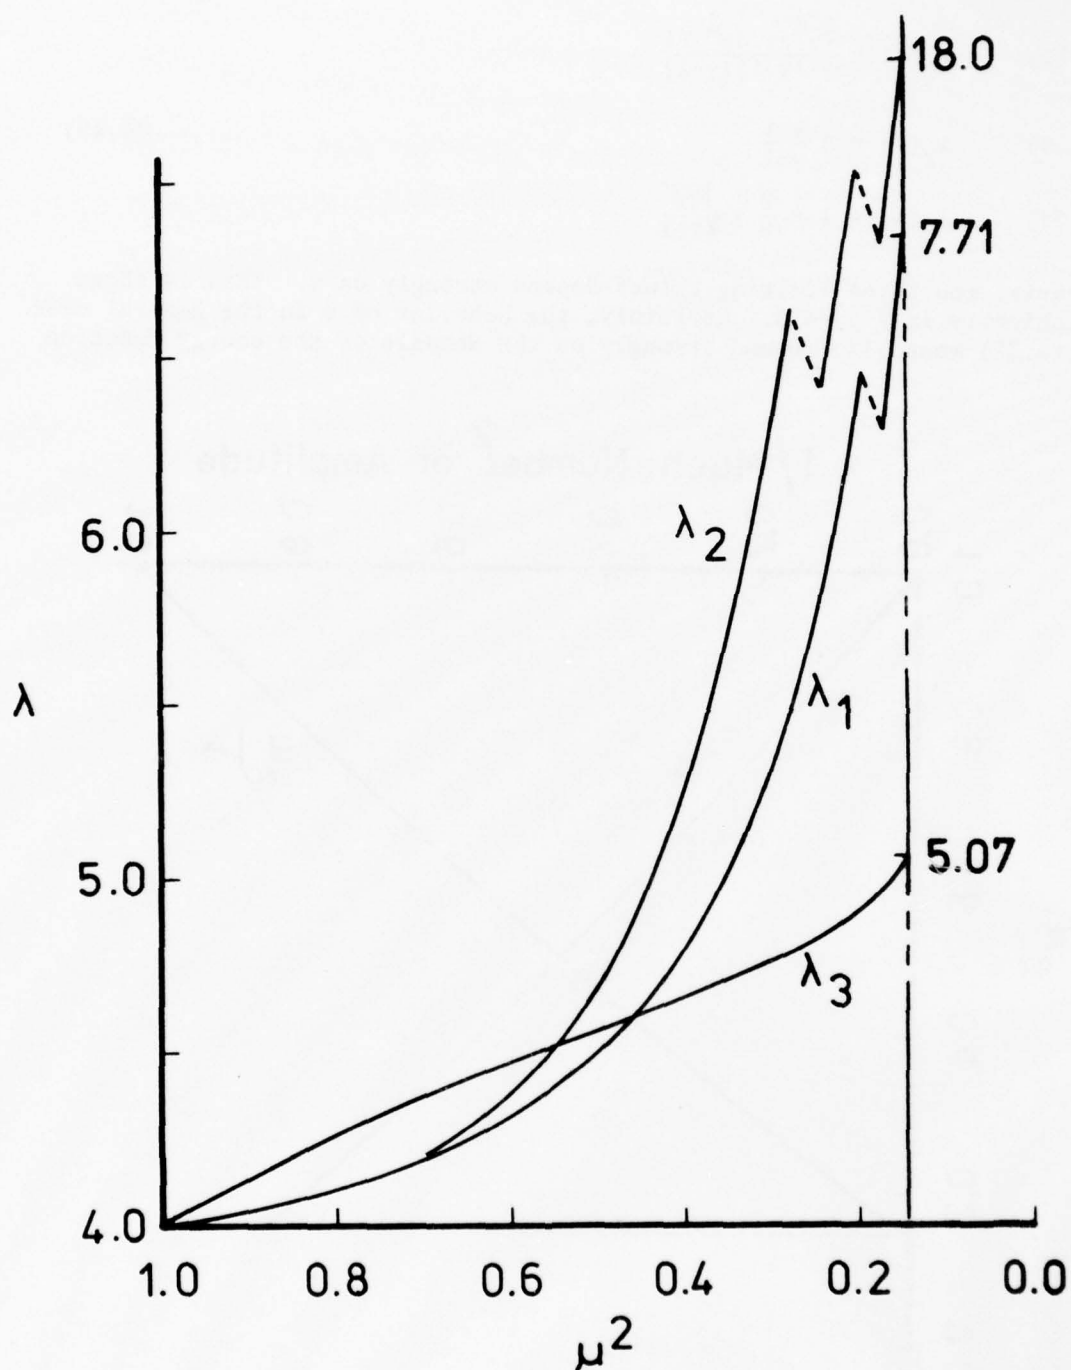


Figure 2: Wave factor λ vs. μ^2 for $\gamma = 1.4$. Curves corresponding to the three coupling functions are shown.

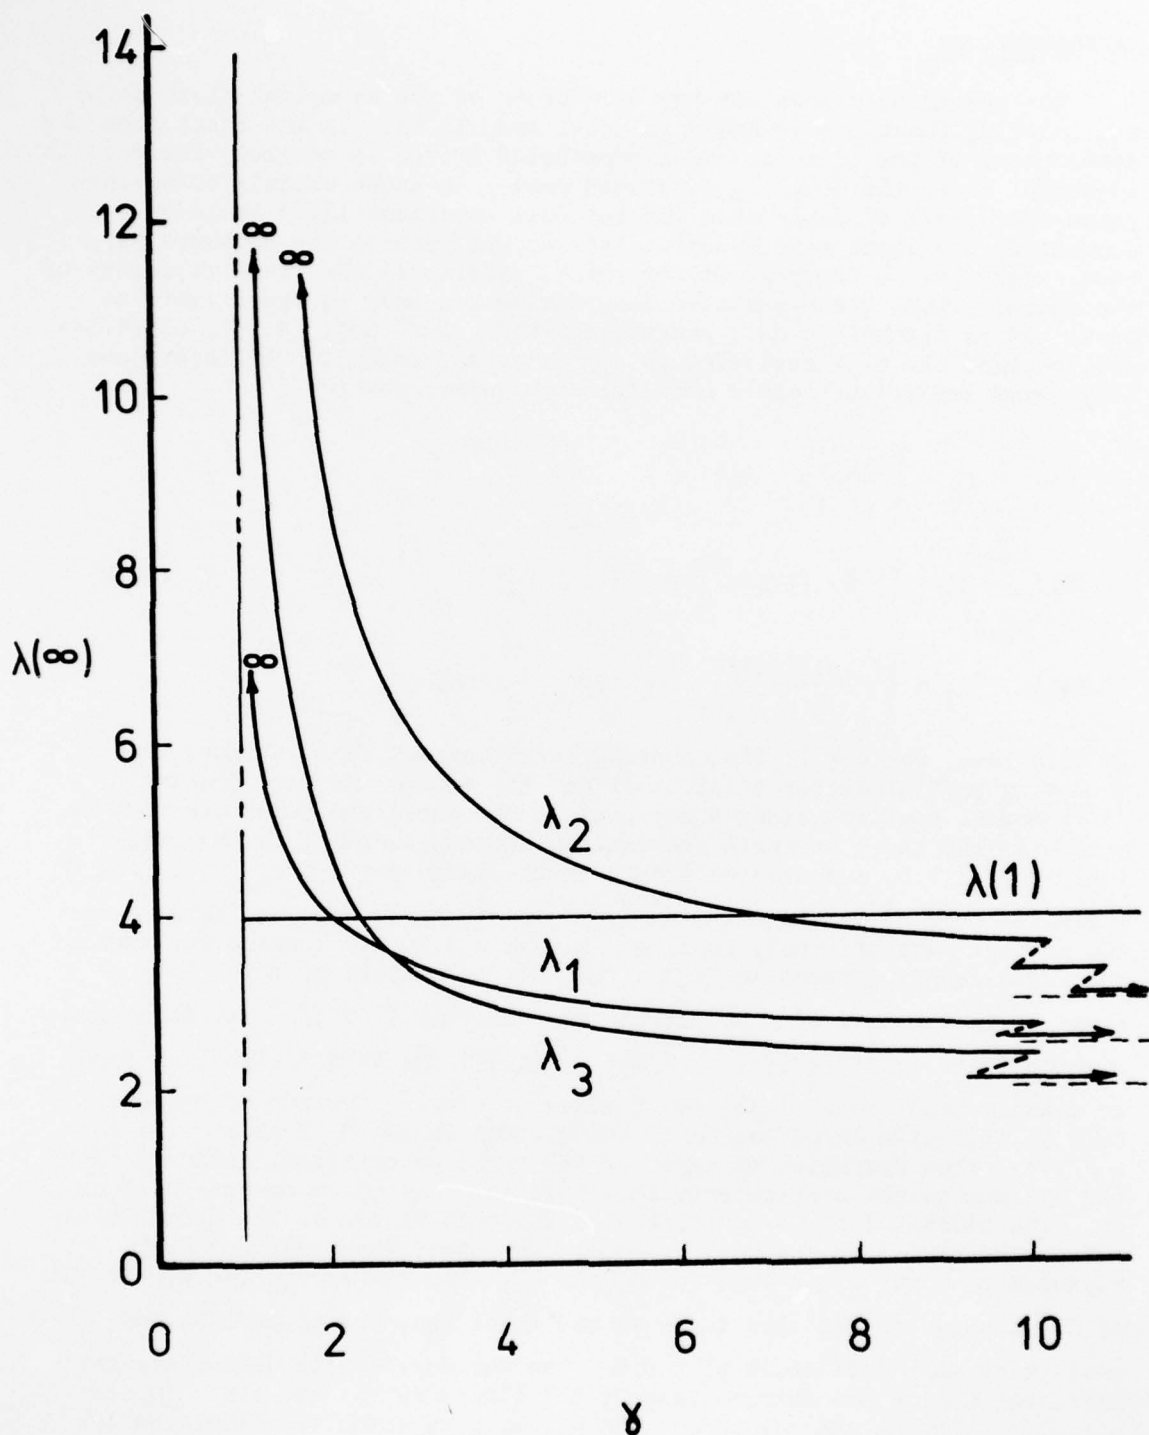


Figure 3: Asymptotic values of λ (for $m = \infty$) vs. γ for the range $1 \leq \gamma < \infty$. Curves corresponding to the three coupling functions are shown.

Approximations

The preceding discussion has been based on the assumption that one of the coupling functions is known exactly, and, if that is the case, then the development of the equations as a hyperbolic system is entirely correct. In an actual case, the coupling functions cannot be known exactly in advance since the domain of dependence for the full equations (3.3) includes a segment of the shock wave itself. This occurs because the backward wave cone, with apex on the rear of the shock, intersects the past trajectory of the shock. Thus, the hyperbolic description can only be approximate at best. It is natural to ask, therefore, which of (4.20), (4.28), or (4.34) will provide the best basis for an approximate treatment. The three coupling terms are written again here for easy comparison.

$$(4.20): \quad C_1 = \left\{ \frac{1-\mu^2}{\mu^2} \right\} \eta \cdot [\dot{u}]$$

$$(4.28): \quad C_2 = \left\{ \frac{1-\mu^2}{\mu^2} (1-a)m^2 \right\} (\rho c^2)^+ [v_{,n}] \quad (4.48)$$

$$(4.34): \quad C_3 = \left\{ \frac{(1-a)(1-\mu)}{m} \right\} \frac{1}{(\rho c)^+} (p_{,t'} + \rho c n_i u_{i,t'})^-$$

In each case, for $\mu = 1$, the coupling term vanishes, and in fact, the governing partial differential equations all become the same ordinary differential equation along a ray because the curvature terms drop out as well. As the shock strength increases μ decreases from 1 in the range $1 \geq \mu \geq \mu_{\min} > 0$, a increases from 0 in the range $0 \leq a \leq a_{\max} < 1$, and U increases from c^+ in the range $c^+ \leq U < \infty$, as may be seen in Figure 1 for the special case of a polytropic gas with $\gamma = 1.4$. It seems clear that of the three coupling terms in (4.48) the last is weakest by far. For example, in the case of a polytropic gas the term $(1-\mu^2)/\mu^2$ increases monotonically to $(\gamma+1)/(\gamma-1)$ ($= 6$ for $\gamma = 1.4$); the term $m^2(1-a)(1-\mu^2)/\mu^2$ is exactly equal to m^2-1 and so it always increases towards ∞ ; but the term $(1-a)(1-\mu)/m$ increases to a weak maximum (about 0.11 at $m = 1.4$ for $\gamma = 1.4$), then decreases to zero. A few trial calculations indicate that the maximum is not particularly sensitive to γ and never exceeds 0.13 or so. The bracketed terms in (4.48) are shown in Figure 4. The three solid curves correspond to the case $\gamma = 1.4$. Note that the scale for C_3 is expanded to forty times that for C_1 and C_2 . For comparison the peak value of C_3 is shown on the same scale as the other two, and appears as the small tick mark just above $\mu^2 = 0.6$. The two curves with dashed segments represent C_3 for the extreme cases $\gamma = 1$ (lower curve) and $\gamma = \infty$ (upper curve). Only the end points and the maxima were actually calculated for the latter cases.

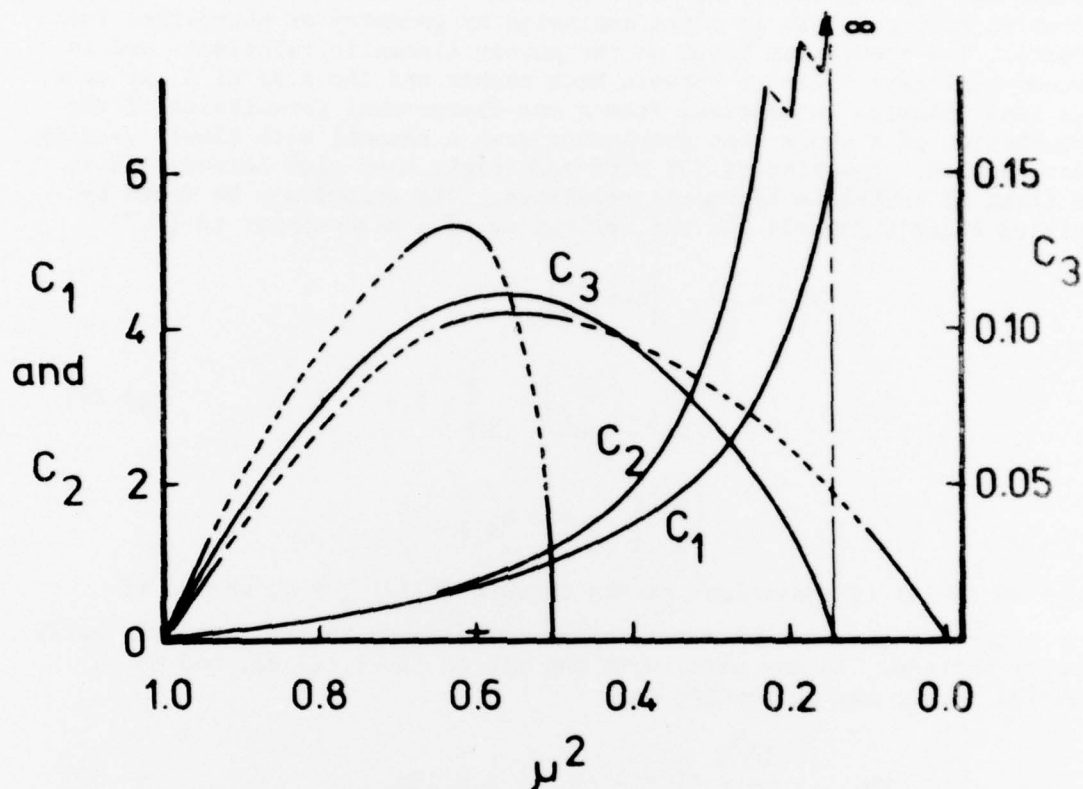


Figure 4: Coupling functions vs. μ^2 for $\gamma = 1.4$. Refer to the main text for full explanation.

On the other hand, the strength of the coupling term depends as well on $\mathbf{n} \cdot [\mathbf{u}]$, $\rho c^2 [\mathbf{v}_{,n}]$, or $(\rho c)^{-1} (\mathbf{p}_{,t} + \rho c \mathbf{n} \cdot \mathbf{u}_{,t})^-$, and an estimate of these terms should be made in any application, if possible. For example, in the case of small perturbation of a nearly plane shock, the third combination of terms depends only on overtaking disturbances (see Reference 8, p. 268 and 273). Therefore, a good approximation should result by neglecting these terms in cases where the effects of inhomogeneities, caustics, or focusing are to be studied; that is, in cases where the overtaking disturbance is absent or weak compared to other effects. This is the approach adopted by Whitham. A good approximation should also result in cases where the overtaking disturbance can be estimated by linear theory, as in the case of weak shocks.

Comparison With Whitham's Shock Dynamics

In a series of three papers (see References 5, 6, 7, and 8) G. B. Whitham developed a theory of shock dynamics that was intended to describe medium to strong shocks in cases dominated by geometry or short time local effects. The theory was based on two purely kinematic relations, and an assumed nonlinear relation between Mach number and the area of a ray tube. This last relation was derived from a one-dimensional formulation of the perturbation of a shock that propagates down a channel with slowly varying cross section. Equation (4.36) with zero right hand side corresponds to the first of Whitham's kinematic relations. The second may be found by applying Euler's formula for the derivative of a determinant to (2.7).

$$\begin{aligned} J_{,3} &= \frac{\partial}{\partial u^3} \left\{ \det \frac{\partial \hat{x}}{\partial u} \right\} \\ &= J \left\{ \frac{\partial u^\Gamma}{\partial x^i} \left(\frac{\partial \hat{x}^i}{\partial u^\Gamma} \right)_{,3} \right\}; \Gamma = 1, 2, 3 \quad (4.49) \\ &= J \left\{ \frac{\partial \hat{x}^i}{\partial u^3} \right\}_{,i} = J b_{i,i} \end{aligned}$$

Equation (4.49) is equivalent to the formula $(b_i/J)_{,i} = 0$, which, if specialized to the case of normal rays, corresponds to the form originally used by Whitham. In any case, with the aid of (2.7), (3.4), and (4.14), equation (4.49) may be reduced to

$$U n_{i,i} - \frac{(A^{\frac{1}{2}})_{,3}}{A^{\frac{1}{2}}} = - (\delta_{ij} - n_i n_j) (u_{i,j})^+ \quad (4.50)$$

where $A^{\frac{1}{2}} = \{\det A_{\Gamma\Delta}\}^{\frac{1}{2}}$. (The square root of the determinant of the surface metric, which is a measure of surface area, was called the area function by Whitham and denoted A.) The use of an assumed relation between the area function and the shock speed, $A^{\frac{1}{2}} = f(U)$, in equations (4.36) and (4.50), both with zero on the right sides, leads to a system of hyperbolic equations

$$\begin{aligned} - \frac{f'(U)}{U} U_{,3} + U n_{i,i} &= 0 \\ n_{i,3} + A_i^\Gamma U_{,\Gamma} &= 0 \end{aligned} \quad (4.51)$$

The characteristic speed of propagation for these equations is

$$\frac{s}{c^+} = \frac{1}{c^+} \left\{ \frac{U f(U)}{-f'(U)} \right\}^{\frac{1}{2}} = \left\{ \frac{m^2 - 1}{\lambda(m)} \right\}^{\frac{1}{2}} \quad (4.52)$$

It turns out that $\lambda(m)$ in (4.46)₃ and in (4.52), as given in (8), are identically equal. Thus, the full equation (4.34) represents a generalization of Whitham's shock dynamics to fluids that are nonconductors of heat and that have generally inhomogeneous conditions ahead of the shock. Furthermore, by working with exact equations, it has been possible to retain the complete coupling term. This should permit error estimates and systematic approximations to be made.

REFERENCES

1. F. G. Friedlander, Sound Pulses, Cambridge University Press, Cambridge, 1958.
2. E. Varley and E. Cumberbatch, J. Inst. Maths. Applics. 1, (1965), 101.
3. P. J. Chen and T. W. Wright, Meccanica (to appear).
4. C. A. Truesdell and R. A. Toupin, The Classical Field Theories, Flügge's Handbuch der Physik, III/1, Springer, Berlin-Göttingen-Heidelberg, 1960.
5. G. B. Whitham, J. Fluid Mech. 2, (1957), 145.
6. G. B. Whitham, J. Fluid Mech. 5, (1959), 369.
7. G. B. Whitham, J. Fluid Mech. 31, (1968), 449.
8. G. B. Whitham, Linear and Nonlinear Waves, John Wiley and Sons (Wiley-Interscience), New York - London - Sydney - Toronto, 1974.
9. P. J. Chen and M. E. Gurtin, Int. J. Solids Struc. 7 (1971), 5.

APPENDIX

The inhomogeneous terms in equations (4.20), (4.28), and (4.34) are listed here.

(4.20):

$$I = -\frac{\rho U}{\mu^2} \frac{1+\mu^2}{1-\mu^2} \left\{ \left[1 - \frac{\mu^2}{m^2} - \frac{1+3\mu^2}{1+\mu^2} a \right] - a\mu^2 \frac{p_\eta^-}{\rho e_\eta^-} \left[1-a - \frac{1}{m^2} \right] \right\} (U_{v,n} + u_{i,i})$$

$$+ \frac{p_\eta}{\rho U} \frac{1+\mu^2}{1-\mu^2} \left\{ \frac{p_\eta^-}{p_\eta} \frac{e_\eta^-}{e_\eta} - 1 + a \frac{p_\eta^-}{\rho e_\eta^-} \right\} U_{\eta,n}$$

$$- \frac{U}{\mu^2} \left\{ a n_i n_j + \left[1-a - \frac{\mu^2}{m^2} \right] \delta_{ij} \right\} u_{i,j}$$

(4.28):

$$I = \frac{\rho U}{\mu^2} \frac{1-3\mu^2}{1-\mu^2} \left\{ \left[1-a - \frac{\mu^2}{m^2} + \frac{2a\mu^4}{1-3\mu^2} \right] - a\mu^2 \frac{p_\eta^-}{\rho e_\eta^-} \left[1-a - \frac{1}{m^2} \right] \right\} (U_{v,n} + u_{i,i})$$

$$- \frac{p_\eta}{\rho U} \frac{1-3\mu^2}{1-\mu^2} \left\{ \frac{p_\eta^-}{p_\eta} \frac{e_\eta^-}{e_\eta} - 1 + a \frac{p_\eta^-}{\rho e_\eta^-} \right\} U_{\eta,n}$$

$$- \frac{U}{\mu^2} \left\{ a n_i n_j + \left[1-a - \frac{\mu^2}{m^2} \right] \delta_{ij} \right\} u_{i,j}$$

(4.34):

$$I = \rho U \frac{1-a(1-\mu)}{1-\mu} \left\{ \left[a \frac{1+\mu}{\mu} + \frac{\mu-m^2}{\mu m^2} \right] + a\mu \frac{p_\eta^-}{\rho e_\eta^-} \left[1-a - \frac{1}{m^2} \right] \right\} (U_{v,n} + u_{i,i})$$

$$+ \frac{p_\eta}{\rho U} \frac{1-a(1-\mu)}{1-\mu} \left\{ \left[\mu \frac{p_\eta^-}{p_\eta} \frac{e_\eta^-}{e_\eta} - 1 \right] + a\mu \frac{p_\eta^-}{\rho e_\eta^-} \right\} U_{\eta,n}$$

$$+ \frac{1-a(1-\mu)}{\mu} u_{p,n} - \frac{U}{\mu} \left[a\mu n_i n_j + (1-a) \delta_{ij} \right] u_{i,j} - \frac{(1-a)(1-\mu)}{\mu} n_i f_i$$

LIST OF SYMBOLS

A_Γ, A^Γ	Base vectors in the shock surface
$A_{\Gamma\Delta}, A^{\Gamma\Delta}$	Surface metric components
A	Determinant of surface metric $\det A$
A, B, C	Coefficients in a shock surface wave equation
a	Shock amplitude
B_Δ^Γ	Surface curvature tensor
$\underline{b}$	Propagation vector
b	Measure of entropy jump
c	Speed of sound
c_v, c_p	Specific heats
$e(u, \eta)$	Internal energy
f	Body force
I, I_1, I_2	Inhomogeneous terms
J	Jacobian determinant
$\underline{l}$	Unit vector in shock surface
m	Incident Mach number
$\underline{n}$	Unit normal to shock surface
p	Pressure
s	Speed of surface disturbance
t	Time
U	Shock speed relative to fluid
u^1, u^2, u^3	Surface coordinates and time
u	Particle velocity
v	Shock speed

$x, \hat{x}$	Cartesian coordinates
γ	Ratio of specific heats
η	Specific entropy density
θ	Temperature
λ	Function of Mach number
μ	Trailing Mach number
ρ	Mass density
Σ	Shock surface
$\tau(\bar{x})$	Arrival time of shock
v	Specific volume
ϕ	Characteristic function on shock surface
$[\cdot]$	Jump of bracketed quantity

DISTRIBUTION LIST

<u>No. of</u> <u>Copies</u>	<u>Organization</u>	<u>No. of</u> <u>Copies</u>	<u>Organization</u>
12	Commander Defense Documentation Center ATTN: DDC-TCA Cameron Station Alexandria, VA 22314	1	Commander US Army Electronics Proving Ground ATTN: Tech Lib Fort Huachuca, AZ 85613
1	Director Defense Advanced Research Projects Agency ATTN: Tech Info 1400 Wilson Boulevard Arlington, VA 22209	1	Commander US Army Missile Research and Development Command ATTN: DRDMI-R Redstone Arsenal, AL 35809
1	Commander US Army Materiel Development and Readiness Command ATTN: DRCDMA-ST 5001 Eisenhower Avenue Alexandria, VA 22333	1	Commander US Army Tank Automotive Development Command ATTN: DRDTA-RWL Warren, MI 48090
1	Commander US Army Materiel Development and Readiness Command ATTN: DRCDL 5001 Eisenhower Avenue Alexandria, VA 22333	2	Commander US Army Mobility Equipment Research & Development Command ATTN: Tech Docu Cen, Bldg. 315 DRSME-RZT Fort Belvoir, VA 22060
1	Commander US Army Aviation Systems Command ATTN: DRSAV-E 12th and Spruce Streets St. Louis, MO 63166	1	Commander US Army Armament Materiel Readiness Command Rock Island, IL 61202
1	Director US Army Air Mobility Research and Development Laboratory Ames Research Center Moffett Field, CA 94035	1	Commander US Army Harry Diamond Labs ATTN: DRXDO-TI 2800 Powder Mill Road Adelphi, MD 20783
1	Commander US Army Electronics Command ATTN: DRSEL-RD Fort Monmouth, NJ 07703	6	Commander US Army Materials and Mechanics Research Center ATTN: DRXMR-T, Mr. J. Bluhm DRXMR-XH, Mr. J. Dignam DRXMR-H, Dr. D. Dandekar DRXMR-T, Dr. J. Mescall DRXMR-H, Dr. S.C. Chou DRXMR-ATL Watertown, MA 02172

DISTRIBUTION LIST

<u>No. of</u> <u>Copies</u>	<u>Organization</u>	<u>No. of</u> <u>Copies</u>	<u>Organization</u>
1	Commander US Army Natick Research and Development Command ATTN: DRXRE, D. Sieling Natick, MA 01762	1	Commander US Army Command and General Staff College ATTN: Archives Fort Leavenworth, KS 66027
1	Director US Army TRADOC Systems Analysis Activity ATTN: ATAA-SA White Sands Missile Range NM 88002	1	Mathematics Research Center US Army University of Wisconsin Madison, WI 53706
1	Deputy Assistant Secretary of the Army (R&D) Department of the Army Washington, DC 20310	3	Commander US Naval Air Systems Command ATTN: AIR-604 Washington, DC 20360
1	HQDA (DAMA-ARP) Washington, DC 20310	3	Commander US Naval Ordnance Sys Command ATTN: ORD-0632 ORD-035 ORD-5524 Washington, DC 20360
1	HQDA (DAMA-MS) Washington, DC 20310	1	Office of Naval Research ATTN: Code 402 Department of the Navy Washington, DC 20360
1	Commander US Army Research Office P. O. Box 12211 Research Triangle Park NC 27709	1	Commander US Naval Surface Weapons Center ATTN: Code GR-9, Dr. W. Soper Dahlgren, VA 22448
2	Director US Army Advanced BMD Technology Center ATTN: CRDABH-5, Mr. W. Loomis SENSC, Mr. Davidson P. O. Box 1500, West Station Huntsville, AL 35807	1	Commander and Director US Naval Electronics Laboratory ATTN: Lib San Diego, CA 92152
1	Commander US Army War College ATTN: Lib Carlisle Barracks, PA 17013	3	Commander US Naval Research Laboratory ATTN: Code 5270, F. Macdonald Code 2020, Tech Lib Code 7786, Mr. J. Baker Washington, DC 20375

DISTRIBUTION LIST

<u>No. of</u> <u>Copies</u>	<u>Organization</u>	<u>No. of</u> <u>Copies</u>	<u>Organization</u>
1	AFATL (DLYW) Eglin AFB, FL 32542	1	Director National Science Foundation ATTN: Prof Clifford J. Astill Engineering Division 1800 G Street, NW Washington, DC 20550
1	AFATL (DLDG) Eglin AFB, FL 32542		
1	AFATL (DLDL, MAJ J.E. Morgan) Eglin AFB, FL 32542	6	Sandia Laboratories ATTN: Code 5133, L. Davison Div 1115, Dr. C. Harness Div 5163, D. Sutherland Code 1721, Dr. P. Chen Dr. L. Bertholf Dr. W. Hermann Albuquerque, NM 87115
1	RADC (EMTLD, Lib) Griffiss AFB, NY 13440		
1	AUL (3T-AUL-6-118) Maxwell AFB, AL 36112		
1	AFFDL/FB, Dr. J.C. Halpin Wright-Patterson AFB, OH 45433	5	Brown University Division of Engineering ATTN: Prof. R. Clifton Prof. H. Kolsky Prof. A. Pipkin Prof. P. Symonds Prof. J. Martin Providence, RI 02192
1	Director Environmental Science Services Administration US Department of Commerce Boulder, CO 80302		
1	Director National Aeronautics and Space Administration Manned Spacecraft Center ATTN: Lib Houston, TX 77058	4	California Institute of Tech Div of Engineering and Applied Science ATTN: Dr. J. Miklowitz Dr. E. Sternberg Dr. J. Knowles Dr. T. Coguhey Pasadena, CA 91102
1	Director Jet Propulsion Laboratory ATTN: Lib (TDS) 4800 Oak Grove Drive Pasadena, CA 91103	4	Carnegie Mellon University Department of Mathematics ATTN: Dr. D. Owen Dr. M. E. Gurtin Dr. B. Coleman Dr. W. Williams Pittsburgh, PA 15213
1	Director Lawrence Livermore Laboratory P. O. Box 969 Livermore, CA 94550		

DISTRIBUTION LIST

<u>No. of Copies</u>	<u>Organization</u>	<u>No. of Copies</u>	<u>Organization</u>
1	Georgia Institute of Tech School of Engineering Sciences ATTN: Dr. S. Passman Atlanta, GA 30332	1	North Carolina State Univ Dept of Engineering Mechanics ATTN: Dr. W. Bingham P. O. Box 5071 Raleigh, NC 27607
1	Harvard University Div of Eng and Applied Physics ATTN: Dr. G. Carrier Cambridge, MA 02138	2	Forrestal Research Center Aeronautical Eng Laboratory Princeton University ATTN: Dr. S. Lam Dr. A. Eringen Princeton, NJ 08540
2	Iowa State University Engineering Research Institute ATTN: Dr. G. Nariboli Dr. A. Sedov Ames, IA 50010	2	Pennsylvania State University Engineering Mechanical Dept ATTN: Dr. R. Haythornthwaite Prof. N. Davids University Park, PA 16802
3	Lehigh University Center for the Application of Mathematics ATTN: Dr. E. Varley Dr. R. Rivlin Prof. M. Mortell Bethlehem, PA 18015	1	Purdue University Inst for Mathematical Sciences ATTN: Dr. E. Cumberbatch Lafayette, IN 47907
1	Massachusetts Inst of Tech ATTN: Dr. R. Probststein 77 Massachusetts Avenue Cambridge, MA 02139	2	Purdue University School of Aeronautics, Astronautics & Eng Sciences ATTN: Prof. S. Koh Prof. C. T. Sun Lafayette, IN 47907
1	Michigan State University College of Engineering ATTN: Prof. W. Sharpe East Lansing, MI 48823	2	Rice University ATTN: Dr. R. Bowen Dr. C. C. Wang P. O. Box 1892 Houston, TX 77001
1	New York University Department of Mathematics ATTN: Dr. J. Keller University Heights New York, NY 10053	2	Southwest Research Institute Dept of Mechanical Sciences ATTN: Dr. U. Lindholm Dr. W. Baker 8500 Culebra Road San Antonio, TX 78228
1	North Carolina State Univ School of Engineering ATTN: Dr. T. Sun Chang Raleigh, NC 27607		

DISTRIBUTION LIST

<u>No. of Copies</u>	<u>Organization</u>	<u>No. of Copies</u>	<u>Organization</u>
3	Stanford Research Institute Poulter Laboratory ATTN: Dr. D. Curran Dr. D. Shockey Dr. L. Seaman 333 Ravenswood Avenue Menlo Park, CA 94025	2	University of Illinois Dept of Theoretical and Applied Mechanics ATTN: Dr. D. Carlson Dr. R. Shields Urbana, IL 61801
1	Tulane University Dept of Mechanical Engineering ATTN: Dr. S. Cowin New Orleans, LA 70112	2	University of Illinois at Chicago Circle College of Engineering Dept of Materials Engineering ATTN: Prof. A. Schultz Dr. T. C. T. Ting P. O. Box 4348 Chicago, IL 60680
2	University of California ATTN: Dr. M. Carroll Dr. P. Naghdi Berkeley, CA 94704	1	University of Iowa ATTN: Dr. K. Valanis Iowa City, IA 52240
1	University of California Department of Mechanics ATTN: Dr. R. Stern 504 Hilgard Avenue Los Angeles, CA 90024	4	University of Kentucky Dept of Engineering Mechanics ATTN: Dr. M. Beatty Prof. O. Dillon, Jr. Prof. P. Gillis Dr. D. Leigh Lexington, KY 40506
1	University of Delaware Dept of Mechanical Eng ATTN: Prof. J. Vinson Newark, DE 19711	2	The University of Maryland Dept of Mechanical Engineering ATTN: Prof. J. Yang Dr. J. Dally College Park, MD 20742
3	University of Florida Dept of Engineering Science and Mechanics ATTN: Dr. C.A. Sciammarilla Dr. L. Malvern Dr. E. Walsh Gainesville, FL 32601	1	University of Minnesota Dept of Engineering Mechanics ATTN: Dr. R. Fosdick Minneapolis, MN 55455
2	University of Houston Dept of Mechanical Engineering ATTN: Dr. T. Wheeler Dr. R. Nachlinger Houston, TX 77004	1	University of Notre Dame Dept of Metallurgical Eng and Materials Sciences ATTN: Dr. N. Fiore Notre Dame, IN 46556

DISTRIBUTION LIST

<u>No. of Copies</u>	<u>Organization</u>
3	University of Texas Dept of Engineering Mechanics ATTN: Dr. M. Stern Dr. M. Bedford Prof. Ripperger Austin, TX 78712
1	University of Washington Dept of Mechanical Engineering ATTN: Prof. J. Chalupnik Seattle, WA 98105
2	Yale University ATTN: Dr. B. T. Chu Dr. E. Onat 400 Temple Street New Haven, CT 96520

Aberdeen Proving Ground

Marine Corps Ln Ofc
Dir, USAMSAA