


ADA 039527

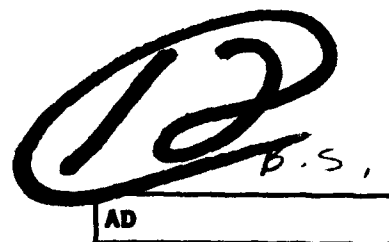

COPY NO. 36

CONTRACTOR REPORT ARLCD-CR-77003

BLAST PARAMETERS OF BS-NACO PROPELLANT

J. J. SWATOSH AND J. R. COOK
IIT RESEARCH INSTITUTE

P. PRICE
ARRADCOM PROJECT COORDINATOR

APRIL 1977



US ARMY ARMAMENT RESEARCH AND DEVELOPMENT COMMAND
LARGE CALIBER
WEAPON SYSTEMS LABORATORY
DOVER, NEW JERSEY

APPROVED FOR PUBLIC RELEASE; DISTRIBUTION UNLIMITED.

DDC FILE COPY



**Best
Available
Copy**

The findings in this report are not to be construed as an official Department of the Army position.

DISPOSITION

Destroy this report when no longer needed. Do not return to the originator.

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER Contractor Report ARLCD CR-77003	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) BLAST PARAMETERS OF BS-NACO PROPELLANT	5. TYPE OF REPORT & PERIOD COVERED Final Report	
7. AUTHOR(s) J. J. Swatosh, and J. R. Cook of IITRI P. Price (Project Coordinator) of ARRADCOM	6. PERFORMING ORG. REPORT NUMBER IITRI - J6342-8	
9. PERFORMING ORGANIZATION NAME AND ADDRESS IIT Research Institute 10 West 35th Street Chicago, IL 60616	8. CONTRACT OR GRANT NUMBER(s) DAAA21-74-C-0521	
11. CONTROLLING OFFICE NAME AND ADDRESS ARRADCOM, LCWSL Manufacturing Technology Division Dover, NJ 07801	10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS	
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office) 42nd	12. REPORT DATE April 1977	
	13. NUMBER OF PAGES 56	
	15. SECURITY CLASS. (of this report) Unclassified	
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release, distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Peak blast pressure Positive impulse TNT equivalency BS-NACO propellant		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) Experiments were performed with BS-NACO propellant in subscale and full-scale shipping/storage drum configurations and in full-scale conically shaped feed hopper configurations to determine the air-blast pressure and positive impulse resulting from the detonation of the material. Peak pressure and positive impulse were measured in the scaled distance range of approximately 2 to 25 ft/lb ^{1/3} . TNT equivalency curves for both pressure and impulse were developed as a function of scaled distance. Based on the test results, BS-NACO propellant should be considered QD Class 2 material while in-process.		

DD FORM 1 JAN 73 1473

EDITION OF 1 NOV 65 IS OBSOLETE

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

175-550 the cube of distance is 1/3
hp

ACKNOWLEDGEMENTS

IIT Research Institute (IITRI) had conducted a program to determine the TNT equivalency of BS-NACO propellant. This work was conducted for Picatinny Arsenal, Manufacturing Technology Directorate (MTD), Dover, New Jersey, under Contract DAAA21-74-C-0521.

Technical guidance was provided by Messrs. P. Price, D. Westover, and S. Levmore of MTD. Personnel who contributed to the large-scale experiments conducted at Dugway Proving Ground, Dugway, Utah include A. K. Keetch and P. E. Miller of the Hazards Evaluation Office. Small-scale tests were conducted at IITR's explosive test site near LaPorte, Indiana.

IITRI staff who made major contributions to this effort include: M. Amor, J. Cook, C. Foxx, D. Hrdina, R. Joyce, G. Kutzer, H. Napadensky, and J. Swatosh, Jr.

ACCESSION for	
NTIS	Write Section ☒
DDC	Copy Section ☐
UNANNOUNCED	☐
JUSTIFICATION	
DISTRIBUTION/AVAILABILITY CODES	
AVAIL. and/or SPECIAL	
A	

D D C
 RECEIVED
 MAY 17 1977
 ALBERTA

TABLE OF CONTENTS

	Page No.
Summary	1
Introduction	4
Background	4
Objectives	4
Test Procedures	5
Test Sites	5
Test Configurations	5
Verification Tests	10
Test Results	10
TNT Equivalency Calculations	13
Tables	
1 TNT equivalency of BS-NACO propellant	1
2 BS-NACO propellant tests	12
Figures	
1 Equivalency profiles	1
2 Peak pressure and positive impulse, BS-NACO	2
3 TNT equivalency, BS-NACO	3
4 IITRI Test area	6
5 DPG Test area	7
6 Cylindrical drum configuration	8
7 Feed hopper configuration	8
8 Simulated full-scale feed hopper	9
9 TNT hemisphere pressure and impulse curves	11
10 Peak pressure and scaled impulse, 50 lb BS-NACO	14
11 Peak pressure and scaled impulse, BS-NACO, long side of shipping container, 110 lb	15

12	Peak pressure and scaled impulse BS-NACO, short side shipping container, 110 lb	16
13	Peak pressure and scaled impulse, BS-NACO, feed hopper configuration, 330 lb	17
14	TNT equivalency, 110 lb shipping container	19
15	TNT equivalency, 330 lb feed hopper	19
Appendixes		
A	Field data sheets	21
B	Test data	27
C	Safety approval	41
Distribution List		45

SUMMARY

Shipping containers and full-scale simulated feed hoppers containing 110 and 330 lb of BS-NACO propellant, respectively, were ignited with explosive boosters. Blast output was measured and TNT equivalency was computed based upon a comparison with the explosive blast output of a surface burst of a hemispherically shaped TNT charge. The results of these computations in terms of a TNT equivalency profile are presented in Table 1, and in Figures 1, 2, and 3.

Table 1
TNT equivalency of BS-NACO propellant

Configuration	TNT equivalency (%)					
	3 ft/lb ^{1/3}		9 ft/lb ^{1/3}		18 ft/lb ^{1/3}	
	P	I	P	I	P	I
Shipping container (110 lb)						
Short side	30	10	15	10	—	—
Long side	30	20	15	10	—	—
Feed hopper (330 lb)	25	45	30	35	25	35

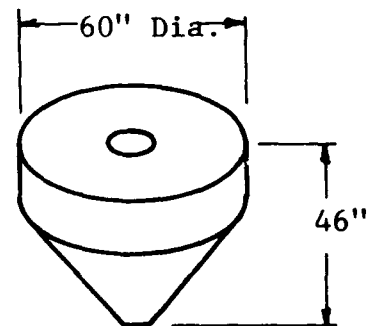
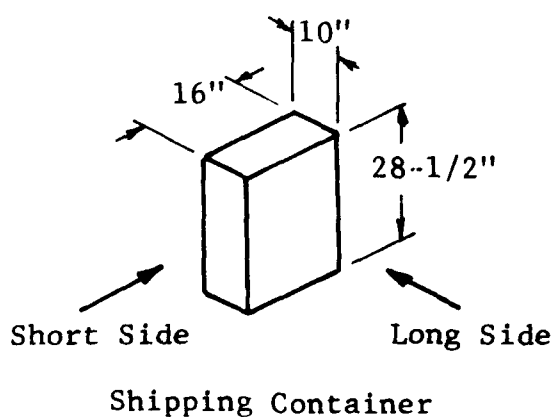


Fig 1 Equivalency profiles

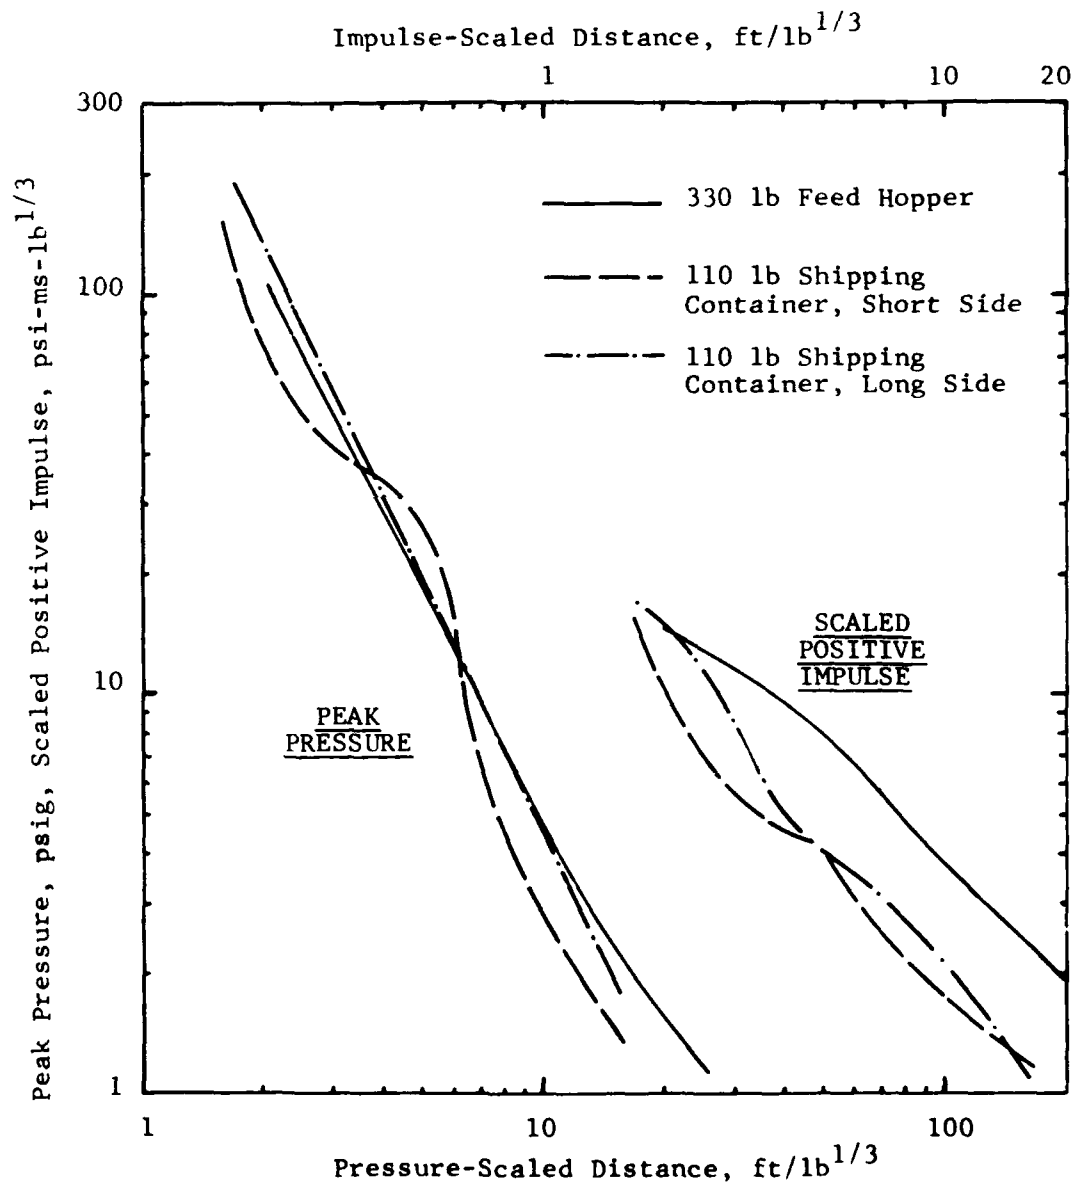


Fig 2 Peak pressure and positive impulse, BS-NACO

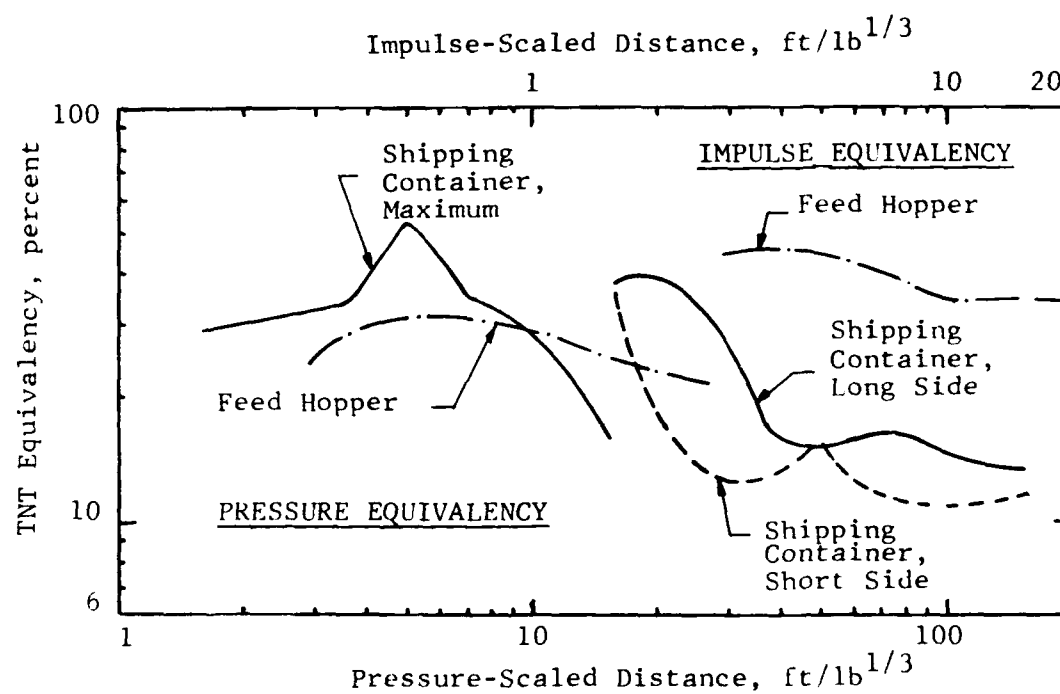


Fig 3 TNT equivalency, BS-NACO

INTRODUCTION

Background

The US Army Materiel Command initiated a program to upgrade the safety standards of new and existing ammunition plants. In support of this program, the Manufacturing Technology Directorate of Picatinny Arsenal developed design standards for hardening protective structures to withstand the effects of the detonation of high explosives. Design and safety engineers require data pertinent to the maximum strength of a blast wave that may originate from any of the explosive or deflagrateable materials present in the plant. Since the airblast capabilities of BS-NACO propellant could not be obtained from the available literature, the Arsenal sought to establish TNT equivalencies of these materials.

Past methods for siting and the design of individual components of explosive manufacturing and related facilities have been based on gross quantities of explosives or propellants. Present day technology has shown that cost effective yet safe facilities can be built, if design criteria is based on the actual explosive output of the materials involved.

A facility designer requires information on the blast pressure-time history, characterized by peak pressure and positive impulse. A considerable amount of prior work has been performed in establishing the airblast parameters of TNT. Consequently, for facility designs involving other energetic materials the design information can be expressed in terms of TNT equivalency. In this report information is presented for peak pressure, positive impulse, pressure TNT equivalency, and impulse TNT equivalency.

Benefits to be realized through this study include significant cost savings, by avoiding the overdesign of structures, and improved safety of personnel by the installation of adequate blast protection.

Objectives

Experimentally determine the maximum airblast output; peak overpressure and positive impulse of BS-NACO propellant.

Determine the TNT equivalencies of BS-NACO propellant by comparing its measured pressure and positive impulse with those produced by the detonation of an unconfined hemispherical charge of TNT.

TEST PROCEDURES

Test Sites

Subscale tests were conducted at the IITRI explosive research laboratory near LaPorte, Indiana. A schematic diagram of the test area physical arrangement is shown in Figure 1. It consists of two concrete slabs 75 ft long by 10 ft wide in which 12 pressure transducers were installed. The pressure transducers were mounted flush with the top surface of the concrete slab in mechanically isolated steel plates. The charges were located at ground zero (GZ) as indicated on Figure 4. The BS-NACO charges were always set on a steel witness plate, on level ground.

Large-scale tests were performed at Dugway Proving Ground, Utah at a remote desert site. A schematic plan view of the test site is shown in Figure 5. Radiating from GZ were two 40-ft-wide by 500-ft-long level land areas cleared of brush.

Pressure gages were located at discrete intervals in the cleared areas of the test site. The gages were flush-mounted in steel plates which in turn were flush-mounted with the ground surface. Determination of the location of a particular gage was based on anticipated overpressures from the test material.

Test Configurations

Three test configurations were tested. The first was a cylindrical cardboard drum full of BS-NACO multiperforated (0.048 inch web size) propellant. The cardboard drum was 19 inches long by 11 inches in diameter. Each contained 50 lb of propellant. Figure 6 illustrates how cylindrical Comp C4* explosive boosters were placed into the BS-NACO propellant at the top of the charge. The cylindrical Comp C4 boosters had a 1:1 aspect ratio. A cardboard cover was placed over the top of each drum. A small hole was cut into the cover so that the blasting cap could be put into the system last.

The second test configuration was a full-size metal shipping container, measuring 10 by 16 inches by 28-1/2 inches high. They were of rugged steel construction and offered heavy confinement to the propellant. Each shipping container contained 110 lb, net weight, of BS-NACO. Cylindrical Comp C4 boosters were located inside the containers near the top of the charge. The containers were set upright on the ground at GZ over a steel witness plate.

* Composition C4, a plastic explosive containing 91% RDX, 2.1% polyisobutylene, 1.6% motor oil, 5.3% di (2-ethylhexyl) sebacate.

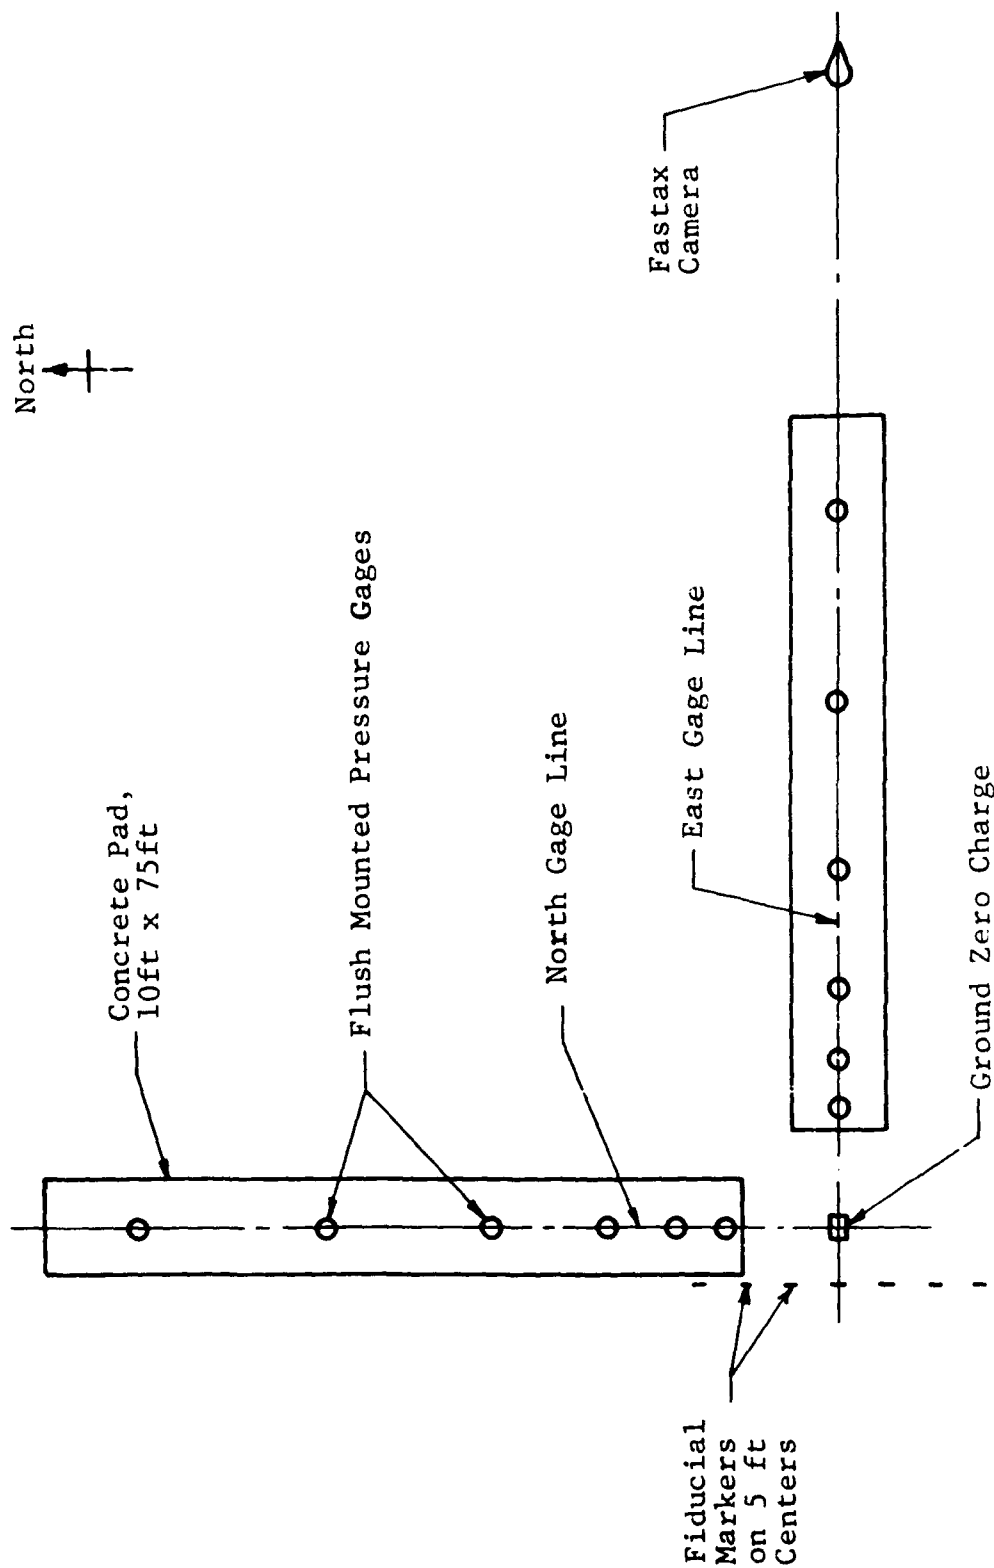


Fig 4 IITRI test area

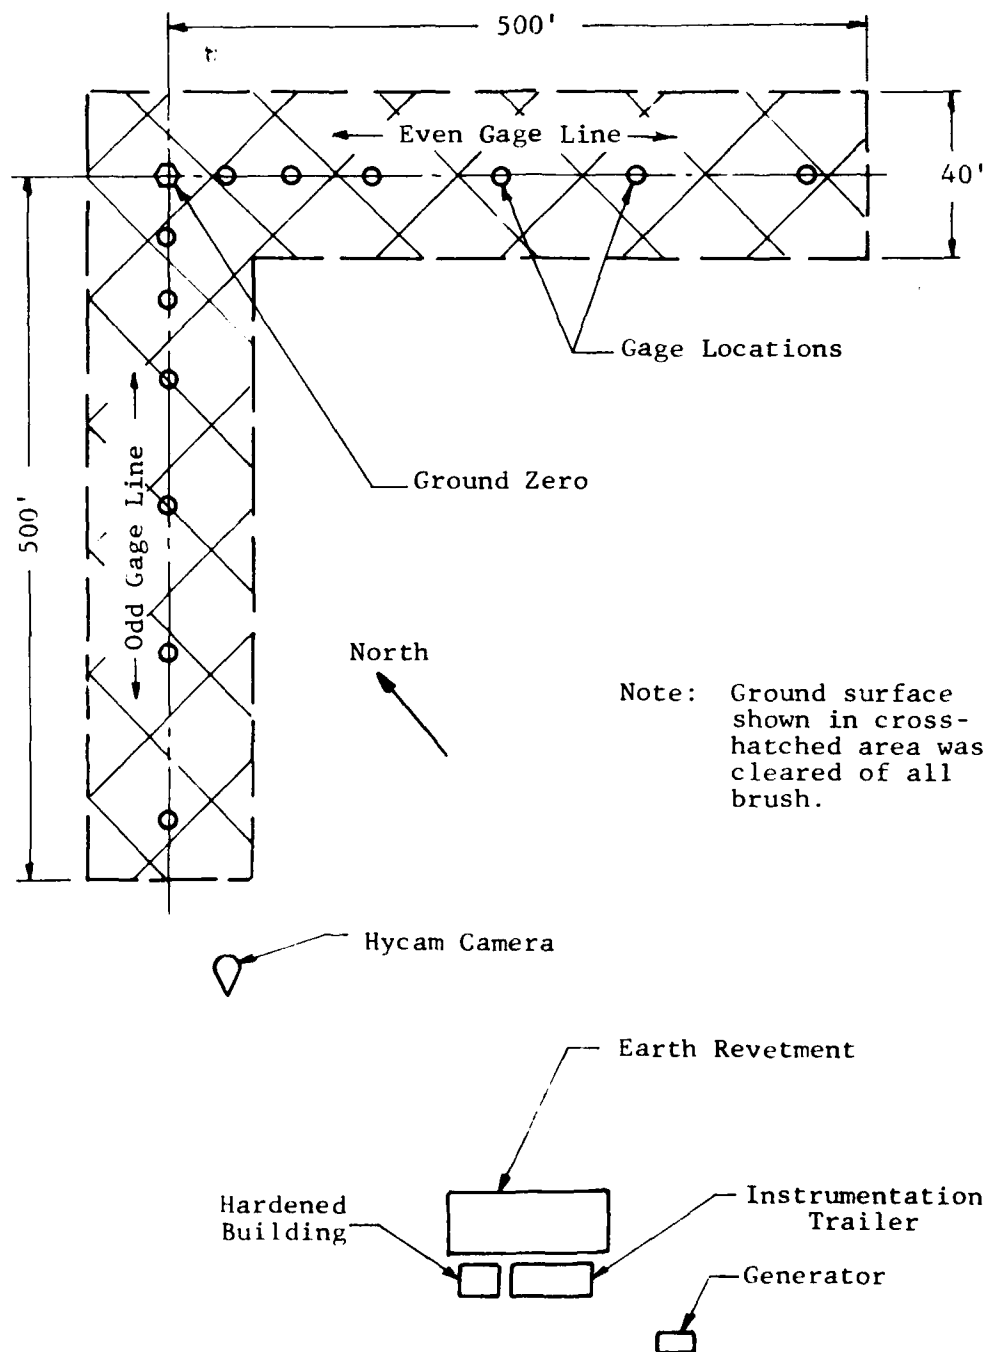


Fig 5 DPG test area

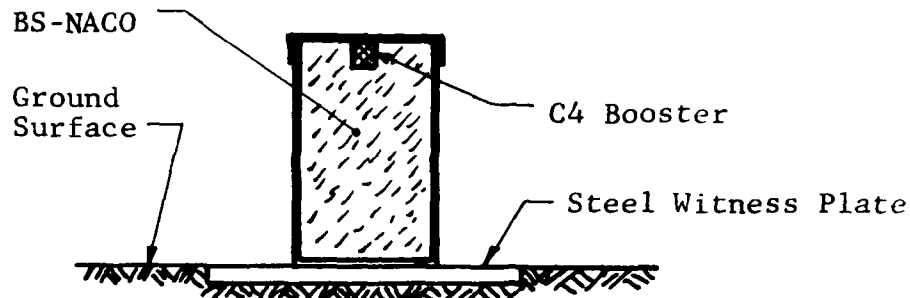


Fig 6 Cylindrical drum configuration

The third configuration was a full-scale feed hopper configuration as shown in the cutaway illustration in Figure 7. The feed hopper was constructed from 0.25-inch-thick 6061 T651 aluminum sheets rolled and welded into the shape shown. Aluminum supports, Figure 8, were welded into the lower conically shaped portion of the hopper to steady the hopper in an upright position.

The hoppers were loaded with approximately 330 lb of BS-NACO propellant through an 8-inch diameter hole in the top. The propellant was allowed to mound up in the hoppers as shown in Figure 7. Fifteen pound cubic shaped Con p C4 explosive boosters were positioned in the propellant as shown.

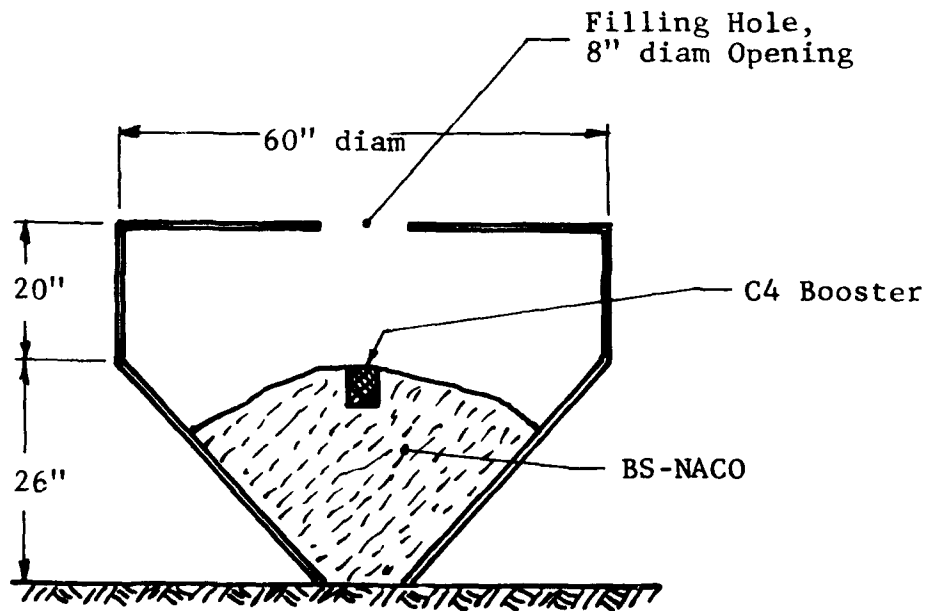


Fig 7 Feed hopper configuration

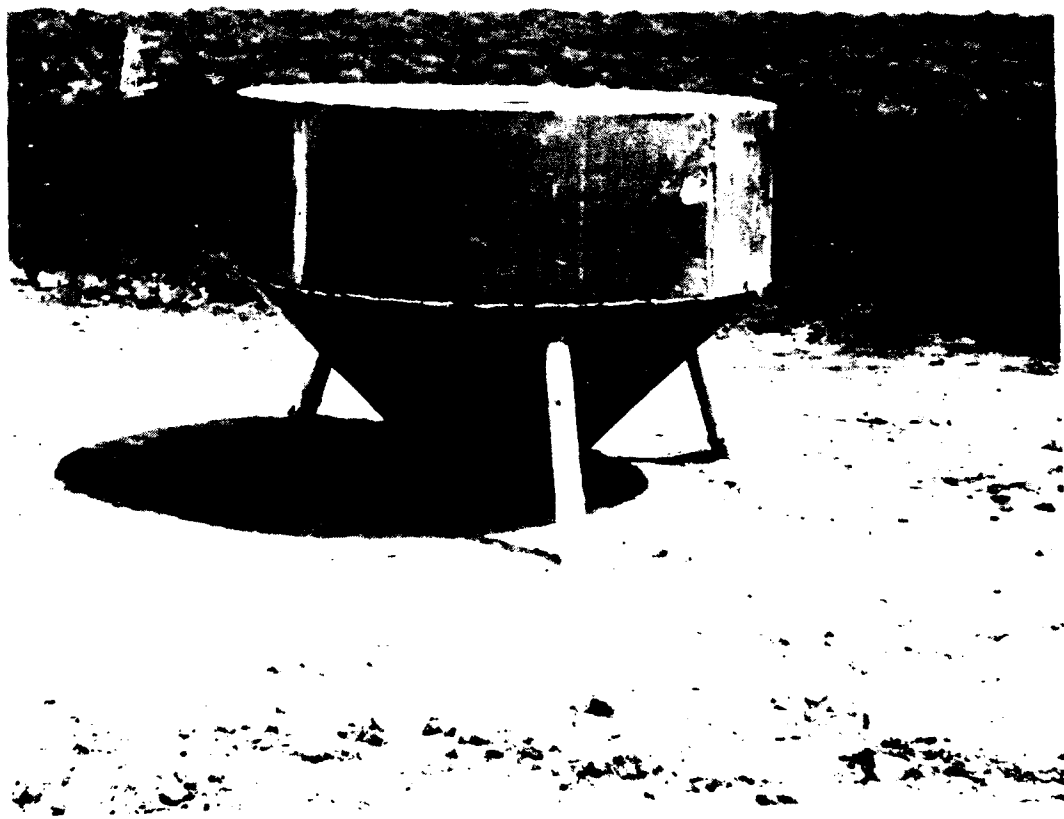


Fig. 8 Simulated full-scale feed hopper

Verification Tests

During the course of this test program several field verification tests were performed to confirm the recording accuracy of the pressure and impulse measuring systems. They consisted of measuring the peak pressure and positive impulse from 5 to 100 lb hemispherical Comp C4 explosive charges. Each charge was set on a steel witness plate at ground level.

Pressure and impulse data obtained from the Comp C4 verification shots are compared to established TNT hemispherical surface burst data (the increased energetics of Comp C4 is accounted for). All of the gage systems used in these tests had been previously calibrated in a laboratory using accepted standards. The laboratory calibrations were used throughout the program. The verification tests indicated that the instrumentation systems were functioning properly.

The resulting pressure and impulse data points for the various scaled distances of the verification shots are plotted in Figure 9. The close groupings of the various sets of points provides a good basis of confidence in proper functioning of the blast gages. The line that passes through the "peak overpressure" gage points is a TNT pressure curve used as a standard; it was generated by Kingery, BRL 1344, 1966. The line passing through the "scaled positive impulse" points was generated by IITRI for Comp C4. It utilizes a 1.25 factor to convert the weight of Comp C4 to the equivalent weight of TNT. Both of these reference curves are built into the IITRI computer program. Consequently, all of the TNT equivalencies shown in this report are computed from these reference curves.

TEST RESULTS

The appendixes of this report contain field data sheets which give test descriptions and evaluations of each test after they were shot. They also contain the raw test data and the computer printout of TNT equivalencies for individual data points. All of the scaled quantities noted in this report have been corrected to include the weight of the booster, in terms of its equivalent weight of BS-NACO in the total charge weight.

All of the tests conducted with BS-NACO propellant are tabulated in Table 2. After every test uninitiated propellant was observed in the test area. In addition the pressure-time waveforms were multi peaked indicating that the reactions were nonideal. The peak pressures reported herein are the maximum values measured and are not necessarily the first peak pressure in the pressure-time pulse.

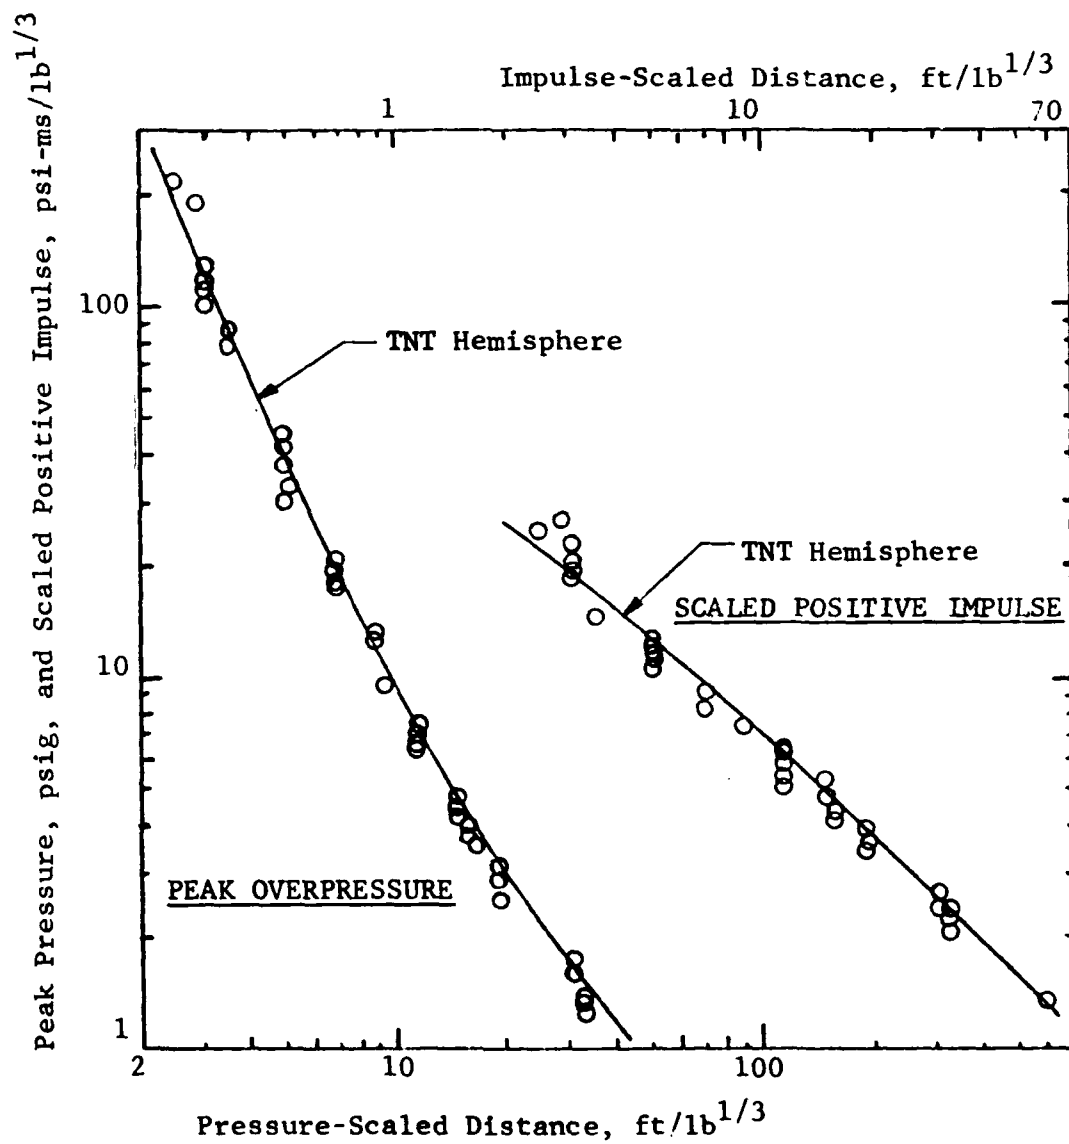


Fig 9 TNT hemisphere pressure and impulse curves

Table 2
BS-NACO propellant tests

Test	Configuration	Charge Weight (w_c , lb)	Booster Weight (w_b , lb)	w_b/w_c (percent)	Comments
NA-1	Cardboard Drum	50	2.5	5.0	Incomplete Ignition
NA-2	Cardboard Drum	50	5.0	10.0	Incomplete Ignition
NA-3	Shipping Container	110	5.0	4.5	Incomplete Ignition
NA-4	Shipping Container	110	5.0	4.5	Incomplete Ignition
NA-5	Shipping Container	110	5.0	4.5	Incomplete Ignition
NA-6	Shipping Container	110	5.0	4.5	Incomplete Ignition
C-NACO-1	Feed Hopper	332-3/4	15.0	4.5	Incomplete Ignition
C-NACO-2	Feed Hopper	328	15.0	4.6	Incomplete Ignition
C-NACO-3	Feed Hopper	335-1/4	15.0	4.5	Incomplete Ignition

The two 50 lb tests, NA-1 and 2, were conducted to determine the TNT equivalency range of the material and to determine the booster size for maximum blast output. The results of the 50 lb cardboard drum tests have been plotted in Figure 10. The highest peak pressures and positive impulses were recorded when the larger, 5 lb, booster was used to ignite the BS-NACO propellant. This size represents 10% of the BS-NACO charge weight. Since the TNT equivalency of BS-NACO propellant turns out to be very small the booster weight in equivalent pounds of BS-NACO is large. Consequently the data become distorted when a large booster weight correction factor is applied to obtain the total charge weight. For this reason a smaller size, 4.5% by weight, booster was used for the remainder of the tests.

The peak pressure and positive impulse data recorded during the full-size metal shipping container tests have been plotted in Figures 11 and 12. The containers were oriented such that the small side of the container was normal to one gage line and the larger side of the container was normal to the other gage line. One would expect the blast output profiles in the two normal directions to be dissimilar due to the asymmetry of the shipping container. However, the peak pressure data are so scattered that no generalization can be made as to which direction the pressure is greater. The amount of material detonating was different in each of the three tests as evidenced by the scatter in the peak pressure data. Curves are drawn through the maximum pressure points. A designer should assume that the worse case condition, in terms of peak pressure, may occur.

Positive impulse measurements show less data scatter between tests, however, curves have been drawn through the maximum scaled impulse points. In general, scaled positive impulse is greater in the direction normal to the long side of the shipping container.

Three tests were conducted with BS-NACO propellant in a simulated full-scale feed hopper configuration. The results of the pressure and positive impulse measurements are plotted in Figure 13. There is comparatively little scatter in the data between tests. Average eye-fit curves have been drawn through all of the data points for both peak pressure and scaled positive impulse.

TNT Equivalency Calculations

TNT equivalency calculations were made for 110 and 330 lb test results. TNT equivalency is defined as the ratio of charge weights (i.e., TNT weight divided by test material weight) that will give the same peak pressure (or positive impulse) at the same radial distance from the charge. The weight of the booster, in an equivalent test

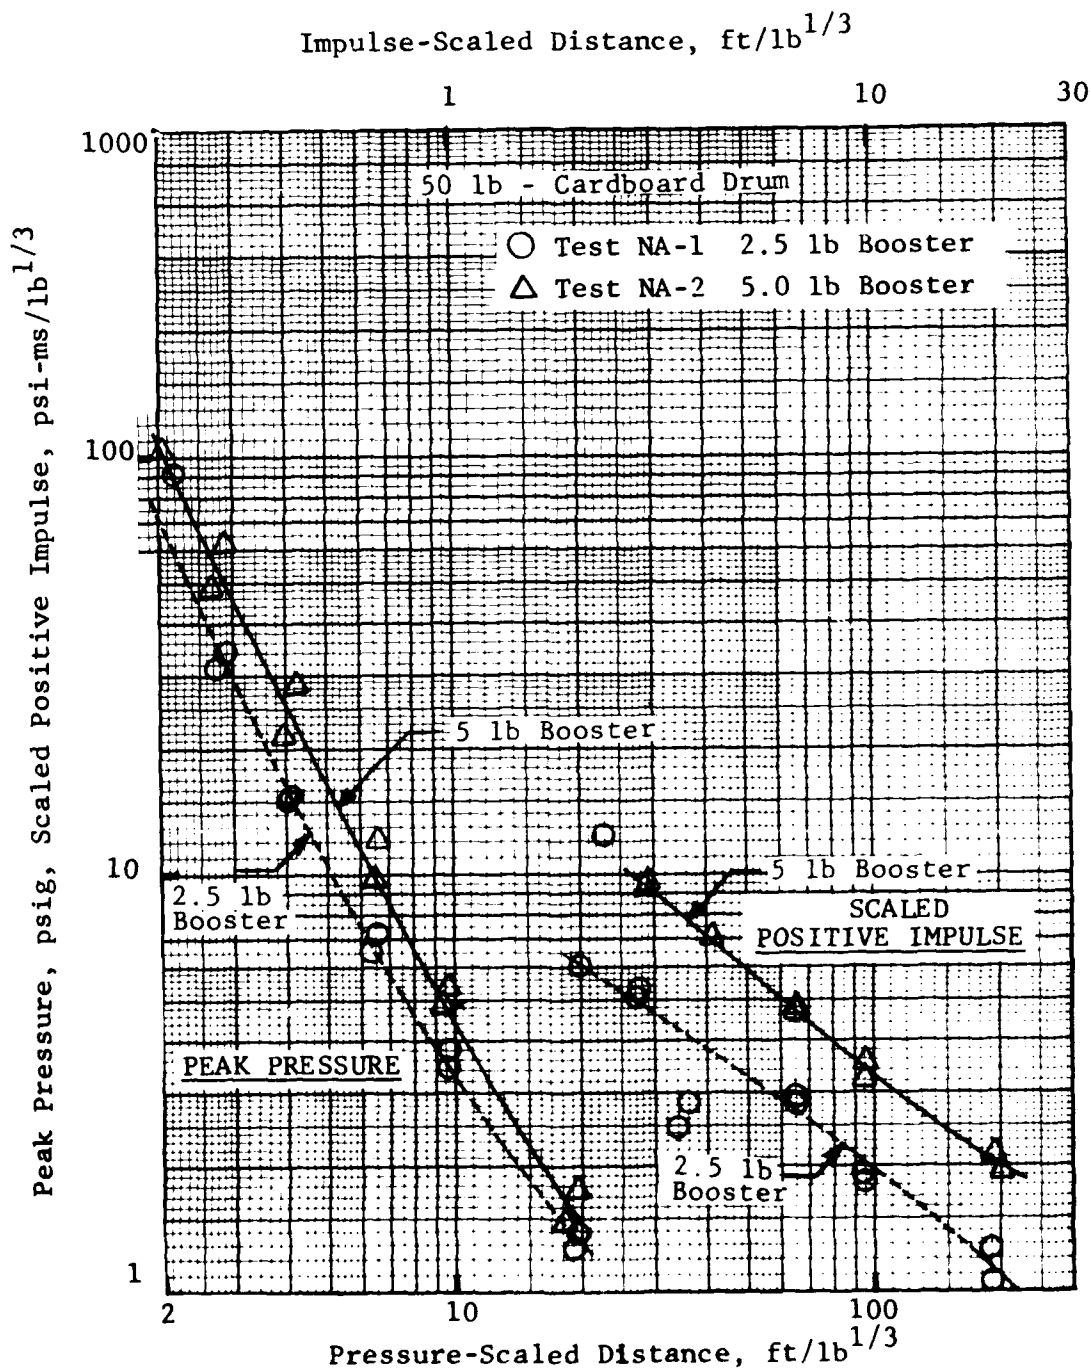


Fig 10 Peak pressure and scaled impulse. 50 lb BS-NACO

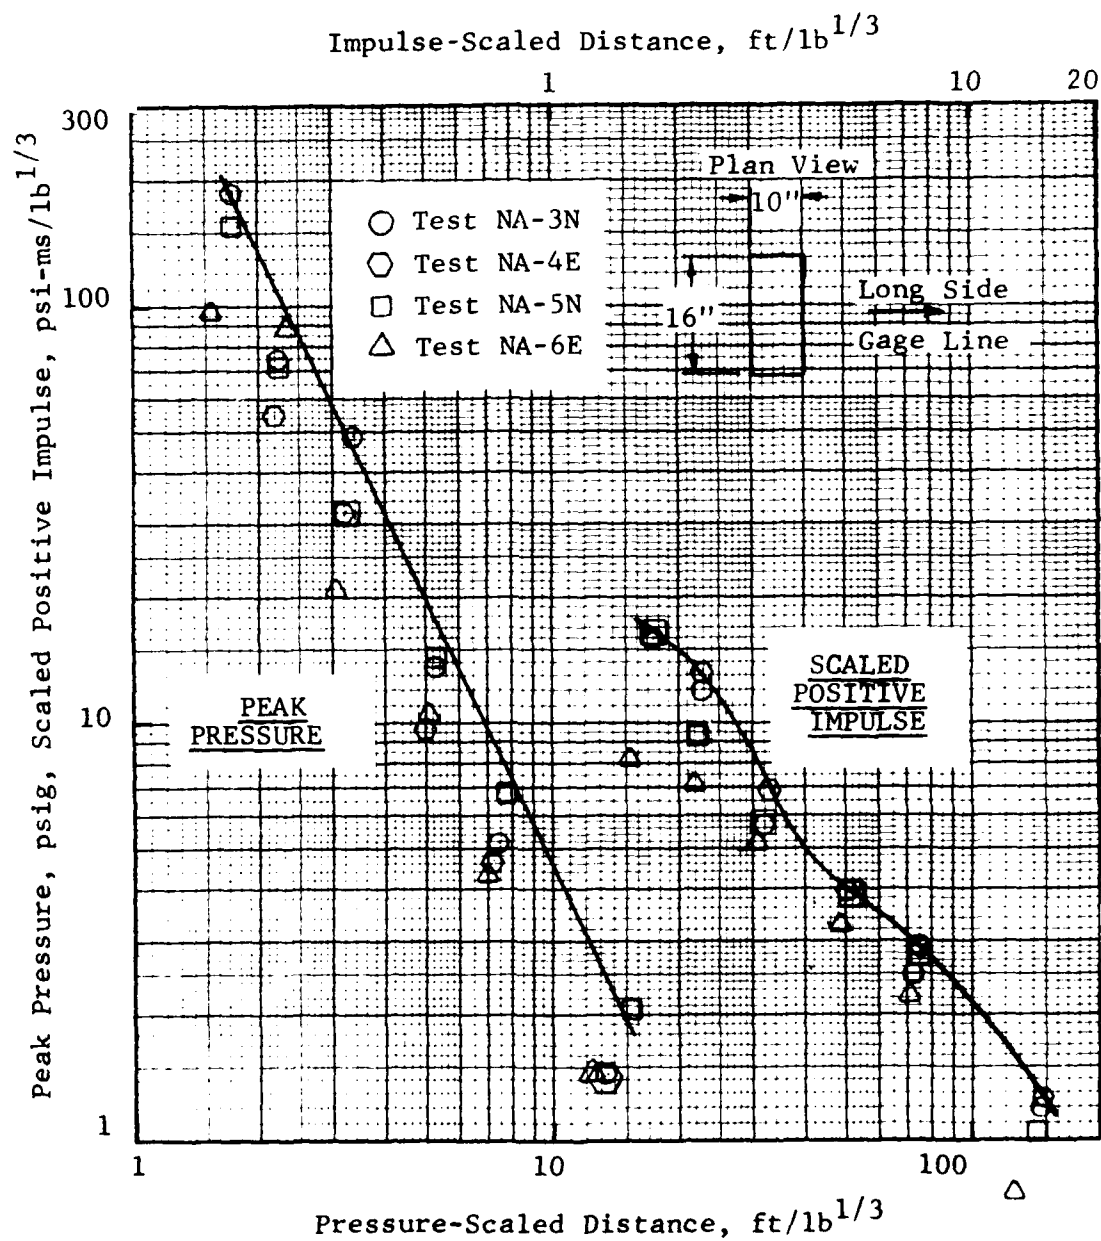


Fig 11 Peak pressure and scaled impulse, BS-NACO, long side of shipping container, 110 lb

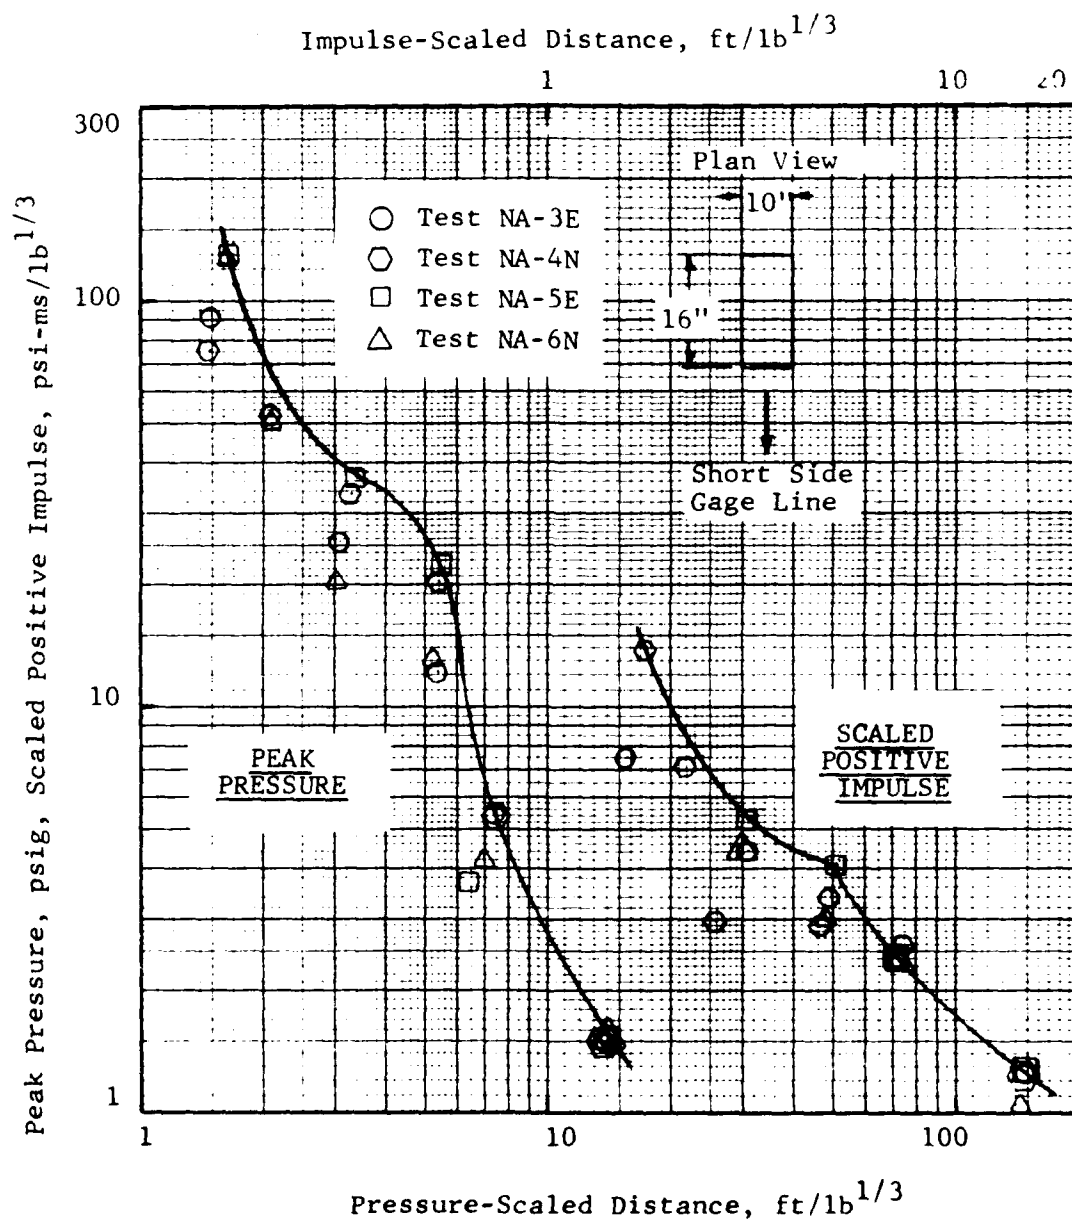


Fig 12 Peak pressure and scaled impulse, BS-NACO, short side shipping container, 110 lb

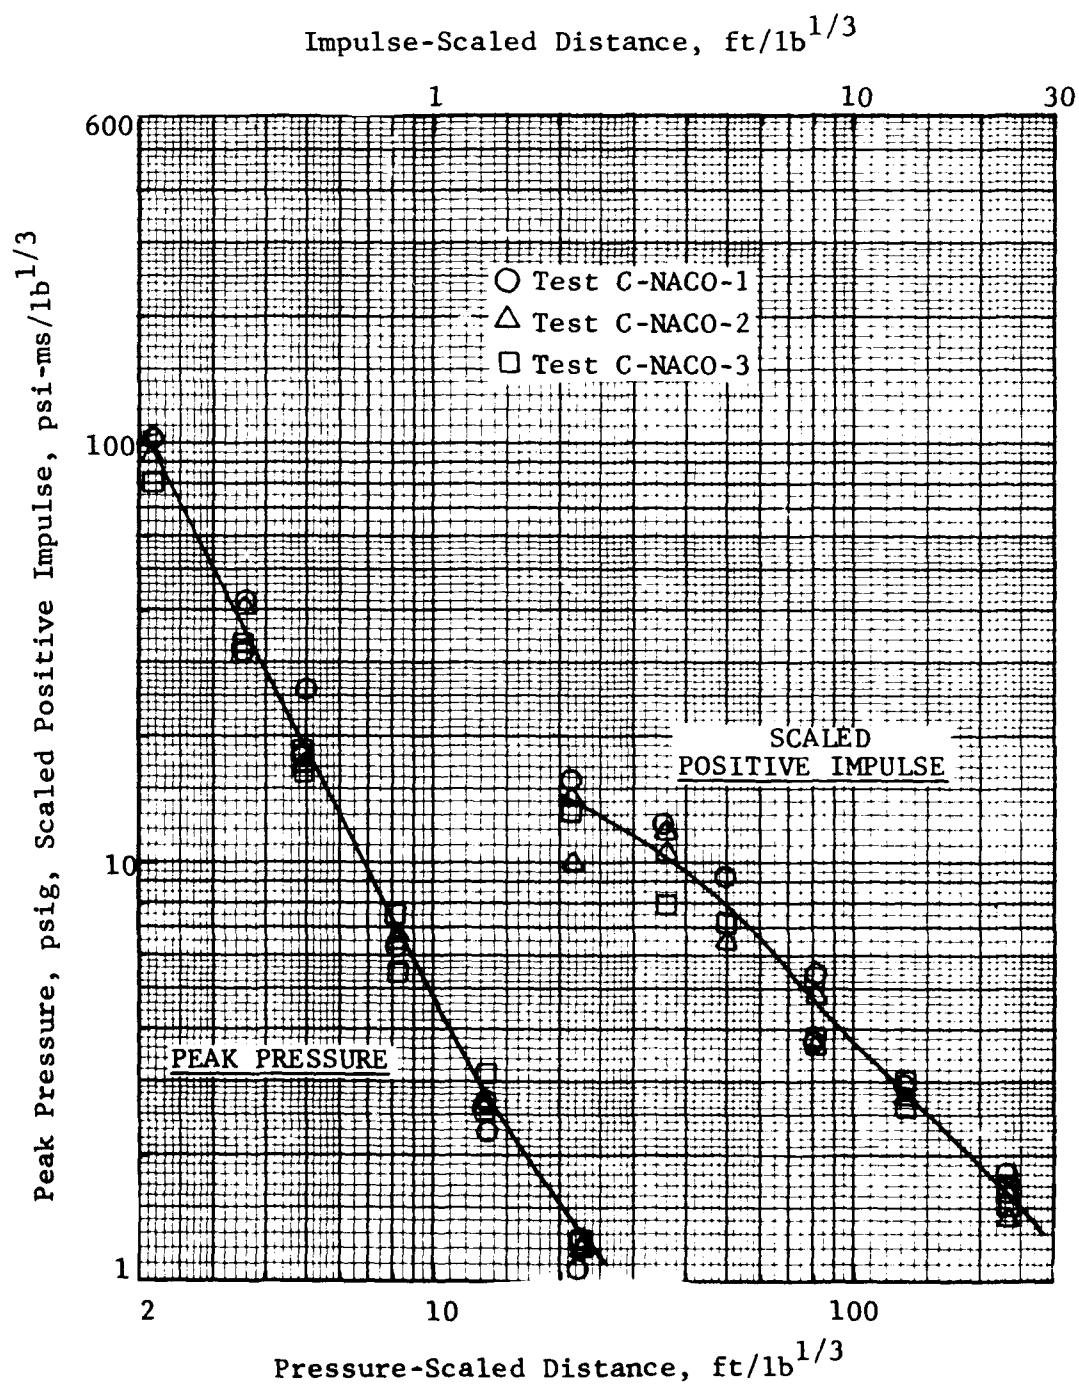


Fig 13 Peak pressure and scaled impulse, BS-NACO, feed
hopper configuration, 330 lb

material weight measure, is included in the total charge weight during the computational procedure. Calculations were made from the average peak pressure and scaled positive impulse eye-fit curves of the 330 lb test data. The maximum scaled positive impulse curves for the 110 lb tests was used to compute TNT equivalency. However, the greater of the two maximum peak pressure curves, Figures 11 and 12, was used to compute peak pressure equivalency for the 110 lb shipping container configuration. Consequently the peak pressure TNT equivalency for this configuration is applicable to both measurement directions, Figure 14. TNT equivalency for the 330 lb feed hopper is shown in Figure 15. Positive impulse TNT equivalency is considerably higher for the 330 lb tests than it is for the 110 lb tests. The equivalencies values quoted in the summary section of this report are based upon the results illustrated in Figures 14 and 15.

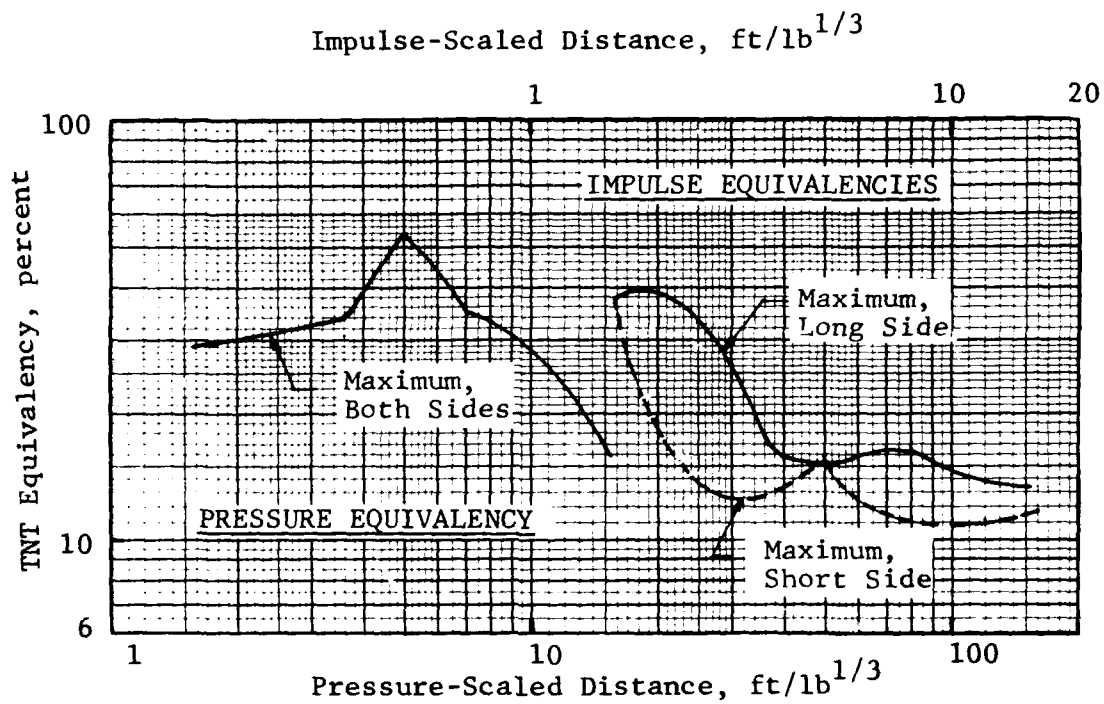


Fig 14 TNT equivalence, 110 lb shipping container

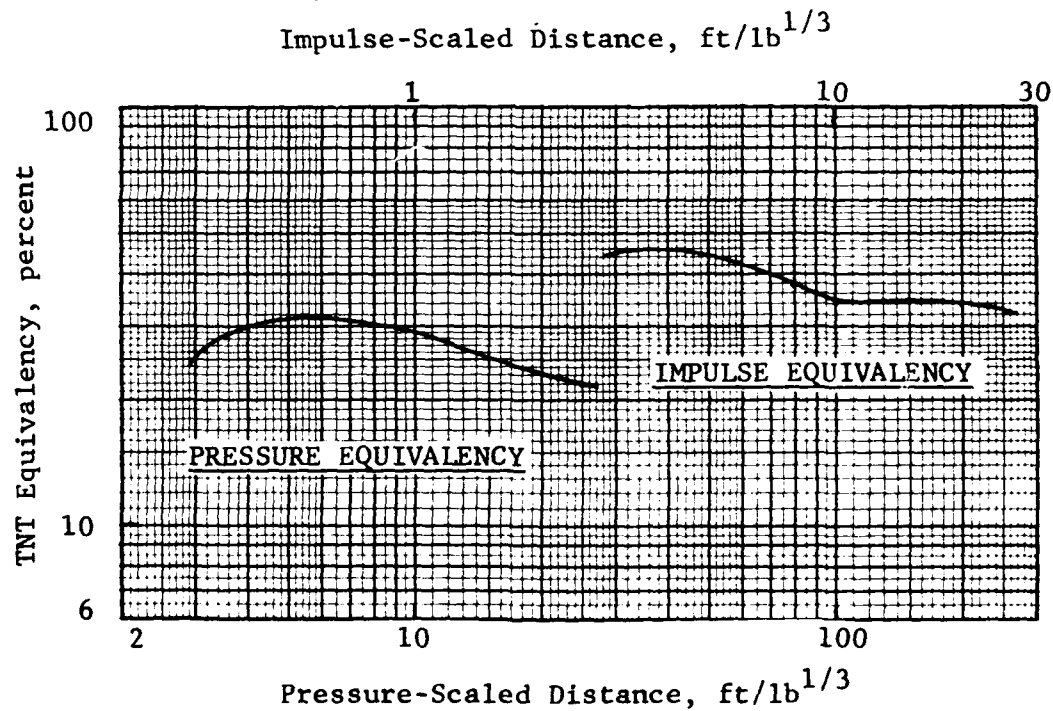


Fig 15 TNT equivalence, 330 lb feed hopper

APPENDIX A
FIELD DATA SHEETS

TEST MATERIAL BS-NACC PROPELLANT

TEST NO.	CHARGE WEIGHT	CONFIGURATION	BOOSTER WEIGHT	COMMENTS
NA-1	50 [#]	CARDBOARD DRUM, 19"x11" DIAM	2.5 [#] C4	UNBURNT NACC IN AREA POSTEST
NA-2	50 [#]	DITTO	5.0 [#] C4	DITTO
NA-3	110 [#]	STEEL SHIPPING CONTAINER	5.0 [#] C4	DITTO
NA-4	110 [#]	DITTO	5.0 [#] C4	DITTO
NA-5	110 [#]	DITTO	5.0 [#] C4	DITTO
NA-6	110 [#]	DITTO	5.0 [#] C4	DITTO

IITRI PROJECT NO. J6342

DATA SHEET NO. _____

TEST TITLE C-NACO-1 FEED HOPPER

DATE 4-16-75

TEST SAMPLE NACO PROPELLANT

TIME 1620 HRS.

SAMPLE WEIGHT 332 $\frac{3}{4}$ LB.

TEMP 53°F

IGNITER 2-ENGINEER SPECIALS (#8)


HUMID 39%

BOOSTER 15 LB. C4 BLOCK, $\approx 6\frac{1}{4}$ " CUBE

BARO 25.33 IN. HG.

HIGH SPEED CAMERA (1000 cps) YES

WIND 210° @ 21 KNOTS

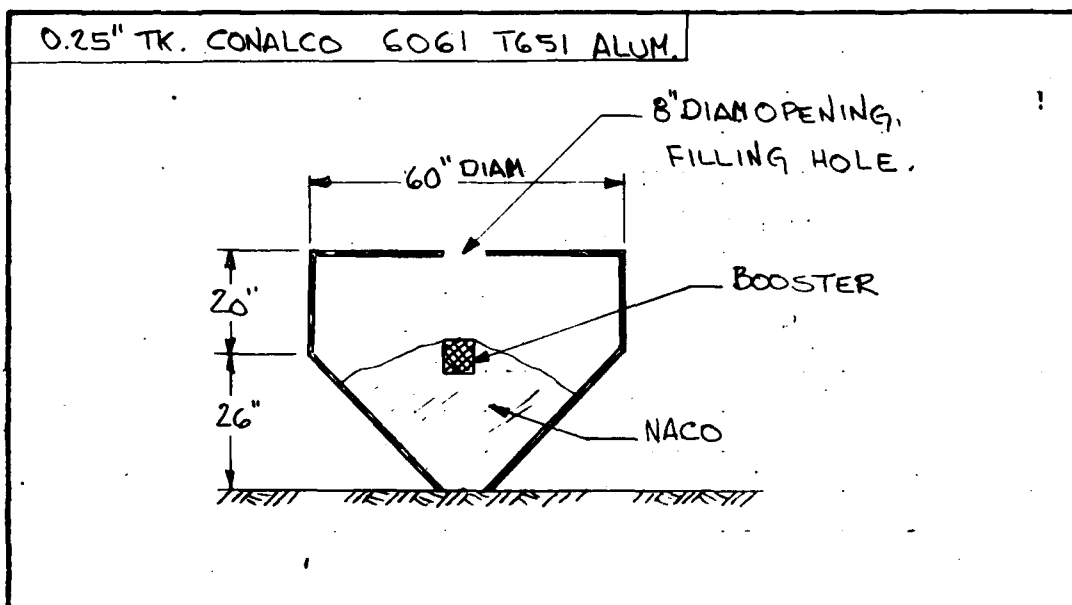

FIELD EVALUATION:

APPARENT CRATER SIZE: $\approx 9'$ DIAM $\times 16'$ DEPTH

INCOMPLETE IGNITION. A SMALL QUANTITY OF BLACKENED GRAINS FOUND IN AREA POSTTEST.

SMALL PIECES OF FEED HOPPER RECOVERED.

TEST ENGINEER: J. SWATOSH

IITRI PROJECT NO. 16342

DATA SHEET NO. _____

TEST TITLE IC-NACO-2 FEED HOPPER

DATE 4-17-5

TEST SAMPLE NACO PROPELLANT

TIME 450 HRS.

SAMPLE WEIGHT 328 LB.

TEMP 44°F

IGNITER 2-ENGINEER SPECIALS (#8)

HUMID 65%


BOOSTER 15 LB. C4 BLOCK, $\approx 6\frac{1}{4}$ " CUBE

BARO 25.29 IN. HG.

HIGH SPEED CAMERA (1000 cps) YES

WIND 350° @ 11 KNOTS

0.25" TK. CONALCO 6061 T651 ALUM.

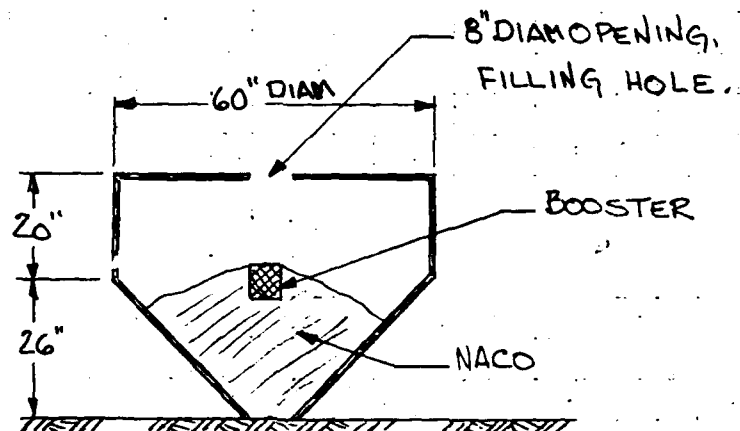

FIELD EVALUATION:

APPARENT CRATER SIZE: $\approx 9\frac{1}{2}$ DIA $\times$ 14" DEPTH

CONSIDERABLE BACKFILL

LARGE BLACKENED PIECES OF ALUM. RECOVERED

BURNT PIECES OF NACO FOUND IN CRATER POST-TEST

TEST ENGINEER: W. A. T. R.

ITTRI PROJECT NO. 16342

DATA SHEET NO. _____

TEST TITLE C-NACO-3 FEED HOPPER

DATE 4-18-5

TEST SAMPLE NACO PROPELLANT

TIME 1400 HRS.

SAMPLE WEIGHT 335 1/4 LB.

TEMP 47°F

IGNITER 2-ENGINEER SPECIALS (#8)


HUMID 51%

BOOSTER 15 LB. C4 BLOCK, $\approx 6 1/4$ " CUBE

BARO 2557 N. HG.

HIGH SPEED CAMERA (1000 cps) NO

WIND 330° @ 11 KNOTS

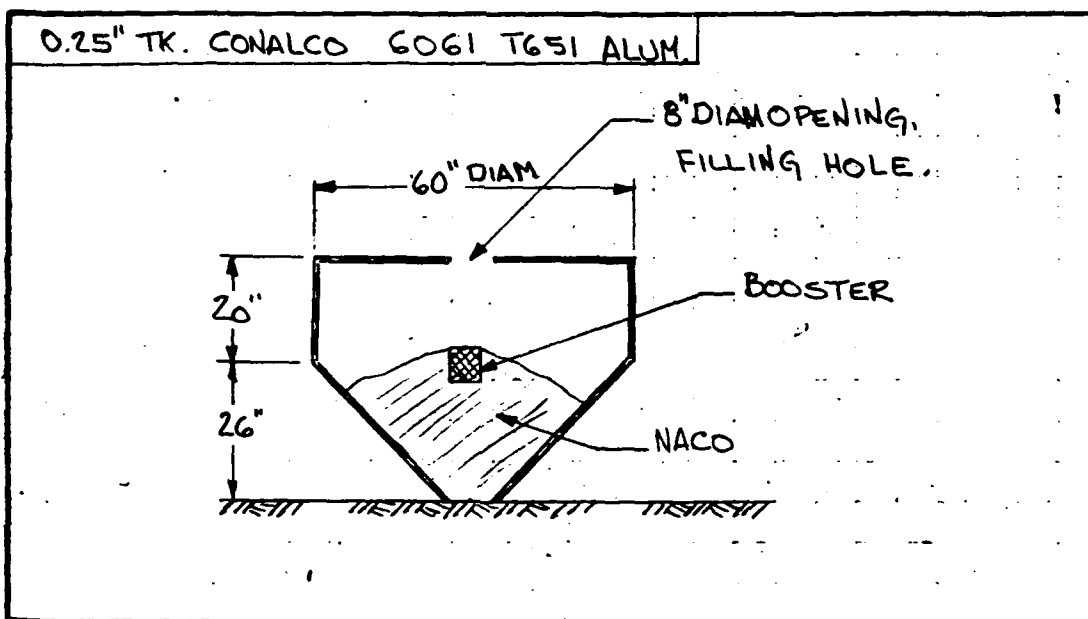

FIELD EVALUATION:

APPARENT CRATER SIZE: ≈ 11 " DIAM $\times 14$ " DEPTH.

LARGE BLACKENED PIECES OF ALUM. RECOVERED.

SEVERAL PIECES OF NACO FOUND IN CRATER WALLS.

TEST ENGINEER: W. SWATOSH

APPENDIX B
TEST DATA

TEST DATA

R	P	T
(FT)	(PSIG)	(PSI-MS)
NA-1 50 LBS (2.5 LB) DRUM L/D = 1.7		
8.75	31.20	49.40
8.74	90.90	27.10
11.72	31.00	22.90
11.98	34.40	22.00
16.98	15.10	13.40
16.98	15.30	12.30
26.97	7.08	11.80
27.00	6.05	12.20
39.47	3.76	8.23
39.73	3.44	7.87
80.68	1.39	5.16
80.71	1.26	4.45

NA-2 50 LBS (5 LB) DRUM L/D = 1.7		
8.75	104.00	- -
11.72	48.40	39.20
11.98	60.20	39.00
16.94	28.10	10.30
16.98	21.90	29.40
26.97	9.74	19.40
27.00	12.00	20.00
39.47	5.43	13.30
39.73	4.77	14.30
80.68	1.74	7.81
80.71	1.47	6.86

TEST DATA

R	P	I
(FT)	(PSIG)	(PSI-MG)

NA-3N, 110 LB (5LB), STEEL SHIPPING CONTAINER, LONG SIDE

8.86	187.00	80.20
11.77	75.50	60.70
17.03	49.70	30.30
27.03	13.30	19.60
39.79	5.22	13.50
80.78	1.46	6.57

NA-3E, 110 LB (5LB), STEEL SHIPPING CONTAINER, SHORT SIDE

8.78	92.40	42.90
16.96	25.60	25.00
26.99	12.10	18.70
39.49	5.52	13.10
80.69	1.49	6.81

NA-4N, 110 LB (5LB), STEEL SHIPPING CONTAINER, SHORT SIDE

8.86	76.90	71.00
11.77	52.40	39.00
17.03	33.50	19.20
27.03	20.50	16.50
39.79	5.54	14.20
80.78	1.49	6.75

NA-4E, 110 LB (5LB), STEEL SHIPPING CONTAINER, LONG SIDE

8.76	136.00	- -
11.97	55.20	66.30
16.96	31.50	36.20
26.99	9.85	21.00
39.49	4.73	15.40
80.69	1.41	6.92

NA-5N, 110 LB (5LB), STEEL SHIPPING CONTAINER, LONG SIDE

8.86	156.00	82.60
11.77	71.40	48.20
17.03	32.30	30.70
27.03	14.20	20.60
39.79	6.82	14.90
80.78	2.09	5.99

TEST DATA

H	P	I
(FT)	(PSIG)	(PSI-MS)
NA-5E, 110 LB (SLB), STEEL SHIPPING CONTAINER, SHORT SIDE		
8.78	131.00	- -
16.96	47.40	28.90
26.99	22.50	21.70
39.49	3.71	13.20
80.69	1.55	6.96
NA-6N, 110 LB (SLB), STEEL SHIPPING CONTAINER, SHORT SIDE		
8.66	129.00	- -
11.77	50.60	13.00
17.03	20.30	25.50
27.03	13.00	17.10
39.79	4.22	13.00
80.78	1.55	5.86
NA-6E, 110 LB (SLB), STEEL SHIPPING CONTAINER, LONG SIDE		
8.78	97.00	45.50
16.96	20.80	28.40
26.99	10.70	18.20
39.49	4.38	12.50
80.69	1.46	4.56

TEST DATA

R	P	I
(FT)	(PSIG)	(PSI-MS)
(C)NACO-1, 332.75= NACO AND 15= C4		
16.04	102.00	114.00
26.04	42.20	89.70
26.09	31.80	- -
36.04	25.50	65.70
36.08	17.50	- -
60.03	7.38	28.00
60.08	6.18	39.00
100.10	2.69	21.50
100.10	2.28	20.50
169.10	1.28	13.10
169.20	1.07	11.10

(C)NACO-2, 328= NACO AND 15= C4		
16.04	104.00	104.00
16.09	62.70	75.30
26.04	41.30	76.20
36.04	17.10	46.50
36.08	16.90	- -
60.03	6.48	26.90
60.08	6.64	34.40
100.10	2.66	19.80
100.10	2.63	19.30
169.10	1.22	11.70
169.20	1.19	10.40

(C)NACO-3, 335.25= NACO AND 15= C4		
16.04	64.30	96.40
26.04	33.50	58.30
26.09	32.00	85.20
36.04	17.50	52.40
36.08	16.10	- -
60.03	5.35	27.40
60.08	7.42	39.30
100.10	3.11	21.70
100.10	2.57	19.10
169.10	1.24	12.40
169.20	1.26	11.00

SUMMARY OF EXPERIMENTAL RESULTS

NORTH AND EAST BLAST LINES

BASED ON INDIVIDUAL DATA POINTS

TEST TYPE	R (FT)	P (PSI)	I/W $\frac{1}{3}$	LAMBDA=P $\frac{1}{3}$	LAMBDA=I $\frac{1}{3}$	FQ=P (X)	FQ=I (X)
NA-1	50 LBS (2.5 LH) DRUM		L/P = 1.7				
	A.75	31.20	12.69	1.32	2.25	1.26	34.17
	H.79	90.90	6.16	2.21	2.00	23.56	A.73
	11.72	31.00	5.32	2.75	2.73	11.13	10.45
	11.98	34.40	5.08	2.90	2.77	15.07	9.87
	16.98	15.10	2.84	4.06	3.59	13.34	5.51
	16.98	15.30	2.45	4.08	3.39	13.84	4.03
	20.97	7.08	2.80	6.63	6.39	17.92	12.14
	27.00	6.05	2.92	6.41	6.45	12.36	13.14
	39.47	3.76	1.95	9.70	9.33	17.76	11.80
	39.73	3.44	1.83	9.58	9.26	14.37	10.66
	40.68	1.39	1.27	19.87	19.92	18.24	18.73
	40.71	1.26	1.07	19.33	19.39	13.37	13.80

DEPT.

COPY

601

SUMMARY OF EXPERIMENTAL RESULTS

NORTH AND EAST BLAST LINES

BASED ON INDIVIDUAL DATA POINTS

TEST TYPE	Q	P	$\frac{1}{3}$		$\frac{1}{3}$		FQ=D (%)	EQ=I (%)
			(FT)	(PST)	(PSI=MS/LH) $\frac{1}{3}$	LAMDA= $\frac{1}{3}$ (FT/LH) $\frac{1}{3}$		
VA=2	50	LHS (5 LH)	DRUM	L/D = 1.7				
	11.75	104.00	-	-	2.05	-	22.73	-
	11.72	28.40	9.43	2.69	2.69	2.42	18.69	28.10
	11.98	40.20	9.41	2.91	2.91	2.89	31.65	28.94
	16.94	28.10	.39	4.14	4.14	.64	33.57	.02
	16.98	21.90	7.10	3.94	3.94	4.10	20.64	29.21
	26.97	9.74	4.67	6.49	6.49	6.49	28.28	27.94
	27.00	12.00	4.84	6.74	6.74	6.54	43.69	29.98
	39.47	5.43	3.17	9.69	9.69	9.41	35.24	25.65
	39.73	4.77	3.47	9.49	9.49	9.64	26.12	30.54
	40.64	1.74	1.91	19.43	19.43	19.78	28.37	34.47
	40.71	1.47	1.64	18.66	18.66	19.29	15.56	24.20

SUMMARY OF EXPERIMENTAL RESULTS

NORTH AND EAST BLAST LINES

BASED ON INDIVIDUAL DATA POINTS

TEST TYPE	R (FT)	P (PSI)	$\frac{1}{3}$ I/W (PSI-MS/LB)	$\frac{1}{3}$ LAMBDA=P (FT/LB)	$\frac{1}{3}$ LAMBDA=I (FT/LB)	EQ=P (%)	EQ=I (%)
NA-3N, 110 LB (SLB), STEEL SHIPPING CONTAINER, LONG SIDE							
	8.86	187.00	15.97	1.75	1.76	31.27	36.72
	11.77	75.50	12.02	2.26	2.33	19.82	32.71
	17.03	49.70	5.67	3.40	3.18	39.13	14.30
	27.03	13.30	3.68	5.26	5.02	24.18	13.35
	39.79	5.22	2.49	7.47	7.33	15.04	12.26
	80.78	1.46	1.20	13.85	14.70	6.92	10.84
NA-3E, 110 LB (SLB), STEEL SHIPPING CONTAINER, SHORT SIDE							
	8.78	92.40	7.61	1.54	1.56	8.20	8.91
	16.96	25.60	4.43	3.14	3.01	12.91	8.85
	26.99	12.10	3.43	5.19	4.95	20.15	11.69
	39.49	5.52	2.39	7.48	7.21	16.69	11.28
	80.69	1.49	1.25	13.98	14.80	7.45	11.71

SUMMARY OF EXPERIMENTAL RESULTS

NORTH AND EAST BLAST LINES

BASED ON INDIVIDUAL DATA POINTS

TEST TYPE	R (FT)	P (PSI)	$\frac{1}{3}$ I/W (PSI-MS/LB)	$\frac{1}{3}$ LAMBDA-P (FT/LB)	$\frac{1}{3}$ LAMBDA-I (FT/LB)	EQ-P (X)	EQ-I (X)
NA-4N, 110 LB (5LB), STEEL SHIPPING CONTAINER, SHORT SIDE							
	8.86	76.90	13.97	1.47	1.74	5.54	28.83
	11.77	52.40	7.21	2.12	2.18	10.20	12.72
	17.03	33.50	2.98	3.28	2.64	21.10	3.90
	27.03	20.50	2.91	5.44	4.77	49.66	8.55
	39.79	5.54	2.64	7.56	7.41	17.35	13.71
	80.78	1.49	1.24	14.01	14.79	7.49	11.52
NA-4E, 110 LB (5LB), STEEL SHIPPING CONTAINER, LONG SIDE							
	8.78	136.00	-	1.67	-	17.51	-
	11.97	55.20	13.24	2.21	2.39	12.25	39.80
	16.96	31.50	6.98	3.24	3.27	18.73	20.83
	26.99	9.85	3.95	5.01	5.07	13.22	15.16
	39.49	4.73	2.91	7.22	7.46	11.31	16.08
	80.89	1.41	1.27	13.47	14.85	5.87	12.13
NA-5N, 110 LB (5LB), STEEL SHIPPING CONTAINER, LONG SIDE							
	8.86	156.00	16.48	1.72	1.77	23.01	38.89
	11.77	71.40	9.27	2.24	2.26	18.04	20.38
	17.03	32.30	5.76	3.27	3.19	19.86	14.72
	27.03	14.20	3.86	5.30	5.06	27.30	14.57
	39.79	6.82	2.80	7.81	7.48	27.46	15.21
	80.78	2.09	1.06	15.63	14.27	22.12	8.63

SUMMARY OF EXPERIMENTAL RESULTS

NORTH AND EAST BLAST LINES

BASED ON INDIVIDUAL DATA POINTS

TEST TYPE	R (FT)	P (PSI)	I/W $\frac{1}{3}$ (PSI-MS/LB)	LAMBDA=P $\frac{1}{3}$ (FT/LB)	LAMBDA=I $\frac{1}{3}$ (FT/LB)	EQ=P (X)	EQ=I (X)
NA-5E, 110 LB (5LB), STEEL SHIPPING CONTAINER, SHORT SIDE							
	8.78	131.00	-	1.66	-	16.37	-
	16.96	47.40	5.35	3.37	3.14	35.96	12.74
	26.99	22.50	4.10	5.46	5.10	56.90	16.27
	39.49	3.71	2.42	6.43	7.23	5.05	11.47
	80.69	1.55	1.28	14.26	14.87	8.64	12.29
NA-6N, 110 LB (5LB), STEEL SHIPPING CONTAINER, SHORT SIDE							
	8.86	129.00	-	1.68	-	16.51	-
	17.03	20.30	4.55	2.98	3.04	8.06	9.40
	27.03	13.00	3.05	5.25	4.82	23.19	9.37
	39.79	4.22	2.37	7.00	7.27	8.33	11.26
	80.78	1.55	1.03	14.28	14.17	8.69	8.17
NA-6E, 110 LB (5LB), STEEL SHIPPING CONTAINER, LONG SIDE							
	8.78	97.00	8.25	1.56	1.59	9.09	10.51
	11.97	89.80	6.32	2.35	2.16	28.08	10.09
	16.96	20.80	5.23	2.98	3.12	8.35	12.23
	26.99	10.70	3.32	5.09	4.92	15.77	10.98
	39.49	4.38	2.25	7.01	7.10	8.99	10.00
	80.69	1.46	.71	13.83	12.48	6.88	3.82

SUMMARY OF EXPERIMENTAL RESULTS

ODD AND EVEN BLAST LINES

BASED ON INDIVIDUAL DATA POINTS

TEST TYPE	R (FT)	P (PSI)	^{1/3}		LAMBDA=P ^{1/3} (FT/LB)	LAMBDA=I ^{1/3} (FT/LB)	EU=P (%)	EU=I (%)
			I/W	(PSI-MS/LB)				
(C)NACO=1, 332.75= NACO AND 15= C4, FEED HUPPER CONF.								
	16.04	102.00	15.87		2.17	2.23	26.18	49.44
	26.04	42.20	12.59		3.59	3.65	37.19	64.22
	26.09	31.80	-		3.52	-	24.21	-
	36.04	25.50	9.20		5.03	5.05	52.72	59.23
	36.08	17.50	-		4.92	-	29.34	-
	60.03	7.38	3.81		8.27	8.16	37.25	27.91
	60.08	6.18	5.44		8.14	8.38	26.20	51.06
	100.10	2.69	2.97		13.50	13.84	24.41	40.32
	100.10	2.28	2.82		13.04	13.79	15.51	37.06
	169.10	1.28	1.81		22.65	23.38	22.32	40.53
	169.20	1.07	1.52		21.68	23.10	12.90	30.36

(C)NACO-2, 328 NACO AND 15 C4, FEED HOPPER CONF.								
	16.04	104.00	14.46		2.19	2.23	27.39	42.14
	16.09	62.70	10.12		2.05	2.16	11.54	22.19
	26.04	41.30	10.65		3.60	3.64	36.54	44.39
	36.04	17.10	6.39		4.92	4.95	28.53	31.85
	36.08	16.90	-		4.92	-	28.08	-
	60.03	6.48	3.66		8.21	8.16	29.23	26.25
	60.08	6.64	4.78		6.24	8.35	30.80	41.41
	100.10	2.66	2.73		13.52	13.82	23.93	35.33
	100.10	2.63	2.66		13.49	13.79	23.24	33.75
	169.10	1.22	1.61		22.54	23.29	19.67	33.77
	169.20	1.19	1.42		22.43	23.07	18.30	27.40

SUMMARY OF EXPERIMENTAL RESULTS

ODD AND EVEN BLAST LINES

BASED ON INDIVIDUAL DATA POINTS

TEST TYPE	H (FT)	P (PSI)	^{1/3}		LAMBDA=P ^{1/3} (FT/LB)	LAMBDA=J ^{1/3} (FT/LB)	EO=P (%)	EO=J (%)
			I/W	(PSI-MS/LB)				
(C)NACO-3, 335.25# NACO AND 15# CU, FEED HOPPER CONF.								
	16.04	64.30	13.23		2.03	2.20	11.68	35.83
	26.04	33.50	7.92		3.52	3.54	25.92	28.53
	26.09	32.00	11.90		3.51	3.64	24.27	58.24
	36.04	17.50	7.22		4.89	4.96	28.90	38.97
	36.08	16.10	-		4.87	-	25.29	-
	60.03	5.35	3.71		7.93	8.12	18.76	26.59
	60.08	7.42	5.47		8.26	8.36	37.46	51.57
	100.10	3.11	2.99		13.72	13.81	34.45	40.68
	100.10	2.57	2.61		13.54	13.68	21.41	52.40
	169.10	1.24	1.70		22.45	23.23	20.20	56.54
	169.20	1.26	1.50		22.54	23.02	21.22	29.85

APPENDIX C
SAFETY APPROVAL



DEPARTMENT OF THE ARMY
HEADQUARTERS, UNITED STATES ARMY ARMAMENT COMMAND
ROCK ISLAND, ILLINOIS 61201

REPLY TO
ATTENTION OF:

21 AUG 1975

AMSAR-SFA

SUBJECT: Preliminary Report, TNT Equivalency of BS-NACO Propellant

Commander, US Army Materiel Command, ATTN: AMCSF-E

Inclosed test report is forwarded for your review and approval. Based on the test results, it is recommended that BS-NACO propellant be considered a wholly Class 2 propellant with Class 2 QD requirements being the separation distances.

FOR THE COMMANDER:

1 Incl

Glenn S. Leach
GLENN S. LEACH
Safety Manager

CF:

AMSAR-FPI-C w/o incl

AMCSF-E (21 Aug 75) 1st Ind

SUBJECT: Preliminary Report, TNT Equivalency of BS-NACO Propellant

HQ, US Army Materiel Command, 5001 Eisenhower Ave., Alexandria, VA 22333
17 September 1975

TO: Commander, US Army Armament Command, ATTN: AMSAR-SFA, Rock Island,
IL 61201

Based on the information submitted, this office agrees that subject propellant should be considered QD Class 2 material while in-process.

FOR THE COMMANDER:

Incl wd

Walter G. Queen
WALTER G. QUEEN
Chief
Safety Office

DISTRIBUTION LIST

Copy No.

Commander	
US Army Armament Research & Development Command	
ATTN: DRDAR-CG	1
DRDAR-LCM-E	2
DRDAR-LCM-S	3-26
DRDAR-SF	27
DRDAR-TSS	28-32
Dover, NJ 07801	

Chairman	
Dept of Defense Explosive Safety Board	
Forrestal Bldg, GB-270	33-34
Washington, DC 20314	

Administrator	
Defense Documentation Center	
ATTN: Accessions Division	35-46
Cameron Station	
Alexandria, VA 22314	

Commander	
Department of the Army	
Office, Chief Research, Development and Acquisition	
ATTN: DAMA-CSM-P	47
Washington, DC 20310	

Office, Chief of Engineers	
ATTN: DAEN-MCZ	48
Washington, DC 20314	

Commander	
US Army Materiel Development & Readiness Command	
ATTN: DRCSF	49
DRCDE	50
DRCRP	51
DRCIS	52
Eisenhower Avenue	
Alexandria, VA 22333	

Commander DARCOM Installations & Services Agency ATTN: DRCIS-RI Rock Island, IL 61201	53
Director Industrial Base Engineering Activity (IBEA) ATTN: DRXIB-MT and EN Rock Island, IL 61201	54
Commander US Army Materiel Development & Readiness Command ATTN: DRCPM-PBM	55
DRCPM-PBM-S	56
DRCPM-PBL-L	57-58
DRCPM-PBM-E	59-60
Dover, NJ 07801	
Commander US Army Armament Materiel Readiness Command ATTN: DRSAR-SF	61-63
DRSAR-SC	64
DRSAR-EN	65
DRSAR-PPI	66
DRSAR-PPI-C	67
DRSAR-RD	68
DRSAR-IS	69
DRSAR-ASF	70
Rock Island, IL 61201	
Commander Edgewood Arsenal ATTN: SAREA-TD	71
SAREA-MTD	72
Aberdeen Proving Ground, MD 21010	
Commander Frankford Arsenal ATTN: SARFA-T	73
Philadelphia, PA 19137	

Director DARCOM Field Safety Activity ATTN: DRXOS-ES Charlestown, IN 47111	74-75
Commander US Army Engineer Division ATTN: HNDED PO Box 1600-West Station Huntsville, AL 35809	76
Commander Radford Army Ammunition Plant Radford, VA 24141	77
Commander Badger Army Ammunition Plant Baraboo, WI 53913	78
Commander Indiana Army Ammunition Plant Charlestown, IN 47111	79
Commander Holston Army Ammunition Plant Kingsport, TN 37660	80
Commander Lone Star Army Ammunition Plant Texarkana, TX 75501	81
Commander Milan Army Ammunition Plant Milan, TN 38358	82
Commander Iowa Army Ammunition Plant Middletown, IA 52638	83

Commander Joliet Army Ammunition Plant Joliet, IL 60436	84
Commander Longhorn Army Ammunition Plant Marshall, TX 75670	85
Commander Louisiana Army Ammunition Plant Shreveport, LA 71130	86
Commander Cornhusker Army Ammunition Plant Grand Island, NB 68801	87
Commander Ravenna Army Ammunition Plant Ravenna, OH 44266	88
Commander Newport Army Ammunition Plant Newport, IN 47966	89
Commander Volunteer Army Ammunition Plant Chattanooga, TN 37401	90
Commander Kansas Army Ammunition Plant Parsons, KS 67357	91
District Engineer US Army Engineering District, Mobile Corps of Engineers PO Box 2288 Mobile, AL 36628	92

District Engineer US Army Engineering District, Ft. Worth Corps of Engineers PO Box 17300 Ft. Worth, TX 76102	93
District Engineer US Army Engineering District, Omaha Corps of Engineers 6014 US PO & Courthouse 215 N 17th Street Omaha, NB 78102	94
District Engineer US Army Engineering District, Baltimore Corps of Engineers PO Box 1715 Baltimore, MD 21203	95
District Engineer US Army Engineering District, Norfolk Corps of Engineers 803 Front Street Norfolk, VA 23510	96
Division Engineer US Army Engineering District, Huntsville PO Box 1600, West Station Huntsville, AL 35807	97
Commander Naval Ordnance Station Indianhead, MD 20640	98
Commander US Army Construction Engr Research Laboratory Champaign, IL 61820	99
Commander Dugway Proving Ground Dugway, UT 84022	100

Commander Savanna Army Depot Savanna, IL 61704	101
Civil Engineering Laboratory Naval Construction Battalion Center ATTN: L51 Port Hueneme, CA 93043	102
Commander Naval Facilities Engineering Command (Code 04, J. Tyrell) 200 Stovall Street Alexandria, VA 22322	103
Commander Southern Division Naval Facilities Engineering Command ATTN: J. Watts PO Box 10068 Charleston, SC 29411	104
Commander Western Division Naval Facilities Engineering Command ATTN: W. Morre San Bruno, CA 94066	105
Officer in Charge Trident Washington, DC 20362	106
Officer in Charge of Construction Trident Bangor, WA 98348	107
Commander Atlantic Division Naval Facilities Engineering Command Norfolk, VA 23511	108

Commander
Naval Ammunition Depot
Naval Ammunition Production Engineering Center
Crane, IN 47522

109