

AD-A044 490

ARMY ARMAMENT RESEARCH AND DEVELOPMENT COMMAND ABERD--ETC F/G 20/4  
COMPUTER PROGRAM FOR REDUCTION AND PRESENTATION OF HIGH-PRESSUR--ETC(U)  
SEP 77 L D WHITING, F H GASKINS  
ARCSL-TR-77065

UNCLASSIFIED

NL

| OF |  
AD  
A044490



END  
DATE  
FILMED  
10-77  
DDC

AD A 044490

12

*[Handwritten mark]*

AD

TECHNICAL REPORT ARCSL-TR-77085

COMPUTER PROGRAM FOR REDUCTION AND PRESENTATION OF  
HIGH-PRESSURE CAPILLARY VISCOMETER DATA

by

Lawrence D. Whiting III  
Frederick H. Gaskins

Research Division

September 1977

DDC  
RECEIVED  
SEP 23 1977  
B

*[Handwritten mark]*



US ARMY ARMAMENT RESEARCH AND DEVELOPMENT COMMAND  
Chemical Systems Laboratory  
Aberdeen Proving Ground, Maryland 21010

AD NO. \_\_\_\_\_  
DDC FILE COPY

Approved for public release; distribution unlimited.

**Disclaimer**

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

**Disposition**

Destroy this report when it is no longer needed. Do not return it to the originator.

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER ARC SL-TR-77065	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) COMPUTER PROGRAM FOR REDUCTION AND PRESENTATION OF HIGH-PRESSURE CAPILLARY VISCOMETER DATA.	5. TYPE OF REPORT & PERIOD COVERED Technical Report April 1976-January 1977	6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) Lawrence D. Whiting III, Frederick H. Gaskins	8. CONTRACT OR GRANT NUMBER(s)	
9. PERFORMING ORGANIZATION NAME AND ADDRESS Director, Chemical Systems Laboratory Attn: DRDAR-CLB-P Aberdeen Proving Ground, Maryland 21010	10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS Tasks IT161101A91A IW662619A06501	
11. CONTROLLING OFFICE NAME AND ADDRESS Director, Chemical Systems Laboratory Attn: DRDAR-CLJ-R Aberdeen Proving Ground, Maryland 21010	12. REPORT DATE September 1977	
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office) 1247p.	13. NUMBER OF PAGES 59	15. SECURITY CLASS. (of this report) UNCLASSIFIED
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE NA
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Capillary viscometer      Viscoelastic fluids      Recoverable shear Rheology                      Shear stress                      Normal stress Newtonian liquids              Shear rate                      Shear modulus Non-Newtonian liquids        Digital computer                CALCOMP plotter Univac 1108		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) This report is a description of a digital computer program for reducing and presenting data from the high-pressure capillary viscometer (HPCV). The HPCV is used to investigate the rheological behavior of viscoelastic fluids. A discussion of the theory and the viscometer's application is included. FORTRAN computer listings, sample input and output, and examples of the plotted rheological variables are further inclusions.		

410 170

JP

DDC  
RECEIVED  
SEP 23 1977  
RECEIVED  
B

### SUMMARY

A digital computer program was developed to reduce significantly time and costs incurred in the reduction and presentation of the high-pressure capillary viscometer (HPCV) data. A savings of approximately 40 man-hours per experiment has already been achieved. Further benefits include greater accuracy and clearer and more precise graphics. Perhaps the most beneficial factor, however, is that erroneous data can be identified and corrected more rapidly than with the manual data reduction process. This is an important aspect because many test fluids deteriorate in storage and, if experiments are to be repeated, the test fluids may no longer be representative of the test series.

ACCESSION for	
NTIS	White Section <input checked="" type="checkbox"/>
DDC	Black Section <input type="checkbox"/>
UNCLASSIFIED	<input type="checkbox"/>
JUL 1971	
BY	
DISTRIBUTION/SECURITY CODES	
Dist	or SPECIAL
A	

## PREFACE

The work described in this report was performed under ILIR Task 1T161101A91A, In-House Laboratory Independent Research; Characterization of Liquids by Their Rheological Properties, and Task 1W662619A06501, Flame and Incendiary Agent Technology. The work was begun in April 1976 and completed in January 1977.

The use of trade names in this report does not constitute an official endorsement or approval of the use of such commercial hardware or software. This report may not be cited for purposes of advertisement.

Reproduction of this document in whole or in part is prohibited except with permission of the Director, Chemical Systems Laboratory, Attn: DRDAR-CLJ-R, Aberdeen Proving Ground, Maryland 21010; however, Defense Documentation Center and the National Technical Information Service are authorized to reproduce the document for United States Government purposes.

## Acknowledgments

The authors acknowledge the assistance of Edmund M. Wilbur and Charles M. Lawson, fellow workers in the Physics Branch of Research Division.

PRECEDING PAGE BLANK-NOT FILMED

## CONTENTS

	<u>Page</u>
I. INTRODUCTION . . . . .	9
II. THEORY AND APPLICATIONS . . . . .	9
III. COMPUTER-PROGRAM DESCRIPTION . . . . .	11
A. Short-Series Phase . . . . .	11
B. Long-Series Phase . . . . .	12
IV. OPERATING INSTRUCTIONS . . . . .	14
V. CONCLUSIONS . . . . .	14
SELECTED REFERENCES . . . . .	17
GLOSSARY . . . . .	19
PROGRAM VARIABLES . . . . .	21
APPENDIXES	
A. Flow Chart for Short-Series Phase . . . . .	23
B. Flow Chart for Long-Series Phase . . . . .	35
C. Procedure for the High-Pressure Capillary Viscometer Experiment Evaluation . . . . .	55
DISTRIBUTION LIST . . . . .	57

## COMPUTER PROGRAM FOR REDUCTION AND PRESENTATION OF HIGH-PRESSURE CAPILLARY VISCOMETER DATA

### I. INTRODUCTION.

This report describes a digital computer program for reduction of rheological data acquired from the high-pressure capillary viscometer (HPCV) and presentation of that reduced data by preparation of graphs of the prime rheological parameters.

The program is written for the Edgewood Arsenal Univac 1108 computer in FORTRAN V language. Double-logarithmic plots of the reduced data are drawn by the California Computer Products CALCOMP plotter.

### II. THEORY AND APPLICATIONS.<sup>1</sup>

The HPCV is used in the investigation of the rheological behavior of viscoelastic fluids. It is designed to permit calculation of rheological variables (refer to glossary) from geometric parameters combined with pressure, mass flow, and time data. The HPCV provides a steady-state unidirectional laminar flow of the test fluid by generating a constant stress at controlled pressure levels.

The nucleus of the HPCV is the removable precision-bore capillary tube which is inserted between two 100-ml test fluid reservoirs. The capillary tube and reservoir assembly, including lead-in lines and connecting tubes, are constructed of stainless steel. To insure complete temperature control of the test sample, the fluid reservoir assembly is placed into a temperature bath. In operation, pressurized gas, controlled by a network of valves and regulators and monitored by a bank of precision gages, forces test fluid from one reservoir through the capillary tube to the second reservoir. This action forces gas from the second reservoir to impinge on a low-viscosity fluid, such as n-hexane, driving it through a burette at the same flow rate being experienced by the test fluid.

Volumetric flow-time relationships are determined from the burette readings. Pressure gradients of  $10^{-3}$  to  $10^3$  psig can be applied with the HPCV resulting in an operating shear rate range of  $10^{-3}$  to  $10^6$  seconds<sup>-1</sup>.

Table 1 presents a listing of the capillary tube sets and their dimensions.

Two basic experiments are performed with the HPCV. The short-series experiment involves volume flow-rate measurements performed with the longest capillary tube of each group. These data permit shear stress, shear rate, and apparent viscosity to be calculated.

The calculated data can then be used to generate shear stress versus shear rate and viscosity versus shear rate plots. These generated plots are known as the basic flow curves and are adequate to describe fully the rheological behavior of Newtonian or inelastic non-Newtonian liquids.

---

<sup>1</sup>Gaskins, Frederick H. EATR 4472. Characterization of Thickened Aluminum Alkyl Fuels. II. Steady-State Flow Properties of Concentrated Solutions of Polyisobutylene in Triethylaluminum. January 1971. UNCLASSIFIED Report.

Table 1. Capillary Viscometer Parameters

Group	Tube No.	Length		Nominal diameter		R	L/R
		in	cm	in	cm		
A	11	2.0020	5.0851	0.205	0.52	0.26	19.6
B	7	1.9914	5.0582	0.127	0.322	0.161	31.4
	10	0.4485	1.1392	0.127	0.322		
C	5	1.9985	5.0759	0.0646	0.164	0.0820	61.9
	8	0.6502	1.6515	0.0646	0.164		
	15	0.1839	0.4671	0.0646	0.164		
D	9	2.0021	5.0353	0.0244	0.0619	0.0310	164.0
	6	0.5960	1.5138	0.0244	0.0619		
	14	0.1534	0.3896	0.0244	0.0619		
E	3	1.5082	3.8308	0.0146	0.0370	0.0185	207.0
	4	0.3318	0.8428	0.0146	0.0370		
	13	0.0859	0.2182	0.0146	0.0370		
F	1	1.0155	2.5794	0.00807	0.0205	0.0103	250.0
	2	0.2346	0.5959	0.00807	0.0205		
	12	0.317	0.0805	0.00807	0.0205		

More information is needed to describe the flow of high-polymer or other viscoelastic solutions. This is accomplished by the use of all the capillary tubes in a long-series experiment. These additional data permit calculation of recoverable shear, shear modulus, relaxation time, and normal stress, parameters needed to describe the fluid's elasticity.

The HPCV is limited by the shear-rate range in which it can operate. For lower shear rates, less than  $10^{-3}$  seconds $^{-1}$ , the rotational viscometer or the Weissenberg rheogoniometer is used to acquire needed data. The Weissenberg rheogoniometer also is more accurate since it measures elasticity directly as compared to the HPCV where elasticity is a computed function of physical and rheological factors.

### III. COMPUTER-PROGRAM DESCRIPTION.

The computer program matches the basic experiments performed with the HPCV; i.e., the first phase provides data reduction and graphic interpretation for the short-series experiments and the second phase provides data reduction and graphic interpretation for the long-series experiments.

#### A. Short-Series Phase.

Appendix A contains the flow chart and the program listing.

The first section establishes arrays and procedures for data input. Volume-time data, i.e., the flow rates through the capillary tubes, for each pressure level are fed into the computer. Appendix A contains sample input. A slope and y-intercept are calculated at each pressure level from the volume-time coordinates.

Values for shear rate and shear stress are then calculated by using capillary tube dimensions and the following rheological relationships:

$$\dot{\gamma}_m = 4S/\pi r^3 \quad (1)$$

$$\sigma = r\Delta P/2\ell \quad (2)$$

where

$\dot{\gamma}_m$  = shear rate, sec $^{-1}$

$r$  = capillary tube radius, cm

$S$  = slope or volumetric flow rate, cc/sec

$\sigma$  = shear stress, dynes/cm $^2$

$\Delta P$  = pressure, dynes/cm $^2$

$\ell$  = capillary tube length, cm

The apparent viscosity at each pressure level is calculated as a function of the shear stress divided by the shear rate.

The reduced data are printed in tabular form. Appendix A contains sample output.

Two double-logarithmic plots of the reduced data are drawn by the CALCOMP plotter. One plot is a graph of shear rate versus shear stress; the other plot presents apparent viscosity versus shear rate. On each graph, a best fit curve is drawn through the data points. This curve is computed using E. Wilbur's program for fitting a polynomial equation as high as the sixth degree to the data.

Appendix A contains a sample plot of the basic flow curves (figures A-1 and A-2).

#### B. Long-Series Phase.

Appendix B contains a flow chart and the program listing.

The input is basically the same as for a short series, except that an extra card is used to read in the number of groups of capillary tubes and their designations. Appendix B contains sample input. The same basic calculations are performed for shear rate, shear stress, and viscosity, and a double logarithmic plot of shear rate versus shear stress is drawn. A curve is plotted for each capillary used. A sample plot of these basic intermediate curves for one capillary group is contained in appendix B (figure B-1).

Values for shear rate and shear stress selected for this intermediate plot are then used to predict certain viscoelastic properties of the material studied. Furthermore, by examining the general slope of these curves and recognizing those points that deviate from the norm, erroneous data are located and immediately deleted.

For each group of capillary tubes, six isoshear rates are selected. For each selected shear rate, a corresponding shear stress, the total shear stress (refer to glossary), is calculated. The total shear stress then permits the applied pressure to be computed:

$$\sigma_t = (\dot{\gamma}_{ms} - BT)/S_t \quad (3)$$

$$\Delta P = (2\ell/r)\sigma_t \quad (4)$$

where

$\sigma_t$  = total shear stress, dynes/cm<sup>2</sup>

$\dot{\gamma}_{ms}$  = selected shear rate, sec<sup>-1</sup>

BT = y-intercept of shear rate versus shear stress curve

$S_t$  = slope of shear rate versus shear stress curve

$\Delta P$  = applied pressure, dynes/cm<sup>2</sup>

$\ell$  = length of capillary tube, cm

$r$  = radius of capillary tube, cm

Analyzing the applied pressure versus  $\ell/r$  ratios of the capillary tubes by groups, values for corrected shear stress and recoverable shear are computed. The corrected shear stress equals the slope of the applied pressure versus the  $\ell/r$  ratio curve divided by two. Recoverable shear equals the X-axis intercept multiplied by a negative two. More detailed explanations are contained in the glossary and table 2.

Table 2. Matrix for the Capillary Experiment\*

Function	X-intercept	Y-intercept	Slope
$\sigma_t = f(r/\ell)$	$(r/\ell)\sigma_t \rightarrow 0 = -2/\gamma_R$	$(\sigma_t)\ell \rightarrow \infty = \sigma_c$	$\sigma_c(\gamma_R/2)$
$P_t = f(\ell/r)$	$(\ell/r)P_t \rightarrow 0 = -\gamma_R/2$	$(P_t)\ell \rightarrow 0 = \sigma_c \cdot \gamma_R$	$2\sigma_c$

\*According to Philippoff and Gaskins.<sup>2</sup> Note that the original matrix in the reference (page 269) has been modified by deletion of the Couette correction, "n". This simplification is based on the rationale that "n", which is an entrance correction, is constant for various capillary tubes with the same radius, and the computer program sequence presented in this report evaluates elasticity from data for groups of tubes of the same radius at constant shear rates.

Additional rheological parameters, including apparent and effective viscosity, shear modulus, relaxation time, and normal stress, are calculated as follows:

$$\eta_a = \sigma_c / \dot{\gamma}_{ms} \quad (5)$$

$$\eta_e = \eta_a(1 + \gamma_R) \quad (6)$$

$$G = \sigma_c / \gamma_R \quad (7)$$

$$t = \gamma_R / \dot{\gamma}_{ms} \quad (8)$$

$$N_1 = \sigma_c \cdot \gamma_R \quad (9)$$

where

$\eta_a$  = apparent viscosity, poise

$\eta_e$  = effective viscosity, poise (empirical relationship)

$\sigma_c$  = corrected shear stress, dynes/cm<sup>2</sup>

<sup>2</sup>Philippoff, W., and Gaskins, F. H. The Capillary Experiment in Rheology. Transactions of the Society of Rheology II, 263-284 (1958).

$\dot{\gamma}_{ms}$  = selected shear rate,  $\text{sec}^{-1}$

G = shear modulus,  $\text{dynes/cm}^2$

$\gamma_R$  = recoverable shear, dimensionless

t = relaxation time, seconds

$N_1$  = normal stress,  $\text{dynes/cm}^2$

Five double logarithmic plots of the computed viscoelastic properties are drawn.

Plot one, the flow curve, is selected shear rate versus corrected shear stress. The inverse slope at any point is the apparent viscosity.

Plot two, the viscosity-rate curve, shows the apparent viscosity versus the selected shear rate.

Plot three, the deformation curve, is recoverable shear versus the corrected shear stress. The inverse slope at any point is the shear modulus.

Plot four, the deformation-rate curve, shows recoverable shear versus selected shear rates. The slope at any point equals the relaxation time.

Plot five, the normal stress-rate curve, is the normal stress versus the selected rates.

Appendix B also contains samples of these five plots for a viscoelastic fluid combining all the capillary groups (figure B-2).

#### IV. OPERATING INSTRUCTIONS.

A deck of Hollerith cards containing all of the FORTRAN V statements and control cards is necessary for operation of the program and assigning plot tapes. The Univac 1108 uses the EXEC VIII control language. The number and format of control cards may vary somewhat in different computer installations; therefore, they are not considered in this report. Consult your computer information directorate for appropriate control cards.

#### V. CONCLUSIONS.

This computer program reduces significantly the time and costs for data reduction and evaluation for experiments conducted with the HPCV. Sixteen man-hours are saved for each short-series experiment and approximately 40 man-hours are saved for each long-series experiment. A step-to-step procedure for manual data reduction is presented in appendix C.

Additional benefits are greater accuracy and minimization of errors inherent in manual data reduction. The curve-fitting technique further reduces errors or distortions caused by visual evaluation and manual attempts to fit curves to data points. The program provides an equation of

the best-fit curve which permits further information to be predicted accurately. Finally, clearer and more precise graphics, ready-made for inclusion in reports, are produced.

Probably the most important benefit is that erroneous data can be identified rapidly and a test-series experiment can be repeated immediately. This is an important aspect because many test fluids deteriorate in storage and are not representative of the test series if repeat experiments are delayed as was usually the case when manual data reduction was necessary.

### SELECTED REFERENCES

1. Programming CALCOMP Pen Plotters. California Computer Productions, Inc. September 1969.
2. CALCOMP Graphics Functional Software, USA FORTRAN/Scientific. California Computer Products, Inc. July 1969.
3. Wilbur, Edmund. Least Squares Program for Fitting Polynomial Curves. To be published as an ARCSL technical report. 1977.
4. The Weissenberg Rheogoniometer, Instruction Manual for Model R.18. Sangamo Controls Limited. Sussex, England.

PRECEDING PAGE BLANK-NOT FILMED

## GLOSSARY

1. Shear rate,  $\dot{\gamma}_m$ ,  $\text{sec}^{-1}$ : The deformation rate developed across the stress field; also, the irreversible shear flow of the fluid.
2. Shear stress,  $\sigma$ ,  $\text{dynes/cm}^2$ : The tangential force per unit area exerted on the fluid causing deformation, orientation, or flow.
  - a. Total shear stress,  $\sigma_t$ : Calculated value based on the tube geometry and the total pressure gradient which includes the pressure utilized in reversible elastic deformation (see equation 3 in text).
  - b. Corrected shear stress,  $\sigma_c$ : Reduced value based only on portion of pressure utilized in irreversible viscous flow.
3. Recoverable shear,  $\gamma_R$ , dimensionless: The reversible elastic shear strain developed in the fluid under shear that may be recovered in real time after cessation of flow or removal of stress.
4. Viscosity,  $\eta = \sigma/\dot{\gamma}_m$ , in poise or  $\text{dynes-sec/cm}^2$ : The resistance to flow offered by the fluid under shear.
  - a. Apparent viscosity,  $\eta_a$ : Variable function of shear rate.
  - b. Effective viscosity,  $\eta_e$ ,  $\text{dynes/cm}^2$ : An empirical term relating a fluid's viscous and elastic components -  $\eta_e = \eta_a(1 + \gamma_R)$ . Note also relaxation time definition.
5. Normal stress,  $N_1 = \sigma \cdot \gamma_R$ ,  $\text{dynes/cm}^2$ : The first normal stress functions; force perpendicular to direction of flow.
6. Shear modulus,  $G = \sigma/\gamma_R$ ,  $\text{dynes/cm}^2$ : The modulus of elasticity measured in shear (equivalent to Hooke's law).
7. Relaxation time,  $t = \eta/G = \gamma_R/\dot{\gamma}_m$ ,  $\text{sec}$ : The time required for a strained or sheared material to recover after stress removal (also called retardation time).
8. Newtonian fluid: Viscosity is a constant, independent of shear rate.
9. Non-Newtonian fluid: Viscosity is a variable function of shear rate.
10. Viscoelastic fluid: Material under shear demonstrates viscous response (irreversible flow) and elastic response (reversible storage).
11. Inelastic fluid: Material under shear demonstrates no elastic response.


### PROGRAM VARIABLES


<u>VARIABLE</u>	<u>DESCRIPTION</u>
1. GROUP	A, B, C, D, E, F
2. TL	Tube lengths
3. TR	Tube radii
4. TK	Constant ratio (2 $\ell$ /r)
5. DK	Constant $\left(\frac{4}{\pi r^3}\right)$
6. IG	Number of groups
7. IGN	Group number
8. IT or I	Number of tubes
9. ITUB or J	Tube number
10. NP	Number of pressure readings
11. PRESS	Pressure readings
12. KOUNT	Number of volume readings
13. VOL	Volume levels recorded
14. T	Time
15. SIGMA	Slope of VOL versus T readings
16. B	Y-intercept of VOL versus T data
17. TAU	Shear stress
18. D	Shear rate
19. VIS	Viscosity
20. DM	Maximum D for each tube
21. DMX	Minimum maximum D for each group
22. DN	Minimum D for each tube
23. DMN	Maximum minimum D for each group
24. R	Maximum D minus minimum D
25. PM	Midpoint of R


<u>VARIABLE</u>	<u>DESCRIPTION</u>
26. SD	Selected D
27. SIGMAT	Slope of D versus TAU data
28. TAUT	Shear stress for each SD
29. DP	Pressure for each TAUT
30. TKS	TK/2
31. TAUC	Slope DP versus $\ell/r$ data
32. RSC	Recoverable shear
33. VISA	Apparent viscosity
34. G	Shear modulus
35. RT	Relaxation time
36. BC	Y-intercept of DP versus TKS
37. NN	Pressure number (NP)
38. BT	Y-intercept of D versus TAU
39. NM	Tube number (IT)
40. PN	Normal stress
41. D2 or DS	D values for plot
42. VIS2 or VISS	VIS values for plot
43. TAU2 or TAUS	TAU values for plot
44. SD2	SD values for plot
45. TAUC2	TAUC values for plot
46. VISA2	VISA values for plot
47. RSC1	RSC values for plot
48. PN2	PN values for plot
49. XPAGE	X-values for plot
50. YPAGE	Y-values for plot
51. FPR	Predicted Y-axis values
52. EV	Effective viscosity

APPENDIX A

FLOW CHART FOR SHORT-SERIES PHASE

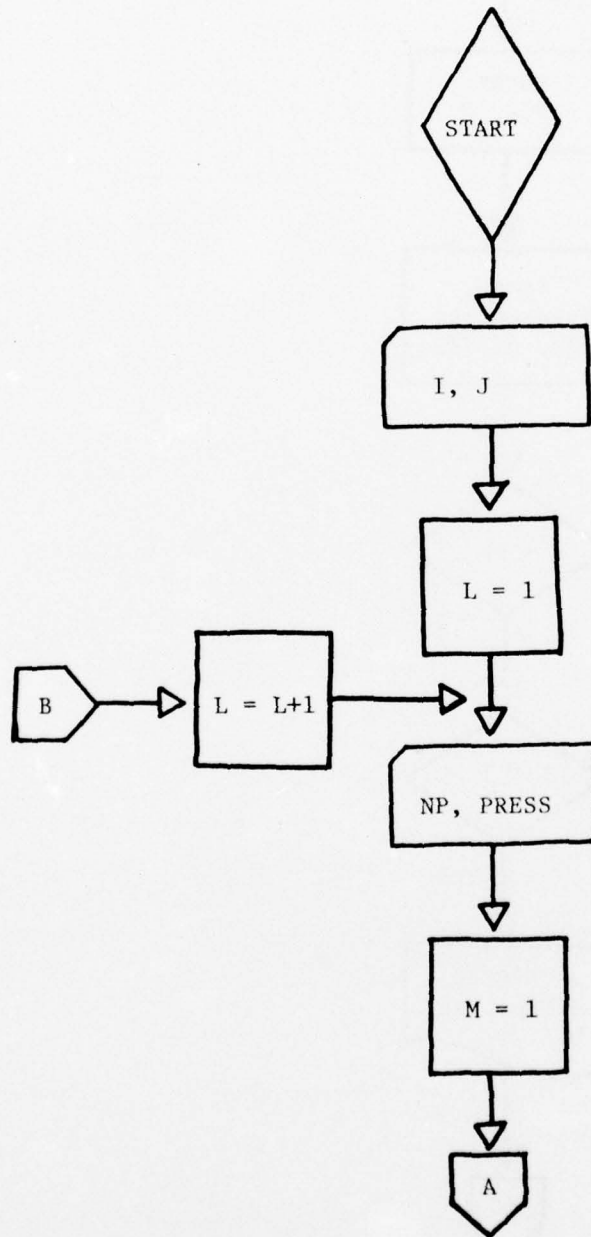

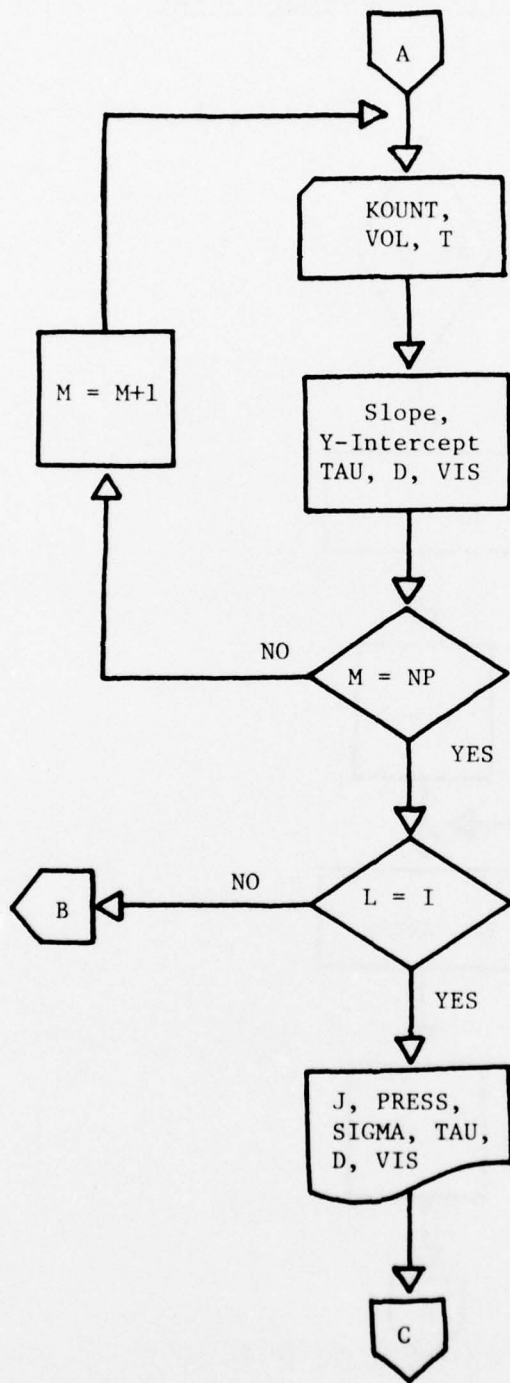

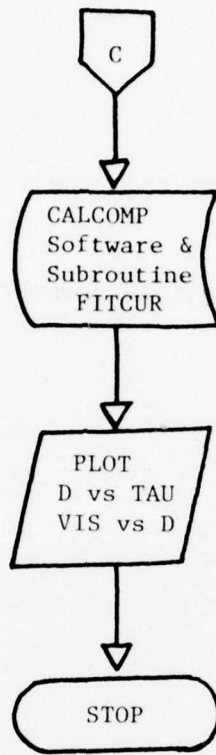

TNG,5316J065212,RFSEAR,2,100

LARRYW.  
6-02/04-12:37

RRYW.

RYW.

ISCAP, .VISCAP  
2/04/77-12:37:42 (,0) SAMPLE LISTING FOR SHORT SERIES

OGRAM

USED: CODE(1) 000725; DATA(0) 015534; BLANK COMMON(2) 000000

L REFERENCES (BLOCK, NAME)

PLOTS  
PLOT  
FACTOR  
LGAYS  
LGLIN  
SYMBOL  
FITCUR  
SMOOT  
NINTR\$  
NRDU\$  
NIO1\$  
NIO2\$  
NWDU\$  
ALOG10  
NSTOP\$

ASSIGNMENT (BLOCK, TYPE, RELATIVE LOCATION, NAME)

015361 1F	0000	015364 100F	0000	015416 104F	0001	000013 1'
000076 142G	0001	000113 156G	0000	015362 2F	0001	000422 2'
000476 202L	0001	000511 203L	0001	000515 204L	0001	000223 2'
000243 221G	0000	015363 3F	0001	000622 300L	0001	000664 3'
000712 303L	0001	000716 304L	0001	000046 5L	0001	000207 5'
007607 B	0000 R	011413 D	0000 R	000055 DK	0000 R	013524 D'
015336 I	0000 I	015360 ID	0000 I	000074 J	0000 I	015341 J'
015344 KOUNT	0000 I	015340 L	0000 I	015343 M	0000 I	015345 M'
015357 NM	0000 I	013217 NN	0000 I	015342 NP	0000 I	015356 N'
006705 SIGMA	0000 R	015346 ST	0000 R	015347 STS	0000 R	015352 S'
015351 SVS	0000 R	003751 T	0000 R	010511 TAU	0000 R	013236 T'
000000 TL	0000 R	015354 TM	0000 R	000017 TR	0000 R	015355 T'
014012 VISS	0000 R	001015 VOL	0000 R	014566 XPAGE	0000 R	015052 X'

1\* DIMENSION TL(15),TR(15),TK(15),DK(15),J(15),PRESS(15,30),VOL(30,50)  
2\* C),T(30,50),SIGMA(15,30),R(15,30),TAU(15,30),D(15,30),VIS(15,30),NN

```

3*      C(15),TAUS(182),DS(182),VTSS(182),FPP(182)
4*      DIMENSION XPAGE(180),YPAGE(180)
5*      DATA TL/2.5794,0.5959,3.8308,0.8428,5.0759,1.5138,5.0582,1.6515,5.
6*      C0853,1.1392,5.0851,0.0805,0.2182,0.3896,0.4671/
7*      DATA TR/0.0103,0.0103,0.0185,0.0185,0.0820,0.0310,0.1610,0.0820,0.
8*      C0310,0.1610,0.2600,0.0103,0.0185,0.0310,0.0820/
9*      DATA TK/138.,597.,167.,751.,554.,702.,1095.,1710.,209.5,4870.,1760
10*     C.,4410.,2920.,2740.,6050./
11*     DATA DK/1.17E+6,1.17E+6,2.01E+5,2.01E+5,2.3E+3,4.26E+4,3.05E+2,2.3
12*     CE+3,4.26E+4,3.05E+2,7.22E+1,1.17E+6,2.01E+5,4.26E+4,2.3E+3/
13*     READ(5,1) I,(J(K),K=1,I)
14*     1 FORMAT( )
15*     L=1
16*     6 JK=J(L)
17*     READ(5,2) NP,(PRESS(JK,K),K=1,NP)
18*     2 FORMAT( )
19*     M=1
20*     5 READ(5,3) KOUNT,(VOL(M,N),T(M,N),N=1,KOUNT)
21*     3 FORMAT( )
22*     30 ST=0.
23*     STS=0.
24*     SV=0.
25*     SVS=0.
26*     STV=0.
27*     DO 10 NK=1,KOUNT
28*     ST=ST+T(M,NK)
29*     STS=STS+T(M,NK)**2.
30*     SV=SV+VOL(M,NK)
31*     SVS=SVS+VOL(M,NK)**2.
32*     STV=STV+T(M,NK)*VOL(M,NK)
33*     10 CONTINUE
34*     SIGMA(L,M)=(STV-((ST*SV)/KOUNT))/(STS-(ST**2.)/KOUNT)
35*     TM=ST/KOUNT
36*     TV=SV/KOUNT
37*     B(L,M)=TV-SIGMA(L,M)*TM
38*     TAU(L,M)=PRESS(JK,M)*TK(JK)
39*     D(L,M)=SIGMA(L,M)*DK(JK)
40*     VIS(L,M)=TAU(L,M)/D(L,M)
41*     IF(M.EQ.NP) GO TO 22
42*     M=M+1
43*     GO TO 5
44*     22 NN(JK)=NP
45*     IF(L.EQ.I) GO TO 50
46*     L=L+1
47*     GO TO 6
48*     50 WRITE(6,100)
49*     100 FORMAT('1',, CAPILLARY PRESSURE SLOPE SHEAR STRESS SHEAR
50*     CRATE VISCOSITY',, NUMBER DST CC/SEC DYNES/CM2
51*     C 1/SEC POISE')
52*     NXY=1
53*     DO 102 K=1,I
54*     JK=J(K)
55*     NP=NN(JK)
56*     DO 103 NM=1,NP
57*     WRITE(6,104) J(K),PRESS(JK,NM),SIGMA(K,NM),TAU(K,NM),D(K,NM),VIS(K
58*     C,NM)
59*     104 FORMAT(6X,I2,6X,F7.2,4X,F5.3,4X,F9.2,6X,F9.2,3X,F9.4)

```

```

60*      TAUS(NXY)=TAU(K,NM)
61*      DS(NXY)=D(K,NM)
62*      VISS(NXY)=VTS(K,NM)
63*      NXY=NXY+1
64*      103 CONTINUE
65*      102 CONTINUE
66*      NXY=NXY-1
67*      500 CALL PLOTS(TD,TD,8)
68*      CALL PLOT(0.0,-36.0,-3)
69*      CALL PLOT(0.0,2.0,-3)
70*      CALL FACTOR(0.75)
71*      TAUS(NXY+1)=1.0
72*      TAUS(NXY+2)=.50
73*      DS(NXY+1)=1.0
74*      DS(NXY+2)=.50
75*      CALL LGAXS(0.0,0.0,29HSHEAR STRESS-DYNES/CM-SQUARED,-20,12.0,0.0,
76*      (1.0,.50)
77*      CALL LGAXS(0.0,0.0,29HSHEAR RATE-RECIPROCAL SECONDS,20,12.0,90.0,
78*      (1.0,.50)
79*      CALL LGLIN(TAUS,DS,NXY,1,-1,11,0)
80*      CALL SYMBOL(3.0,12.0,.21,27HSHEAR RATE VS. SHEAR STRESS,0.0,27)
81*      CALL FITCUR(TAUS,DS,NXY,FPR)
82*      FPR(NXY+1)=1.0
83*      FPR(NXY+2)=.50
84*      CALL LGLIN(TAUS,FPR,NXY,1,-1,2,0)
85*      N=1
86*      200 XPAGE(N)=(ALOG10(TAUS(N)))/TAUS(NXY+2)
87*      YPAGE(N)=(ALOG10(FPR(N)))/DS(NXY+2)
88*      IF(N.EQ.1) GO TO 201
89*      IF(N.EQ.NXY) GO TO 202
90*      CALL SMOOT(XPAGE(N),YPAGE(N),-2)
91*      GO TO 203
92*      201 CALL SMOOT(XPAGE(N),YPAGE(N),0)
93*      GO TO 203
94*      202 CALL SMOOT(XPAGE(N),YPAGE(N),-24)
95*      GO TO 204
96*      203 N=N+1
97*      GO TO 200
98*      204 CALL PLOT(0.0,16.0,-3)
99*      VISS(NXY+1)=.01
00*      VISS(NXY+2)=.50
01*      CALL LGAXS(0.0,0.0,29HSHEAR RATE-RECIPROCAL SECONDS,-20,12.0,0.0,
02*      (1.0,.50)
03*      CALL LGAXS(0.0,0.0,15HVISCOSITY-POISE,15,12.0,90.0,.01,.50)
04*      CALL LGLIN(DS,VISS,NXY,1,-1,11,0)
05*      CALL SYMBOL(3.0,12.0,.21,24HVISCOSITY VS. SHEAR RATE,0.0,24)
06*      CALL FITCUR(DS,VISS,NXY,FPR)
07*      FPR(NXY+1)=.01
08*      FPR(NXY+2)=.50
09*      CALL LGLIN(DS,FPR,NXY,1,-1,2,0)
10*      N=1
11*      300 XPAGE(N)=(ALOG10(DS(N)))/DS(NXY+2)
12*      YPAGE(N)=((ALOG10(FPR(N)))/VISS(NXY+2))+4.
13*      IF(N.EQ.1) GO TO 301
14*      IF(N.EQ.NXY) GO TO 302
15*      CALL SMOOT(XPAGE(N),YPAGE(N),-2)
16*      GO TO 303

```

```

17*      301 CALL SMOOT(XPAGE(N),YPAGE(N),0)
18*      GO TO 303
19*      302 CALL SMOOT(XPAGE(N),YPAGE(N),-24)
20*      GO TO 304
21*      303 N=N+1
22*      GO TO 300
23*      304 CALL PLOT(0.0,0.0,999)
24*      60 END

```

OF COMPILATION: NO DIAGNOSTICS.

TCUR,.FTCUR  
2/04/77-12:37:48 (.0)

USED: CODE(1) 002656; DATA(0) 002615; BLANK COMMON(2) 000000

OF COMPILATION: NO DIAGNOSTICS.

71-3 02/04/77 12:37:58  
IN TPF.  
LIB MISD\*PLOT.

MITS 001000 023250 2385 IRANK WORDS DECIMAL  
040000 065537 11104 DRANK WORDS DECIMAL  
ADDRESS 022324

SEGMENT	\$MAIN\$	001000	023250	040000	065537
-E2	\$(1)	001000	001022		
-E3	\$(1)	001023	001106	\$(2)	040000 040011
E2	\$(1)	001107	001314	\$(2)	040012 040031
IX	\$(1)	001315	001445	\$(2)	040032 040107
-E2	\$(1)	001446	001730	\$(2)	040110 040123
E2	\$(1)	001731	001753		
ER	\$(1)	001754	002175	\$(2)	040124 040220
-E3	\$(1)	002176	002433	\$(2)	040221 040246
				\$(2)	040247 042474
ER	\$(1)	002434	002460		
-E3	\$(1)	002461	002515		
ER	\$(1)	002516	002551		
ER	\$(1)	002552	002663		
-E3	\$(1)	002664	003061	\$(2)	042475 042546
-E3	\$(1)	003062	003356	\$(2)	042547 042552
X	\$(1)	003357	005072	\$(2)	042553 042614
IX	\$(1)	005073	005314	\$(2)	042615 042764
IX	\$(1)	005315	005551	\$(2)	042765 042765
IX	\$(1)	005552	007162	\$(2)	042766 043021
E3	\$(1)	007163	010045	\$(2)	043022 043076

## SHORT SERIES

### INPUT

Card 1            I – Number of capillaries  
                      J – Capillary number

Card 2            NP – Number of pressures  
                      PRESS – Pressure levels, psi

Card 3            KOUNT – Number of volume-time data points  
                      VOL – Volume, cm<sup>3</sup>  
                      T – Time, sec

### OUTPUT

J – Capillary number  
PRESS – Pressure, psi  
SIGMA – Slope of volumetric rate curve  
TAU – Shear stress, dynes/cm<sup>2</sup>  
D – Shear rate, sec<sup>-1</sup>  
VIS – Viscosity, poise

CAPILLARY NUMBER	PRESSURE PSI	SLOPE CC/SEC	SAMPLE OUTPUT		SHEAR RATE 1/SEC	VISCOSITY POISE
			SHEAR STRESS DYNES/CM2			
1	14.00	.001	2056.20		1388.19	1.4812
1	28.75	.002	3967.50		1950.00	2.0346
1	50.50	.003	6969.00		2941.72	2.3690
1	70.00	.004	9660.00		4420.00	2.1855
1	97.50	.006	13455.00		6474.00	2.0783
1	130.00	.008	17940.00		9234.04	1.9428
1	189.00	.012	26082.00		14129.14	1.8460
1	305.00	.019	42090.00		22285.72	1.8887
1	437.00	.028	60306.00		33294.86	1.8113
1	605.00	.038	83490.00		44905.72	1.8592
1	760.00	.049	104880.00		56761.72	1.8477
1	933.00	.060	128754.00		70356.00	1.8300
3	4.00	.001	668.00		268.00	2.4925
3	7.20	.002	1202.40		320.64	3.7500
3	13.70	.003	2287.90		674.79	3.3206
3	21.00	.005	3507.00		1048.07	3.3461
3	28.75	.007	4801.25		1424.23	3.3711
3	46.00	.012	7682.00		2498.14	3.0751
3	65.00	.019	10955.00		3820.91	2.8409
3	86.00	.027	14362.00		5388.71	2.6652
3	112.00	.037	18794.00		7504.00	2.4925
3	145.00	.051	24215.00		10194.86	2.3752
3	190.00	.069	31730.00		13818.75	2.2962
3	285.00	.107	47595.00		21523.01	2.2114
2	415.00	.157	69305.00		31487.12	2.2011
3	598.00	.231	99866.00		46513.46	2.1470
3	750.00	.306	125250.00		61402.37	2.0368
3	915.00	.380	152805.00		76380.00	2.0006
9	2.50	.003	523.75		110.76	4.7287
9	4.00	.004	838.00		150.04	5.2691
9	6.00	.006	1257.00		264.12	4.7592
9	9.00	.010	1885.50		428.84	4.3967
9	13.00	.017	2723.50		707.16	3.8513
9	19.00	.026	3980.50		1099.08	3.6217
9	24.50	.035	5132.75		1479.64	3.4689
9	29.00	.042	6075.50		1797.72	3.3796
9	46.00	.069	9637.00		2930.40	3.2786
9	60.00	.100	12570.00		4240.04	2.9640
9	80.00	.142	16760.00		6066.02	2.7629
9	115.00	.226	24092.50		9622.84	2.5037
9	132.00	.260	27654.00		11091.12	2.4933
9	154.00	.306	32263.00		13016.67	2.4786
9	182.00	.367	38129.00		15620.00	2.4410
9	250.00	.500	52375.00		21300.00	2.4589
5	.25	.009	138.50		21.59	6.4137
5	.38	.013	207.75		30.61	6.7869
5	.50	.019	277.00		42.81	6.4704
5	.75	.027	415.50		61.33	6.7745
5	1.00	.038	554.00		87.53	6.3294
5	1.50	.058	831.00		133.89	6.2065
5	2.00	.080	1108.00		183.91	6.0246
5	3.00	.130	1662.00		298.28	5.5710
5	4.50	.210	2493.00		482.07	5.1714
A 5	6.00	.307	3324.00		707.04	4.7913
5	8.00	.432	4432.00		994.27	4.4575

BEST AVAILABLE COPY

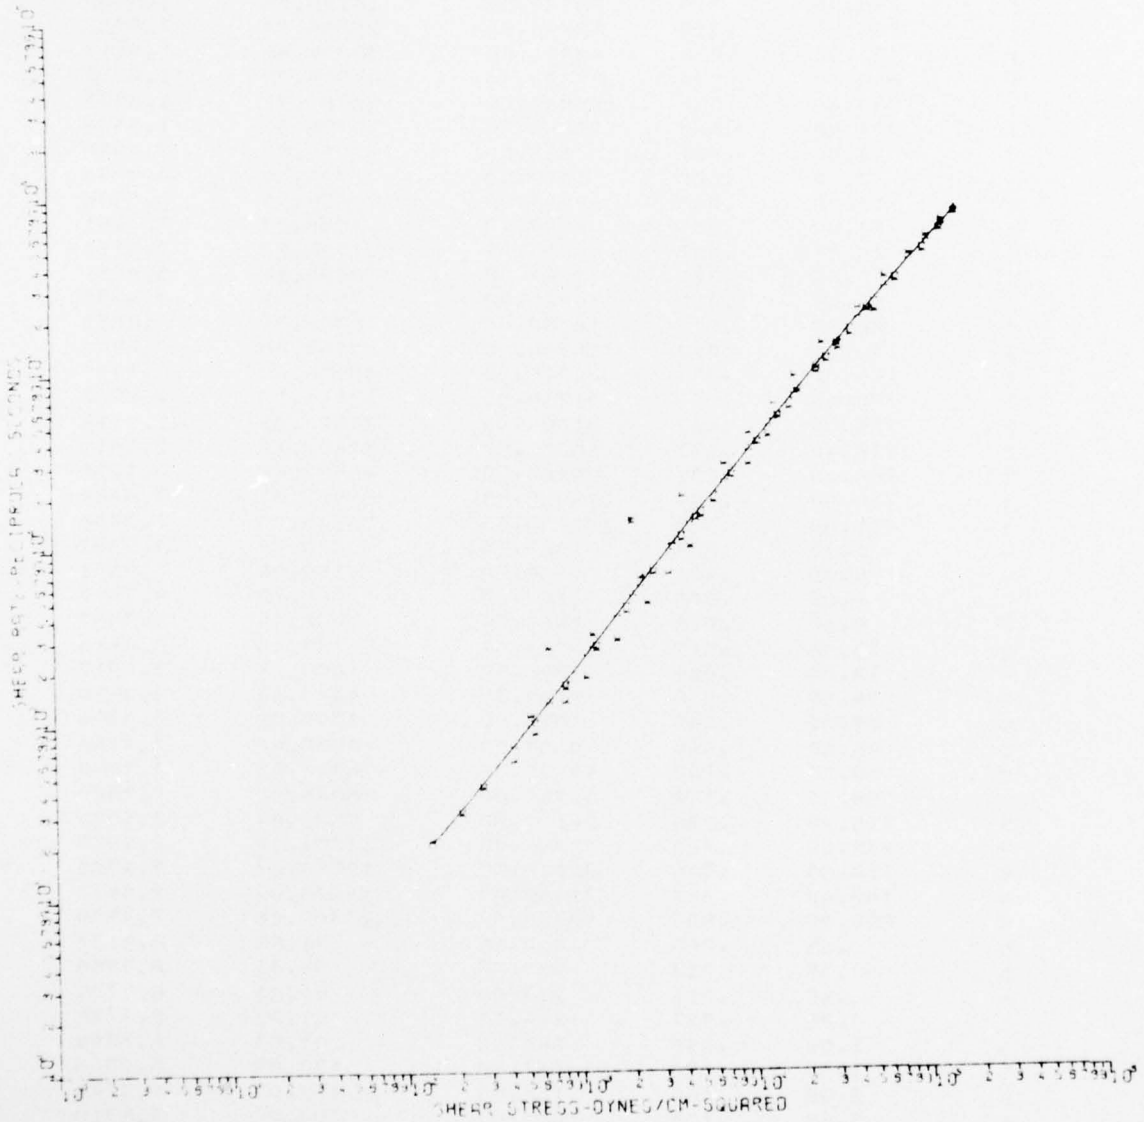


Figure A-1. Sample of Basic Flow Curve (Shear Rate Versus Shear Stress)

VISCOSITY VS. SHEAR RATE


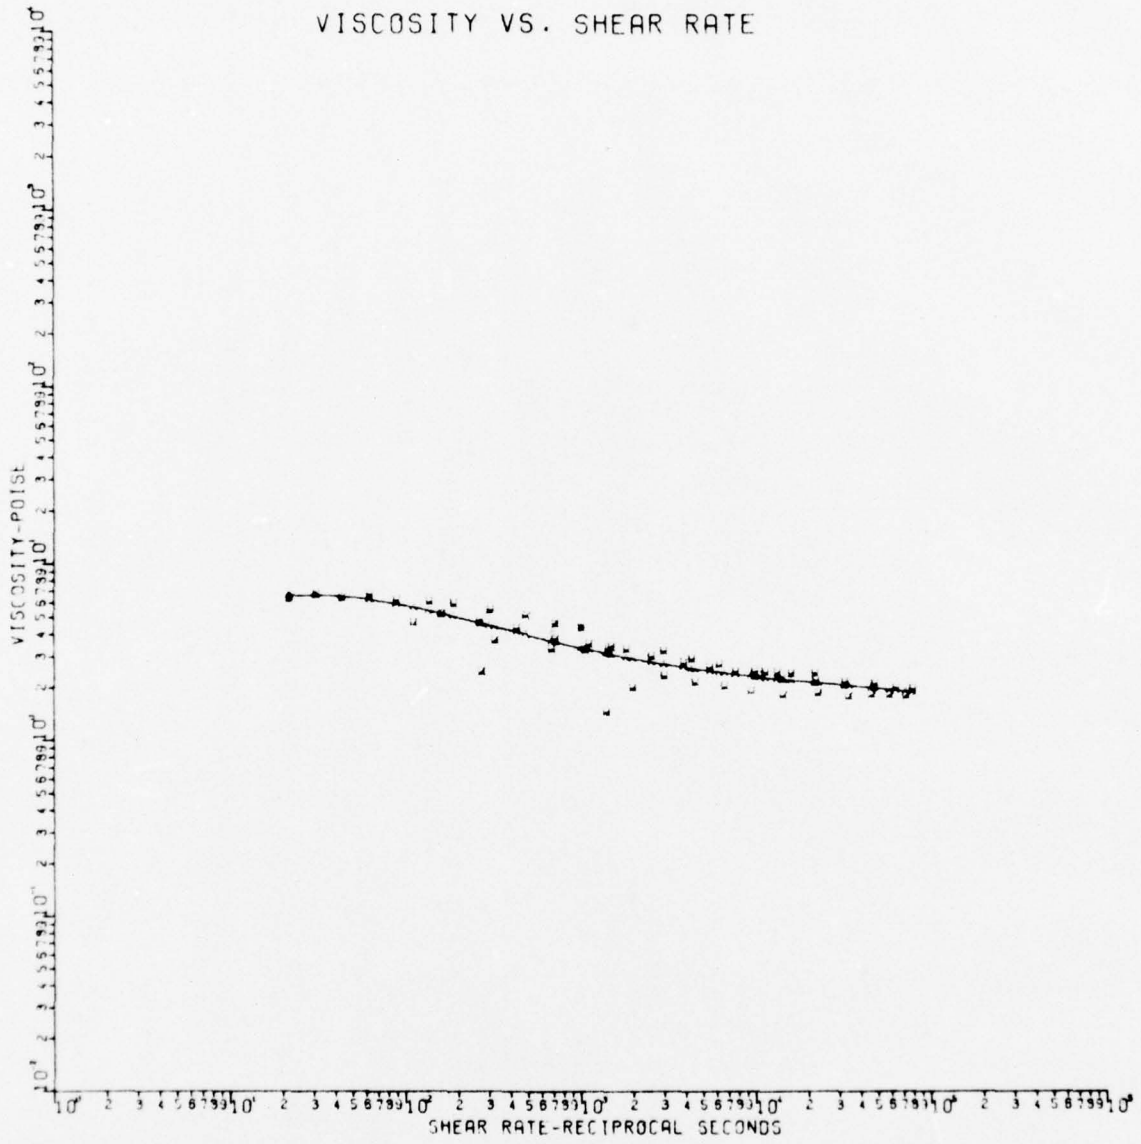



Figure A-2. Sample of Basic Flow Curve (Viscosity Versus Shear Rate)


APPENDIX B


FLOW CHART FOR LONG-SERIES PHASE

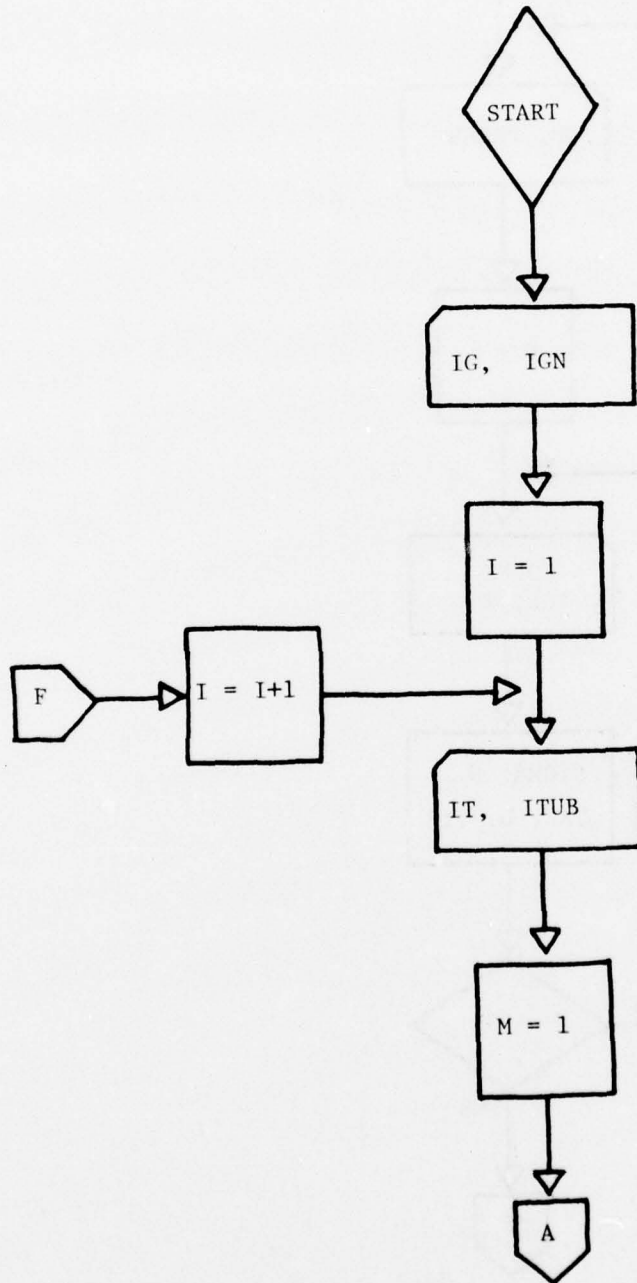


PRECEDING PAGE BLANK-NOT FILMED

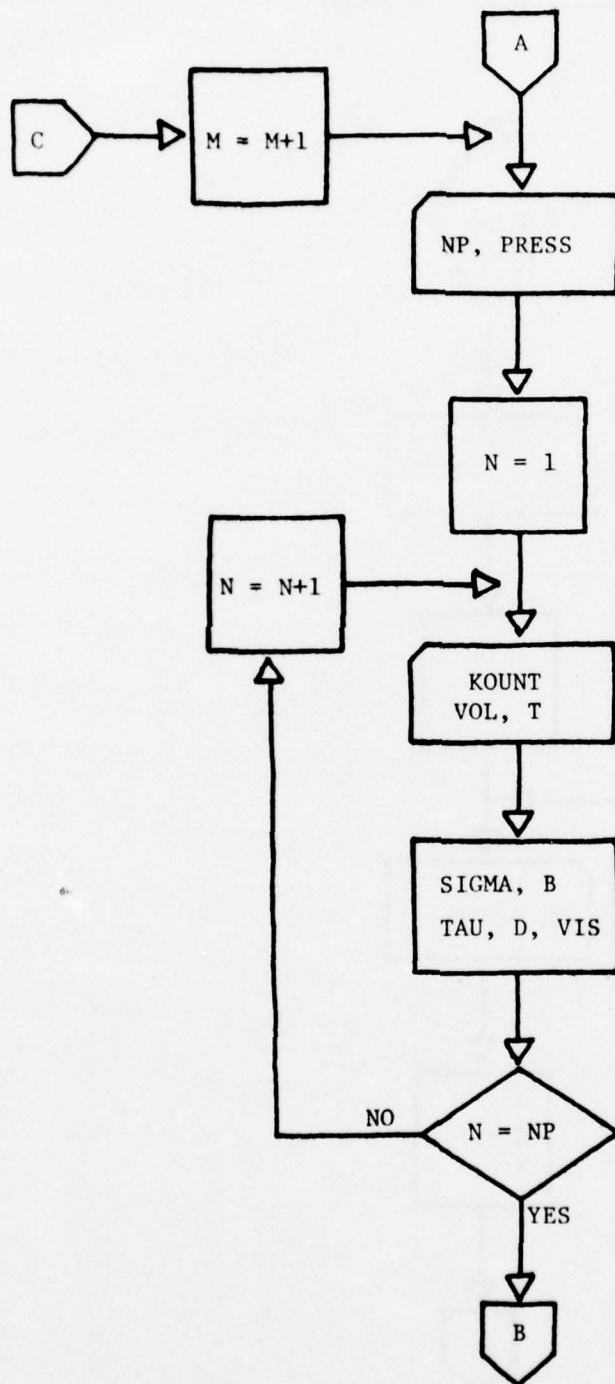

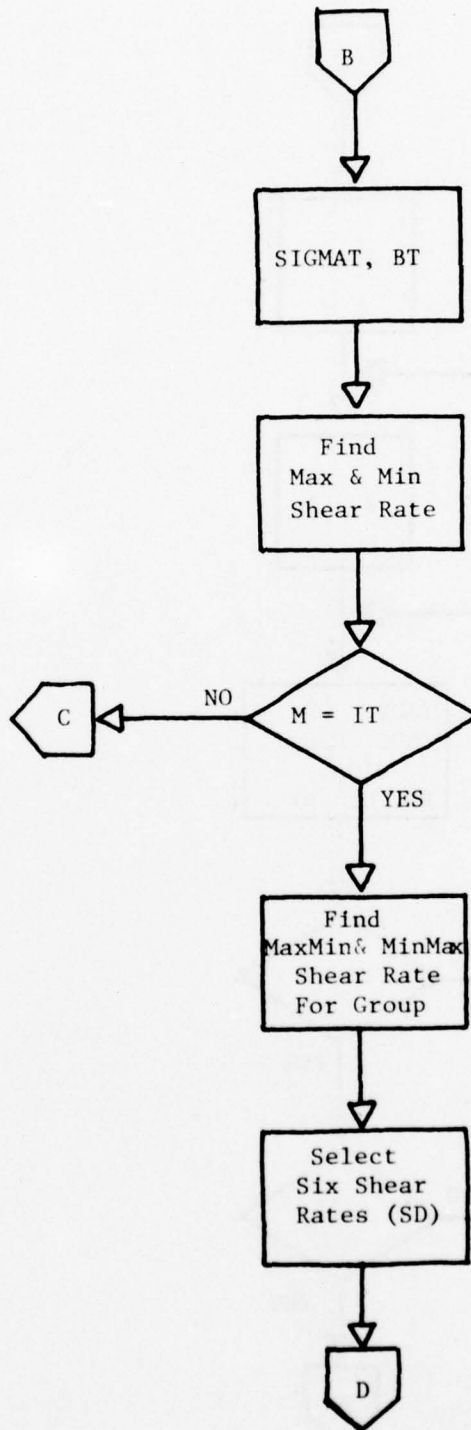

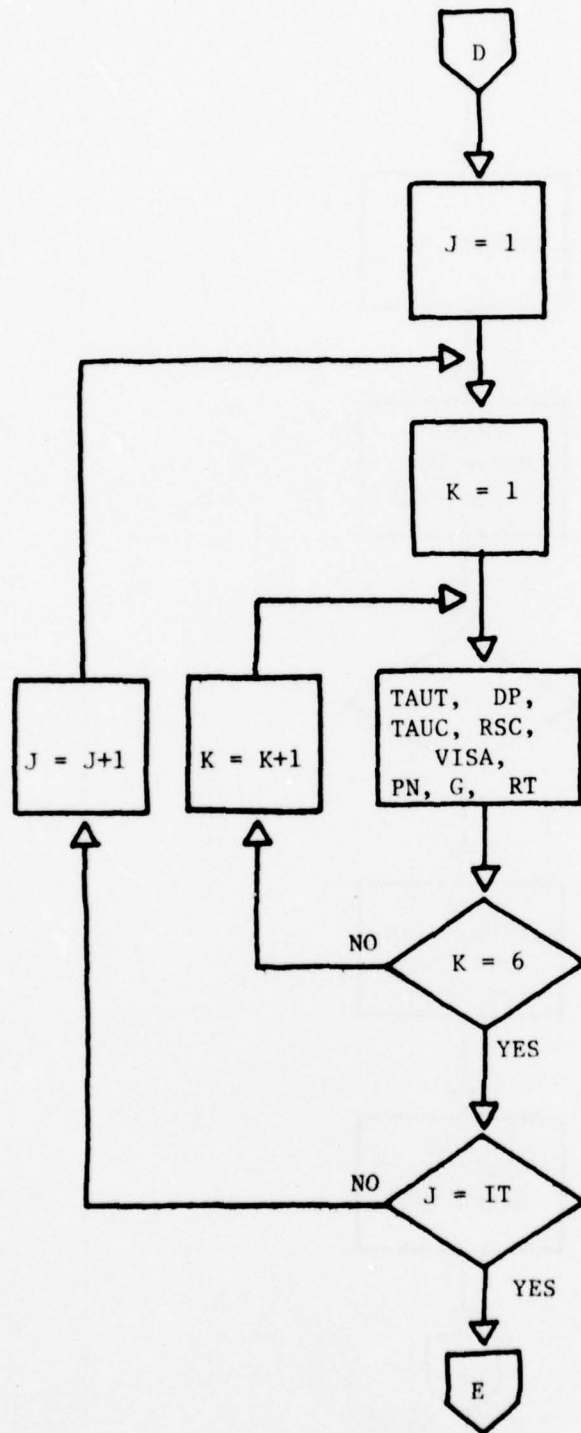

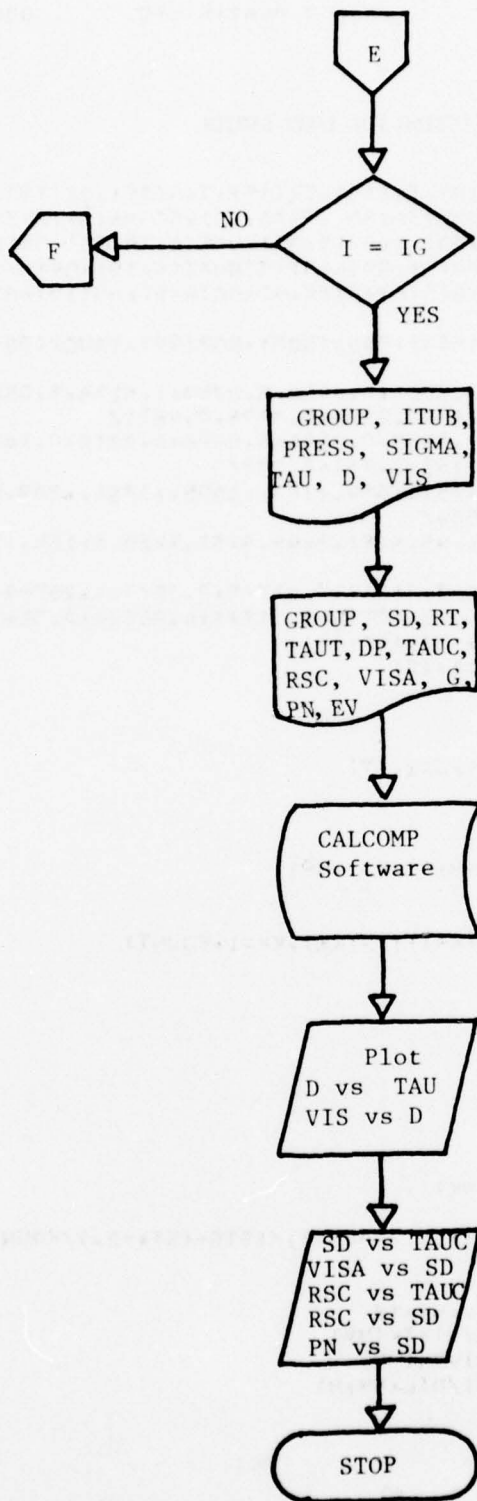

R 062412 TTKS  
R 057502 VIS2

0000 R 062376 TV  
0000 R 006531 VOL

0000 R 046715 VTS

0000 R 056007 VI

SAMPLE LISTING FOR LONG SERIES

```
1* DIMENSION TAUT(6,15,6)
2* DIMENSION GROUP(6),TL(15),TR(15),TK(15),TKS(15),DK(15),TGN(6),ITUR
3* C(6,15),PRESS(6,15,30),VOL(30,50),T(30,50),SIGMA(6,15,30),R(6,15,30
4* C),RS(6,15,30),TAU(6,15,30),D(6,15,30),VTS(6,15,30),DM(6,15),DMX(6
5* C),DN(6,15),DMN(6),R(6),PM(6),SD(6,6),SIGMAT(6,15),DP(6,15,6),TAUC(6
6* C),RSC(6,6),VISA(6,6),G(6,6),RT(6,6),RC(6,6),NN(15),BT(6,15),NM(6
7* C),PN(6,6),EV(6,6)
8* DIMENSION D2(500),VIS2(500),TAU2(500),SD2(90),TAUC2(90),VISA2(90),
9* CRSC2(90),PN2(90)
10* DATA TL/2.5794,0.5959,3.8308,0.8428,5.0759,1.5138,5.0582,1.6515,5.
11* 0853,1.1392,5.0851,0.0905,0.2182,0.3896,0.4671/
12* DATA TR/0.0103,0.0103,0.0185,0.0185,0.0820,0.0310,0.161,0.082,0.03
13* C1,0.161,0.26,0.0103,0.0185,0.031,0.082/
14* DATA TK/138.,597.,167.,751.,554.,702.,1095.,1710.,209.5,4870.,1760
15* C.,4410.,2920.,2740.,6050./
16* DATA TKS/250.,57.9,207.,45.6,61.9,48.8,31.4,20.1,164.,7.08,19.6,7.
17* 082,11.8,12.6,5.7/
18* DATA DK/1.17E+6,1.17E+6,2.01E+5,2.01E+5,2.3E+3,4.26E+4,3.05E+2,2.3
19* CE+3,4.26E+4,3.05E+2,72.2,1.17E+6,2.01E+5,4.26E+4,2.3E+3/
20* DATA GROUP/'A','B','C','D','E','F'/
21* READ(5,1) IG,(IGN(J),J=1,IG)
22* 1 FORMAT( )
23* I=1
24* 65 L=IGN(I)
25* READ(5,2) IT,(ITUB(L,J),J=1,IT)
26* 2 FORMAT( )
27* M=1
28* 8 MM=ITUB(L,M)
29* READ(5,3) NP,(PRESS(L,MM,K),K=1,NP)
30* 3 FORMAT( )
31* N=1
32* 6 READ(5,4) KOUNT,(VOL(N,KK),T(N,KK),KK=1,KOUNT)
33* 4 FORMAT( )
34* ST=0.
35* STS=0.
36* SV=0.
37* STV=0.
38* DO 10 NK=1,KOUNT
39* ST=ST+T(N,NK)
40* STS=STS+T(N,NK)**2.
41* SV=SV+VOL(N,NK)
42* STV=STV+T(N,NK)*VOL(N,NK)
43* 10 CONTINUE
44* SIGMA(L,MM,N)=(STV-((ST*SV)/KOUNT))/(STS-(ST**2.)/KOUNT)
45* TM=ST/KOUNT
46* TV=SV/KOUNT
47* B(L,MM,N)=TV-SIGMA(L,MM,N)*TM
48* TAU(L,MM,N)=PRESS(L,MM,N)*TK(MM)
49* D(L,MM,N)=SIGMA(L,MM,N)*DK(MM)
50* VIS(L,MM,N)=TAU(L,MM,N)/D(L,MM,N)
```

```

52*         IF(N.EQ.NP) GO TO 5
53*         N=N+1
54*         GO TO 6
55*     5 NN(MM)=NP
56*         SS=0.
57*         STAU=0.
58*         STAU5=0.
59*         SDTAU=0.
60*         DO 21 NX=1,NP
61*         SS=SS+D(L,MM,NX)
62*         STAU=STAU+TAU(L,MM,NX)
63*         STAU5=STAU+TAU(L,MM,NX)**2.
64*         SDTAU=SDTAU+D(L,MM,NX)*TAU(L,MM,NX)
65*     21 CONTINUE
66*         SIGMAT(L,MM)=(SDTAU-((SS*STAU)/NP))/((STAU5-(STAU**2.)/NP)
67*         TTAU=STAU/NP
68*         TD=SS/NP
69*         BT(L,MM)=TD-SIGMAT(L,MM)*TTAU
70*         DM(L,MM)=0.
71*         DO 20 J=1,NP
72*     20 IF(D(L,MM,J).GT.DM(L,MM)) DM(L,MM)=D(L,MM,J)
73*         DN(L,MM)=1000000.
74*         DO 22 J=1,NP
75*     22 IF(D(L,MM,J).LT.DN(L,MM)) DN(L,MM)=D(L,MM,J)
76*         IF(M.EQ.IT) GO TO 7
77*         M=M+1
78*         GO TO 8
79*     7 NM(L)=IT
80*         DMX(L)=1000000.
81*         DO 23 J=1,IT
82*         MM=ITUB(L,J)
83*     23 IF(DM(L,MM).LT.DMX(L)) DMX(L)=DM(L,MM)
84*         DMN(L)=0.
85*         DO 24 J=1,IT
86*         MM=ITUB(L,J)
87*     24 IF(DN(L,MM).GT.DMN(L)) DMN(L)=DN(L,MM)
88*         R(L)=DMX(L)-DMN(L)
89*         PM(L)=R(L)/2.
90*         SD(L,1)=DMN(L)
91*         SD(L,2)=DMN(L)+.2*R(L)
92*         SD(L,3)=DMN(L)+.4*R(L)
93*         SD(L,4)=DMN(L)+.6*R(L)
94*         SD(L,5)=DMN(L)+.8*R(L)
95*         SD(L,6)=DMX(L)
96*         DO 25 J=1,IT
97*         MM=ITUB(L,J)
98*         DO 26 K=1,6
99*         TAU(L,MM,K)=(SD(L,K)-BT(L,MM))/SIGMAT(L,MM)
100*        DP(L,MM,K)=2.*TKS(MM)*TAU(L,MM,K)
101*     26 CONTINUE
102*     25 CONTINUE
103*         K=1
104*     55 STKS=0.
105*         STKSS=0.
106*         SDP=0.
107*         STKSDP=0.
108*         DO 31 J=1,IT

```

```

109*      MM=ITUB(L,J)
110*      STKS=STKS+TKS(MM)
111*      STKSS=STKSS+TKS(MM)**2.
112*      SDP=SDP+DP(L,MM,K)
113*      STKSDP=STKSDP+TKS(MM)*DP(L,MM,K)
114*      *1 CONTINUE
115*      TAUC(L,K)=((STKSDP-((STKS*SDP)/IT))/(STKSS-(STKS**2.)/IT))/2.
116*      TTKS=STKS/IT
117*      TDP=SDP/IT
118*      BC(L,K)=TDP-(TAUC(L,K)*TTKS)*2.
119*      RSC(L,K)=BC(L,K)/TAUC(L,K)
120*      VISA(L,K)=TAUC(L,K)/SD(L,K)
121*      PN(L,K)=TAUC(L,K)*RSC(L,K)
122*      G(L,K)=TAUC(L,K)/RSC(L,K)
123*      RT(L,K)=RSC(L,K)/SD(L,K)
124*      EV(L,K)=VISA(L,K)*(1.+RSC(L,K))
125*      IF(K.EQ.6) GO TO 50
126*      K=K+1
127*      GO TO 55
128*      50 IF(I.EQ.IG) GO TO 60
129*      I=I+1
130*      GO TO 65
131*      60 WRITE(6,100)
132*      100 FORMAT('1' , ' GROUP   CAPILLARY   PRESSURE   SLOPE   SHEAR STRESS
133*      C   SHEAR RATE   VISCOSITY'/'   NUMBER           PSI       CC/SEC
134*      C   DYNES/CM2           1/SEC           POISE')
135*      NXY=1
136*      DO 70 I=1,IG
137*      L=IGN(I)
138*      IT=NM(L)
139*      DO 71 J=1,IT
140*      MM=ITUB(L,J)
141*      NP=NN(MM)
142*      DO 72 K=1,NP
143*      WRITE(6,101) GROUP(L),ITUB(L,J),PRESS(L,MM,K),SIGMA(L,MM,K),TAU(L,
144*      CM,K),D(L,MM,K),VIS(L,MM,K)
145*      101 FORMAT(4X,A1,8X,I2,7X,F7.3,4X,F5.3,4X,F9.2,6X,F9.1,3X,F9.4)
146*      D2(NXY)=D(L,MM,K)
147*      TAU2(NXY)=TAU(L,MM,K)
148*      VIS2(NXY)=VIS(L,MM,K)
149*      NXY=NXY+1
150*      72 CONTINUE
151*      71 CONTINUE
152*      70 CONTINUE
153*      WRITE(6,102)
154*      102 FORMAT('1' , ' GROUP   SHEAR   TOTAL   APPLIED   CORRECTED   R
155*      RECOVERABLE   APPARENT   SHEAR   RELAXATION   NORMAL   EFFECTIVE
156*      C'/'   RATE   SHEAR   PRESSURE   SHEAR   SHEAR
157*      C   VISCOSITY   MODULUS   TIME   STRESS   VISCOSITY'/'
158*      C   STRESS           STRESS'/'   1/SEC
159*      C DYNES/CM2   DYNES/CM2   DYNES/CM2           POISE   DYNES/
160*      CCM2 SECONDS   DYNES/CM2   POISE')
161*      NYZ=1
162*      DO 110 I=1,IG
163*      L=IGN(I)
164*      IT=NM(L)
165*      DO 111 J=1,IT

```

```

156*      MM=ITUB(L,J)
157*      DO 112 K=1,6
158*      WRITE(6,113) GROUP(L),SD(L,K),TAUT(L,MM,K),DP(L,MM,K),TAUC(L,K),RS
159*      CC(L,K),VISA(L,K),G(L,K),RT(L,K),PN(L,K),FV(L,K)
160*      113 FORMAT(4X,A1,2X,F9.2,2X,F9.1,3X,F9.0,3X,F9.2,4X,F9.2,2X,F9.4,1X,F9
171*      C.2,1X,F9.5,4X,F9.0,4X,F9.5)
172*      SD2(NYZ)=SD(L,K)
173*      TAUC2(NYZ)=TAUC(L,K)
174*      VISA2(NYZ)=VISA(L,K)
175*      RSC2(NYZ)=RSC(L,K)
176*      PN2(NYZ)=PN(L,K)
177*      NYZ=NYZ+1
178*      112 CONTINUE
179*      111 CONTINUE
180*      110 CONTINUE
181*      NXY=NXY-1
182*      CALL PLOTS(TD,TD,9)
183*      CALL PLOT(0.0,-36.0,-3)
184*      CALL PLOT(0.0,2.0,-3)
185*      CALL FACTOR(0.75)
186*      D2(NXY+1)=1.0
187*      D2(NXY+2)=.50
188*      TAU2(NXY+1)=1.0
189*      TAU2(NXY+2)=.50
190*      CALL LGAXS(0.0,0.0,29HSHEAR STRESS-DYNES/CM-SQUARED,-29,12.0,0.0,1
191*      C.0,.50)
192*      CALL LGAXS(0.0,0.0,29HSHEAR RATE-RECTIPROCAL SECONDS,29,12.0,90.0,1
193*      C.0,.50)
194*      CALL LGLIN(TAU2,D2,NXY,1,-1,11,0)
195*      CALL SYMBOL(3.0,12.0,.21,27HSHEAR RATE VS. SHEAR STRESS,0.0,27)
196*      CALL PLOT(0.0,16.0,-3)
197*      VIS2(NXY+1)=.01
198*      VIS2(NXY+2)=.50
199*      CALL LGAXS(0.0,0.0,29HSHEAR RATE-RECTIPROCAL SECONDS,-29,12.0,0.0,1
200*      C.0,.50)
201*      CALL LGAXS(0.0,0.0,15HVISCOSITY-POISE,15,12.0,90.0,.01,.50)
202*      CALL LGLIN(D2,VIS2,NXY,1,-1,11,0)
203*      CALL SYMBOL(3.0,12.0,.21,24HVISCOSITY VS. SHEAR RATE,0.0,24)
204*      NYZ=NYZ-1
205*      WRITE(6,500) NYZ
206*      500 FORMAT(//2Y,'NYZ = ',I3)
207*      CALL PLOT(15.0,-16.0,-3)
208*      TAUC2(NYZ+1)=1.0
209*      TAUC2(NYZ+2)=1.0
210*      SD2(NYZ+1)=10.0
211*      SD2(NYZ+2)=1.0
212*      CALL LGAXS(0.0,0.0,29HSHEAR STRESS-DYNES/CM-SQUARED,-29,6.0,0.0,1.
213*      C.0,1.0)
214*      CALL LGAXS(0.0,0.0,29HSHEAR RATE-RECTIPROCAL SECONDS,29,6.0,90.0,10
215*      C.0,1.0)
216*      CALL LGLIN(TAUC2,SD2,NYZ,1,-1,11,0)
217*      CALL SYMBOL(1.0,6.0,.14,37HSHEAR RATE VS. CORRECTED SHEAR STRESS,0
218*      C.0,37)
219*      CALL SYMBOL(1.5,5.6,.07,39INVERSE SLOPE EQUALS APPARENT VISCOSITY
220*      C.0,39)
221*      CALL PLOT(0.0,8.0,-3)
222*      VISA2(NYZ+1)=.001

```

```

223*      VISA2(NYZ+2)=1.0
224*      CALL LGAXS(0.0,0.0,29HSHEAR RATE-RECTPROCAL SECONDS,-29,6.0,0.0,10
225*      C.0,1.0)
226*      CALL LGAXS(0.0,0.0,15HVISCOSITY-POISE,15,6.0,90.0,.001,1.0)
227*      CALL LGLIN(SD2,VISA2,NYZ,1,-1,11,0)
228*      CALL SYMBOL(1.0,6.0,.14,33HAPPARENT VISCOSITY VS. SHEAR RATE,0.0,3
229*      C3)
230*      CALL PLOT(0.0,8.0,-3)
231*      RSC2(NYZ+1)=1.0
232*      RSC2(NYZ+2)=1.0
233*      CALL LGAXS(0.0,0.0,29HSHEAR STRESS-DYNES/CM-SQUARED,-29,6.0,0.0,1.
234*      C0,1.0)
235*      CALL LGAXS(0.0,0.0,17HRECOVERABLE SHEAR,17,6.0,90.0,.10,1.0)
236*      CALL LGLIN(TAUC2,RSC2,NYZ,1,-1,11,0)
237*      CALL SYMBOL(1.0,6.0,.14,34HRECOVERABLE SHEAR VS. SHEAR STRESS,0.0,
238*      C34)
239*      CALL SYMBOL(1.5,5.6,.07,34HINVERSE SLOPE EQUALS SHEAR MODULUS,0.0,
240*      C34)
241*      CALL PLOT(0.0,8.0,-3)
242*      CALL LGAXS(0.0,0.0,29HSHEAR RATE-RECTPROCAL SECONDS,-29,6.0,0.0,10
243*      C.0,1.0)
244*      CALL LGAXS(0.0,0.0,17HRECOVERABLE SHEAR,17,6.0,90.0,.10,1.0)
245*      CALL LGLIN(SD2,RSC2,NYZ,1,-1,11,0)
246*      CALL SYMBOL(1.0,6.0,.14,32HRECOVERABLE SHEAR VS. SHEAR RATE,0.0,32
247*      C)
248*      CALL SYMBOL(1.5,5.6,.07,28HSLOPE EQUALS RELAXATON TIME,0.0,28)
249*      CALL PLOT(10.0,-24.0,-3)
250*      PN2(NYZ+1)=10.0
251*      PN2(NYZ+2)=1.0
252*      CALL LGAXS(0.0,0.0,29HSHEAR RATE-RECTPROCAL SECONDS,-29,6.0,0.0,10
253*      C.0,1.0)
254*      CALL LGAXS(0.0,0.0,30HNORMAL STRESS-DYNES/CM-SQUARED,30,6.0,90.0,1
255*      C0.0,1.0)
256*      CALL LGLIN(SD2,PN2,NYZ,1,-1,11,0)
257*      CALL SYMBOL(1.0,6.0,.14,28HNORMAL STRESS VS. SHEAR RATE,0.0,28)
258*      CALL PLOT(0.0,0.0,999)
259*      END

```

D OF COMPILATION: NO DIAGNOSTICS.

L71-3 01/19/77 09:54:31  
IN TPE%.  
LIB MISO\*PLOT.

```

IMITS      001000 020157      7792 IRANK WORDS DECIMAL
           040000 130117      29752 DBANK WORDS DECIMAL
ADDRESS    016306

```

```

SEGMENT $MAIN$      001000 020157      040000 130117
R-E2      $(1)      001000 001022

```

## LONG SERIES

### INPUT

Card 1 IG – Number of groups  
IGN – Group number

Card 2 IT – Number of tubes for each group  
ITUB – Tube number

Card 3 NP – Number of pressure for each tube  
PRESS – Pressure levels

Card 4 KOUNT – Number of volume-time pairs  
VOL – Volumes  
T – Time

### OUTPUT

Table 1 GROUP – Group name  
ITUB – Tube number  
PRESS – Pressure level, psi  
SIGMA – Slope of volume-time curves  
TAU – Shear stress, dynes/cm<sup>2</sup>  
D – Shear rate, sec<sup>-1</sup>  
VIS – Viscosity, poise

Table 2 GROUP – Group name  
SD – Selected shear rate, sec<sup>-1</sup>  
TAUT – Total shear stress, dynes/cm<sup>2</sup>  
DP – Applied pressure, dynes/cm<sup>2</sup>  
TAUC – Corrected shear stress, dynes/cm<sup>2</sup>

## OUTPUT

RSC – Recoverable shear

VISA – Apparent viscosity, poise

G – Shear modulus, dynes/cm<sup>2</sup>

RT – Relaxation time, seconds

PN – Normal stress, dynes/cm<sup>2</sup>

EV – Effective viscosity, poise

SAMPLE OUTPUT

GROUP	CAPILLARY NUMBER	PRESSURE PSI	SLOPE CC/SEC	SHEAR STRESS DYNES/CM2	SHEAR RATE 1/SEC	VISCOSITY POISE
F	1	12.000	.004	1656.00	5237.1	.3162
F	1	20.000	.007	2700.00	7800.0	.3538
F	1	30.000	.008	4140.00	9438.0	.4387
F	1	50.000	.012	6900.00	14040.0	.4915
F	1	80.000	.022	11040.00	25316.6	.4301
F	1	120.000	.034	16500.00	40337.1	.4105
F	1	163.000	.048	22494.00	56302.9	.3990
F	1	205.000	.063	28290.00	74100.0	.3818
F	1	250.000	.082	34500.00	95903.3	.3594
F	1	300.000	.092	41400.00	107533.2	.3800
F	1	400.000	.153	55200.00	178515.5	.3092
F	1	500.000	.224	69000.00	261940.3	.2634
F	1	600.000	.321	82800.00	375706.4	.2203
F	1	700.000	.459	96600.00	536752.6	.1800
F	2	2.000	.003	1194.00	3744.0	.3189
F	2	5.000	.007	2905.00	7722.0	.3806
F	2	9.000	.009	5373.00	10503.4	.5086
F	2	12.000	.011	7104.00	12636.0	.5670
F	2	20.000	.016	11940.00	18742.3	.6371
F	2	30.000	.022	17910.00	25896.0	.6916
F	2	50.000	.033	29850.00	39000.0	.7634
F	2	70.000	.050	41790.00	58032.0	.7201
F	2	90.000	.075	53730.00	87248.6	.6158
F	2	122.000	.096	72834.00	112706.0	.6408
F	2	151.000	.147	90147.00	172201.6	.5233
F	2	220.000	.243	131340.00	284594.6	.4615
F	2	300.000	.333	179100.00	390000.0	.4592
F	2	400.000	.511	238800.00	598295.4	.3991
F	12	1.000	.004	4410.00	4498.0	.9804
F	12	2.000	.005	8820.00	5901.4	1.4795
F	12	5.000	.007	22050.00	8112.0	2.7102
F	12	10.000	.010	44100.00	11727.9	3.7603
F	12	20.000	.017	88200.00	19812.0	4.4518
F	12	30.000	.026	158700.00	30447.9	5.2142
F	12	50.000	.040	220500.00	46644.0	4.7273
F	12	80.000	.073	352800.00	85566.0	4.1231
F	12	122.000	.144	538020.00	167951.6	3.2034
F	12	104.000	.183	723240.00	214024.4	3.3792
F	12	230.000	.335	*****	391406.2	2.5910
F	12	300.000	.459	*****	536752.6	2.4648

SAMPLE OUTPUT (cont inued)

GROUP	SHEAR RATE 1/SEC	TOTAL SHEAR STRESS DYNES/CM <sup>2</sup>	APPLIED PRESSURE DYNES/CM <sup>2</sup>	CORRECTED SHEAR STRESS DYNES/CM <sup>2</sup>	RECOVERABLE SHEAR	APPARENT VISCOSITY POISE	SHEAR MODULUS DYNES/CM <sup>2</sup>	RELAXATION TIME SECONDS	NORMAL STRESS DYNES/CM <sup>2</sup>	EFFECTIVE VISCOSITY POISE
D	3408.00	2184.0	716357.	2130.70	14.50	.6250	146.71	.00426	70946.	0.70952
D	7933.07	5422.2	1778472.	4407.09	74.50	.5600	63.70	.00880	317041.	40.53155
D	12458.13	8650.3	2840586.	6863.47	87.88	.5000	78.10	.00705	603136.	48.06205
D	16983.20	11898.5	3902701.	9229.85	96.34	.4335	95.00	.00567	800231.	52.00303
D	21508.27	15136.6	4964816.	11596.24	101.35	.3392	114.41	.00471	1175326.	55.18408
D	26033.33	18374.8	6026076.	13962.62	104.67	.2522	133.40	.00426	1461421.	56.67308
D	3408.00	3024.5	295103.	2130.70	14.52	.6250	146.71	.00426	70946.	0.70952
D	7933.07	8328.8	812892.	4407.09	74.50	.5600	63.70	.00880	317041.	40.53155
D	12458.13	13633.1	1330591.	6863.47	87.88	.5000	78.10	.00705	603136.	48.06205
D	16983.20	18937.4	1848200.	9229.85	96.34	.4335	95.00	.00567	800231.	52.00303
D	21508.27	24241.7	2365980.	11596.24	101.35	.3392	114.41	.00471	1175326.	55.18408
D	26033.33	29546.0	2883688.	13962.62	104.67	.2522	133.40	.00426	1461421.	56.67308
D	3408.00	1659.0	41808.	2130.70	14.52	.6250	146.71	.00426	70946.	0.70952
D	7933.07	15358.9	387045.	4407.09	74.50	.5600	63.70	.00880	317041.	40.53155
D	12458.13	29058.8	732283.	6863.47	87.88	.5000	78.10	.00705	603136.	48.06205
D	16983.20	42758.7	1077520.	9229.85	96.34	.4335	95.00	.00567	800231.	52.00303
D	21508.27	56458.6	1422757.	11596.24	101.35	.3392	114.41	.00471	1175326.	55.18408
D	26033.33	70158.5	1767995.	13962.62	104.67	.2522	133.40	.00426	1461421.	56.67308
E	6619.60	4182.2	1731413.	3020.33	12.26	.5922	319.70	.00185	48074.	7.85454
E	26483.45	14419.8	5969782.	10651.80	145.57	.4022	73.18	.00550	1550536.	58.90808
E	46347.20	24657.4	10208151.	17383.27	175.63	.3751	98.08	.00370	3050999.	66.24738
E	66211.13	34895.0	14446519.	24114.74	189.91	.3642	127.65	.00285	4555461.	60.16625
E	86074.98	45132.6	18684888.	30846.20	196.30	.3584	157.07	.00228	6057924.	70.73708
E	105938.83	55370.2	22923257.	37577.67	201.10	.3547	186.77	.00190	7560386.	71.72030
E	6619.60	627.7	57243.	3020.33	12.26	.5922	319.70	.00185	48074.	7.85454
E	26483.45	27058.0	2467690.	10651.80	145.57	.4022	73.18	.00550	1550536.	58.90808
E	46347.20	53488.4	4878144.	17383.27	175.63	.3751	98.08	.00370	3050999.	66.24738
E	66211.13	79918.8	7288595.	24114.74	189.91	.3642	127.65	.00285	4555461.	60.16625
E	86074.98	106349.2	9699046.	30846.20	196.30	.3584	157.07	.00228	6057924.	70.73708
E	105938.83	132779.6	12109096.	37577.67	201.10	.3547	186.77	.00190	7560386.	71.72030
E	6619.60	18162.6	4286837.	3020.33	12.26	.5922	319.70	.00185	48074.	7.85454
E	26483.45	78254.5	1846805.	10651.80	145.57	.4022	73.18	.00550	1550536.	58.90808
E	46347.20	138346.3	3264073.	17383.27	175.63	.3751	98.08	.00370	3050999.	66.24738
E	66211.13	194438.2	4683142.	24114.74	189.91	.3642	127.65	.00285	4555461.	60.16625
E	86074.98	258530.1	6101310.	30846.20	196.30	.3584	157.07	.00228	6057924.	70.73708
E	105938.83	318622.0	7519478.	37577.67	201.10	.3547	186.77	.00190	7560386.	71.72030
F	5237.14	9014.4	4507177.	7547.56	90.11	1.4404	83.72	.01721	670750.	131.23487
F	111540.23	30521.2	15260603.	21322.36	210.47	.1912	101.31	.00180	448720.	40.42596
F	217843.32	52028.1	26014020.	35101.15	236.34	.1611	148.52	.00108	8205601.	38.28213
F	324146.41	73534.0	36767455.	48879.95	247.62	.1508	197.40	.00074	12103661.	37.80800
F	430449.40	95091.8	47520881.	62658.74	257.94	.1456	246.75	.00050	15911631.	37.11072
F	536752.59	116548.6	58274308.	76437.54	257.94	.1424	296.20	.00048	19710603.	36.88113
F	5237.14	11089.8	1284198.	7547.56	90.11	1.4404	83.72	.01721	670750.	131.23487
F	111540.23	55411.6	6416660.	21322.36	210.47	.1912	101.31	.00180	448720.	40.42596
F	217843.32	90733.4	11540126.	35101.15	236.34	.1611	148.52	.00108	8205601.	38.28213
F	324146.41	144055.2	16681592.	48879.95	247.62	.1508	197.40	.00074	12103661.	37.80800
F	430449.40	188377.0	21814058.	62658.74	247.62	.1456	246.75	.00050	15911631.	37.11072
F	536752.59	232698.8	26946524.	76437.54	257.94	.1424	296.20	.00048	19710603.	36.88113
F	5237.14	64653.8	1011185.	7547.56	90.11	1.4404	83.72	.01721	670750.	131.23487
F	111540.23	335657.7	5240687.	21322.36	210.47	.1912	101.31	.00180	448720.	40.42596
F	217843.32	498188.	9488188.	35101.15	236.34	.1611	148.52	.00108	8205601.	38.28213
F	324146.41	606601.7	13726600.	48879.95	247.62	.1508	197.40	.00074	12103661.	37.80800
F	430449.40	877665.6	17965191.	62658.74	247.62	.1456	246.75	.00050	15911631.	37.11072

BEST AVAILABLE COPY



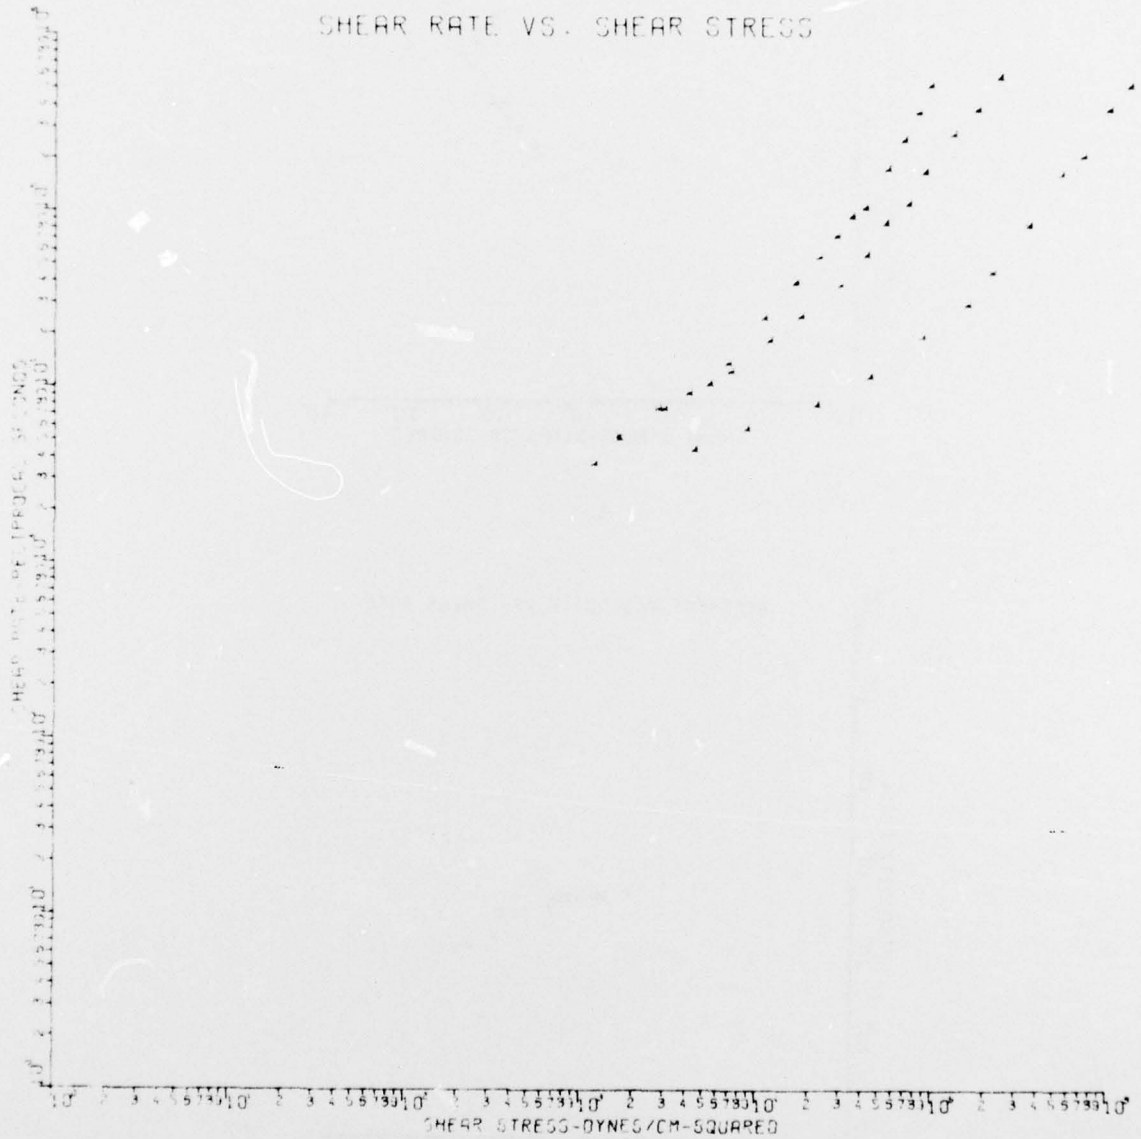


Figure B-1. Sample of Intermediate Flow Curve (Capillary Group F)

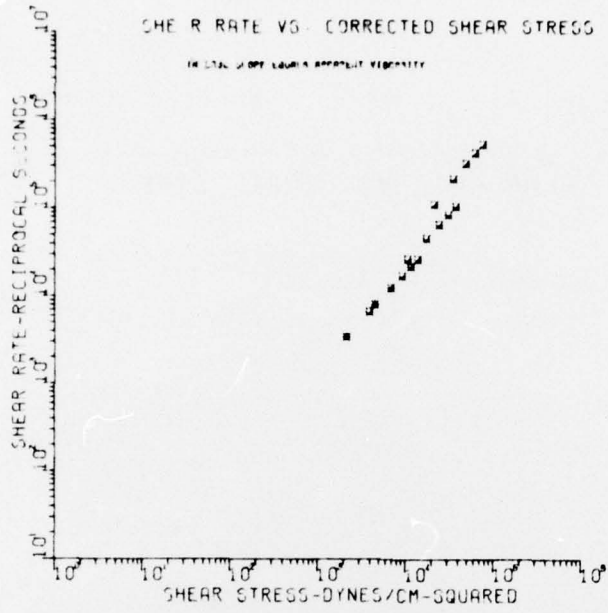


A

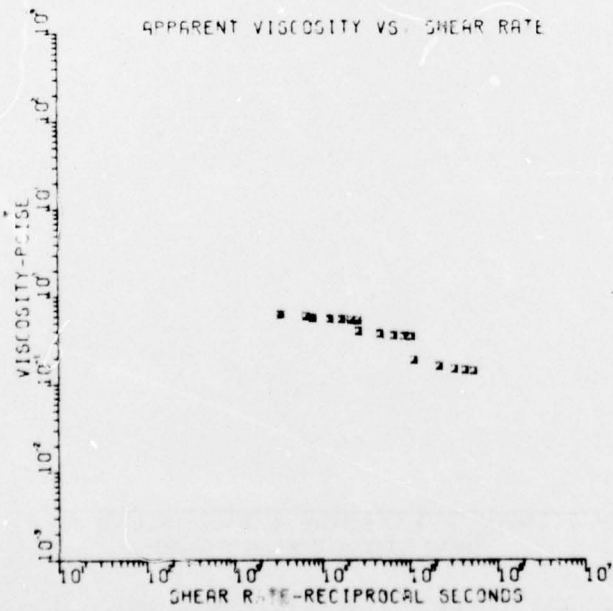


B

**Figure B-2. Sample of Flow Curves Characterizing the Properties of a Viscoelastic Fluid Using All of the Capillary Groups**

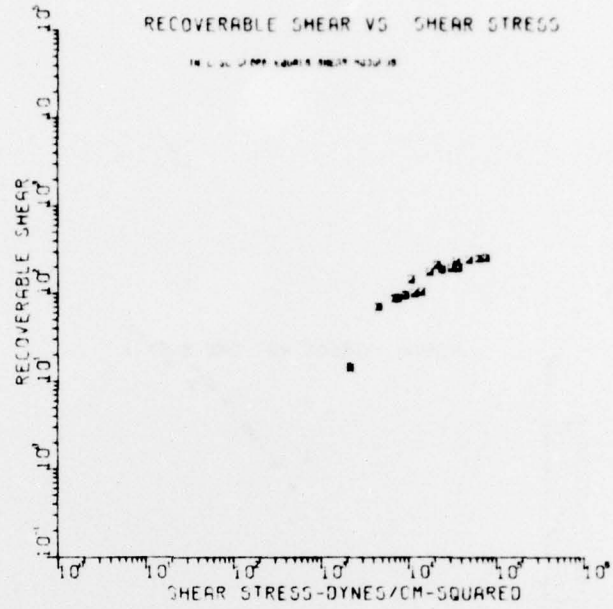


C

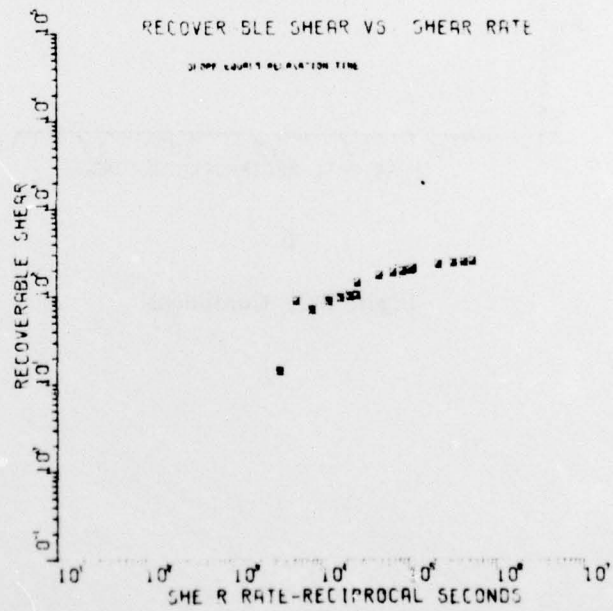

D

Figure B-2. Continued

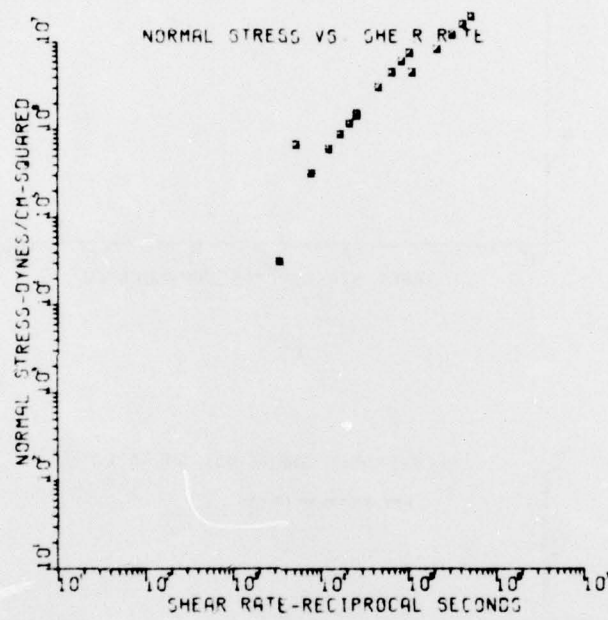

E

Figure B-2. Continued

## APPENDIX C

### PROCEDURE FOR THE HIGH-PRESSURE CAPILLARY VISCOMETER EXPERIMENT EVALUATION

- I. Construct deformation-recoil curve:
  - a. Plot  $\Delta$  volume versus time rectilinearly for each applied pressure  $\Delta P$ .
  - b. Graphically determine the slope of volume versus  $\Delta$  time.
  - c. Calculate the shear rate, shear stress, and apparent viscosity.
- II. Construct consistency curve:
  - a. Plot log shear rate versus log shear stress for each group.
  - b. For selected isoshear rates graphically determine total shear stresses.
  - c. Calculate the total applied pressure for the associated total shear stress.
- III. Construct pressure-dimension curve:
  - a. Plot total applied pressure versus  $\ell/r$  ratio for each tube by groups.
  - b. Graphically determine the corrected shear stress (equals the slope of each curve divided by two) and the recoverable shear (equals the X-intercept value multiplied by a negative two).
- IV. Construct curves of generalized viscoelastic functional parameters:
  - a. Plot the log of the selected shear rates versus the log of the corrected shear stress for all of the groups. The inverse slope equals the apparent viscosity.
  - b. Plot log apparent viscosity versus the log of the selected shear rates for all groups.
  - c. Plot log recoverable shear versus the log of the corrected shear stress for each group. The inverse slope equals the shear modulus.
  - d. Plot log recoverable shear versus log shear rate for each group. The slope equals the relaxation time.
  - e. Plot log normal stress versus the log of the selected shear rate for each group.

DISTRIBUTION LIST 6

Names	Copies	Names	Copies
CHEMICAL SYSTEMS LABORATORY		Director	
SAFETY OFFICE		Defense Civil Preparedness Agency	
Attn: DRDAR-CLF	1	Attn: PO(DC)	1
ERDA SUPPORT OFFICE		Washington, DC 20301	
Attn: DRDAR-CLE	1	CINCUSAREUR	
PLANS & PROGRAMS OFFICE		Attn: AEAGC-DS	1
Attn: DRDAR-CLR-L	4	APO New York 09403	
AUTHOR'S COPIES: Research Division	2	Chief, Office of Research,	
BIOMEDICAL LABORATORY		Development & Acquisition	
Attn: DRDAR-CLL	1	Attn: DAMA-CSM-CM	1
Attn: DRDAR-CLL-B	1	Attn: DAMA-ARZ-D	1
Attn: DRDAR-CLL-M	1	Washington, DC 20310	
Attn: DRDAR-CLL-V	1	Headquarters, Sixth US Army	
DEVELOPMENTAL SUPPORT DIVISION		NBC Office	
Attn: DRDAR-CLJ-R	2	Attn: AFKC-OP-PN	1
Attn: DRDAR-CLJ-L	3	Presidio of San Francisco, CA 94129	
Attn: DRDAR-CLJ-M	1	HQDA (DAMI-FIT)	1
Attn: DRDAR-CLJ-P	1	WASH, DC 20310	
MUNITIONS DIVISION		US ARMY HEALTH SERVICE COMMAND	
Attn: DRDAR-CLN	1	Superintendent	
PHYSICAL PROTECTION DIVISION		Academy of Health Sciences	
Attn: DRDAR-CLW-P	1	US Army	
RESEARCH DIVISION		Attn: HSA-CDC	1
Attn: DRDAR-CLB	1	Attn: HSA-IHE	1
Attn: DRDAR-CLB-B	1	Fort Sam Houston, TX 78234	
Attn: DRDAR-CLB-C	1	US ARMY MATERIEL DEVELOPMENT AND	
Attn: DRDAR-CLB-P	1	READINESS COMMAND	
Attn: DRDAR-CLB-R	1	Commander	
Attn: DRDAR-CLB-T	1	US Army Materiel Development and	
SYSTEMS ASSESSMENTS OFFICE		Readiness Command	
Attn: DRDAR-CLY-A	1	Attn: DRCDE-DM	1
Attn: DRDAR-CLY-R	1	Attn: DRCLDC	1
DEPARTMENT OF DEFENSE		Attn: DRCMT	1
Administrator		Attn: DRCSF-S	1
Defense Documentation Center		5001 Eisenhower Ave	
Attn: Accessions Division	12	Alexandria, VA 22333	
Cameron Station		Project Manager Smoke/Obscurance	
Alexandria, VA 22314		Attn: DRCPM-SMK	1
Director		Aberdeen Proving Ground, MD 21005	
Defense Intelligence Agency		Commander	
Attn: DB-4G1	1	US Army Foreign Science & Technology Center	
Washington, DC 20301		Attn: DRXST-IS1	2
DEPARTMENT OF THE ARMY		220 Seventh St., NE	
HQDA (DAMO-SSC)	1	Charlottesville, VA 22901	
WASH DC 20310		Redstone Scientific Information Center	
		Attn: Chief, Documents	1
		US Army Missile Command	
		Redstone Arsenal, AL 35809	

DISTRIBUTION LIST 6 (Contd)

Names	Copies	Names	Copies
Director DARCOM Field Safety Activity Attn: DRXOS-C Charlestown, IN 47111	1	US ARMY TRAINING & DOCTRINE COMMAND Commandant US Army Infantry School Attn: NBC Division Fort Benning, GA 31905	1
Commander DARCOM, STITEUR Attn: DRXST-ST1 Box 48, APO New York 09710	1	Commandant US Army Missile & Munitions Center & School Attn: ATSK-CD-MD Attn: ATSK-DT-MU-EOD Redstone Arsenal, AL 35809	1
Commander US Army Science & Technology Center-Far East Office APO San Francisco 96328	1	Commander US Army Logistics Center Attn: ATCL-MM Fort Lee, VA 23801	1
US ARMY ARMAMENT RESEARCH AND DEVELOPMENT COMMAND		Commandant US Army Military Police School/Training Center Attn: ATZN-CDM Attn: ATZN-TDP-C Attn: ATSJ-TD-CR Fort McClellan, AL 36205	1 1 1
Commander US Army Armament Research and Development Command Attn: DRDAR-TD Attn: DRDAR-TSS Dover, NJ 07801	1 1	Commander US Army Infantry Center Attn: ATSH-CD-MS-C Fort Benning, GA 31905	1
CDR, APG USA ARRADCOM Attn: DRDAR-QAC-R Attn: DRDAR-ACW Aberdeen Proving Ground, MD 21010	1 1	Commandant US Army Ordnance & Chemical Center & School Attn: ATSL-CL-NB Attn: ATSL-CL-CD Aberdeen Proving Ground, MD 21005	1 1
US ARMY ARMAMENT MATERIEL READINESS COMMAND		US ARMY TEST & EVALUATION COMMAND	
Commander US Army Armament Materiel Readiness Command Attn: DRSAR-ASN Attn: DRSAR-IMB-C Attn: DRSA-R-SA Rock Island, IL 61201	1 1 1	Record Copy CDR, APG Attn: STEAP-AD-R/RHA APG-Edgewood Area, Bldg E5179	1
CDR, APG USA ARRCOM Attn: SARTE Aberdeen Proving Ground, MD 21010	1	CDR, APG Attn: STEAP-TL APG-Aberdeen Area	1
Commander US Army Dugway Proving Ground Attn: Technical Library, Docu Sect Dugway, UT 84022	1	Commander US Army Test & Evaluation Command Attn: DRSTE-FA APG-Aberdeen Area	1
Commander Rocky Mountain Arsenal Attn: SARRM-QA Commerœ City, CO 80022	1	Commander US Army Tropic Test Center Attn: STETC-MO-A (Tech Library) APO New York 09827	1
Commander Pine Bluff Arsenal Attn: SARPB-ETA Pine Bluff, AR 71611	1	Commander Dugway Proving Ground Attn: STEDP-PO Dugway, UT 84022	1

DISTRIBUTION LIST 6 (Contd)

Names	Copies	Names	Copies
DEPARTMENT OF THE NAVY		HQ, USAF/SGPR	1
Commander		Forrestal Bldg	
Naval Explosive Ordnance Disposal Facility		WASH DC 20314	
Attn: Army Chemical Office	1	HQ, Ogden ALC/MMWRA	1
Indian Head, MD 20640		Hill AFB, UT 84406	
Commander		Commander	
Naval Surface Weapons Center		Armament Development & Test Center	
Attn: Tech Lib & Info Svcs Br	1	Attn: DLOSL (Technical Library)	1
White Oak Laboratory		Eglin AFB, FL 32542	
Silver Spring, MD 20910		NORAD Combat Operations Center/DBN	1
Commander		Cheyenne Mtn Complex, CO 80914	
Naval Surface Weapons Center		OUTSIDE AGENCIES	
Dahlgren Laboratory	1	Battelle, Columbus Laboratories	
Attn: DX-21		Attn: TACTEC	1
Dahlgren, VA 22448		505 King Avenue	
Chief, Bureau of Medicine & Surgery		Columbus, OH 43201	
Department of the Navy		Director of Toxicology	1
Attn: CODE 5	1	National Research Council	
Washington, DC 20372		2101 Constitution Ave, NW	
Commanding Officer		Washington, DC 20418	
Naval Weapons Support Center			
Attn: Code 5042/Dr. B. E. Douda	1		
Crane, IN 47522			
DEPARTMENT OF THE AIR FORCE			
HQ Foreign Technology Division (AFSC)			
Attn: PDRR	1		
Wright-Patterson AFB, OH 45433			
Commander			
Aeronautical Systems Division			
Attn: ASD/AELD	1		
Wright-Patterson AFB, OH 45433			