

AD-A047 516

ARMY TANK-AUTOMOTIVE MATERIEL READINESS COMMAND WARR--ETC F/G 13/6
CANNIBALIZATION OF 5-TON TRUCKS.(U)
AUG 77 R 6 JOULES

UNCLASSIFIED

TARCOM-SA-77-10

NL

1 of 1

ADA047516



END
DATE
FILMED
1 - 78
DDC

23
00

2
B.S.

REPORT NUMBER SA-77-10

AD A 0 4 7 5 1 6

CANNIBALIZATION OF 5-TON TRUCKS



COPY AVAILABLE TO DDC DOES NOT
PERMIT FULLY LEGIBLE PRODUCTION

AUGUST 1977

R. G. JOULES

DDC
RECEIVED
DEC 12 1977
A

AU NO.
DDC FILE COPY

TARCOM

SYSTEMS ANALYSIS DIVISION, PLANS & ANALYSIS DIRECTORATE

U.S. ARMY TANK AUTOMOTIVE MATERIEL READINESS COMMAND

DISTRIBUTION STATEMENT A
Approved for public release

DISPOSITION

Destroy this report when no longer needed. Do not return it to the originator.

DISCLAIMER

The findings in this report are not to be construed as an official Department of the Army position.

WARNING

Information and data contained in this document are based on input available at the time of preparation. Because the results may be subject to change, this document should not be construed to represent the official position of the US Army Development & Readiness Command unless so stated.

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER SA-77-10	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
⑧ TITLE (and Subtitle) Cannibalization of 5-Ton Trucks		⑨ 5. TYPE OF REPORT & PERIOD COVERED Final rept.
7. AUTHOR(s) R.G. Joules		10. REGINALD G. JOULES
9. PERFORMING ORGANIZATION NAME AND ADDRESS Systems Analysis Plans & Analysis Directorate (DRSTA-SA)		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
11. CONTROLLING OFFICE NAME AND ADDRESS Materiel Management Directorate, TARCOM, Warren, MI 48090		12. REPORT DATE Aug 77
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office) TARCOM-SA-77-10		13. NUMBER OF PAGES 12 43p.
		15. SECURITY CLASS. (of this report) UNCLAS
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Cannibalization, 5-Ton Trucks		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) Determine the shortage of 5-Ton Truck gas (R6602) and multifuel (LDS 465/1A) engines from June 1977 through September 1981. Estimate the cost of cannibalizing excess 5-Ton Trucks to obtain engines to fill these deficits.		

ACCESSION for		
RTIS	White Section	<input checked="" type="checkbox"/>
ODC	Off Section	<input type="checkbox"/>
UNANNOUNCED		<input type="checkbox"/>
JUSTIFICATION.....		
BY.....		
DISTRIBUTION/AVAILABILITY CODES		
Dist.	AVAIL. and/or	SPECIAL
A	23	

TABLE OF CONTENTS

05,

	<u>Page</u>
I. Purpose	1
II. Scope	1
III. Background	1
IV. Approach	2
V. Assumptions	9
Conclusions	19
Recommendations	20
Appendix	21

CANNIBALIZATION OF 5 TON TRUCKS

By

Reginald Joules
Systems Analysis Div
Plans & Analysis Directorate

FOREWORD

The author wishes to acknowledge the prompt assistance of Mr. Clarence Wheeler of Cost Analysis Division, Comptroller in costing the cannibalization schedules.

I. PURPOSE:

↙ The purpose of this study is to determine the total deficits of 5 Ton Truck gas (R6602) and multifuel (LDS 465/ 1A) engines expected between June 1977 and September 1981, and estimating the cost of cannibalizing excess vehicles around the world to obtain engines to fill these deficits. ←

II. SCOPE:

The analysis considers only cannibalization of excess 5 Ton Trucks as a source of supply of engines. Other alternatives such as buying replacement engines, possible modification of some other engines for replacements, or early replacement of the fleet are not addressed.

III. BACKGROUND:

A. The shortage is created by the fact that new replacement engines available do not meet EPA clean air standards.

B. Other alternatives are being studied by other organizations.

C. In this study only one source of supply to meet the deficits is considered, namely, cannibalization.

D. The study establishes the total demand during the period from June 1977 through September 1981, based upon the following factors:

1. Given projections of monthly demands.

2. An overall pipeline demand that is equal to four times the average monthly demand.

3. Existing backorders.

E. The operational readiness is not considered as a factor in this study; it is assumed that all demands must be met, that no slack is allowed.

F. The basic data such as monthly demands, current stock of serviceable and unserviceable engines, vehicle washout rates, engine loss and washout rates, distribution of vehicles according to location, etc. were provided by the Tactical Vehicle Division.

G. The cannibalization schedules were costed by Cost Analysis Division, Comptroller Directorate.

IV. APPROACH:

A. Since the problems of gas and multifuel engines are similar but separate, compute the values separately, but use identical steps.

B. On a year-by-year basis, compute the deficits. Take into account existing backorders, pipeline requirements, monthly demands from the field, monthly returns from the field, loss of returnable engines in the field, loss due to washout, and available supply of serviceable and unserviceable engines. (Overview Flow Diagram (OFD), Function Block 1.0).

C. On a year-by-year basis, compute the number of excess vehicles that will be available for cannibalization by using the projected vehicle washout rates. Using the engine loss rates (loss in the field + loss at depot level), estimate the number of rebuildable engines that will be available from the excess vehicles. (OFD, Function Block 2.0).


D. Compare the yearly deficits to the number of rebuildables that will be available from the yearly excess lots. If the deficit during a given year is larger than the supply of rebuildables, the difference will have to be made up by the extras available from previous years. (OFD, Function Block 3.0).

E. Once the total cannibalization requirement for each year is determined, develop a breakdown of cannibalization based upon geographical location. Since the overall expenses for labor and transportation to depot (which is located in the U. S.) will be the cheapest in the U.S. and the most expensive in the Pacific, cannibalization should be maximized in the U. S. and minimized in the Pacific, with Europe handling the overflow from the U. S. Therefore, if there are not enough cannibalizable trucks in the U. S. during a given year, the supply in the U. S. during the previous years should be searched first before scheduling cannibalization in Europe, and in the Pacific. (OFD, Function Block 4.0).


F. Translate the requirements for rebuildable engines to the number trucks to be cannibalized. This is to allow for the losses described above while discussing availability. (OFD, Function Block 5.0).

G. Obtain cannibalization and shipping costs and calculate the total cost of this program.

STUDY APPROACH
OVERVIEW FLOW DIAGRAM

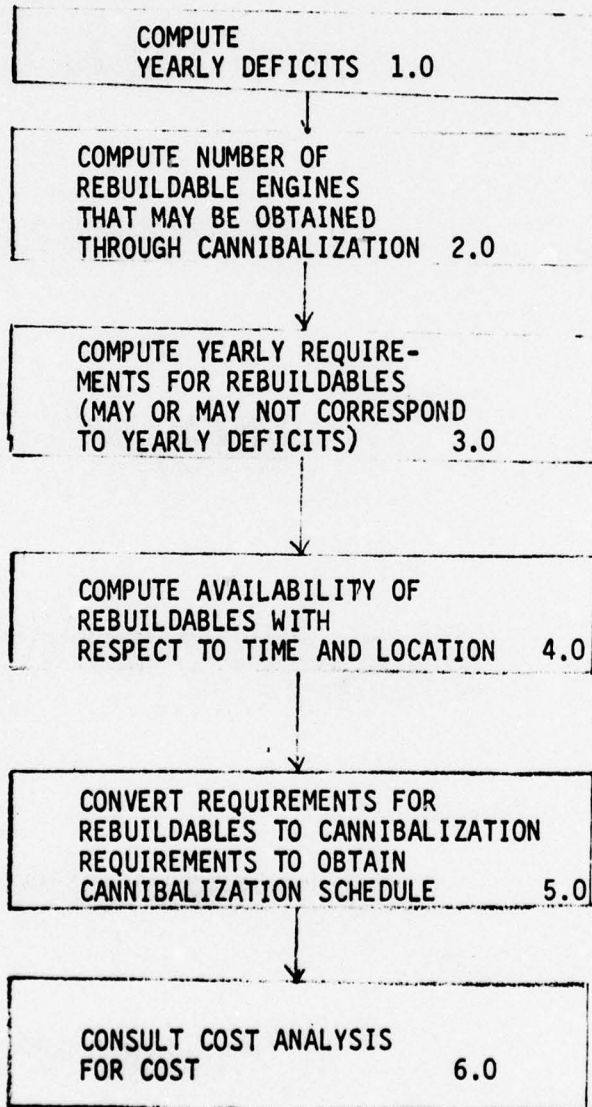

STUDY APPROACH
FUNCTION DIAGRAM 1.0

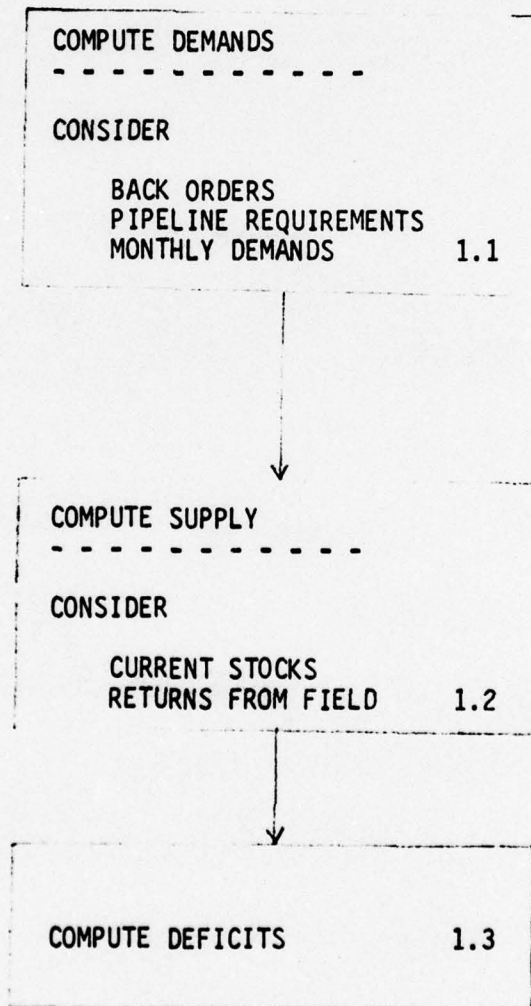


STUDY APPROACH
FUNCTION DIAGRAM 2.0


COMPUTE YEARLY
EXCESS VEHICLES 2.1

COMPUTE REBUILDABLES
THAT WILL BE AVAILABLE
FROM THESE EXCESS VEHICLES 2.2


STUDY APPROACH
FUNCTION DIAGRAM 3.0

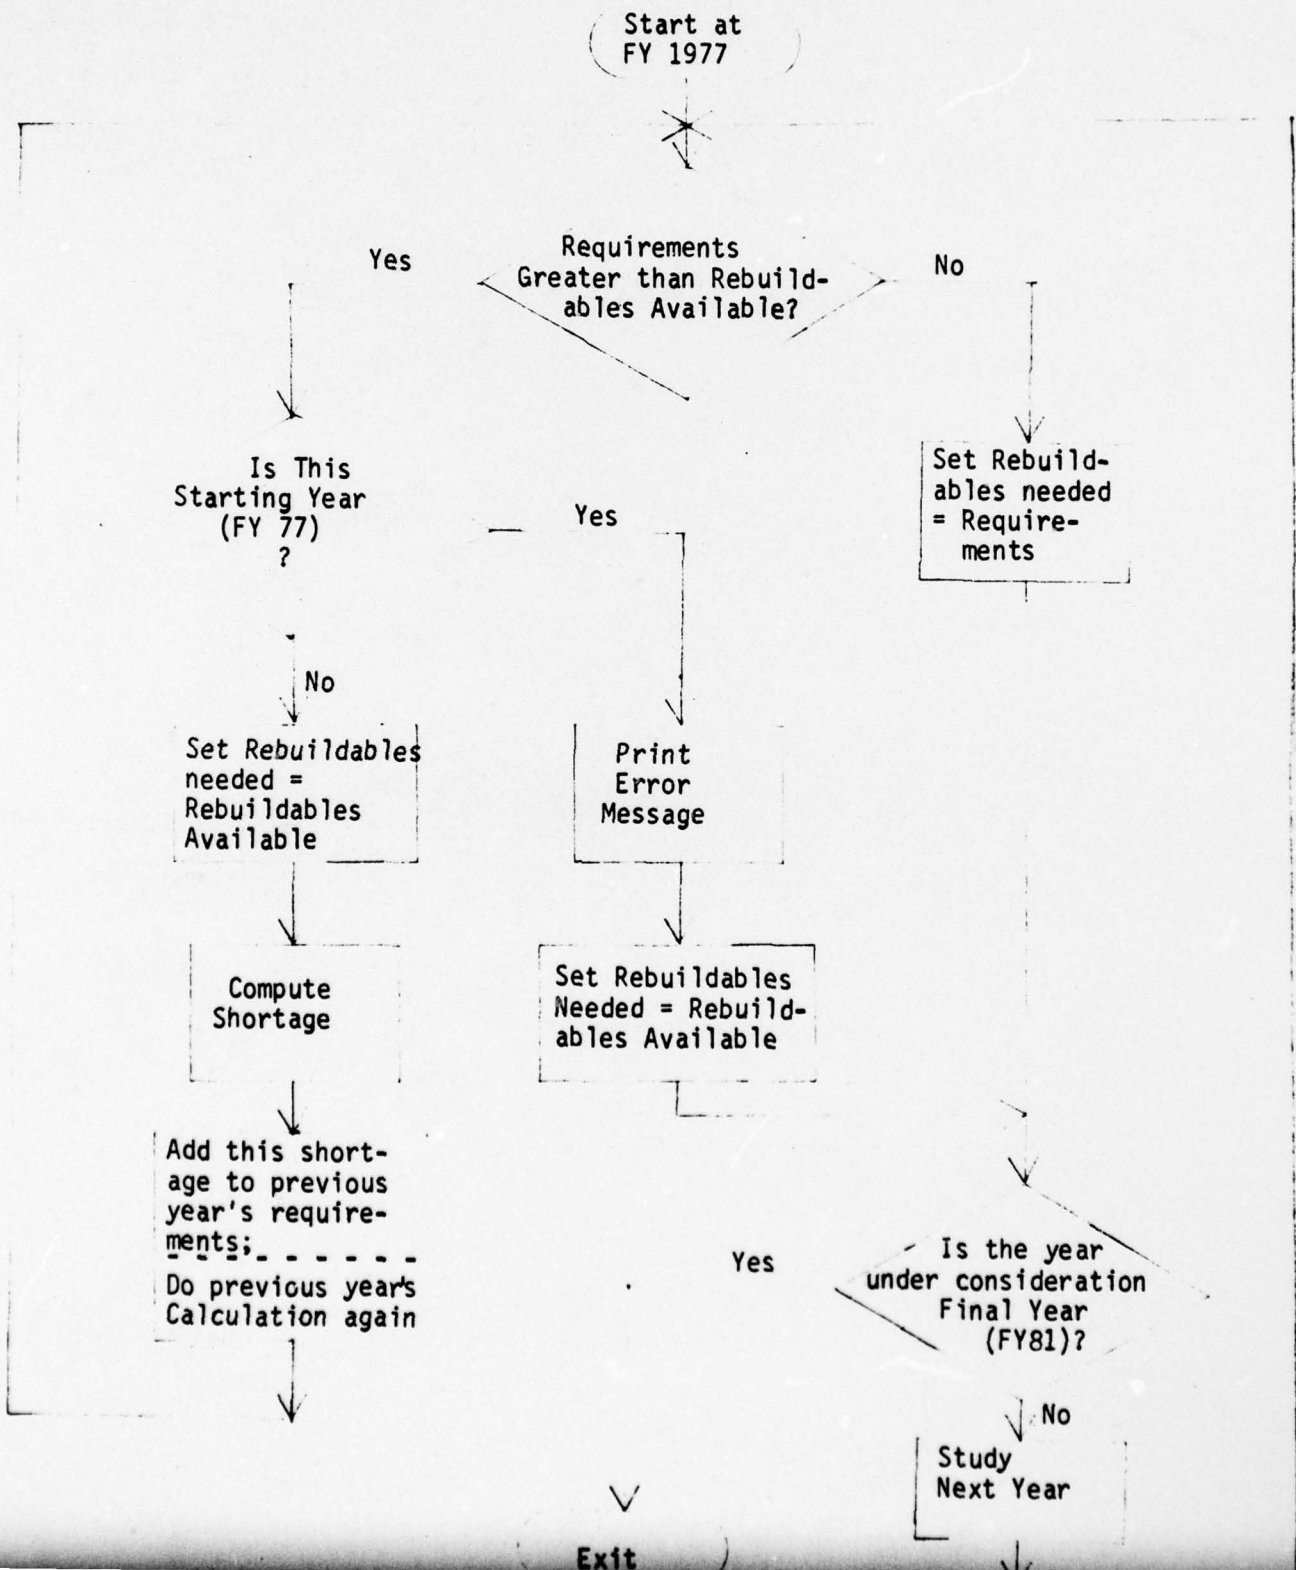

STUDY APPROACH
FUNCTION DIAGRAM 4.0

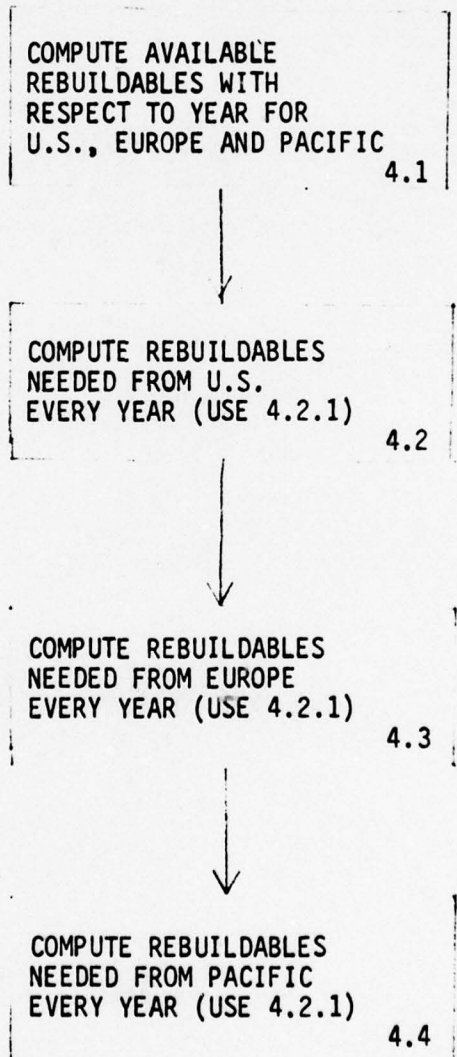

STUDY APPROACH
FUNCTION DIAGRAM 4.2.1

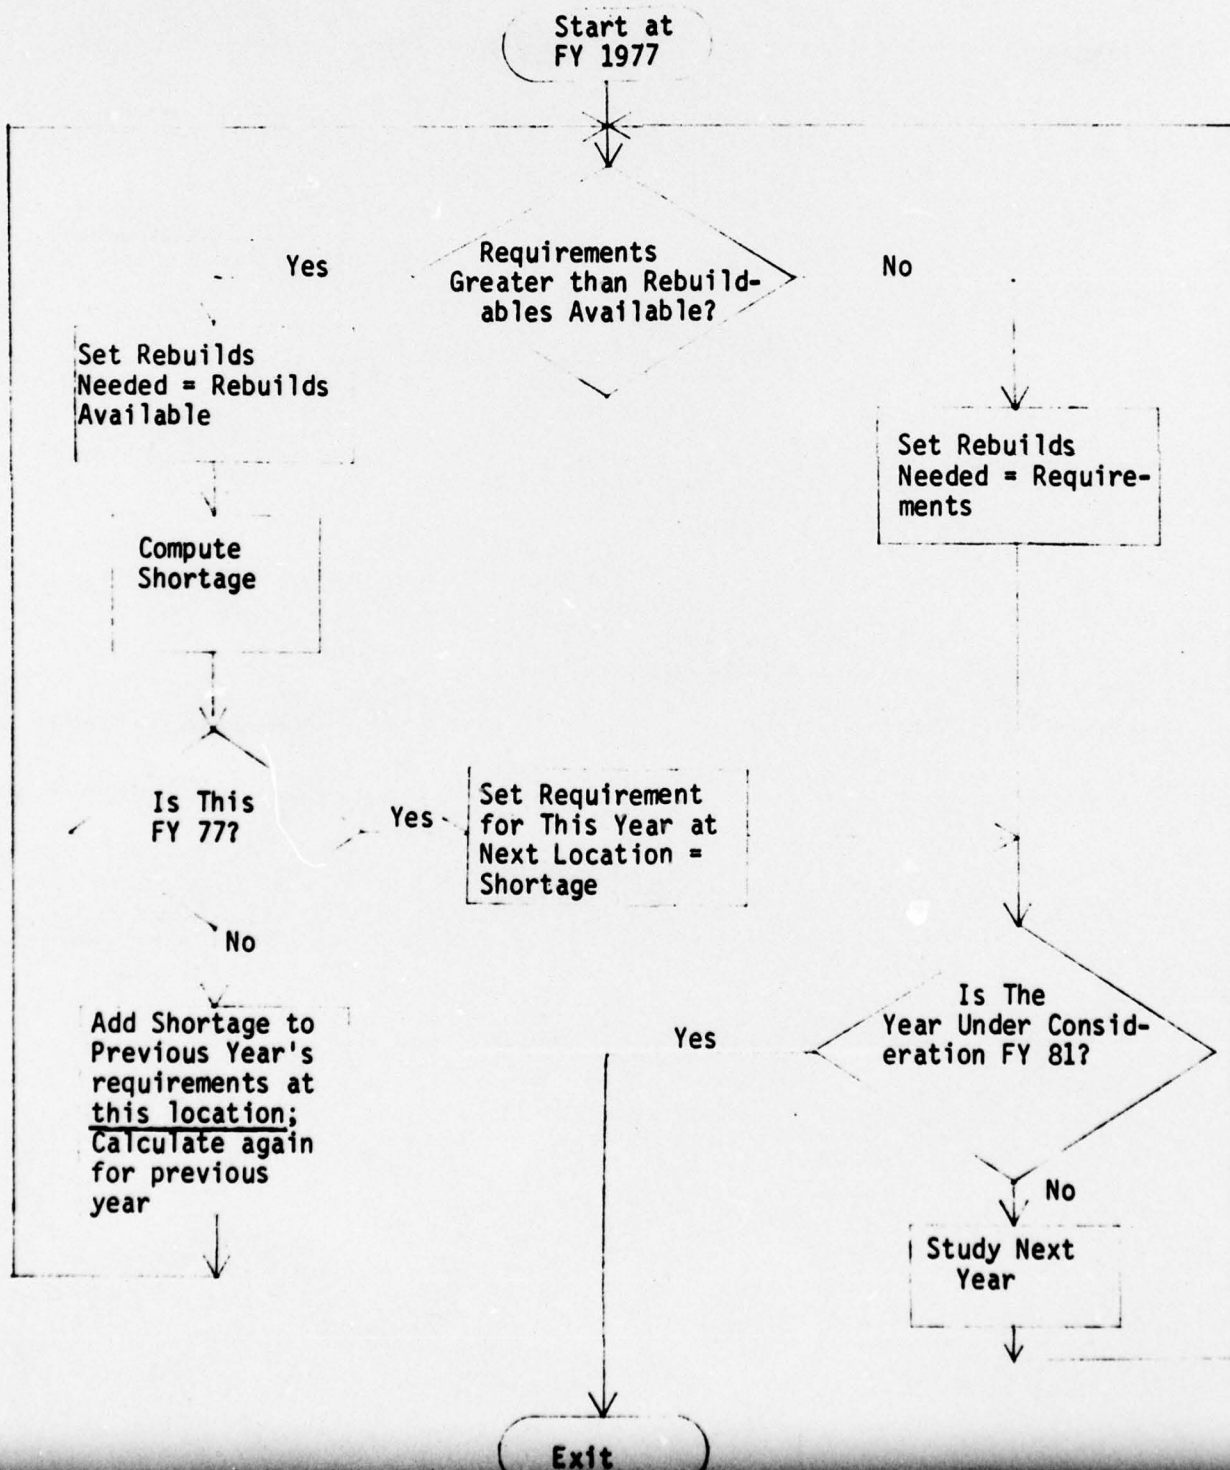

V. ASSUMPTIONS

- A. Starting deficit (deficit at end of FY76) is assumed to be zero for both categories.
- B. Pipeline demand, numerically equal to four times the monthly demand, is to be met in FY77. Therefore, there will be no pipeline demands in the following years, as long as there is constant flow.
- C. Since no gas vehicle washout rate is available for FY81, the rate is assumed to be zero.
- D. The vehicle washout rate and engine loss rate will be uniform in U.S., Europe and the Pacific areas.
- E. Engine loss rate is constant during the period under consideration (June 1977 - September 1981).
- F. Distribution of vehicles over the three areas remains constant during the period under consideration (gas trucks: 85% in U.S., 13% in Europe, 2% in the Pacific; multifuel trucks: 67% in U.S., 24% in Europe, 9% in the Pacific).

VI. DISCUSSION

Deficits:

Tables 1 and 2 show the yearly supply, yearly and cumulative demand and cumulative deficits by considering the factors discussed in Approach. These tables clearly illustrate the problem.

A negative deficit during a given year in effect decreases the total demand for the following year.

DEMAND is the sum of total demand from the field over the year, pipeline demands (if any), back orders (if any), and previous deficits.

SUPPLY is the sum of net returns of unserviceables (through rotation, after losses), serviceable stock (if any), and unserviceable stock (if any).

$$\text{DEFICIT} = \text{DEMAND} - \text{SUPPLY}$$

TABLE 1. CUMULATIVE DEFICITS
OF GASOLINE ENGINES

FY	YEARLY DEMAND	CUMULATIVE DEMAND	YEARLY SUPPLY	CUMULATIVE DEFICIT
77 (May - Sep)	762	762	845	-83
78	468	385	316	69
79	468	537	316	221
80	468	689	316	373
81	468	841	316	525*

*Total deficit is 525

Basic Input Data used for developing this Table:

Net monthly unserviceables through rotation after losses (10% field loss and 25% washout) is

$$39 * (1 - 0.1) * (1 - 0.25) \simeq 26$$

Serviceable stock on hand as of May 31, 77 is 222.

Unserviceables on hand after washout is $691 * (1 - 0.25) \simeq 518$

Backorders as of May 31 = 450

Pipeline demands = $4 * 39 = 156$

TABLE 2. CUMULATIVE DEFICITS OF MULTIFUEL ENGINES

FY	YEARLY DEMAND	CUMULATIVE DEMAND	YEARLY SUPPLY	CUMULATIVE DEFICIT
77 (May - Sep)	1266	1266	1304	-38
78	1404	1366	884	482
79	1404	1885	884	1001
80	1404	2405	884	1521
81	1403	2924	884	2040*

*Total deficit is 2040

Basic Input Data used for developing this Table:

Net monthly unserviceables through rotation after losses (10% field loss and 30% washout) is

$$117 * (1 - 0.1) * (1 - 0.30) \approx 74$$

Serviceable stock on hand as of May 31, 77 is 153.

Unserviceables on hand after washout is $1233 * (1 - 0.3) \approx 856$

Back orders as of May 31 = 330

Pipeline demands = $4 * 117 = 468$

B. Availability of Rebuildables through Cannibalization:

Tables 3 and 4 show the number of trucks that will be available for cannibalization based upon vehicle washout rates, and the rebuildable engines that can be obtained from these excess vehicles after allowing for normal losses.

$$\text{Total strength for a given year} = \text{Total Strength for previous year} * \left\{ 1 - \text{Vehicles washout rate for previous year} \right\}$$

$$\text{Trucks available for cannibalization during a given year} = \text{Total strength for the year} * \text{Vehicle washout for that year}$$

$$\text{Loss rate of unserviceable engines} = \left\{ 1 - \text{field loss rate} \right\} * \left\{ 1 - \text{washout rate at depot} \right\}$$

TABLE 3. AVAILABILITY OF REBUILDABLE GASOLINE ENGINES

FY	Total Strength	Vehicle Washout Rate	Trucks Available For Cannib.	Engine Loss Rate	Rebuildable Engines Available
77	6752	0.13	879	0.325	592
78	5874	0.02	117	0.325	79
79	5757	0.02	115	0.325	78
80	5642	0.15	846	0.325	571
81	4796	-	0	0.325	0

TABLE 4. AVAILABILITY OF REBUILDABLE MULTIFUEL ENGINES

FY	Total Strength	Vehicle Washout Rate	Trucks Available For Cannib.	Engine Loss Rate	Rebuildable Engines Available
77	9792	0.02	166	0.37	105
78	8157	0.02	163	0.37	103
79	7994	0.02	160	0.37	101
80	7834	0.02	157	0.37	99
81	7677	0.02	154	0.37	97

C. Deficits vs Availables:

The yearly deficits shown in Tables 1 and 2 are cumulative since they are intended to show the deficits if no action is taken to curb the shortage. Tables 5 and 6 compare the yearly shortages and the rebuildable engines that could be obtained through cannibalization. The last columns show the yearly deficits after cannibalization.

As mentioned earlier if the shortages during a given year is greater than the number of rebuildables available from cannibalization, excess rebuildables available from previous years should be used to cover the difference. The fourth columns in Tables 5 and 6 show the number of rebuildables that should be made available each year.

TABLE 5. DEFICITS VERSUS AVAILABLES
OF GASOLINE ENGINES

FY	Shortages	Potential Rebuildables From Cannibalization	Number of Rebuildables Needed (From Availables)	Deficits After Cannibalization
77	0	592	64	0
78	69	78	78	0
79	152	79	79	0
80	152	571	304	0
81	<u>152</u>	-	<u>-</u>	<u>0</u>
Totals	525		525	0

Note that there will be a shortage of 152 engines in FY81, but no trucks will be available for cannibalization. Therefore, 304 rebuildables should be made available in FY80 (even though the shortage in FY80 will be only 152) to cover the shortage in FY81.

Similarly, though there will be no shortage in FY77, 64 rebuildables should be made available in FY77 to cover the shortage in FY79.

TABLE 6. DEFICITS VERSUS AVAILABLES
OF MULTIFUEL ENGINES

FY	Shortages	Potential Rebuildables From Cannibalization	Number of Rebuildables Needed (From Availables)	Deficits After Cannibalization
77	0	105	105	0
78	482	103	103	274
79	519	101	101	418
80	520	99	99	421
81	519	97	<u>97</u>	<u>422</u>
Totals	2040		505	1535*

*Note that even if all available excess multifuel trucks are cannibalized, the shortage cannot be met

D. Source Breakdown in Terms of Year and Location:

Tables 7 and 8 show from where required rebuildables will be obtained.

TABLE 7. SOURCE BREAKDOWN IN TERMS OF YEAR AND LOCATION FOR GASOLINE ENGINES

FY	Potential Rebuildables From Cannibalization: Distribution According To Location				Number of Rebuildables Needed (From Available)			
	Total 100%	U.S. 85%	EUR 13%	PAC 2%	U.S.	EUR	PAC	TOT
77	592	503	77	12	88	0	0	88
78	78	66	10	2	66	0	0	66
79	79	67	10	2	67	0	0	67
80	571	485	74	11	304	0	0	304
81	-	0	0	0	0	0	0	0

Since 79 rebuildables will not be available in the U.S. during FY 78, the balance necessary should be obtained from supplies in the U.S. during previous years. Since there is a potential of 503 rebuildables in the U.S. during FY77, the balance should be drawn from this supply. The total requirement for U.S. is changed from the original 64 to 76. The total is also changed from 64 to 76 (but these changes are not shown on Table 7).

Similarly, in FY78 only 67 rebuildables will be available in the U.S. through cannibalization. Since a total of 79 is needed, attempt should be made to obtain the remaining 12 from the supplies in the U.S. during previous years before going to the supplies in Europe and Pacific during FY 79. A search for the supplies in U.S. during previous years shows that U.S. will have sufficient supply in FY77, to cover this difference. The requirement from U.S. for FY77 is again changed from 76 to 88, with a similar change in total requirement for FY77 (these final figures are shown on Table 7).

TABLE 8. SOURCE BREAK DOWN IN TERMS OF YEAR AND LOCATION FOR MULTIFUEL ENGINES

FY	Potential Rebuildables From Cannibalization: Distribution According to Location				Number of Rebuildables Needed (From Available)			
	Total 100%	U.S. 67%	EUR 24%	PAC 9%	U.S.	EUR	PAC	TOT
77	105	70	25	9	70	25	9	105
78	103	69	25	9	69	25	9	103
79	101	68	24	9	68	24	9	101
80	99	66	24	9	66	24	9	99
81	97	65	23	9	65	23	9	97

E. Conversion:

Tables 7 and 8 show a breakdown of rebuildable engines needed in terms of year and location. However, in order to determine how many vehicles are to be cannibalized, it is necessary to take into account the losses in field and at depot level.

The loss rates for gas and multifuel engines are 0.325 and 0.37 respectively. Thus, for example, if 100 gas rebuildables are needed, it will be necessary to cannibalize, as a rule,

$$100 \div (1 - 0.325) = 148 \text{ vehicles.}$$

Tables 9 and 10 show actual cannibalization requirements in terms of time, and location.

TABLE 9. CANNIBALIZATION SCHEDULE FOR
EXCESS GAS TRUCKS

FY	Distribution of Cannibalization Requirements		
	U.S.	Europe	Pacific
77	130	0	0
78	99	0	0
79	98	0	0
80	450	0	0
81	0	0	0

TABLE 10. CANNIBALIZATION SCHEDULE FOR
EXCESS MULTIFUEL TRUCKS

FY	Distribution of Cannibalization Requirements		
	U.S.	Europe	Pacific
77	112	40	15
78	110	39	15
79	107	38	15
80	105	38	15
81	103	37	15

F. Cannibalization Costs:

The costs for cannibalization involve three factors.

- (1) Removal of engines from washed out vehicles
- (2) Preparation of engines for shipment.
- (3) Transportation of engines to depot in the U.S.

Cost breakdowns for gas and multifuel trucks are shown in Tables 11 and 12. (Courtesy of Cost Analysis Div, Comptroller).

TABLE 11 COST BREAKDOWN FOR
CANNIBALIZATION OF GAS ENGINES

REMOVAL OF ENGINES FROM WASHED OUT VEHICLES:	YEAR (FY)	LOCATION			TOTALS
		U.S.	EUROPE	PACIFIC	
	1977	7222	0	0	7222
	1978	5825	0	0	5825
	1979	6048	0	0	6048
	1980	28910	0	0	28910
	1981	0	0	0	0
					48005
PREPARATION OF ENGINES FOR SHIPMENT	1977	2942	0	0	2942
	1978	2373	0	0	2373
	1979	2464	0	0	2464
	1980	11779	0	0	11779
	1981	0	0	0	0
					19558
TRANSPORTATION OF ENGINES TO DEPOT IN U.S.	1977	20200	0	0	20200
	1978	16290	0	0	16290
	1979	16920	0	0	16920
	1980	80860	0	0	80860
	1981	0	0	0	0
					134270

Total cost for cannibalization of 777 gasoline engines = \$201,833.
Average unit cost = \$259.76.

TABLE 12: COST BREAKDOWN FOR
CANNIBALIZATION OF
MULTIFUEL ENGINES

REMOVAL OF ENGINES FROM WASHED OUT VEHICLES:	YEAR (FY)	LOCATION			TOTALS
		U.S.	EUROPE	PACIFIC	
	1977	5761	2337	964	9062
	1978	5992	2413	1021	9426
	1979	6115	2466	1071	9652
	1980	6247	2568	1115	9930
	1981	6361	2595	1158	<u>10114</u>
					48184
<hr/> <hr/>					
PREPARATION OF ENGINES FOR SHIPMENT	1977	2535	1028	424	3987
	1978	2637	1062	449	4148
	1979	2690	1085	471	4246
	1980	2749	1130	491	4370
	1981	2799	1142	509	<u>4450</u>
					21201
<hr/> <hr/>					
TRANSPORTATION OF ENGINES TO DEPOT IN U.S.	1977	22230	11700	4980	38910
	1978	23120	12,080	5270	40470
	1979	23590	12350	5530	41470
	1980	24100	12850	5760	42710
	1981	24540	12990	5977	<u>43507</u>
					207067

Total cost for cannibalization of 800 multifuel trucks = \$276,452.
Average unit cost = \$345.57.

CONCLUSIONS

1. The shortage of 5 Ton Truck gasoline engines (R6602) can be successfully combated through cannibalization. However, cannibalization can solve only one fourth of the shortage as far as 5 Ton Truck multifuel engines (LDS 465/1A) are concerned, as shown on Table 5 of the report.
2. The costs associated with the computed cannibalization schedules are shown on Tables 11 and 12. The average unit costs for cannibalization of gas and multifuel engines are \$259.76 and \$345.57 respectively. The average unit cost is a function of the cannibalization schedule. Any change in the cannibalization schedules shown in Tables 9 and 10 will alter the unit costs due to escalation factors and location differentials.

RECOMMENDATIONS

1. In order to determine the cost-effectiveness of cannibalization, it is recommended that costs determined herein be compared to other possible alternatives.
2. The computer program inclosed with this study (Appendix) can be used to compute new cannibalization schedules and associated costs (as in Tables 9, 10, 11 and 12), if desired. Currently, the program output (sample inclosed) contains only the cannibalization requirements and matrices for the three cost factors shown on Tables 11 and 12. However, it is possible to modify the output routines to list more information.

APPENDIX

Documentation for the inclosed computer program for calculating the cannibalization requirements for 5 Ton Trucks can be obtained on request from DRSTA-SA, USATARCOM, Warren, MI 48090

The source and object files as well as the absolute overlay for the loaded programs are stored on permanent files on the CDC 6600 Computer System at Picatinny Arsenal, Dover, N.J.

```

PROGRAM CONTROL (GAS, MULTI, INPUT, OUTPUT, TAPE1=GAS,
P          TAPE2=MULTI, TAPE5=INPUT, TAPE6=OUTPUT)
REAL NO
INTEGER RBLINS
DIMENSION MO(5), BO(5), SERU(5), UNSRU(5),
D          PIPE(5), OTH(5), VEHNR(5), DISTR(3), YRLY(5),
D          DEF(5), CDEF(5), DEM(5), SUP(5), REQ(5), REBLDA(5),
D          REBLDN(5,3), YEXESS(5), RBLDA(5,3), RBLDN(5,3),
D          RBLDMS(5,3), BASECST(3), TRANSP(3)
COMMON /DEFICT/ROTL, MO, SERU, UNSRU, BO, PIPE, OTH,
C          DEF, CDEF, DEM, SUP, ROTG, YRLY
C          /REBILDS/CURSTR, ENGL, VEHNR,
C          YEXESS, REBLDA, ENGG
C          /REQMNTS/
C          REBLDN
C          /AVAILTL/DISTR,
C          RBLDA
C          /RBLDNTL/
C          RBLDN
C          /CSCHED/
C          RBLDMS
C          /COST/BASECST, TRANSP
DATA REPT1, REPT2/1HN, 2HNO/
C
111 CONTINUE
CALL ZEROS
CALL READER
CALL DEFICT
CALL REBILDS
CALL REQMNTS (REBLDA, REBLDN, CDEF)
CALL AVAILTL (REBLDA, REBLDN)
C          AVAILTL CALLS RBLDNTL
CALL CSCHED (RBLDN, ENGG, RBLDMS)
CALL COST (RBLDMS)
C          COST CALLS MATRCES
WRITE(6,1)
1 FORMAT(" ANOTHER RUN? ('N' OR 'NO' FOR NO) ")
READ(5,2) REPT
2 FORMAT(A10)
IF (REPT.NE.REPT1.AND.REPT.NE.REPT2) GOTO 111
STOP
END
C*****EOP

```

```
C*****EOF  
SUBROUTINE ZEROS  
DIMENSION REBLN(5,3)  
COMMON/REQMNTS/REBLN  
DO 111 I=1,15  
REBLN(I)=0.  
111 CONTINUE  
RETURN  
END
```

C*****

SUBROUTINE READER

INTEGER TAPE

REAL NO

LOGICAL RANDOM, TAPES

COMMON /DEFICT/ROTL,MO(5),SERV(5),UNSRV(5),BO(5),

C PIPE(5),OTH(5),DEF(5),CDEF(5),DEM(5),SUP(5),

C POTG,YRLY(5) /REBILDS/CURSTR,ENGL,VEHWOR(5),

C YEWESS(5),REBLDA(5),ENGG /REQNNTS/REBLDN(5,3)

C /AVAILTL/DISTR(3),RBLDA(5,3) /RBLINTL/

C RBLDN(5,3) /CSCHED/RBLINS(5,3)

C /COST/BASECST(3),TRANSP(3)

NAMELIST/NAMEALL/BO,PIPE,MO,OTH,SERV,UNSRV,POTL,

N VEHWOR,DISTR,CURSTR,ENGL,BASECST,TRANSP

DATA REPT1,REPT2/1HN,2HNO/

C

111 WRITE(6,1)

1 FORMAT(" RANDOM READ?('N' OR 'NO' FOR NO)= ")

READ(5,2)REPT

2

FORMAT(A10)

RANDOM=.FALSE.

IF (REPT1.NE.REPT.AND.REPT2.NE.REPT)RANDOM=.TRUE.

WRITE(6,3)

3

FORMAT(" TAPE(INTEGER)=? ")

READ(5,*)TAPE

TAPES=TAPE.EQ.5

IF ((RANDOM.AND.TAPES).OR.(.NOT.RANDOM.AND..NOT.TAPES))

L GOTO 122

WRITE(6,4)RANDOM,TAPE

4

FORMAT(" RANDOM=",L1," AND TAPE=",I2," NOT PERMITTED"/

4 " RE-ENTER...")

GOTO 111

122

IF (RANDOM)GOTO 133

REWIND TAPE

READ(TAPE,NAMEALL)

GOTO 144

133

WRITE(6,5)

5

FORMAT(" ENTER VALUES INTO NAMELIST \$NAMEALL"/

READ(TAPE,NAMEALL)

144

RETURN

END

C*****

```

C*****
SUBROUTINE DEFICT
REAL MO,MOPERYR
LOGICAL CDEFNEG
DIMENSION MO(5),SERU(5),UNSRU(5),BO(5),PIPE(5),OTH(5),
D          DEF(5),CDEF(5),DEM(5),SUP(5),YRLY(5),MOPERYR(5)
COMMON/DEFICT/ROTL,MO,SERU,UNSRU,BO,PIPE,OTH,
C          DEF,CDEF,DEM,SUP,ROTG,YRLY
DATA MOPERYR/4.0,4*12.0/

C
DEFI=0.0
ROTG=1.0-ROTL
DO 111 I=1,5
YRLY(I)=MO(I)*MOPERYR(I)
RECOVER=YRLY(I)*ROTG
SUP(I)=SERU(I)+UNSRU(I)+RECOVER
DEM(I)=BO(I)+PIPE(I)+YRLY(I)+OTH(I)
DEF(I)=DEM(I)-SUP(I)
CDEF(I)=DEF(I)+DEFI
CDEFNEG=CDEF(I).LT.0.0
DEFI=0.0
IF(CDEFNEG)DEFI=CDEF(I)
IF(CDEFNEG)CDEF(I)=0.0
111 CONTINUE
RETURN
END
C*****

```

```
C*****
SUBROUTINE REBILDS
DIMENSION UEHWR(5), REBLDA(5), YEXESS(5)
COMMON/REBILDS/CURSTR, ENGL, UEHWR,
C          YEXESS, REBLDA, ENGG
C
ENGG=1.0-ENGL
DO 111 I=1,5
YEXESS(I)=CURSTR*UEHWR(I)
REBLDA(I)=YEXESS(I)*ENGG
CURSTR=CURSTR-YEXESS(I)
111 CONTINUE
RETURN
END
C*****
```

```

C*****
SUBROUTINE REQMNTS(REBLDA,REBLN,CDEF)
DIMENSION REQ(5),CDEF(5),REBLDA(5),REBLN(5,3)
C
  I=1
100 REQ(I)=CDEF(I)
  II=1
111 IF(REQ(II).GT.REBLDA(II))GOTO 133
  REBLN(II,1)=REQ(II)
122 IF(I.EQ.5)GOTO 155
  I=I+1
  GOTO 100
133 REBLN(II,1)=REBLDA(II)
  SHORT=REQ(II)-REBLDA(II)
  REQ(II)=REBLDA(II)
  IF(II.EQ.1)GOTO 144
  II=II-1
  REQ(II)=REQ(II)+SHORT
  GOTO 111
144 WRITE(6,1)I,SHORT
1   FORMAT(" WARNING: NEEDS FOR",I2,"TH YEAR CANNOT BE MET"/
1     F6.0," REBUILDABLES SHOULD BE MADE AVAILABLE.")
  GOTO 122
155 RETURN
  END
C*****

```

C*****

```
SUBROUTINE AVAILTL (REBLDA, REBLDN)  
DIMENSION DISTR(3), REBLDA(5), REBLDN(5,3), REBLDA(5,3)  
COMMON/AVAILTL/DISTR,  
C          REBLDA
```

C

```
DO 122 J=1,3  
DISTRIB=DISTR(J)  
DO 111 I=1,5  
    REBLDA(I, J)=REBLDA(I)*DISTRIB  
111    CONTINUE  
    CALL RBLINTL (REBLDA, REBLDN, J)  
122    CONTINUE  
    RETURN  
    END
```

C*****

```

C*****
SUBROUTINE RBLDNTL(RBLDA,REBLDN,J)
DIMENSION RBLDA(5,3),REBLDN(5,3),REBLDN(5,3)
COMMON/RBLDNTL/REBLDN
C
      I=1
100  II=I
111  IF (REBLDN(II,J).GT.RBLDA(II,J))GOTO 133
      REBLDN(II,J)=REBLDN(II,J)
122  IF (I.EQ.5)GOTO 155
      I=I+1
      GOTO 100
133  REBLDN(II,J)=RBLDA(II,J)
      SHORT=REBLDN(II,J)-RBLDA(II,J)
      REBLDN(II,J)=RBLDA(II,J)
      IF (II.EQ.1)GOTO 144
      II=II-1
      REBLDN(II,J)=REBLDN(II,J)+SHORT
      GOTO 111
144  REBLDN(I,J+1)=SHORT
      GOTO 122
155  RETURN
      END
C*****

```

```

C*****
SUBROUTINE CSCHED (RBLIN, ENGG, RBLINS)
INTEGER RBLINS
DIMENSION RBLIN(5,3), RBLINS(5,3)
IYR=1976
WRITE(6,1)
1  FORMAT(1//" FY",10X,"DISTRIB OF CANNIB REQNTS"/
C      13X,"U.S.    EUROPE    PACIFIC"/)
DO 122 I=1,5
IYR=IYR+1
DO 111 J=1,3
RBLINS(I,J)=AINT(5.0001E-1+RBLIN(I,J)/ENGG)
111  CONTINUE
WRITE(6,2) IYR, (RBLINS(I,J), J=1,3)
2  FORMAT(15,8X,3(16,2X))
122 CONTINUE
RETURN
END
C*****

```

```

C*****
SUBROUTINE COST(RBLDMS)
INTEGER RBLDMS
REAL LOC,LOCDIFF
DIMENSION BASECST(3),TRANSP(3),ESCFACT(5),LOCDIFF(3,3),
D          RBLDMS(5,3),COSTS(5,3,3)
COMMON/COST/BASECST,TRANSP
DATA LOCDIFF/2*(1.0,1.136,1.250),3*0.0/,
D      ESCFACT/1.0750,1.1385,1.1943,1.2433,1.2906/
C
DO 100 J=1,3
LOCDIFF(J,3)=TRANSP(J)
100 CONTINUE
TOTAL=0.0
DO 133 K=1,3
UNITCOS=BASECST(K)
DO 122 J=1,3
LOC=LOCDIFF(J,K)
DO 111 I=1,5
COSTS(I,J,K)=ESCFACT(I)*RBLDMS(I,J)*LOC*UNITCOS
TOTAL=TOTAL+COSTS(I,J,K)
111 CONTINUE
122 CONTINUE
133 CONTINUE
CALL MATRCES(COSTS,TOTAL)
RETURN
END
C*****

```

```
SUBROUTINE MATRICES(COSTS,TOTAL)
REAL LOC,LOCDIFF
DIMENSION COSTS(5,3,3),WORDS(5,3),COSTLOC(3),IYR(5)
DATA IYR/1977,1978,1979,1980,1981/
D   WORDS/10ENGINE REM,10HOVAL COST ,7MATRIX:,2*1H ,
D   10HPREPARATIO,10HN-FOR-TRAN,10HSPORTATION,
D   10H COST MATR,3HIX:,
D   10ENGINE TRA,10HNSPORTATIO,10HN COST MAT,
D   4HRIX:,1H /
DO 111 K=1,3
WRITE(6,1) (WORDS(J,K),J=1,5)
1  FORMAT(///1X,5A10//)
WRITE(6,2)
2  FORMAT(" FY",20X,"LOCATION"//17X,"U.S.   EUROPE   PACIFIC"//)
WRITE(6,3) ((IYR(I), (COSTS(I,J,K),J=1,3)),I=1,5)
3  FORMAT(5(I5,6X,3(2X,F8.0)//)
111 CONTINUE
C
WRITE(6,4)
4  FORMAT(///" MATRIX OF COSTS WITH RESPECT TO TIME & ",
" LOCATION:"//)
WRITE(6,2)
DO 144 I=1,5
DO 133 J=1,3
COSTLOC(J)=0.0
DO 122 K=1,3
COSTLOC(J)=COSTLOC(J)+COSTS(I,J,K)
122 CONTINUE
133 CONTINUE
WRITE(6,5) IYR(I),COSTLOC
5  FORMAT(I5,6X,3(2X,F8.0))
144 CONTINUE
WRITE(6,6) TOTAL
6  FORMAT(///" TOTAL COST FOR THE ENTIRE OPERATION IS $",
F8.0///)
RETURN
END
```

GAS ENGINES

C*****

\$NAMEALL BO=450.,4*0.,PIPE=156.,4*0.,MO=5*39.,
 OTH=5*0.,SERU=222.,4*0.,UNSRU=518.,4*0.,ROTL=0.325,
 UEHWOP=0.13,2*0.02,0.15,0.0,DISTR=0.85,0.13,0.02,
 CURSTR=6752.,ENGL=0.325,BASECST=51.68,21.05,144.53,
 TRANSP=1.0,1.474,1.673*

C*****

DATA FOR
 CALCULATION OF
 GAS ENGINES
 (FILE "GAS")

FY	DISTRIB OF GANNIB REOMNTS		
	U.S.	EUROPE	PACIFIC
1977	180	0	0
1978	180	0	0
1979	98	0	0
1980	451	0	0
1981	0	0	0

ENGINE REMOVAL COST MATRIX:

FY	LOCATION		
	U.S.	EUROPE	PACIFIC
1977	7222.	0.	0.
1978	5984.	0.	0.
1979	6049.	0.	0.
1980	28978.	0.	0.
1981	0.	0.	0.

PREPARATION-FOR-TRANSPORTATION COST MATRIX:

FY	LOCATION		
	U.S.	EUROPE	PACIFIC
1977	2942.	0.	0.
1978	2397.	0.	0.
1979	2464.	0.	0.
1980	11903.	0.	0.
1981	0.	0.	0.

GAS ENGINES (Contd)

ENGINE TRANSPORTATION COST MATRIX:

FY	LOCATION		
	U.S.	EUROPE	PACIFIC
1977	20198.	0.	0.
1978	16455.	0.	0.
1979	16916.	0.	0.
1980	81042.	0.	0.
1981	0.	0.	0.

MATRIX OF COSTS WITH RESPECT TO TIME & LOCATION:

FY	LOCATION		
	U.S.	EUROPE	PACIFIC
1977	30362.	0.	0.
1978	24735.	0.	0.
1979	25428.	0.	0.
1980	121824.	0.	0.
1981	0.	0.	0.

TOTAL COST FOR THE ENTIRE OPERATION IS \$ 202349.

MULTIFUEL ENGINES

C*****

\$NAMEALL BO=330,4*0.,PTPF=468.,4*0.,MO=5*117.,
 OTH=5*0.,SERU=153.,4*0.,UNSRU=856.,4*0.,
 ROTL=0.37,VEHMR=5*0.02,DISTR=0.67,0.24,0.09,CURSTR=8323,
 ENGL=0.37,BASECST=47.84,21.05,184.63,TRANSP=1.0,1.474,1.673\$

DATA FOR
 CALCULATION OF
 MULTIFUEL
 ENGINES
 (FILE"MULTI")

C*****

WARNING: NEEDS FOR 2TH YEAR CANNOT BE MET
 274. REBUILDABLES SHOULD BE MADE AVAILABLE.
 WARNING: NEEDS FOR 3TH YEAR CANNOT BE MET
 419. REBUILDABLES SHOULD BE MADE AVAILABLE.
 WARNING: NEEDS FOR 4TH YEAR CANNOT BE MET
 421. REBUILDABLES SHOULD BE MADE AVAILABLE.
 WARNING: NEEDS FOR 5TH YEAR CANNOT BE MET
 423. REBUILDABLES SHOULD BE MADE AVAILABLE.

FY	DISTRIB OF CANNIB REOMNTS		
	U.S.	EUROPE	PACIFIC
1977	112	40	15
1978	109	39	15
1979	107	38	14
1980	105	38	14
1981	103	37	14

ENGINE REMOVAL COST MATRIX:

FY	LOCATION		
	U.S.	EUROPE	PACIFIC
1977	5760.	2337.	964.
1978	5937.	2413.	1021.
1979	6113.	2466.	1000.
1980	6245.	2568.	1041.
1981	6359.	2595.	1080.

PREPARATION-FOR-TRANSPORTATION COST MATRIX:

FY	LOCATION		
	U.S.	EUROPE	PACIFIC
1977	2534.	1028.	424.
1978	2612.	1062.	449.
1979	2690.	1085.	440.

MULTIFUEL ENGINES (Contd)

BEST AVAILABLE COPY

ENGINE TRANSPORTATION COST MATRIX:

FY	LOCATION		
	U.S.	EUROPE	PACIFIC
1977	22229.	11702.	4981.
1978	22912.	12084.	5275.
1979	23594.	12351.	5165.
1980	24103.	12858.	5377.
1981	24543.	12996.	5581.

MATRIX OF COSTS WITH RESPECT TO TIME & LOCATION:

FY	LOCATION		
	U.S.	EUROPE	PACIFIC
1977	30524.	15067.	6369.
1978	31461.	15558.	6746.
1979	32397.	15903.	6604.
1980	33096.	16555.	6875.
1981	33701.	16733.	7137.

TOTAL COST FOR THE ENTIRE OPERATION IS \$ 274727.