

12

AD

REPORT NO. M 3/77

PREDICTING ENERGY EXPENDITURE WITH LOADS
WHILE STANDING OR WALKING VERY SLOWLY

U S ARMY RESEARCH INSTITUTE
OF
ENVIRONMENTAL MEDICINE
Natick, Massachusetts

October 1976

DISTRIBUTION STATEMENT A

Approved for public release

Distribution unlimited

DDC
RECEIVED
DEC 14 1977
F



Approved for public release; distribution unlimited.

UNITED STATES ARMY
MEDICAL RESEARCH & DEVELOPMENT COMMAND

AD No. _____
DDC FILE COPY

AD A 047699

The findings in this report are not to be construed as an official Department of the Army position, unless so designated by other authorized documents.

DDC AVAILABILITY NOTICE

Qualified requesters may obtain copies of this report from Commander, Defense Documentation Center (DDC) (formerly ASTIA), Cameron Station, Alexandria, Virginia 22314.

DISPOSITION INSTRUCTIONS

Destroy this report when no longer needed.
Do not return to the originator.

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER M 3/77	2. GOVT ACCESSION NO. (14) USARIEM-M-3/77	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) Predicting energy expenditure with loads, while standing, or walking very slowly,		5. TYPE OF REPORT & PERIOD COVERED
7. AUTHOR(s) (10) K.B. Pandolf, B. Givoni R.F. Goldman		6. PERFORMING ORG. REPORT NUMBER
9. PERFORMING ORGANIZATION NAME AND ADDRESS USA Research Institute of Environmental Medicine Natick, MA 01760		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS (16) 3E762777AB45
11. CONTROLLING OFFICE NAME AND ADDRESS Same as 9. above		12. REPORT DATE October 1976 (11) 22 Nov 76
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		13. NUMBER OF PAGES 23 (12) 9p.
16. DISTRIBUTION STATEMENT (of this Report) Unlimited		15. SECURITY CLASS. (of this report) UNCLAS
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) energy expenditure; work; load carriage; human efficiency; surface effects; walking; standing		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) Previously we presented a formula to predict metabolic rate (M) for walking and load carrying; it could not be used for walking speeds below 0.7 m/s (2.5 km/hr). Six men each carried loads of 32, 40 and 50 kg while walking at 1.0, 0.8, 0.6, 0.4 and 0.2 m/s, to extend the range of speed down to the standstill level. Metabolic cost of standing with 0, 10, 30 or 50 kg backpacks was also investigated in 10 men to evaluate the energy expenditure of (CONT'D)		

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

load carriage while standing. Energy expenditure increased with external load, both standing and walking. No increased inefficiency occurred with very slow walking; M decreased smoothly as speed approached zero. The revised predictive formula, empirically derived, which now covers standing and the whole range of walking speeds, has the form: *is presented*

$$M = 1.5W + 2.0(W + L) (L/W)^2 + \eta (W + L) [1.5V^2 + 0.35VG]$$

where: M = metabolic rate, watt; W = subject weight, kg; L = load carried, kg; V = speed of walking, m/s; G = grade, %; η = terrain factor ($\eta = 1.0$ for treadmill). The new formula not only extends the range of application but also allows an adjustment for load as a function of body weight and permits easier calculation of energy expenditure.

ACCESSION for	
NTIS	White Section ☒
DDC	Buff Section ☐
UNANNOUNCED	☐
DISTRIBUTION/AVAILABILITY CODES	
SIAL	
A/20	

UNCLASSIFIED

Predicting energy expenditure with loads while standing or walking very slowly

K. B. PANDOLF, B. GIVONI, AND R. F. GOLDMAN

US Army Research Institute of Environmental Medicine, Natick, Massachusetts 01760

PANDOLF, K. B., B. GIVONI, AND R. F. GOLDMAN. *Predicting energy expenditure with loads while standing or walking very slowly*. J. Appl. Physiol.: Respirat. Environ. Exercise Physiol. 43(4): 577-581, 1977. — Previously we presented a formula to predict metabolic rate (M) for walking and load carrying; it could not be used for walking speeds below $0.7 \text{ m} \cdot \text{s}^{-1}$ ($2.5 \text{ km} \cdot \text{h}^{-1}$). In this study, six men each carried backpack loads of 32, 40 and 50 kg while walking at 1.0, 0.8, 0.6, 0.4, and $0.2 \text{ m} \cdot \text{s}^{-1}$, to extend the range of speed down to the standstill level. Metabolic cost of standing with 0-, 10-, 30-, or 50-kg backpacks was also investigated in 10 men to evaluate the energy expenditure of load carriage while standing. Energy expenditure increased with external load, both standing and walking. No increased inefficiency occurred with very slow walking; M decreased smoothly as speed approached zero. The revised predictive formula which now covers standing and the whole range of walking speeds, has the form

$$M = 1.5W + 2.0(W + L)(L/W)^2 + \eta(W + L)[1.5V^2 + 0.35VG]$$

where M = metabolic rate, watts; W = subject weight, kg; L = load carried, kg; V = speed of walking, $\text{m} \cdot \text{s}^{-1}$; G = grade, %; η = terrain factor ($\eta = 1.0$ for treadmill). The new formula not only extends the range of application but also allows an adjustment for load as a function of body weight and permits easier calculation of energy expenditure.

work; load carriage; human efficiency; surface effects

PREVIOUS WORK at this Institute led to a formula to predict the energy expenditure of walking, taking into account body weight (W), external load carried (L), walking speed (V), the nature of the terrain (η), and the walking grade (G) in percent (11). The applicability and precision of this formula was evaluated for a variety of natural terrains (19) and compared against measured energy expenditure values in the literature (3, 7, 13). As originally developed, the formula had a lower limit of walking speed of $0.7 \text{ m} \cdot \text{s}^{-1}$ ($2.5 \text{ km} \cdot \text{h}^{-1} \approx 1.5 \text{ mph}$). This limit is seldom reached while an individual is walking under normal conditions, but during a study for developing terrain coefficients for deep snow with a load (16), subjects became exhausted in less than 15 min while walking at even slower speeds. Additionally, the question of the cost of simply standing with a load had not, to our knowledge, been addressed. It seemed appropriate to investigate whether the zero intercept of the prediction equation for energy expenditure walking (i.e., standing still), as a function of total body weight,

was simply an extension of the prediction curve for slow speed walking or, in fact, had to be adjusted for the dynamics of moving the load. Accordingly, studies of walking at very slow speeds and of standing with backpack loads were carried out and a new formula was developed which included the total range of walking speeds from standing.

METHODS

A study was conducted in which six fit, adult male subjects walked for 15 min with each of 15 speed/load combinations. These subjects had an average age (mean $\pm$ SE) of 20.0 ± 0.8 yr; height, 175.0 ± 1.9 cm; weight (nude), 78.2 ± 1.6 kg; and body fat, $18.0 \pm 1.2\%$ determined by the method of Durnin and Womersley (8). The external backpack loads were 32, 40, and 50 kg while the walking speeds were 0.2, 0.4, 0.6, 0.8, and $1.0 \text{ m} \cdot \text{s}^{-1}$. After walking for 5 min, the subjects were assumed to be in a steady state and three 2-min expired air samples were collected in Douglas bags, from the 5-7th, 9-11th, and 13-15th min. The subjects' stride lengths were not regulated. The experimenter pushed a cart ahead of the subject; the cart held a metronome and the Douglas bags. Distance interval markings were taped on the floor so that the pacer (experimenter) could maintain the specified speed nearly constant by keeping pace with the calibrated metronome.

In a second study, 10 different male subjects were asked to stand for 20 min on 4 different occasions to determine the energy expenditure of standing with 0-, 10-, 30-, and 50-kg external backpack loads. These subjects had an average age (mean $\pm$ SE) of 29.1 ± 3.0 yr; height, 176.5 ± 1.8 cm; weight (nude), 78.4 ± 3.8 kg; and body fat, $19.0 \pm 2.1\%$ (8). The order of load presentation was randomized for each subject. Three 3-min expired air samples were collected, from the 5-8th, 11-14th, and 17-20th min. Two technicians were available to lift the various external backpack loads onto each subject's back while he remained in the standing position. Because of the amount of weight carried, foam rubber padding was placed under the shoulder straps of the backpack and between the backpack and small of the back to alleviate some of the discomfort.

In both studies, the O_2 and CO_2 concentrations were analyzed with Beckman E_2 and LB-1 analyzers, respectively. Periodically, expired air samples were checked by micro-Scholander analyses. Expired air volume was measured in a Collins Chain Compensated Gasometer.

Energy expenditure was calculated by the method of Weir (20). Since there proved to be no statistically significant differences between the three expired air samples within each test condition, values were accepted as steady state and the average energy expenditure used for a given test condition for each subject.

RESULTS

Table 1 illustrates the mean energy expenditure in $W \cdot \text{kg}^{-1}$ (body weight + load) of the six subjects for all three external loads at each of the slow walking speeds. The differences between loads barely reach a statistically significant level ($P < 0.06$) but the differences between speeds are all statistically significant ($P < 0.05$). This differs from our findings at higher velocities where the energy cost, when expressed as $W \cdot \text{kg}^{-1}$, is independent of weight (10, 11). Table 2 displays the mean total energy expenditure, in watts, for standing with each external load. The differences between loads are statistically significant ($P < .01$) except between no load and the 10-kg condition.

Formula of the new model. The data from these studies of the energy expenditure of slow walking and standing have been incorporated into an equation along with energy expenditure values from earlier studies at higher walking speeds (10, 12, 18). Most of the assumptions concerning body weight, external load, speed, and grade relationships utilized in the previous prediction formula (11) were used in the new model. The theoretical model from which the new predictive formula has been developed consists of four components.

1) A metabolic cost for standing without load (M_1); this is proportional to the weight of the body and is calculated as 1.5 watts per kilogram of body weight ($M_1 = 1.5W$).

2) A metabolic cost of load bearing while standing (M_2); this is affected by the total weight (subject + load) and is fitted as a function of the load to weight ratio squared ($M_2 = 2.0(W + L)(L/W)^2$).

3) A metabolic cost for walking on the level (M_3); this is related to a specific terrain (η), considers total weight moved, and is a function of the speed squared ($M_3 = \eta(W + L)(1.5V^2)$).

TABLE 1. Mean energy expenditure for slow walking with all three external loads

	Speed, $\text{m} \cdot \text{s}^{-1}$				
	0.2	0.4	0.6	0.8	1.0
Energy expenditure, $W \cdot \text{kg}^{-1}$	2.15 ± 0.06	2.57 ± 0.06	2.93 ± 0.07	3.38 ± 0.08	3.97 ± 0.13

Values are means $\pm$ SE; kg = body weight + external load.

TABLE 2. Mean energy expenditure for standing with three external loads

	No load	External Load		
		10 kg	20 kg	30 kg
Energy expenditure, W	105.6 ± 6.2	108.8 ± 6.4	124.2 ± 4.5	144.3 ± 7.5

Values are means $\pm$ SE.

4) A metabolic cost for climbing a grade (M_4); this again considers a specific terrain (η) and total weight, and is a linear function of the speed and grade ($M_4 = \eta(W + L)(0.35VG)$). However, this component needs further validation at speeds less than $0.7 \text{ m} \cdot \text{s}^{-1}$.

Thus, the analysis of the studies cited above which considered these four components, led to the revised prediction formula

$$M = 1.5W + 2.0(W + L)(L/W)^2 + \eta(W + L)[1.5V^2 + 0.35VG]$$

where M = metabolic rate, watts; W = subject weight, kg; L = external load, kg; V = speed of walking, $\text{m} \cdot \text{s}^{-1}$; G = grade (slope), %; and η = terrain coefficient ($\eta = 1.0$ for treadmill). The prediction from this formula can be compared to the previous formula (11) and comparisons made with previously measured energy expenditure values.

Since the old energy expenditure prediction formula (11) was compared to experimental studies of many different investigators (2, 3, 6, 7, 10, 13, 17, 21), using different subjects walking at different speeds, grades and carrying different loads, it seems appropriate to compare the new formula to the old one. Figure 1 compares the new and old formulas for predicted energy expenditure (M) at various walking speeds (V) and grades (G), for a 70-kg individual carrying no load while walking on a treadmill. Differences in energy expenditure between formulas at equivalent grades are very small, with the greatest differences being at the higher grades (i.e., 16 and 24%). Also, there is some deviation between formulas near the lower predictive limit ($0.7 \text{ m} \cdot \text{s}^{-1}$) of the old formula.

Figure 2 compares these two predictive formulas for the same individual carrying a 30-kg external load. Differences in predicted energy expenditure between formulas are even smaller than in Fig. 1. The importance of external load carried (L) is illustrated by the elevated intercept (standing energy expenditure) associated with the external load carried. This intercept can be compared with the intercept displayed in Fig. 1 and can be accounted for by the M_2 component of the new formula.

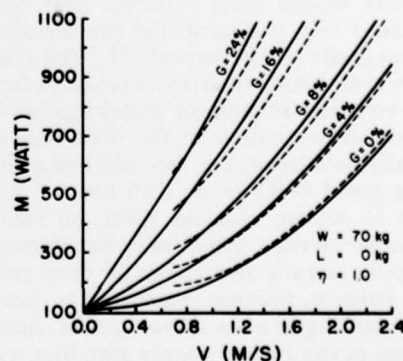


FIG. 1. Comparison of new (solid line) and old (dashed line) (11) prediction formulas for energy expenditure of an individual weighing 70 kg, while walking carrying no external load and considering the entire range of walking speeds and various grade elevations.

Figure 3 displays a direct comparison of predicted energy expenditure for walking at various grades, for an individual weighing 70 kg but carrying an external load of 40 kg compared to no external load. Notice the difference between intercepts (standing) for these different external load conditions. This difference can again be accounted for by the M_2 component of the new formula; the actual energy expenditure curve conformations are derived primarily from the M_3 and M_4 components of the new predictive formula. It is interesting to note the nearly equivalent energy expenditures for walking up an 8% grade carrying 40 kg and carrying no load up a 16% grade.

The validity of the new predictive formula was checked by comparing the predicted with the measured energy expenditures in the study of Goldman and Iampietro (10). The walking speed ($0.7\text{--}1.8\text{ m}\cdot\text{s}^{-1}$), load carried ($10\text{--}30\text{ kg}$), and percent grade ($3\text{--}9\%$) offered a wide range of energy expenditure values. The correlation coefficient (r) between the predicted and measured values is presented in Fig. 4. This coefficient ($r = 0.96$) is identical to that calculated and presented from the old formula (11).

The type of surface is known to affect the measured energy expenditures. Previously, a variety of terrain

coefficients were derived to allow for more accurate prediction of energy expenditure considering the walking surface (16, 19). Single coefficients were found to fit all measured values except for soft snow. The coefficient for soft snow was found to increase as the snow footprint depth increased ($\eta = 1.3 + 0.08\text{ cm depression}$). Predicted energy expenditure (M) as a function of walking speed (V) for various level terrains is illustrated in Fig. 5. Whereas firm walking surfaces appear to alter the terrain coefficients only slightly ($\eta = 1.0\text{--}1.5$), surfaces which allow penetration (i.e., swamp bog, loose sand, and soft snow of different depths) alter the coefficients much more dramatically. Walking on loose sand ($\eta = 2.1$) is twice as costly (metabolically) as on a blacktop surface or treadmill, while traversing soft snow with a footprint depth of 35 cm is approximately four times more demanding compared to blacktop or treadmill.

DISCUSSION

The energy expenditure of walking may vary within wide individual limits and also vary for a given individual depending on a number of factors. It certainly depends on total weight (body weight and external load), walking speed, type of surface, and grade (1, 11). Ideally, prediction of energy expenditure should encompass the entire range of walking speeds from standing. The upper limit for walking speed has been shown to be approximately $8.5\text{ km}\cdot\text{h}^{-1}$ ($\approx 2.4\text{ m}\cdot\text{s}^{-1}$); at greater walking speeds, the efficiency of walking becomes lower than running (14, 15). Obviously, such individuals as champion race walkers would display a higher upper limit for walking speed (23).

The lower limit for walking ($0.7\text{ m}\cdot\text{s}^{-1}$) of the old predictive formula (11) was taken because of a lack of available predictive data below that point and recogni-

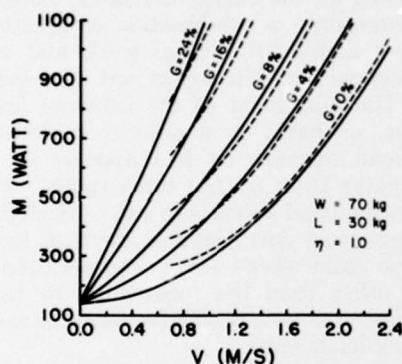


FIG. 2. Comparison of new (solid line) and old (dashed line) (11) prediction formulas for energy expenditure of an individual (70 kg), while walking carrying a 30-kg external load, at various grades throughout the entire range of walking speeds.

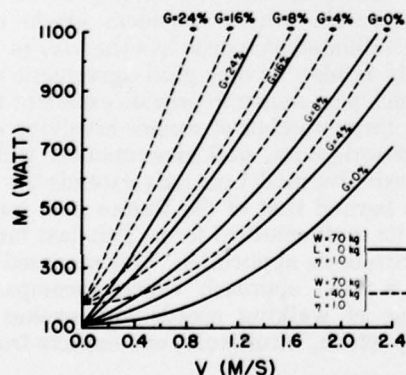


FIG. 3. New formula predictions for the energy expenditure of walking comparing an individual weighing 70 kg, carrying either no load or a 40-kg external load from standing through the entire range of walking speeds and at various grades.

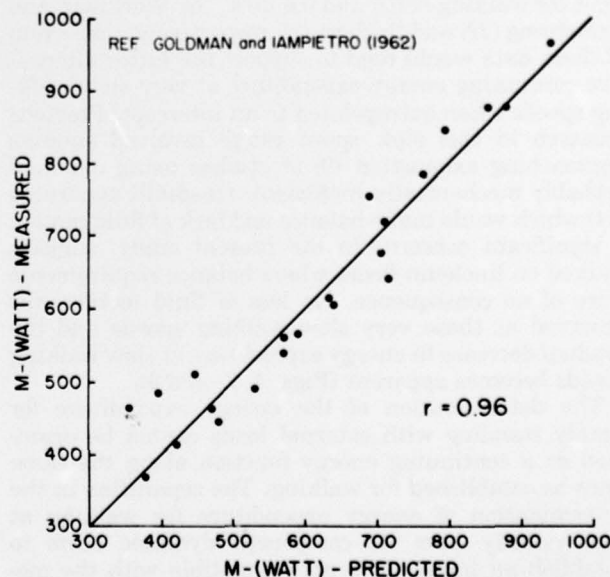


FIG. 4. Measured and predicted energy expenditure for walking at various speeds ($0.7\text{--}1.8\text{ m}\cdot\text{s}^{-1}$), external loads ($10\text{--}30\text{ kg}$), and grade elevations ($3\text{--}9\%$). Reference is to work by Goldman and Iampietro (10).

REFERENCES

1. ÅSTRAND, P. O., AND K. RODAHL. *Textbook of Work Physiology*. New York: McGraw, 1970.
2. BELDING, H. S., H. D. RUSSELL, R. C. DARLING, AND G. E. FOLK. *Effect of Moisture in Clothing Requirements in Cold Weather*. Harvard Fatigue Laboratory, OQMG Rept. 37, Oct 1945.
3. BOBBERT, A. C. Energy expenditure in level and grade walking. *J. Appl. Physiol.* 15: 1015-1021, 1960.
4. CATHCART, E. P., N. V. LOTHIAN, AND M. GREENWOOD. A note on the rate of marching and the expenditure of energy in man. *J. Roy. Army Med. Corps* 34: 297-305, 1920.
5. COTES, J. E., AND F. MEADE. The energy expenditure and mechanical efficiency demand in walking. *Ergonomics* 3: 97-119, 1960.
6. DANIELS, F., JR., J. H. VANDERBIE, AND F. R. WINSMANN. *Energy Cost of Treadmill Walking Compared to Road Walking*. Natick, Mass.: US Army Quartermaster Center, EPD Rept. 220, 1953.
7. DURNIN, J. V. G. A., AND R. PASSMORE. *Energy, Work and Leisure*. London: Heinemann, 1967.
8. DURNIN, J. V. G. A., AND J. WOMERSLEY. Body fat assessed from total body density and its estimate from skinfold thickness: measurements on 481 men and women aged 16-72 years. *Brit. J. Nutr.* 32: 77-97, 1974.
9. GOLDMAN, R. F. Energy cost of soldiers performing combat type activities. *Ergonomics* 8: 321-327, 1965.
10. GOLDMAN, R. F., AND P. F. IAMPIETRO. Energy cost of load carriage. *J. Appl. Physiol.* 17: 675-676, 1962.
11. GIVONI, B., AND R. F. GOLDMAN. Predicting metabolic energy cost. *J. Appl. Physiol.* 30: 429-433, 1971.
12. HUGHES, A. L., AND R. F. GOLDMAN. Energy cost of "hard work." *J. Appl. Physiol.* 29: 570-572, 1970.
13. KNUTTGEN, H. G. Oxygen uptake and pulse rate while running with undetermined and determined stride length at different speeds. *Acta Physiol. Scand.* 52: 366-371, 1961.
14. MARGARIA, R. Sulla fisiologia e specialmente sul consumo energetico della marcia e della corsa a varie velocità ed inclinazioni del terreno. *Atti Reale Accad. Naz. Lincei* 7: 299-368, 1938.
15. MARGARIA, R., P. CERRETELLI, P. AGHEMO, AND G. SASSI. Energy cost of running. *J. Appl. Physiol.* 18: 367-370, 1963.
16. PANDOLF, K. B., M. F. HAISMAN, AND R. F. GOLDMAN. Metabolic energy expenditure and terrain coefficients for walking on snow. *Ergonomics* 19: 683-690, 1976.
17. RUSSELL, H. D., AND H. S. BELDING. *Metabolic Cost of Wearing Various Types of Footwear*. Harvard Fatigue Laboratory, Rept. 164, July 1946.
18. SOULE, R. G., AND R. F. GOLDMAN. Energy cost of loads carried on the head, hands or feet. *J. Appl. Physiol.* 27: 687-690, 1969.
19. SOULE, R. G., AND R. F. GOLDMAN. Terrain coefficients for energy cost prediction. *J. Appl. Physiol.* 32: 706-708, 1972.
20. WEIR, J. B. DE V. New methods for calculating metabolic rate with special reference to protein metabolism. *J. Physiol., London* 109: 1-9, 1949.
21. WINSMANN, F. R., AND F. DANIELS, JR. *Pack Carrying in the Desert*. Natick, Mass.: US Army Quartermaster Center, Tech. Rept. EP28, 1956.
22. WORKMAN, J. M., AND B. W. ARMSTRONG. Oxygen cost of treadmill walking. *J. Appl. Physiol.* 18: 798-803, 1963.
23. WYNDHAM, C. H., AND N. B. STRYDOM. Mechanical efficiency of a champion walker. *S. African Med. J.* 45: 551-553, 1971.

DISTRIBUTION LIST

5 copies to:

US Army Medical Research and Development Command
Washington, DC 20314

12 copies to:

Defense Documentation Center
ATTN: DDC-TCA
Alexandria, Virginia 22314

1 copy to:

Superintendent
Academy of Health Sciences, US Army
ATTN: AHS-COM
Fort Sam Houston, Texas 78234

1 copy to:

Dir of Biol & Med Sciences Div
Office of Naval Research
800 N. Quincy Street
Arlington, Virginia 22217

1 copy to:

CO, Naval Medical R&D Command
National Naval Medical Center
Bethesda, Maryland 20014

1 copy to:

Dir of Prof Svcs
Office of The Surgeon General
Department of the Air Force
Washington, DC 20314

1 copy to:

Director of Defense Research and Engineering
ATTN: Assistant Director (Environmental and Life Sciences)
Washington, DC 20301