

AD-A047 820

NAVAL RESEARCH LAB WASHINGTON D C

F/G 20/1

THE REFRACTION OF A PLANE SHOCK WAVE AT AN AIR-WATER INTERFACE.(U)

OCT 77 R A SKOP, J G SHOWALTER

UNCLASSIFIED

NRL-MR-3628

SBIE-AD-E000 066

NL

| OF |
AD
AD47820



END
DATE
FILMED
1 -78
DDC

AD-E 000066

(12) NW

NRL Memorandum Report 3628

AD A 047820

The Refraction of a Plane Shock Wave at an Air-Water Interface

RICHARD A. SKOP and J. GORDAN SHOWALTER
Applied Mechanics Branch
Ocean Technology Division

October 1977



NAVAL RESEARCH LABORATORY
Washington, D.C.

DDC
REFRIMED
DEC 22 1977
B

Approved for public release; distribution unlimited.

DDC FILE COPY

ade 0000

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER NRL Memorandum Report 3628	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) THE REFRACTION OF A PLANE SHOCK WAVE AT AN AIR-WATER INTERFACE,	5. TYPE OF REPORT & PERIOD COVERED Interim report on a continuing NRL problem.	
7. AUTHOR(s) Richard A. Skop and J. Gordan Showalter	6. PERFORMING ORG. REPORT NUMBER	
9. PERFORMING ORGANIZATION NAME AND ADDRESS Naval Research Laboratory Washington, D. C. 20375	8. CONTRACT OR GRANT NUMBER(s)	
11. CONTROLLING OFFICE NAME AND ADDRESS Naval Surface Weapons Center Explosives Division (WR-14) Silver Spring, Maryland 20910	10. PROGRAM ELEMENT PROJECT, TASK AREA & WORK UNIT NUMBERS NRL Problem F02-50 64363N, WR-134-801 WR14DA 801, B6B21-001	
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office) 12 16p. 14 NRL-MR-3628	12. REPORT DATE October 1977 13. NUMBER OF PAGES 15 15. SECURITY CLASS. (of this report) UNCLASSIFIED 15a. DECLASSIFICATION/DOWNGRADING SCHEDULE	
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited. 16 B6B35B 17 B6B35B		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report) 18 SBIE 19 AD-E000 066		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Shock wave Air blast Refraction Submarine Acoustics Water		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) The normal refraction at an air water interface of a plane shock wave incident through the air is considered. The perfect gas and Tait equations of state are used, respectively, to represent the thermodynamic properties of the air and water. For refracted pressures up to 1200 atmospheres, the calculations reveal that the in-water shock front and particle velocities and the changes in density differ by less than 10% from the in-water shock front and particle velocities and the changes in density predicted by acoustic theory. The calculations also show that, for (Continues)		

DD FORM 1 JAN 73 1473 EDITION OF 1 NOV 68 IS OBSOLETE
S/N 0102-014-6601

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

251 950

1B

20. Abstract (Continued)

a given incident shock, the ratio of the refracted pressure to the pressure reflected from a rigid wall remains above 96% for reflected pressures up to 1200 atmospheres. ←

ACCESSION for		
NTIS	White Section	☒
DDC	Buff Section	☐
UNANNOUNCED		☐
JUSTIFICATION _____		
BY _____		
DISTRIBUTION/AVAILABILITY CODES		
Dist.	AVAIL and/or	SPECIAL
A		

CONTENTS

INTRODUCTION	1
Jump Conditions Across a Shock	1
Mechanical Shock Conditions	2
Solution for Air	2
Solution for Water	3
Shock Refraction at an Air-Water Interface	3
Comparison Between the In-Water Shock Waves Obtained from Exact Shock and Acoustic Theories	6
Comparison Between the Refracted Pressure and the Pressure Reflected from a Rigid Wall	7
CONCLUSIONS	8

THE REFRACTION OF A PLANE SHOCK WAVE AT AN AIR-WATER INTERFACE

INTRODUCTION

The normal refraction at an air-water interface of a plane shock wave incident through the air is investigated. The purposes of this investigation are twofold:

- a. To define under what conditions the in-water shock front and particle velocities and the changes in density can be predicted by acoustic theory; and,
- b. To determine under what conditions the refracted pressure can be calculated by treating the interface as a rigid wall.

Jump Conditions Across A Shock

The jump conditions across a shock express the conservations of mass, momentum, and energy in a control volume enclosing the shock. From a reference frame moving with the shock, these conditions are given by [1]

$$\rho_a v_a = \rho_b v_b \quad (1a)$$

$$P_a + \rho_a v_a^2 = P_b + \rho_b v_b^2 \quad (1b)$$

$$e_a + \frac{P_a}{\rho_a} + \frac{v_a^2}{2} = e_b + \frac{P_b}{\rho_b} + \frac{v_b^2}{2} \quad (1c)$$

Here, the subscripts "a" and "b" refer to ahead of and behind the shock, respectively. The symbols ρ , P , e , and v denote, in order, the fluid density, pressure, specific internal energy, and relative velocity with respect to the shock.

The former three of these quantities cannot vary independently across the shock but are constrained to satisfy the equation of state of the fluid. For air, the perfect gas equation of state yields the relationship

$$e = P / [(\gamma - 1) \rho] \quad (2)$$

where γ is the ratio of specific heats. For water, the constraint is expressed by the Tait equation of state [2]

$$P = P_0 + B [(\rho / \rho_{wo})^n - 1] \quad (3a)$$

Here, ρ_{wo} is the water density at atmospheric pressure P_0 , n is a

Note: Manuscript submitted September 30, 1977.

dimensionless constant, and B is a second constant defined by

$$B = \rho_{wo} C_{wo}^2 / n \quad (3b)$$

where C_{wo} is the speed of sound in water under atmospheric conditions.

Mechanical Shock Conditions

Equation (1a) gives the condition

$$V_a = \eta V_b \quad (4)$$

where the shock compressibility factor η is defined by

$$\eta = \rho_b / \rho_a \quad (5)$$

Upon substitution of equation (4), equation (1b) yields

$$V_b^2 = (P_a / \rho_a) (y-1) [1 / \eta(\eta-1)] \quad (6)$$

where the pressure jump factor y is given by

$$y = P_b / P_a \quad (7)$$

Equations (4) and (6) are known as the mechanical shock conditions since they are independent of the fluid through which the shock is propagating. Other useful relations obtained directly from these conditions are

$$V_a^2 = (P_a / \rho_a) (y-1) [\eta / (\eta-1)] \quad (8a)$$

$$(V_a - V_b)^2 = (P_a / \rho_a) (y-1) [(\eta-1) / \eta] \quad (8b)$$

To proceed further, the thermodynamic properties of the medium through which the shock is moving must be considered.

Solution For Air

Equation (1c), which expresses conservation of energy across the shock, becomes, on utilizing the thermodynamic constraint defined by equation (2),

$$[\gamma / (\gamma-1)] (P_a / \rho_a) + V_a^2 / 2 = [\gamma / (\gamma-1)] (P_b / \rho_b) + V_b^2 / 2 \quad (9)$$

On substituting equations (6) and (8a) and dividing through by P_a/ρ_a equation (9) yields

$$\frac{\gamma}{\gamma-1} + \frac{\eta(\gamma-1)}{2(\eta-1)} = \left(\frac{\gamma}{\gamma-1} \right) \frac{\gamma}{\eta} + \frac{\gamma-1}{2\eta(\eta-1)} \quad (10)$$

Some simple algebraic manipulation of this equation gives the relation between the compressibility factor η and the pressure jump factor γ for an air shock as

$$\eta = (M-\gamma)/(1 + M\gamma) \quad (11a)$$

where

$$M = (\gamma-1)/(\gamma + 1) \quad (11b)$$

Solution for Water

For a water shock, the relation between η and γ is obtained directly from the Tait equation of state, equation (3a), as

$$\eta = [(\gamma + \beta) / (1 + \beta)]^{1/n} \quad (12a)$$

where

$$\beta = (B - P_o) / P_a \quad (12b)$$

Shock Refraction at an Air-Water Interface

The refraction at an air-water interface of a plane shock wave incident through the air is schematically illustrated in Figure 1.

From Figure 1, the relative velocities of the fluids as seen from the shocks can readily be ascertained. For the refracted water shock, these relative velocities are:

$$V_a = -U'' \quad (13a)$$

$$v_b = u_2 - U'' \quad (13b)$$

Hence,

$$U'' = -v_a \quad (14a)$$

$$u_2 = v_a - v_b \quad (14b)$$

On substituting from equations (8) and noting that $\rho_a = \rho_{wo}$ and $P_a = P_o$, the water shock and particle velocities are obtained as

$$U'' = \left\{ (P_o / \rho_{wo}) (y - 1) [\eta_w / (\eta_w - 1)] \right\}^{1/2} \quad (15a)$$

$$u_2 = \left\{ (P_o / \rho_{wo}) (y - 1) [(\eta_w - 1) / \eta_w] \right\}^{1/2} \quad (15b)$$

where

$$y = P_2 / P_o \quad (16)$$

The water shock compressibility factor η_w is found from equation (12a) as

$$\eta_w = \rho_{w2} / \rho_{w0} = \left[1 + n \alpha (y - 1) \right]^{1/n} \quad (17)$$

where

$$\alpha = P_0 / nB = P_0 / \rho_{w0} C_{w0}^2 \quad (18)$$

and where equation (12b) has been used to obtain

$$B = B/P_0 - 1 = 1/n \alpha - 1 \quad (19)$$

Similarly, for the incoming air shock, the shock front and particle velocities are calculated from equations (8) and (11a) as

$$U = \left\{ (P_0 / \rho_{a0}) \left[(x+M)/(1-M) \right] \right\}^{1/2} \quad (20a)$$

$$u_1 = (x-1) \left\{ (P_0 / \rho_{a0}) \left[(1-M)/(x+M) \right] \right\}^{1/2} \quad (20b)$$

where

$$x = P_1 / P_0 \quad (21)$$

For the refracted air shock, the relative velocities with respect to the shock are seen, from Figure 1, to be

$$v_a = u_1 - U' \quad (22a)$$

$$v_b = u_2 - U' \quad (22b)$$

Hence,

$$v_a - v_b = u_1 - u_2 \quad (23)$$

where u_1 and u_2 are given by equations (20b) and (15b), respectively. However, from equations (8b) and (11a), $v_a - v_b$ can also be written as

$$v_a - v_b = (z-1) \left\{ (P_1 / \rho_{a1}) \left[(1-M)/(z+M) \right] \right\}^{1/2} \quad (24a)$$

where

$$z = P_2 / P_1 = (P_2 / P_0) / (P_1 / P_0) = y/x \quad (24b)$$

Equation (23) then becomes, on substituting the appropriate expressions,

$$(z-1) \left(\frac{P_1}{\rho_{a1}} \right)^{\frac{1}{2}} \left(\frac{1-M}{z+M} \right)^{\frac{1}{2}} = (x-1) \left(\frac{P_0}{\rho_{a0}} \right)^{\frac{1}{2}} \left(\frac{1-M}{x+M} \right)^{\frac{1}{2}} - \left(\frac{P_0}{\rho_{w0}} \right)^{\frac{1}{2}} (y-1)^{\frac{1}{2}} \left(\frac{\eta_{w-1}}{\eta_w} \right)^{\frac{1}{2}} \quad (25)$$

where η_w is given by equation (17). Upon multiplying through by $(\rho_{a0}/P_0)^{\frac{1}{2}}$ substituting $z=y/x$, and noting from equation (11a) that

$$\rho_{a1}/\rho_{a0} = (M+x)/(1+Mx) \quad (26)$$

equation (25) yields

$$(y-x) \left[\frac{(1-M)(1+Mx)}{(y+Mx)(M+x)} \right]^{\frac{1}{2}} = (x-1) \left(\frac{1-M}{M+x} \right)^{\frac{1}{2}} - \left(\frac{\rho_{a0}}{\rho_{w0}} \right)^{\frac{1}{2}} (y-1)^{\frac{1}{2}} \left(\frac{\eta_{w-1}}{\eta_w} \right)^{\frac{1}{2}} \quad (27)$$

The solution of equation (27) gives the refracted pressure ratio $y (=P_2/P_0)$ in terms of the incoming pressure ratio $x (=P_1/P_0)$.

Comparison Between The In-Water Shock Waves Obtained From Exact Shock And Acoustic Theories

The process of shock refraction produces at the water surface a step change in pressure with a magnitude given by $P_2 - P_0 = P_0 (y-1)$. The response of the water, treated as a linear acoustic medium, to this step change in surface pressure is well known [3]. Retaining the previous notation and denoting values predicted by acoustic theory with a superscript "*", the propagation velocity U''^* of the step (shock front) into the water is given by

$$U''^* = C_{w0} \quad (28)$$

Behind this front, the water particle velocity u_2^* and the water density ρ_{w2}^* are found, respectively, as

$$u_2^* = (P_0/\rho_{w0} C_{w0}) (y-1) \quad (29)$$

and

$$\rho_{w2}^*/\rho_{w0} = 1 + \alpha(y-1) \quad (30)$$

with α defined by equation (18).

The exact shock and linear acoustic predictions of the water response to the refracted pressure wave P_2 can be compared by forming the ratios U''/U''^* , U_2/U_2^* , and ρ_{w2}/ρ_{w2}^* . From equations (15), (17), (28), (29), and (30), these ratios are determined as

$$U''/U''^* = \left\{ \frac{Q(1+nQ)^{1/n}}{(1+nQ)^{1/n} - 1} \right\}^{\frac{1}{2}} \quad (31a)$$

$$U_2/U_2^* = \left\{ \frac{(1+nQ)^{1/n} - 1}{Q(1+nQ)^{1/n}} \right\}^{\frac{1}{2}} \quad (31b)$$

$$\rho_{w2}/\rho_{w2}^* = \frac{(1 + nQ)^{1/n}}{1 + Q} \quad (31c)$$

where

$$Q = \alpha (y-1) \quad (31d)$$

The above ratios are plotted in Figure 2 as a function of the refracted pressure ratio $y = P_2/P_0$. In obtaining these curves, values of $n=7.15$ (ref. [21]) and $\alpha = 4.5 \times 10^{-5}$ ($P_0 = 1.013 \times 10^6$ dynes/cm², $\rho_{wo} = 1.0$ gm/cm³, $C_{wo} = 1.5 \times 10^5$ cm/sec) were used. For refracted pressures up to 1200 atmospheres, Figure 2 shows that the in-water shock front and particle velocities calculated by exact shock theory differ by less than 10% from the in-water shock front and particle velocities predicted by acoustic theory. Figure 2 also shows that the changes in density predicted by exact shock and acoustic theories differ by less than 1% for refracted pressures up to 1200 atmospheres.

Comparison Between the Refracted Pressure and the Pressure Reflected From a Rigid Wall

For an incoming shock of strength $x = P_1/P_0$ (see Figure 1), the pressure P_{2R} reflected from a rigid wall is given by [1].

$$y_R = P_{2R}/P_0 = x [(1+2M)x - M] / (1+Mx) \quad (32)$$

For the same incoming shock strength, the pressure P_2 refracted at the air-water interface is found as the solution of equation (27).

To compare the refracted pressure to the pressure reflected at a rigid wall, the ratio P_2/P_{2R} is formed. This ratio is plotted in Figure 3 as a function of the reflected shock strength P_{2R}/P_0 . (The numbers in parentheses below the abscissa correspond to the incoming shock strength P_1/P_0 required to yield the reflected shock strength P_{2R}/P_0 .) In obtaining this curve, values of $M=1/6$ ($\gamma=1.4$) and $\rho_{ao} = 1.2 \times 10^{-3}$ gm/cm³ were used. Figure 3 clearly shows that the ratio of the pressure refracted at an air-water interface to the pressure reflected from a rigid wall remains above 96% for reflected pressure up to 1200 atmospheres (incoming pressure up to 156 atmospheres).

CONCLUSIONS

In-water shock front velocity U , particle velocity u and density ρ can be predicted by acoustic theory up to 1200 atm with a maximum error of 10% at the high pressures.

The refracted pressure can be calculated by treating the surface as a rigid wall up to 1200 atm with maximum error of 4% at 1200 atm.

REFERENCES

1. Wright, J.K., Shock Tubes, Methuen & Co. LTD., London, 1961.
2. Cole, R.H., Underwater Explosions, Dover Pub, New York, 1965
3. Landau, L.D. and Lifshitz, E.M., Fluid Mechanics, Pergamon Press, London, 1959.

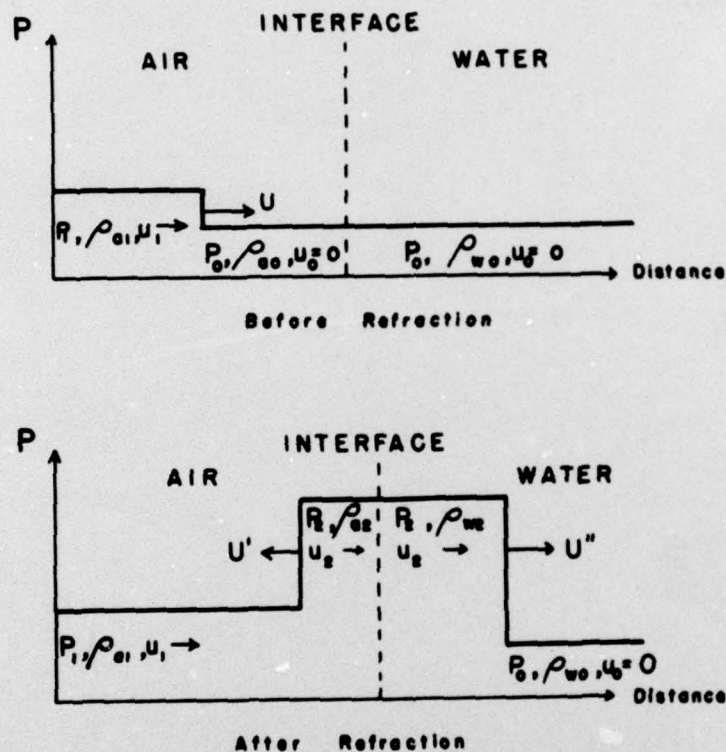


Fig. 1 — Schematic illustration of the refraction of a plane shock at an air-water interface. The symbols U and u denote, respectively, the shock front and particle velocities with respect to a fixed frame.

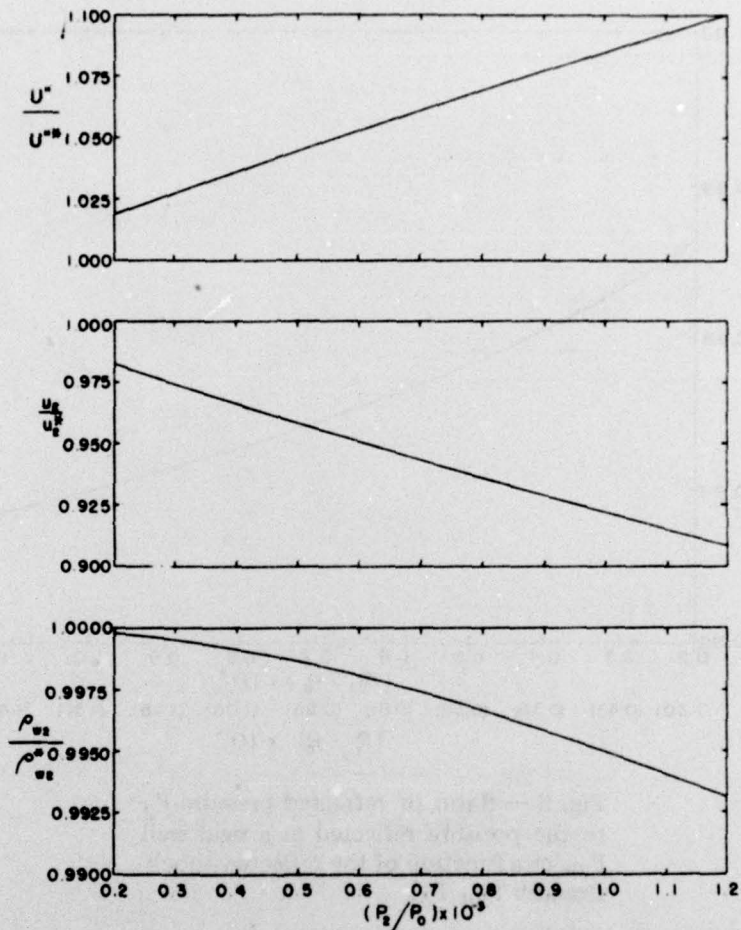


Fig. 2 — Comparison of exact shock (this paper) to acoustic theory for water shockwave velocity U'' , particle velocity u_2 and water density ρ_{w2} . The * denotes acoustic values. Comparative values are plotted as a function of the refracted pressure ratio P_2/P_0 .

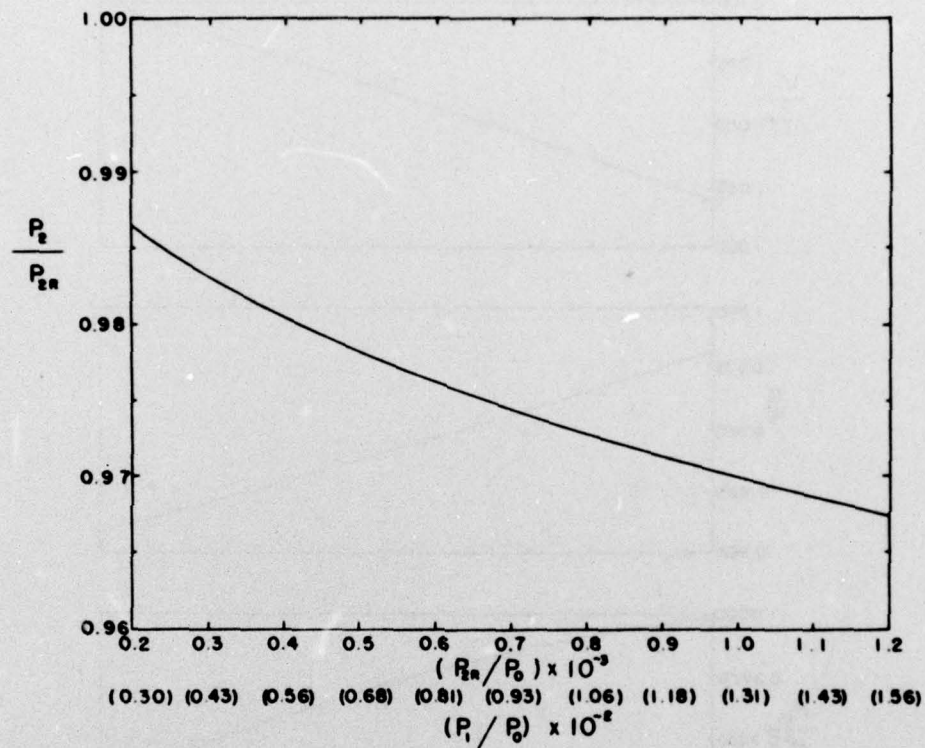


Fig. 3 — Ratio of refracted pressure P_2 to the pressure reflected at a rigid wall P_{2R} as a function of the reflected shock strength P_{2R}/P_0 .