


AD A 047989



12



MISCELLANEOUS PAPER S-77-16

EMPIRICAL ANALYSIS OF PROJECTILE PENETRATION IN ROCK

by

Robert S. Bernard

Soils and Pavements Laboratory
U. S. Army Engineer Waterways Experiment Station
P. O. Box 631, Vicksburg, Miss. 39180

November 1977


Final Report

Approved For Public Release; Distribution Unlimited



Prepared for Defense Nuclear Agency
Washington, D. C. 20305

Under Subtask Y99QAXSB2II,
"Penetration," Work Unit I4,
"Technical Penetration Developments"

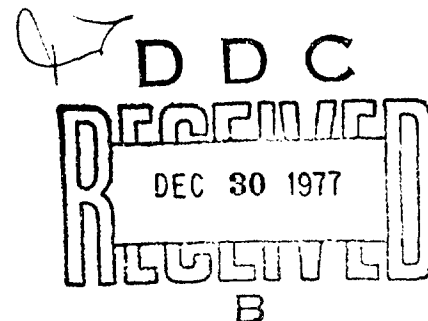

AD No. _____
DDC FILE COPY

Unclassified

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER 14 AEWES-MP- Miscellaneous Paper S-77-16	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) EMPIRICAL ANALYSIS OF PROJECTILE PENETRATION IN ROCK,	5. TYPE OF REPORT & PERIOD COVERED Final report	
7. AUTHOR(s) Robert S. Bernard	8. CONTRACT OR GRANT NUMBER(s) 16 17	
9. PERFORMING ORGANIZATION NAME AND ADDRESS U. S. Army Engineer Waterways Experiment Station Soils and Pavements Laboratory P. O. Box 631, Vicksburg, Miss. 39180	10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS Subtask Y99QAXSB211 Work Unit 14	
11. CONTROLLING OFFICE NAME AND ADDRESS Defense Nuclear Agency Washington, D. C. 20305	12. REPORT DATE Nov 1977	
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)	13. NUMBER OF PAGES 22	
	15. SECURITY CLASS. (of this report) Unclassified	
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES This research was sponsored by the Defense Nuclear Agency under Subtask Y99QAXSB211, "Penetration," Work Unit 14, "Technical Penetration Developments."		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Empirical method Penetration tests Projectiles Rock masses		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) Data from 23 penetration tests have been analyzed empirically to produce a nondimensional equation for projectile penetration in rock: $\frac{pZ}{M/A} = 0.2 \sqrt{\frac{p}{Y}} \left(\frac{100}{RQD} \right)^{0.8}$ where p = mass density of the rock (Continued)		

Unclassified

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

20. ABSTRACT (Continued).

Z = depth of penetration

M = projectile mass

A = projectile cross-sectional area

V = impact velocity

Y = unconfined compressive strength of the rock

RQD = Rock Quality Designation

The data base consists of normal impact and penetration data for rock (11 tests) and for concrete (12 tests, used as a baseline). The test projectiles had ogive noses, diameters between 76 and 203 mm, masses between 5.9 and 613 kg, and impact velocities from 251 to 809 m/s. The rock penetration equation is given in dimensional form and also in nomogram form. Calculated results are compared with badly scattered bomb penetration data for granite and sandstone. The equation gives about the same result as a least-squares linear fit to the data.

ACCESSION for	
NTIS	White Section ☒
DDC	Buff Section ☐
UNANNOUNCED	☐
JUSTIFICATION	
BY	
DISTRIBUTION/AVAILABILITY CODES	
Dist. or SPECIAL	
A	

Unclassified

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

Preface

The investigation reported herein was sponsored by the Defense Nuclear Agency (DNA) under Subtask Y99QAXSB211, "Penetration," Work Unit 14, "Technical Penetration Developments." The development of a rock penetration nomogram, which was the end product of the investigation, was suggested by MAJ Todd D. Strong, CE, who was the DNA Project Officer at the beginning of this work unit.

The study was conducted by personnel of the Soils and Pavements Laboratory (S&PL), U. S. Army Engineer Waterways Experiment Station (WES), during July-October 1976 under the general supervision of Messrs. J. P. Sale and R. G. Ahlvin, Chief and Assistant Chief, respectively. Mr. R. S. Bernard developed the penetration formula with the technical guidance of Drs. P. F. Hadala and B. Rohani under the direct supervision of Dr. J. G. Jackson, Chief of the Soil Dynamics Division, S&PL. Mr. Bernard also prepared the report.

COL J. L. Cannon, CE, was Commander and Director of WES during the investigation and at the time of preparation of this report. Mr. F. R. Brown was Technical Director.

Contents

	<u>Page</u>
Preface	1
Introduction	3
Empirical Rock Penetration Equation	3
Limitations	7
Comparison with Bomb Penetration Data	8
Summary	9
Recommendation	9
References	10
Tables 1-4	
Figures 1-3	
Appendix A: Estimating Rock Properties	A1
Tables A1-A3	

EMPIRICAL ANALYSIS OF PROJECTILE PENETRATION IN ROCK

Introduction

The design and deployment of earth penetrating weapons requires simple, reliable techniques for predicting their performance in soil and rock targets. Bernard and Creighton (Reference 1) have developed a time-sharing computer code (PENCO) that analyzes projectile motion within layered earth targets. Although the theory used in PENCO is fairly simple, the calculations are too cumbersome to be performed by hand. It is therefore desirable to have an even simpler prediction technique that does not require a computer.

Young's equation (Reference 2) has proved to be the simplest and most effective empirical formula for soil penetration. This equation uses an empirical penetrability index, which varies from target to target and which must be determined from previous penetration data. Soil penetration has been extensively investigated in recent years, and the information already on record is adequate for generating reasonable predictions in many types of soil.

Young's equation has occasionally been used to correlate rock penetration data, even though the equation itself was derived from soil penetration data. Since it has never been shown that the scaling relations for soil are the same as those for rock, there is clearly a need for an equation based on penetration data for rock in situ. The development of a penetration formula specifically for rock is summarized in the following paragraphs.

Empirical Rock Penetration Equation

The first step in an empirical analysis is to quantify the effects of those variables that can be specified most accurately. For penetration, these variables are the projectile mass (M), diameter (D), nose

shape (CRH),¹ and impact velocity (V). Once the relation between penetration and projectile parameters is understood, the analysis can proceed to the effects of variables that are less accurately specified (i.e. the target parameters).

Experimental data for concrete (Reference 3) indicate that the final penetration depth (Z) is roughly proportional to the projectile mass and impact velocity and inversely proportional to the square of the projectile diameter. Most rocks are hard and brittle (like concrete), so it is assumed that the same trends apply for intact (unjointed) rock. Of course, the degree of penetrability will change from target to target.

Penetrability is probably related to a number of target variables, such as density, shear strength, tensile strength, bulk and shear moduli, and other properties. Unfortunately, it is rare to find penetration data for rock sites where all these quantities were known with consistent accuracy, even when the rock was in an intact condition. It is therefore assumed that the penetrability of intact rock depends only on the mass density (ρ) and the unconfined compressive strength (Y), which are the two properties most often measured.

Natural rock deposits often contain joints and fractures, so that the unconfined compressive strength of intact core specimens may fail to characterize the rock as a whole. Deere (Reference 4) has proposed the Rock Quality Designation (RQD) as an index for the degree of fracturing of the rock in situ at a given site. The value of the RQD is determined by a modified core logging procedure:

All solid pieces of core that are 10 cm long or longer are added up, and this length is called the modified core recovery. The modified core recovery is divided by the total length of core run, and the quotient multiplied by 100 percent is the value of the RQD.

$$CRH = \frac{\text{ogive nose radius}}{\text{projectile diameter}}$$

The RQD has previously been shown to be related to other qualitative rock descriptors, such as fracture frequency. Now it seems also to be an index of penetrability.

A number of dimensionless equations can be constructed that relate the projectile and target variables. One of these has the form

$$\frac{\rho Z}{M/A} = f(V\sqrt{\rho/Y}, \text{RQD}, \text{CRH}) \quad (1)$$

All quantities in Equation 1 must be expressed in compatible units.³ The left-hand side represents a dimensionless penetration depth, and the first group ($V\sqrt{\rho/Y}$) on the right-hand side represents a dimensionless impact velocity. Aside from the introduction of the RQD, Equation 1 contains natural dimensionless groups involving the mass, velocity, diameter, and geometry of the projectile, as well as the intact strength and density of the target.

Physical property data are incomplete for the targets in most of the rock penetration tests on record. However, target descriptions adequate for the present analysis do exist for 11 rock penetration tests conducted by Sandia Laboratories under ERDA or DNA⁴ sponsorship (References 5-9). Figure 1 shows these data plotted with concrete penetration data⁵ taken from Reference 3. Table 1 enumerates the 23 individual test results, and Table 2 gives the projectile and target parameters. The combined data were used to obtain a penetration equation of the same general form as Equation 1.

The penetration data for concrete (Canfield and Clator, Reference 3) and for welded tuff (Sandia/DNA tests, Reference 5) constitute the baseline for intact rock (RQD = 100) in Figure 1. The other data

³ For example, ρ could be expressed in g/cm³, Z and D in cm, M in grams, A in cm², V in cm/s, and Y in dynes/cm².

⁴ ERDA is an acronym for Energy Research and Development Agency, and DNA, for Defense Nuclear Agency.

⁵ The rock penetration data are, by themselves, a bit too scattered for comfort. The addition of the concrete data fills in the loose pattern of the rock data, facilitating a reasonable correlation of all the test results.

(for RQD < 100) are documented in References 5 and 6. The properties for the concrete, the welded tuff, and the 82-RQD sandstone are discussed in References 3, 7, and 9, respectively. The properties of the remaining targets are given in Reference 9.

Various attempts were made to correlate the dimensionless parameters that appear in Equation 1. Figure 1 shows the most successful normalization of the data. The equation for the dashed line in Figure 1 is

$$\frac{\rho Z}{M/A} = 0.2 \, v \sqrt{\frac{\rho}{Y}} \left(\frac{100}{RQD} \right)^{0.8} \quad (2)$$

where $A = \frac{\pi}{4} D^2$ is the projectile cross-sectional area.

The error bars in the figure reflect the relative uncertainty in the value of the target strength. There are many test results on record that could not be used in the formulation of Equation 2, due to a lack of descriptive data for the targets. However, the points in Figure 1 represent tests for which the target density, strength, and RQD were all known within reasonable bounds.

The available data did not show a significant increase in penetration depth as CRH increased from 1.5 to 9.25, so the nose shape variable was dropped from the analysis. However, the equation is not considered valid for blunt-nosed projectiles, since no blunt projectile data were used in its formulation.

Expressed in metric units, Equation 2 becomes

$$Z = 25.4 \frac{M}{D^2} \frac{V}{\sqrt{\rho Y}} \left(\frac{100}{RQD} \right)^{0.8} \quad (3)$$

where

Z = final penetration depth, cm

M = projectile mass, kg

D = projectile diameter, cm

V = impact velocity, m/s

ρ = target bulk density, g/cm³

Y = unconfined compressive strength of the intact rock, bars

RQD = Rock Quality Designation, pct

Equation 3 is expressed as a nomogram in Figure 2, which includes a sample calculation using the nomogram.

Limitations

Although concrete data were used in the development of Equation 2, this expression is not intended as a concrete penetration formula. The concrete data were introduced only to help establish the baseline for intact rock. There are several equations already documented for concrete (e.g. Reference 10), which produce better results in concrete than Equation 2. For rock targets, the penetration data are more scattered (and the target parameters more uncertain) than for concrete targets. It then follows that a rock penetration equation must be inherently less accurate than a concrete penetration equation.

Due to the limited penetration data base, the restrictions on Equation 2 are as follows:

1. At best, the accuracy of prediction is +20 percent.
2. The equation is valid only when the calculated depth is greater than three projectile diameters.
3. For nearly intact rock ($RQD > 90$), the equation appears to be applicable for projectiles from 3 to 30 cm in diameter.
4. For rock with $RQD < 90$, the equation has not been verified for projectiles outside the 10- to 30-cm-diam range.
5. If $RQD < 20$, the equation should not be used at all.
6. The effect of nose shape seems to be weak, but the equation is not recommended for blunt or near-blunt ($CRN < 1.5$) projectiles.
7. The equation is not valid if the projectile "mushrooms" or breaks up.
8. The equation is not valid if the projectile tumbles, or if the penetration path is sharply curved.

If possible, the target strength should be determined from static unconfined compression tests of intact rock samples, and the values used for Y and RQD should correspond to the same borehole.

Appendix A contains information that can be used to make rough

estimates of ρ , Y and RQD in those cases where only a word description of the target is available. However, in such cases only very rough estimates of penetration depth can be made. For example, an uncertainty of ± 50 percent in Y compounded with ± 20 percent in RQD will produce an error band of ± 70 percent in the predicted depth. If there exist any previous penetration data for the site in question, these data should be used as bench marks for checking the results obtained from Equation 2 and (indirectly) the target parameters used therein.

Comparison with Bomb Penetration Data

Reference 11 (EM 1110-345-434) contains a rock penetration equation based on data obtained by Livingston and Smith (Reference 12). In these tests, inert 1600-pound AP, 2000-pound SAP, and 25,000-pound SAP bombs were dropped on sandstone and weathered granite targets at impact velocities of 256-381 m/s. The bombs struck the targets at angles of 15-30 degrees from the vertical, and the penetration paths were all somewhat curved. No RQD data are available for these tests. However, recorded descriptions (and a few pictures of core boxes) suggest an RQD of 20-40 percent for the granite site and 50-70 percent for the sandstone site. Table 3 gives the ranges of strength and density for the two target areas, and Table 4 presents the bomb characteristics.

The bomb penetration depths were equated with the total (curved) path lengths, and the data were nondimensionalized (Figure 3) by the method used in Figure 1. The horizontal error bars in Figure 3 were obtained by using the lower limits of Y and RQD to calculate the upper bound of the abscissa, and vice versa. The average density was used in each case, and the median values of the abscissa are shown plotted with circles and triangles. The data are badly scattered vertically (not due to the nondimensionalization), though Equation 2 is approximately the same as a least-squares linear fit drawn through the origin. The (vertical) standard deviation of the data is ± 33 percent. This comparison demonstrates both the experimental uncertainty and the computational error that are often met in practice.

Summary

Equation 2 is a nondimensional empirical formula⁶ for calculating projectile penetration in massive rock deposits. It is expressed in terms of standard engineering properties, which can be determined without conducting full-scale penetration tests. The equation was derived from a limited data base, and its range of applicability should be reassessed as more penetration data become available. However, in the absence of a better prediction technique, Equation 2 is suitable for making reasonable estimates of final penetration depth.

Recommendation

Equation 2 is apparently an improvement over the rock penetration equation given in Reference 11, since (1) it fits the original data on which that equation was based; (2) it fits more recent data; (3) it is dimensionally homogeneous; and (4) the rock penetrability is defined in terms of measurable parameters instead of empirical coefficients. Thus, it is recommended that the rock penetration equation (in any or all of its dimensional, nondimensional, or nomographic forms) be included in the next revisions of References 10 and 11.

⁶ Equation 3 gives the dimensional form in metric units.

References

1. R. S. Bernard and D. C. Creighton; "Projectile Penetration in Earth Materials: Theory and Computer Analysis"; Technical Report S-76-13; November 1976; U. S. Army Engineer Waterways Experiment Station, CE, Vicksburg, Miss.
2. J. W. Young; "Depth Prediction for Earth-Penetrating Projectiles"; Journal of the Soil Mechanics and Foundations Division, May 1969, Vol. 95, No. SM3, Pages 803-817; American Society of Civil Engineers, Ann Arbor, Mich.
3. J. A. Canfield and I. G. Clator; "Development of a Scaling Law and Techniques to Investigate Penetration in Concrete"; Technical Report 2057, August 1966; U. S. Naval Weapons Laboratory, Dahlgren, Va.
4. D. U. Deere, "Technical Description of Rock Cores for Engineering Purposes"; Rock Mechanics and Engineering Geology, 1964, Vol. 1, No. 1, Pages 16-22; International Society of Rock Mechanics, Springer-Verlag, New York, N. Y.
5. W. J. Patterson, Sandia Laboratories, Albuquerque, N. Mex.; Letter Report to: R. S. Bernard, Soil Dynamics Division, U. S. Army Engineer Waterways Experiment Station, CE, Vicksburg, Miss.; 26 August 1976.
6. W. J. Patterson; "Projectile Penetration of In Situ Rock"; Report No. SLA-73-9831, November 1973; Sandia Laboratories, Albuquerque, N. Mex.
7. S. W. Butters and others; "Field, Laboratory and Modeling Studies on Mount Helen Welded Tuff for Earth Penetrator Test Evaluation"; Report No. TR 75-9, August 1976; Terra Tek, Inc., Salt Lake City, Utah.
8. D. K. Butler and others; "Constitutive Property Investigations in Support of Full-Scale Penetration Tests in Dakota Sandstone, San Ysidro, New Mexico"; Technical Report S-77-3, April 1977; U. S. Army Engineer Waterways Experiment Station, CE, Vicksburg, Miss.
9. W. J. Patterson; "Physical Properties and Classification of Seven Types of Rock Targets"; Report No. SC-TM-68-621, September 1968; Sandia Laboratories, Albuquerque, N. Mex.
10. Office, Chief of Engineers, Department of the Army; "Protective Design: Fundamentals of Protective Design (Non-Nuclear)"; Technical Manual TM-5-855-1, July 1965; Washington, D. C.
11. Office, Chief of Engineers, Department of the Army; "Design of Underground Installations in Rock: Penetration and Explosion Effects"; Engineer Manual EM 1110-345-434, July 1961; Washington, D. C.
12. C. W. Livingston and F. L. Smith; "Bomb Penetration Project"; April 1951; Colorado School of Mines and Research Foundation, Inc., Golden, Colo.

TABLE 1 PENETRATION DATA

Test Results	Target	Impact Velocity m/s	Penetration Depth cm
Canfield and Clator	Concrete	306	20.3
"	"	312	22.9
"	"	381	25.4
"	"	453	36.9
"	"	541	41.9
"	"	602	59.7
"	"	616	49.5
"	"	709	66.0
"	"	716	61.0
"	"	741	69.8
"	"	773	73.7
"	"	809	74.9
Sandia/DNA	Welded Tuff	372	222.0
"	"	411	259.0
"	"	475	360.0
"	"	501	335.0
"	"	503	335.0
Sandia/DNA	Sandstone	444	357.0
"	"	459	372.0
Sandia No. 120-77	Welded Agglomerate	325	396.0
Sandia No. 120-112	Sandstone	251	311.0
Sandia No. 120-103	Sandstone	268	305.0 ^a
Sandia No. 120-106	Granite	262	381.0

^a In this test the sandstone was covered by 76 cm of soil, so the total depth of penetration is 381 cm. However, the penetration resistance of the soil is negligible compared with that of the rock.

TABLE 2 PROJECTILE AND TARGET PARAMETERS

Test Results	Projectile		Projectile		Projectile Nose Caliber Radius ^a	Target	Target Strength bars	Target Density g/cm ³	Target RqD %
	Mass kg	Diameter cm							
Canfield and Clator	5.9	7.62			1.50	Concrete	345 ± 5%	2.42	100
Sandia/DNA	208.0 ^b	16.51			6.00	Welded Tuff	600 ± 15%	1.95	100
Sandia/DNA	208.0 ^b	16.51			6.00	Sandstone	234 ± 30%	2.08	82
Sandia No. 120-77	390.0	22.86			9.25	Welded Agglomerate	275 ± 20%	1.92	60
Sandia No. 120-112	1166.0	25.88			9.25	Sandstone	489 ± 10%	2.12	37
Sandia No. 120-103	613.0	20.32			9.25	Sandstone	408 ± 5%	2.14	32
Sandia No. 120-106	613.0	20.32			9.25	Granite	462 ± 15%	2.62	32

^a The nose shape is a tangent ogive in each case.

^b The actual projectile mass is 181 kg, but a 53-kg sabot is attached to the projectile base at impact. It is assumed that the projectile and sabot separate about halfway through the penetration process. This makes the "average" projectile mass about 208 kg.

TABLE 3 TARGET PARAMETERS FOR BOMB PENETRATION

<u>Material</u>	<u>Density g/cm³</u>	<u>Strength bars</u>	<u>Estimated RQD %</u>
Sandstone	2.13 ± 0.01 ^a	346 ± 112	50-70
Weathered Granite	2.73 ± 0.02	630 ± 139	20-40

^a Average ± standard deviation.

TABLE 4 BOMB PARAMETERS

<u>Type of Bomb</u>	<u>Mass, kg</u>	<u>Diameter, cm</u>
1,600-lb AP	748 ± 3	35.56
2,000-lb SAP	936 ± 5	47.65
25,000-lb SAP	11,449 ± 11	58.72

LEGEND				
SYMBOL	TARGET	RQD %	STRENGTH BARS	SOURCE OF DATA
○	CONCRETE	100	345	CANFIELD & CLATOR
△	WELDED TUFF	100	600	SANDIA/DNA TESTS
□	SANDSTONE	82	234	SANDIA/DNA TESTS
▲	WELDED AGGLOMERATE	60	275	SANDIA TEST NO. 120-77
●	SANDSTONE	37	489	SANDIA TEST NO. 120-112
■	SANDSTONE	32	408	SANDIA TEST NO. 120-103
▼	GRANITE	32	462	SANDIA TEST NO. 120-106

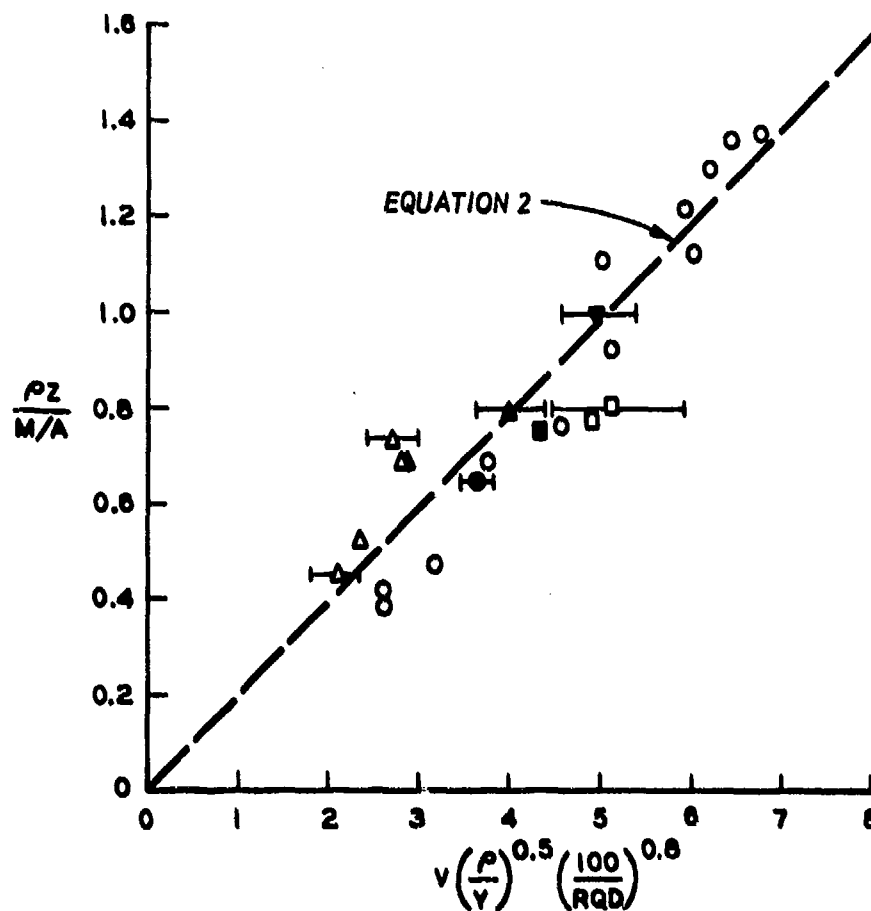


Figure 1. Data base for Equation 2

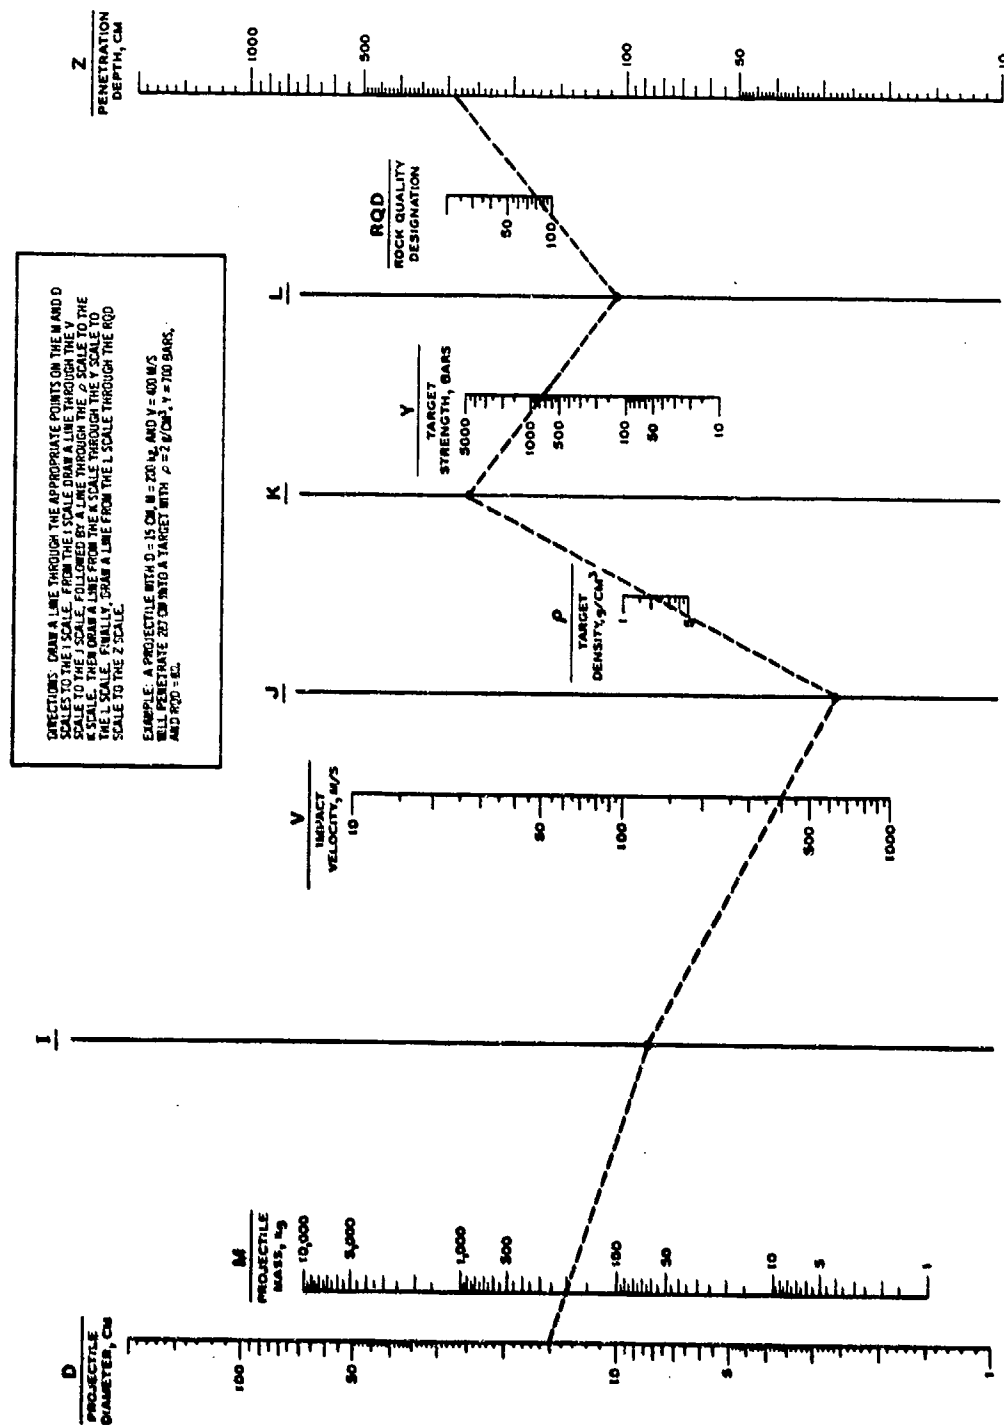


Figure 2. Nomogram for rock penetration (Equation 3)

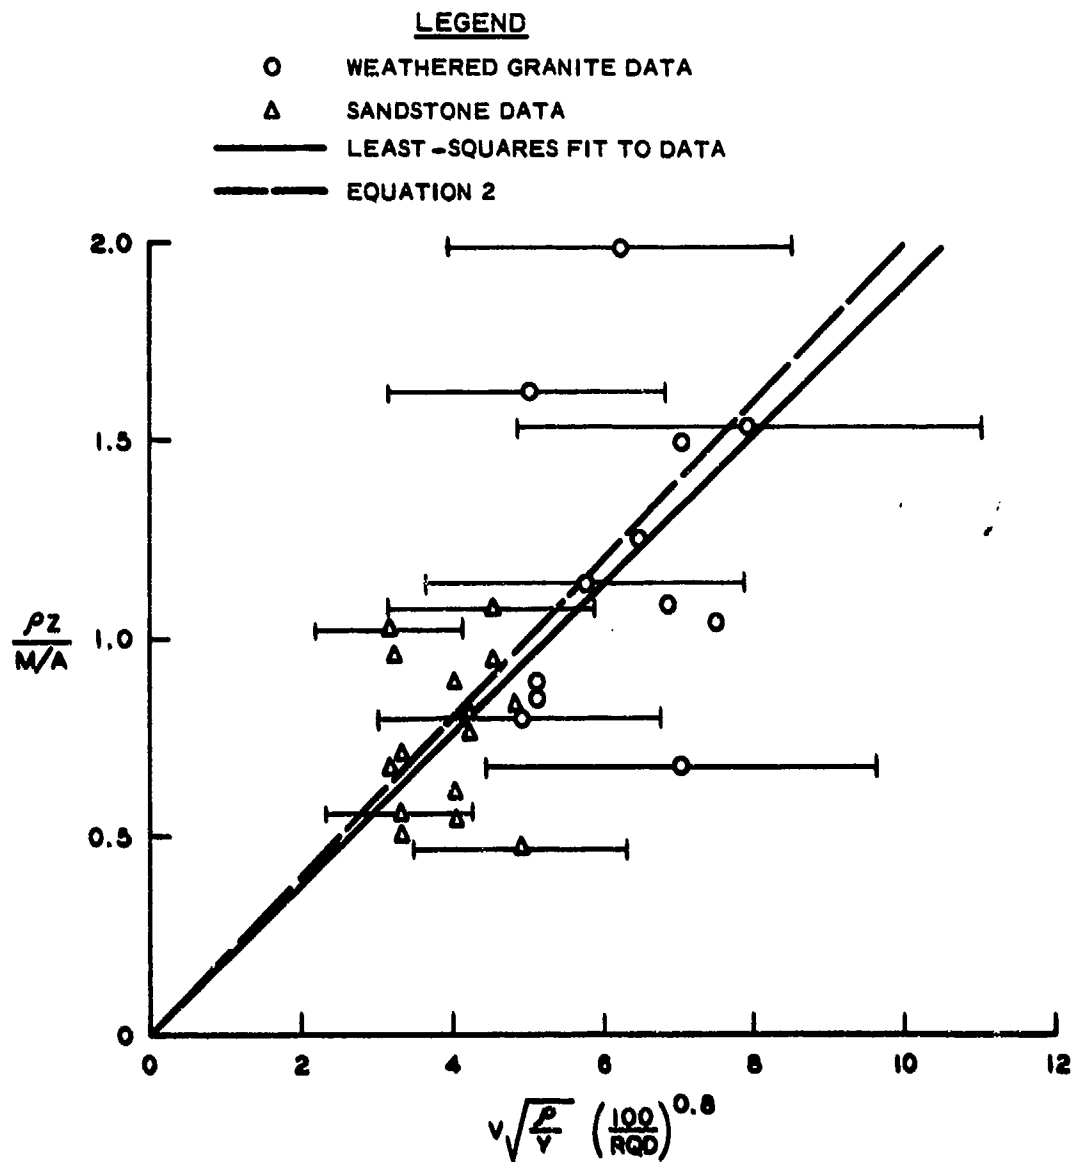


Figure 3. Comparison of Equation 2 with bomb penetration data

Appendix A: Estimating Rock Properties

Rock target descriptions often fail to include density, strength, or RQD measurements. Nevertheless, if geologic descriptions are available, it is possible to estimate these properties from Tables A1 through A3 (References 4, 5, and 6). The estimated properties can be used in Equations 2 and 3, or in the nomogram (Figure 2), to make rough calculations of penetration depth.

TABLE A1 ROCK QUALITY DESIGNATION

<u>RQD, %</u>	<u>Rock Quality</u>
0-25	Very Poor
25-50	Poor
50-75	Fair
75-90	Good
90-100	Excellent

TABLE A2 ENGINEERING CLASSIFICATION FOR INTACT ROCK

<u>Class</u>	<u>Description</u>	<u>Compressive Strength bars</u>
A	Very High Strength	Over 2200
B	High Strength	1100-2200
C	Medium Strength	550-1100
D	Low Strength	275-550
E	Very Low Strength	Less than 275

TABLE A3 COMMON INTACT ROCK DESCRIPTIONS

Rock Types	Typical Density g/cm ³	Strength Range bars
Soft Shale (clay shales, poorly cemented silty or sandy shales)	2.3	14-140
Tuff (nonwelded)	1.9	14-210
Sandstone (large grain, poorly cemented)	2.0	70-210
Sandstone (fine to medium grain)	2.1	140-500
Sandstone (very fine to medium grain, massive, well cemented)	2.3	400-1100
Shale (hard, tough)	2.3	140-800
Limestone (coarse, porous)	2.3	400-850
Limestone (fine grain, dense, massive)	2.6	700-1400
Basalt (vesicular, glassy)	2.6	550-1000
Basalt (massive)	2.9	>1400
Quartzite	2.6	>1400
Granite (coarse grain, altered)	2.6	550-1100
Granite (competent, fine to medium grain)	2.6	1000-1900
Dolomite	2.5	700-1400

DISTRIBUTION LIST

DEPARTMENT OF DEFENSE

Assistant to the Secretary of Defense
ATTN: Donald R. Cotter

Director, Defense Advanced Research Projects Agency
ATTN: NMRO
LTC M. Franklin
PMO
Technical Library

Defense Documentation Center, Cameron Station
12 cy ATTN: TC/Myer B. Kahn

Director, Defense Intelligence Agency
ATTN: DI-7E
DT-2, Weapons & Systems Division
DI-7D, Phys. Vul. Div.,
Edward O'Farrell
Technical Library

Defense Mapping Agency
ATTN: H. Lindsey

Director, Defense Nuclear Agency
ATTN: STSI (Archives)
2 cy STFL (Technical Library)
15 cy SPSS
DDST

Director of Defense Research and Engineering
ATTN: Assistant Director, Strategic Weapons
Deputy Director, Strategic Systems
M. J. Minnowan
George Barse
Craig W. Hartsell
R. Thorkildsen
Deputy Director, Tactical Warfare

Commander, Field Command, Defense Nuclear Agency
ATTN: FCPR

Interservice Nuclear Weapons School
ATTN: Technical Library

Director, Joint Strategic Target Planning Staff
ATTN: Science and Technology Info Library

DEPARTMENT OF THE ARMY

Assistant Chief of Staff for Force Development
ATTN: Technical Library

Office, Chief of Engineers
2 cy ATTN: DAEN-ASI-L
2 cy DAEN-MCE-D
DAEN-RDL

Office, Chief of Research, Development, and Acquisition
ATTN: DAMA-CSM/LTC Edward V. DeBoesser, Jr.
Technical Library

Commander, Harry Diamond Laboratories
ATTN: AMXDO-NP
F. Vrateric
AMXDO-NRM/J. Gwaltney

DEPARTMENT OF THE ARMY (Continued)

Project Manager, Remotely Monitored Battlefield Sensor System
U. S. Army Materiel Development and Readiness Command (DARCOM)
ATTN: Chuck Higgins

Commanding Officer, Picatinny Arsenal
ATTN: P. Angellotti
Technical Library
SMUPA-ND-S/E. Zimpo
Ray Goldstein
Ray Moessner
Jerry Pental
SUMPA-AD-D-A-7
SUMPA-AD-D-A
SUMPA-AD-D-M

Director, U. S. Army Ballistic Research Laboratories
ATTN: AMXBR-X/J. J. Meszaros
AMXBR-TB/J. T. Frasier
W. J. Taylor
D. Dunn
G. Grabarek
G. Roecker
2 cy Technical Library/Edward Bailey

Commander/Director, U. S. Army Cold Regions Research and Engineering Laboratory
ATTN: G. Swinzow

Division Engineer, U. S. Army Division, Huntsville
ATTN: HNDED-CS/Michael M. Dembo

Division Engineer, U. S. Army Engineer Division, Ohio River
ATTN: ORDAS-L/Technical Library

Director, U. S. Army Engineer Waterways Experiment Station
ATTN: Mr. D. K. Butler
Mr. William J. Flathau
Mr. John Strange
3 cy Library
Dr. Paul Hadala
Dr. Guy Jackson
Dr. Behzad Rohani
5 cy Mr. R. S. Bernard
Mr. D. C. Creighton

Commander, U. S. Army Materials and Mechanics Research Center
ATTN: Technical Library

Director, U. S. Army Material Systems Analysis Agency
ATTN: J. Speranza
N. Reeves

Commander, U. S. Army Mobility Equipment R&D Center
ATTN: STUFB-MW
STUFB-XG
Technical Library

DEPARTMENT OF THE ARMY (Continued)

Commandant, U. S. Army Engineer School,
Fort Belvoir,
ATTN: S. Grazier

Commander, U. S. Army Materiel Development and
Readiness Command
ATTN: Technical Library
2 cy DRCRD-BN
2 cy DRCRD-WN

Commander, U. S. Army Missile Command,
Redstone Arsenal
ATTN: Technical Library
F. Fleming
AMCPM-PE-X (William K. Jann)

Commander, U. S. Army Nuclear Agency
ATTN: Document Control
Technical Library
COL Quinn
MAJ F. P. Weichel

Commander, U. S. Army Armament Command,
Rock Island Arsenal
ATTN: Technical Library

Division Engineer, U. S. Army Engineer
Division, Missouri River
ATTN: Library

DEPARTMENT OF THE NAVY

Chief of Naval Research, Department of
the Navy
ATTN: Technical Library

Officer in Charge, Civil Engineering Laboratory
ATTN: R. J. Odello
Technical Library

Director, Naval Research Laboratory
ATTN: Code 2027/Tech Library

Commander, Naval Surface Weapons Center,
White Oak
ATTN: Mr. Kasdorf
Technical Library, Code 730
Code 1224 Navy Nuc Pragma Off
L. Roslund
G. Briggs

Commander, Naval Surface Weapons Center,
Dahlgren Laboratory
ATTN: Technical Library
William Wisard
Ted Williams

Commander, Naval Weapons Center, China Lake
ATTN: Code 603, Dr. Carl Austin
Code 533, Technical Library

Commander, Naval Weapons Evaluation Facility
ATTN: Technical Library

Air Force Armament and Testing Laboratory
AFSC, Eglin Air Force Base
ATTN: Technical Library
MAJ Thomas Tomassetti

DEPARTMENT OF THE AIR FORCE (Continued)

Air Force Armament and Testing Laboratory
AFSC, Eglin Air Force Base
ATTN: Mr. John Collins
Mr. Massey Valentine
Mr. William Cramer
Dr. Kulp

Commander, Air Force Weapons Laboratory,
AFSC, Kirtland Air Force Base
ATTN: SUL, Technical Library
DEV

Headquarters, Air Force Systems Command
Andrews Air Force Base
ATTN: Technical Library

Project Manager, Gator Mine Program,
Eglin Air Force Base
ATTN: E. J. Lindsey

Oklahoma State University, Field Office
for Weapons Effectiveness
ATTN: Ed Jackett

Commander, Armament Development and Test
Center, Eglin Air Force Base
ATTN: ADTC/DLODL/Technical Library

Commander, Foreign Technology Division, AFSC,
ATTN: TD-BTA Library

Space and Missile Systems Organization,
Norton Air Force Base
ATTN: DEB

Energy Research & Development Administration

Energy Research and Development Administration
Albuquerque Operations Office
ATTN: Doc Control for Technical Library

Energy Research and Development Administration
Nevada Operations Office
ATTN: Doc Control for Technical Library

Los Alamos Scientific Laboratory
ATTN: Doc Control for Reports Library
Doc Control for Tom Dowler
Doc Control for C. Cramer
Doc Control for G. Dials

Sandia Laboratories, Livermore Laboratory
ATTN: Doc Control for T. Gold
Doc Control for Technical
Library

Sandia Laboratories, Albuquerque,
ATTN: Doc Control for Dr. Walter
Herrmann
Doc Control for John Colp
Doc Control for John Keislar
Doc Control for William
Patterson
Doc Control for Al Chabai
Doc Control for 3141 Sandia
Rpt Coll
Doc Control for Ray Reynolds

ENERGY RESEARCH & DEVELOPMENT
ADMINISTRATION (Continued)

Sandia Laboratories, Terradynamics Division
ATTN: C. Wayne Young

Director, Lawrence Livermore Laboratory,
ATTN: Technical Information Division,
Technical Library
Larry Woodruff, L-125
Doc Control for W. Scanlin
Frank Walker
Mark Wilkins

OTHER GOVERNMENT AGENCIES

Electric Power Research Institute
ATTN: Dr. George Sliter

Office of Nuclear Reactor Regulation,
Nuclear Regulatory Commission
ATTN: Dr. Robert Heineman, Director
Mr. Lawrence Shao, Chief,
Struc Engrg Br

DEPARTMENT OF DEFENSE CONTRACTORS

Aerospace Corporation
ATTN: Technical Information Services

Applied Theory Incorporated
2 cy ATTN: Dr. John G. Trulio

AVCO, Government Products Group
ATTN: David Henderson
Research Library A830, Room 7201

Bell Telephone Laboratories, Inc.
ATTN: Technical Report Center

Boeing Company
ATTN: Aerospace Library
Reynold Atlas

California Research and Technology, Inc.
ATTN: Dr. K. H. Kreyenhagen
Technical Library

Civil/Nuclear Systems Corporation
ATTN: Robert Crawford

General Dynamics Corporation
ATTN: Keith Anderson

General Electric Company,
TEMPO-Center for Advanced Studies
ATTN: BASIAC

IIT Research Institute
ATTN: Technical Library

Institute for Defense Analyses
ATTN: IDA Librarian Ruth S. Smith

Consulting and Special Engineering Services, Inc.
ATTN: Dr. J. L. Harvitt

Kaman Avidyne, Division of Kaman Sciences Corp.
ATTN: Technical Library

DEPARTMENT OF DEFENSE CONTRACTORS (Continued)

Lockheed Missiles and Space Company
ATTN: Tech Info Center D/Coll

Lockheed Missiles and Space Company, Inc.
ATTN: Technical Library

Martin Marietta Aerospace, Orlando Division
ATTN: M. Anthony
Gerbert E. McQuaig (MP-81)

University of New Mexico,
Dept of Campus Security and Police
ATTN: G. E. Triandafalidis

Physics International Company
ATTN: Doc Control for Technical Library
Doc Control for Mr. Larry Behrman

R&D Associates
ATTN: Dr. Harold L. Brode
Dr. H. F. Cooper, Jr.
Technical Library
Dr. C. P. Knowles
Mr. J. G. Lewis

Systems, Science and Software
ATTN: Dr. Donald R. Grine
Dr. E. W. Gaffney
Technical Library

Terra Tek, Inc., University Research Park
ATTN: Mr. S. J. Green
Technical Library

Texas A&M University
ATTN: Harry Coyle

Texas A&M University
ATTN: Prof. L. J. Thompson

Braddeek, Dunn, & McDonald, Inc.
ATTN: Technical Library

TRW Systems Group
ATTN: Tech Info Center/8-1930

Weidlinger Associates, Consulting Engineers
ATTN: Dr. Melvin L. Baron

Weidlinger Associates, Consulting Engineers
ATTN: Dr. J. Isenberg

Georgia Institute of Technology,
Department of Aerospace Engineering
ATTN: S. V. Managud
L. H. Rehfield

Pacific Technology, Inc.
ATTN: G. I. Kent
R. L. Bjork

DOMESTIC EXCHANGE

Tennessee Valley Authority

In accordance with letter from DAEN-RDC, DAEN-ASI dated 22 July 1977, Subject: Facsimile Catalog Cards for Laboratory Technical Publications, a facsimile catalog card in Library of Congress MARC format is reproduced below.

Bernard, Robert S

Empirical analysis of projectile penetration in rock / by Robert S. Bernard. Vicksburg, Miss. : U. S. Waterways Experiment Station ; Springfield, Va. : available from National Technical Information Service, 1977.

22 p. : ill. ; 27 cm. (Miscellaneous paper - U. S. Army Engineer Waterways Experiment Station ; S-77-16)

Prepared for Defense Nuclear Agency, Washington, D. C., under Subtask Y99QAXSB211, "Penetration," Work Unit 14, "Technical Penetration Developments."

References: p. 10.

1. Empirical method. 2. Penetration tests. 3. Projectiles. 4. Rock masses. I. Defense Nuclear Agency. II. Series: United States. Waterways Experiment Station, Vicksburg, Miss. Miscellaneous paper ; S-77-16.
TA7.W34m no.S-77-16