

AD-A054 647

MASSACHUSETTS INST OF TECH CAMBRIDGE
AMORPHOUS-SEMICONDUCTOR JUNCTION EFFECTS.(U)
APR 78 D ADLER

F/G 20/12

UNCLASSIFIED


ARO-11575.9-P

DAAG29-74-C-0006
NL

| OF |
ADA
054647



END
DATE
FILMED
6-78
DDC

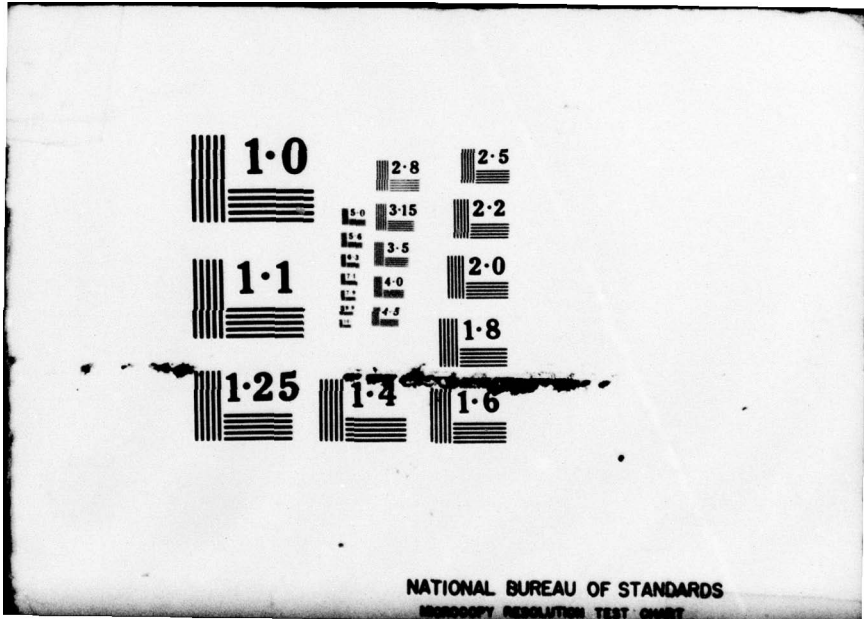

FOR FURTHER TRAN: ~~SECRET~~ ARO 11575.9-P

12

act

AD A 054647

- 6 AMORPHOUS-SEMICONDUCTOR JUNCTION EFFECTS.
- 7 FINAL REPORT, 1 Jan 74-31 Dec 77,
- 10 DAVID/ADLER
- 11 10 APR 1978
- 12 12p.
- 18 ARO
- 19 11575.9-P

AD No. _____
DDC FILE COPY

U. S. ARMY RESEARCH OFFICE
15 DAAG29-
CONTRACT NO. DARS-04-74-C-0006
MASSACHUSETTS INSTITUTE OF TECHNOLOGY

DDC
RECEIVED
JUN 6 1978
RESOLVED

APPROVED FOR PUBLIC RELEASE:
DISTRIBUTION UNLIMITED

[Handwritten signature]

1473
220 000

LB

ROUTING AND TRANSMITTAL SLIP

Date

15 May 78

TO: (Name, office symbol, room number, building, Agency/Post)

Initials Date

1.	DDC		
2.			
3.			
4.			
5.			

Action	File	Note and Return
Approval	For Clearance	Per Conversation
As Requested	For Correction	Prepare Reply
Circulate	For Your Information	See Me
Comment	Investigate	Signature
Coordination	Justify	

REMARKS

Prefix DAAG29 supersedes prefix DAHC04.

The Grant Number itself has not been affected.

DO NOT use this form as a RECORD of approvals, concurrences, disposals, clearances, and similar actions

FROM: (Name, org. symbol, Agency/Post)
Robin M. Haley, ARO Library

Room No.—Bldg.

Phone No.
935-3331 (AUTOVON)

5041-102

U.S. GOVERNMENT PRINTING OFFICE 48-16-54055-1

OPTIONAL FORM 41 (Rev. 7-76)
Prescribed by GSA
FPMR (41 CFR) 101-11.206

DDC LIFE COPY
VD V024043
VD V024043

Unclassified

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER	2. JOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) Amorphous-Semiconductor Junction Effects ✓		5. TYPE OF REPORT & PERIOD COVERED Final Report ✓ 1 Jan. 1974-31 Dec. 1977
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) David Adler	8. CONTRACT OR GRANT NUMBER(s) DAGG29- DAGG 84-74-C-006 <i>new</i>	
9. PERFORMING ORGANIZATION NAME AND ADDRESS Massachusetts Institute of Technology ✓ Cambridge, MA 02139		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
11. CONTROLLING OFFICE NAME AND ADDRESS U. S. Army Research Office P. O. Box 12211 Research Triangle Park, NC 27709		12. REPORT DATE April 10, 1978 ✓
		13. NUMBER OF PAGES
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		15. SECURITY CLASS. (of this report) unclassified
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES The findings in this report are not to be construed as an official Department of the Army position, unless so designated by other authorized documents.		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Amorphous Semiconductors, Switching, Negative Differential Resistance, Transistor, Electronic Structure, Hot Electrons, Heterojunctions.		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) Heterojunctions between amorphous semiconductors and crystalline semiconductors have been investigated in detail. In particular, chalcogenide-glass /n-Si, chalcogenide-glass/p-Si, chalcogenide-glass/a-Si, and chalcogenide glass/n-GaAs heterojunctions were fabricated and analyzed. Band models which explain the electronic and optical behavior have been derived. It was shown that these band models remain valid when the chalcogenide glasses are switched into the on state. A transistor was fabricated in which the glass served as contd. → <i>next page</i>		

20 Abstract contd.:

the emitter. The current gain increases by a factor of about 1000 when the glass is switched. These results together with pulse studies resulted in a complete analysis of the threshold switching and recovery processes.

ACCESSION for	
NTIS	White Section <input checked="" type="checkbox"/>
DDC	Buf. Section <input type="checkbox"/>
UNANNOUNCED	<input type="checkbox"/>
JUSTIFICATION.....	
BY.....	
DISTRIBUTION/AVAILABILITY CODES	
Dist.	AVAIL. and/or SPECIAL
A	

1.0 Amorphous-Semiconductor Heterojunctions

1.1 Band Models for Chalcogenide-Glass/Crystalline-Silicon Heterojunctions

Band models previously applied to off-state chalcogenide-glass/crystalline-Si heterojunctions have been generalized considerably. In particular, they have been extended to account for large variations in doping concentration in the silicon and have been shown to be applicable after the threshold-type glass-s have been switched into the on state. In addition, transient-on-characteristics and recovery curves have been measured and shown to be consistent with the band models. An important new consequence of the heterojunction results is that the on-state can be sustained by the injection of electrons from the glass into the silicon. This is contrary to several double-injection models for switching.

1.2 Electronic Properties of Chalcogenide-Glass/Crystalline-Silicon Heterojunctions

Low-field studies of crystalline/amorphous heterojunctions have shown that the space-charge region in the glass is more extensive (1000-2000 Å from the interface) than previously believed. In addition, the density of interface states turns out to be much smaller ($3 \times 10^{12} \text{ cm}^{-3}$) than in crystalline heterojunction systems. This could arise from the lack of a fixed lattice in amorphous systems, and suggests a great advantage of glass/crystalline heterojunctions in device design. The resulting electronic behavior is that of an ideal heterojunction.

1.3 Properties of Chalcogenide-Glass/Amorphous-Silicon Heterojunctions

Thin-film chalcogenide-glass/amorphous Si heterojunction devices were fabricated by rf sputtering and photolithographic techniques. Conductivity as a function of voltage and temperature, photoresponse, and switching were

observed in an attempt to characterize the heterojunction band structure and switching properties. Conductivity was found to be completely symmetric with respect to applied-voltage polarity, and to exhibit normal semiconducting temperature behavior: $\sigma = \sigma_0 \exp(-E_a/kT)$. The heterojunction capacitance was independent of the magnitude and polarity of the bias voltage, indicating that any space-charge regions are narrow. The photoresponse results indicated a barrier height of 0.67 eV at the interface between the glass and Mo electrode, but no signal attributable to the heterojunction was observed, suggesting that the bands are flat near that interface.

In addition to the normal switching observed in single component devices, a unique secondary switching phenomenon was found to occur after application of moderately high current levels. This took the form of switching from the normal on state to either a single, stable, high-conductivity state or multiple, unstable, high-conductivity states. After prolonged secondary switching, the normal on state disappeared entirely, leaving only the off state and the high-conductivity states. The secondary switching could be associated with effects in the amorphous Si, most likely a partial crystallization due to excessive heating. Switching is symmetric with respect to voltage polarity, except for a slight increase in delay time and decrease in holding voltage when the chalcogenide side of the heterojunction is negatively biased.

1.4 Properties of Chalcogenide-Glass/GaAs Heterojunctions

The on-state current-voltage characteristics of chalcogenide-glass/n-GaAs heterojunctions have been measured. The results have been analyzed using previously determined boundary conditions for GaAs devices and the on-state characteristics of the glass. The results show that a large electric

field is present at the glass/GaAs interface when electrons are injected into the GaAs, implying that a negative charge density exists in the glass near the interface. A band model has been developed to explain these results.

2.0 Amorphous/Crystalline Heterojunction Transistors

A unique device employing a threshold-type chalcogenide glass as one terminal and crystalline Si or Ge as the other two terminals of a heterojunction transistor has been fabricated. The device exhibits strikingly different behavior depending on whether the glass is in the off state or the on state. In the off state, no gain has been observed. However, once the glass is switched, either current gain or voltage gain is possible, depending on the configuration. Current gains in excess of 10 have been observed. The device can be operated so that it will remain in the high-gain state after the switching pulse is entirely removed. Short-pulse experiments indicate that operation is electronic rather than thermal. Previous results on amorphous-crystalline heterojunctions have been used to construct a band model for the transistor. This model was also used to analyze the steady-state and pulsed-mode characteristics of the device. New studies of the on-state current density and carrier concentration were used to calculate the expected gain as a function of current and base doping concentration, with results in good agreement with the experimental data. The behavior of the devices provides another confirmation of the electronic nature of threshold switching in chalcogenide glasses. An additional implication of the data is the predominance of electrons rather than holes in the on state of the glass, in direct contrast to the low-field behavior.

3.0 Studies of Chalcogenide-Glass Threshold Switching

3.1 Size of the Conducting Filament in Threshold Switches

Four distinct sets of experiments have been carried out to determine the size of the conducting filament in the on state of an amorphous threshold switch as a function of steady-state current. It was found that the filament is much wider (e.g. 20 μm in diameter at 50 mA current) than is compatible with thermal calculations. An upper limit of 60°C can be established for the maximum temperature rise in the material for on-state currents between 10 mA and 200 mA. This establishes unambiguously the electronic nature of the on state.

3.2 Nature of the On State

A detailed study of the on state of amorphous threshold switches has been performed. Transient and steady-state I-V characteristics have been investigated as functions of film thickness, pore size, and electrode material. Velocity saturation effects in amorphous/crystalline Si heterojunctions and threshold recovery curves were also studied. It is found that the on-state resistivity is approximately 0.08 Ωcm , independent of electrode material. The on state is that of a semiconductor whose electronic band structure and carrier mobility are essentially unchanged from the off state, but in which a concentration of about 7×10^{18} free electron/ cm^3 produces the high conductivity observed. The decay of the on state is due to a combination of the size of the conducting filament as a function of operating current. As expected, the current density in the filament is essentially independent of on-state current, provided the filament does not saturate the device pore. However, the filament turns out to be much larger than previous speculations, leading to the result that heating effects are negligible at currents below those for which the pore saturates.

3.3 Mechanism for Threshold Switching

Steady-state and time-dependent electrothermal calculations of the current-voltage characteristics and voltage-time profiles for chalcogenide-glass films have been calculated and the results compared with experiment. Agreement with experiment requires a critical electric field at which the switching transition begins. For switching without memory, it was found that (1) heating is insignificant and (2) the switching delay time cannot be a thermal effect. Consequently, a purely electronic model based on the unique electronic structure of chalcogenide glasses has been developed. The equal densities of positively and negatively charged traps that exist in the bulk are neutralized by the excess carriers that are produced by field-induced avalanche multiplication. This process of trap filling causes the delay time. When all the charged traps are neutralized, the drift mobility of a transition carrier increases by several orders of magnitude, thus producing the on state.

3.4 Recovery of the Off State

A model for the recovery of the off state after the holding voltage is removed from a chalcogenide-glass threshold switch has been developed. In this approach, the Schottky barrier near the cathode remains for a time, allowing carrier generation to proceed even in the absence of any applied field. This persistence of the cathode Schottky barrier is consistent with the valence-alternation model of Kastner, Adler, and Fritzsche, and is responsible for the detailed nature of the recovery curves. The conducting state then remains until radial ambipolar diffusion causes the filament to shrink to zero radius. Only after that point does generation cease. The model has been used to predict quantitatively the resistance of the device as a function of time for several different values of the operating cur-

rent. The results are in very good agreement with subsequently performed experiments.

4.0 Electron- and Photon-Induced Conductivity in Chalcogenide Glasses

A comprehensive study of the effects of electron and photon beams on the electrical properties of rf-sputtered chalcogenide-glass films of composition $\text{Te}_{40}\text{As}_{35}\text{Si}_{15}\text{Ge}_7\text{P}_3$ has been carried out. Optical results indicate that the material has a gap near 1.1 eV. Four major conclusions follow from a detailed investigation of the field and polarity dependence of the photocurrent: (1) the exponential increase of dark conductivity with electric field intensity is a carrier concentration rather than a mobility effect; (2) internal fields exist at molybdenum-chalcogenide junctions; (3) hole conduction dominates electron conduction at room temperature; (4) the chalcogenide bands bend up at the interface with molybdenum electrodes. Electron-beam-induced conductivity (EBIC) resulting from bombardment by 5-20 keV electrons has also been studied as a function of applied voltage on these films. A threshold energy of about 7 keV is necessary to obtain an EBIC signal, resulting from a schubweg of the order of 1000 \AA and a film thickness of 1 \mu m . The photoconductivity and EBIC results are consistent and indicate that the product of mobility and lifetime for the carriers in these materials is approximately $2 \times 10^{-10} \text{ cm}^2/\text{V}$. This corresponds to carrier lifetimes of the order of $2 \times 10^{-11} \text{ sec}$. The drift mobility is trap controlled and of the order of $2 \times 10^{-5} \text{ cm}^2/\text{Vsec}$.

Theses Completed

Gary W. Lake, "Photoeffects in Threshold-Type Amorphous-Semiconductor Switches," S.M., Department of Electrical Engineering, May, 1974.

Stephen F. Newton, "Properties of Chalcogenide-Glass/Amorphous-Silicon Heterojunctions," S.M., Department of Electrical Engineering, September, 1974.

Kurt E. Petersen, "Amorphous/Crystalline Heterojunctions, Devices, and Switching Phenomena," Ph.D., Department of Electrical Engineering, June, 1975.

Thomas L. Korzeniowski, "The Effects of Laser Light on Amorphous Threshold Switching," B.S., Department of Electrical Engineering, February, 1977.

Robert C. Frye, "Chalcogenide-Glass/n-GaAs Heterojunctions," S.M., Department of Electrical Engineering, June, 1977.

Publications

K. E. Petersen and D. Adler, "On-State Characteristics of Amorphous/Crystalline Heterojunctions," Appl. Phys. Lett. 25, 211-213 (1974).

D. K. Reinhard, D. Adler, and F. O. Arntz, "Photoconductivity and Electron-Bombardment-Induced Conductivity Studies of Multicomponent Chalcogenide Films," in Amorphous and Liquid Semiconductors, J. Stuke and W. Brenig, eds., Taylor and Francis, London, 1974, pp. 745-752.

D. Adler, F. O. Arntz, L. P. Flora, B. P. Mathur, and D. K. Reinhard, "Non-Ohmic Effects in Amorphous Chalcogenide Films and in Chalcogenide-Silicon Heterojunctions," in Amorphous and Liquid Heterojunctions, J. Stuke and W. Brenig, eds., Taylor and Francis, London, 1974, pp. 859-866.

D. Adler and L. P. Flora, "Holding Current and Recovery in Amorphous Threshold Switches," in Amorphous and Liquid Semiconductors, J. Stuke and W. Brenig, eds., Taylor and Francis, London, 1974, pp. 1407-1412.

- K. E. Petersen, D. Adler, and M. P. Shaw, "Operation of an Amorphous-Emitter Transistor," Appl. Phys. Lett. 25, 585-587 (1974).
- K. E. Petersen, D. Adler, and M. P. Shaw, "Fabrication and Operation of an Amorphous-Emitter Transistor," in Proc. Intern. Electron Devices Meeting (IEEE, N.Y., 1974) pp. 569-572.
- K. E. Petersen and D. Adler, "The Electronic Nature of Amorphous Threshold Switching," Appl. Phys. Lett. 27, 625-627 (1975).
- K. E. Petersen and D. Adler, "The On State in Amorphous Threshold Switches," J. Appl. Phys. 47, 256-263 (1976).
- D. K. Reinhard, D. Adler, and F. O. Arntz, "Electron and Photon Induced Conductivity in Chalcogenide Glasses," J. Appl. Phys. 47, 1560-1573 (1976).
- K. E. Petersen, D. Adler, and M. P. Shaw, "Amorphous/Crystalline Heterojunction Transistors," IEEE Trans. Elec. Devices ED-23, 471-477 (1976).
- K. E. Petersen and D. Adler, "On-State Characteristics of Amorphous Threshold Switches," in Structure and Properties of Non-Crystalline Semiconductors," B. T. Kolomiets, ed. (Nauka, Leningrad, 1976) pp. 475-479.
- K. E. Peterson, D. Adler, and M. P. Shaw, "Hybrid Amorphous/Crystalline Transistors," in Structure and Properties of Non-Crystalline Semiconductors, B. T. Kolomiets, ed. (Nauka, Leningrad, 1976) pp. 480-484.
- D. Adler, "Threshold Switching in Chalcogenide Glasses," in Amorphous and Liquid Semiconductors, W. E. Spear, ed., Edinburgh, 1977, pp. 695-706.
- K. Subhani, M. S. Shur, M. P. Shaw, and D. Adler, "The Mechanism for Switching in Thin Chalcogenide-Based Amorphous Films," in Amorphous and Liquid Semiconductors, W. E. Spear, ed., Edinburgh, 1977, pp. 712-716.
- K. E. Petersen and D. Adler, "A Model for Recovery of the Off State in Chalcogenide-Glass Threshold Devices," in Amorphous and Liquid Semiconductors, W. E. Spear, ed., Edinburgh, 1972, pp. 707-711.