

AD-A067 608

FOREIGN TECHNOLOGY DIV WRIGHT-PATTERSON AFB OHIO
MINIMUM WETTING RATE OF A VERTICAL SURFACE IN A TWO-PHASE LIQUI--ETC(U)
JUN 78 W SOKOL

F/G 20/4

UNCLASSIFIED

FTD-ID(RS)T-0935-78

NL

| OF |

AD
A067608



END
DATE
FILMED
6-79
DDC

1

AD-A067608

FOREIGN TECHNOLOGY DIVISION



MINIMUM WETTING RATE OF A VERTICAL SURFACE IN A TWO-PHASE LIQUID-GAS FLOW IN A FIELD OF CENTRIFUGAL FORCES.
I. ANALYSIS OF THE PROCESS FOR COUNTERCURRENT FLOW

by

Wlodzimierz Sokol



DDC
RECORDED
16 APR 1979
REGISTERED
E

Approved for public release;
distribution unlimited.

78 12 26 423

EDITED TRANSLATION

FTD-ID(RS)T-0935-78 23 June 1978

MICROFICHE NR: *FTD-78-C-000892*

CSI77270495

MINIMUM WETTING RATE OF A VERTICAL SURFACE
IN A TWO-PHASE LIQUID-GAS FLOW IN A FIELD
OF CENTRIFUGAL FORCES. I. ANALYSIS OF THE
PROCESS FOR COUNTERCURRENT FLOW

By: Wlodzimierz Sokol

English pages: 23

Source: Inzynieria Chemiczna, Volume 7, Number 2,
1977, pages 437-452

Country of origin: Poland

Translated by: Linguistic Systems, Inc.
F33657-76-D-0389
F. Zaleski

Requester FTD/TQTA

DISTRIBUTION STATEMENT A
Approved for public release;
Distribution Unlimited

NTIS	White Section <input checked="" type="checkbox"/>
DDC	Buff Section <input type="checkbox"/>
UMANNOUNCED	<input type="checkbox"/>
JUSTIFICATION _____	
BY _____	
DISTRIBUTION/AVAILABILITY CODES	
Dist. AVAIL and/or SPECIAL	
A	-

<p>THIS TRANSLATION IS A RENDITION OF THE ORIGINAL FOREIGN TEXT WITHOUT ANY ANALYTICAL OR EDITORIAL COMMENT. STATEMENTS OR THEORIES ADVOCATED OR IMPLIED ARE THOSE OF THE SOURCE AND DO NOT NECESSARILY REFLECT THE POSITION OR OPINION OF THE FOREIGN TECHNOLOGY DIVISION.</p>	<p>PREPARED BY: TRANSLATION DIVISION FOREIGN TECHNOLOGY DIVISION WP-AFB, OHIO.</p>
--	--

Minimum Wetting Rate of a Vertical Surface in a Two-Phase Liquid-Gas Flow
in a Field of Centrifugal Forces. I. Analysis of the Process for Counter-
current Flow

Włodzimierz Sokol

Institute of Chemical Engineering and Technology at the Technical-Agricultural
Academy in Bydgoszcz

Published May 7, 1976

As a result of considerations the following equation is given:

$$Re_{\min} = \left(\frac{3D + n^2 C R_{\min}^{0.75} - n^2 K R_{\min}^{0.75}}{2n^2 A} \right)^{4/3}$$

describing the values of the minimum wetting Reynolds number Re_{\min} related to the wetting of the inner surface of a vertical pipe in a countercurrent two-phase liquid-gas flow in the field of centrifugal forces. The value of the coefficient n taking into account the deviation between the theoretical Reynolds numbers Re_{\min}^0 and the experimental ones Re_{\min} should be determined experimentally.

Moreover, it has been found that the rotational motion of the wetting surface brings about a decrease in the values Re_{\min} in comparison with the Reynolds numbers Re_{\min}^0 which are indispensable for covering the whole wetting surface in the case of the absence of rotation.

1. INTRODUCTION

The problem of minimum unit wetting rate has been considered in a series

of studies both in a theoretical and experimental way.

By this concept the minimum unit wetting rate defines such a wetting value under which the whole covering of the wetting surface by a flowing liquid does not occur.

From the theoretical considerations presented in research work [1] it follows that the value of the minimum wetting rate Γ_{\min} in the case when the gas phase is immobile, is decided, among others, by the centrifugal acceleration a .

This study is a continuation of the investigations on minimum wetting rate Γ_{\min}^0 in a two-phase flow and in particular refers to the minimum wetting rate Γ_{\min} of the inner surface of a vertical pipe in a countercurrent two-phase liquid-gas flow in the field of centrifugal forces.

In this work the process in which the flowing liquid wets the inner surface of the vertical pipe while the gas flows from the bottom toward the top by the remaining section of the pipe is called the countercurrent two-phase liquid-gas flow.

The dependence Γ_{\min} and more strictly corresponding to it, the Reynolds numbers Re_{\min} were formulated from the following quantities: centrifugal acceleration a , absolute value of gas in w_g , extreme angle of wetting θ and physical properties of density ρ and viscosity η fluids. Results of the theoretical considerations

made it possible to establish the effect of centrifugal acceleration a on the minimum values of Reynolds numbers Re_{\min} .

2. THEORETICAL MINIMUM WETTING RATES \mathcal{T}_{\min}

According to Hobler [1] the total kinetic energy e_k corresponding to the velocity of the liquid layer in a vertical direction and of the energy e_σ of tensions at the interfacial surface decides the minimum value of the unit wetting rate \mathcal{T}_{\min}^* in the case when the gas phase is immobile.

In this work it is given that the \mathcal{T}_{\min} value is also decided by the total of the unit of kinetic energy e_k , corresponding to the velocity of the liquid layer in a vertical direction in a countercurrent ~~two~~ two-phase liquid-gas flow and the unit of energy e_σ resulting from the appearance of tensions at interfacial surfaces. Consequently the energy deciding the value \mathcal{T}_{\min} can be presented by the following equation:

$$e = e_k + e_\sigma \quad (1)$$

2.1 UNIT KINETIC ENERGY e_k

With attention to the small thickness of the liquid layer in relation to the inner diameter of wetted pipes used in industry [2, 3], the flow-off of liquid along the inner surface of the pipe was handled as the flow-off of liquid along the vertical flat wall [4].

In research work [4] the formula is given:

$$e_k = A Re_c^{2/3} x^{-2/3} + B Re_c - C B Re_c^{1/3} x^{-1/3}, \quad (2)$$

where

$$A = \frac{1}{24,236} b^5 g \rho_c \vartheta_{ms}^2, \quad (2a)$$

$$B = \frac{1}{512,102} \frac{b^3 \lambda^2 \rho_g^2 w_g^4}{g \rho_c}, \quad (2b)$$

$$C = \frac{1}{56,368} b^4 \lambda \rho_g w_g^2 \vartheta_{ms}, \quad (2c)$$

$$\vartheta_{ms} = \left(\frac{\eta_c^2}{\rho_c^2 g} \right)^{1/3},$$

describing unit kinetic energy e_k of the liquid layer flowing off along the flat vertical surface. The quantity w_g denotes the average velocity of gas counted in relation to the surface of liquid flowing off, equal to the total of liquid velocity w'_c on the surface of the layer and the absolute velocity of gas w_{gb} described by the equation

$$w_{gb} = \frac{4V}{\pi d^3}.$$

The values of coefficient b , defined as the ratio of mean thickness s of laminar layer of liquid in a countercurrent two-phase liquid-gas flow to the mean equivalent thickness s_z , are described by the equation

$$b^3 - T b^2 - 1 = 0, \quad (3)$$

where

$$T = \frac{3}{16} \frac{\lambda \rho_g w_g^2}{\rho_c g s_z}, \quad (3a)$$

$$s_z = 0,9085 \vartheta_{ms} Re_c^{1/3}, \quad (3b)$$

given in work [4].

Equations (2) and (3) are designated by the following assumption [4]:

(a) the liquid is distributed equally along the wetted surface by an ideal spray;

(b) after a starting path the liquid flow is developed, then the velocity profile in the fluid layer is stabilized;

(c) the flow-off of the liquid is laminar with the omission of surface undulation, the liquid then flows as a layer of identical thickness;

(d) the phenomenon of detachment of drops from the layer of flowing liquid does not occur;

(e) mass transfer does not occur nor does a heat transfer between the fluid and gas.

2.2 UNIT TENSION ENERGY e_σ

The image of tensions at interfacial surfaces in the case of centrifugal acceleration is presented in Figure 1 [1]. Energy E_σ corresponding to the tensions presented is described by the following [1]

$$E_\sigma = F_1(\sigma_{1-2} - \tau) + F_1\sigma_{2-3} + F_2\sigma_{1-3}. \quad (4)$$

After establishing equilibrium of forces for the given assembly solid-liquid-gas the equation [1] is fulfilled

$$\sigma_{1-3} = \sigma_{2-3} \cos \theta + \sigma_{1-2}.$$

Considering the last equation in relation to (4) we get

$$E_\sigma = F_1\sigma_{1-2} - F_1\tau + F_1\sigma_{2-3} + F_2(\sigma_{2-3} \cos \theta + \sigma_{1-2}). \quad (5)$$

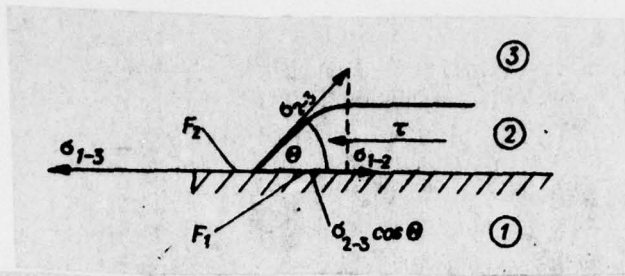


Fig. 1. Image of surface tensions at interfacial surface in the case of wetted surface rotation
 1 - cialo stało - solid, 2 - ciecz - liquid, 3 - gaz - gas

Bringing to this equation the concept: unit tension energy $e_\sigma = E_\sigma / F (\text{J/m}^2)$ and the degree of surface covering by liquid $x = F_1 / F$, after simple transformations we get the equation

$$e_\sigma = Dx - x\tau + H, \tag{6}$$

where

$$D = \sigma_{2-3}(1 - \cos \theta), \quad H = \sigma_{2-3} \cos \theta + \sigma_{1-3}.$$

The quantity τ appearing equation (6) denotes the shear stress at surface being the result of the occurrence of centrifugal acceleration (Fig. 1) [1]. Then, theoretical considerations conducted by Hobler [1] lead to the following

$$\tau = \frac{\rho c s_l^2 \omega}{2}, \tag{7}$$

describing the value of stress τ .

The thickness s_l of the laminar liquid layer is described by the equation

$$s_l = 0,9085 b \theta_{oc} Re_{c,l}^{1/2} \tag{8}$$

given in work [4].

With attention to the only partial liquid covering of the wetted surface, the local Reynolds number $Re_{c,x}^l$ can be presented by the equation [5]:

$$Re_{c,x}^l = \frac{4\Gamma}{\eta_e} = \frac{4G}{x\eta_e} = \frac{1}{x} Re_c. \quad (9)$$

The Reynolds number Re_c is calculated as if the entire surface were covered by a layer of liquid, flowing with mass rate G .

It is easy to note that when the layer of liquid covers the entire wetted surface evenly, then $x=1$, the value of the local Reynolds number $Re_{c,x}^l$ is equal to average Reynolds number Re_c .

Considering the equations (8) and (9) in equation (7) we finally get

$$\begin{aligned} \tau &= 0,4127 b \theta_{\infty}^2 e_c a Re_c^{2/3} x^{-2/3} \\ \text{or} \\ \tau &= K Re_c^{2/3} x^{-2/3}, \end{aligned} \quad (10)$$

where

$$K = 0,4127 b \theta_{\infty}^2 e_c a. \quad (10a)$$

Using equation (10) with reference to (6) we may write

$$e_c = Dx - K Re_c^{2/3} x^{1/3} + H. \quad (11)$$

As already mentioned the total of the energy e_k and e_{σ} decides the value of $\mathcal{F}_{\text{mint}}$. Considering equations (2) and (11) with reference to (1) the following equation is obtained

$$e = A Re_c^{2/3} x^{-2/3} + B Re_c - C Re_c^{4/3} x^{-1/3} + Dx - K Re_c^{2/3} x^{1/3} + H, \quad (12)$$

defining the whole unit energy e .

In order to illustrate this equation Figure 2 presents the values of factors e -H for $\theta=10^0$, $w_{gb}=10\text{m/s}$ and several Re_c , a and x .

The relative gas velocity w_g , occurring in the quantities B and C of this equation are calculated according to the equation

$$w_g = w_{gb} + w'_c,$$

where

$$w'_c = \frac{g \rho_c s^2}{2 \eta_c} - \frac{\lambda g w_g^2 s}{8 \eta_c},$$

designated in research work [4].

The values for the drag coefficients λ were designated from the following relations:

(a) for laminar gas flow ($Re_{gz} < 2100$)

$$\lambda = \frac{86}{Re_{gz}};$$

(b) for turbulent gas flow ($Re_{gz} \geq 2100$)

$$\lambda = \frac{0,3441}{Re_{gz}^{0,229}},$$

where

$$Re_{gz} = \frac{w_{gz} d \rho_g}{\eta_g}, \quad w_{gz} = w_{gb} + w_{c,z},$$

$$w_{c,z} = \frac{Re_c \eta_c}{4 \rho_c s_z}, \quad d = D_1 - 2s_2,$$

given in research work [6].

The calculation of the value e-H was made for the water-air system, whose physical properties are:

$$e_c = 998,6 \text{ kg/m}^3, \quad e_o = 1,17 \text{ kg/m}^3, \quad \eta_o = 1,09 \cdot 10^{-3} \text{ kg/ms}, \\ \eta_e = 1,8 \cdot 10^{-3} \text{ kg/ms}, \quad \sigma = 73,05 \cdot 10^{-3} \text{ N/m}.$$

The inner diameter of the pipe $D_1 = 0.03\text{m}$ was taken into calculation. The absolute air velocity w_{gb} was smaller than the velocity of the choking up of the pipe, whose values were calculated on the basis of the equations given in research work [7]. The values for coefficient b, occurring in the quantities A, B, C and K, were determined by secant method [8] according to equations (3), (3a) and (3b). Results of the calculations are graphically presented in Figure 2.

From Figure 2 which presents the equations

$$e-H = f(Re_c, a, x, \theta, w_{gb}) \quad \text{and} \quad e^0-H = f(Re_c^0, x, \theta, w_{gb}),$$

it can be observed that for large values of Reynolds numbers $Re_c(Re_c^0)$, for example, larger than 100, the lowest values for the function e-H, (e^0-H), consequently the smallest value for energy e (e^0) occur when the wetted surface is completely covered ($x=1$). It is a different situation for small values of Reynolds numbers $Re_c(Re_c^0)$, for example smaller than 40, since the highest value of energy e (e^0) corresponds to a complete covering of the surface ($x=1$). It should be expected that in a range of 40 to 100 the system will aim at a tear in the liquid layer so as to result in achieving for the given case, the smallest energy value. As an example for $\theta=10^\circ$ and $w_{gb} = 10\text{m/s}$ the tendency for tearing of the liquid layer occurs approximately in the following Reynolds numbers:

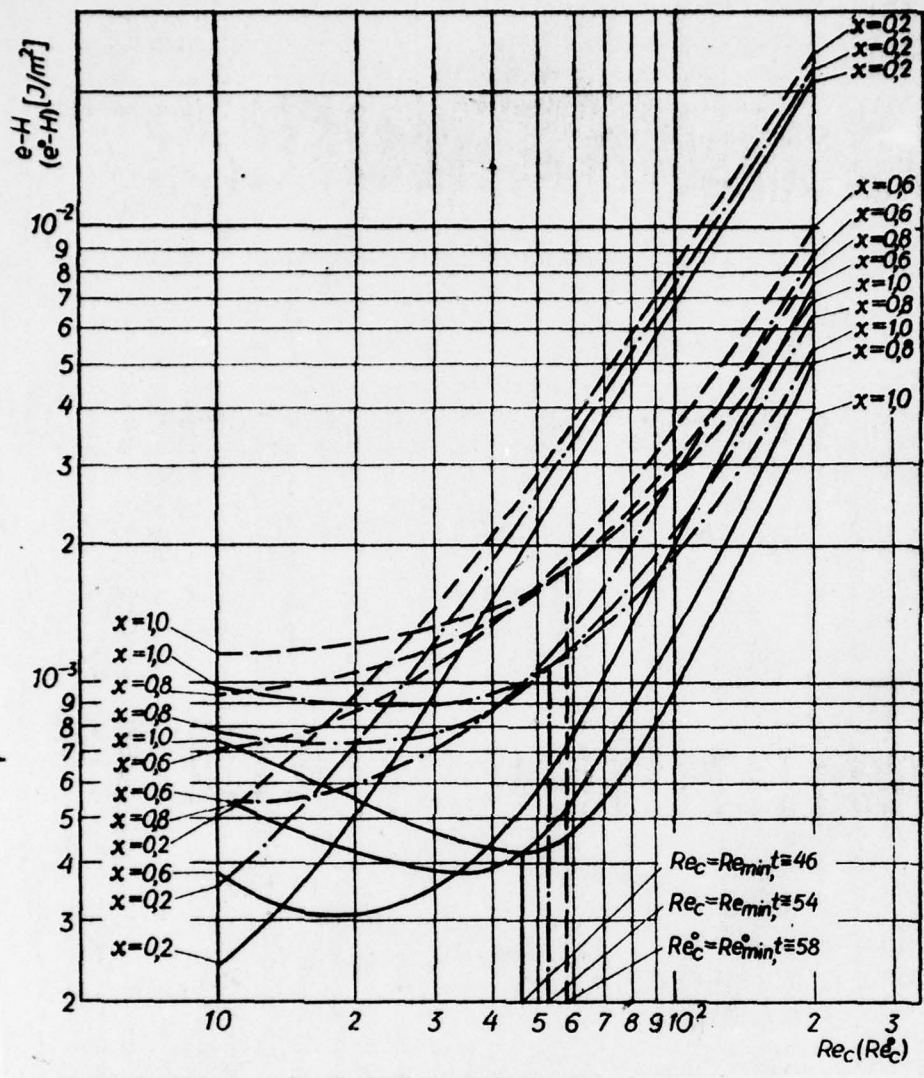


Fig. 2. Values of function $e - H$ calculated from equation (12) for $\theta = 10^\circ$, $w_{pb} = 10 \text{ m/s}$ and several Re_c , x and a
 - - - $a = 0$, - . - . $a = 50 \text{ m/s}^2$, — $a = 100 \text{ m/s}^2$

$$\begin{aligned}
 a = 0, \quad Re_c^0 &= Re_{mint}^0 \cong 58, \\
 a = 50 \text{ m/s}^2, \quad Re_c &= Re_{mint} \cong 54, \\
 a = 100 \text{ m/s}^2, \quad Re_c &= Re_{mint} \cong 46.
 \end{aligned}$$

The stretching of the liquid layer on the whole wetted surface should require an additional supply of energy. This results in the fact that the values Re_c , near which the tearing of the liquid layer can be expected, are closely connected with the centrifugal acceleration a , with unchanged values for the remaining parameters. The values $Re_c = Re_{mint}$ in the field of centrifugal forces are lower in comparison with the Reynolds numbers $Re_c^0 = Re_{mint}^0$ in the case when $a = 0$. Moreover, with an increase in the value a there occurs a decrease in Reynolds numbers $Re_c = Re_{mint}$ whereby the tendency appears for the tearing of the layer of liquid previously covering the whole wetted surface.

Tearing of the layer of liquid covering the whole wetted surface can be expected when the system reaches the lowest value of energy for $0 < x \leq 1$ (5). The appearance of the minimum of energy e defines the condition $de/dx = 0$.

The unstable condition of the liquid layer answering to the theoretical value of Reynolds number Re_{mint} , is defined by the smallest value of energy e in the case when $x = 1$. Justification of this statement is given in research work [4].

After introducing to the derivative

$$\frac{dc}{dx} = \frac{2}{3}A Re_c^{5/3} x^{-2/3} + \frac{1}{3}C Re_c^{4/3} x^{-4/3} + D - \frac{1}{3}K Re_c^{2/3} x^{-2/3} = 0$$

the value $x=1$ and using the index Re_{mint} with the Reynolds number to emphasize that it is a theoretical minimum Reynolds number value, the following equation is obtained

$$Re_{mint} = \left(\frac{3D + C Re_{mint}^{4/3} - K Re_{mint}^{2/3}}{2A} \right)^{3/5} \quad (13)$$

In the case where there is no centrifugal force, consequently when $a=0$, the quantity $K=0$ and equation (13) takes the form

$$Re_{mint} = \left(\frac{3D + C Re_{mint}^{4/3}}{2A} \right)^{3/5}, \quad (14)$$

and thus the very same as the equation defining the theoretical minimum Reynolds number Re_{mint}^0 in the countercurrent two-phase liquid-gas flow designated in research work [4].

Theoretical Reynolds numbers Re_{mint} are calculated on the basis of equation (13) for a water-air system at 20°C. for several angles of wetting. θ and velocity w_{gb} are presented in Figure 3, while in Figure 4 the values $(Re_{mint}^0 - Re_{mint}) / Re_{mint}^0$ are given depending on acceleration a for these same parameters.

It can be stated that the rotational movement of the wetted surface brings about a decrease in the value Re_{mint} in comparison with Reynolds numbers Re_{mint}^0 necessary to cover the whole wetted surface in the case of no rotation ($a=0$).

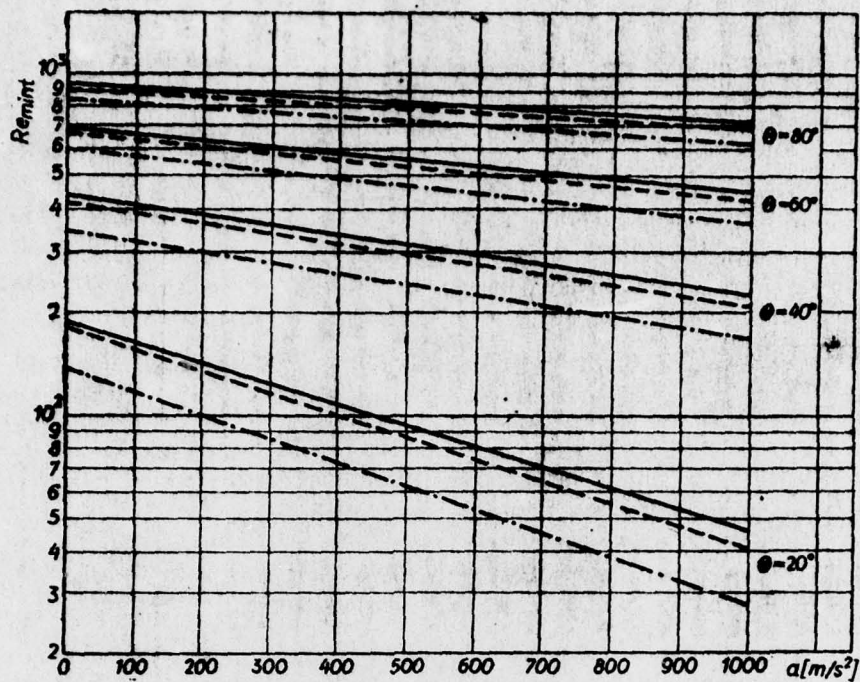


Fig. 3. Values of theoretical minimum Reynolds numbers Re_{\min} calculated from equation (13) for several angles θ and gas velocities w_{p0}
 w_{p0} (m/s): — = 1, - - - = 5, - · - · = 10

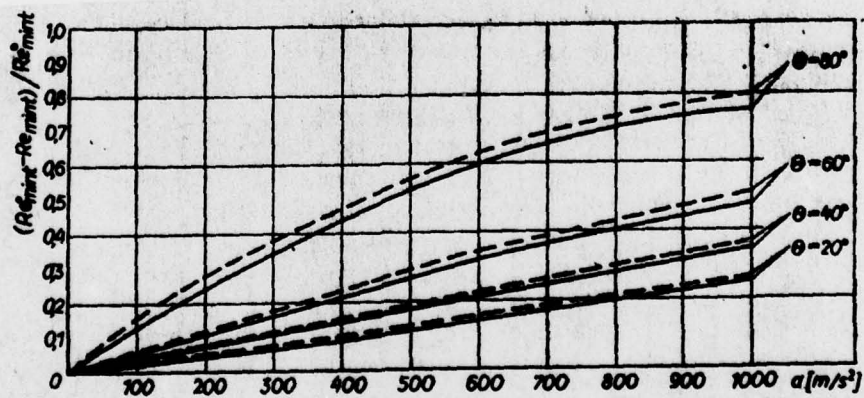


Fig. 4. Dependence of values $(Re_{\min}^0 - Re_{\min}) / Re_{\min}^0$ on centrifugal acceleration a , for several gas velocities w_{p0} and angles θ
 w_{p0} (m/s): - - - = 5, - · - · = 10

Evident also is the strong dependence of the value Re_{mint} on the extreme angle of wetting θ and the appearance for the given acceleration a of a ~~larger~~ larger reduction of the value Re_{mint} , in relation to Reynolds numbers Re_{mint}^0 , when $a = 0$, on surfaces indicating smaller angles of wetting θ , with unchanged values for the remaining parameters. Moreover, it can be noted that with given values of θ and a , a greater reduction of value Re_{mint} , compared with Re_{mint}^0 , takes place for greater gas velocities w_{gb} . Finally, Figure 5 presents a change in the value Re_{mint}^0/Re_{mint} depending on acceleration a and velocity w_{gb} .

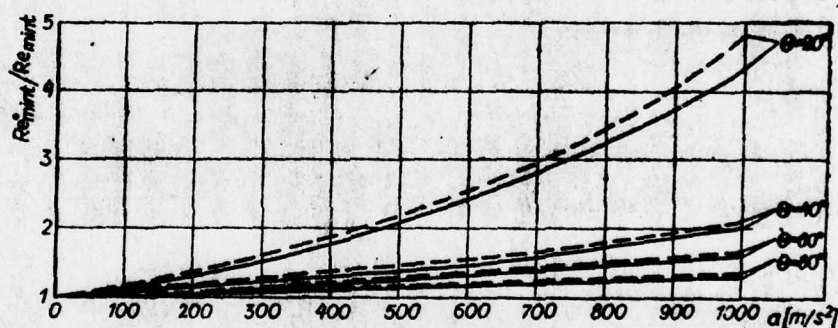


Fig. 5. Dependence of values Re_{mint}^0/Re_{mint} on centrifugal acceleration a for several gas velocities w_{gb} and angles θ
 w_{gb} (m/s): — — — — 5, - - - - 10

It can be noted that the greatest change of the quotient Re_{mint}^0/Re_{mint} takes place with an increase in acceleration a on the surfaces indicating the smallest values of the angle of wetting θ . Moreover, it is worth noting that the values Re_{mint} can even be several times smaller than the Reynolds numbers Re_{mint}^0 , with these same values of the remaining parameters. With greater velocities w_{gb} the values of the theoretical minimum Reynolds numbers Re_{mint} change more quickly with a change in acceleration a , when values of the remaining parameters

are unchanged (Figure 5). It is worth adding that equation (13) for $w_g = 0$ (then $C = 0$) takes the form

$$Re_{min} = \left(\frac{3D - K Re_{min}^{2/3}}{2A} \right)^{3/5}, \quad (15)$$

consequently the same as Hobler's equation defining the theoretical minimum Reynolds number Re_{min}^* in the field of centrifugal forces in a one-phase flow, given in research work [1].

3. ACTUAL MINIMUM WETTING RATE Γ_{min}

Considerations are presented which are irrespective of the appearance of phenomena bringing about a deviation of the minimum wetting rate from the theoretical value, and the Reynolds number Re_{min} closely corresponding to it and determined by equation (13). As was previously stated, equation (2) was determined by assuming the appearance of a uniform thickness of the wetted liquid layer. In practice, as a result of undulation in the liquid surface, irregular distribution of the liquid through sprayers, etc., the thickness of the liquid layer is not identical on the whole wetted surface.

Introducing the concept of the ratio of irregular wetting n , defined as the relation of actual thickness $s_{min,1}$ of the liquid layer at the place of its tearing to the theoretical thickness s_{min} , when wetting is ideal, then $n = s_{min,1} / s_{min}$ and using in this equation the following:

$$\begin{aligned} \delta_{min,l} &= 0,90856 \delta_{\infty} Re_{min,l}^{1/3}, \\ \delta_{min} &= 0,90856 \delta_{\infty} Re_{min}^{1/3} \end{aligned}$$

given in research work [4], we get

$$n = \left(\frac{Re_{min,l}}{Re_{min}} \right)^{1/3} \quad (17)$$

The number $Re_{min,l}$ is the local minimum Reynolds number in the thinnest place of the layer, and Re_{min} is the mean minimum Reynolds number.

The tearing of the liquid layer is the most probable in the spot where it is the thinnest. However, the value of the local minimum Reynolds number $Re_{min,l}$ is not known, but the Re_{min} value can be determined on the basis of the known equation [2],

$$Re_{min} = \frac{4\Gamma_{min}}{\eta_c}$$

Consequently, let us express the local minimum Reynolds number $Re_{min,l}$ by the equation

$$Re_{min,l} = n^3 Re_{min} \quad (18)$$

obtained from the equation (17).

Assuming that theoretical equation (13) governs each part of the layer of liquid flowing along the surface and using in that equation dependence (18), finally, we get

$$Re_{min} = \left(\frac{3D + n^4 C Re_{min}^{4/3} - n^2 K Re_{min}^{2/3}}{2n^3 A} \right)^{3/2} \quad (19)$$

The high exponents with the n quantity appearing in this equation indicate the very strong influence of the ratio of wetting irregularity on the values of the minimum Reynolds numbers Re_{min} .

Defining n we get $0 < n \leq 1$, then the wetting irregularity causes an increase in the value Re_{min} in comparison with the theoretical Reynolds numbers Re_{mint} .

Other phenomena also appear which bring about a deviation in the experimental results from theoretical predictions and at that, acting in the opposite direction consequently decreasing the Re_{min} values in relation to Re_{mint} . We can include in them, among others, vibration of the apparatus, undulation of the liquid layer in a vertical direction, etc. [1, 4, 9, 10].

Introducing to equation (19) additional coefficients which consider the effects which favor surface wetting, would be pointless since practically it is very difficult to isolate them. In this regard the n quantities are considerably extended, giving it a character of adjustment considering the appearance of all the phenomena bringing about the deviation of theories from practical cases.

Unfortunately the n values cannot be established theoretically but must be determined experimentally for the given liquid-gas system, with the manner used of distributing the liquid along the wetted surface [11-15].

The manner of experimental determination of the value of coefficient n is presented in research work [16]. In the cited work equations are also given which describe the n values for the wetting process of the inner surface of a vertical pipe in a countercurrent two-phase liquid-gas flow in the case of the absence of rotation of the wetted surface.

4. CONCLUSIONS

On the basis of the considerations carried out the following conclusions can be set forth:

1. The dependence $\overline{\pi}_{\min}$ was formulated, and also the Reynolds numbers which closely adhere to it, from the following quantities: mean acceleration a , absolute gas velocity w_{gb} , extreme angle of wetting θ and physical properties of flows of density ρ and viscosity η , obtaining as a result of the considerations the following equation

$$Re_{\min} = \left(\frac{3D + C Re_{\min}^{4/3} - K Re_{\min}^{2/3}}{2A} \right)^{3/5},$$

which describes the values of the theoretical minimum Reynolds numbers Re_{\min} in the case of rotation of the wetted surface.

2. It was shown that the rotation of the wetted surface brings about even a several times decrease of the Re_{\min} values in comparison with Reynolds numbers Re_{\min}^0 when there is no rotation. Moreover for given acceleration a , a greater

decrease in the Re_{mint} value in relation to Re_{mint}^0 occurs on the surfaces indicating smaller extreme angles of wetting θ when the values of remaining parameters are unchanged.

At given values of angle θ and acceleration a , a greater decrease in Reynolds numbers Re_{mint} in comparison with Re_{mint}^0 takes place for greater gas velocities w_{gb} .

3. Consideration of the deviation in theoretical values of Re_{mint} from experimental Reynolds numbers Re_{min} lead to the equation

$$Re_{\text{min}} = \left(\frac{3D + n^4 C Re_{\text{min}}^{4/3} - n^2 K Re_{\text{min}}^{2/3}}{2n^5 A} \right)^{3/5}, \quad (20)$$

in which the quantity n takes into consideration the phenomena which bring about the deviation already mentioned.

4. Equation (20) describing the minimum Reynolds numbers Re_{min} , for the velocity of gas $w_{\text{g}}=0$, takes the form

$$Re_{\text{min}} = \left(\frac{3D - n^2 K Re_{\text{min}}^{2/3}}{2n^5 A} \right)^{3/5},$$

consequently the same as Hobler's equation describing the minimum Reynolds numbers Re_{min}^* in the field of centrifugal forces in a one-phase flow.

5. Equation (20) when there is no rotation of the wetted surface is reduced to the equation

$$Re_{\min}^0 = \left(\frac{(3D + n^4 C (Re_{\min}^0)^{4/3})^{3/5}}{2n^5 A} \right)^{3/5},$$

describing the values of minimum Reynolds numbers Re_{\min}^0 in a countercurrent two-phase liquid-gas flow without rotation of the wetted surface.

OZNACZENIA - SYMBOLS

a	przyspieszenie odrodkowe centrifugal acceleration	m/s^2
b	stosunek średniej grubości s laminarnej warstwy cieczy w przepływie dwufazowym do średniej grubości zastępczej s_e ratio of mean thickness s of laminar acceleration in two-phase flow to mean equivalent thickness s_e	
d	efektywna średnica rury z uwzględnieniem zastępczej grubości warstwy cieczy spływającej effective diameter of pipe taking into account equivalent thickness of liquid layer	m
D_1	wewnętrzna średnica rury brzojonej inner diameter of wetted pipe	m
e	energia przypadająca na jednostkę powierzchni zraszanej energy corresponding to unit surface area	J/m^2
e^0	energia przypadająca na jednostkę powierzchni zraszanej, gdy $a = 0$ energy corresponding to unit surface area, when $a = 0$	J/m^2
E	energia energy	J
F	całkowita powierzchnia zraszana overall wetted surface area	m^2
F_1	powierzchnia zraszona wetted surface area	m^2
F_2	powierzchnia niezraszona not wetted surface area	m^2
g	przyspieszenie siły ciężkości acceleration due to gravity	m/s^2
G	prędkość masowa cieczy mass flow rate of liquid	kg/s
n	współczynnik korekcyjny correctional coefficient	

s	- średnia grubość laminarnej warstwy cieczy mean thickness of laminar liquid layer	m
s_1	- lokalna grubość laminarnej warstwy cieczy local thickness of laminar liquid layer	m
V	- prędkość objętościowa gazu volumetric flow rate of gas	m ³ /s
w	- średnia prędkość liniowa average linear velocity	m/s
x	- stopień pokrycia powierzchni cieczą ratio of surface covering by liquid	
Γ	- jednostkowe natężenie straszania unit wetting rate	kg/m·s
Γ^0	- jednostkowe natężenie straszania, gdy $a = 0$ unit wetting rate, when $a = 0$	kg/m·s
Γ^*	- jednostkowe natężenie straszania w przepływie jednofazowym ($w_{gb} = 0$) unit wetting rate in one phase flow ($w_{gb} = 0$)	kg/m·s
η	- lepkość dynamiczna dynamic viscosity	kg/m·s
θ_2	- zastępczy wymiar poprzeczny linii dla przepływu niewymuszonego equivalent linear dimension for free flow	m
θ	- kąt skrajny zwilżania powierzchni extreme angle of wetting	
λ	- współczynnik oporu hydraulicznego drag coefficient	
ρ	- gęstość density	kg/m ³
σ	- napięcie powierzchniowe surface tension	N/m
τ	- naprężenia styczne do ściany shear stress at surface	N/m

MODULY BEZWYMIAROWE - DIMENSIONLESS GROUPS

$Re_c = \frac{4\Gamma}{\eta_c}$	- liczba Reynolda cieczy liquid Reynolds number
$Re_c^0 = \frac{4\Gamma^0}{\eta_c}$	- liczba Reynolda cieczy, gdy $a = 0$ liquid Reynolds number, when $a = 0$
$Re_{min} = \frac{4\Gamma_{min}}{\eta_c}$	- minimalna liczba Reynolda cieczy minimum liquid Reynolds number
$Re_{min}^0 = \frac{4\Gamma_{min}^0}{\eta_c}$	- minimalna liczba Reynolda cieczy, gdy $a = 0$ minimum liquid Reynolds number, when $a = 0$
$Re_{min}^* = \frac{4\Gamma_{min}^*}{\eta_c}$	- minimalna liczba Reynolda cieczy dla przepływu jednofazowego ($w_{gb} = 0$) minimum liquid Reynolds number for one-phase liquid flow ($w_{gb} = 0$)
$Re_{ge} = \frac{w_{ge} d_{ge}}{\eta_g}$	- zastępcza liczba Reynolda gazu - equivalent gas Reynolds number

INDEKSY - INDICES

- b - oznacza wartości bezwzględne
denotes absolute value
- c - odnosi się do ciekoty
refers to liquid
- g - odnosi się do gazu
refers to gas
- k - dotyczy wartości kinetycznych
refers to kinetic values
- l - oznacza wartości lokalne
denotes local values
- min - oznacza wartości minimalne
denotes minimum values

BIBLIOGRAPHY

- [1] T. Hobler, *Chemia Stosowana [Applied Chemistry]*, 3B, 265 (1968).
- [2] T. Hobler, *Diffusive motion of mass and absorbers*, 2nd ed., WNT [Scientific and Technical Publishers] Warsaw 1976.
- [3] T. Hobler, *Thermal motion and exchangers*, 4th ed., WNT, Warsaw 1971.
- [4] K. Machej, W. Sokót, *Inżynieria Chemiczna [Chemical Engineering]* VI, 2, 351(1976).
- [5] T. Hobler, *Chemia Stosowana*, 2B, 201(1965).
- [6] K. Machej, W. Sokot, *Inzynieria i Aparatura Chemiczna*, z, 19 (1975).
- [7] K. Machej, W. Sokot, *Inzynieria i Aparatura Chemiczna*, 1, 9 (1974).
- [8] T. Traczyk, M. Maczynski, *Applied Mathematics in Chemical Engineering*, WNT, Warszawa 1970.
- [9] T. Hobler, J. Czajka, *Chemia Stosowana*, 2B 201 (1965).
- [10] T. Hobler, W. Granowski, *Chemia Stosowana*, 4, 125 (1959).
- [11] D. E. Hartley, W. Murgatroyd, *Int. J. Heat Mass Transfer*, 7, 1003 (1964).
- [12] A. B. Ponter, G. A. Davies, T. K. Ross, P. G. Thorley, *Int. J. Heat Mass Transfer*, 10, 349 (1967).
- [13] A. B. Ponter, A. P. Boyes, *J. Chem. Eng. Jap.*, 5, 80 (1972).
- [14] J. Domanskiy, W. N. Sokolow, *Zhurnal Prikladnoy Khimu*, 40, 365 (1967).
- [15] H. Coulon, *Chem. Ing. Technik*, 45, 362 (1973).
- [16] K. Machej, W. Sokot, *Inzynieria Chemiczna*, VI, 3, 605 (1976).

DISTRIBUTION LIST

DISTRIBUTION DIRECT TO RECIPIENT

<u>ORGANIZATION</u>	<u>MICROFICHE</u>	<u>ORGANIZATION</u>	<u>MICROFICHE</u>
A205 DMATC	1	E053 AF/INAKA	1
A210 DMAAC	2	E017 AF/RDXTR-W	1
B344 DIA/RDS-3C	8	E403 AFSC/INA	1
C043 USAMIIA	1	E404 AEDC	1
C509 BALLISTIC RES LABS	1	E408 AFWL	1
C510 AIR MOBILITY R&D	1	E410 ADTC	1
LAB/FIO		E413 ESD	2
C513 PICATINNY ARSENAL	1	FTD	
C535 AVIATION SYS CMD	1	CCN	1
C591 FSTC	5	ASD/FTD/NICD	3
C619 MIA REDSTONE	1	NIA/PHS	1
D008 NISC	1	NICD	2
H300 USAICE (USAREUR)	1		
P005 ERDA	1		
P005 CIA/CRS/ADB/SD	1		
NAVORDSTA (50L)	1		
NASA/KSI	1		
AFIT/LD	1		