

AD-A068 799

COLUMBIA UNIV DOBBS FERRY NY HUDSON LABS
EQUIVALENT CIRCUIT ANALYSIS OF A WT-2 PIEZOELECTRIC TRANSDUCER.(U)
OCT 64 S LIAPUNOV
TM-69

F/6 9/5

NONR-266(84)

NL

UNCLASSIFIED

| OF |


AD
A068799



END
DATE
FILMED

7-79

DDC



MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

Hudson Laboratories ✓
of
Columbia University
Dobbs Ferry, New York

COLUMBIA UNIVERSITY
HUDSON LABORATORIES
CONTRACT Nonr-266(84)

Alan Berman
Director

⑨ Technical Memorandum No. 69

① ⑮
⑭ TM-69

⑥ EQUIVALENT CIRCUIT ANALYSIS
OF A WT-2 PIEZOELECTRIC TRANSDUCER

by

⑩ S. Liapunov

UNCLASSIFIED

⑪ ⑫ 12 Oct. 1964



This work was supported by the Office of Naval Research.

✓ 172 050

~~79 05 02 076~~

OCT 21 1964

INTRODUCTION

An equivalent circuit is invaluable in the design of a sound source and in the prediction of its behavior when subject to an acoustic load.

A piezoelectric transducer may actually be represented by means of two different equivalent circuits each of which will have the same impedance characteristics as the source.


The attached computations show in detail how to compute the parameters of the two equivalent circuits for the WT-2 (1200) piezoelectric transducer designed by P. Weber. The impedance of one of the two equivalent circuits is evaluated at various frequencies for the unloaded condition and the impedance loop thus obtained is compared with the source in-air measurements. Adjustments are made in the circuit to make its impedance match the actual source characteristics as closely as possible.

The circuit is then modified by the addition of the theoretical acoustic water load and the impedances of this circuit are compared with measurements on the source in water.

Good agreement between theory and measurements was obtained in the analysis of the WT-2 (1200) and WT-2 (400) transducers.

SEARCHED		INDEXED	
SERIALIZED		FILED	
APR 1964			
FBI - NEW YORK			
BY			
EXTENSION AVAILABLE			
FILE			
APR 1964			
A			

ANALYSIS OF WT-2 (1200)

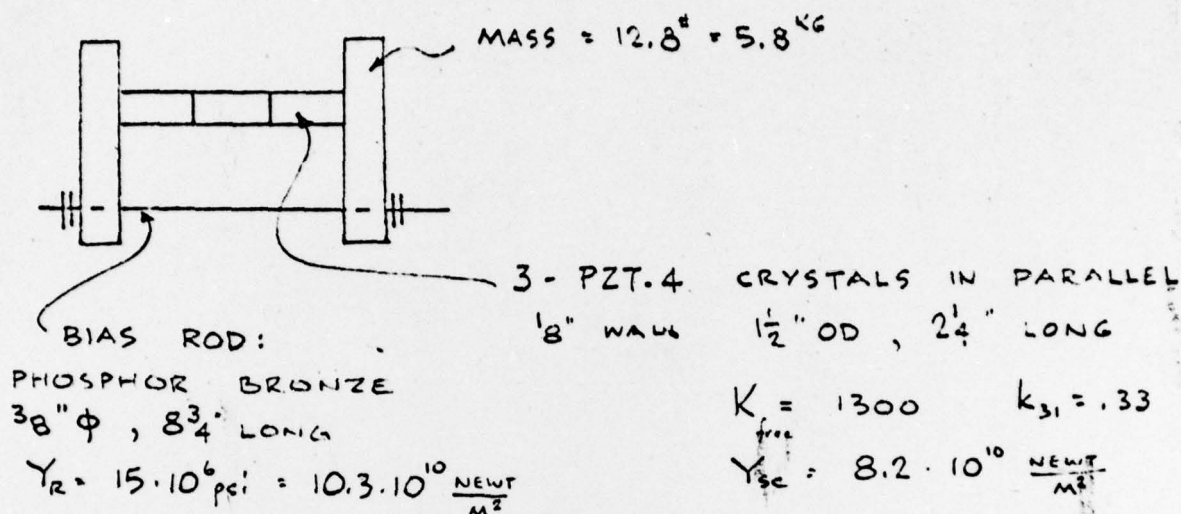

PARAMETERS FOR EQUIVALENT CIRCUITS:

$$C_E = n K_{free} \epsilon \frac{A}{t} = 3 \cdot 1300 \cdot 8.85 \cdot 10^{-12} \frac{\pi (1.25)^2 \cdot 2.25}{\frac{1}{8} \cdot 39.4} = .0745 \mu\text{F}$$

$$C_M' = \frac{l}{A Y_{sc}} = \frac{6.75 \cdot 39.4 \cdot 4}{\pi (1.50^2 - 1.25^2) 8.2 \cdot 10^{10}} = .0060 \cdot 10^{-6} \frac{\text{M}}{\text{NEWT}}$$

$$C_R = \frac{l}{A Y_R} = \frac{8.75 \cdot 39.4 \cdot 4}{\pi (3/8)^2 10.3 \cdot 10^{10}} = .0304 \cdot 10^{-6} \frac{\text{M}}{\text{NEWT}}$$

$$C_S = \frac{C_R C_M'}{C_R + C_M'} = \frac{.0304 (.0060) \cdot 10^{-6}}{.0364} = .0050 \cdot 10^{-6} \frac{\text{M}}{\text{NEWT}}$$


$$a = \frac{C_E}{C_M'} = \frac{.0304}{.0060} = 5.06$$

$$\frac{k^2}{1 - k^2} = \frac{a}{a + 1} \left(\frac{k^2}{1 - k^2} \right) \quad k' = .303$$


THIS VALUE OF k IS THEORETICAL. EXPERIENCE HAS SHOWN THAT ACTUAL VALUE IS LOWER. ONE MUST KNOW k TO SOLVE FOR C_E' , C_M , N AND N' .

IF THE AIR IMPEDANCE LOOP OF THE SOURCE ⁽²⁾ IS AVAILABLE ONE MAY SOLVE FOR THE ACTUAL k DIRECTLY FROM THE INDICATED ANTIRESONANCE (MAX IMPEDANCE POINT IF DAMPING IS SMALL). THIS WILL BE DONE BELOW.

THE TWO EQUIVALENT CIRCUITS OF THE TRANSDUCER IN AIR ARE GIVEN BELOW:

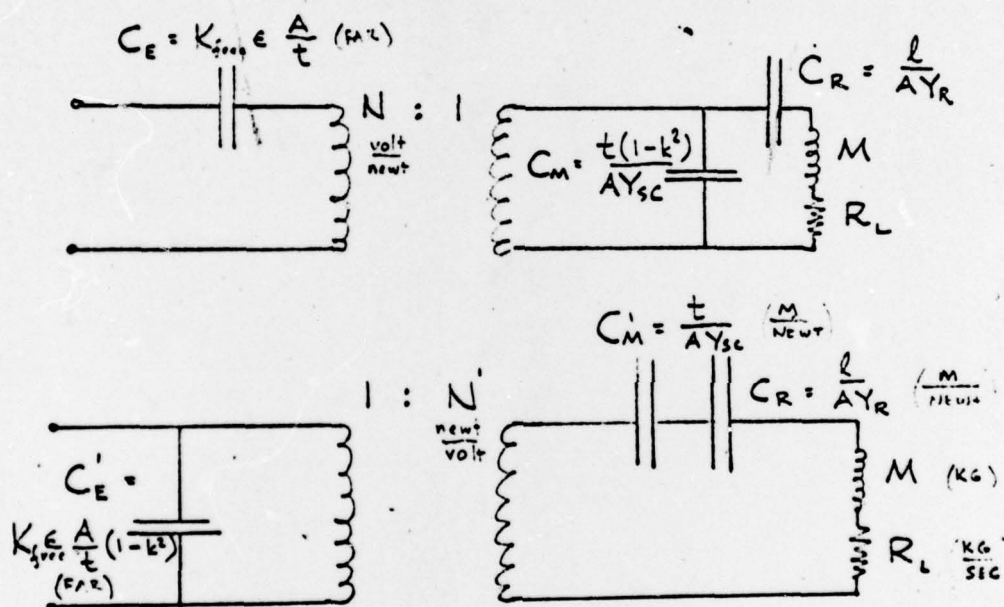

ELIMINATING THE TRANSFORMERS AND COMBINING C'_M AND C_R INTO C_S WE OBTAIN:

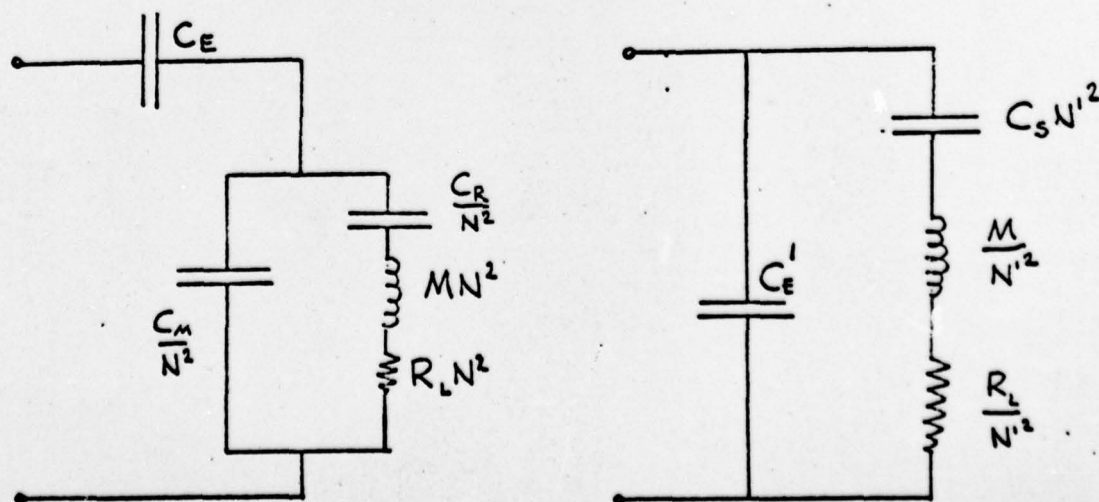

APPLICABLE RELATIONS FOR ABOVE CIRCUITS:

$$N'^2 = \frac{C_E - C'_E}{C'_M}$$

$$N^2 = \frac{C'_M - C_M}{C_E}$$

$$N'^2 N^2 = k^4$$

BOTH CIRCUITS ARE IDENTICAL WHEN VIEWED FROM THE TERMINALS AND HAVE THE SAME RESONANCE AND ANTIRESONANCE:

RESONANCE (IF R_L IS SMALL) IS THE MINIMUM IMPEDANCE POINT. AT THAT FREQUENCY $C_S N'^2$ RESONATES WITH $\frac{M}{N'^2}$:

$$\text{THUS: } \frac{1}{\omega_r C_S N'^2} = \omega_r \frac{M}{N'^2} \quad \omega_r^2 = \frac{1}{C_S M}$$

$$\text{AND: } \omega_r = \frac{1}{\sqrt{C_S M}} = \sqrt{\frac{\frac{1}{C'_M} + \frac{1}{C_E}}{M}} \quad \text{NOTE: } \omega_r \text{ DOES NOT DEPEND ON } k$$

ANTIRESONANCE (IF R_L IS SMALL) IS THE MAXIMUM IMPEDANCE POINT. AT THAT FREQUENCY $C_S N'^2$ AND $\frac{M}{N'^2}$ ARE IN PARALLEL RESONANCE WITH C'_E :

$$\text{THUS: } \frac{1}{\omega_{ar} C'_E} = \frac{\omega_{ar} M}{N'^2} = \frac{1}{\omega_{ar} C_S N'^2}$$

$$\text{AND: } \omega_{ar} = \sqrt{\frac{N'^2 \left[\frac{1}{C'_E} + \frac{1}{C_S N'^2} \right]}{M}} = \sqrt{\frac{\frac{1}{C'_M (1-k^2)} + \frac{1}{C_E}}{M}}$$

NOTE: ω_{ar} DEPENDS ON k

THUS FOR THIS SOURCE
RESONANCE

$$M = \frac{5.8}{2} = 2.9 \text{ kg}$$

$$\omega_r = \frac{1}{\sqrt{2.9 \cdot .0050 \cdot 10^{-6}}} = 8300; f_r = 1320 \text{ cps}$$

ACTUAL = 1318 cps

ANTIRESONANCE

$$\omega_{ar} = \sqrt{\frac{\frac{10^6}{.0060(1-.303^2)} + \frac{10^6}{.0304}}{2.9}} = 8650; f_{ar} = 1380 \text{ cps}$$

ACTUAL = 1335 cps

VALUE OF k MUST BE LOWERED TO OBTAIN BETTER AGREEMENT.

$$\sqrt{\frac{\frac{10^6}{.0060(1-k^2)} + \frac{10^6}{.0304}}{2.9}} = 8400 \quad \swarrow \quad 1335 (6.28)$$

$$k = .152$$

CIRCUIT PARAMETERS:

$$C_E = .0745 \mu\text{F}$$

$$C'_E = C_E (1-k^2) = .0726 \mu\text{F}$$

$$C'_M = .0060 \cdot 10^{-6} \frac{\text{M}}{\text{NEWT}}$$

$$C_M = C'_M (1-k^2) = .0585 \cdot 10^{-6} \frac{\text{M}}{\text{NEWT}}$$

$$C_R = .0304 \cdot 10^{-6} \frac{\text{M}}{\text{NEWT}}$$

$$C_S = .0050 \cdot 10^{-6} \frac{\text{M}}{\text{NEWT}}$$

$$N'^2 = \frac{C_E - C'_E}{C'_M} = \frac{.0745 - .0726}{.0060} = .317 \frac{\text{NEWT}^2}{\text{VOLT}^2}$$

$$N^2 = \frac{k^4}{N'^2} = .00168 \frac{\text{VOLT}^2}{\text{NEWT}^2}$$



THIS PAGE IS BEST QUALITY REPRODUCTION
 FROM COPY FURNISHED TO DDC

AT ANTIRESONANCE THE MEASURED AIR IMPEDANCE
CIRCLE DIA = 5000 Ω . FROM THIS INFORMATION ONE
CAN SOLVE FOR R_L . FOR THE FIRST CIRCUIT
IT CAN BE SHOWN THAT AT ANTIRESONANCE
THE RESISTIVE COMPONENT IS

$$\frac{Z_s^2 + (R_L N^2)^2}{R_L N^2} \approx \frac{Z_s^2}{R_L N^2} = 5000 \Omega$$

$$Z_s = \omega (.00487) - \frac{10^6}{\omega \cdot 18.1} \quad Z_{s @ 1335} = 34.44 \Omega \therefore R_L N^2 = .237 \Omega$$

$$R_L = 141 \frac{\text{KG}}{\text{SEC}}$$

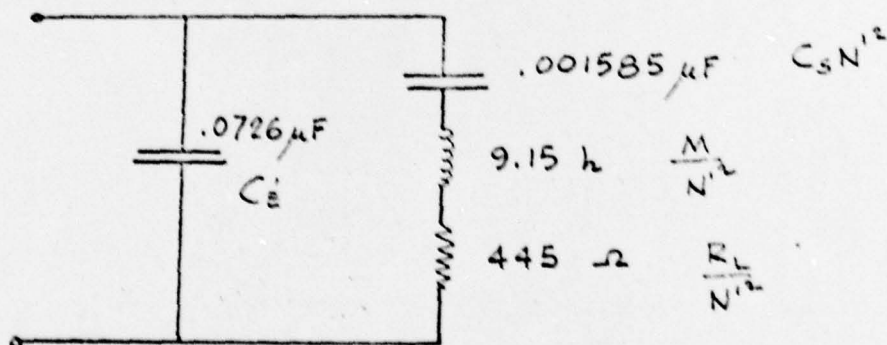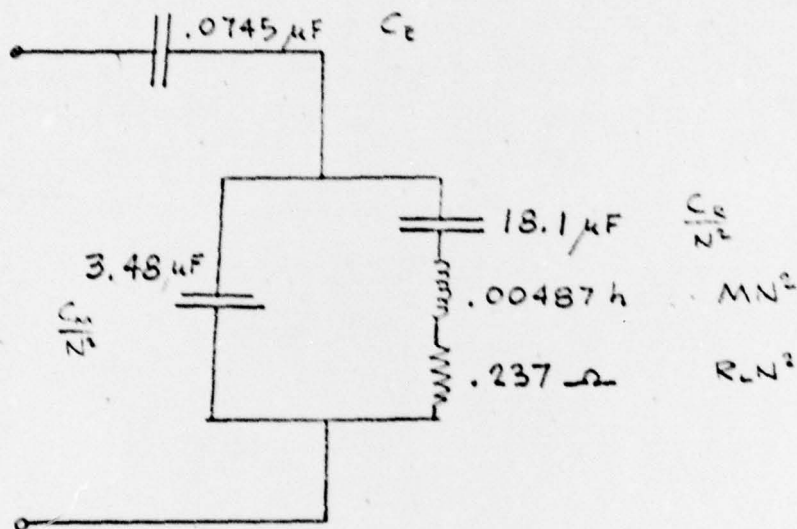

10-9-1 SL
WT. 2 1200

THESE POINTS AGREE WELL WITH MEASUREMENTS

THESE POINTS AGREE WELL WITH MEASUREMENTS

WT. 2 (1200) IN WATER


$$\lambda @ 1200 = 4'$$

$$k_r = \frac{2\pi}{4} \cdot \frac{3}{12} = .393 \rightsquigarrow Z_{Ac} = jCA(.075 + j.325)$$

$$Z_{Ac} = 1500 \cdot 1000 \frac{\pi (3)^2}{4 (39.4)^2} (.075 + j.325)$$

$$= 2050 \frac{KG}{SEC} + j 8890 \frac{KG}{SEC}$$

$$@ 1200 \text{ cps} = \frac{8890}{2\pi (1200)} = 1.18$$

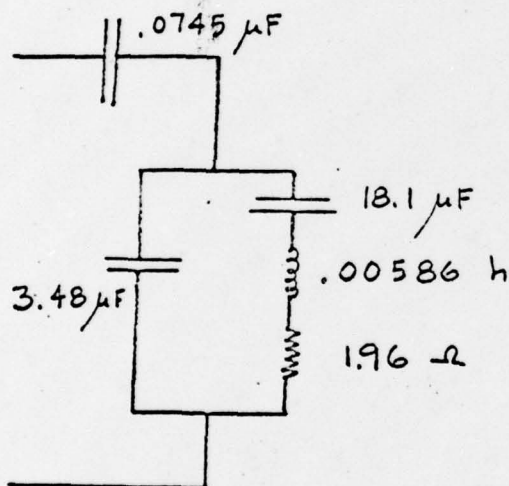EQUIVALENT CIRCUIT IN WATER

$$M = 2.9 + \frac{1.18}{2} = 3.49 \text{ KG}$$

$$R_L + R_{Ac} = 141 + \frac{2050}{2} = 1166 \frac{KG}{SEC}$$

ANTIRESONANCE:

$$\omega_{ar} (.00586) = \frac{10^6}{\omega_{ar} 18.1} + \frac{10^6}{\omega_{ar} 3.48}$$

$$\omega_{ar} = 7650 \quad f_{ar} = 1220$$

CIRCLE DIA

$$Z_s = .00586 (7650) - \frac{10^6}{7650 (18.1)} = 37.7$$

$$\frac{Z_s^2}{R} = \frac{(37.7)^2}{1.96} = 725 \Omega$$

RESONANCE

$$\frac{3.49}{.317} = 11.0 \text{ h}$$

$$\omega_r = \frac{1}{\sqrt{11.0 (.001585) 10^6}}$$

$$f_r = 1205 \text{ cps}$$

THIS AGREES WELL WITH MEASUREMENTS

10-9-64

(8)


WT. 2 (100)

WATER

f ω	Z_s	Z_{cm}	$\left(\frac{R}{R^2 + Z_s^2}\right)$	$\frac{Z_s}{R^2 + Z_s^2}$	$\left[\frac{1}{Z_{cm}} - \frac{Z_s}{R^2 + Z_s^2}\right]$	$(\quad)^2 + [\quad]^2$	$R + jX$	Z_{CE}	X_{TOT}
1170							183		
7351.1	35.56	39.09	$1.545 \cdot 10^{-3}$	$28.044 \cdot 10^{-3}$	$-2.463 \cdot 10^{-3}$	$8.44 \cdot 10^{-6}$	+j 293	-j 1820	-j 1527
1205							585		
7571.0	37.07	37.95	1.422	26.901	-651	2.435	+j 268	-j 1770	-j 1502
1220							714		
7665.3	37.71	37.49	1.374	26.445	-229	1.93	-j 119	-j 1750	-j 1869
1250							269		
7853.8	38.49	36.59	1.284	25.550	-1.78	4.79	-j 372	-j 1710	-j 2082

EUGENE DIETZEN CO.
MADE IN U. S. A.

NO. 341-M DIETZEN GRAPH PAPER
MILLIMETER

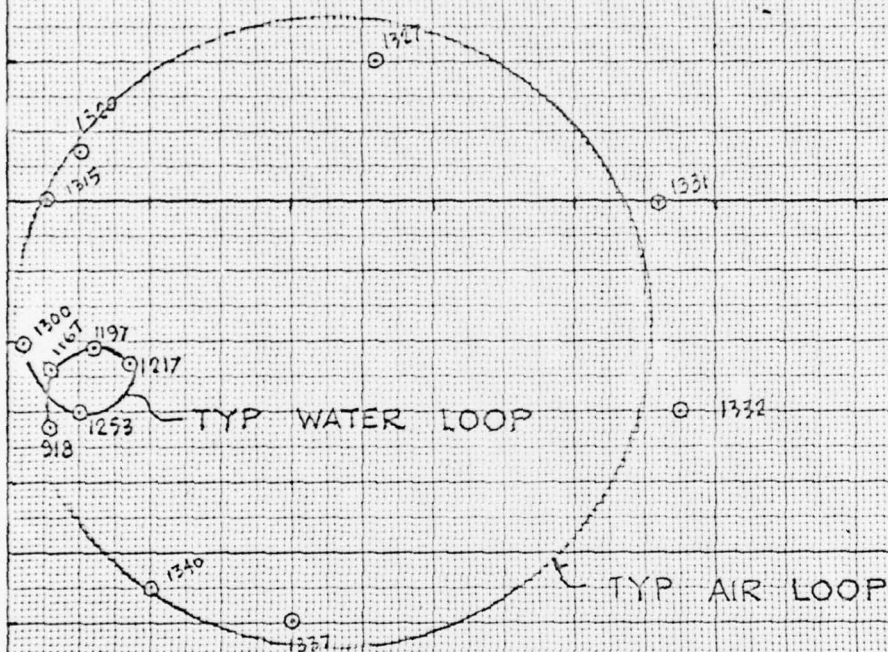


TYP MEASURED LOOPS

WT-2 (1200)

SL 10-12-64

EUGENE DIETZGEN CO.
MADE IN U. S. A.

NO. 341-M DIETZGEN GRAPH PAPER
MILLIMETER

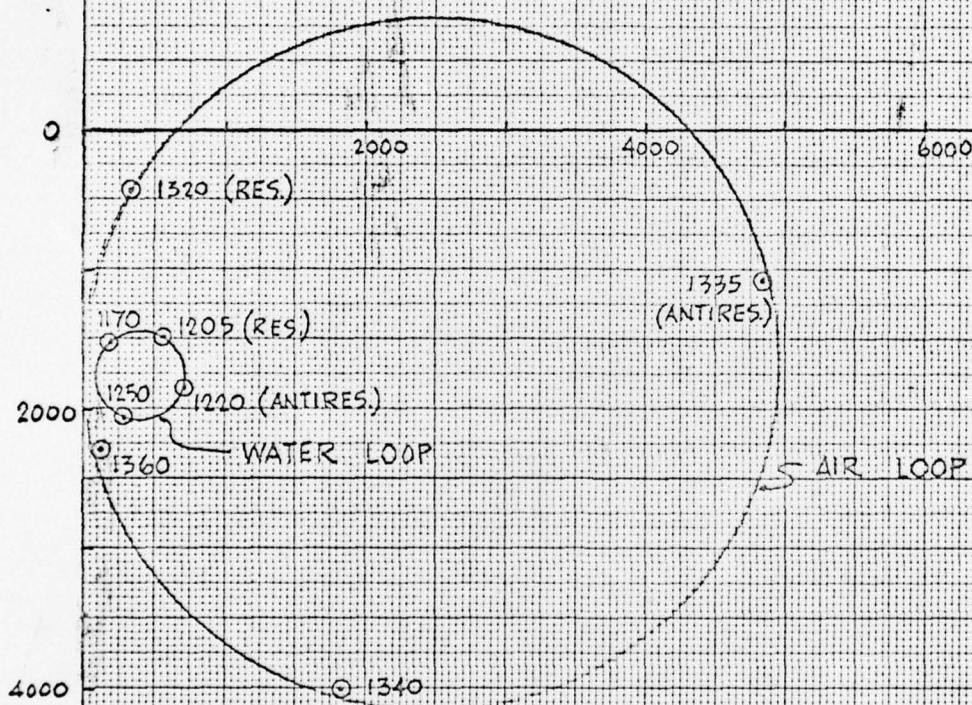

COMPUTED LOOPS

WT-2 (1800)

SL 10-12-64