

AD-A069 520

ROCKWELL INTERNATIONAL CEDAR RAPIDS IA COLLINS TELECOM--ETC F/G 9/5
156W TRANSCEIVER MULTICOUPLERS.(U)

FEB 79 G SNIDER

DAAB07-77-C-0193

UNCLASSIFIED

523-0769373-00121D

CORADCOM-77-0193-5

NL

1 OF 1
AD
A069520





LEVEL II

12

RESEARCH AND DEVELOPMENT TECHNICAL REPORT
CORADCOM - 77-0193-5

A069520

156W TRANSCEIVER MULTICOUPLERS

G. Snider
Rockwell International
Collins ~~Government~~ Telecommunications Products Division
Cedar Rapids, Iowa 52404


sk 392655

Annual Report for Period 1 October 1977 — 30 September 1978

February 1979

DISTRIBUTION STATEMENT

Approved for public release;
distribution unlimited.



Prepared for

CORADCOM

US ARMY COMMUNICATION RESEARCH & DEVELOPMENT COMMAND
FORT MONMOUTH, NEW JERSEY 07703

DDC FILE COPY

79 05 31 002

NOTICES

Disclaimers

The citation of trade names and names of manufacturers in this report is not to be construed as official Government indorsement or approval of commercial products or services referenced herein.

Disposition

Destroy this report when it is no longer needed. Do not return it to the originator.

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER (18) CORADCOM 77-0193-5	2. GOVT ACCESSION NO. (9) General Rept. 1 Oct 77 - 30 Sep 78	3. RESIDENTIAL CATALOG NUMBER
4. TITLE (and Subtitle) (6) 156W TRANSCEIVER MULTICOUPLERS	5. TYPE OF REPORT & PERIOD COVERED Annual Report 10/1/77 -- 9/30/78	
7. AUTHOR(s) (10) G. Snider	6. PERFORMING ORG. REPORT NUMBER (14) 523-0769373-00121D	8. CONTRACT OR GRANT NUMBER(s) (15) DAAB07-77-C-0193
9. PERFORMING ORGANIZATION NAME AND ADDRESS Rockwell International Collins Government Telecommunications Products Div. Cedar Rapids, Iowa 52404	10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS 6747014886692017	
11. CONTROLLING OFFICE NAME AND ADDRESS CENCOMS US Army CORADCOM, DRDCO-COM-RN-1 Fort Monmouth, New Jersey 07703	12. REPORT DATE (11) February 1979	13. NUMBER OF PAGES 24
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office) (12) 36p.	15. SECURITY CLASS. (of this report) Unclassified	15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for Public Release, distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Antenna Couplers, Antenna Multicouplers, Broadband Combining Networks, Broadband Coupling, Coupling Circuits, Filters, Matching Networks, RF Tuning Capacitors		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) This report describes the activity during the first annual report period of Contract DAAB07-77-C-0193. The frequency ranges of a 2-channel and a 5-channel vhf multicoupler developed under a previous contract are extended. In addition, a "dummy" filter designed to replace an unused channel is described. Design parameters and test data are presented.		

DD FORM 1473

EDITION OF 1 NOV 65 IS OBSOLETE

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

392655

15

Table of Contents

	<i>Page</i>
1. Introduction	1
2. Development Status	4
2.1 First-Quarter Report Period	4
2.1.1 Status	4
2.1.2 Results	5
2.2 Second-Quarter Report Period.....	8
2.2.1 Status	8
2.2.2 Results	12
2.3 Third-Quarter Report Period	19
2.3.1 Status	19
2.3.2 Results	19
2.4 Fourth-Quarter Report Period	23
2.4.1 Status	23
2.4.2 Results	23
2.4.3 Plan	23

ACCESSION for		
NTIS	White Section	☒
DDC	Buff Section	☐
UNANNOUNCED		☐
JUSTIFICATION		
BY		
DISTRIBUTION/AVAILABILITY CODES		
Dist. A ALL and/or SPECIAL		
A		

List of Illustrations

<i>Figure</i>		<i>Page</i>
1-1	2-Channel Multicoupler	2
1-2	5-Channel Multicoupler With "Dummy" Filters.....	3
2-1	Resonator Dimensions and Measured Unloaded Q	5
2-2	Measured Input Terminal Q	6
2-3	Measured Coupling Coefficient.....	7
2-4	Measured Output Terminal Q	8
2-5	Broadband Transformer Calculations (Part 1).....	9
2-6	Broadband Transformer Calculations (Part 2).....	10
2-7	Broadband Transformer, Final Values and Measured Performance	11
2-8	Calculated Matching Network Performance	13
2-9	Matching Section Element Determination	14
2-10	Schematic, Bandpass Filter.....	16
2-11	Schematic, Power Discriminator	17
2-12	Schematic, Phasing Discriminator.....	17
2-13	Schematic, 2-Channel Combining Network	18
2-14	Schematic, 5-Channel Combining Network	18
2-15	Schematic, Filter Simulator	18
2-16	Matching Network Configurations (5-Channel).....	22
2-17	Knob Lock Configuration	22

List of Tables

<i>Table</i>		<i>Page</i>
2-1	Test Data, Brassboard 2-Channel Multicoupler (27 March 78)	15
2-2	Brassboard Multicoupler Temperature Test Data (27 March 78)	15
2-3	Test Data, Engineering Filter #1 (25 July 78)	20
2-4	Test Data, Engineering Filter #2 (25 July 78)	20
2-5	Test Data, Engineering Filter #3 (27 July 78)	20
2-6	Test Data, Transceiver-Port-To-Transceiver-Port Attenuation (27 July 78)	21

156W TRANSCEIVER MULTICOUPLERS
Prepared for CENCOMS, US Army CORADCOM

1. INTRODUCTION

This annual report summarizes the activity on the 156W Transceiver Multicoupler under contract DAAB07-77-C-0193.

During the previous Phase II contract, DAAB07-75-C-0113, a 2-channel multicoupler and a 5-channel multicoupler were developed which operated over the frequency range of 30 to 80 MHz. These multicouplers performed well and met all requirements. The current Phase III program requires the upper frequency range of the multicouplers to be expanded to 88 MHz. In addition to the expanded frequency range, a "dummy" filter module is to be developed. This "dummy" filter may be substituted for any filter module to replace any unused channels. Also required is the development of drawings suitable for production.

These tasks have been completed during this report period. Figures 1-1 and 1-2 are the engineering model multicouplers. Figure 1-2 is the 5-channel multicoupler with two "dummy" filter modules installed. Preliminary evaluations indicate all contractual requirements are satisfied.

Qualification testing and the production build of ten 2-channel and ten 5-channel multicouplers will be completed during the final report period.

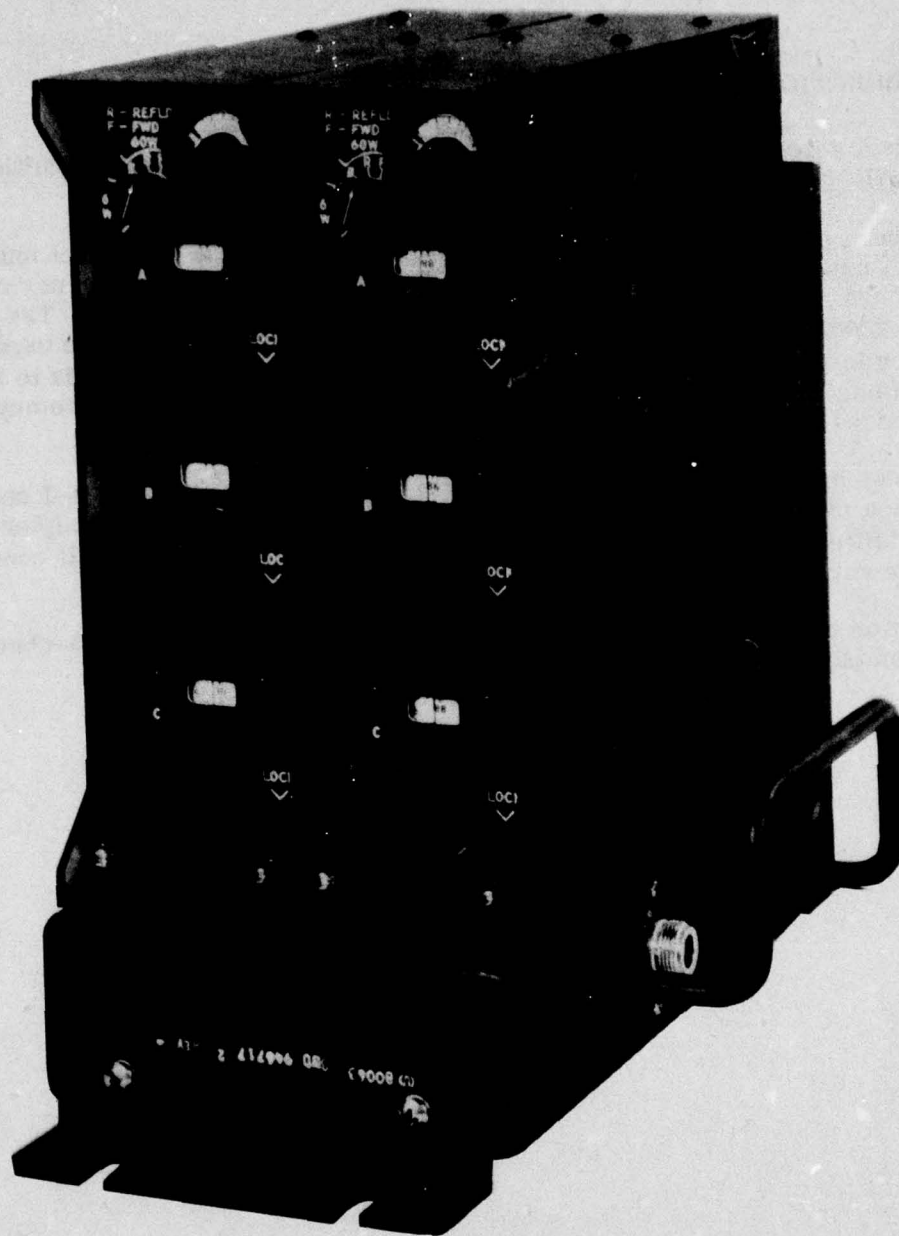


Figure 1-1. 2-Channel Multicoupler.

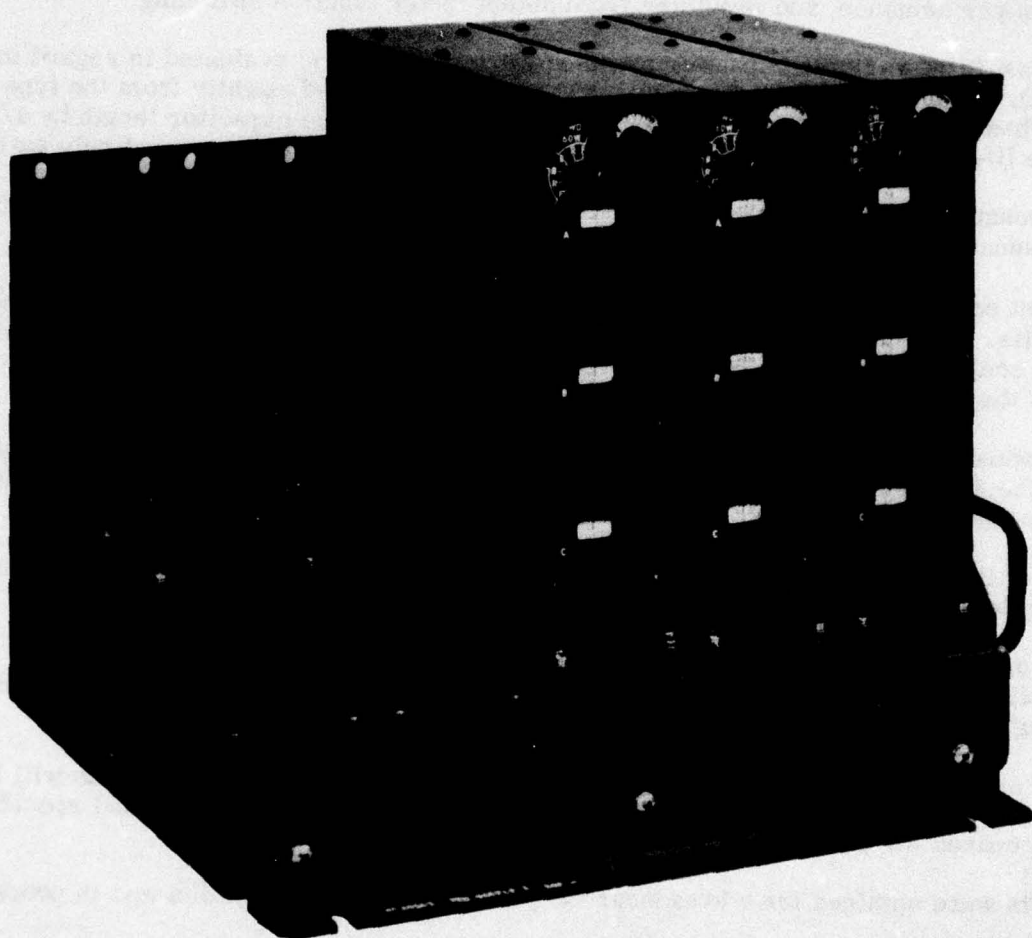


Figure 1-2. 5-Channel Multicoupler With "Dummy" Filters.

2. DEVELOPMENT STATUS

The modification of the basic multicoupler design to incorporate the required changes is divided into four chronological report periods.

2.1 First-Quarter Report Period

2.1.1 Status

During this report period, effort was concentrated on the basic design of the multicouplers to incorporate the desired changes. The changes included increasing the operating frequency range to 88 MHz, revising the capacitor drive assemblies to a single-speed drive with a separate knob lock, providing dial windows and front panel sealing, improving mounting and vibration performance, and providing fixed detent meter function switching.

Three gas-filled variable capacitor samples were obtained and evaluated in regard to capacity range, Q, and mechanical configuration. The samples differed slightly from the type employed in the Phase II configuration. The manufacturer increased the capacitor length by 1/8 inch to improve life. Evaluation of the longer capacitors showed that they were entirely satisfactory.

The resonator helix was resized to allow tuning to 88 MHz. To accomplish this result, the self-resonant frequency of the helix was increased from 99 to 109 MHz.

The input coupling to the 3-pole filter was revised to give the desired degree of coupling up to 88 MHz. The same approach was employed as used in the Phase II equipment (tapped helix in conjunction with a fixed series inductance). Both location of the tap point and the value of the series inductor were changed slightly to provide the desired coupling.

The forward/reflected power discriminator was checked to 88 MHz and found to be satisfactory. The PC board conformed to MIL requirements but required a small modification to accommodate standard parts.

Design of the coupling apertures was completed. These now provide the desired degree of coupling to 88 MHz.

Design of the output coupling to extend the filter's frequency range to 88 MHz was accomplished. The previously used technique was retained. Tap location and transmission line length were changed slightly to achieve proper operation.

Review and selection of military standard parts was completed. All QPL parts will be used except for the variable tuning capacitor (no standard part available). Internal specifications were prepared for parts not presently in the Collins system.

All parts were obtained for a breadboard 3-pole filter, and construction was in process.


Parts for a trial capacitor drive assembly and knob lock were ordered; 75 percent of the parts were received.

Theoretical design of the lumped-element (7- to 50-ohm) transformer for increased bandwidth was completed. A breadboard unit was constructed and evaluated, with good results.

2.1.2 Results

The results obtained during the first quarter are detailed in the following figures. Figure 2-1 shows the configuration of the basic resonator to be employed in the filter. The construction is similar to that used in the phase II equipment. To preserve the overall filter volume, cavity size remains the same. The number of turns comprising the helix was reduced to allow operation to 88 MHz. The measured unloaded Q is comparable to that obtained in the prior equipment, ensuring that the insertion loss specification will be met.

Details of the input coupling to the filter are shown in figure 2-2. Again the design approach is identical to the Phase II equipment. Tap location and series inductance were adjusted to

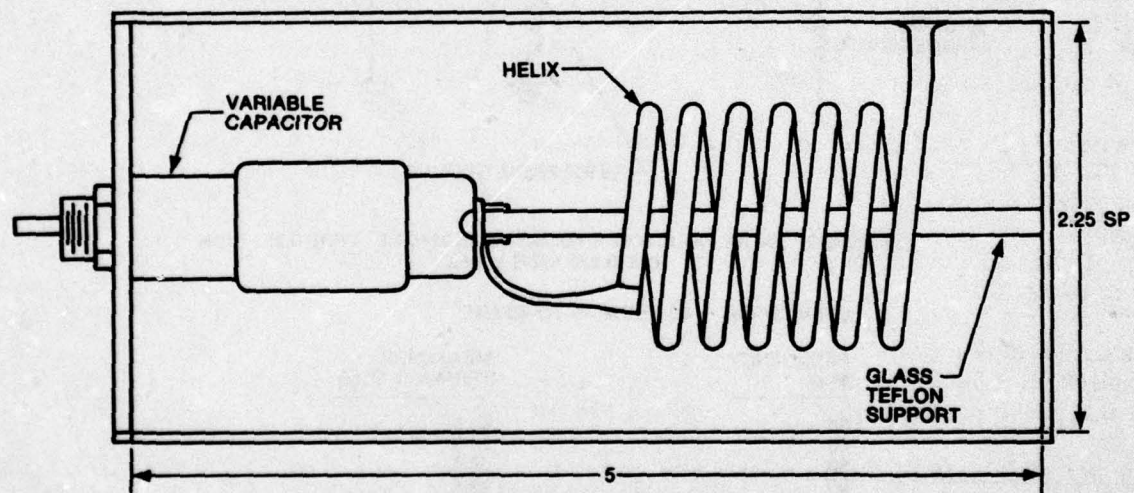


HELIX DETAILS: 6-1/3 TURNS, 1/8-INCH DIAMETER WIRE. SPACED 1/4-INCH,
NOMINAL DIAMETER 1.312 INCHES. $Z_{OH} = 296$ OHMS,
 $F_{OH} = 109.3$ MHZ

FREQUENCY MHZ	MEASURED UNLOADED Q, Q_u
30	610
40	688
50	749
60	787
70	821
80	847
88	850

Figure 2-1. Resonator Dimensions and Measured Unloaded Q.

provide good operation up to 88 MHz. Input terminal Q agrees closely with the desired value, as shown.

Redesign of the apertures for increased frequency range was accomplished by moving the existing aperture closer to the rear of the resonator as shown in figure 2-3. This centers the aperture with respect to the adjacent helices. By removing turns, the center of the helical resonator coil was lowered. The measured magnitude of coupling is in good agreement with the desired value.

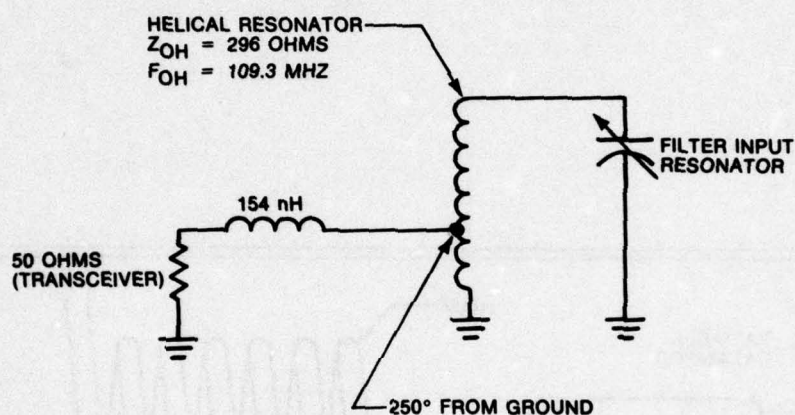


DETAILS OF 154 nH INDUCTOR: 6 TURNS NO 18 MAGNET WIRE 0.250 INCH ID X 0.323 INCH LONG

DESIRED Q_T = 59 FROM 30 TO 88 MHZ

FREQUENCY MHZ	MEASURED TERMINAL Q, Q_T
30	62.8
40	58.3
50	57.0
60	56.7
70	57.5
80	58.0
88	58.3

Figure 2-2. Measured Input Terminal Q.

The output coupling approach, again identical to the Phase II design, is shown in figure 2-4. As expected, the interconnecting transmission line length was reduced a small amount to provide operation to 88 MHz. The line length, however, is sufficient to allow multicoupler configurations up to ten channels to be realized. Tap location is 1/4 turn closer to ground to achieve the desired coupling. Output terminal Q departs more from the desired value than for the other couplings. The shape and departure of the terminal Q curve from the ideal is the same as for the Phase II equipment.

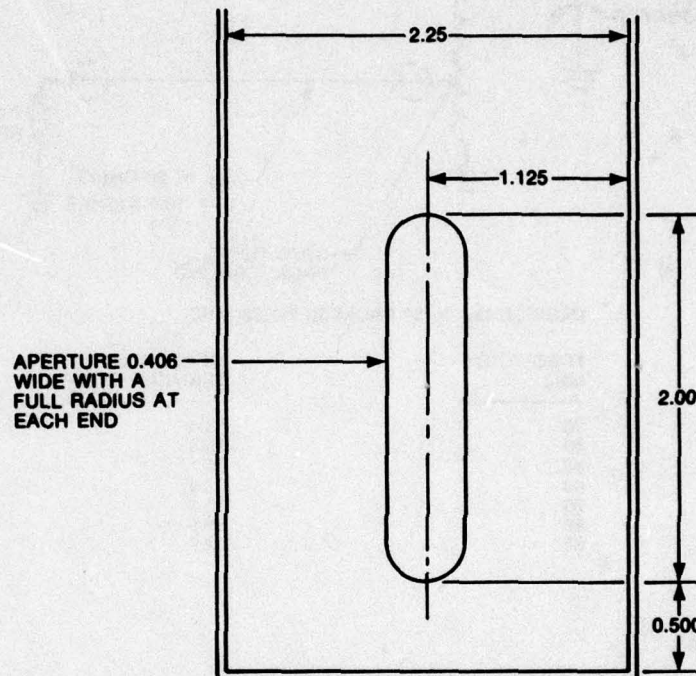

DESIRED K = 0.0183 FROM 30 TO 88 MHZ

FREQUENCY MHZ	MEASURED K ₁
30	0.0172
40	0.0175
50	0.0179
60	0.0185
70	0.0192
80	0.0199
88	0.0205

Figure 2-3. Measured Coupling Coefficient.

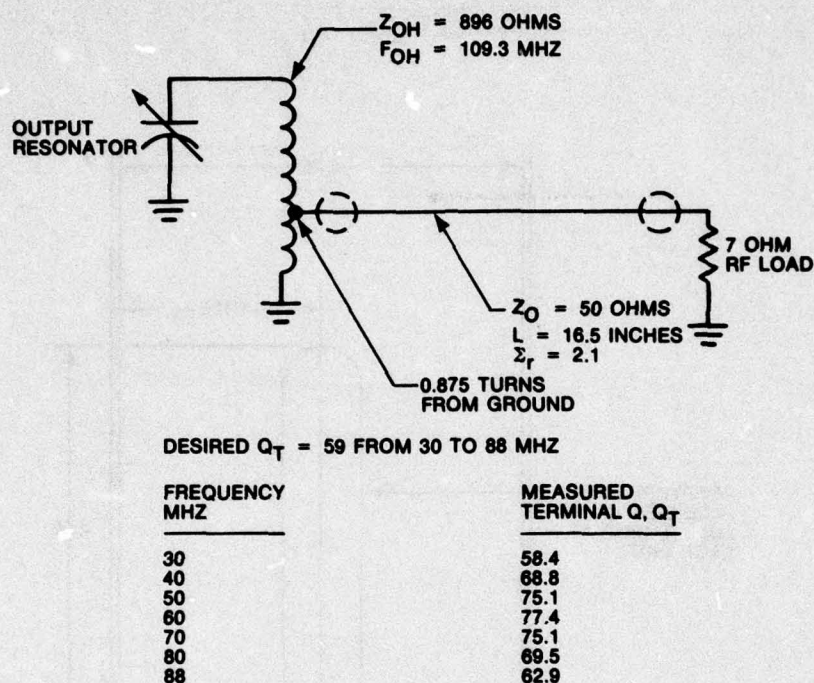


Figure 2-4. Measured Output Terminal Q.

Figures 2-5 and 2-6 show the steps in computing the element values for the 7- to 50-ohm broadband transformer of increased bandwidth (30 to 88 MHz). Figure 2-7 shows the final experimentally determined values. The measured return loss (50-ohm port with 7.2857-ohm load installed) is 23 dB or greater across the operating band. Thus, the transformer matches the 7-ohm load to 50 ohms within a maximum vswr of 1.15:1. This degree of match is slightly better than that obtained in the Phase II equipment.

2.2 Second-Quarter Report Period

2.2.1 Status

During this report period, effort continued on the basic design of the multicouplers to incorporate the desired changes. The changes included increasing the operating frequency range to 88 MHz, revising the capacitor drive assemblies to a single-speed drive with a separate knob lock, providing dial windows and front panel sealing, improving mounting and vibration performance, and providing fixed detent meter function switching.

FOLLOWING THE IDENTICAL PROCEDURE USED TO DESIGN THE PHASE II TRANSCEIVER MULTICOUPLER BROADBAND IMPEDANCE TRANSFORMER THE DESIGN IS EXTENDED TO 88 MHZ:

$$g_0 = 1.000, g_1 = 0.7128, g_2 = 1.2003, g_3 = 1.3212, g_4 = 0.6476, g_5 = 1.1007, \omega_1^1 = 1.000, L_{Ar} = 0.01 \text{ dB}, n = 4$$

$$R_0 = \frac{51}{7} = 7.2857 \Omega, N^4 R_5 = 50 \Omega$$

$$N^4 R_5 = N^4 R_0 g_5 = 50 \Omega$$


$$N = \left[\frac{50}{R_0 g_5} \right]^{1/4} = \left[\frac{50}{(7.2857)(1.1007)} \right]^{1/4} = 1.5802$$

$$\omega = \sqrt{\frac{g_1 g_2}{N-1}} = \sqrt{\frac{(0.7128)(1.2003)}{0.5802}} = 1.2144$$

$$\omega = \frac{f_2 - f_1}{f_0} = \frac{f_0 - f_1}{\sqrt{f_1 f_2}}, f_2 - 88 = 30 - f_1$$

$$f_1 = 59 - \frac{\omega}{\sqrt{4 + \omega^2}} = 28.3790 \text{ MHz}, f_2 = 118 - f_1 = 89.6210 \text{ MHz}$$

$$f_0 = \sqrt{f_1 f_2} = 50.4317 \text{ MHz}, \omega_0 = 2\pi f_0 = 0.3169 \times 10^9 \text{ radians/second}$$

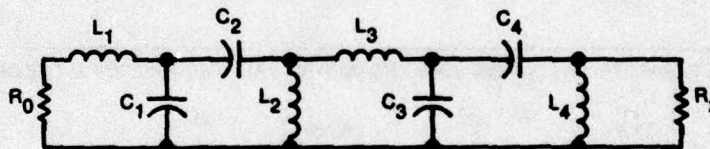

$$R_0 = 7.2857 \Omega$$

$$L_1 = \frac{g_1 R_0}{\omega \omega_0} = \frac{(0.7128)(7.2857)}{(1.2144)(0.3169)} = 13.4962 \text{ nH}$$

$$C_1 = \frac{(N-1)\omega}{g_1 \omega_0 R_0 N} = \frac{(0.5802)(1.2144)(1000)}{(0.7128)(0.3169)(7.2857)(1.5802)} = 270.9453 \text{ pF}$$

Figure 2-5. Broadband Transformer Calculations (Part 1).

$$C_2 = \frac{\omega}{g_1 R_0 \omega_0 N} = \frac{(1.2144) (1.000)}{(0.7128) (7.2857) (0.3169) (1.5802)} = 467.005 \text{ pF}$$

$$L_2 = \frac{N^2 \omega R_0}{g_2 \omega_0} = \frac{(2.4970) (1.2144) (7.2857)}{(1.2003) (0.3169)} = 58.0846 \text{ nH}$$

$$L_3 = \frac{g_3 R_0 N^2}{\omega \omega_0} = \frac{(1.3212) (7.2857) (2.4970)}{(1.2144) (0.3169)} = 62.4634 \text{ nH}$$

$$C_3 = \frac{(N-1) \omega}{g_3 \omega_0 R_0 N^3} = \frac{(0.5802) (1.2144) (1000)}{(1.3212) (0.3169) (7.2357) (3.9457)} = 58.5419 \text{ pF}$$

$$C_4 = \frac{\omega}{g_3 R_0 \omega_0 N^3} = \frac{(1.2144) (1000)}{(1.3212) (0.3169) (7.2857) (3.9457)} = 100.9026 \text{ pF}$$

$$L_4 = \frac{\omega R_0 N^4}{g_4 \omega_0} = \frac{(1.2144) (7.2857) (6.2349)}{(0.6476) (0.3169)} = 268.8178 \text{ nH}$$

$$R_x = g_5 N^4 R_0 = (1.1007) (6.2349) (7.2857) = 50 \text{ OHMS}$$

THE FINAL COMPUTED NETWORK USING STANDARD VALUE CAPACITORS, BECOMES:

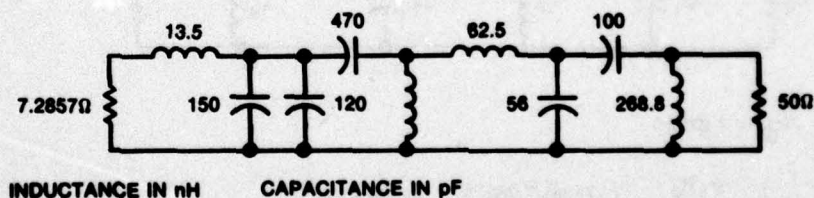


Figure 2-6. Broadband Transformer Calculations (Part 2).

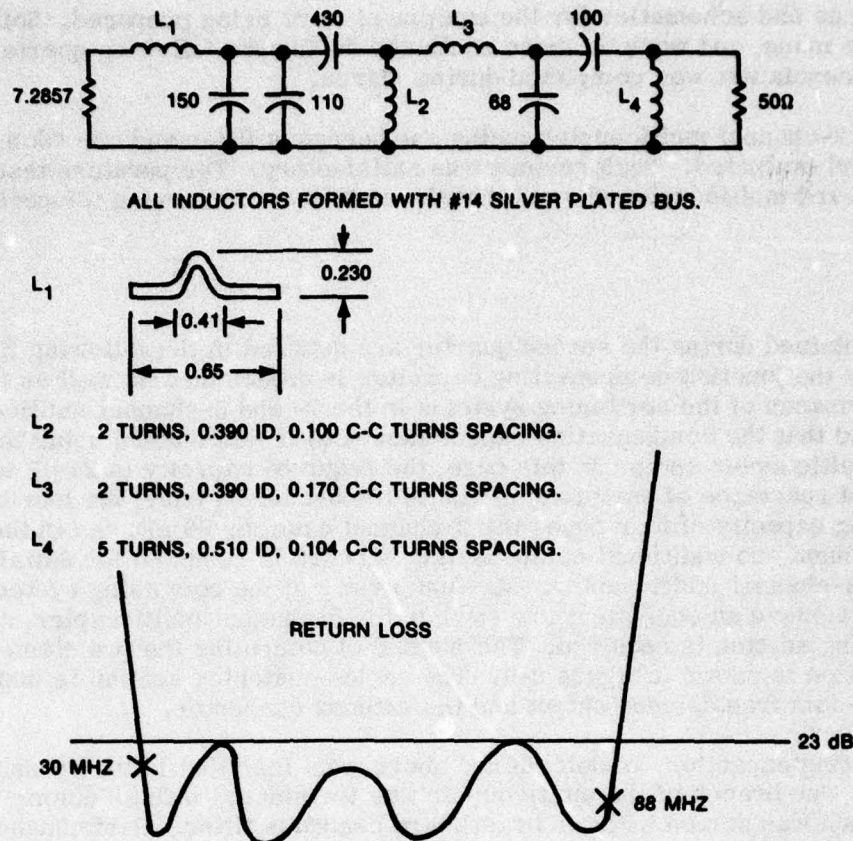


Figure 2-7. Broadband Transformer, Final Values and Measured Performance.

Evaluation of the brassboard filter was completed. Back impedance data taken on the brassboard filter allowed determination of the junction compensating capacitors for the 2- and 5-channel multicouplers. Design of the reactance cancellation network for the 5-channel multicoupler was also accomplished. The back impedance data also allowed the design of the "dummy" filter to be completed.

Satisfactory tracking of the 90-degree discriminator up to 88 MHz was verified, using the brassboard filter. Trial capacitor drive and knob lock assemblies were constructed and evaluated. Performance of these assemblies was satisfactory.

All electrical parts for the construction of the engineering models were received with the exception of the panel meter. This item was due the third-quarter report period. All fabrication drawings for the bandpass filter, "dummy" filter, and multicouplers were completed. All mechanical parts were fabricated for the engineering models with the exception of the bandpass filter chassis and the multicoupler mounting bases. These items were completed during the third-quarter report period.

Fabrication drawings for the 2- and 5-channel multicoupler transit cases were completed. These drawings were sent to the vendor for comments and quotes.

Outline drawings and schematics for the equipment were being prepared. Some assembly drawings were made, and work on these continued during the following quarter. Request for equipment nomenclature was completed during March.

A brassboard 2-channel multicoupler (using one bandpass filter and one "dummy" filter) was constructed and evaluated. Performance was satisfactory. Temperature tests performed on the brassboard multicoupler showed that the stability with varying temperature was excellent.

2.2.2 Results

The results obtained during the second quarter are detailed in the following figures. Figure 2-8 shows how the junction compensating capacitor is determined as well as the expected overall performance of the combining systems in the 2- and 5-channel multicouplers. It should be noted that the compensating capacitance (C_T) is determined using the 2-channel brassboard multicoupler setup. In this case, the required capacity is 24 pF to equalize the off-channel reactance of one branch; thus in the 5-channel case, the four branches require a compensating capacity of four times the 2-channel case, or 96 pF. As in the case of the Phase II equipment, no additional compensating network is required for satisfactory performance in the 2-channel multicoupler. Maximum vswr of the combining system is estimated at 1.16:1. To achieve an equivalent low vswr in the 5-channel multicoupler, an additional series-matching section is required. The method of computing the two elements for the additional section is shown in figure 2-9. The series-matching section is installed between the 7.2857/50-ohm transformer output and the antenna connector.

The compensating capacitor, as determined above, was installed in the brassboard 2-channel multicoupler. One branch of the multicoupler was terminated with a "dummy" filter, and the other branch was driven with the brassboard bandpass filter. Performance data taken on this configuration is shown in table 2-1. This data is from transceiver-port to antenna-port because only one brassboard bandpass filter was constructed. The results are in good agreement with the Phase II equipment performance data. In fact, the insertion loss data is now slightly better due to more iterations in the design of the bandpass filter's coupling structures to achieve a good match over the operating frequency range. Table 2-2 shows the variation in insertion loss and center frequency as the brassboard multicoupler was subjected to the specified operating temperature range. Insertion loss varied ± 0.1 dB with temperature, being 0.1 dB higher at elevated temperature and 0.1 dB lower at low temperature as compared to the room temperature value. This variation is caused by a change in conductivity of the metals forming the helical resonator and tuning capacitor. Center frequency drift did not exceed 63 kHz. The temperature tests were performed at 30 MHz where worst-case frequency drift occurs. At higher operating frequencies, the helix stability determines the center frequency variation with temperature. Exhaustive testing on the Phase II equipment has shown that the helical resonator portion of the tuned tank circuit is more stable with temperature than the variable tuning capacitor.

Schematics showing all element values for the Phase III equipment are shown in figures 2-10 through 2-15.

MEASURED DATA: 2-CHANNEL MULTICOUPLER

THE VALUE OF THE COMPENSATING CAPACITOR (C_r) IS DETERMINED EXPERIMENTALLY. THE CORRECT VALUE IS THAT WHICH EQUALIZES THE MAGNITUDE OF THE OFF-CHANNEL REACTANCE AT THE BAND EDGES (30 AND 88 MHZ).

FOR: $C_r = 24 \text{ pF}$, $X_T \text{ 30 MHZ} = X_T \text{ 88 MHZ} = 48 \text{ OHMS}$

2-CHANNEL MULTICOUPLER:

THE 2-CHANNEL MULTICOUPLER REQUIRES NO ADDITIONAL MATCHING NETWORK. THE NETWORK CONSISTS OF THE COMPENSATING CAPACITOR AND THE 7.2857 - 50 OHM TRANSFORMER. THE PERFORMANCE CAN BE ESTIMATED AS:

$n = 1$, $r = 7.2857 \text{ OHMS}$, $X_T = 48 \text{ OHMS}$

$$\therefore \delta = \frac{|X_T|}{(1)r} = \frac{48}{7.2857} = 6.58825$$

$$H = \frac{\delta^2 + \delta\sqrt{\delta^2 + 1} + 1}{2\delta\sqrt{\delta^2 + 1}} = \frac{43.40501 + 43.90216 + 1}{87.80433} = 1.005727$$

$$\text{MAX INSERTION LOSS RIPPLE } (L_{A_{\text{max}}}) = 10 \log_{10} H = 0.0248 \text{ dB}$$

$$\text{MAX VSWR} = 2H - 1 + 2\sqrt{H(H-1)} = 1.163:1$$

5-CHANNEL MULTICOUPLER:

THE 5-CHANNEL MULTICOUPLER REQUIRES AN ADDITIONAL SECTION FOR GOOD PERFORMANCE.

$$C_r = 4C_{r_{2\text{-channel}}} = 96 \text{ pF}$$

THE NETWORK CONSISTS OF THE COMPENSATING CAPACITOR, THE 7.2857-50 OHM TRANSFORMER, AND THE ADDITIONAL MATCHING SECTION. THE PERFORMANCE IS FOUND AS:

$n = 2$, $r = 7.2857 \text{ OHMS}$, $X_T = 48 \text{ OHMS}$

$$\therefore \delta = \frac{|X_T|}{(4)r} = \frac{48}{(4)(7.2857)} = 1.64706$$

$$H = \frac{(\delta^2 + \delta\sqrt{\delta^2 + 1} + 1)^2}{4\delta(\delta^2 + 1)^{3/2}} = \frac{(2.71281 + 3.17366 + 1)^2}{47.13276} = 1.006168$$

$$\text{MAX INSERTION LOSS RIPPLE } (L_{A_{\text{max}}}) = 10 \log_{10} H = 0.0267 \text{ dB}$$

$$\text{MAX VSWR} = 2H - 1 + 2\sqrt{H(H-1)} = 1.170:1$$

Figure 2-8. Calculated Matching Network Performance.

5-CHANNEL MULTICOUPLER

CALCULATION OF ELEMENT VALUES FOR ADDITIONAL MATCHING SECTION.

$n = 2$, $\delta = 1.64706$, $H = 1.006168$, $f_1 = 30$ MHZ, $f_2 = 88$ MHZ, $R = 50$ OHMS.

$$d = \left[\frac{\sqrt{\frac{1}{H-1}} + \sqrt{\frac{H}{H-1}}}{n} \right] = \sinh \left[\frac{(12.73291 + 12.77212)}{2} \right]$$

$$= \sinh 1.619438 = 2.42612$$

$$D = \frac{d}{\delta \sin \frac{\pi}{2n}} - 1 = \frac{2.42612}{1.64706 \sin \frac{\pi}{4}} - 1 = 1.08314$$

$$\text{LETTING: } g_0 = 1, \omega_1^1 = 1$$

$$g_1 = \frac{1}{\delta} = \frac{1}{1.64706} = 0.607142$$

$$f_0 = \sqrt{f_1 f_2} = \sqrt{(30)(88)} = 51.38093 \text{ MHZ} \quad \omega_0 = 0.322836 \times 10^9 \text{ RAD/SEC}$$

$$\omega = \frac{f_2 f_1}{f_0} = \frac{58}{51.38093} = 1.128823$$

$$k_{12} = \sqrt{\frac{1 + (1 + D^2)^2}{2}} = \sqrt{\frac{1 + (2.17319)(2.71261)}{2}} = 1.85680$$

$$g_2 = \frac{1}{g_1 (k_{12})^2} = 0.47772, \quad g_3 = \frac{1}{D \delta g_2} = 1.17335$$

$$X_L = X_C = \frac{\omega_1^1 g_2 R}{\omega} = \frac{(0.47772)(50)}{1.128823} = 21.16008 \text{ OHMS}$$

$$L = \frac{X_L}{\omega_0} = \frac{21.16008}{0.322836} = 65.544 \text{ nH}$$

$$C = \frac{1}{X_C \omega_0} = \frac{1000}{(21.16008)(0.322836)} = 146.386 \text{ pF}$$

Figure 2-9. Matching Section Element Determination.

Table 2-1. Test Data, Brassboard 2-Channel Multicoupler (27 March 78).

FREQUENCY (MHz)	INSERTION LOSS (dB)	f + 3 dB (MHz)	f - 3 dB (MHz)	f _o + 5% (dB)	f _o - 5% (dB)	3-dB BW (MHz)	RETURN LOSS (dB)	VSWR
30	1.3	30.417	29.572	39.0	42.7	0.845	30.0	1.065:1
35	1.3	35.505	34.521	38.8	41.5	0.984	22.0	1.173:1
40	1.3	40.562	39.424	39.2	41.6	1.138	18.0	1.288:1
45	1.2	45.651	44.361	39.0	41.9	1.290	20.0	1.222:1
50	1.1	50.738	49.292	38.5	41.8	1.446	24.0	1.135:1
55	1.1	55.783	54.167	38.8	40.8	1.616	24.0	1.135:1
60	1.1	60.920	59.135	38.8	41.0	1.785	21.0	1.196:1
65	1.3	65.970	64.022	39.6	41.1	1.948	18.0	1.228:1
70	1.3	71.047	68.928	39.3	41.4	2.119	17.0	1.329:1
75	1.2	76.155	73.853	38.1	41.2	2.302	18.0	1.288:1
80	1.1	81.222	78.739	37.6	40.2	2.483	22.0	1.173:1
85	1.0	86.271	83.631	37.8	39.3	2.640	36.0	1.032:1
88	1.0	89.370	86.603	38.1	39.3	2.767	33.0	1.046:1

Table 2-2. Brassboard Multicoupler Temperature Test Data (27 March 78).

TEST CONDITION	INSERTION LOSS (dB)	f ₁ , LOWER 3-dB FREQUENCY (MHz)	f ₂ , UPPER 3-dB FREQUENCY (MHz)	*f _o (MHz)
Start, +24 °C	1.3	29.578	30.424	30.001
Stabilized, -46 °C	1.2	29.639	30.488	30.064
Stabilized, +71 °C	1.4	29.556	30.416	29.986
Finish, +24 °C	1.3	29.602	30.445	30.024
$*f_o = \frac{f_1 + f_2}{2}$				

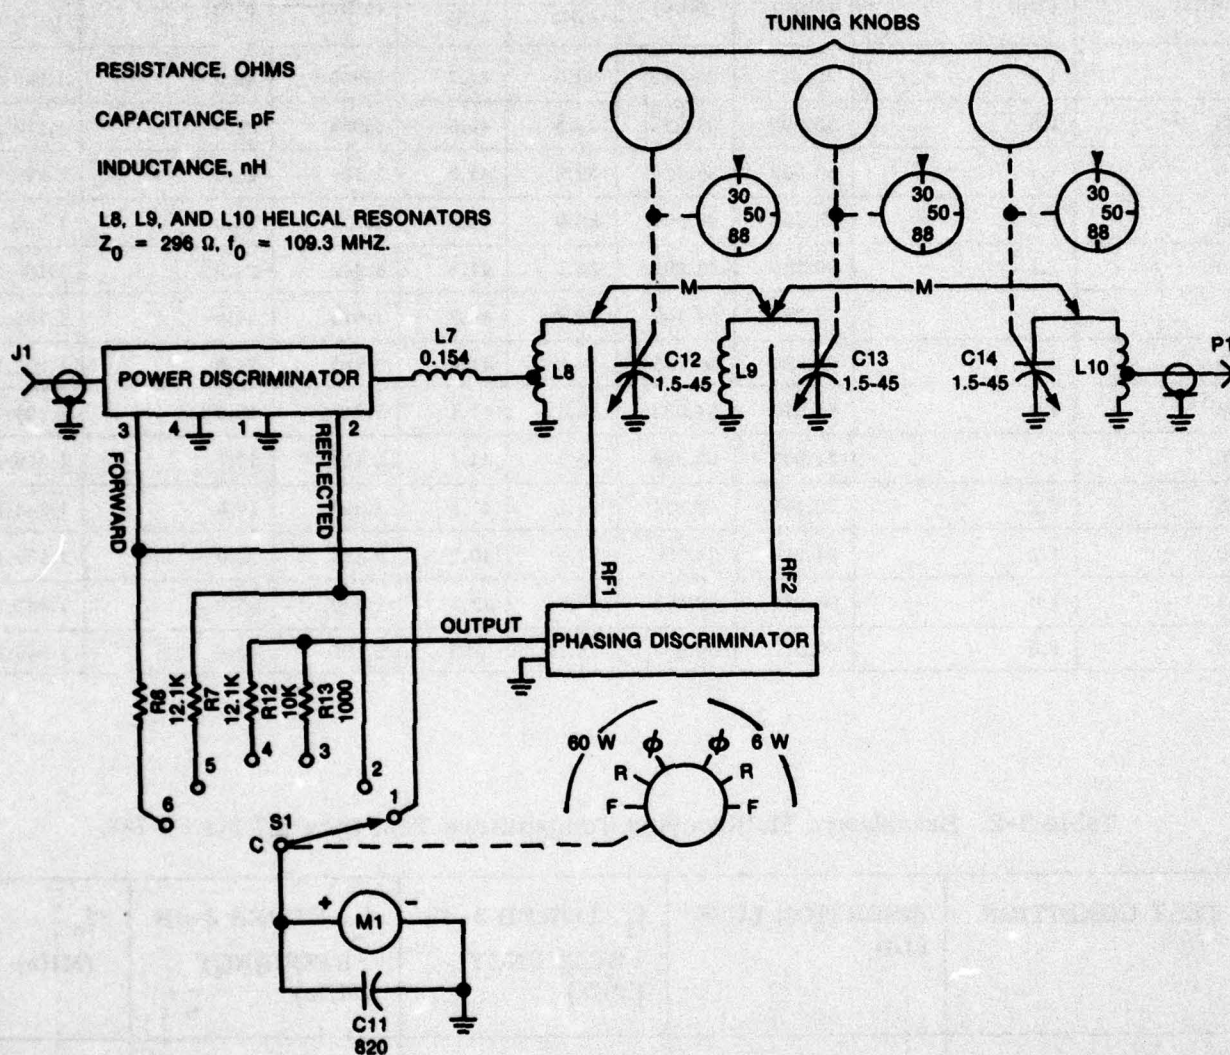


Figure 2-10. Schematic, Bandpass Filter.

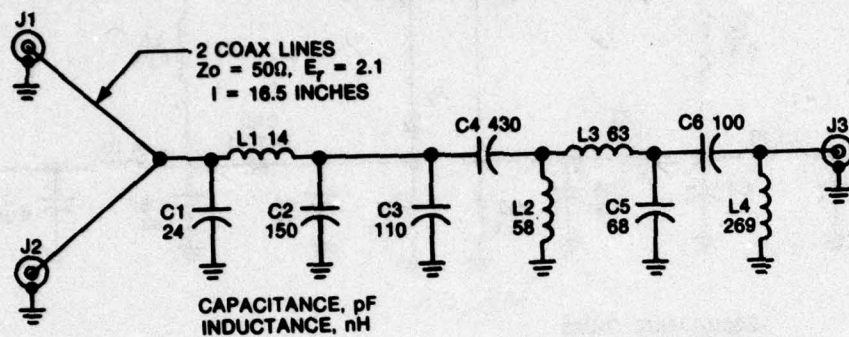


Figure 2-13. Schematic, 2-Channel Combining Network.

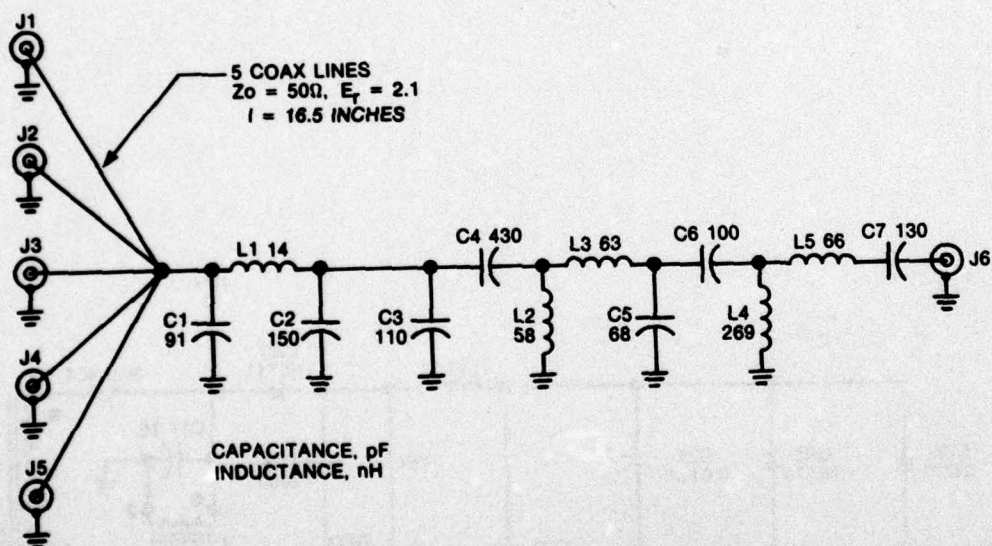


Figure 2-14. Schematic, 5-Channel Combining Network.




Figure 2-15. Schematic, Filter Simulator.

2.3 Third-Quarter Report Period

2.3.1 Status

During this report period, effort continued on the basic design of the multicouplers to incorporate the desired changes. The changes included increasing the operating frequency range to 88 MHz, revising the capacitor drive assemblies to a single-speed drive with a separate knob lock, providing dial windows and front panel sealing, improving mounting and vibration performance, and providing fixed detent meter function switching.

Construction and bench testing of the engineering evaluation equipment was completed. This equipment included three bandpass filters, three filter simulators, one 2-channel mounting base, one 5-channel mounting base, and transit cases for both the 2- and 5-channel multicouplers.

All fabrication drawings and purchased parts lists were completed and released to the Manufacturing Department. Procurement of parts for the construction of the deliverable equipment began.

2.3.2 Results

The results obtained during the third quarter are detailed in the following tables. Tables 2-3 through 2-5 show the performance data for the three bandpass filters. Data for each filter is taken in the 2-channel multicoupler base with the unused multicoupler port terminated in a filter simulator. The data is from transceiver-port to antenna-port in this case. Performance of the engineering models is in good agreement with the brassboard model described in the last quarterly report. Insertion loss is lower than the Phase II equipment due to more iterations in the design of the coupling structures of the bandpass filter, achieving a good match over the operating frequency range.

Table 2-6 shows some transceiver-port-to-transceiver-port attenuation data. Again, these tests were performed in the 2-channel base with all possible combinations of the three bandpass filters, as shown. The attenuation is approximately 46 dB. This is 6 dB better than the specified limit but is about 5 dB less than that obtained with the Phase II equipment. The reason for this decreased isolation is the fact that the interconnect lines in the mounting base are shorter on the Phase III equipment. The shorter lines are necessary to extend the operating frequency range upper limit from 80 to 88 MHz.

The bandpass filters of both designs give the same attenuation, but the added attenuation contributed by the combining system is less for the Phase III equipment because of the increased operating frequency range.

Also during this report period, some investigations have been conducted with the aim of improving the operation of the 5-channel multicoupler or any higher-channel multicoupler requiring additional Fano matching. In the prior equipment, each communications channel of the 5-channel multicoupler had slightly poorer performance than a communications channel in a 2-channel multicoupler. This occurred despite the theory which predicted that a 5-channel multicoupler's performance (with one stage of Fano matching) should be nearly the same as a 2-channel multicoupler (with no Fano matching).

The reason for this performance difference has been traced to the method of implementing the Fano matching circuitry. Figure 2-16 (a) shows the prior method where the series compensating network was implemented at the 50-ohm side of the lumped transformer. This location was chosen because it reduced component size. It has been found, however, that the

Table 2-3. Test Data, Engineering Filter #1 (25 July 78).

FREQUENCY (MHz)	INSERTION LOSS (dB)	f - 3 dB (MHz)	f + 3 dB (MHz)	f _o - 5% (dB)	f _o + 5% (dB)	3-dB BW (MHz)	RETURN LOSS (dB)	VSWR
30	1.45	29.566	30.313	40.8	38.5	0.827	22.5	1.162
40	1.30	39.428	40.536	40.1	39.6	1.108	30.0	1.065
50	1.10	49.287	50.692	40.2	39.2	1.405	29.0	1.074
60	1.10	59.087	60.813	39.6	39.4	1.726	30.0	1.065
70	1.25	68.934	71.001	39.7	39.0	2.067	28.0	1.083
80	1.20	78.735	81.154	39.3	38.8	2.419	27.0	1.094
88	1.20	86.625	89.339	39.2	38.9	2.714	21.5	1.184

Table 2-4. Test Data, Engineering Filter #2 (25 July 78).

FREQUENCY (MHz)	INSERTION LOSS (dB)	f - 3 dB (MHz)	f + 3 dB (MHz)	f _o - 5% (dB)	f _o + 5% (dB)	3-dB BW (MHz)	RETURN LOSS (dB)	VSWR
30	1.40	29.573	30.414	40.9	37.8	0.841	29.0	1.074
40	1.30	39.433	40.565	40.0	38.8	1.132	24.0	1.135
50	1.10	49.263	50.691	40.1	38.8	1.428	27.0	1.094
60	1.10	59.076	60.833	39.3	38.8	1.757	25.0	1.119
70	1.25	68.903	71.016	39.0	38.3	2.113	21.0	1.196
80	1.20	78.730	81.193	38.9	38.0	2.463	27.0	1.094
88	1.10	86.586	89.349	39.6	38.6	2.763	31.0	1.058

Table 2-5. Test Data, Engineering Filter #3 (27 July 78).

FREQUENCY (MHz)	INSERTION LOSS (dB)	f - 3 dB (MHz)	f + 3 dB (MHz)	f _o - 5% (dB)	f _o + 5% (dB)	3-dB BW (MHz)	RETURN LOSS (dB)	VSWR
30	1.40	29.586	30.413	41.1	37.7	0.827	24.0	1.135
40	1.30	39.445	40.556	40.3	38.9	1.111	23.0	1.152
50	1.20	49.255	50.658	40.2	39.2	1.403	28.0	1.083
60	1.20	59.105	60.825	39.9	39.0	1.720	27.5	1.088
70	1.30	68.940	71.002	39.7	38.7	2.062	24.0	1.135
80	1.30	78.782	81.190	39.7	38.4	2.408	31.0	1.058
88	1.20	86.623	89.317	39.3	38.8	2.694	25.0	1.119


Table 2-6. Test Data, Transceiver-Port-To-Transceiver-Port Attenuation (27 July 78).

ENGINEERING FILTER NUMBER	RESONANT FREQUENCY (MHz)	ATTENUATION (dB)
1 2	30.0 31.5	47.4
1 2	60.0 63.0	46.2
1 2	80.0 84.0	45.7
1 2	30.0 31.5	47.1
1 3	60.0 63.0	46.8
1 3	80.0 84.0	46.7
2 3	30.0 31.5	47.1
2 3	60.0 63.0	46.9
2 3	80.0 84.0	46.2


reactive mismatch component introduced at the 7-ohm point in the circuit is not properly transformed by the lumped transformer in a manner suitable for cancellation by the series network. Implementing the series network at the 7-ohm point (figure 2-16 (b)) cancels the reactive mismatch prior to the impedance transformation. This results in improved performance comparable to that obtained in the 2-channel multicoupler. The new implementation requires two capacitors in parallel because of the higher current at the 7-ohm interface. The new design has been incorporated into the present 5-channel multicoupler.

Effort has continued during this report period on improving and finalizing the knob lock design. Operation has been improved by slightly modifying the shape of the locking cam surface. Failure to lock due to material stretching has been eliminated by employing high-tensile-strength steel in the tuning shaft clamp piece. Difficult accessibility (tuning knob closest to the mounting surface) has been improved by redesigning the lever location and style as shown in figure 2-17.

Results of the transit case evaluations required a minor revision to the foam inserts in the 5-channel case. The 2-channel transit case was satisfactory as received from the vendor.

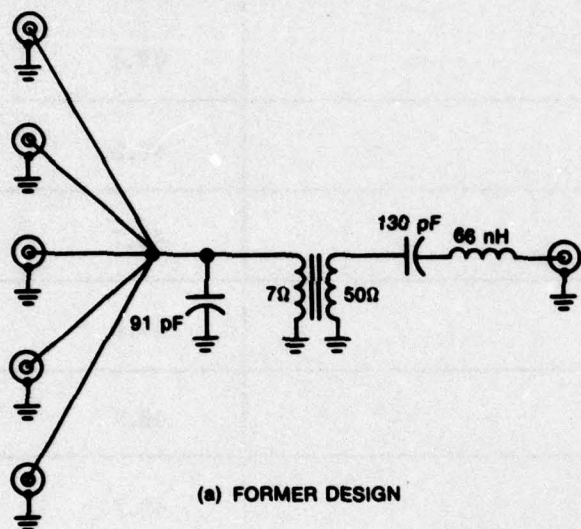


(a) FORMER DESIGN

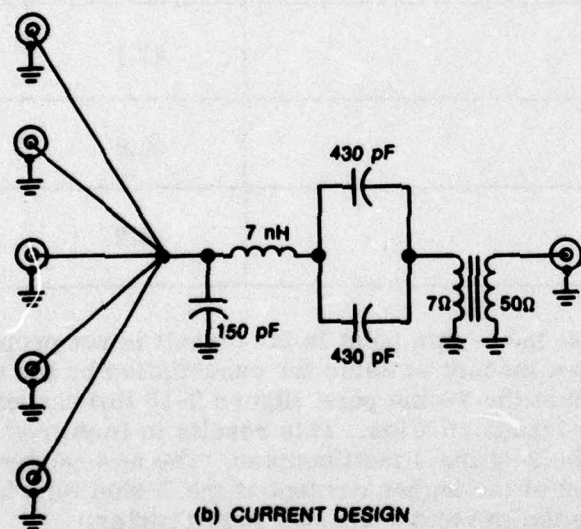


(b) CURRENT DESIGN

Figure 2-16. Matching Network Configurations (5-Channel).

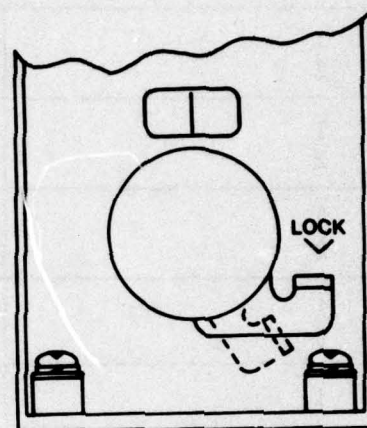

(A)
FORMER DESIGN

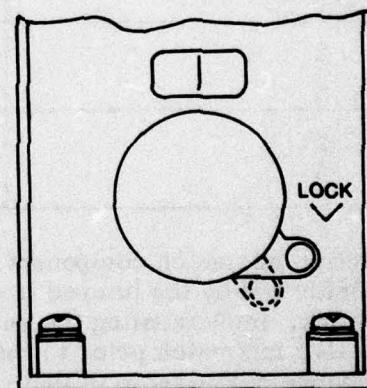

(B)
CURRENT DESIGN

Figure 2-17. Knob Lock Configuration.

2.4 Fourth-Quarter Report Period

2.4.1 Status

During this report period, effort was completed on the incorporation of the desired design changes. Engineering cognizance was transferred from the HF Products Department to the LOS Products Department.

The Design Phase of the program was completed. All drawings and schematics were completed and released to Manufacturing.

Engineering cognizance was transferred to the Filter/Multicoupler Group of the LOS Products Department. This equipment transfer will allow a greater concentration of company resources toward the continuing success of the multicoupler program.

2.4.2 Results

There were no technical results to report this period.

2.4.3 Plan

All of the items scheduled for completion last quarter have been accomplished with the exception of the limited environmental testing. This item will be completed during the following quarter.

October: Continue procurement of parts for deliverable equipment.

November: Complete limited environmental testing on engineering equipment (temperature and vibration).

December: Provide engineering assistance to Manufacturing and other support areas.

DISTRIBUTION LIST

101	DEFENSE DOCUMENTATION CENTER ATTN: DDC-TCA CAMERON STATION (BLDG 5) ALEXANDRIA, VA 22314	205	DIRECTOR NAVAL RESEARCH LABORATORY ATTN: CODE 2627 WASHINGTON, DC 20375
102	DIRECTOR NATIONAL SECURITY AGENCY ATTN: TDL FORT GEORGE G. MEADE, MD 20755	206	COMMANDER NAVAL ELECTRONICS LABORATORY CENTER ATTN: LIBRARY SAN DIEGO, CA 92152
103	CODE R123, TECH LIBRARY DCA DEFENSE COMM ENGRG CTR 1860 MIEHLE AVE RESTON, VA 22090	207	GDR, NAVAL SURFACE WEAPONS CENTER WHITE OAK LABORATORY ATTN: LIBRARY, CODE MX-21 SILVER SPRING, MD 20910
104	DEFENSE COMMUNICATIONS AGENCY TECHNICAL LIBRARY CENTER CODE 205 (P. A. TOLOV1) WASHINGTON, DC 20305	210	COMMANDANT, MARINE CORPS HQ, US MARINE CORPS ATTN: CODE LMC WASHINGTON, DC 20380
200	OFFICE OF NAVAL RESEARCH CODE 427 ARLINGTON, VA 22217	211	HQ, US MARINE CORPS ATTN: CODE INIS WASHINGTON, DC 20380
203	GIDEP ENGINEERING & SUPPORT DEPT TE SECTION PO BOX 398 MORCO, CA 91760	212	COMMAND, CONTROL & COMMUNICATIONS DIV DEVELOPMENT CENTER MARINE CORPS DEVELOPMENT & EDUC COMD QUANTICO, VA 22134

MAR 06 1979

215	NAVAL TELECOMMUNICATIONS COMMAND TECHNICAL LIBRARY, CODE 91L 4401 MASSACHUSETTS AVENUE, NW 001 WASHINGTON, DC 20390	314	HQ, AIRFORCE SYSTEMS COMMAND ATTN: DLCA ANDREWS AFB 001 WASHINGTON, DC 20331
217	NAVAL AIR SYSTEMS COMMAND CODE: AIR-5332 004 WASHINGTON, DC 20360	403	CDR, MIRCOT REDSTONE SCIENTIFIC INFO CENTER ATTN: CHIEF, DOCUMENT SECTION 002 REDSTONE ARSENAL, AL 35809
300	AUL/LSE 64-285 001 MAXWELL AFB, AL 36112	406	COMMANDANT US ARMY AVIATION CENTER ATTN: ATZO-D-MA 003 FORT RUCKER, AL 36364
301	ROME AIR DEVELOPMENT CENTER ATTN: DOCUMENTS LIBRARY (TILD) 001 GRIFFISS AFB, NY 13441	408	COMMANDANT US ARMY MILITARY POLICE SCHOOL ATTN: ATSI-CD-M-C 003 FORT MCCLELLAN, AL 36201
304	AIR FORCE GEOPHYSICS LAB L. G. HANSCOM AFB ATTN: LIR 001 BEDFORD, MA 01730	417	COMMANDER US ARMY INTELLIGENCE CENTER & SCHOOL ATTN: ATSI-CD-MD 002 FORT HUACHUCA, AZ 85613
307	AFG/SULL S-29 001 HANSCOM AFB, MA 01731	418	COMMANDER HQ FORT HUACHUCA ATTN: TECHNICAL REFERENCE DIV 001 FORT HUACHUCA, AZ 85613
312	HQ, AIR FORCE ELECTRONIC WARFARE CENTER ATTN: SURP 002 SAN ANTONIO, TX 78243		

419	COMMANDER US ARMY ELECTRONIC PROVING GROUND ATTN: STEEP-MT FORT HUACHUCA, AZ 85613	473	COMMANDANT US ARMY ORDNANCE & CHEMICAL CENTER ATTN: ATSL-CD-OR ABERDEEN PROVING GROUND, MD 21005
420	COMMANDER USASA TEST & EVALUATION CENTER ATTN: IAO-CDR-T FORT HUACHUCA, AZ 85613	475	CDR, HARRY DIAMOND LABORATORIES ATTN: LIBRARY 2800 POWDER MILL ROAD ADELPHI, MD 20783
432	DIR, US ARMY AIR MOBILITY R&D LAB ATTN: T. GOSSETT, BLDG 207-5 NASA AMES RESEARCH CENTER MOFFETT FIELD, CA 94035	477	DIRECTOR US ARMY BALLISTIC RESEARCH LABS ATTN: DRXR-LB ABERDEEN PROVING GROUND, MD 21005
436	HQDA(DAMO-TCE) WASHINGTON, DC 20310	478	DIRECTOR US ARMY BALLISTIC RESEARCH LABS ATTN: DRXBR-CA (DR. L. VANDEKIEFT) ABERDEEN PROVING GROUND, MD 21005
437	DEPUTY FOR SCIENCE & TECHNOLOGY OFFICE, ASSIST SEC ARMY (R&D) WASHINGTON, DC 20310	479	DIRECTOR US ARMY HUMAN ENGINEERING LABS ABERDEEN PROVING GROUND, MD 21005
438	HQDA(DAMA-ARZ-D/DR. F. D. VERDERAME) WASHINGTON, DC 20310	482	DIRECTOR US ARMY MATERIEL SYSTEMS ANALYSIS ACTY ATTN: DRXS-T ABERDEEN PROVING GROUND, MD 21005
470	DIRECTOR OF COMBAT DEVELOPMENTS US ARMY ARMOR CENTER ATTN: ATZK-CD-MS FORT KNOX, KY 40121		

483 DIRECTOR
US ARMY MATERIEL SYSTEMS ANALYSIS ACTY
ATTN: DRXSY-MP
001 ABERDEEN PROVING GROUND, MD 21005

504 CHIEF, CERCOM AVIATION ELECTRONICS OFFICE
ATTN: DRSEL-MME-LAE(2)
001 ST LOUIS, MO 63166

507 CDR, AVRADCOM
ATTN: DRSAY-E
PO BOX 209
001 ST. LOUIS, MO 63166

512 COMMANDER
PICATINNY ARSENAL
ATTN: SARPA-ND-A-4 (BLDG. 95)
001 DOVER, NJ 07801

514 DIRECTOR
JOINT COM4 OFFICE (TRI-TAC)
ATTN: TT-AD(TECH DOCU CEN)
001 FORT MONMOUTH, NJ 07703

515 PROJECT MANAGER, REMBASS
ATTN: DRCPM-RBS
002 FORT MONMOUTH, NJ 07703

516 PROJECT MANAGER, NAVCON
ATTN: DRCPM-NC-TH
BLDG 2539
001 FORT MONMOUTH, NJ 07703

517 COMMANDER
US ARMY SATELLITE COMMUNICATIONS AGCY
ATTN: DRCPM-SC-3
001 FORT MONMOUTH, NJ 07703

518 TRI-TAC OFFICE
ATTN: TT-SE (DR. PRITCHARD)
001 FORT MONMOUTH, NJ 07703

519 CDR, US ARMY AVIONICS LAB
AVRADCOM
ATTN: DAVAA-D
001 FORT MONMOUTH, NJ 07703

531 CDR, US ARMY RESEARCH OFFICE
ATTN: DRXRO-IP
PO BOX 12211
001 RESEARCH TRIANGLE PARK, NC 27709

533 COMMANDANT
US ARMY INST FOR MILITARY ASSISTANCE
ATTN: ATSU-CTD-MO
001 FORT BRAGG, NC 28307

536 COMMANDER
US ARMY ARCTIC TEST CENTER
ATTN: STEAC-TD-MI
002 APO SEATTLE 98733

537 CDR, US ARMY TROPIC TEST CENTER
ATTN: STEIC-MO-A (TECH LIBRARY)
DRAWER 942
001 FORT CLAYTON, CANAL ZONE 09827

542 COMMANDANT
US ARMY FIELD ARTILLERY SCHOOL
ATTN: ATSPA-CTD
002 FORT SILL, OK 73503

554 COMMANDANT
US ARMY AIR DEFENSE SCHOOL
ATTN: ATSA-CD-MC
001 FORT BLISS, TX 79916

555 COMMANDER
US ARMY NUCLEAR AGENCY
001 FORT BLISS, TX 79916

563 COMMANDER, DARCOM
ATTN: DRCDE
5001 EISENHOWER AVE
001 ALEXANDRIA, VA 22333

564 CDR, US ARMY SIGNALS WARFARE LAB
ATTN: DELSM-OS
VINT HILL FARMS STATION
001 WARRENTON, VA 22186

566 CDR, US ARMY SIGNALS WARFARE LAB
ATTN: DELSM-AQ
VINT HILL FARMS STATION
001 WARRENTON, VA 22186

572 COMMANDER
US ARMY LOGISTICS CENTER
ATTN: ATCL-MC
002 FORT LEE, VA 22801

575 COMMANDER
US ARMY TRAINING AND DOCTRINE COMMAND
ATTN: ATCD-TEC
001 FORT MONROE, VA 23651

577 COMMANDER
US ARMY TRAINING AND DOCTRINE COMMAND
ATTN: ATCD-TM
001 FORT MONROE, VA 23651

578 CDR, US ARMY GARRISON
VINT HILLS FARMS STATION
ATTN: IAVAF
001 WARRENTON, VA 22186

602 DIRECTOR, NIGHT VISION LABORATORY
US ARMY ELECTRONICS COMMAND
ATTN: DRSEL-NV-D
001 FORT BELVOIR, VA 22060

603 CDR/DIR, ATMOSPHERIC SCIENCES LABORATORY
US ARMY ELECTRONICS COMMAND
ATTN: DRSEL-BL-SY-S
001 WHITE SANDS MISSILE RANGE, NM 88002

605 CHIEF, AVIATION ELECTRONICS DIV (SIMO)
US ARMY ELECTRONICS COMMAND
ATTN: DRSEL-SI-AE, PO BOX 209
001 ST. LOUIS, MO 63166

606 CHIEF
INTEL MATERIEL DEV & SUPPORT OFC
ELECTRONIC WARFARE LAB, ECOM
001 FORT MEADE, MD 20755

680 COMMANDER
ERADCOM
000 FORT MONMOUTH, NJ 07703

1 DELEM-D
1 DELCS-D
1 DELET-D
1 DELSD-L
1 DELSD-D
2 DELSD-L-S

681 COMMANDER
CORADCOM
000 FORT MONMOUTH, NJ 07703

1 DRDCO-PPA-S
1 DRDCO-COM-D
1 DRDCO-TCS-B
13 DRDCO-COM-RN-1

682 COMMANDER
CERCOM
000 FORT MONMOUTH, NJ 07703

1 DRSEL-PL-ST
1 DRSEL-PA-MP
1 DRSEL-LE-RI
1 DRSEL-PA
1 DRSEL-LE-C

701 MIT - LINCOLN LABORATORY
ATTN: LIBRARY (RM A-082)
PO BOX 73
002 LEXINGTON, MA 02173

703 NASA SCIENTIFIC & TECH INFO FACILITY
BALTIMORE/WASHINGTON INTL AIRPORT
001 PO BOX 8757, MD 21240

705 ADVISORY GROUP ON ELECTRON DEVICES
201 VARICK STREET, 9TH FLOOR
002 NEW YORK, NY 10014

706 ADVISORY GROUP ON ELECTRON DEVICES
ATTN: SECY, WORKING GROUP D (LASERS)
201 VARICK STREET
002 NEW YORK, NY 10014

707 TACTEC
BATTELLE MEMORIAL INSTITUTE
505 KING AVENUE
001 COLUMBUS, OH 43201

710 KETRON, INC.
ATTN: MR. FREDERICK LEUPPERT
1400 WILSON BLVD, ARCHITECT BLDG
002 ARLINGTON, VA 22209

712 R. C. HANSEN, INC.
PO BOX 215
001 TARZANA, CA 91356